

EMC TEST REPORT

FCC ID: 2AUHGPDP5C

Report No. : SSP24040262-1E

Applicant : ARTIKA FOR LIVING INC

Product Name : Colin LED Pendant Lighting

Model Name : PDP-CIP5C-BL

Test Standard : FCC Part 15 Subpart B

Date of Issue : 2024-07-08



Shenzhen CCUT Quality Technology Co., Ltd.

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,
Guangdong, China; (Tel.:+86-755-23406590 website: www.ccuttest.com)

This test report is limited to the above client company and the product model only. It may not be duplicated
without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

Test Report Basic Information

Applicant:	ARTIKA FOR LIVING INC	
Address of Applicant:	1756 50th avenue, Lachine, Qc, Canada H8T 2V5	
Manufacturer:	ZHONGSHAN C5 LIGHTING CO., LTD	
Address of Manufacturer:	1# Henglong Road, Tongyi Industrial Area, Cao San, Guzhen, Zhongshan, Guangdong, China. Z.P 528421	
Product Name:	Colin LED Pendant Lighting	
Brand Name:	-	
Main Model:	PDP-CIP5C-BL	
Series Models:	PDP-CIP5C-XXXXXX	
Test Standard:	FCC Part 15 Subpart B ANSI C63.4-2014	
Date of Test	2024-05-06 to 2024-05-07	
Test Result:	PASS	
Tested By	 (Choco Qiu)	
Reviewed By:	 (Lieber Ouyang)	
Authorized Signatory:	 (Lahm Peng)	
Note : This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

CONTENTS

1. General Information.....5

 1.1 Product Information5

 1.2 Test Setup Information.....5

 1.3 Compliance Standards.....6

 1.4 Test Facilities.....6

 1.5 Measurement Uncertainty.....6

 1.6 List of Test and Measurement Instruments7

2. Summary of Test Results8

3. Conducted Emissions9

 3.1 Standard and Limit.....9

 3.2 Test Procedure.....9

 3.3 Test Data and Results9

4. Radiated Disturbance.....12

 4.1 Standard and Limit.....12

 4.2 Test Procedure.....12

 4.3 Test Data and Results12

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2024-07-08	Initial Release	Lahm Peng

1. General Information

1.1 Product Information

Product Name:	Colin LED Pendant Lighting
Trade Name:	-
Main Model:	PDP-CIP5C-BL
Series Models:	PDP-CIP5C-XXXXXX
Class of Equipment:	☐ Class A ☒ Class B
Highest Internal Frequency:	<108MHz
Rated Voltage:	AC 120V/60Hz
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer. "XXXXXX" can be A to Z and/or 0 to 9 and/or blank (commercial code). Differences in power and control mode	

1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Working	AC 120V/60Hz	
TM2	-	-	
TM3	-	-	
TM4	-	-	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
-	-	-	-
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
-	-	-	-
-	-	-	-
-	-	-	-
The equipment under test (EUT) was configured to measure its highest possible emission and immunity level. The test modes were adapted according to the operation manual for use.			

1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart B	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Unintentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

1.4 Test Facilities

Laboratory Name:	Shenzhen CCUT Quality Technology Co., Ltd. 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No.:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

1.5 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Disturbance	9kHz ~30MHz	±1.64 dB
Radiated Disturbance	30MHz ~ 1GHz	±3.32 dB
Radiated Disturbance	1GHz ~ 18GHz	±3.50 dB

1.6 List of Test and Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Conducted Emissions					
AMN	ROHDE&SCHWARZ	ENV216	101097	2023-10-21	2024-10-20
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2023-07-31	2024-07-30
EMI Test Software	FARA	EZ-EMC	EMEC-3A1+	N/A	N/A
Radiated Emissions					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2023-07-31	2024-07-30
Amplifier	SCHWARZBECK	BBV 9743B	00251	2023-07-31	2024-07-30
Amplifier	HUABO	YXL0518-2.5-45	--	2023-07-31	2024-07-30
Loop Antenna	DAZE	ZN30900C	21104	2023-08-07	2024-08-06
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2023-08-07	2024-08-06
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2023-08-07	2024-08-06
EMI Test Software	FARA	EZ-EMC	FA-03A2 RE+	N/A	N/A

2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.107	Conducted Emissions	Passed
FCC Part 15.109	Radiated Emissions	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

3. Conducted Emissions

3.1 Standard and Limit


According to the rule FCC Part 15.107, Conducted limit, the limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15-0.5	79	66	66 to 56	56 to 46
0.5-5	73	60	56	46
5-30	73	60	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz
 Note 2: The lower limit applies at the band edges

3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

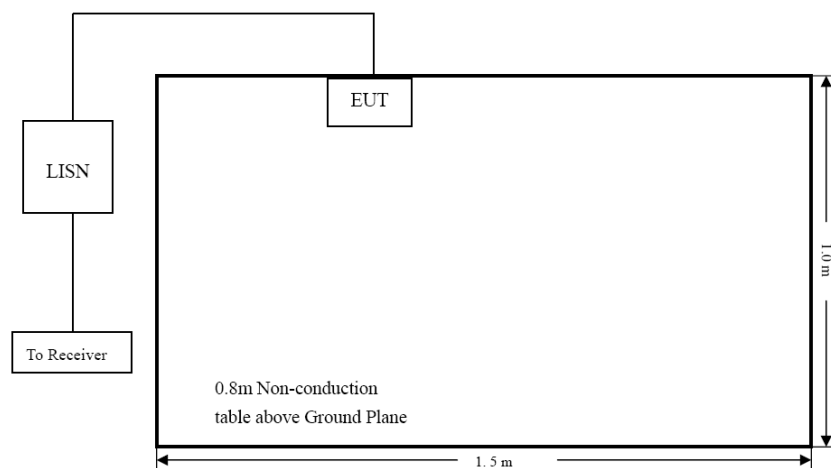

Test Setup Block Diagram

3.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.107 standard limit for a Class B device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Conducted Emissions


Tested Model: PDP-CIP5C-BL

Tested Mode: TM1

Test Voltage: AC 120V/60Hz

Test Power Line: Neutral

Remark:

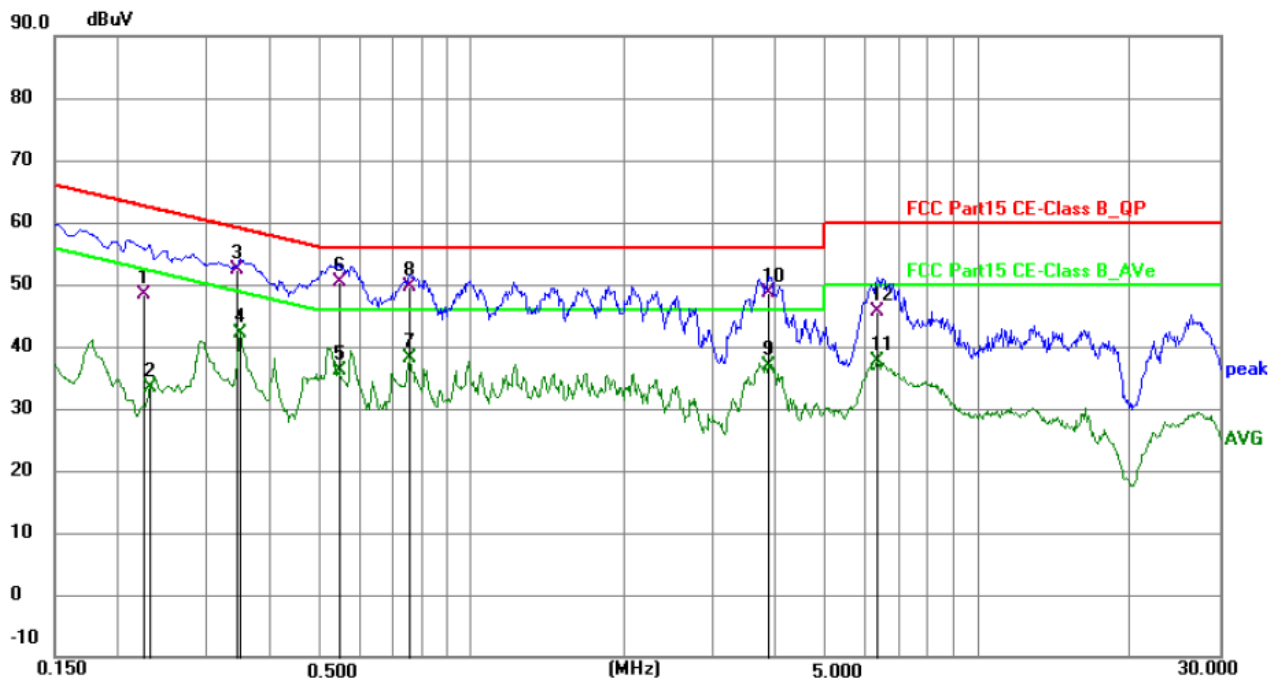

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2247	38.79	9.64	48.43	62.64	-14.21	QP	P	
2	0.2310	23.82	9.64	33.46	52.41	-18.95	AVG	P	
3	0.3463	43.08	9.37	52.45	59.05	-6.60	QP	P	
4	0.3480	32.84	9.36	42.20	49.01	-6.81	AVG	P	
5	0.5460	26.25	9.84	36.09	46.00	-9.91	AVG	P	
6 *	0.5460	40.46	9.84	50.30	56.00	-5.70	QP	P	
7	0.7575	28.42	9.63	38.05	46.00	-7.95	AVG	P	
8	0.7576	39.98	9.63	49.61	56.00	-6.39	QP	P	
9	3.8535	26.75	10.14	36.89	46.00	-9.11	AVG	P	
10	3.8638	38.46	10.14	48.60	56.00	-7.40	QP	P	
11	6.3330	27.40	10.23	37.63	50.00	-12.37	AVG	P	
12	6.3417	35.36	10.23	45.59	60.00	-14.41	QP	P	

Test Plots and Data of Conducted Emissions


Tested Model: PDP-CIP5C-BL

Tested Mode: TM1

Test Voltage: AC 120V/60Hz

Test Power Line: Live

Remark:

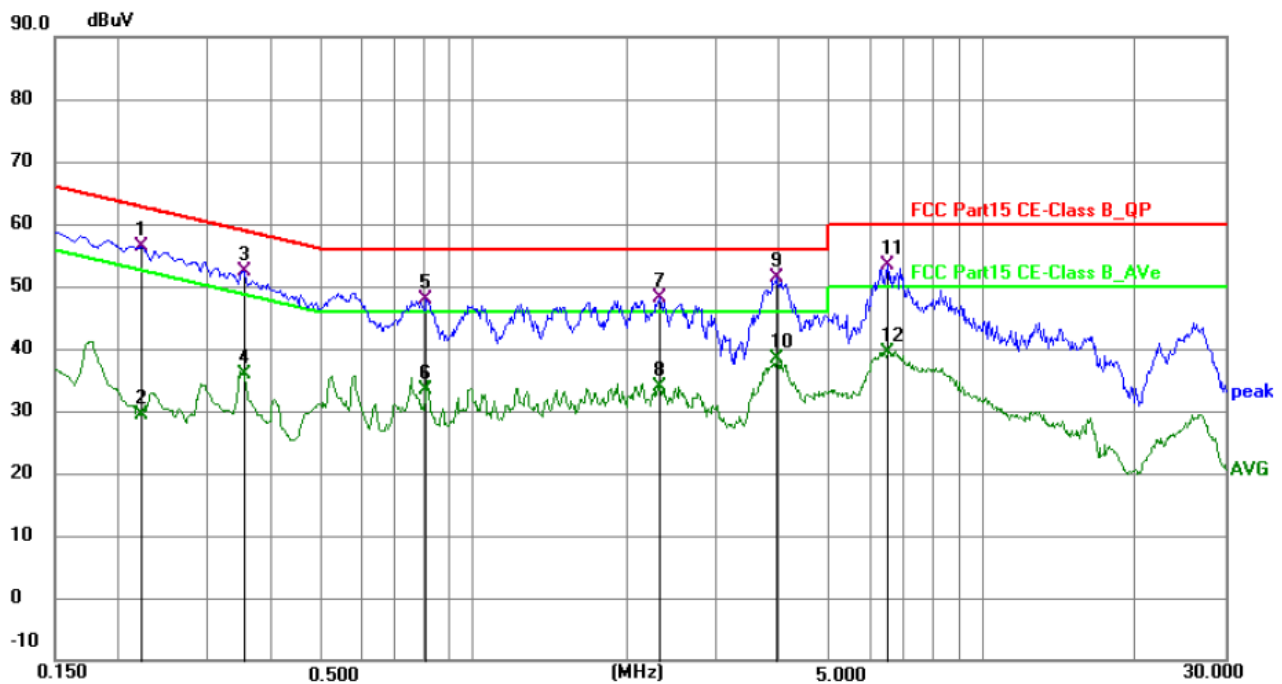

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2220	47.28	9.20	56.48	62.74	-6.26	QP	P	
2	0.2220	20.14	9.20	29.34	52.74	-23.40	AVG	P	
3	0.3525	42.67	9.79	52.46	58.90	-6.44	QP	P	
4	0.3525	26.10	9.79	35.89	48.90	-13.01	AVG	P	
5	0.8070	38.03	9.92	47.95	56.00	-8.05	QP	P	
6	0.8070	23.53	9.92	33.45	46.00	-12.55	AVG	P	
7	2.3280	38.13	10.07	48.20	56.00	-7.80	QP	P	
8	2.3280	23.89	10.07	33.96	46.00	-12.04	AVG	P	
9 *	3.9345	41.35	10.13	51.48	56.00	-4.52	QP	P	
10	3.9345	28.24	10.13	38.37	46.00	-7.63	AVG	P	
11	6.4995	43.08	10.25	53.33	60.00	-6.67	QP	P	
12	6.4995	29.14	10.25	39.39	50.00	-10.61	AVG	P	

4. Radiated Disturbance

4.1 Standard and Limit


According to the rule FCC Part 15.109, Radiated emission limit for a class A and class B device as below:

Frequency of Emission (MHz)	Class A (3m)	Class B (3m)
	Quasi-peak (dBuV/m)	Quasi-peak (dBuV/m)
30-88	50	40
88-216	54.0	43.5
216-960	57.0	46
Above 960	60	54

Note: The more stringent limit applies at transition frequencies.

4.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

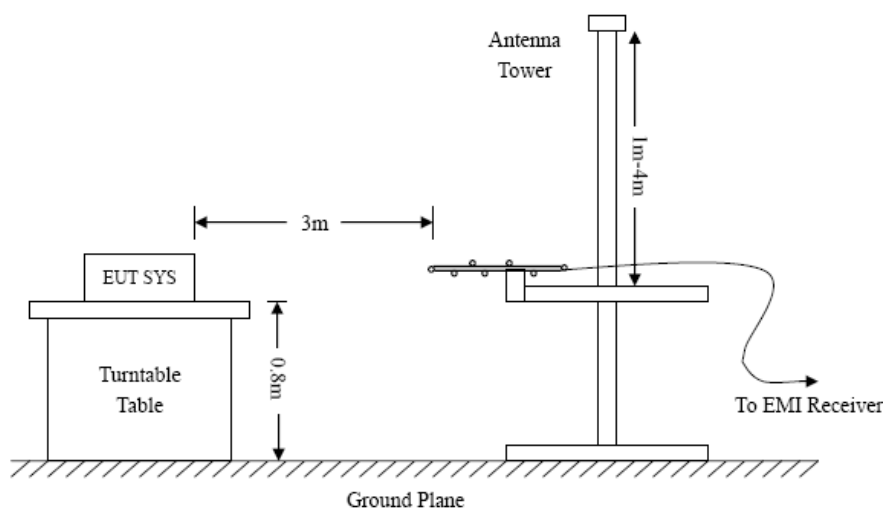

Test Setup Block Diagram


4.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.109 standard limit for a Class B device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Test Plots and Data of Radiated Emissions


Tested Model:	PDP-CIP5C-BL
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Horizontal
Remark:	

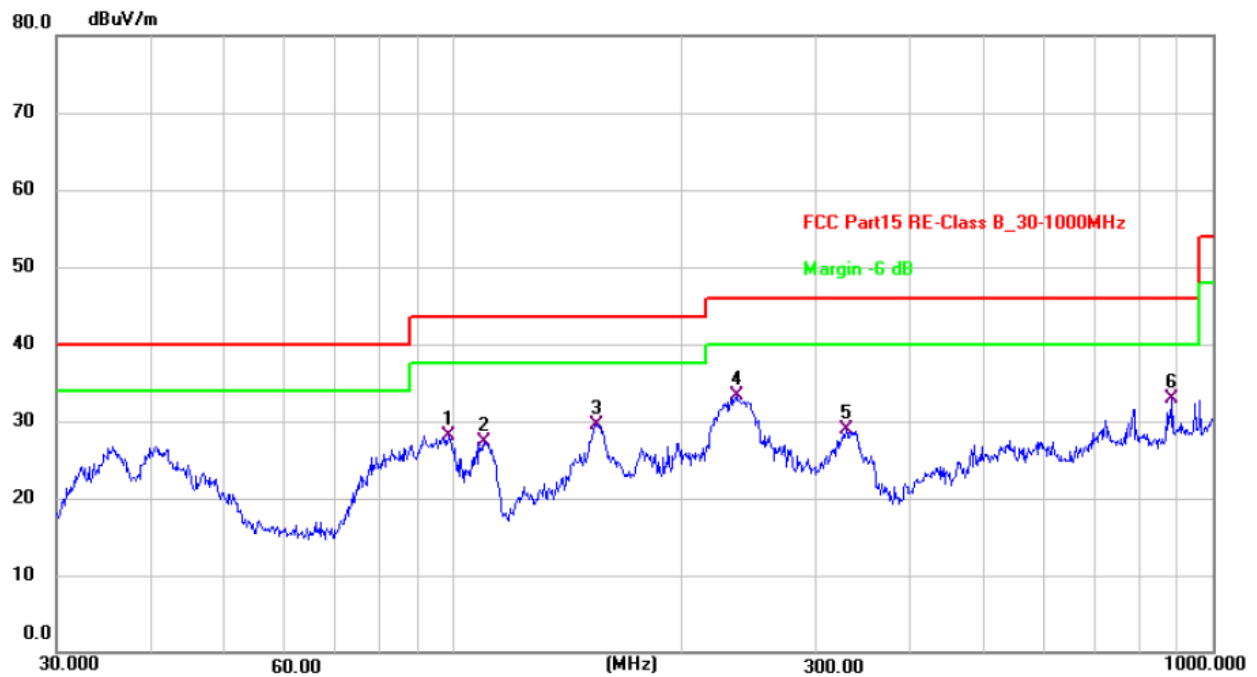

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	98.4866	40.87	-12.76	28.11	43.50	-15.39	QP	199	147	P	
2	109.7960	39.12	-11.84	27.28	43.50	-16.22	QP	199	95	P	
3	154.2786	38.30	-8.79	29.51	43.50	-13.99	QP	199	12	P	
4 *	235.8164	43.51	-10.18	33.33	46.00	-12.67	QP	100	349	P	
5	329.0390	36.89	-8.01	28.88	46.00	-17.12	QP	100	91	P	
6	884.5029	29.82	3.15	32.97	46.00	-13.03	QP	199	64	P	

Test Plots and Data of Radiated Emissions

Tested Model:	PDP-CIP5C-BL
Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Antenna Polarization:	Vertical
Remark:	

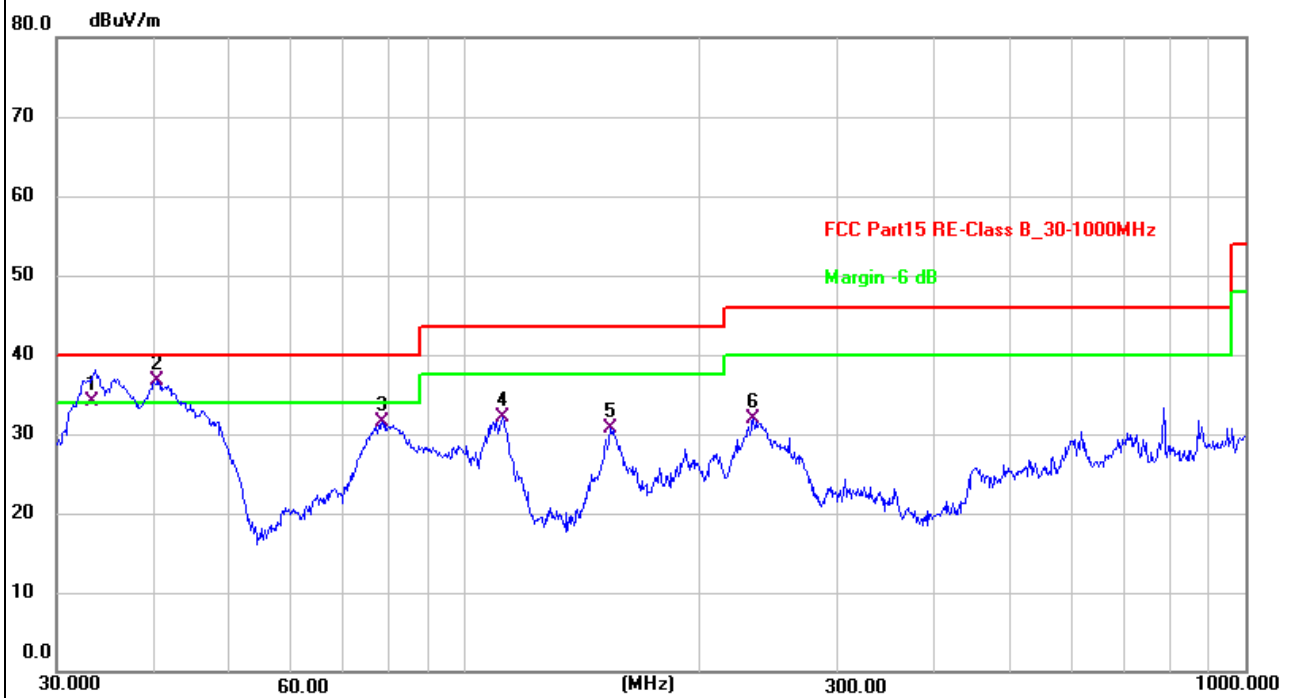

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 !	33.4353	42.84	-8.78	34.06	40.00	-5.94	QP	100	89	P	
2 *	40.4172	44.78	-8.06	36.72	40.00	-3.28	QP	100	131	P	
3	78.4133	44.37	-12.96	31.41	40.00	-8.59	QP	100	348	P	
4	111.7380	43.63	-11.61	32.02	43.50	-11.48	QP	100	68	P	
5	153.7385	39.40	-8.78	30.62	43.50	-12.88	QP	100	57	P	
6	234.1684	42.21	-10.31	31.90	46.00	-14.10	QP	200	12	P	