



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date of Report: May 18, 2001
Date of Submission: July 18, 2001

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Nokia Inc.
Equipment: 8260, Type NSC-4
FCC ID: GMLNSC-4
FCC Rules: 22H, Confidentiality

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

A handwritten signature in black ink, reading 'M. Flom P. Eng.', with a horizontal line drawn underneath the signature.

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cvr

LIST OF EXHIBITS
(FCC **CERTIFICATION** (CELLULAR TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Nokia Inc.

FCC ID: GMLNSC-4

BY APPLICANT:

- | | |
|--|---|
| 1. LETTER OF AUTHORIZATION | |
| 2. IDENTIFICATION DRAWINGS, 2.1033(c)(11) | |
| <input checked="" type="checkbox"/> LABEL | |
| <input checked="" type="checkbox"/> LOCATION OF LABEL | |
| <input checked="" type="checkbox"/> COMPLIANCE STATEMENT | |
| <input checked="" type="checkbox"/> LOCATION OF COMPLIANCE STATEMENT | |
| 3. PHOTOGRAPHS, 2.1033(c)(12) | x |
| 4. CONFIDENTIALITY REQUEST: 0.457 and 0.459 | x |
| 5. DOCUMENTATION: 2.1033(c) | |
| (3) USER MANUAL | x |
| (9) TUNE UP INFO | x |
| (10) SCHEMATIC DIAGRAM | x |
| (10) CIRCUIT DESCRIPTION | x |
| BLOCK DIAGRAM | x |
| PARTS LIST | x |
| ACTIVE DEVICES | x |
| 6. ATTESTATION: ESN: Section 22.919 | x |
| 7. ATTESTATION: OET: Section 22.933 | x |
| 8. SAR Report by Nokia (Finland) | x |

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



M. Flom Associates, Inc. - Global Compliance Center

3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176

www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

T R A N S M I T T E R C E R T I F I C A T I O N

of

FCC ID: GMLNSC-4

MODEL: 8260, Type NSC-4

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Part(s) 22H, Confidentiality

DATE OF REPORT: May 18, 2001

ON THE BEHALF OF THE APPLICANT:

Nokia Inc.

AT THE REQUEST OF:

P.O. T39-4289618

Nokia Mobile Phones
6000 Connection Drive
Irving, TX 75039

Attention of:

(972) 894-5000; Fax: -5698
Michael J. Mobley, Lead Type Approvals
(972) 894-4917; FAX: -5698
Cellphone: (214) 668-9465
michael.mobley@nokia.com

SUPERVISED BY:

A handwritten signature in black ink, reading "Morton Flom P. Eng.", is written over a horizontal line.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

RULE	DESCRIPTION	PAGE
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	General Information	6
	Standard Test Conditions and Engineering Practices	7
2.1046(a)	Carrier Output Power (Conducted)	8
2.1046(a)	R. F. Power Output (Radiated)	10
2.1047(a)	Audio Frequency Response	12
2.1047(a)	Audio Low Pass Filter (Voice Input)	14
2.1047(b)	Modulation Limiting	17
	Measurement Of Maximum Deviation	20
2.1049(c)(1), 22		
	Emission Masks (Occupied Bandwidth)	23
22.917	Emission Requirements -	
	Worst Case Modulation & Wideband Data	41
2.1051, 22.917	Spurious Emissions at Antenna Terminals	52
2.1053(a)	Field Strength of Spurious Radiation	57
2.1055(a)(1)	Frequency Stability (Temperature Variation)	62
2.1055(b)(1)	Frequency Stability (Voltage Variation)	64

PAGE NO. 1 of 64.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a) TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225

c) Report Number: d0150014

d) Client: Nokia Mobile Phones
6000 Connection Drive
Irving, TX 75039

e) Identification: 8260, Type NSC-4
FCC ID: GMLNSC-4
Description: UHF FM Portable Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: May 18, 2001
EUT Received: May 14, 2001

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 64.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

22H, Confidentiality

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Nokia Inc.
6000 Connection Drive
Irving, TX 75039

MANUFACTURER:

Nokia Mobile Phones Manufacturing (USA), Inc.
5650 Alliance Gateway
Fort Worth, TX 76178

(c)(2): FCC ID: GMLNSC-4

MODEL NO: 8260, Type NSC-4

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 30K0DXW, 40K0F1D, 40K0F8W

(c)(5): FREQUENCY RANGE, MHz: 824 to 849

(c)(6): POWER RATING, Watts: 0.145 ERP AMPS
0.603 ERP TDMA
 Switchable x Variable N/A

FCC GRANT NOTE:

BC - The output power is continuously variable from the value listed above to 5%-10% of the value listed.

(c)(7): MAXIMUM POWER RATING, Watts: 1

PAGE NO. 3 of 64.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 3.6

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for
determining and stabilizing frequency, for suppression of
spurious radiation, for limiting modulation and limiting
power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 x N/A



(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 64.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

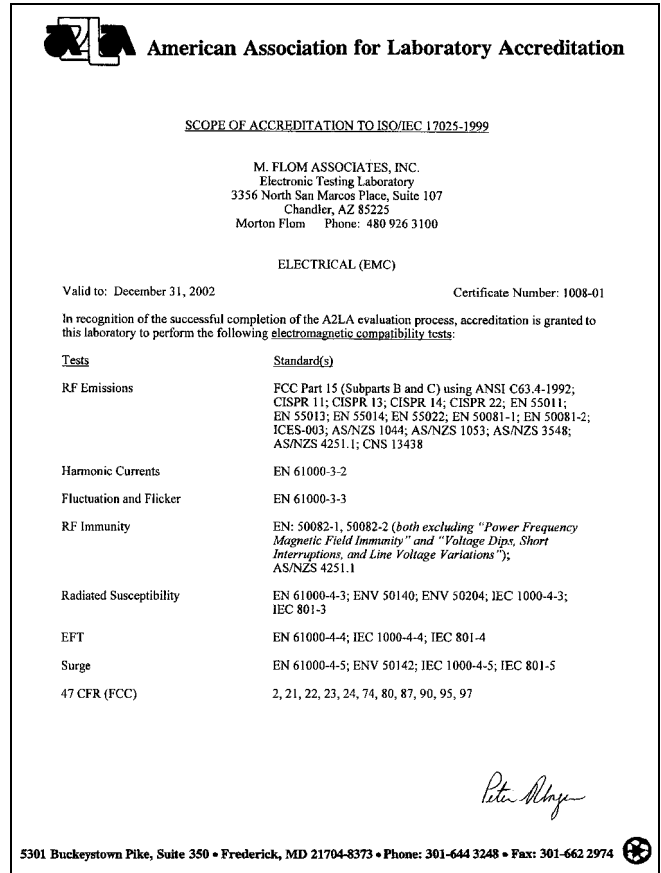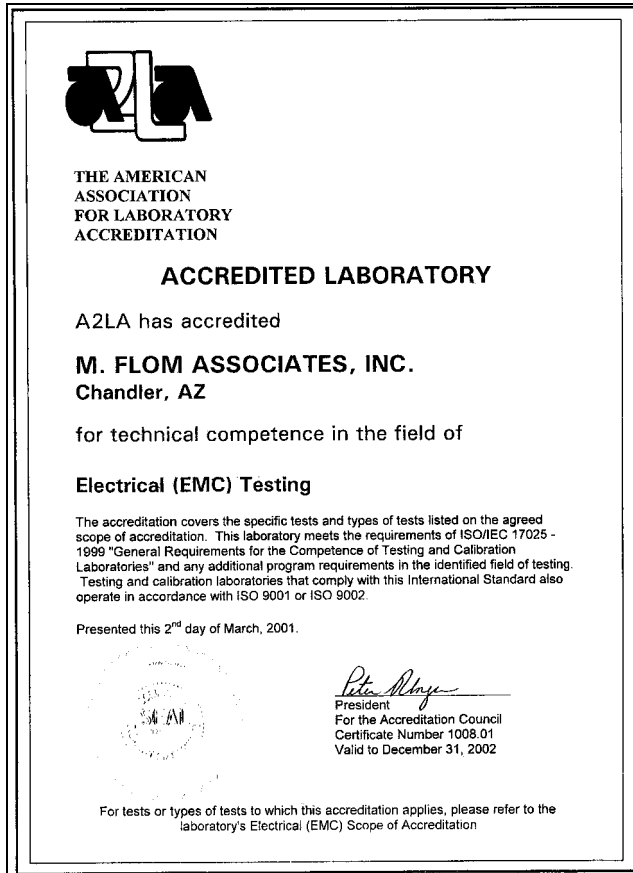

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 64.

Sub-part

2.1033(c)(14):

TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 - Domestic Public Fixed Radio Services
- _____ 22 - Public Mobile Services
- x 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 - International Fixed Public Radiocommunication services
- _____ 24 - Personal Communications Services
- _____ 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 - Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- _____ 87 - Aviation Services
- _____ 90 - Private Land Mobile Radio Services
- _____ 94 - Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 97 - Amateur Radio Service
- _____ 101 - Fixed Microwave Services

PAGE NO.

6 of 64.

GENERAL INFORMATION

1. Prior to testing, the deviation for audio modulation and each of the respective SAT + ST tones were set as close as possible to the required limit.
2. Except for audio modulation, which was applied externally, Wideband Data SAT, ST and all other tones and operational modes were provided by a test control unit incorporating appropriate software. Worst case repetition rate for Wideband Data was 10 kb/s.
3. Spurious radiation was measured at three (3) meters.
4. The two cellular frequency bands are available to the user automatically. Please refer to the manual contained in the documentation.
5. The normal modes of modulation are:
 - ☒ (a) VOICE
 - ☒ (b) WIDEBAND DATA
 - ☒ (c) SAT
 - ☒ (d) ST
 - ☒ (e) SAT + VOICE
 - ☒ (f) SAT + DTMF
 - ☐ (g) CDMA
 - ☒ (h) TDMA
 - ☐ (i) NAMPS VOICE
 - ☐ (j) NAMPS DSAT
 - ☐ (k) NAMPS ST
 - ☐ (l) NAMPS VOICE + DSAT

PAGE NO.

7 of 64.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 8 of 64.

NAME OF TEST: Carrier Output Power (Conducted)

SPECIFICATION: 47 CFR 2.1046(a)

TEST EQUIPMENT: As per attached page


MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS

NOMINAL, MHz	CHANNEL	dBm		R. F. POWER, WATTS	
		Lo	Hi	Lo	Hi
AMPS MODE:					
824.040	991	6.20	21.99	4.16 mW	0.158
836.400	380	5.92	21.84	3.91 mW	0.153
848.970	799	5.76	21.73	3.76 mW	0.148
TDMA MODE:					
825.290	991	-4.57	28.70	695 μW	0.740
836.400	380	-3.98	28.69	400 μW	0.741
847.720	799	-4.77	28.37	665 μW	0.689

PERFORMED BY:



Doug Noble, B.A.S. E.E.T.

PAGE NO.

9 of 64.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

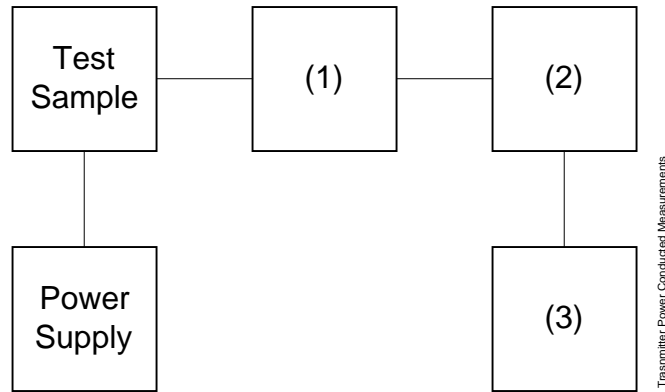

Asset	Description (as applicable)	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
i00014	HP 435A	1733A05836
i00039	HP 436A	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 10 of 64.
NAME OF TEST: R. F. Power Output (Radiated)
SPECIFICATION: 47 CFR 2.1046(a)
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE (RADIATED)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading was calculated from the equation $P_t = ((E \times R)^2 / 49.2)$ watts, where $R = 3m$.
2. Measurement accuracy is ± 1.5 dB.

MEASUREMENT RESULTS

AMPS MODE g0150046: 2001-May-14 Mon 08:56:00


FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	ERP, Watts
824.040000	824.027500	90.5	28.46	21.6	0.145
836.400000	836.507500	90.18	28.48	21.3	0.135
848.970000	848.957500	88.92	28.5	20	0.100

TDMA MODE g0150048: 2001-May-14 Mon 10:44:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	ERP, Watts
824.040000	824.038800	96.73	28.46	27.8	0.603
836.400000	836.502500	96.48	28.48	27.6	0.575
848.970000	848.972500	94.95	28.5	26.1	0.407

PAGE NO.

11 of 64.

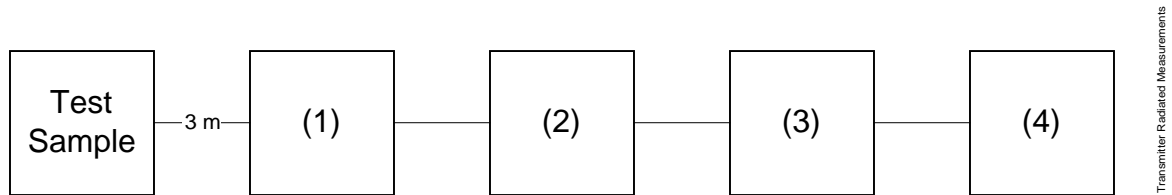TRANSMITTER RADIATED MEASUREMENTS

Asset	Description (as applicable)	s/n
(1)	<u>TRANSDUCER</u>	
i00091	Emco 3115	001469
i00089	Aprcl Log Periodic	001500
(2)	<u>HIGH PASS FILTER</u>	
i00	Narda μ PAD (In-Band Only)	
i00	Trilithic (Out-Of-Band Only)	
(3)	<u>PREAMP</u>	
i00028	HP 8449 (+30 dB)	2749A00121
(4)	<u>SPECTRUM ANALYZER</u>	
i00048	HP 8566B	2511A01467
i00057	HP 8557A	1531A00191
i00029	HP 8563E	3213A00104

PAGE NO. 12 of 64.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED


PAGE NO.

13 of 64.

NAME OF TEST: Audio Frequency Response
g0150030: 2001-May-14 Mon 09:48:00
STATE: 0:General

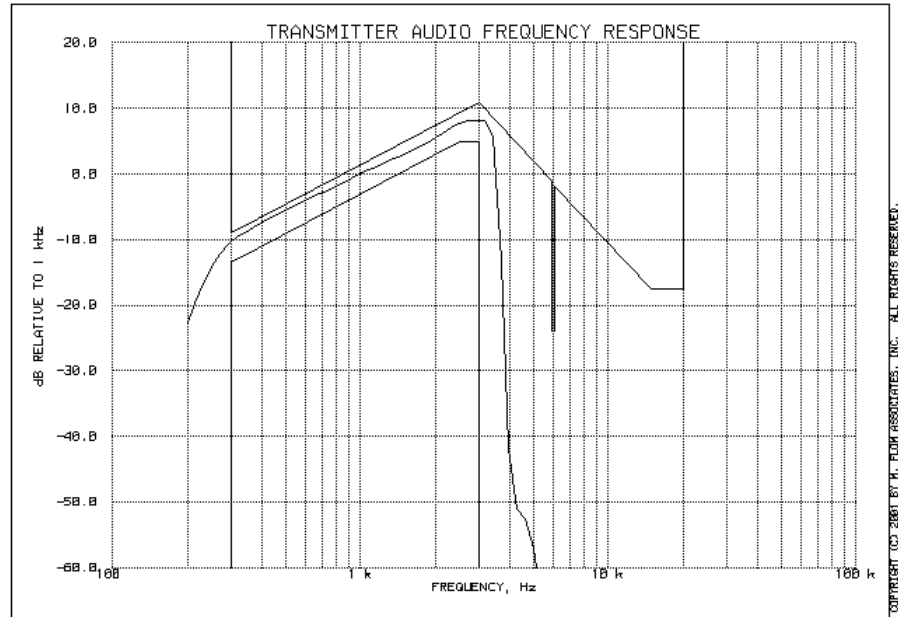

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 14 of 64.
NAME OF TEST: Audio Low Pass Filter (Voice Input)
SPECIFICATION: 47 CFR 2.1047(a)
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

15 of 64.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
TEST B. OUT-OF-BAND SPURIOUS

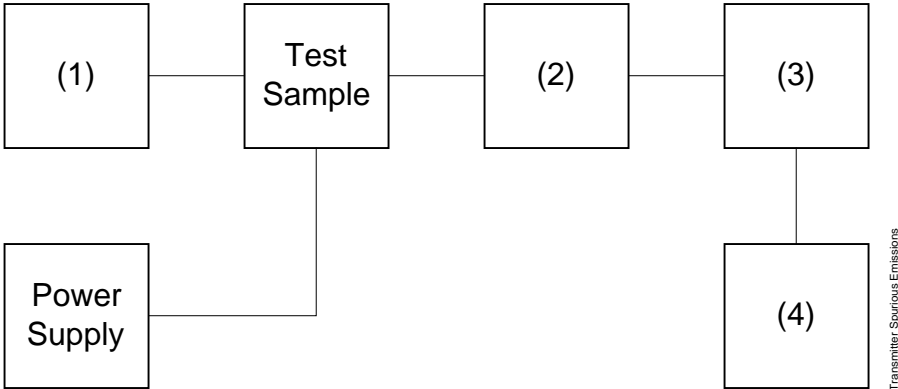


Asset	Description (as applicable)	s/n
(1)	<u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00012	HP 3312A	1432A11250
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	Narda 766-10	7802
i00123	Narda 766-10	7802A
i00069	Bird 8329 (30 dB)	1006
i00113	Sierra 661A-3D	1059
(3)	<u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126	Eagle TNF-1	100-250
i00125	Eagle TNF-1	50-60
i00124	Eagle TNF-1	250-850
(4)	<u>SPECTRUM ANALYZER</u>	
i00048	HP 8566B	2511A01467
i00029	HP 8563E	3213A00104


PAGE NO.

16 of 64.

NAME OF TEST: Audio Low Pass Filter (Voice Input)
g0150032: 2001-May-14 Mon 10:00:00
STATE: 0:General

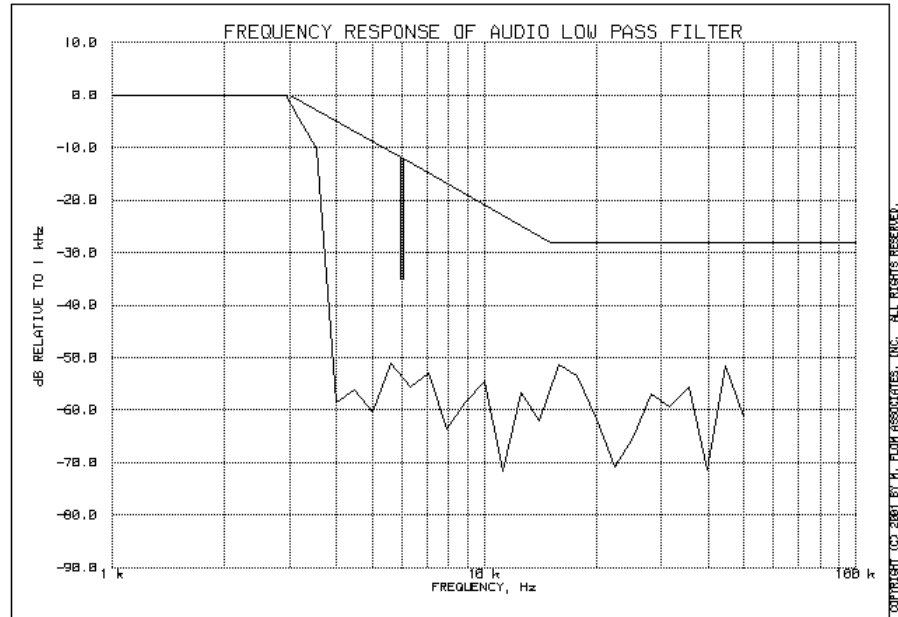

PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO. 17 of 64.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b)
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The audio signal generator was connected to the audio input circuit/microphone of the EUT as for Frequency Response of the Audio Modulating Circuit.
2. The modulation response was measured for each of three tones (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The audio input level was varied from 30% modulation (± 3.6 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS ATTACHED FOR:

COMPANDER ON:

x VOICE


x VOICE + SAT

PAGE NO.


18 of 64.

NAME OF TEST: Modulation Limiting
 g0150035: 2001-May-14 Mon 10:16:00
 STATE: 0:General


Positive
 Peaks:

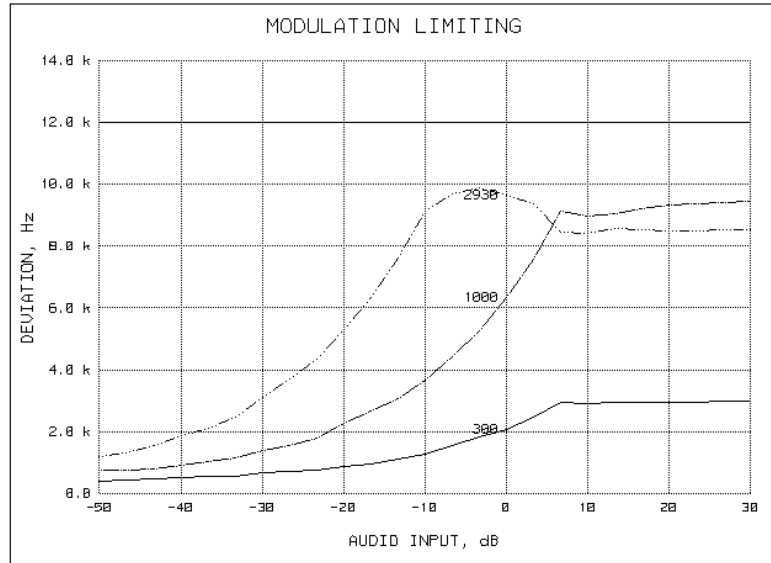

Negative
 Peaks:

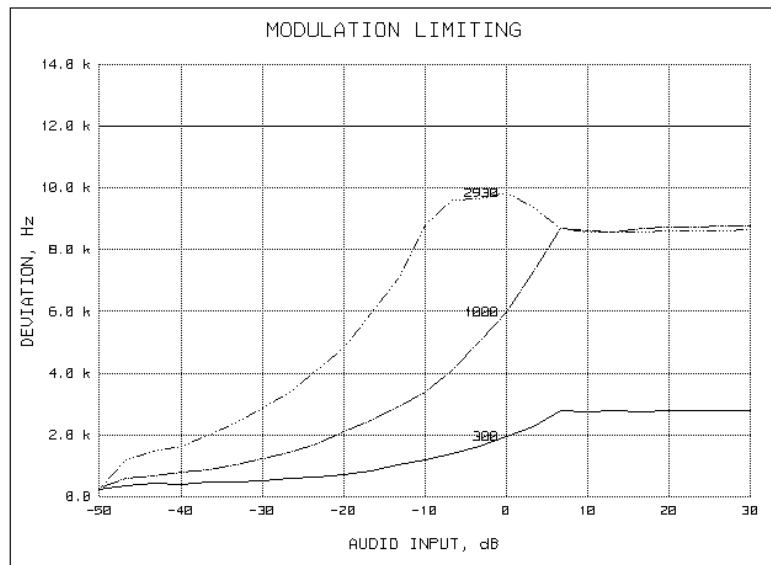

PERFORMED BY:



 Doug Noble, B.A.S. E.E.T.

PAGE NO.


19 of 64.

NAME OF TEST: Modulation Limiting
g0150039: 2001-May-14 Mon 10:42:00
STATE: 0:General

Positive
Peaks:

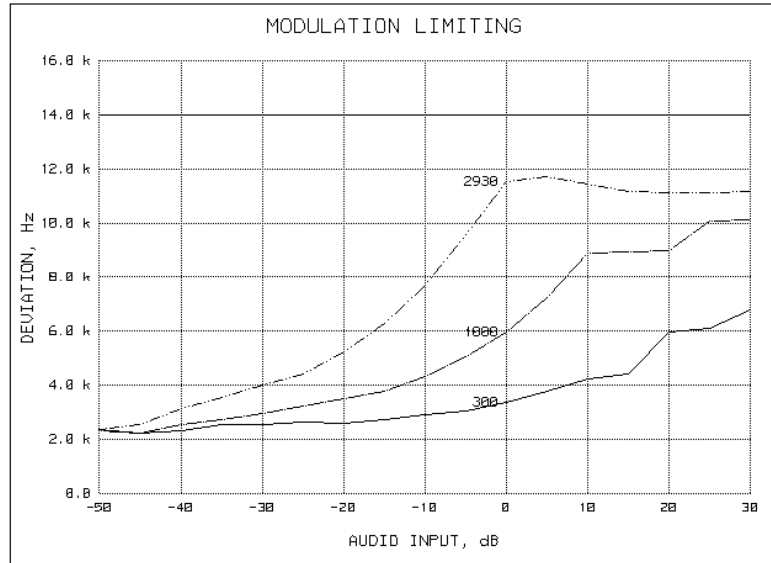

Negative
Peaks:

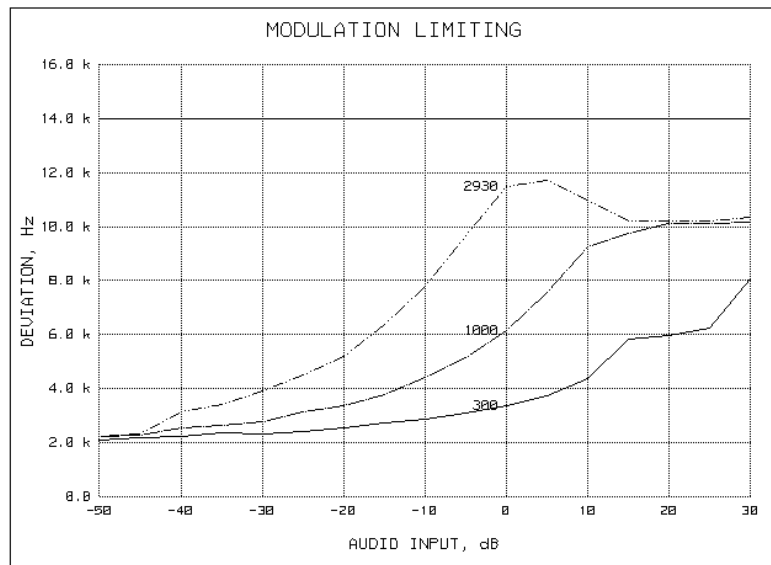

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 20 of 64.
NAME OF TEST: Measurement Of Maximum Deviation
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The presentation of tones was obtained by attaching the HP 8903A Oscilloscope to the Modulation Output of the HP 8901 Modulation Analyzer.
2. The EUT was modulated by an HP 8903 Audio Analyzer and/or internally generated signals.
3. Maximum deviation measurements were recorded for the various configurations.
4. MEASUREMENT RESULTS: ATTACHED SUMMARY FOR DEVIATION

PAGE NO.

21 of 64.

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION
 TEST B. AUDIO FREQUENCY RESPONSE
 TEST C. HUM AND NOISE LEVEL
 TEST D. RESPONSE OF LOW PASS FILTER
 TEST E. MODULATION LIMITING

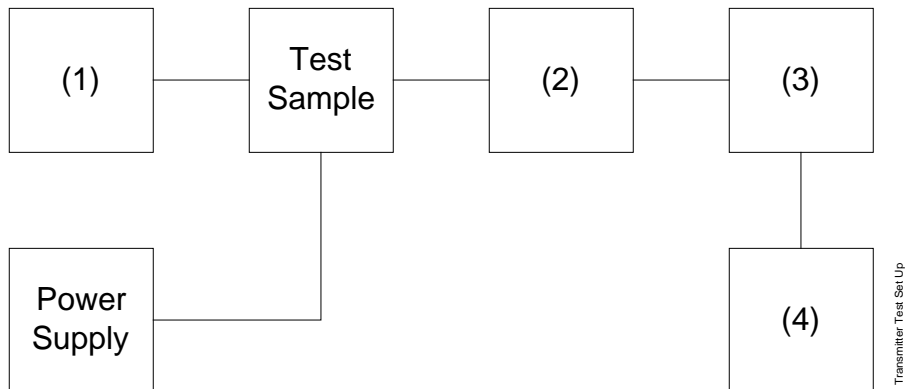

Asset	Description (as applicable)	s/n
(1)	<u>Audio Oscillator</u>	
i00010	HP 204D	1105A04683
i00017	HP 8903A	2216A01753
i00118	HP 33120A	US36002064
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3)	<u>MODULATION ANALYZER</u>	
i00020	HP 8901A	2105A01087
(4)	<u>AUDIO ANALYZER</u>	
i00017	HP 8903A	2216A01753


PAGE NO.

22 of 64.

MEASUREMENT SUMMARY: Measurement Of Maximum Deviation

MODULATION	LIMIT, kHz	DEVIATION, kHz
(a) Voice	$\geq 10.8 \text{ \& } \leq 13.2$	10.9
(b) Wideband Data	$\geq 7.2 \text{ \& } \leq 8.8$	8.3
(c) SAT	$\geq 1.8 \text{ \& } \leq 2.2$	2.4
(d) ST	$\geq 7.2 \text{ \& } \leq 8.8$	7.9
(e) SAT + VOICE	N/A	11.2
(f) SAT + DTMF	N/A	11.0
(i) NAMPS VOICE	N/A	
(j) NAMPS DSAT	N/A	
(k) NAMPS ST	N/A	
(l) NAMPS VOICE	N/A	

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 23 of 64.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c)(1), 22
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 24 of 64.

MEASUREMENT SUMMARY: Emission Masks (Occupied Bandwidth)

MODULATION	MEASURED DEVIATION ±kHz (HP 8901A)	LIMIT ±kHz	B/W @-26 dB PLOTS, kHz
NONE	0.0	0.0	0.0
VOICE	10.9	≥ 10.8 & ≤ 13.2	24
WIDEBAND DATA	8.3	≥ 7.2 & ≤ 8.8	23
SAT + VOICE	11.2	N/A	29
SAT + DTMF	11.0	N/A	26
CDMA	N/A	N/A	N/A
TDMA	N/A	N/A	32
NAMPS	N/A	N/A	N/A


PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

25 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0150051: 2001-May-14 Mon 12:57:00
STATE: 1:Low Power

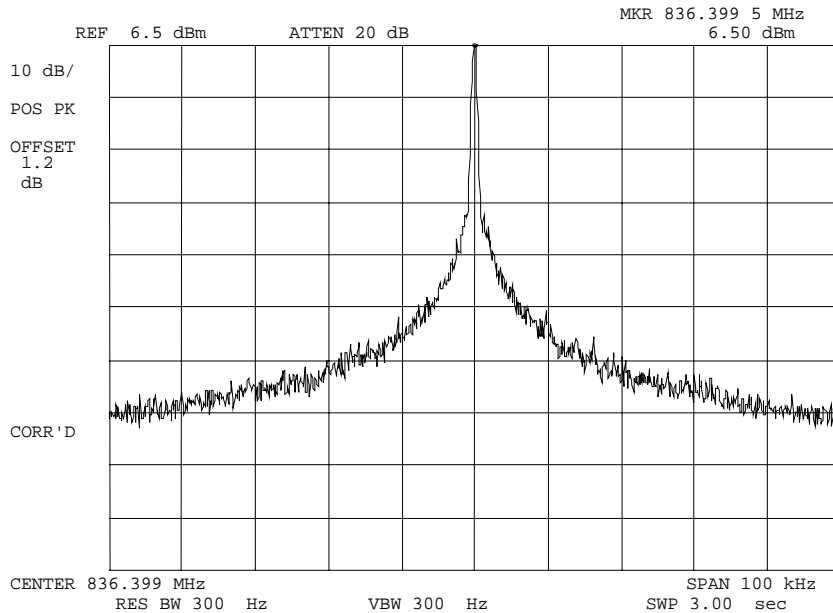

POWER: LOW
MODULATION: NONE


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

26 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150052: 2001-May-14 Mon 13:04:00
 STATE: 1:Low Power

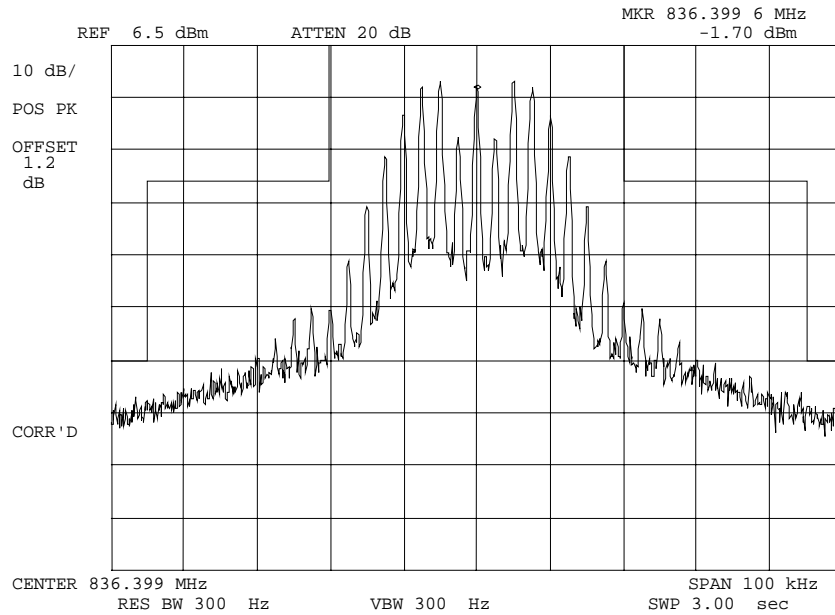

POWER:
 MODULATION:

LOW
 VOICE: 2500 Hz SINE WAVE
 MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

27 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150060: 2001-May-14 Mon 14:05:00
 STATE: 1:Low Power

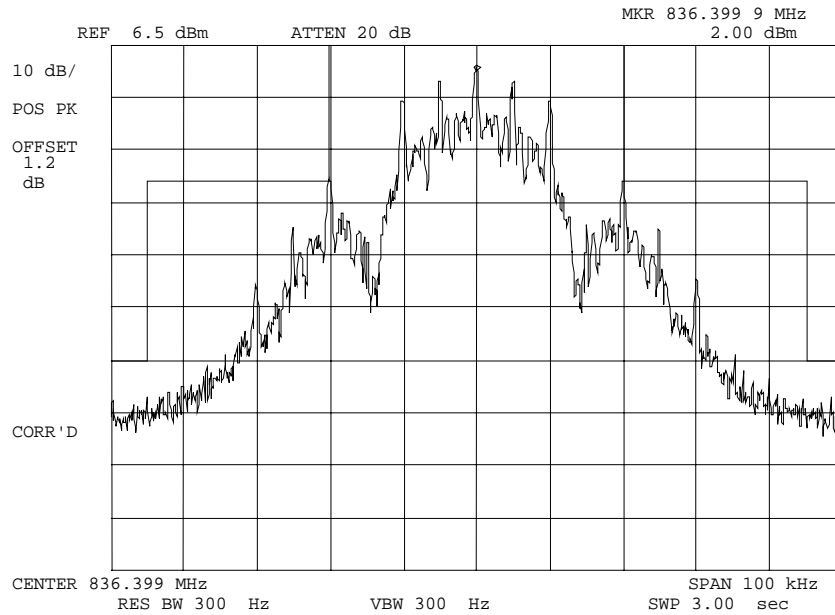

POWER:

LOW

MODULATION:

WBD

MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

28 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150059: 2001-May-14 Mon 14:03:00
 STATE: 1:Low Power

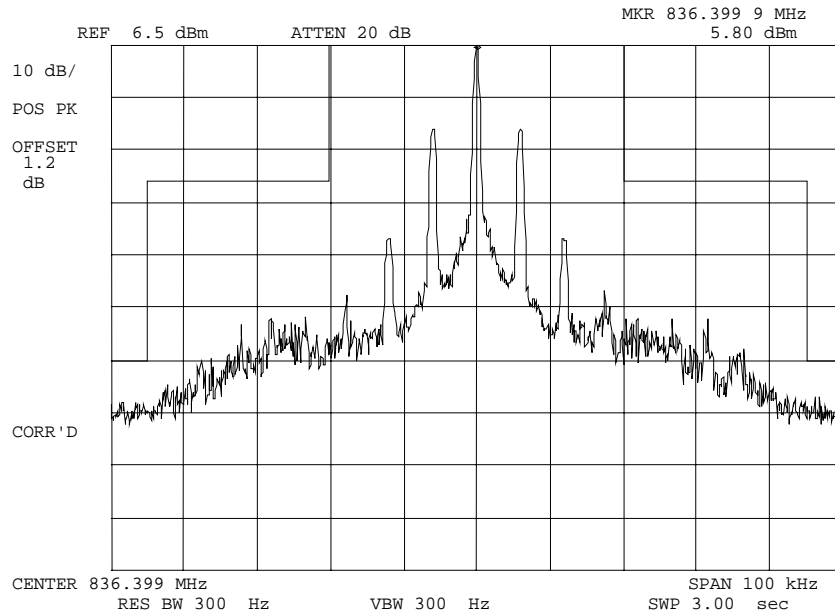

POWER:

LOW

MODULATION:

SAT

MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

29 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0150063: 2001-May-14 Mon 14:12:00
STATE: 1:Low Power

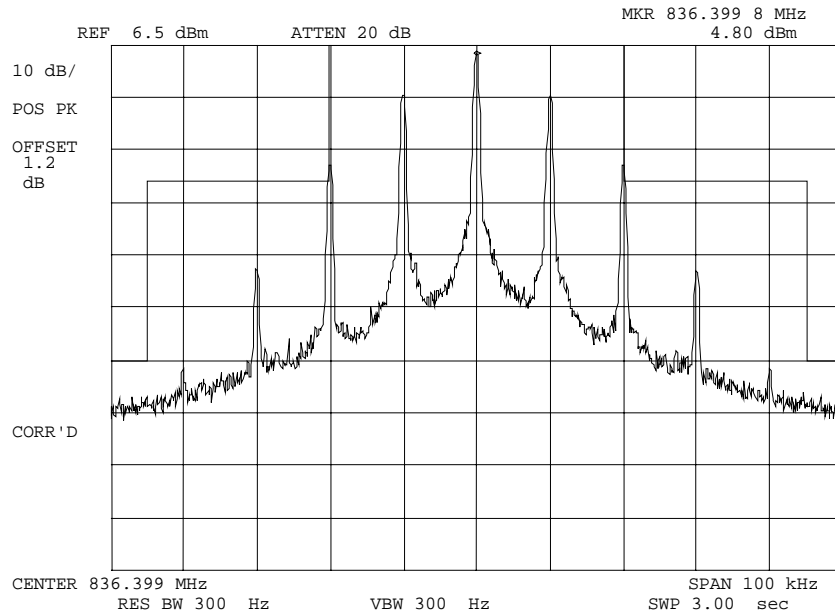

POWER:

LOW

MODULATION:

ST

MASK: AMPS CELLULAR,
F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

30 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150055: 2001-May-14 Mon 13:56:00
 STATE: 1:Low Power

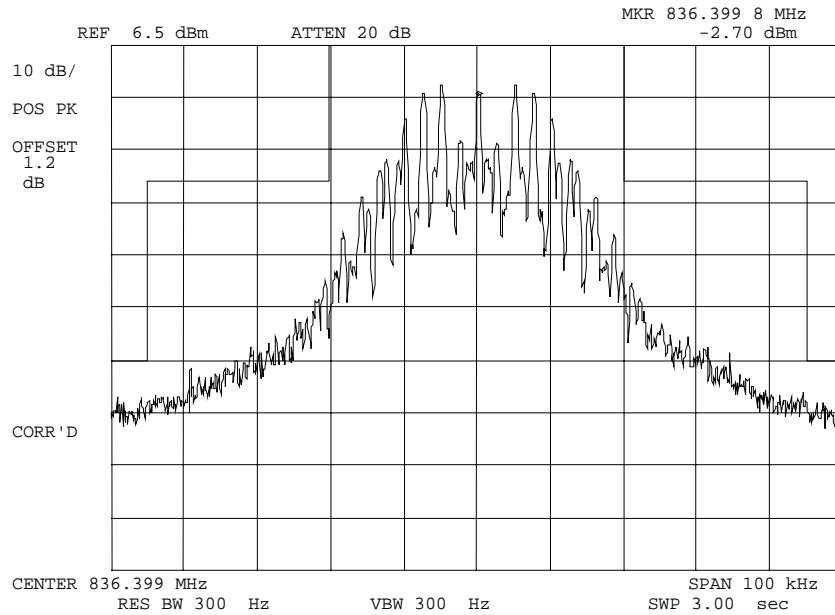

POWER:

LOW

MODULATION:

SAT+VOICE

MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

31 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150056: 2001-May-14 Mon 13:58:00
 STATE: 1:Low Power

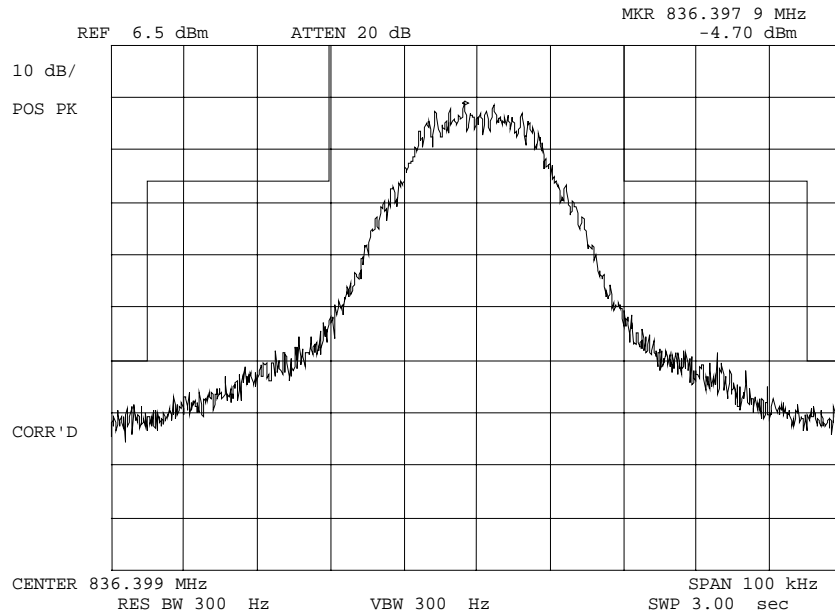

POWER:

LOW

MODULATION:

SAT+DTMF

MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

32 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150075: 2001-May-15 Tue 09:53:00
 STATE: 1:Low Power

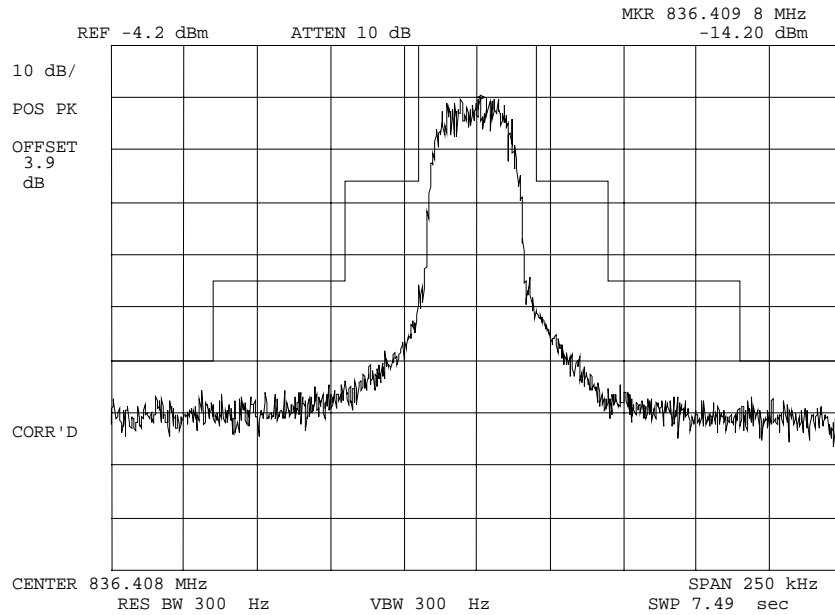

POWER:

LOW

MODULATION:

TDMA


MASK: AMPS CELLULAR, F1D,
 DATA

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 33 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0150050: 2001-May-14 Mon 12:55:00
STATE: 2:High Power

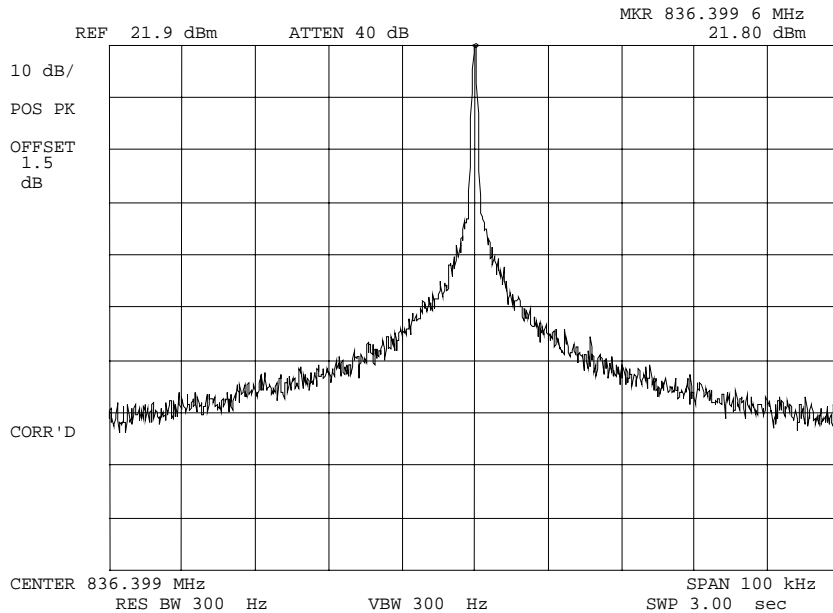


POWER: HIGH
MODULATION: NONE

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO.

34 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150053: 2001-May-14 Mon 13:49:00
 STATE: 2:High Power

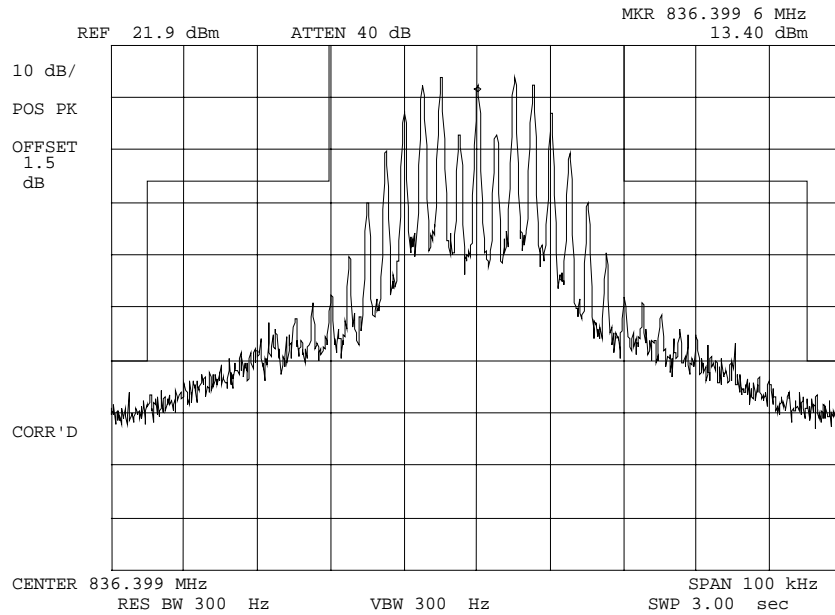

POWER:
 MODULATION:

HIGH
 VOICE: 2500 Hz SINE WAVE
 MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

35 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150061: 2001-May-14 Mon 14:07:00
 STATE: 2:High Power

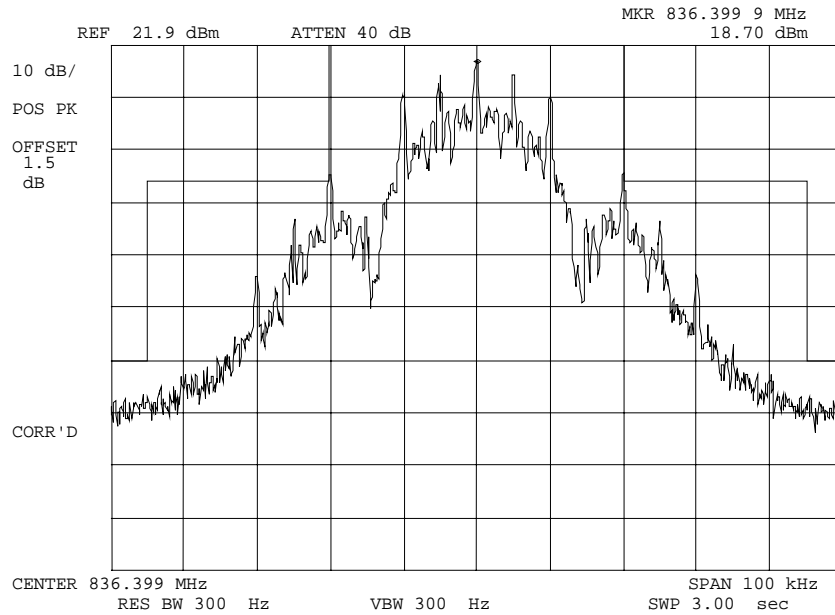

POWER:
 MODULATION:

HIGH
 WBD
 MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

36 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0150058: 2001-May-14 Mon 14:01:00
STATE: 2:High Power

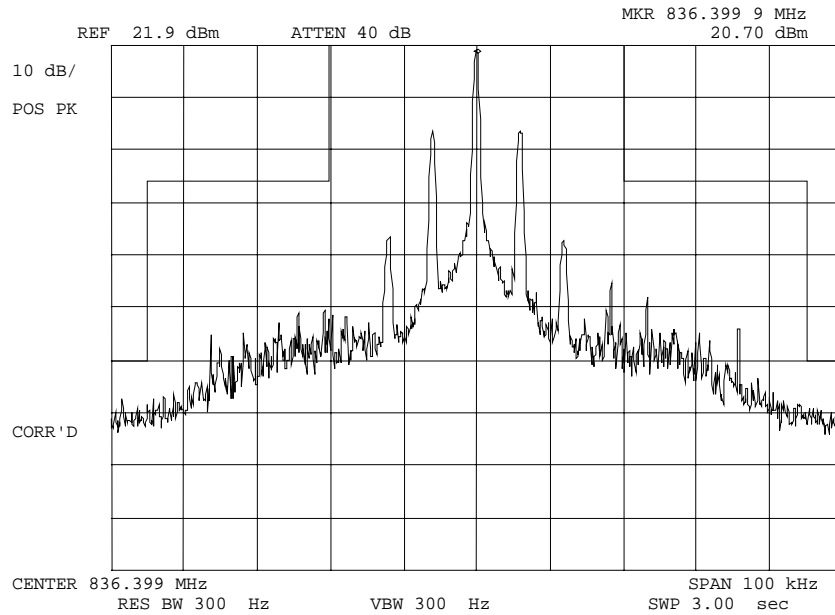

POWER:
MODULATION:

HIGH
SAT
MASK: AMPS CELLULAR,
F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

37 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0150062: 2001-May-14 Mon 14:09:00
STATE: 2:High Power

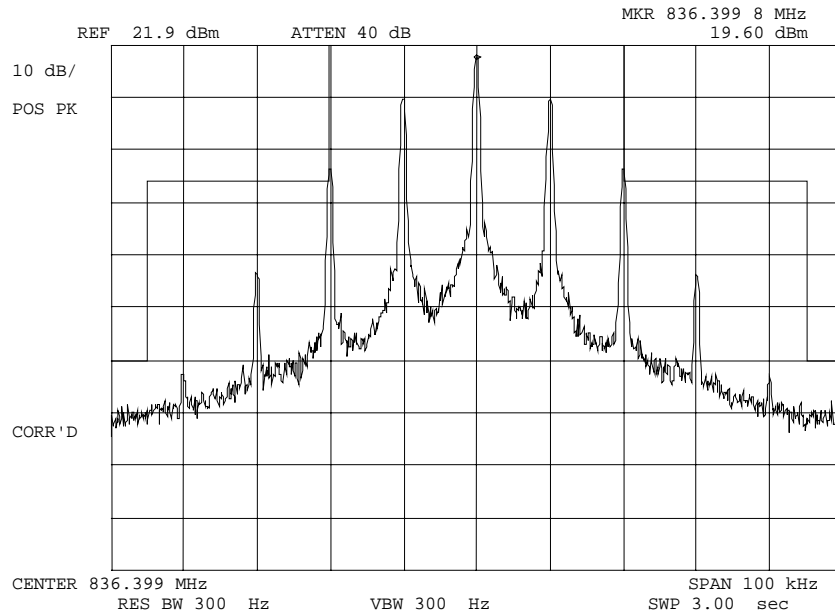

POWER:
MODULATION:

HIGH
ST
MASK: AMPS CELLULAR,
F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

38 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0150054: 2001-May-14 Mon 13:54:00
STATE: 2:High Power

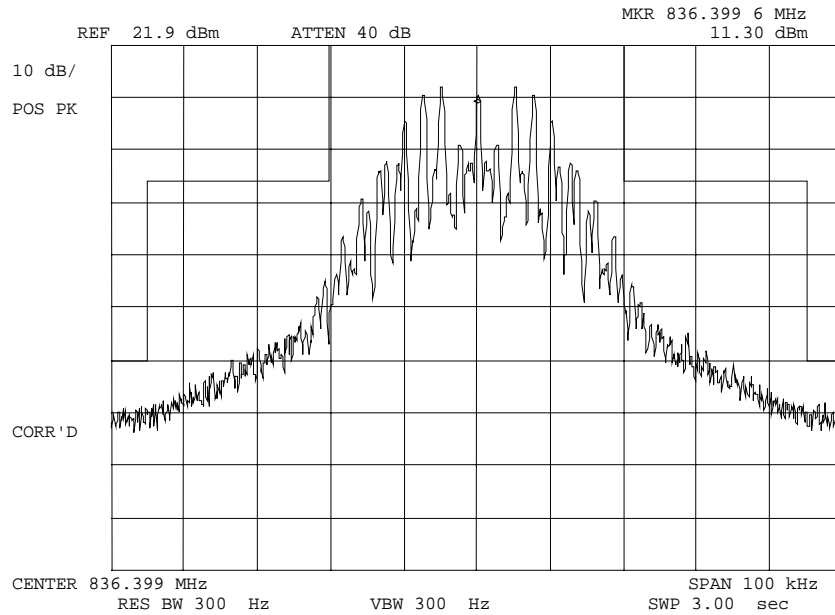

POWER:
MODULATION:

HIGH
SAT+VOICE
MASK: AMPS CELLULAR,
F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

39 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150057: 2001-May-14 Mon 13:59:00
 STATE: 2:High Power

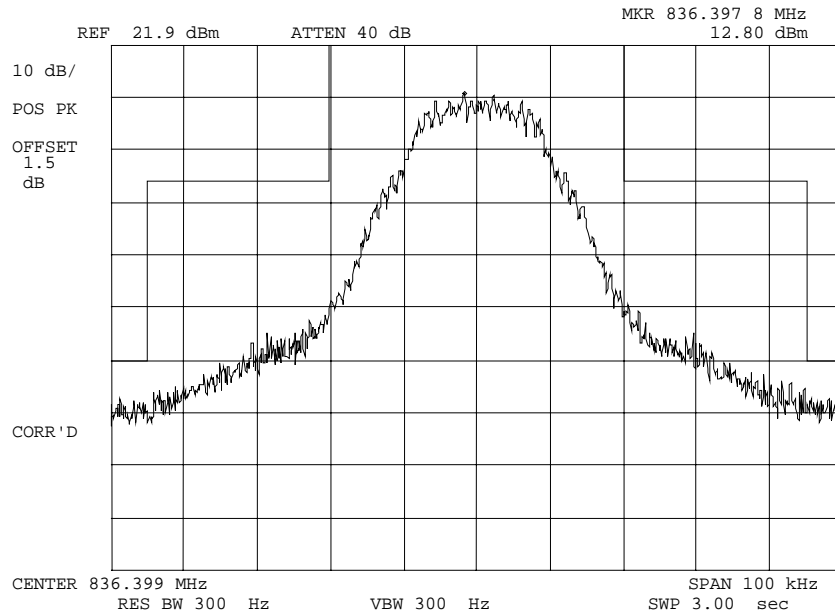

POWER:
 MODULATION:

HIGH
 SAT+DTMF
 MASK: AMPS CELLULAR,
 F3E/F3D w/LPF


PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO.

40 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g0150074: 2001-May-15 Tue 09:50:00
STATE: 2:High Power

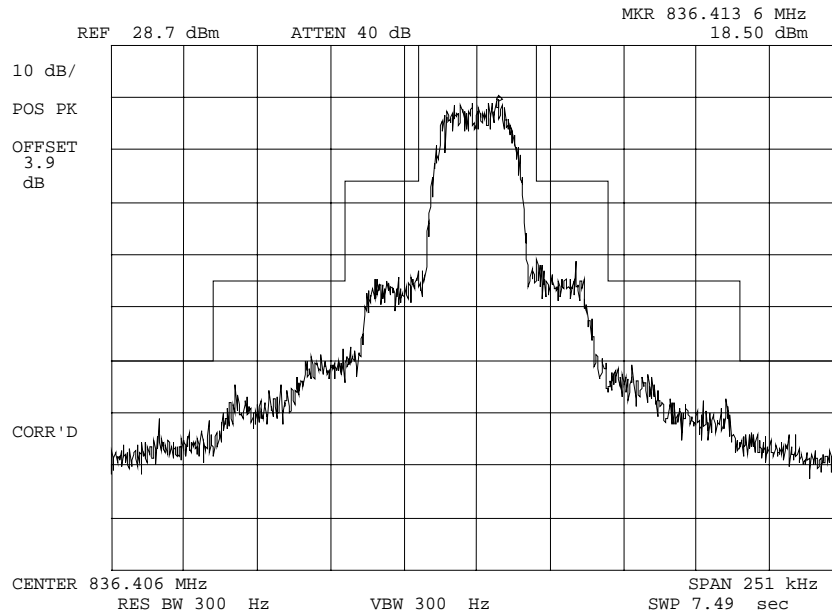

POWER:
MODULATION:

HIGH
TDMA
MASK: AMPS CELLULAR, F1D,
DATA

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 41 of 64.

NAME OF TEST: Emission Requirements -
Worst Case Modulation & Wideband Data

SPECIFICATION: 47 CFR 22.917

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was connected to a coaxial attenuator and then to a spectrum analyzer. The unmodulated carrier was set for 0 dB reference level.
2. A notch filter was introduced to reduce or eliminate any spectrum analyzer internally generated spurious for measurements of the harmonics and the carrier level.
3. Spectrum analyzer bandwidth was set to section 22.917(h) as applicable.
4. Measurements were made on channels 380, 799 and 991. The equipment was first modulated for the Worst Case Modulation, then for Wideband Data (F8W, F1D).
5. All other spurious emissions over the range of 0 to beyond the 10th harmonic (10 GHz) were 20 dB or more below the limit
6. The data presented here is for the Worst Case.
7. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 42 of 64.

MEASUREMENT SUMMARY: Emission Requirements -
Worst Case Modulation

WORST CASE MODULATION = VOICE +_SAT

EMISSION, MHz/HARM.	LIMIT, dBc	SPURIOUS EMISSIONS, dBc	
		Lo	Hi
F0 + 20 kHz To F0 + 45 kHz	≤-26	≤-44	≤-46
F0 + 45 kHz To 2 nd Harmonic	≤-60 or 43 + 10 log P	≤-69	≤-67
2 nd to 10 th	(≤-13 dBm)	≤-67.8	≤-61.4


MEASUREMENT RESULTS = ATTACHED OFFSET PLOTS

EMISSION IN THE RECEIVER CRITICAL BAND

EMISSION, MHz/HARM.	LIMIT, dBm	SPURIOUS EMISSIONS, dBm	
		Lo	Hi
869 to 894	≤-80	≤-86	≤-86.5

MEASUREMENT RESULTS = ATTACHED PLOTS


PERFORMED BY:


Doug Noble, B.A.S. E.E.T.

PAGE NO.

43 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150066: 2001-May-15 Tue 08:13:00
 STATE: 1:Low Power

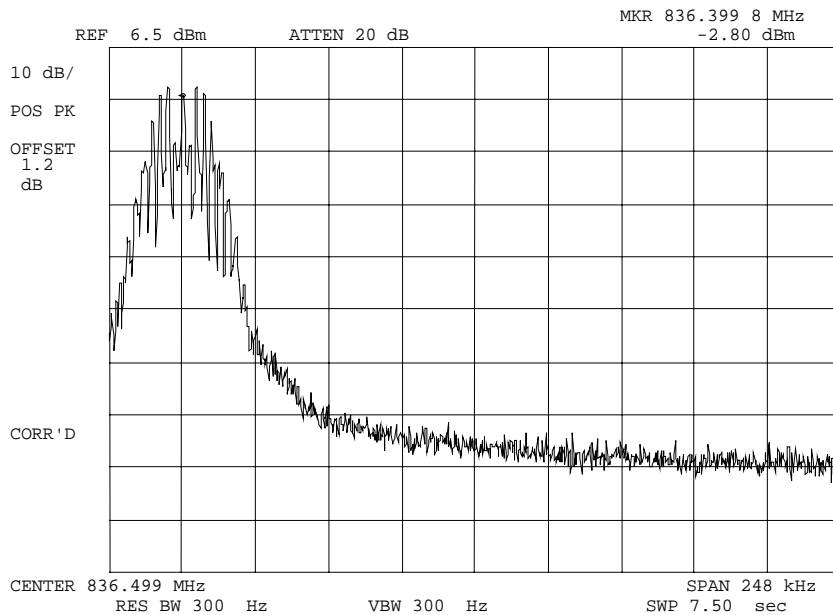


POWER: LOW
 MODULATION: SAT+VOICE
 OFFSET OCCUPIED BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 44 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150065: 2001-May-15 Tue 08:11:00
 STATE: 2:High Power

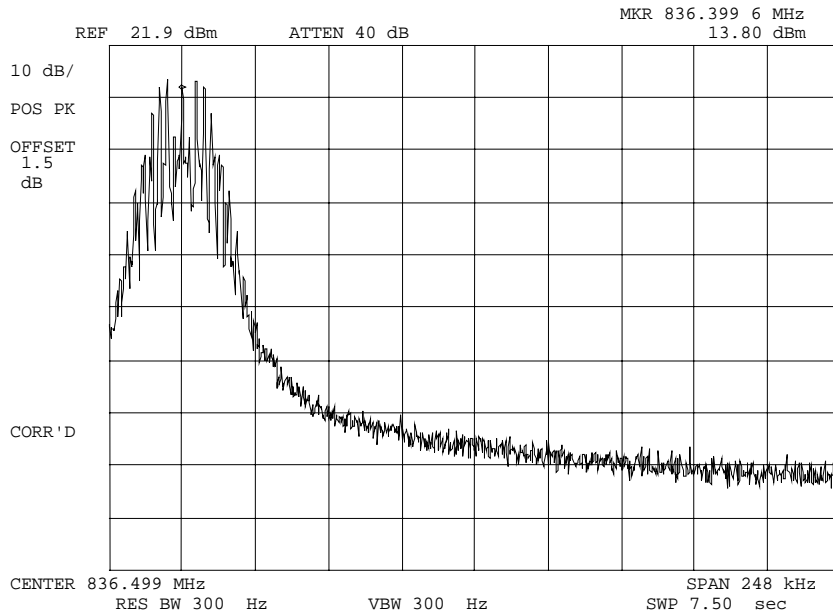


POWER: HIGH
 MODULATION: SAT+VOICE
 OFFSET OCCUPIED BANDWIDTH

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO. 45 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150067: 2001-May-15 Tue 08:16:00
 STATE: 1:Low Power

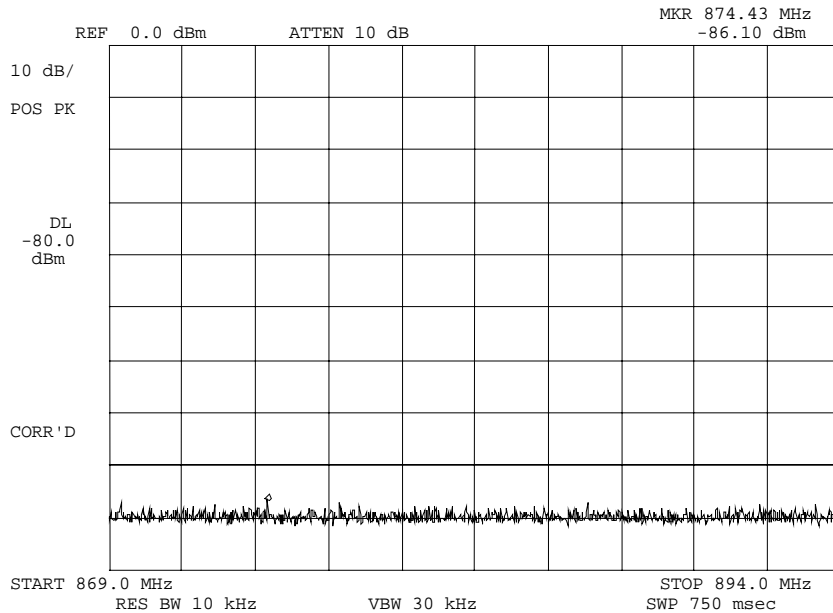


POWER: LOW
 MODULATION: ANY
 TX SPURS IN RX CRITICAL BAND

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO. 46 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150068: 2001-May-15 Tue 08:16:00
 STATE: 2:High Power

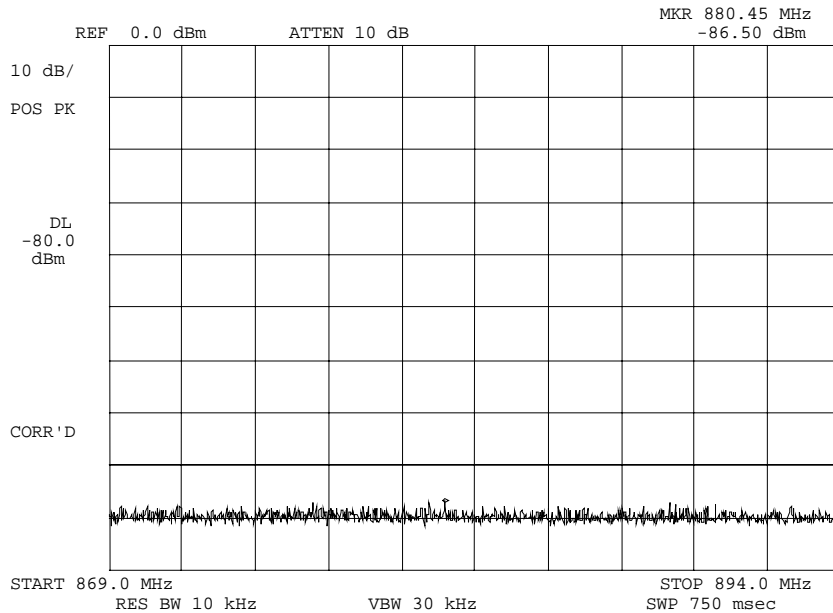

POWER: HIGH
 MODULATION: ANY
 TX SPURS IN RX CRITICAL BAND

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO.

47 of 64.

MEASUREMENT SUMMARY:Emission Requirements -
Wideband Data (F1D, 10 kb/s)

EMISSION, MHz/HARM.	LIMIT, dBc	SPURIOUS EMISSIONS, dBc	
		Lo	Hi
F0 + 20 kHz to F0 + 45 kHz	≤-26	≤-28	≤-28
F0 + 45 kHz to F0 + 90 kHz	≤-45	≤-69	≤-67
F0 + 90 kHz to 2 nd Harmonic	≤-60 (≤-13 dBm)	≤-61.7	≤-52.1
2 nd to 10 th	(≤-13 dBm)	≤-67.8	≤-61.4

MEASUREMENT RESULTS

= ATTACHED OFFSET PLOTS


EMISSION IN THE RECEIVER CRITICAL BAND

EMISSION, MHz/HARM.	LIMIT, dBm	SPURIOUS EMISSIONS, dBm	
		Lo	Hi
869 to 894	≤-80	≤-86.0	≤-86.5

MEASUREMENT RESULTS


= ATTACHED PLOTS

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO. 48 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150071: 2001-May-15 Tue 08:22:00
 STATE: 1:Low Power

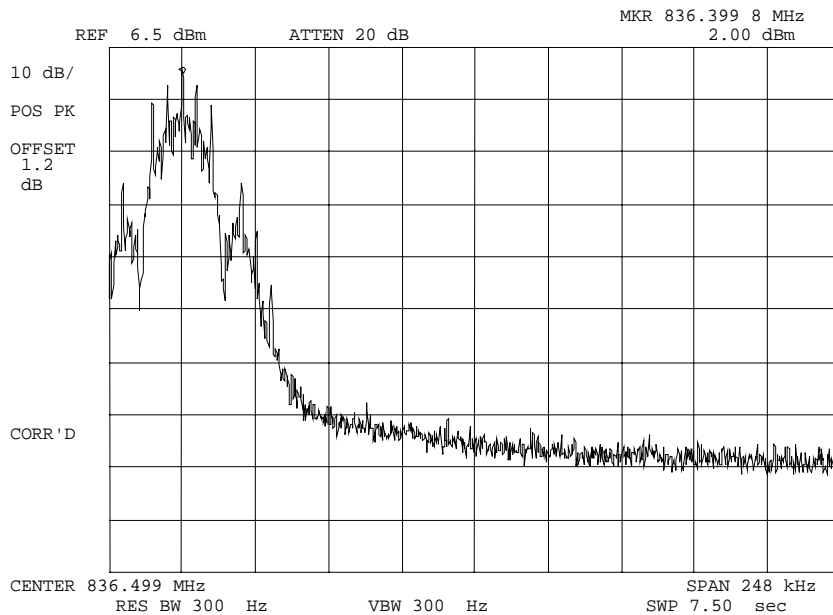


POWER: LOW
 MODULATION: WBD
 OFFSET OCCUPIED BANDWIDTH

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO.

49 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150072: 2001-May-15 Tue 08:24:00
 STATE: 2:High Power

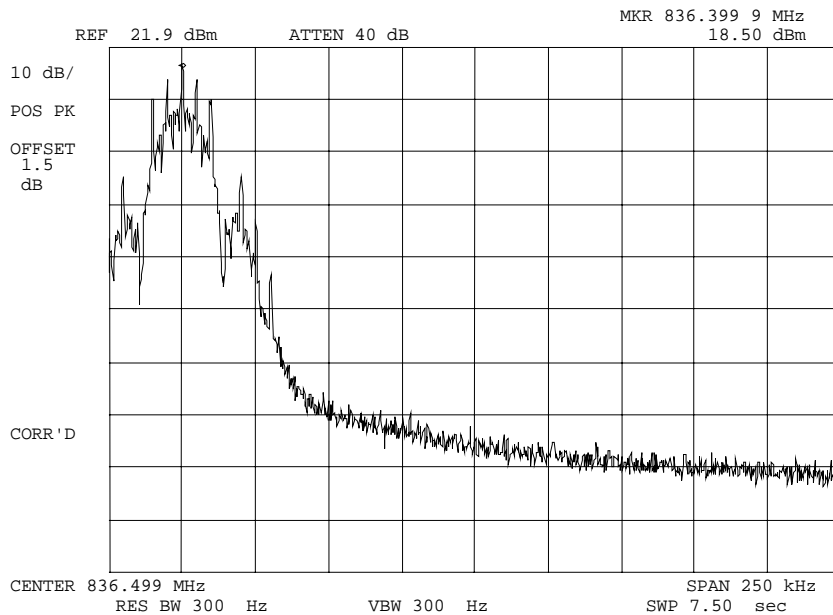


POWER: HIGH
 MODULATION: WBD
 OFFSET OCCUPIED BANDWIDTH

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 50 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150070: 2001-May-15 Tue 08:20:00
 STATE: 1:Low Power

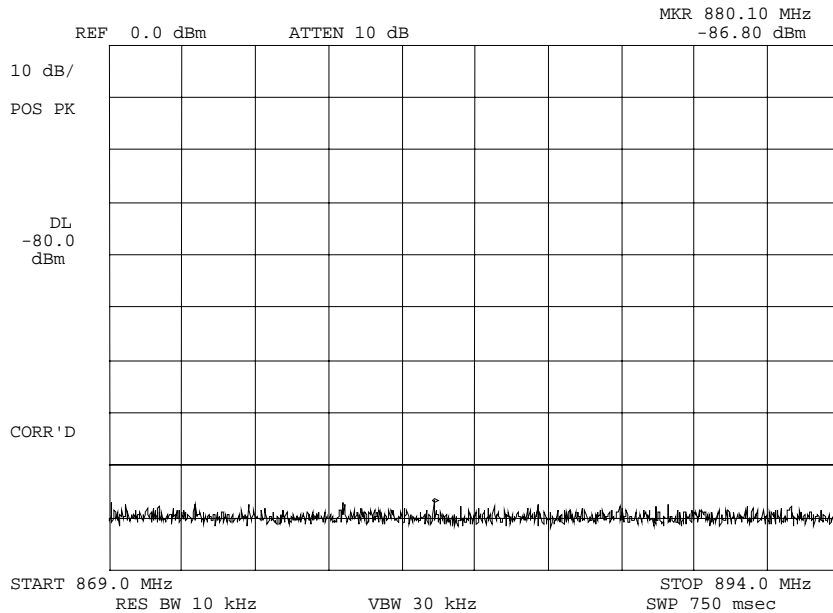


POWER: LOW
 MODULATION: ANY
 TX SPURS IN RX CRITICAL BAND

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO. 51 of 64.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g0150069: 2001-May-15 Tue 08:19:00
 STATE: 2:High Power

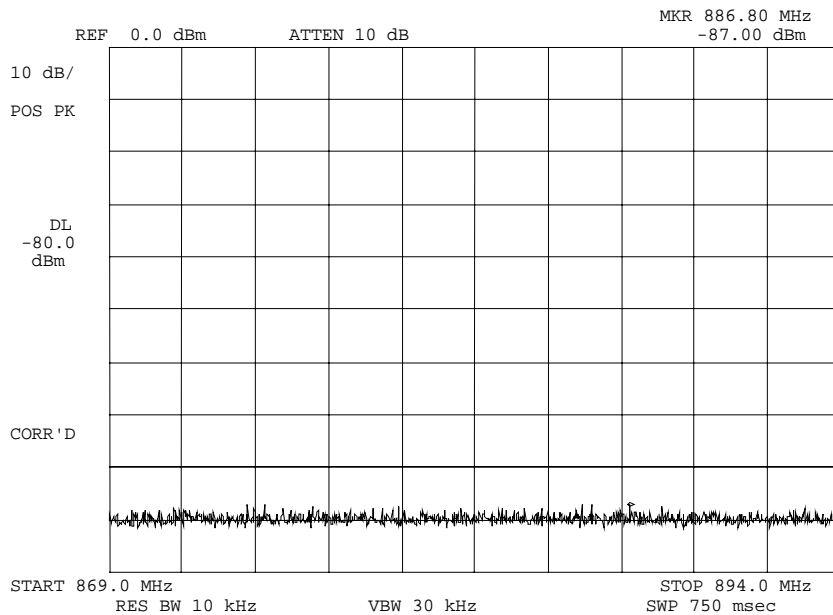

POWER: HIGH
 MODULATION: ANY
 TX SPURS IN RX CRITICAL BAND

PERFORMED BY: Doug Noble, B.A.S. E.E.T.

PAGE NO. 52 of 64.
NAME OF TEST: Spurious Emissions at Antenna Terminals
SPECIFICATION: 47 CFR 2.1051, 22.917
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a coaxial attenuator and then to a Spectrum Analyzer.
2. A notch filter was introduced to reduce or eliminate spurious emission which could be generated internally in the spectrum analyzer.
3. Measurements were made over the range from 45 kHz to 10 GHz for the worst case modulation so both the highest and lowest R.F. power settings.
4. All other emissions were 20 dB or more below the limit.
5. Spectrum analyzer bandwidth was set to section 22.917(h) as applicable.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

53 of 64.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

AMPS LOW POWER

g0150079: 2001-May-15 Tue 11:00:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.040000	1648.060000	-68.2	-74.7	-48.2
836.400000	1672.786000	-55.2	-61.7	-35.2
848.970000	1697.922000	-69.7	-76.2	-49.7
824.040000	2472.434000	-71.2	-77.7	-51.2
836.400000	2509.181000	-68.5	-75	-48.5
848.970000	2546.636000	-73.5	-80	-53.5
824.040000	3296.253000	-74.9	-81.4	-54.9
836.400000	3345.232000	-74.7	-81.2	-54.7
848.970000	3395.677000	-74.6	-81.1	-54.6
824.040000	4120.000000	-74.9	-81.4	-54.9
836.400000	4182.497000	-74	-80.5	-54
848.970000	4244.604000	-74.3	-80.8	-54.3
824.040000	4943.808000	-74.1	-80.6	-54.1
836.400000	5018.733000	-74.2	-80.7	-54.2
848.970000	5093.774000	-74.9	-81.4	-54.9
824.040000	5768.207000	-73.4	-79.9	-53.4
836.400000	5855.292000	-67.4	-73.9	-47.4
848.970000	5943.009000	-69.2	-75.7	-49.2
824.040000	6592.052000	-68.8	-75.3	-48.8
836.400000	6690.943000	-68.1	-74.6	-48.1
848.970000	6791.871000	-69.2	-75.7	-49.2
824.040000	7416.435000	-69.2	-75.7	-49.2
836.400000	7528.074000	-69	-75.5	-49
848.970000	7640.698000	-69.4	-75.9	-49.4
824.040000	8240.496000	-69.6	-76.1	-49.6
836.400000	8363.928000	-68.9	-75.4	-48.9
848.970000	8490.077000	-68.7	-75.2	-48.7
824.040000	9064.511000	-68.4	-74.9	-48.4
836.400000	9200.431000	-68.3	-74.8	-48.3
848.970000	9338.367000	-68.9	-75.4	-48.9
824.040000	9888.259000	-69.3	-75.8	-49.3
836.400000	10036.377000	-69.4	-75.9	-49.4
848.970000	10187.771000	-66.5	-73	-46.5
824.040000	10712.075000	-68.9	-75.4	-48.9
836.400000	10872.976000	-68.7	-75.2	-48.7
848.970000	11036.192000	-68.6	-75.1	-48.6
824.040000	11536.339000	-69.7	-76.2	-49.7
836.400000	11710.041000	-67.7	-74.2	-47.7
848.970000	11885.746000	-68.2	-74.7	-48.2
824.040000	12360.697000	-69.3	-75.8	-49.3
836.400000	12545.533000	-64.2	-70.7	-44.2
848.970000	12734.856000	-62.8	-69.3	-42.8

PAGE NO.

54 of 64.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 AMPS High Power
 g0150078: 2001-May-15 Tue 10:57:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.040000	1648.065000	-40.9	-62.8	-20.9
836.400000	1672.819000	-30.2	-52.1	-10.2
848.970000	1697.931000	-43.5	-65.4	-23.5
824.040000	2472.114000	-44	-65.9	-24
836.400000	2509.230000	-39.5	-61.4	-19.5
848.970000	2546.920000	-47.2	-69.1	-27.2
824.040000	3295.839000	-54.2	-76.1	-34.2
836.400000	3345.121000	-53.6	-75.5	-33.6
848.970000	3395.568000	-54.6	-76.5	-34.6
824.040000	4119.935000	-54.5	-76.4	-34.5
836.400000	4181.960000	-54.9	-76.8	-34.9
848.970000	4245.039000	-54.7	-76.6	-34.7
824.040000	4944.312000	-54.5	-76.4	-34.5
836.400000	5018.370000	-53.2	-75.1	-33.2
848.970000	5093.599000	-54.3	-76.2	-34.3
824.040000	5768.776000	-54.8	-76.7	-34.8
836.400000	5854.418000	-48.1	-70	-28.1
848.970000	5942.899000	-48.7	-70.6	-28.7
824.040000	6592.121000	-48	-69.9	-28
836.400000	6691.043000	-47.7	-69.6	-27.7
848.970000	6791.266000	-49.1	-71	-29.1
824.040000	7416.546000	-49.1	-71	-29.1
836.400000	7527.720000	-48.4	-70.3	-28.4
848.970000	7641.151000	-48	-69.9	-28
824.040000	8240.689000	-48.8	-70.7	-28.8
836.400000	8364.412000	-48.8	-70.7	-28.8
848.970000	8490.060000	-49.2	-71.1	-29.2
824.040000	9064.892000	-48.7	-70.6	-28.7
836.400000	9200.035000	-48.4	-70.3	-28.4
848.970000	9339.127000	-48.4	-70.3	-28.4
824.040000	9888.003000	-48.6	-70.5	-28.6
836.400000	10036.902000	-48.7	-70.6	-28.7
848.970000	10188.139000	-48.6	-70.5	-28.6
824.040000	10712.383000	-48.6	-70.5	-28.6
836.400000	10873.003000	-48.6	-70.5	-28.6
848.970000	11036.910000	-47.5	-69.4	-27.5
824.040000	11536.429000	-47.9	-69.8	-27.9
836.400000	11709.646000	-48.1	-70	-28.1
848.970000	11885.628000	-48.7	-70.6	-28.7
824.040000	12360.576000	-48.2	-70.1	-28.2
836.400000	12545.849000	-42.8	-64.7	-22.8
848.970000	12734.177000	-43.9	-65.8	-23.9

PAGE NO.

55 of 64.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

TDMA LOW POWER

g0150077: 2001-May-15 Tue 10:06:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.040000	1647.857000	-80.4	-76.2	-60.4
836.400000	1673.197000	-80	-75.8	-60
848.970000	1697.954000	-76.3	-72.1	-56.3
824.040000	2471.745000	-79.3	-75.1	-59.3
836.400000	2509.644000	-81.3	-77.1	-61.3
848.970000	2546.588000	-81.7	-77.5	-61.7
824.040000	3296.409000	-81.8	-77.6	-61.8
836.400000	3346.060000	-81.9	-77.7	-61.9
848.970000	3395.473000	-82.3	-78.1	-62.3
824.040000	4120.392000	-82.3	-78.1	-62.3
836.400000	4181.634000	-82.3	-78.1	-62.3
848.970000	4244.506000	-82.4	-78.2	-62.4
824.040000	4944.286000	-81.3	-77.1	-61.3
836.400000	5018.230000	-81.7	-77.5	-61.7
848.970000	5093.872000	-81.9	-77.7	-61.9
824.040000	5768.100000	-81.5	-77.3	-61.5
836.400000	5854.316000	-76.6	-72.4	-56.6
848.970000	5942.905000	-76.3	-72.1	-56.3
824.040000	6591.987000	-77	-72.8	-57
836.400000	6691.010000	-76.1	-71.9	-56.1
848.970000	6791.873000	-76.9	-72.7	-56.9
824.040000	7416.824000	-76.9	-72.7	-56.9
836.400000	7527.163000	-76.2	-72	-56.2
848.970000	7641.026000	-76.3	-72.1	-56.3
824.040000	8240.829000	-76.6	-72.4	-56.6
836.400000	8364.175000	-76.2	-72	-56.2
848.970000	8490.088000	-75.7	-71.5	-55.7
824.040000	9064.039000	-77.3	-73.1	-57.3
836.400000	9200.451000	-75.8	-71.6	-55.8
848.970000	9338.474000	-76.4	-72.2	-56.4
824.040000	9888.288000	-76.8	-72.6	-56.8
836.400000	10036.907000	-75.8	-71.6	-55.8
848.970000	10187.854000	-75.9	-71.7	-55.9
824.040000	10712.479000	-74.9	-70.7	-54.9
836.400000	10873.559000	-75.9	-71.7	-55.9
848.970000	11036.844000	-76.4	-72.2	-56.4
824.040000	11536.696000	-76.6	-72.4	-56.6
836.400000	11709.313000	-74.4	-70.2	-54.4
848.970000	11885.379000	-75.7	-71.5	-55.7
824.040000	12360.860000	-76.1	-71.9	-56.1
836.400000	12545.672000	-72	-67.8	-52
848.970000	12734.527000	-72	-67.8	-52

PAGE NO.

56 of 64.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 TDMA HIGH POWER
 g0150076: 2001-May-15 Tue 10:03:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
824.040000	1648.078000	-35	-63.7	-15
836.400000	1673.020000	-26.9	-55.6	-6.9
848.970000	1697.993000	-46.9	-75.6	-26.9
824.040000	2472.126000	-35.9	-64.6	-15.9
836.400000	2509.224000	-34.7	-63.4	-14.7
848.970000	2547.122000	-51.8	-80.5	-31.8
824.040000	3295.742000	-51.5	-80.2	-31.5
836.400000	3345.169000	-52	-80.7	-32
848.970000	3395.444000	-51.4	-80.1	-31.4
824.040000	4119.985000	-52	-80.7	-32
836.400000	4181.955000	-52	-80.7	-32
848.970000	4245.233000	-52.3	-81	-32.3
824.040000	4944.496000	-51.8	-80.5	-31.8
836.400000	5018.867000	-51.5	-80.2	-31.5
848.970000	5093.964000	-52.7	-81.4	-32.7
824.040000	5768.601000	-51.2	-79.9	-31.2
836.400000	5855.128000	-45.8	-74.5	-25.8
848.970000	5942.966000	-46.6	-75.3	-26.6
824.040000	6592.103000	-46.5	-75.2	-26.5
836.400000	6690.938000	-46.1	-74.8	-26.1
848.970000	6791.701000	-46.5	-75.2	-26.5
824.040000	7416.074000	-46.4	-75.1	-26.4
836.400000	7527.424000	-46.7	-75.4	-26.7
848.970000	7641.060000	-45.9	-74.6	-25.9
824.040000	8240.328000	-46.7	-75.4	-26.7
836.400000	8364.427000	-46.1	-74.8	-26.1
848.970000	8490.114000	-46.2	-74.9	-26.2
824.040000	9064.744000	-46.5	-75.2	-26.5
836.400000	9200.101000	-47	-75.7	-27
848.970000	9338.906000	-45.1	-73.8	-25.1
824.040000	9888.890000	-46.7	-75.4	-26.7
836.400000	10036.689000	-45.8	-74.5	-25.8
848.970000	10187.614000	-45.9	-74.6	-25.9
824.040000	10712.691000	-46.8	-75.5	-26.8
836.400000	10873.696000	-45.8	-74.5	-25.8
848.970000	11036.943000	-45.5	-74.2	-25.5
824.040000	11536.806000	-45.8	-74.5	-25.8
836.400000	11709.304000	-45.9	-74.6	-25.9
848.970000	11885.291000	-46	-74.7	-26
824.040000	12361.079000	-44.7	-73.4	-24.7
836.400000	12546.387000	-41.8	-70.5	-21.8
848.970000	12734.608000	-40.6	-69.3	-20.6

PAGE NO. 57 of 64.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 1.2.12

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement

- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
 - 1) Resolution Bandwidth ≤ 3 kHz.
 - 2) Video Bandwidth ≥ 10 kHz
 - 3) Sweep Speed ≤ 2000 Hz/second
 - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

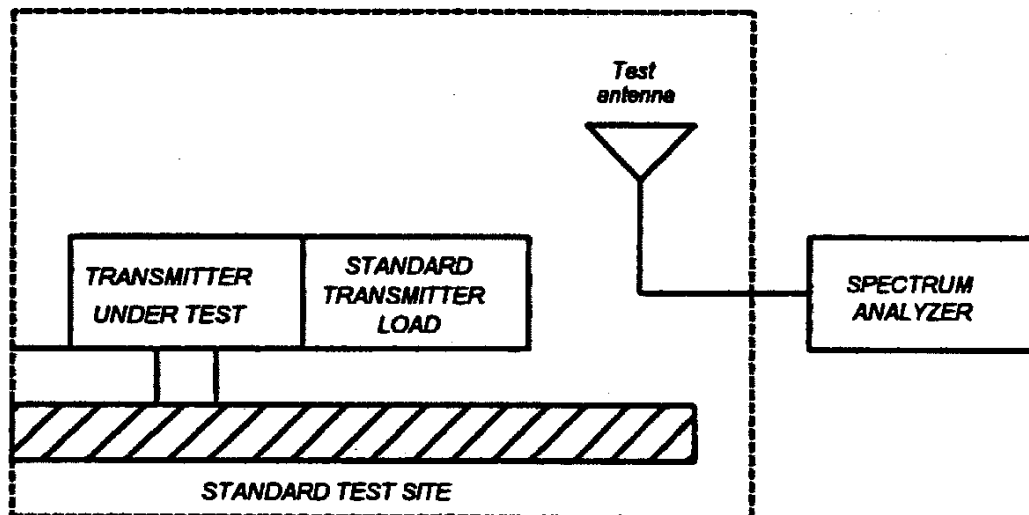


PAGE NO.

58 of 64.

NAME OF TEST:

Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to \pm the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

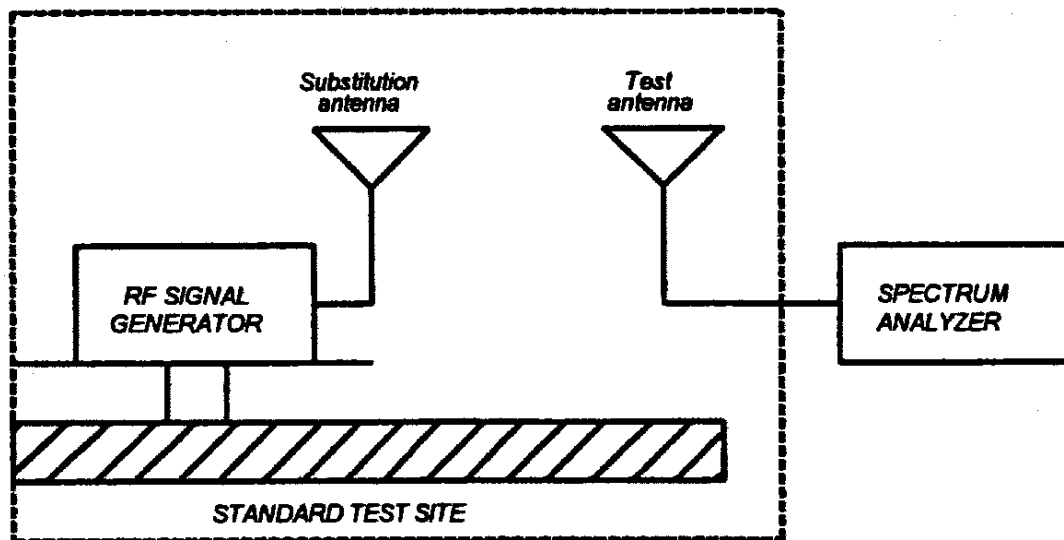

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 59 of 64.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =
 $10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l})$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset	Description	s/n	Cycle	Last Cal
(as applicable)				
<small>Per ANSI C63.4-1992/2000 Draft, 10.1.4</small>				
<u>TRANSDUCER</u>				
i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-00
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-00
i00089	Apriel 2001 200MHz-1GHz	001500	12 mo.	Sep-00
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-00
<u>AMPLIFIER</u>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-01
<u>SPECTRUM ANALYZER</u>				
i00029	HP 8563E	3213A00104	12 mo.	Aug-00
i00033	HP 85462A	3625A00357	12 mo.	May-01
i00048	HP 8566B	2511AD1467	6 mo.	May-01

PAGE NO. 60 of 64.

MEASUREMENT RESULTS: FIELD STRENGTH OF SPURIOUS RADIATION

Measurement Distance, m = 3

Spectrum Searched, GHz = 0 to 10

AMPS:

TUNED, MHz	CHANNEL NUMBER	EMISSION MHz/HARM.	LEVEL, dBc	
			Lo	Hi
824.040	991	2 nd - 10 th	<-61.1	<-61.1
836.400	380	2 nd - 10 th	<-61.1	<-61.1
848.970	799	2 nd - 10 th	<-61.1	<-61.1


TDMA:

TUNED, MHz	CHANNEL NUMBER	EMISSION MHz/HARM.	LEVEL, dBc	
			Lo	Hi
824.040	991	2 nd - 10 th	<-59.1	<-59.1
836.400	380	2 nd - 10 th	<-59.1	<-59.1
848.970	799	2 nd - 10 th	<-59.1	<-59.1

NOTE:

For channels 380, 799 and 991, the field strength of spurious radiation over the above noted range measured 20 dB or more below the limit.

PERFORMED BY:


 Doug Noble, B.A.S. E.E.T.

PAGE NO.

61 of 64.

NAME OF TEST:

Field Strength of Spurious Radiation

AMPS MODE

g0150073: 2001-May-15 Tue 08:35:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	ERP, dBc
836.400000	1672.792500	57.17	-0.38	-40.6	<-61.1
836.400000	2509.192500	54.83	3.06	-39.5	<-61.1
836.400000	3345.600833	39.5	5.7	-52.2	<-61.1
836.400000	4181.993333	38.33	7.53	-51.5	<-61.1
836.400000	5018.404167	44	9.26	-44.1	<-61.1
836.400000	5854.812500	34.83	10.78	-51.8	<-61.1
836.400000	6691.205000	31.17	12.2	-54	<-61.1
836.400000	7527.609167	32.33	13.5	-51.5	<-61.1
836.400000	8364.013333	33	14.55	-49.8	<-61.1

TDMA MODE

g0150085: 2001-May-15 Tue 09:41:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	ERP, dBc
836.400000	1673.037500	57.83	-0.38	-39.9	<-59.1
836.400000	2509.590000	63	3.06	-31.3	<-59.1
836.400000	3346.074166	48	5.71	-43.7	<-59.1
836.400000	4182.605832	43.5	7.53	-46.3	<-59.1
836.400000	5019.141665	47.67	9.26	-40.4	<-59.1
836.400000	5855.616665	37.33	10.78	-49.3	<-59.1
836.400000	6692.218332	38.83	12.2	-46.3	<-59.1
836.400000	7528.606665	30.67	13.5	-53.2	<-59.1
836.400000	8365.009999	32	14.56	-50.8	<-59.1

PAGE NO. 62 of 64.
NAME OF TEST: Frequency Stability (Temperature Variation)
SPECIFICATION: 47 CFR 2.1055(a)(1)
TEST CONDITIONS: As Indicated
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO. 63 of 64.

NAME OF TEST: Frequency Stability (Temperature Variation)

Frequency Error Observed, to nearest Hz

<u>TEMPERATURE</u>	<u>AMPS</u>	<u>TDMA</u>
-30	-360	-12
-20	-368	5
-10	-378	-11
0	-383	-9
10	-364	-11
20	-385	-10
30	-376	-5
40	-371	8
50	-374	-8

Measurements made using:

HP8920B Base Station Simulator	NMP00534
HP83206A TDMA Cellular Adapter	NMP00534
HP83236B PCS Interface	NMP00301
Thermotron S1.2C Temperature Chamber	NMP00771

PAGE NO. 64 of 64.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055 (b)(1)

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

Voltage @25C		AMPS, Hz	TDMA, Hz
115%	4.14	-358	-8
Nominal	3.6	-382	9
85%	3.06	-377	8
Endpoint	3	-371	1

END OF TEST REPORT

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:

A handwritten signature in black ink, reading "M. Flom P. Eng." with a stylized, cursive script.

Morton Flom, P. Eng.