



TEST REPORT

Applicant Name : Telepower Communication Co., Ltd.
Address : 5 Bld, Zone A, Hantian Technology Town No.17 ShenHai RD,
Nanhai District Foshan, China
Report Number : SZNS211110-57918E-RF-00C
FCC ID: 2AJ2B-F10

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: F10 face recognition smart terminal
Model No.: F10
Multiple Model(s) No.: F10T
Date Received: 2021/11/10
Date of Test: 2021/11/24~2022/01/18
Report Date: 2022/01/24

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Black Ding

Black Ding
EMC Engineer

Approved By:

Robert Li

Robert Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
FCC §15.203 – ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.407 (B) (6) §15.207 (A) – CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
TRANSF FACTOR & MARGIN CALCULATION.....	16
TEST DATA	16
§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR & MARGIN CALCULATION	21
TEST DATA	21
FCC §15.407(A),(E) – 26 DB & 6DB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	39
FCC §15.407(A) – CONDUCTED TRANSMITTER OUTPUT POWER.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	41
FCC §15.407(A) - POWER SPECTRAL DENSITY	42

TEST PROCEDURE42

TEST DATA43

APPENDIX44

APPENDIX A1: EMISSIONBANDWIDTH44

APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH50

APPENDIX A3: MIN EMISSION BANDWIDTH.....61

APPENDIX B: MAXIMUM POWER SPECTRAL DENSITY68

APPENDIX C: DUTY CYCLE79

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	5G Wi-Fi: 5150-5250MHz; 5725-5850MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80
Maximum Conducted Average Output Power	5150-5250 MHz: 15.77dBm 5725-5850 MHz: 15.06dBm
Modulation Technique	OFDM
Antenna Specification*	Antenna gain:1.8 dBi (It is provided by the manufacturer)
Voltage Range	DC 12V from adapter.
Sample serial number	SZNS211110-57918E-RF-S1 (For Radiated Test) SZNS211110-57918E-RF-S2 (RF Conducted Test) (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: BI24-120200-AdU Input: AC 100-240V, 50/60Hz, 0.8A Output: DC 12V, 2A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device supports 5G Wi-Fi 802.11a/n20/n40/ac20/ac40/ac80 modes.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/n20/ac20 mode: channel 36, 40, 48 were tested; For 802.11n40/ac40 mode: channel 38, 46 were tested. For 802.11ac80 mode, channel 42 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a/n20/ac20 mode: channel 149, 157, 165 were tested; For 802.11n40/ac40 mode: channel 151, 159 were tested. For 802.11ac80 mode, channel 155 was tested.

EUT Exercise Software

“QRCT”* software was used.

The worst case was performed under:

U-NII	Mode	Data Rate	Power Level*		
			Low channel	Middle channel	High channel
5150 – 5250MHz	802.11 a	6Mbps	16	16	16
	802.11 n20	MCS0	16	16	16
	802.11 n40	MCS0	16	/	16
	802.11 ac20	MCS0	16	16	16
	802.11 ac40	MCS0	16	/	16
	802.11 ac80	MCS0	/	16	/

U-NII	Mode	Data Rate	Power Level*		
			Low channel	Middle channel	High channel
5725 – 5850MHz	802.11 a	6Mbps	16	16	16
	802.11 n20	MCS0	16	16	16
	802.11 n40	MCS0	16	/	16
	802.11 ac20	MCS0	16	16	16
	802.11 ac40	MCS0	16	/	16
	802.11 ac80	MCS0	/	16	/

The worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations.

The software and power level was provided by the applicant.

Duty cycle

Test Result: Pass. Please refer to the Appendix.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
HUAWEI	Router	WS5100	A4933FEF1D01
Unknown	Load*4	Unknown	Unknown
Kingston	USB Disk	DTSE9G2 32G	DTSE9G2

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielded detachable DC cable	1.0	adapter	EUT
Un-shielded detachable DC cable	0.3	EUT	Load
Un-shielded detachable RJ45 cable	5.0	EUT	Router

Block Diagram of Test Setup

For conducted emission:

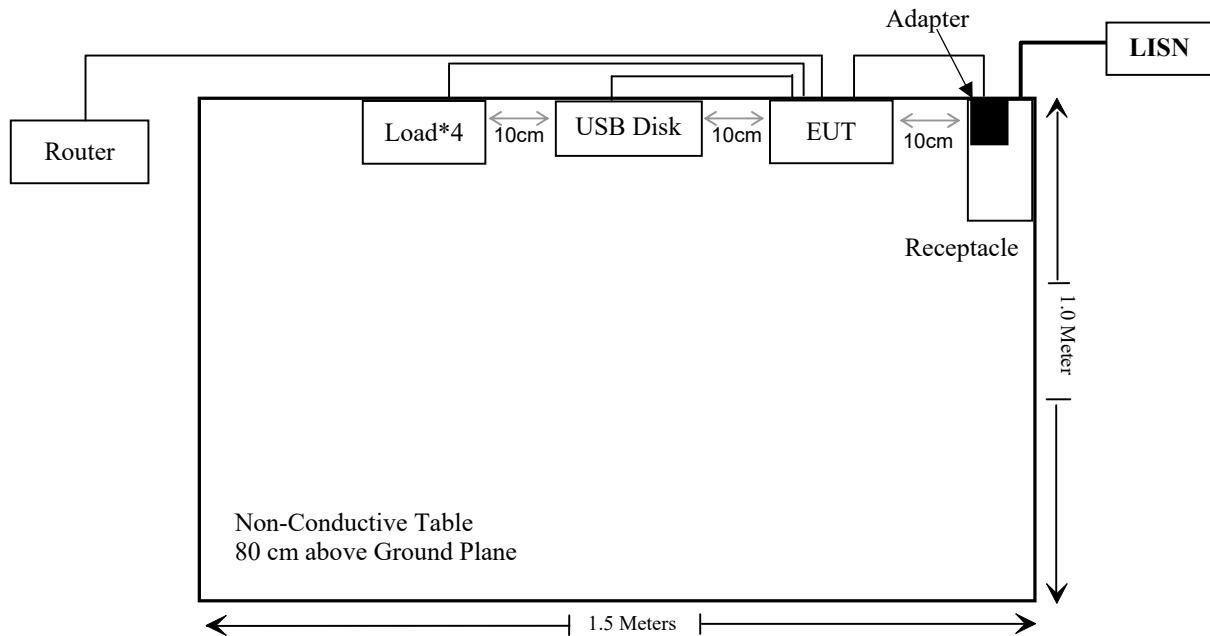

For radiated emission:

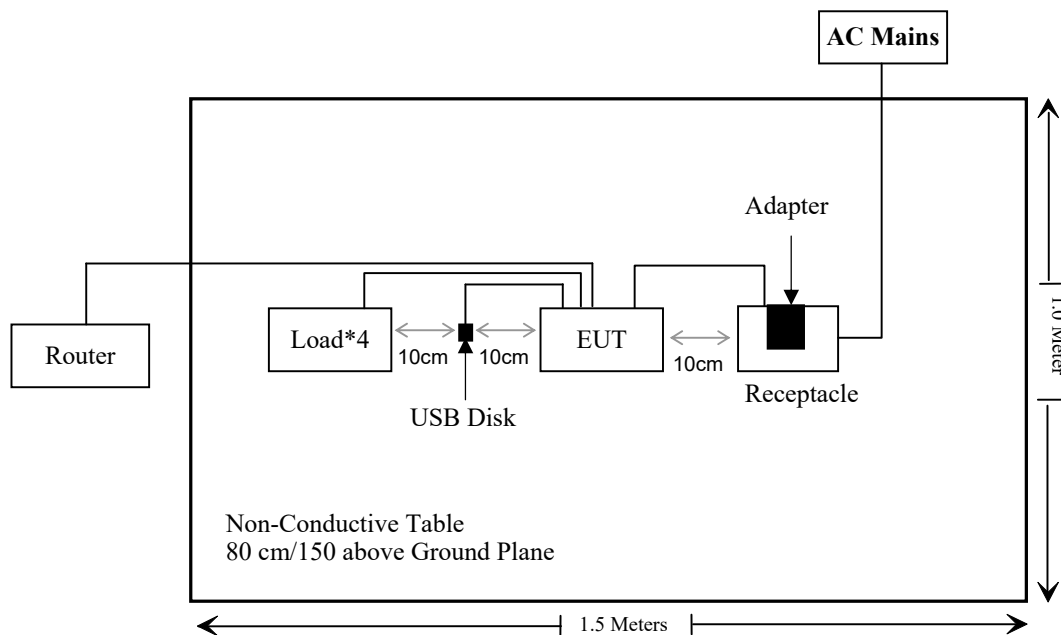

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 15.247 (i), § 1.1307 (b) (1) & § 2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§ 15.203	Antenna Requirement	Compliant
§ 15.407(b)(9)& § 15.207(a)	Conducted Emissions	Compliant
§ 15.205& § 15.209 & § 15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§ 15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§ 15.407(a)	Conducted Transmitter Output Power	Compliant
§ 15.407 (a)	Power Spectral Density	Compliant
§ 15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§ 15.407 (h)	Dynamic Frequency Selection (DFS)	Not Applicable*

Not Applicable: the EUT has no TPC function which was declared by the applicant.

Not Applicable*: the EUT not operate with any part within 5250-5350MHz and 5470-5725MHz.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821G (V9)					
Radiated emission test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.15/5.35g-45	075	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.725/5.875G-45	065	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821G (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF conducted test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101948	2021/05/27	2022/05/26
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05
Unknown	RF Cable	Unknown	Unknown	Each time	/

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density
a)

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BT	2402-2480	1.8	1.51	1.5	1.41	20	0.0004	1
BLE	2402-2480	1.8	1.51	1.5	1.41	20	0.0004	1
2.4GHz Wi-Fi	2412-2462	1.8	1.51	17.0	50.12	20	0.015	1
5GHz Wi-Fi	5150-5250/ 5725-5850	1.8	1.51	16.0	39.81	20	0.012	1
WCDMA B2	1850-1910	2.6	1.82	24.0	251.19	20	0.091	1
WCDMA B5	824-849	1.9	1.55	24.0	251.19	20	0.077	0.55
LTE B2	1850-1910	2.6	1.82	24.0	251.19	20	0.091	1
LTE B5	824-849	1.9	1.55	24.0	251.19	20	0.077	0.55

Note: 1. The antenna gain and tune up conducted power was declared by the applicant.

2. The BT/Wi-Fi can transmit at the same time with the WWAN, the BT, BLE, 2.4GHz Wi-Fi and 5GHz Wi-Fi cannot transmit simultaneously.

Simultaneous transmitting consideration (worst case):

The ratio= $MPE_{2.4G\ Wi-Fi}/limit + MPE_{WWAN}/limit = 0.015/1 + 0.077/0.55 = 0.155 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- b. Antenna must be permanently attached to the unit.
- c. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna which was permanently attached, and the maximum antenna gain is 1.8dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

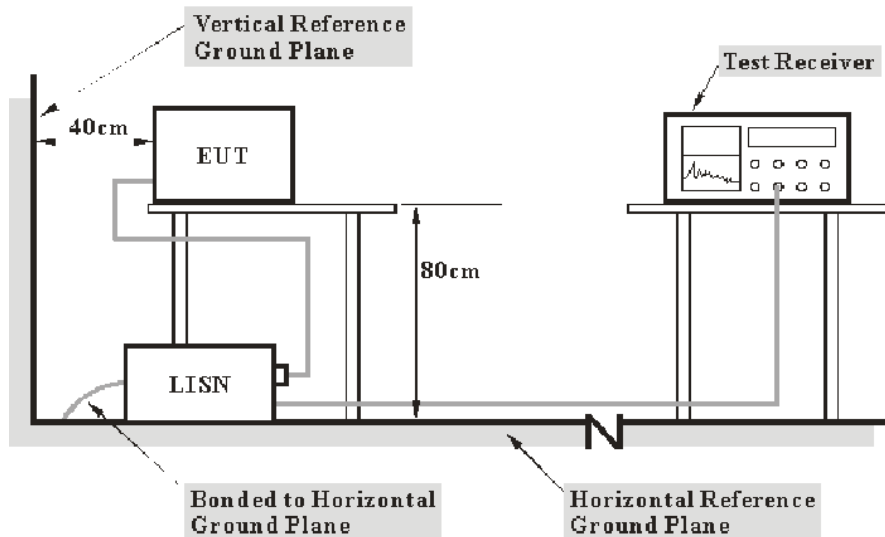

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Over Limit} = \text{level} - \text{Limit}$$

$$\text{Level} = \text{reading level} + \text{Transd Factor}$$

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa


The testing was performed by Bin Duan on 2022-01-11.

EUT operation mode: Transmitting (worst case is 802.11 n20 mode, 5180MHz)

AC 120V/60 Hz, Line:

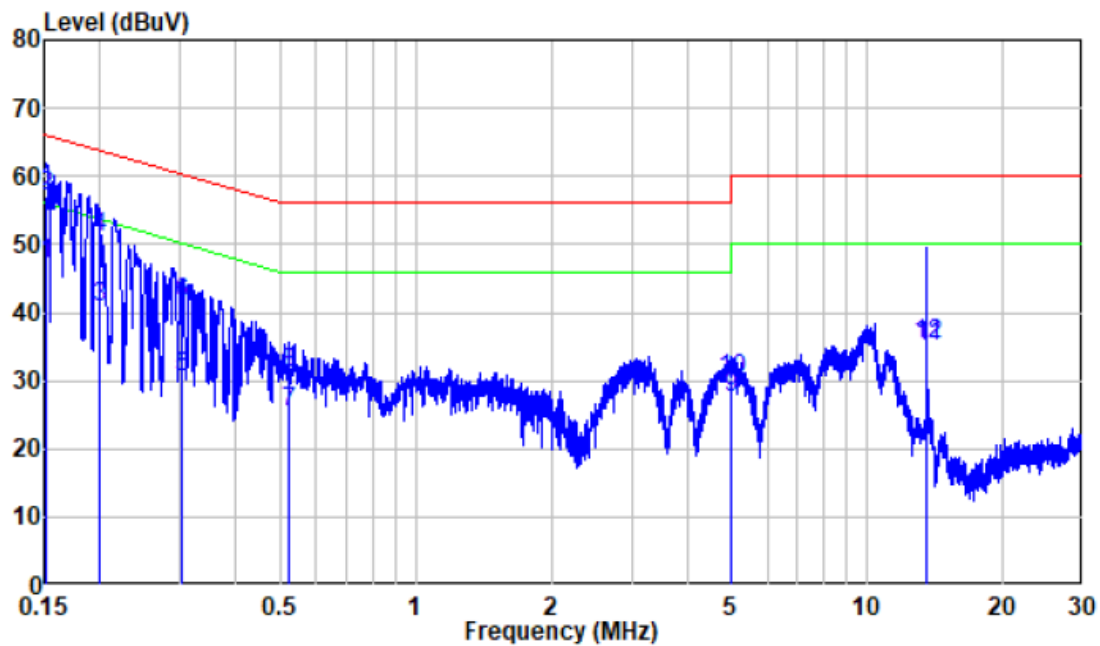

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	9.90	37.19	47.09	55.90	-8.81	Average
2	0.152	9.90	47.22	57.12	65.90	-8.78	QP
3	0.200	9.80	30.86	40.66	53.62	-12.96	Average
4	0.200	9.80	41.11	50.91	63.62	-12.71	QP
5	0.304	9.80	20.55	30.35	50.12	-19.77	Average
6	0.304	9.80	31.62	41.42	60.12	-18.70	QP
7	0.522	9.81	15.51	25.32	46.00	-20.68	Average
8	0.522	9.81	21.36	31.17	56.00	-24.83	QP
9	4.998	9.99	17.39	27.38	46.00	-18.62	Average
10	4.998	9.99	20.17	30.16	56.00	-25.84	QP
11	13.569	10.06	25.09	35.15	50.00	-14.85	Average
12	13.569	10.06	25.16	35.22	60.00	-24.78	QP

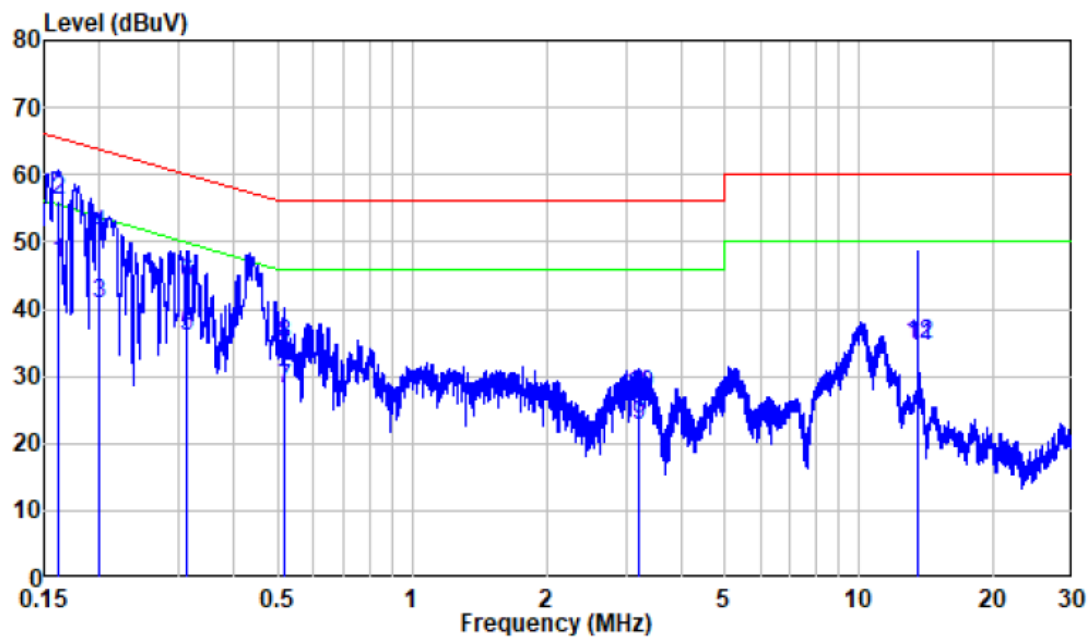AC 120V/60 Hz, Neutral:

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	9.93	36.81	46.74	55.36	-8.62	Average
2	0.162	9.93	46.13	56.06	65.36	-9.30	QP
3	0.200	10.00	30.73	40.73	53.61	-12.88	Average
4	0.200	10.00	40.92	50.92	63.61	-12.69	QP
5	0.314	9.95	25.90	35.85	49.87	-14.02	Average
6	0.314	9.95	33.77	43.72	59.87	-16.15	QP
7	0.516	9.91	18.17	28.08	46.00	-17.92	Average
8	0.516	9.91	24.94	34.85	56.00	-21.15	QP
9	3.222	10.00	12.53	22.53	46.00	-23.47	Average
10	3.222	10.00	17.09	27.09	56.00	-28.91	QP
11	13.569	10.06	24.31	34.37	50.00	-15.63	Average
12	13.569	10.06	24.71	34.77	60.00	-25.23	QP

§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

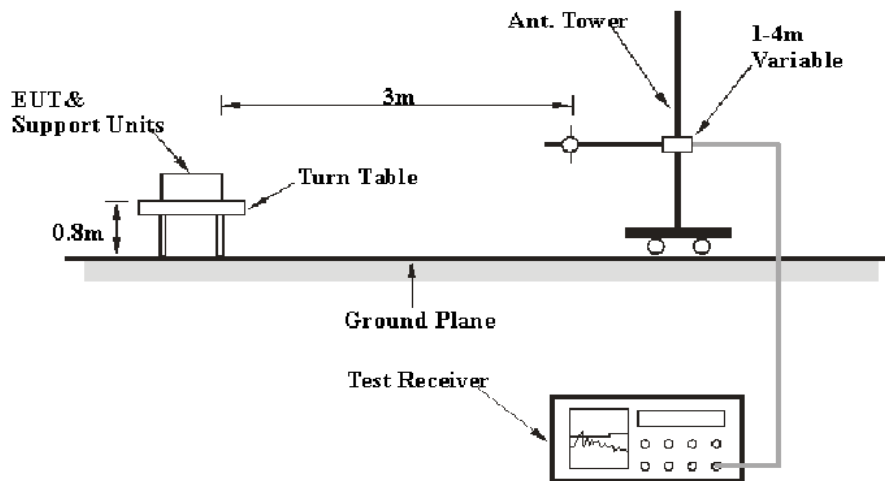

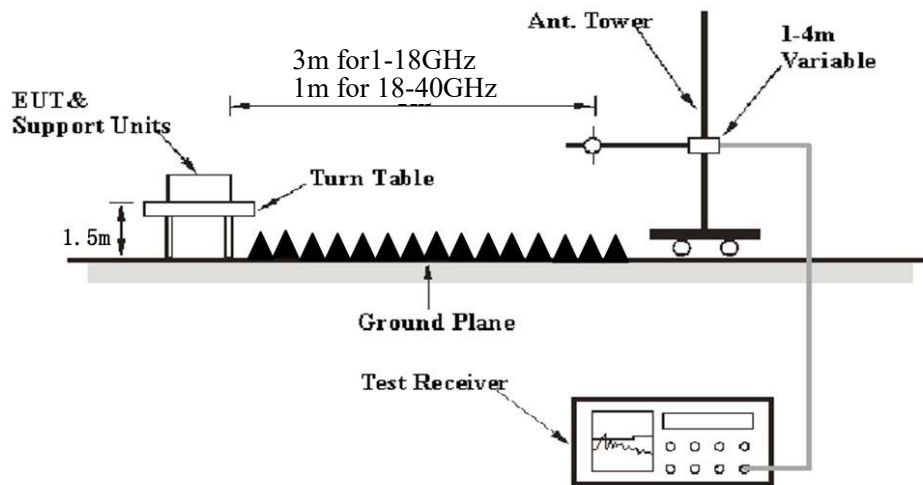Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range measured at 1m distance, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin/over limit of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Result/Corrected Amplitude-Limit} \\ \text{Result/Corrected Amplitude} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	25°C
Relative Humidity:	64 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Deng on 2022-01-04 for below 1GHz and 2022-01-04 for above 1GHz.

EUT operation mode: Transmitting


30 MHz – 1 GHz: (worst case is 802.11 n20 mode, 5180MHz)

Note: when the test result of peak was less than the limit of QP by more than 6dB, just peak value were recorded.

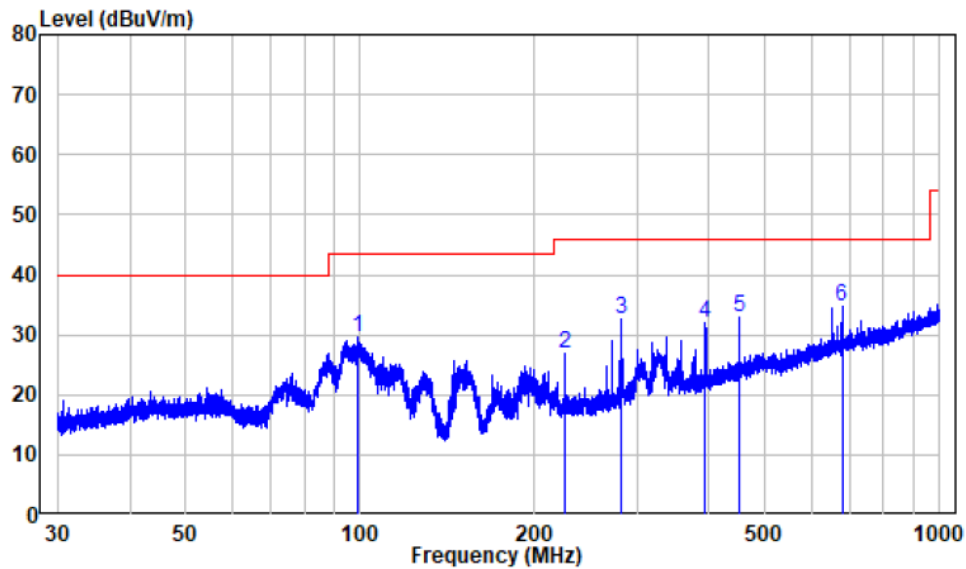Horizontal

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	98.746	-12.07	41.53	29.46	43.50	-14.04	Peak
2	225.901	-11.23	38.09	26.86	46.00	-19.14	Peak
3	281.871	-9.52	42.03	32.51	46.00	-13.49	Peak
4	393.818	-6.82	38.75	31.93	46.00	-14.07	Peak
5	451.729	-5.59	38.40	32.81	46.00	-13.19	Peak
6	678.174	-1.53	36.19	34.66	46.00	-11.34	Peak

Vertical

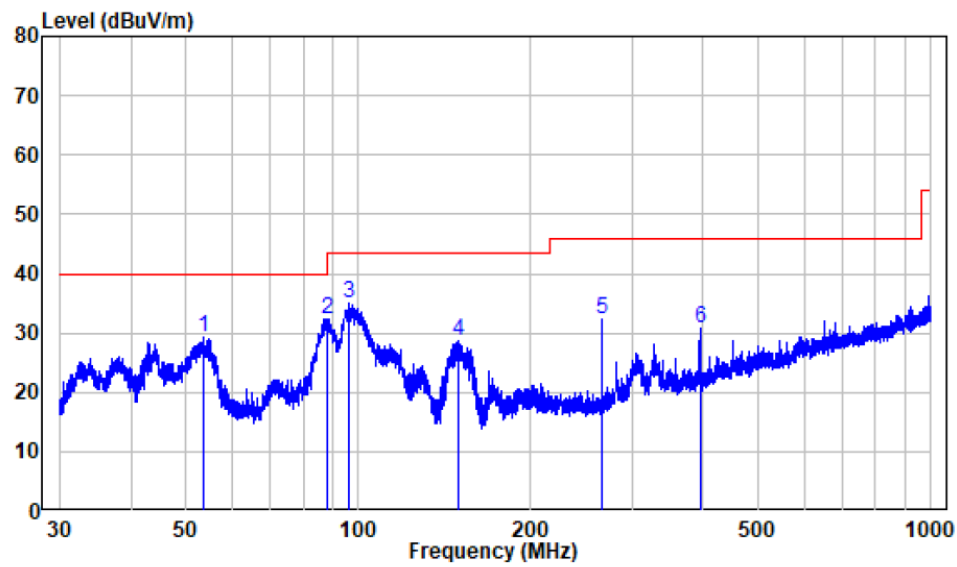

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	53.670	-10.28	39.52	29.24	40.00	-10.76	Peak
2	88.420	-14.46	46.87	32.41	43.50	-11.09	Peak
3	96.014	-12.30	47.19	34.89	43.50	-8.61	Peak
4	149.551	-15.29	44.07	28.78	43.50	-14.72	Peak
5	266.843	-10.37	42.56	32.19	46.00	-13.81	Peak
6	395.028	-6.81	37.64	30.83	46.00	-15.17	Peak

5150-5250 MHz:

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407	
	Reading (dBμV)	PK/QP/Ave.	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5180 MHz									
4500	63.59	PK	346	2.4	H	-4.72	58.87	74	-15.13
4500	50.53	AV	346	2.4	H	-4.72	45.81	54	-8.19
4500	64.21	PK	49	2.5	V	-4.72	59.49	74	-14.51
4500	50.20	AV	49	2.5	V	-4.72	45.48	54	-8.52
5150	65.06	PK	89	1.7	H	-2.73	62.33	74	-11.67
5150	50.17	AV	89	1.7	H	-2.73	47.44	54	-6.56
5150	67.91	PK	350	1.7	V	-2.73	65.18	74	-8.82
5150	52.17	AV	350	1.7	V	-2.73	49.44	54	-4.56
10360	42.76	PK	214	1.3	H	8.12	50.88	68.2	-17.32
10360	42.27	PK	24	1.4	V	8.12	50.39	68.2	-17.81
5200 MHz									
10400	42.68	PK	144	1.6	H	8.24	50.92	68.2	-17.28
10400	42.13	PK	257	2.2	V	8.24	50.37	68.2	-17.83
5240 MHz									
5350	63.83	PK	295	2.1	H	-2.33	61.5	74	-12.5
5350	50.23	AV	295	2.1	H	-2.33	47.9	54	-6.1
5350	63.09	PK	346	1.9	V	-2.33	60.76	74	-13.24
5350	50.11	AV	346	1.9	V	-2.33	47.78	54	-6.22
5460	63.71	PK	53	1.9	H	-2.26	61.45	74	-12.55
5460	50.93	AV	53	1.9	H	-2.26	48.67	54	-5.33
5460	63.43	PK	255	2	V	-2.26	61.17	74	-12.83
5460	51.11	AV	255	2	V	-2.26	48.85	54	-5.15
10480	42.03	PK	313	2	H	8.55	50.58	68.2	-17.62
10480	41.90	PK	200	1.2	V	8.55	50.45	68.2	-17.75

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part15.407	
	Reading (dBµV)	PK/QP/Ave.	Angle Degree	Height (m)	Polar (H / V)			Limit (dBµV/m)	Margin (dB)
802.11n20									
5180 MHz									
4500	63.80	PK	214	1.2	H	-4.72	59.08	74	-14.92
4500	50.07	AV	214	1.2	H	-4.72	45.35	54	-8.65
4500	64.29	PK	244	1.4	V	-4.72	59.57	74	-14.43
4500	50.13	AV	244	1.4	V	-4.72	45.41	54	-8.59
5150	65.20	PK	220	1.4	H	-2.73	62.47	74	-11.53
5150	50.79	AV	220	1.4	H	-2.73	48.06	54	-5.94
5150	68.30	PK	124	2	V	-2.73	65.57	74	-8.43
5150	52.22	AV	124	2	V	-2.73	49.49	54	-4.51
10360	42.40	PK	301	1.9	H	8.12	50.52	68.2	-17.68
10360	41.87	PK	229	1.1	V	8.12	49.99	68.2	-18.21
5200 MHz									
10400	42.65	PK	259	1.3	H	8.24	50.89	68.2	-17.31
10400	42.01	PK	36	1.6	V	8.24	50.25	68.2	-17.95
5240 MHz									
5350	60.78	PK	161	1	H	-2.33	58.45	74	-15.55
5350	47.50	AV	161	1	H	-2.33	45.17	54	-8.83
5350	62.93	PK	314	1.3	V	-2.33	60.6	74	-13.4
5350	49.73	AV	314	1.3	V	-2.33	47.4	54	-6.6
5460	61.70	PK	24	1.7	H	-2.26	59.44	74	-14.56
5460	48.28	AV	24	1.7	H	-2.26	46.02	54	-7.98
5460	63.92	PK	104	2.3	V	-2.26	61.66	74	-12.34
5460	50.39	AV	104	2.3	V	-2.26	48.13	54	-5.87
10480	38.71	PK	173	2.4	H	8.55	47.26	68.2	-20.94
10480	40.82	PK	340	1.7	V	8.55	49.37	68.2	-18.83

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	PK/QP/Ave.	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5190 MHz									
4500	64.00	PK	194	1.7	H	-4.72	59.28	74	-14.72
4500	50.85	AV	194	1.7	H	-4.72	46.13	54	-7.87
4500	63.57	PK	256	1.8	V	-4.72	58.85	74	-15.15
4500	50.87	AV	256	1.8	V	-4.72	46.15	54	-7.85
5150	67.09	PK	337	2.1	H	-2.73	64.36	74	-9.64
5150	52.66	AV	337	2.1	H	-2.73	49.93	54	-4.07
5150	65.15	PK	352	2.1	V	-2.73	62.42	74	-11.58
5150	50.84	AV	352	2.1	V	-2.73	48.11	54	-5.89
10380	42.01	PK	160	2.4	H	8.18	50.19	68.2	-18.01
10380	41.53	PK	115	1.1	V	8.18	49.71	68.2	-18.49
5230 MHz									
5350	64.25	PK	22	1.5	H	-2.33	61.92	74	-12.08
5350	51.03	AV	22	1.5	H	-2.33	48.7	54	-5.3
5350	64.50	PK	29	1.4	V	-2.33	62.17	74	-11.83
5350	51.02	AV	29	1.4	V	-2.33	48.69	54	-5.31
5460	64.37	PK	166	2	H	-2.26	62.11	74	-11.89
5460	52.07	AV	166	2	H	-2.26	49.81	54	-4.19
5460	63.78	PK	37	1.9	V	-2.26	61.52	74	-12.48
5460	51.77	AV	37	1.9	V	-2.26	49.51	54	-4.49
10460	41.44	PK	278	1.5	H	8.47	49.91	68.2	-18.29
10460	41.25	PK	201	2.2	V	8.47	49.72	68.2	-18.48

Frequency (MHz)	Receiver		Turn-Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11AC20									
5180 MHZ									
4500	64.33	PK	265	2.2	H	-4.72	59.61	74	-14.39
4500	51.32	AV	265	2.2	H	-4.72	46.60	54	-7.4
4500	64.12	PK	317	2.5	V	-4.72	59.40	74	-14.6
4500	51.37	AV	317	2.5	V	-4.72	46.65	54	-7.35
5150	65.48	PK	54	1.9	H	-2.73	62.75	74	-11.25
5150	51.43	AV	54	1.9	H	-2.73	48.70	54	-5.3
5150	66.80	PK	63	1	V	-2.73	64.07	74	-9.93
5150	52.19	AV	63	1	V	-2.73	49.46	54	-4.54
10360	41.90	PK	36	1.8	H	8.12	50.02	68.2	-18.18
10360	41.55	PK	323	2.2	V	8.12	49.67	68.2	-18.53
5200 MHZ									
10400	41.73	PK	169	1.6	H	8.24	49.97	68.2	-18.23
10400	41.62	PK	184	1.9	V	8.24	49.86	68.2	-18.34
5240 MHZ									
5350	64.58	PK	73	1.1	H	-2.33	62.25	74	-11.75
5350	51.42	AV	73	1.1	H	-2.33	49.09	54	-4.91
5350	64.40	PK	29	2.4	V	-2.33	62.07	74	-11.93
5350	51.08	AV	29	2.4	V	-2.33	48.75	54	-5.25
5460	64.34	PK	318	1.3	H	-2.26	62.08	74	-11.92
5460	51.69	AV	318	1.3	H	-2.26	49.43	54	-4.57
5460	64.22	PK	232	2.3	V	-2.26	61.96	74	-12.04
5460	51.76	AV	232	2.3	V	-2.26	49.5	54	-4.5
10480	41.11	PK	351	1.6	H	8.55	49.66	68.2	-18.54
10480	40.83	PK	68	1.3	V	8.55	49.38	68.2	-18.82

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	PK/QP/Ave.	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11AC40									
5190 MHZ									
4500	64.09	PK	130	1.2	H	-4.72	59.37	74	-14.63
4500	51.35	AV	130	1.2	H	-4.72	46.63	54	-7.37
4500	64.27	PK	350	1.2	V	-4.72	59.55	74	-14.45
4500	51.08	AV	350	1.2	V	-4.72	46.36	54	-7.64
5150	65.15	PK	164	1.6	H	-2.73	62.42	74	-11.58
5150	51.97	AV	164	1.6	H	-2.73	49.24	54	-4.76
5150	66.80	PK	276	1.1	V	-2.73	64.07	74	-9.93
5150	52.76	AV	276	1.1	V	-2.73	50.03	54	-3.97
10380	41.59	PK	278	1.6	H	8.18	49.77	68.2	-18.43
10380	41.43	PK	233	2.3	V	8.18	49.61	68.2	-18.59
5230 MHZ									
5350	64.10	PK	301	1.7	H	-2.33	61.77	74	-12.23
5350	51.16	AV	301	1.7	H	-2.33	48.83	54	-5.17
5350	64.72	PK	341	1.3	V	-2.33	62.39	74	-11.61
5350	50.95	AV	341	1.3	V	-2.33	48.62	54	-5.38
5460	64.28	PK	103	2.2	H	-2.26	62.02	74	-11.98
5460	51.90	AV	103	2.2	H	-2.26	49.64	54	-4.36
5460	64.10	PK	65	1.5	V	-2.26	61.84	74	-12.16
5460	51.85	AV	65	1.5	V	-2.26	49.59	54	-4.41
10460	41.41	PK	282	1.6	H	8.47	49.88	68.2	-18.32
10460	41.25	PK	94	1.2	V	8.47	49.72	68.2	-18.48

Frequency (MHz)	Receiver		Turn-Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11AC80									
5210 MHZ									
4500	64.49	PK	239	1.6	H	-4.72	59.77	74	-14.23
4500	51.42	AV	239	1.6	H	-4.72	46.70	54	-7.3
4500	63.71	PK	253	1.7	V	-4.72	58.99	74	-15.01
4500	51.30	AV	253	1.7	V	-4.72	46.58	54	-7.42
5150	65.62	PK	146	2.1	H	-2.73	62.89	74	-11.11
5150	52.07	AV	146	2.1	H	-2.73	49.34	54	-4.66
5150	66.18	PK	271	1.1	V	-2.73	63.45	74	-10.55
5150	52.82	AV	271	1.1	V	-2.73	50.09	54	-3.91
5350	64.36	PK	169	1.1	H	-2.33	62.03	74	-11.97
5350	51.07	AV	169	1.1	H	-2.33	48.74	54	-5.26
5350	64.82	PK	66	2.2	V	-2.33	62.49	74	-11.51
5350	51.05	AV	66	2.2	V	-2.33	48.72	54	-5.28
5460	64.29	PK	34	1.8	H	-2.26	62.03	74	-11.97
5460	51.90	AV	34	1.8	H	-2.26	49.64	54	-4.36
5460	63.86	PK	257	2.5	V	-2.26	61.6	74	-12.4
5460	51.65	AV	257	2.5	V	-2.26	49.39	54	-4.61
10420	41.46	PK	73	2.4	H	8.31	49.77	68.2	-18.43
10420	41.49	PK	30	2	V	8.31	49.8	68.2	-18.4

5725-5850 MHz:

Frequency (MHz)	Receiver		Turn-Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11a									
5745 MHz									
5650	62.03	PK	123	2.4	H	-1.95	60.08	68.2	-8.12
5650	64.32	PK	195	2.4	V	-1.95	62.37	68.2	-5.83
5700	63.76	PK	101	2.1	H	-2.02	61.74	105.2	-43.46
5700	65.94	PK	290	1.1	V	-2.02	63.92	105.2	-41.28
5720	63.65	PK	288	2	H	-1.97	61.68	110.8	-49.12
5720	65.85	PK	254	1	V	-1.97	63.88	110.8	-46.92
5725	68.44	PK	46	1.7	H	-1.96	66.48	122.2	-55.72
5725	70.64	PK	242	2.3	V	-1.96	68.68	122.2	-53.52
11490	42.21	PK	91	1.7	H	6.63	48.84	74	-25.16
11490	44.44	PK	248	1.2	V	6.63	51.07	74	-22.93
5785 MHz									
11570	42.42	PK	179	1.6	H	6.59	49.01	74	-24.99
11570	44.53	PK	283	2.3	V	6.59	51.12	74	-22.88
5825 MHz									
5850	68.00	PK	87	1.5	H	-1.81	66.19	122.2	-56.01
5850	70.11	PK	45	1.9	V	-1.81	68.30	122.2	-53.9
5855	66.97	PK	47	2.4	H	-1.82	65.15	110.8	-45.65
5855	69.21	PK	16	2.1	V	-1.82	67.39	110.8	-43.41
5875	96.32	PK	92	2.5	H	-1.84	94.48	105.2	-10.72
5875	98.50	PK	10	1.3	V	-1.84	96.66	105.2	-8.54
5925	64.56	PK	65	1.7	H	-1.82	62.74	68.2	-5.46
5925	66.68	PK	91	1.6	V	-1.82	64.86	68.2	-3.34
11650	40.35	PK	252	2.2	H	6.77	47.12	74	-26.88
11650	42.50	PK	86	1.7	V	6.77	49.27	74	-24.73

Frequency (MHz)	Receiver		Turn-Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n20									
5745 MHz									
5650	62.04	PK	290	2	H	-1.95	60.09	68.2	-8.11
5650	64.17	PK	78	2.1	V	-1.95	62.22	68.2	-5.98
5700	64.49	PK	196	2.2	H	-2.02	62.47	105.2	-42.73
5700	66.65	PK	188	2	V	-2.02	64.63	105.2	-40.57
5720	63.19	PK	273	1.9	H	-1.97	61.22	110.8	-49.58
5720	65.32	PK	91	1.8	V	-1.97	63.35	110.8	-47.45
5725	68.82	PK	2	2	H	-1.96	66.86	122.2	-55.34
5725	71.00	PK	103	1.8	V	-1.96	69.04	122.2	-53.16
11490	42.39	PK	4	1.6	H	6.63	49.02	74	-24.98
11490	44.53	PK	258	2.5	V	6.63	51.16	74	-22.84
5785 MHz									
11570	42.53	PK	39	2.4	H	6.59	49.12	74	-24.88
11570	44.65	PK	138	1.1	V	6.59	51.24	74	-22.76
5825 MHz									
5850	64.44	PK	159	1.3	H	-1.81	62.63	122.2	-59.57
5850	66.87	PK	255	2.4	V	-1.81	65.06	122.2	-57.14
5855	67.26	PK	74	1.5	H	-1.82	65.44	110.8	-45.36
5855	69.48	PK	360	2	V	-1.82	67.66	110.8	-43.14
5875	68.06	PK	15	1.5	H	-1.84	66.22	105.2	-38.98
5875	70.25	PK	319	1.8	V	-1.84	68.41	105.2	-36.79
5925	64.06	PK	88	1.2	H	-1.82	62.24	68.2	-5.96
5925	66.16	PK	44	1.5	V	-1.82	64.34	68.2	-3.86
11650	40.37	PK	99	2.2	H	6.77	47.14	74	-26.86
11650	42.52	PK	285	2.1	V	6.77	49.29	74	-24.71

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	PK/QP/Ave.	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11n40									
5755 MHz									
5650	62.64	PK	39	1.9	H	-1.95	60.69	68.2	-7.51
5650	65.04	PK	7	2.2	V	-1.95	63.09	68.2	-5.11
5700	69.80	PK	314	1.7	H	-2.02	67.78	105.2	-37.42
5700	72.00	PK	9	2	V	-2.02	69.98	105.2	-35.22
5720	67.10	PK	328	2	H	-1.97	65.13	110.8	-45.67
5720	69.37	PK	147	2.1	V	-1.97	67.40	110.8	-43.40
5725	72.00	PK	61	2	H	-1.96	70.04	122.2	-52.16
5725	73.83	PK	327	2.1	V	-1.96	71.87	122.2	-50.33
11510	42.68	PK	138	1.5	H	6.59	49.27	74	-24.73
11510	44.80	PK	280	1.4	V	6.59	51.39	74	-22.61
5795 MHz									
5850	65.49	PK	120	1.9	H	-1.81	63.68	122.2	-58.52
5850	67.39	PK	55	1.7	V	-1.81	65.58	122.2	-56.62
5855	64.76	PK	16	1.5	H	-1.82	62.94	110.8	-47.86
5855	67.07	PK	115	1.7	V	-1.82	65.25	110.8	-45.55
5875	96.58	PK	31	1.2	H	-1.84	94.74	105.2	-10.46
5875	98.77	PK	67	1.6	V	-1.84	96.93	105.2	-8.27
5925	63.67	PK	248	2.3	H	-1.82	61.85	68.2	-6.35
5925	65.92	PK	344	2.2	V	-1.82	64.10	68.2	-4.1
11590	42.56	PK	63	1.3	H	6.57	49.13	74	-24.87
11590	44.80	PK	258	2.1	V	6.57	51.37	74	-22.63

Frequency (MHz)	Receiver		Turn-Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11AC20									
5745 MHz									
5650	62.26	PK	37	1.3	H	-1.95	60.31	68.2	-7.89
5650	64.54	PK	275	1.1	V	-1.95	62.59	68.2	-5.61
5700	84.47	PK	86	2	H	-2.02	82.45	105.2	-22.75
5700	86.53	PK	167	1.8	V	-2.02	84.51	105.2	-20.69
5720	64.91	PK	121	1.4	H	-1.97	62.94	110.8	-47.86
5720	67.24	PK	231	1.6	V	-1.97	65.27	110.8	-45.53
5725	72.51	PK	280	1.3	H	-1.96	70.55	122.2	-51.65
5725	74.79	PK	333	1.6	V	-1.96	72.83	122.2	-49.37
11490	42.53	PK	192	1.1	H	6.63	49.16	74	-24.84
11490	44.71	PK	136	1.2	V	6.63	51.34	74	-22.66
5785 MHz									
11570	42.35	PK	203	1.3	H	6.59	48.94	74	-25.06
11570	44.51	PK	311	1	V	6.59	51.10	74	-22.9
5825 MHz									
5850	66.49	PK	148	1.8	H	-1.81	64.68	122.2	-57.52
5850	68.81	PK	90	1.9	V	-1.81	67.00	122.2	-55.2
5855	66.28	PK	300	2	H	-1.82	64.46	110.8	-46.34
5855	68.33	PK	353	1.2	V	-1.82	66.51	110.8	-44.29
5875	91.58	PK	275	1.7	H	-1.84	89.74	105.2	-15.46
5875	93.80	PK	155	1.5	V	-1.84	91.96	105.2	-13.24
5925	64.04	PK	271	2.1	H	-1.82	62.22	68.2	-5.98
5925	66.17	PK	296	1.3	V	-1.82	64.35	68.2	-3.85
11650	41.31	PK	119	1.3	H	6.77	48.08	74	-25.92
11650	43.43	PK	32	1.3	V	6.77	50.20	74	-23.8

Frequency (MHz)	Receiver		Turn-Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11AC40									
5755 MHz									
5650	62.41	PK	28	1.1	H	-1.95	60.46	68.2	-7.74
5650	64.29	PK	325	1.7	V	-1.95	62.34	68.2	-5.86
5700	65.33	PK	187	2.4	H	-2.02	63.31	105.2	-41.89
5700	67.47	PK	15	2	V	-2.02	65.45	105.2	-39.75
5720	68.94	PK	91	1.8	H	-1.97	66.97	110.8	-43.83
5720	71.04	PK	128	1.2	V	-1.97	69.07	110.8	-41.73
5725	71.85	PK	211	1.1	H	-1.96	69.89	122.2	-52.31
5725	73.97	PK	138	1.4	V	-1.96	72.01	122.2	-50.19
11510	42.29	PK	111	2.1	H	6.59	48.88	74	-25.12
11510	44.42	PK	334	2.5	V	6.59	51.01	74	-22.99
5795 MHz									
5850	67.45	PK	87	1.6	H	-1.81	65.64	122.2	-56.56
5850	69.41	PK	349	1.2	V	-1.81	67.60	122.2	-54.6
5855	66.41	PK	94	2.4	H	-1.82	64.59	110.8	-46.21
5855	68.55	PK	16	2	V	-1.82	66.73	110.8	-44.07
5875	84.88	PK	145	2.1	H	-1.84	83.04	105.2	-22.16
5875	87.02	PK	14	1.7	V	-1.84	85.18	105.2	-20.02
5925	64.26	PK	255	1.6	H	-1.82	62.44	68.2	-5.76
5925	66.44	PK	268	2	V	-1.82	64.62	68.2	-3.58
11590	42.90	PK	110	1.7	H	6.57	49.47	74	-24.53
11590	45.11	PK	13	1.7	V	6.57	51.68	74	-22.32

Frequency (MHz)	Receiver		Turn-Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.407	
	Reading (dBμV)	Detector (PK/QP/AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
802.11AC80									
5775MHz									
5650	64.19	PK	192	1.2	H	-1.95	62.24	68.2	-5.96
5650	66.28	PK	173	2.3	V	-1.95	64.33	68.2	-3.87
5700	72.26	PK	257	2.3	H	-2.02	70.24	105.2	-34.96
5700	74.35	PK	33	1.2	V	-2.02	72.33	105.2	-32.87
5720	74.51	PK	259	1.6	H	-1.97	72.54	110.8	-38.26
5720	76.84	PK	301	1.7	V	-1.97	74.87	110.8	-35.93
5725	75.49	PK	311	2.1	H	-1.96	73.53	122.2	-48.67
5725	77.97	PK	186	2.1	V	-1.96	76.01	122.2	-46.19
5850	73.16	PK	60	1.1	H	-1.81	71.35	122.2	-50.85
5850	75.32	PK	57	2.3	V	-1.81	73.51	122.2	-48.69
5855	67.30	PK	156	1	H	-1.82	65.48	110.8	-45.32
5855	69.71	PK	329	1.1	V	-1.82	67.89	110.8	-42.91
5875	92.26	PK	269	1.1	H	-1.84	90.42	105.2	-14.78
5875	94.68	PK	254	1	V	-1.84	92.84	105.2	-12.36
5925	63.45	PK	124	2	H	-1.82	61.63	68.2	-6.57
5925	65.60	PK	68	2.3	V	-1.82	63.78	68.2	-4.42
11550	43.07	PK	57	1.5	H	6.61	49.68	74	-24.32
11550	45.20	PK	149	1.1	V	6.61	51.81	74	-22.19

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

For simultaneous transmitting condition, please refer to DTS report.


1-18GHz

Pre-scan for 802.11a, 5200MHz

Horizontal:

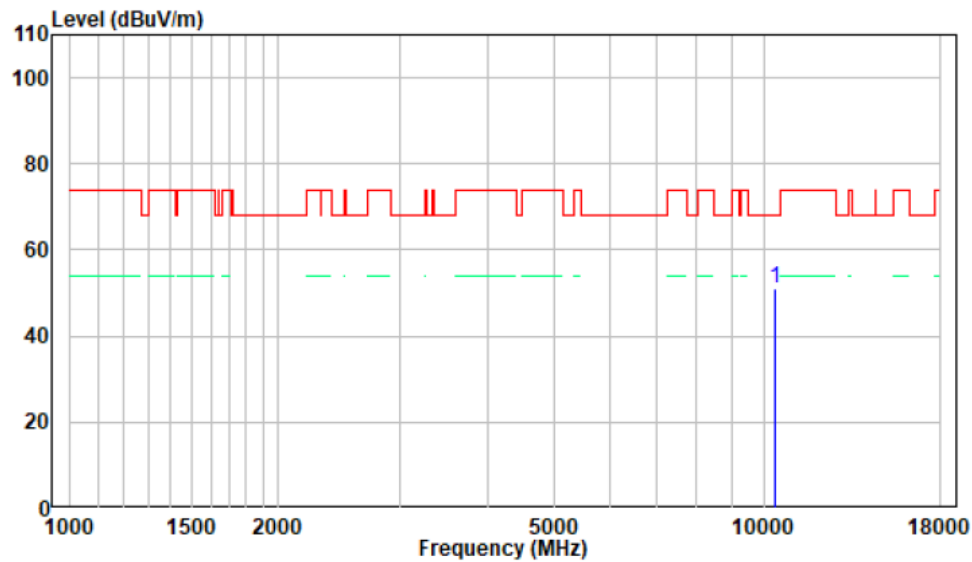


Vertical:

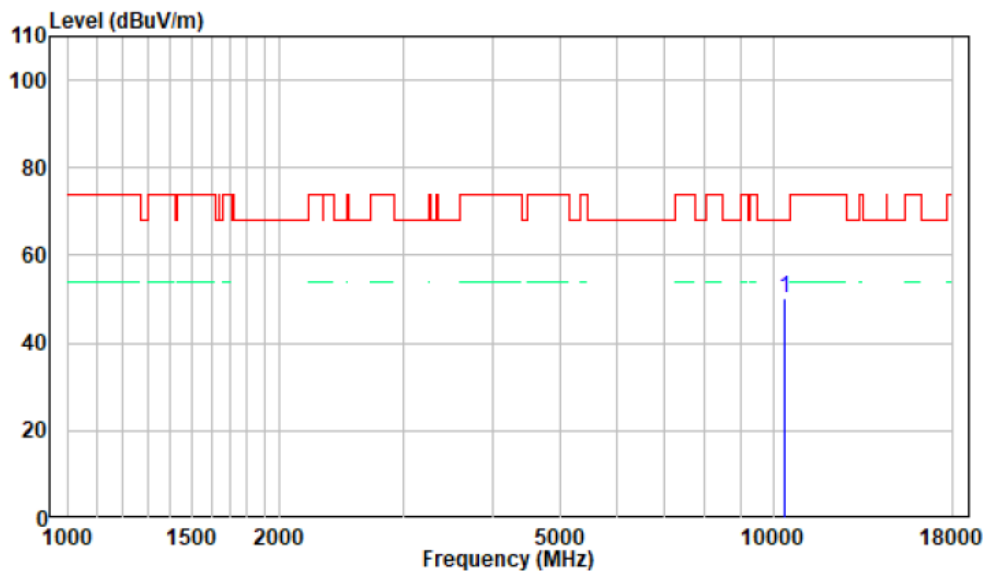


18-40GHz

Pre-scan for 802.11a, 5200MHz

Horizontal:

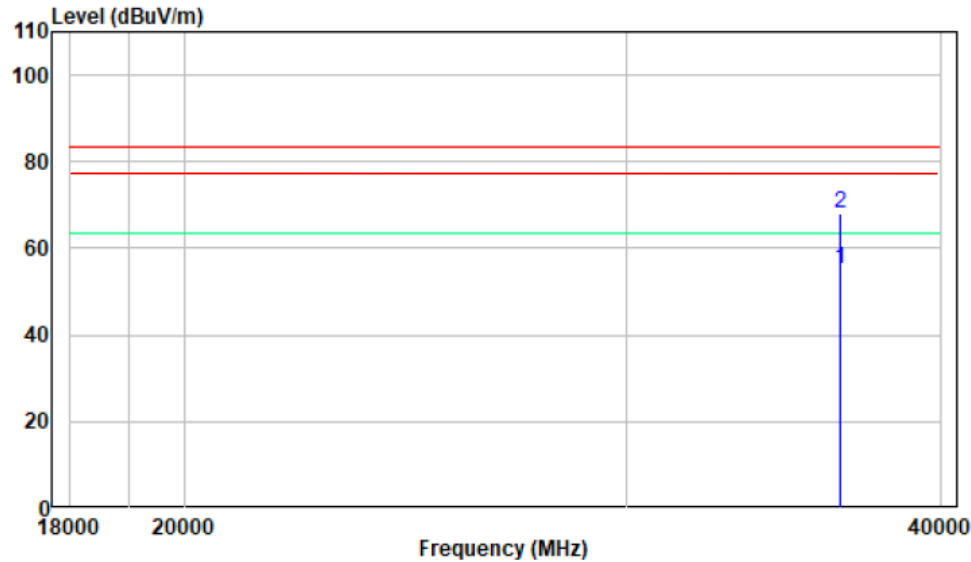

Vertical:

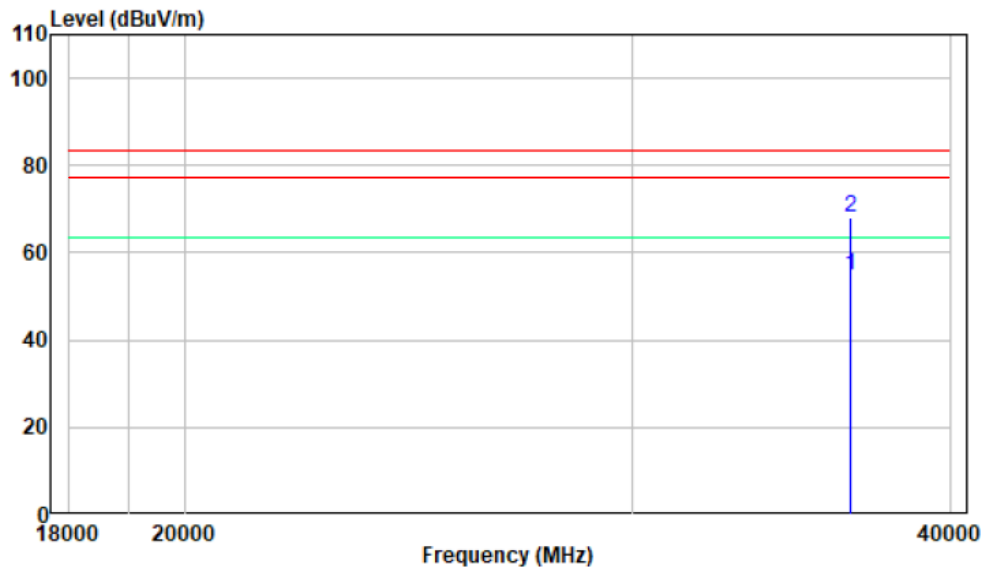

Note: the result meet the §15.209 and §15.407 limit.

FCC §15.407(a),(e) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	21 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-11-24.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

- d. Place the EUT on a bench and set it in transmitting mode.
- e. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- f. Add a correction factor to the display.



Note: the RF control unit has a built-in power sensor

Test Data**Environmental Conditions**

Temperature:	21 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-11-24.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) - POWER SPECTRAL DENSITY

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.



Test Data**Environmental Conditions**

Temperature:	21 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-11-24 and 2022-01-18.

EUT operation mode: Transmitting

Test Result: Pass


Please refer to the Appendix.


APPENDIX

Appendix A1: EmissionBandwidth Test Result


Test Mode	Antenna	Channel	26db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	21.960	---	PASS
		5200	21.360	---	PASS
		5240	29.840	---	PASS
11N20SISO	Ant1	5180	21.920	---	PASS
		5200	21.560	---	PASS
		5240	22.000	---	PASS
11N40SISO	Ant1	5190	47.100	---	PASS
		5230	44.000	---	PASS
11AC20SISO	Ant1	5180	22.000	---	PASS
		5200	22.560	---	PASS
		5240	22.400	---	PASS
11AC40SISO	Ant1	5190	51.440	---	PASS
		5230	54.960	---	PASS
11AC80SISO	Ant1	5210	83.840	---	PASS

Test Graphs

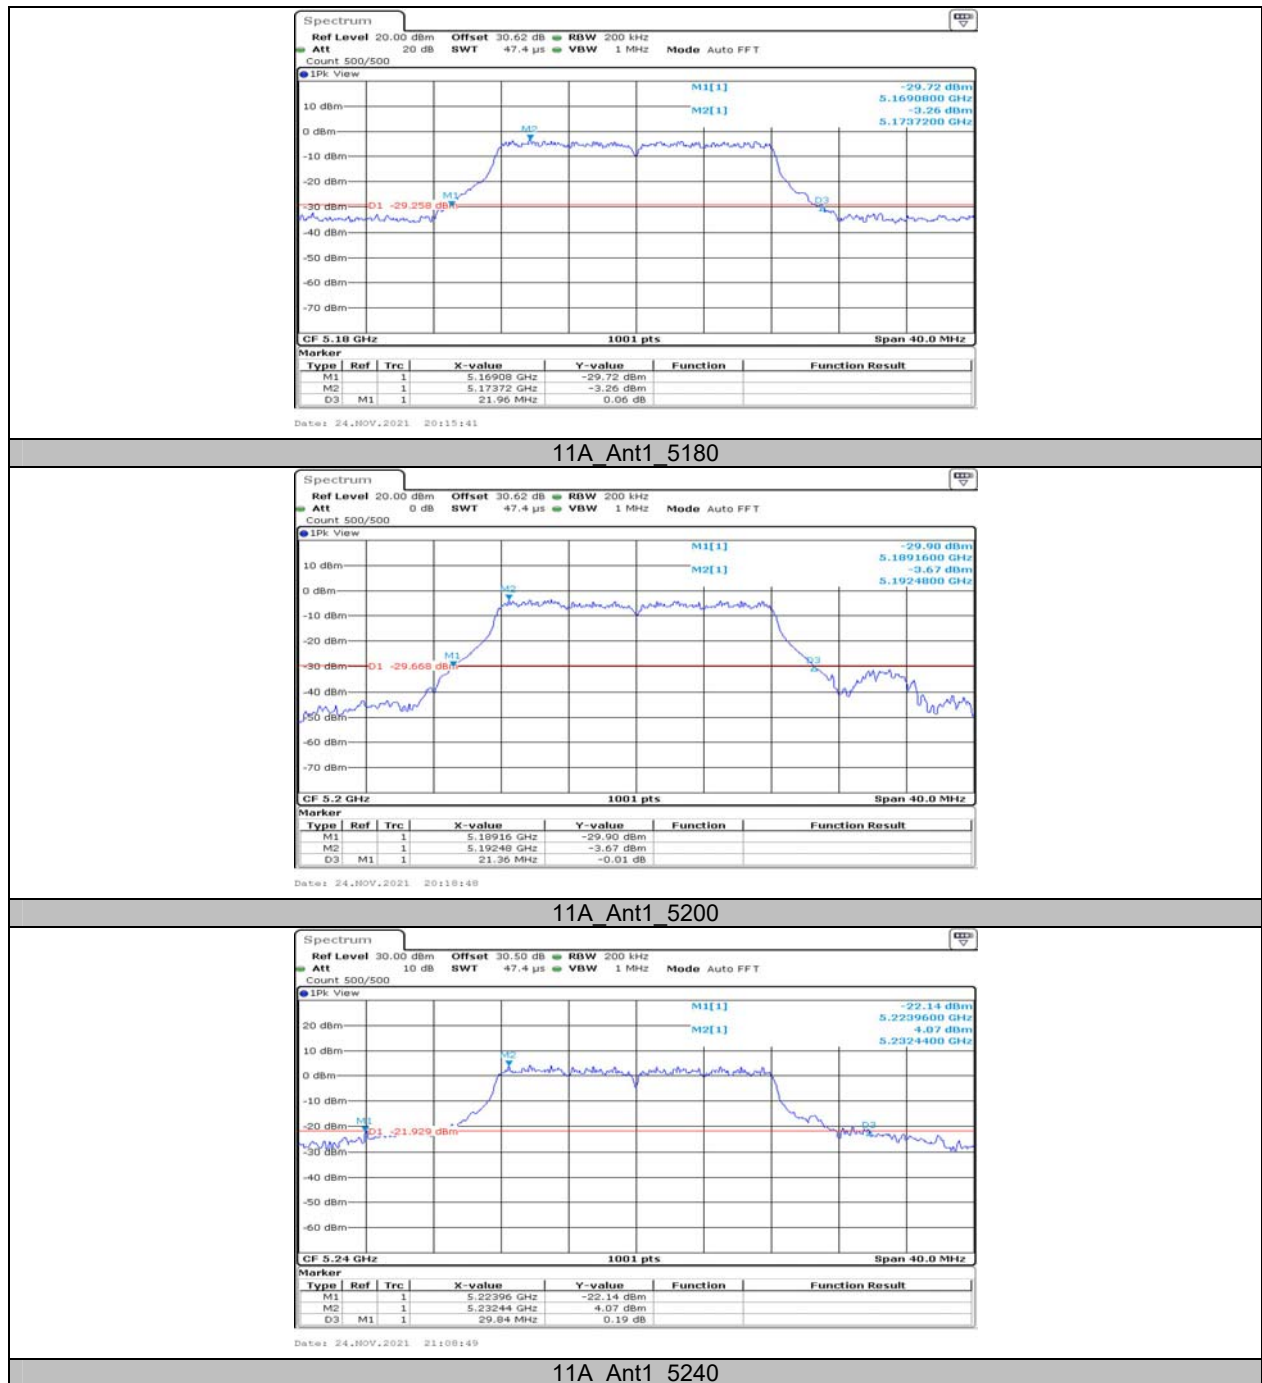


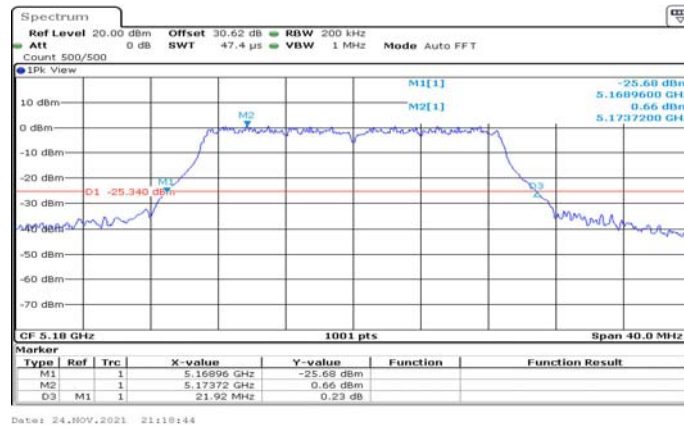


11N20SISO_Ant1_5180

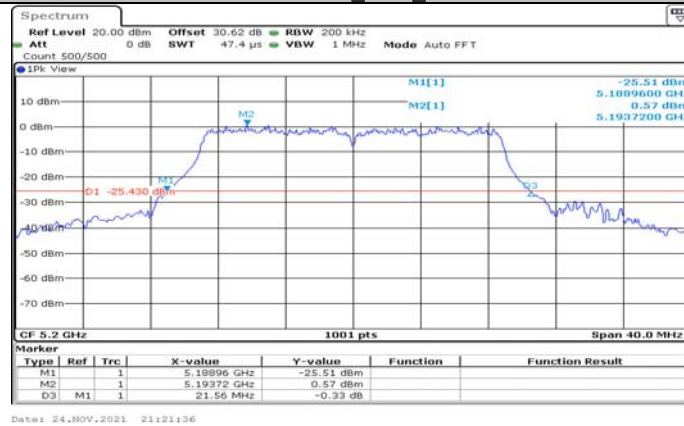


11N20SISO_Ant1_5200

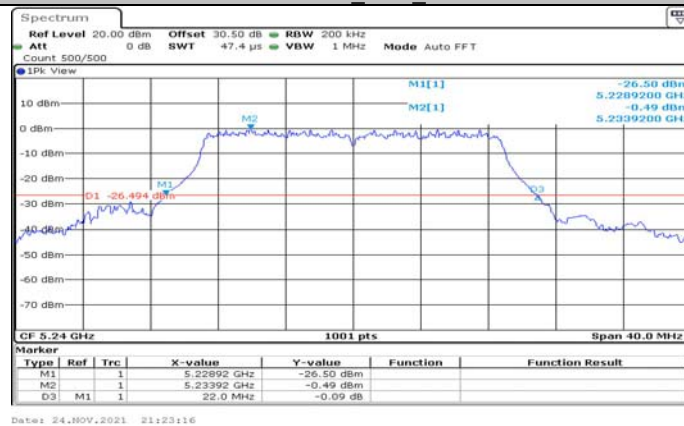


11N20SISO_Ant1_5240

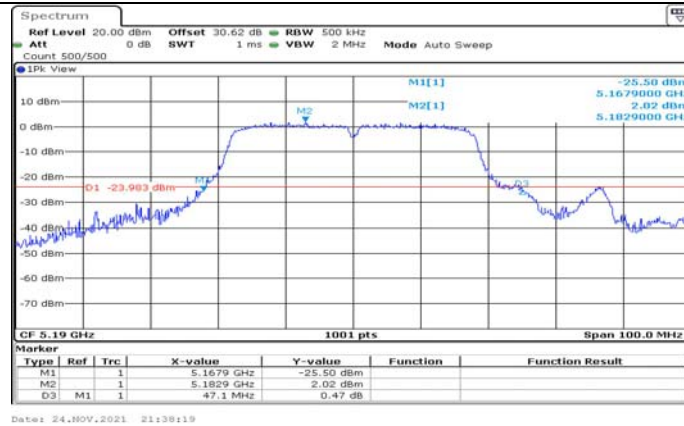


11N40SISO Ant1 5190

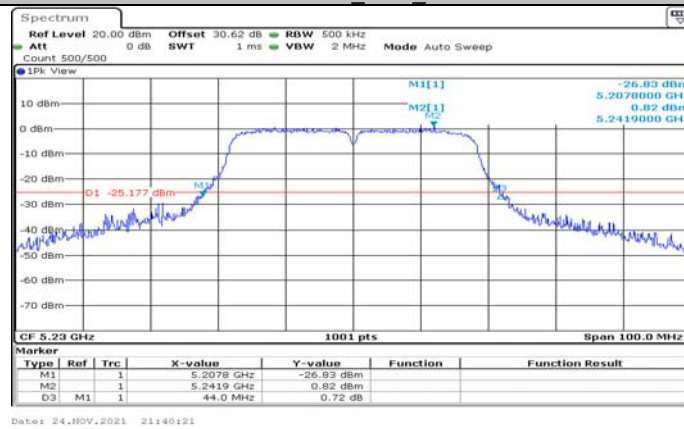


11N40SISO Ant1 5230

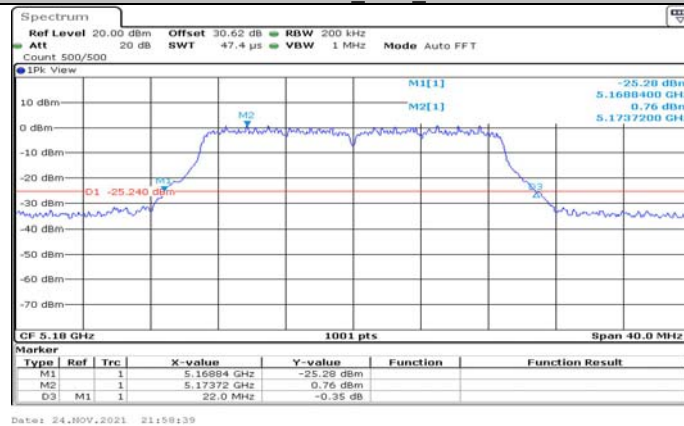

11AC20SISO Ant1 5180

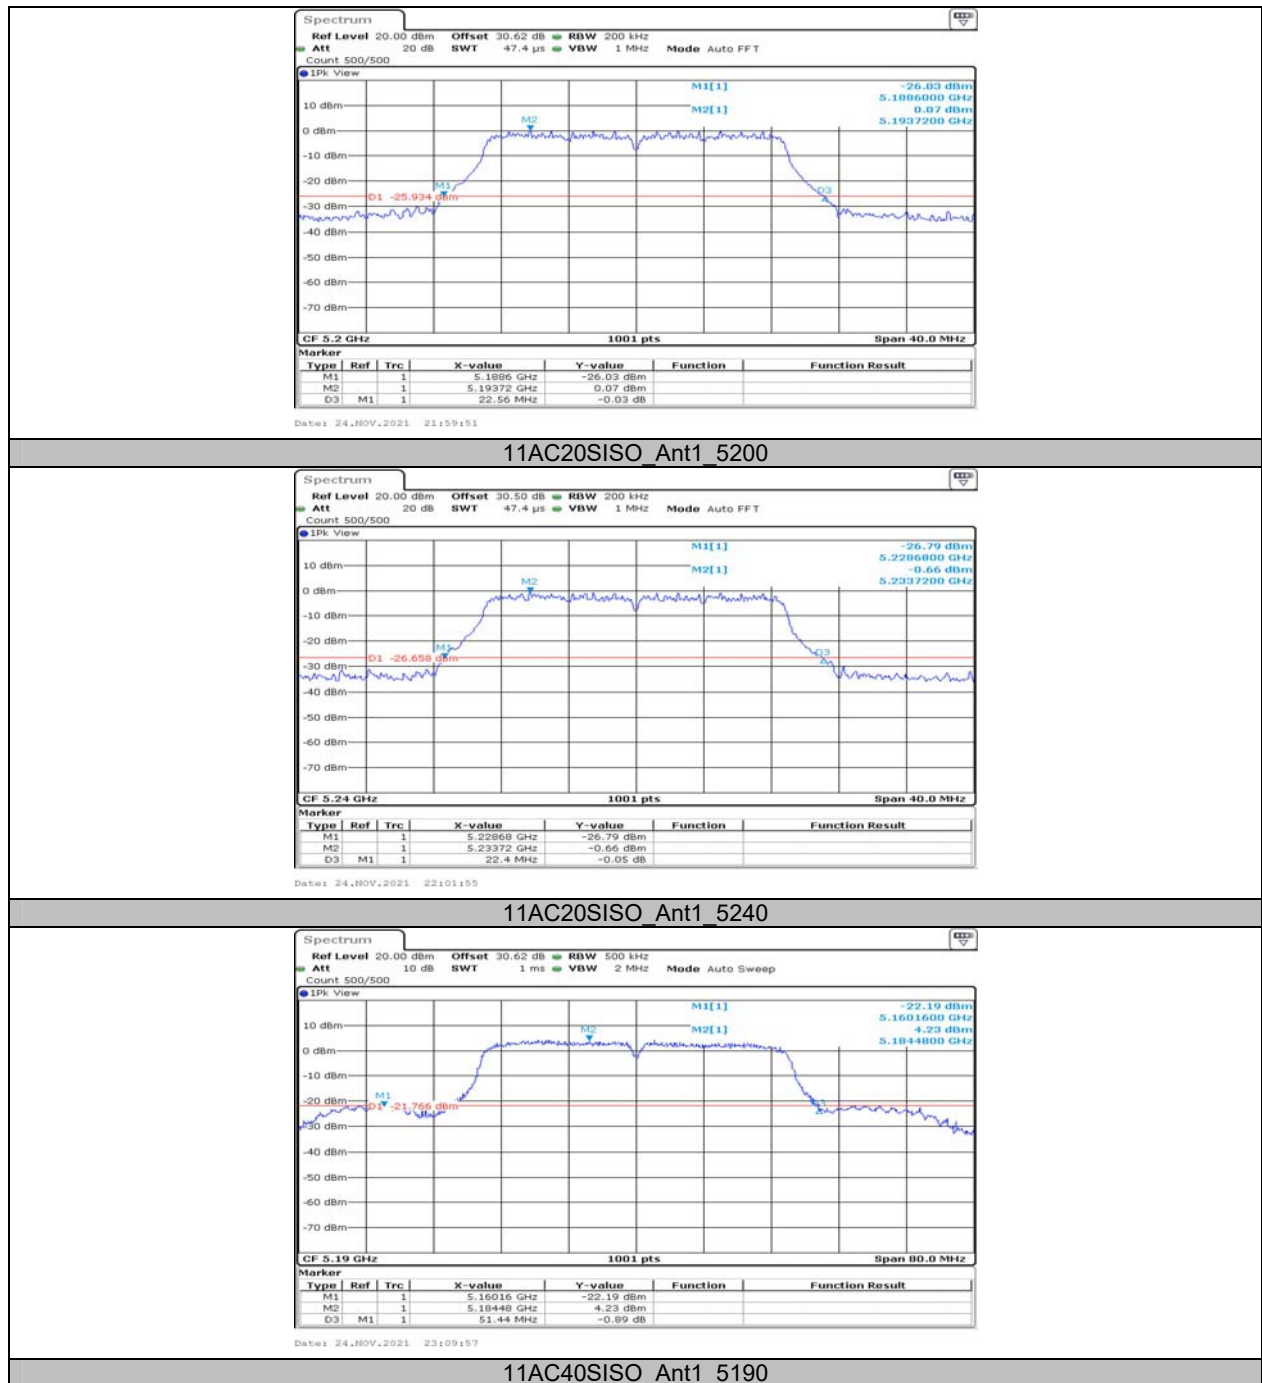

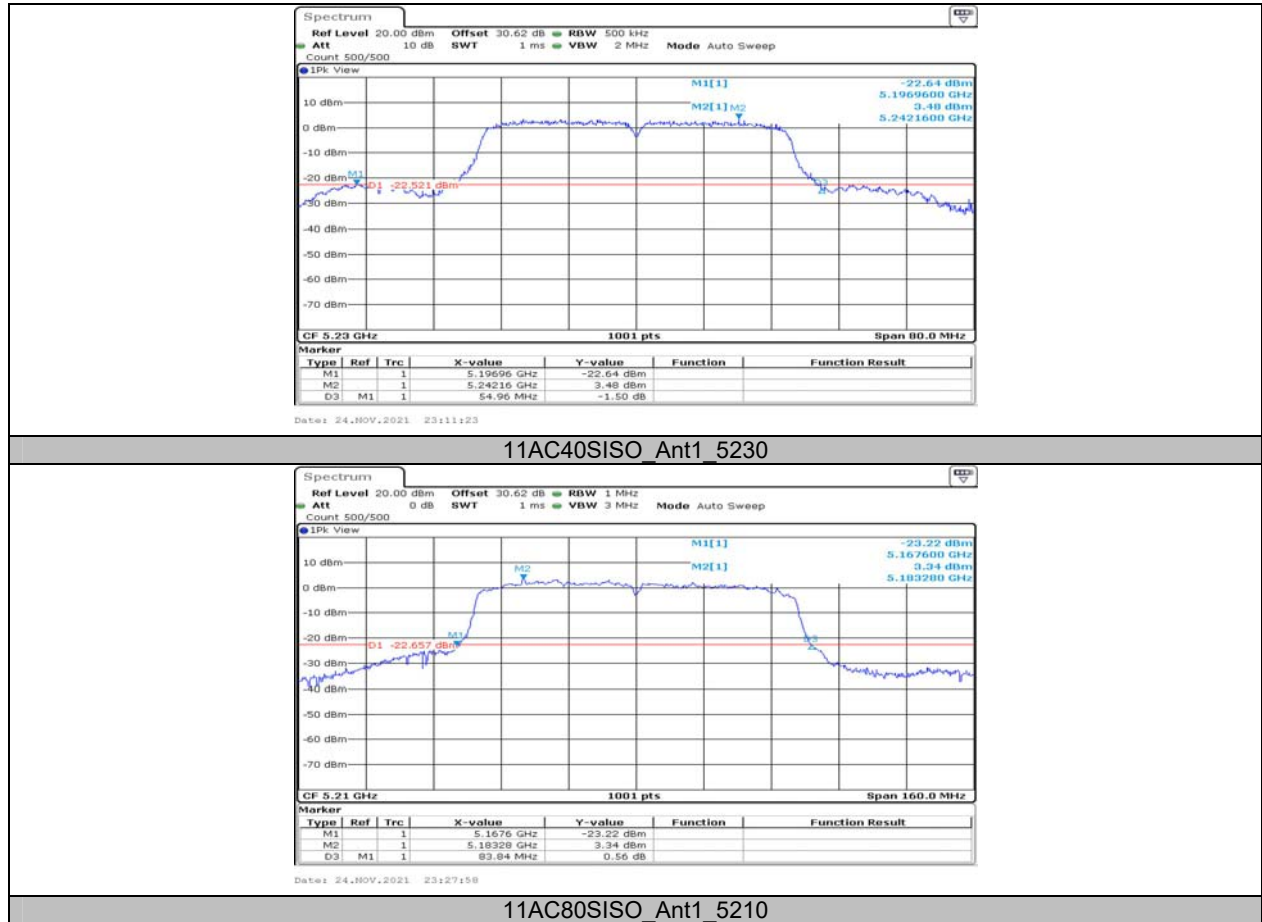



Appendix A2: Occupied channel bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	18.142	---	PASS
		5200	18.342	---	PASS
		5240	19.341	---	PASS
		5745	18.981	---	PASS
		5785	19.301	---	PASS
		5825	19.141	---	PASS
11N20SISO	Ant1	5180	19.74	---	PASS
		5200	18.941	---	PASS
		5240	18.821	---	PASS
		5745	19.021	---	PASS
		5785	18.901	---	PASS
		5825	18.901	---	PASS
11N40SISO	Ant1	5190	37.403	---	PASS
		5230	37.083	---	PASS
		5755	37.802	---	PASS
		5795	38.042	---	PASS
11AC20SISO	Ant1	5180	18.621	---	PASS
		5200	18.621	---	PASS
		5240	18.621	---	PASS
		5745	18.701	---	PASS
		5785	18.701	---	PASS
		5825	18.621	---	PASS
11AC40SISO	Ant1	5190	37.722	---	PASS
		5230	37.722	---	PASS
		5755	38.122	---	PASS
		5795	38.202	---	PASS
11AC80SISO	Ant1	5210	75.445	---	PASS
		5775	76.723	---	PASS


Note: EUT with no any part of occupied bandwidth fall within 5250-5350MHz and 5470-5725MHz range.

Test Graphs

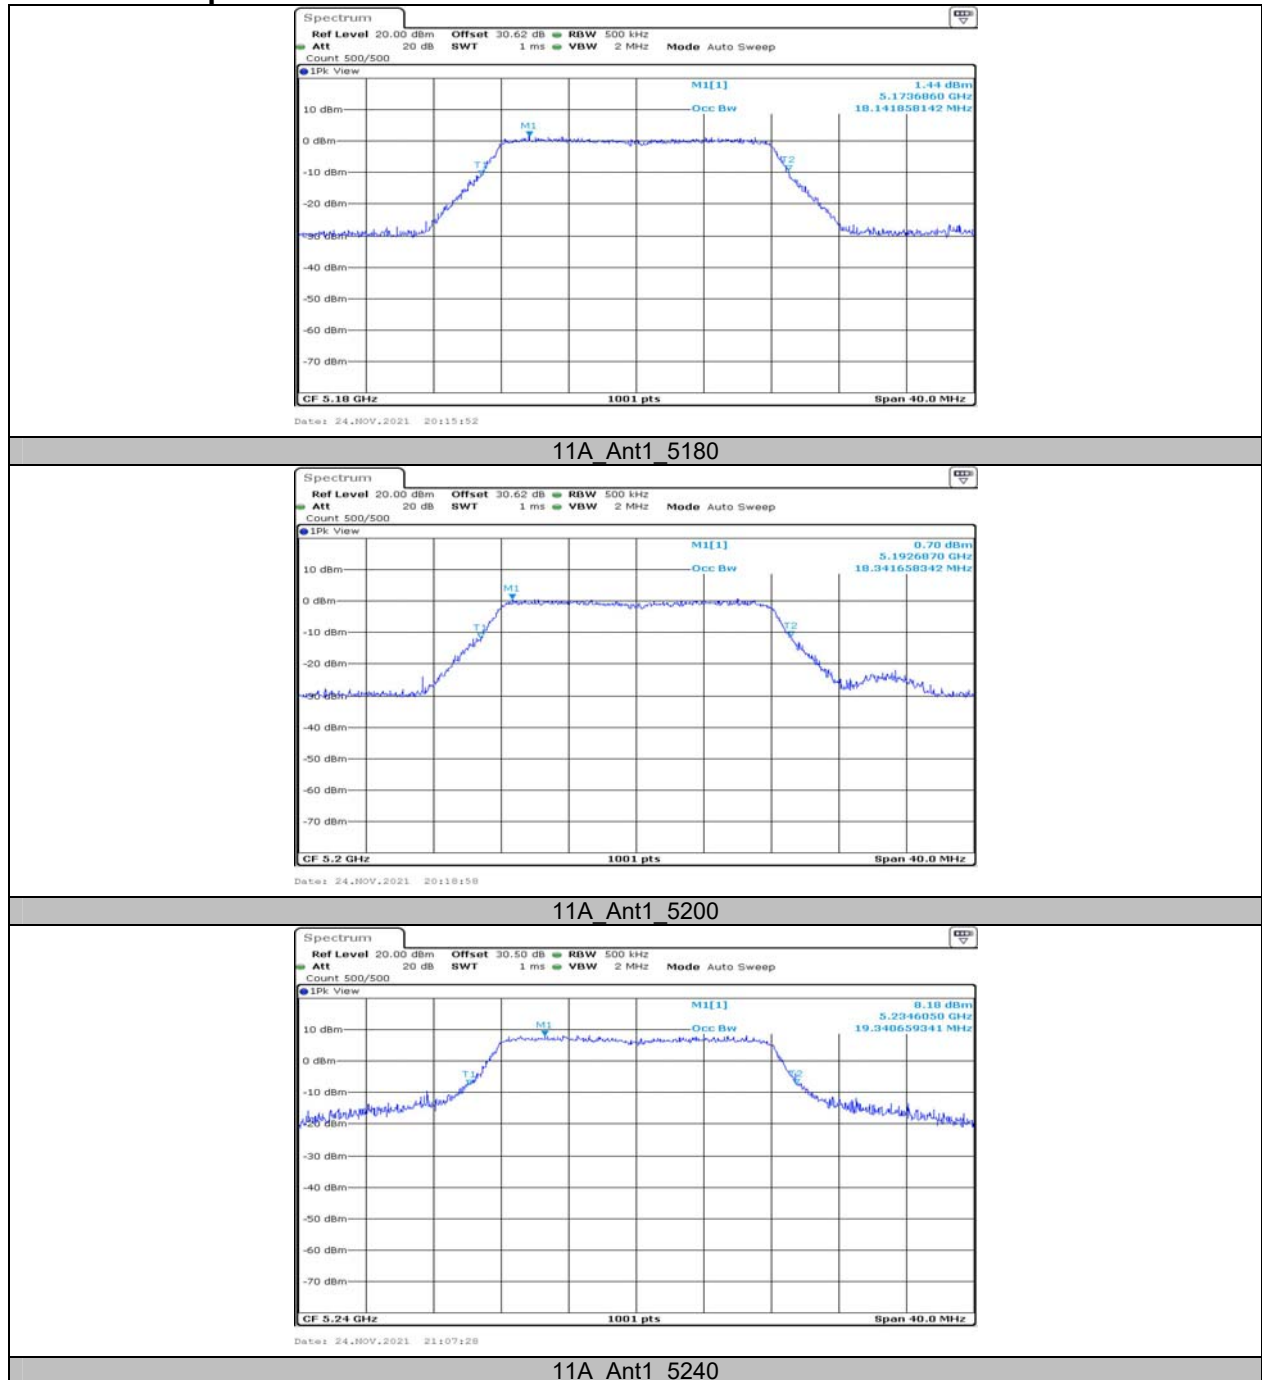

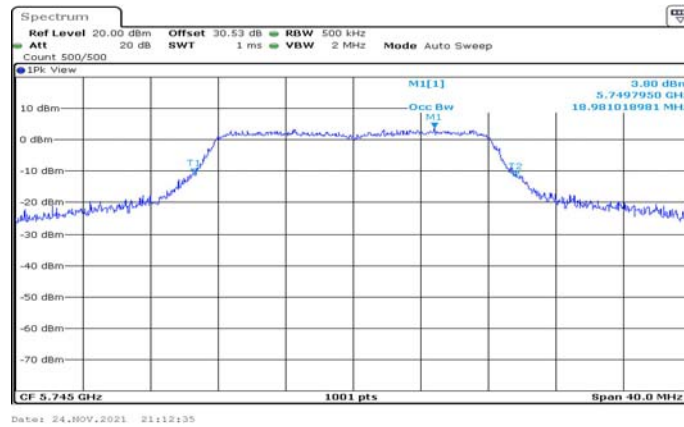


11A Ant1_5745

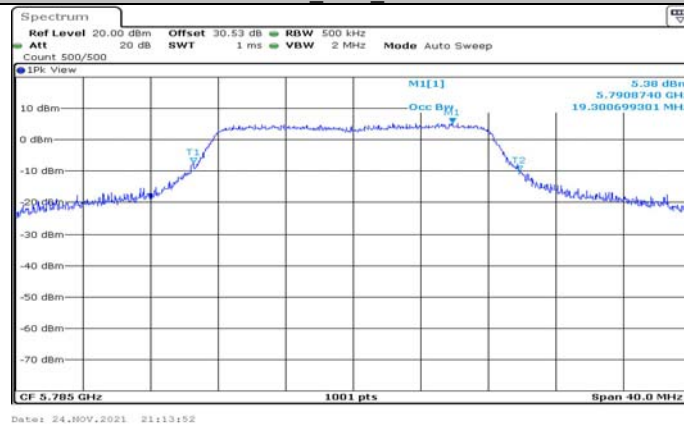



11A Ant1_5785





11A Ant1_5825

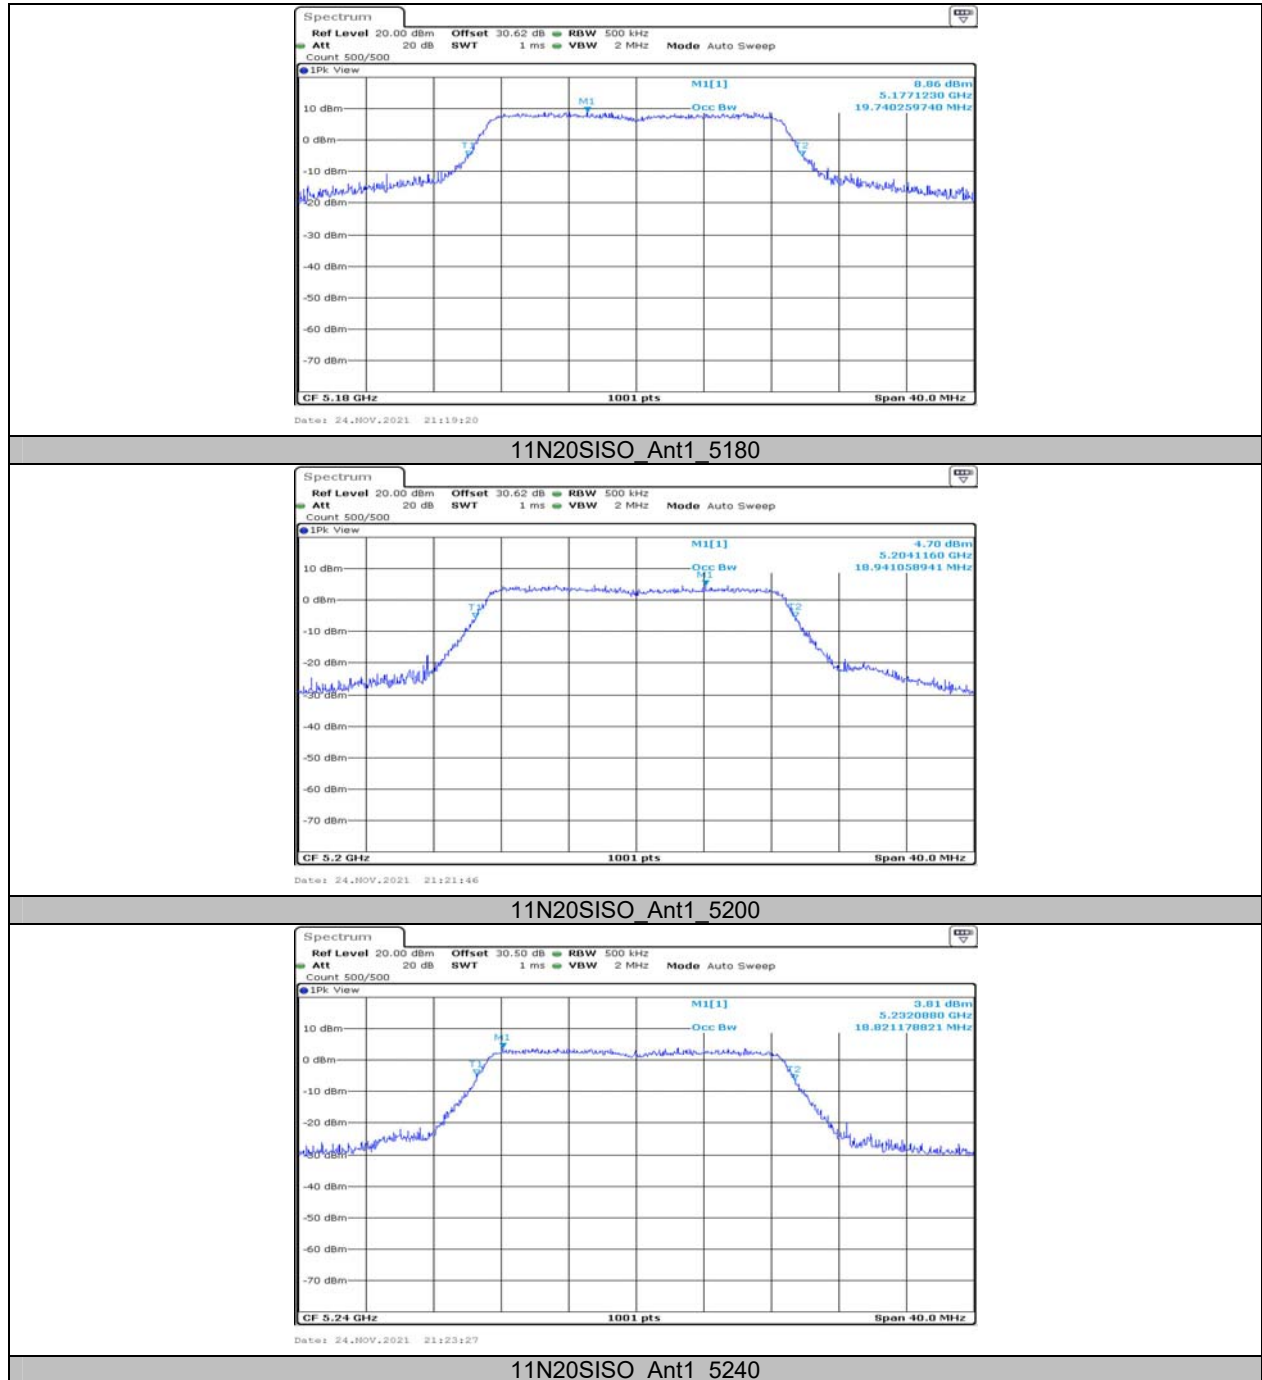


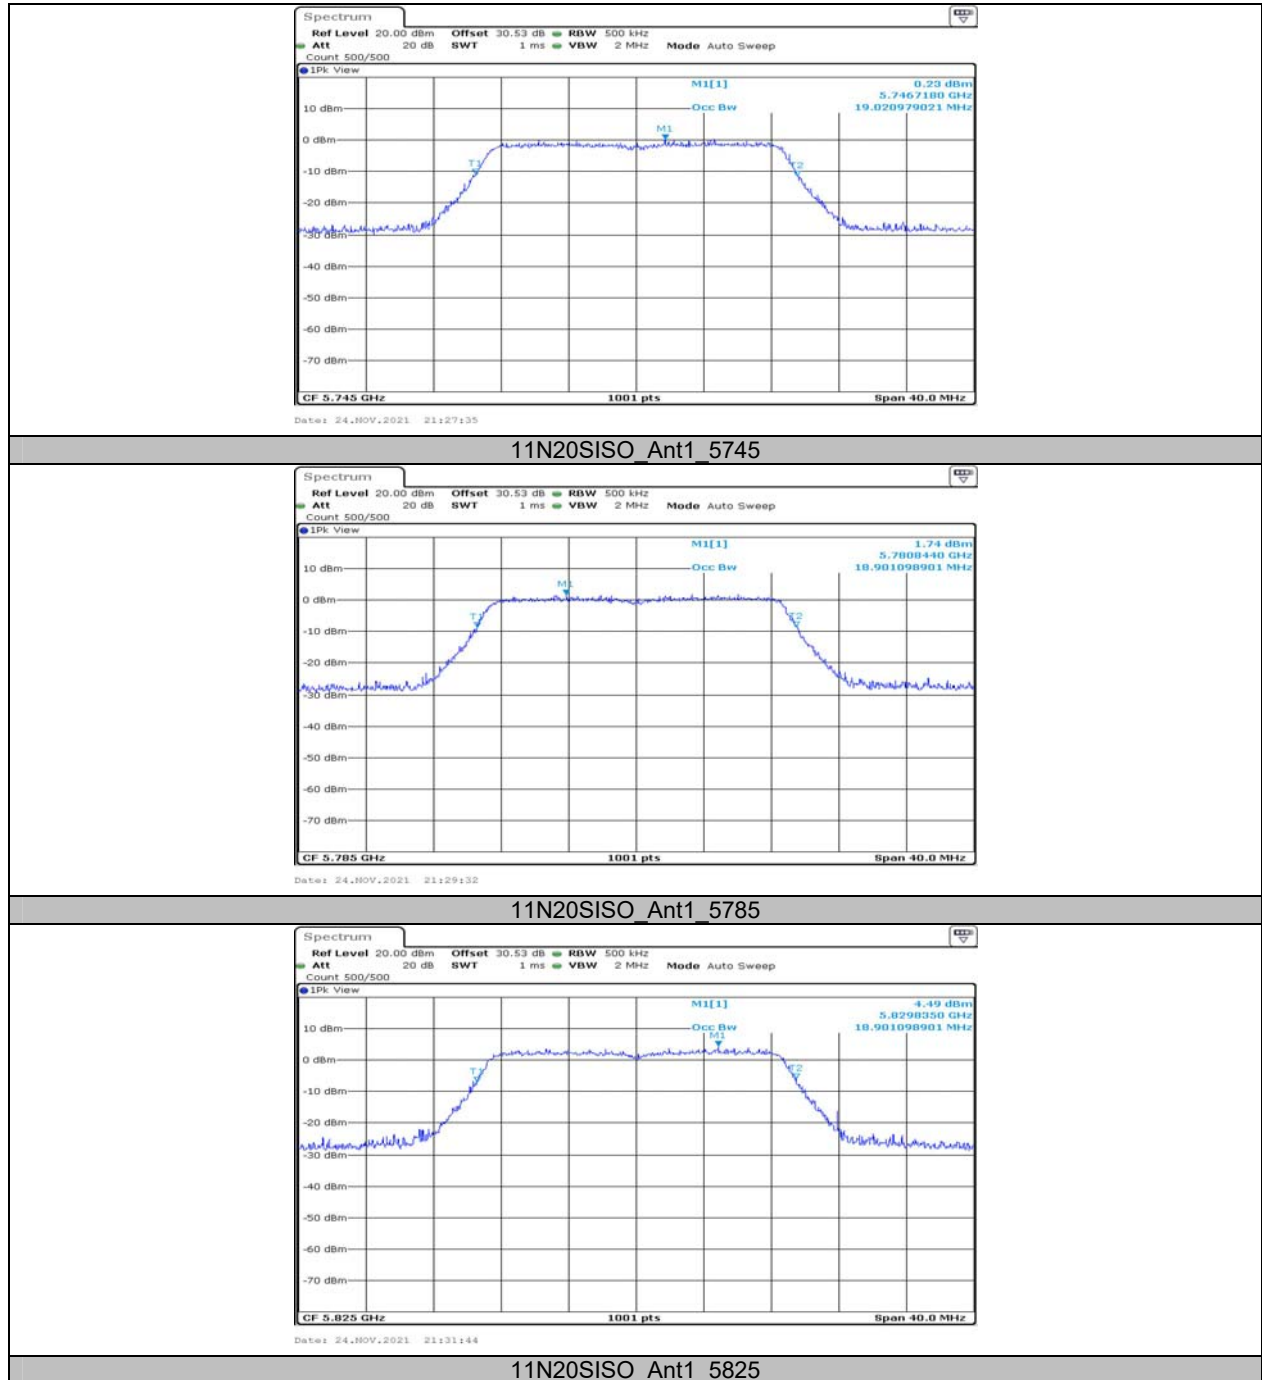


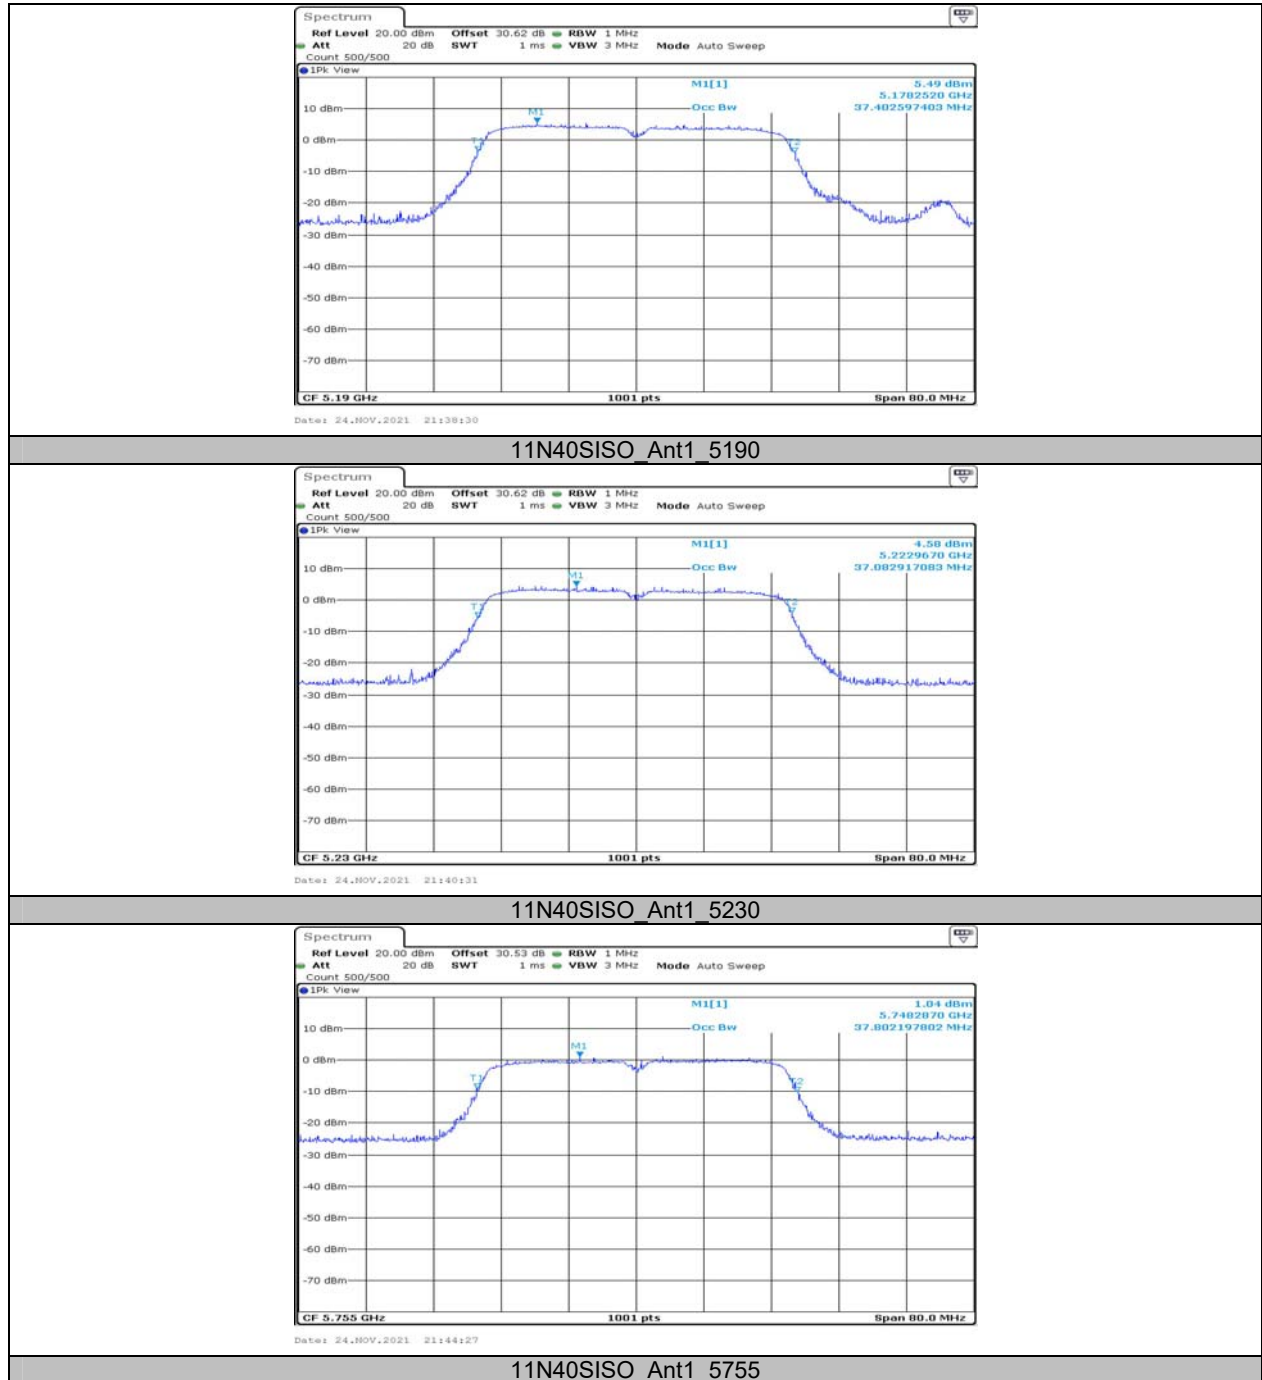


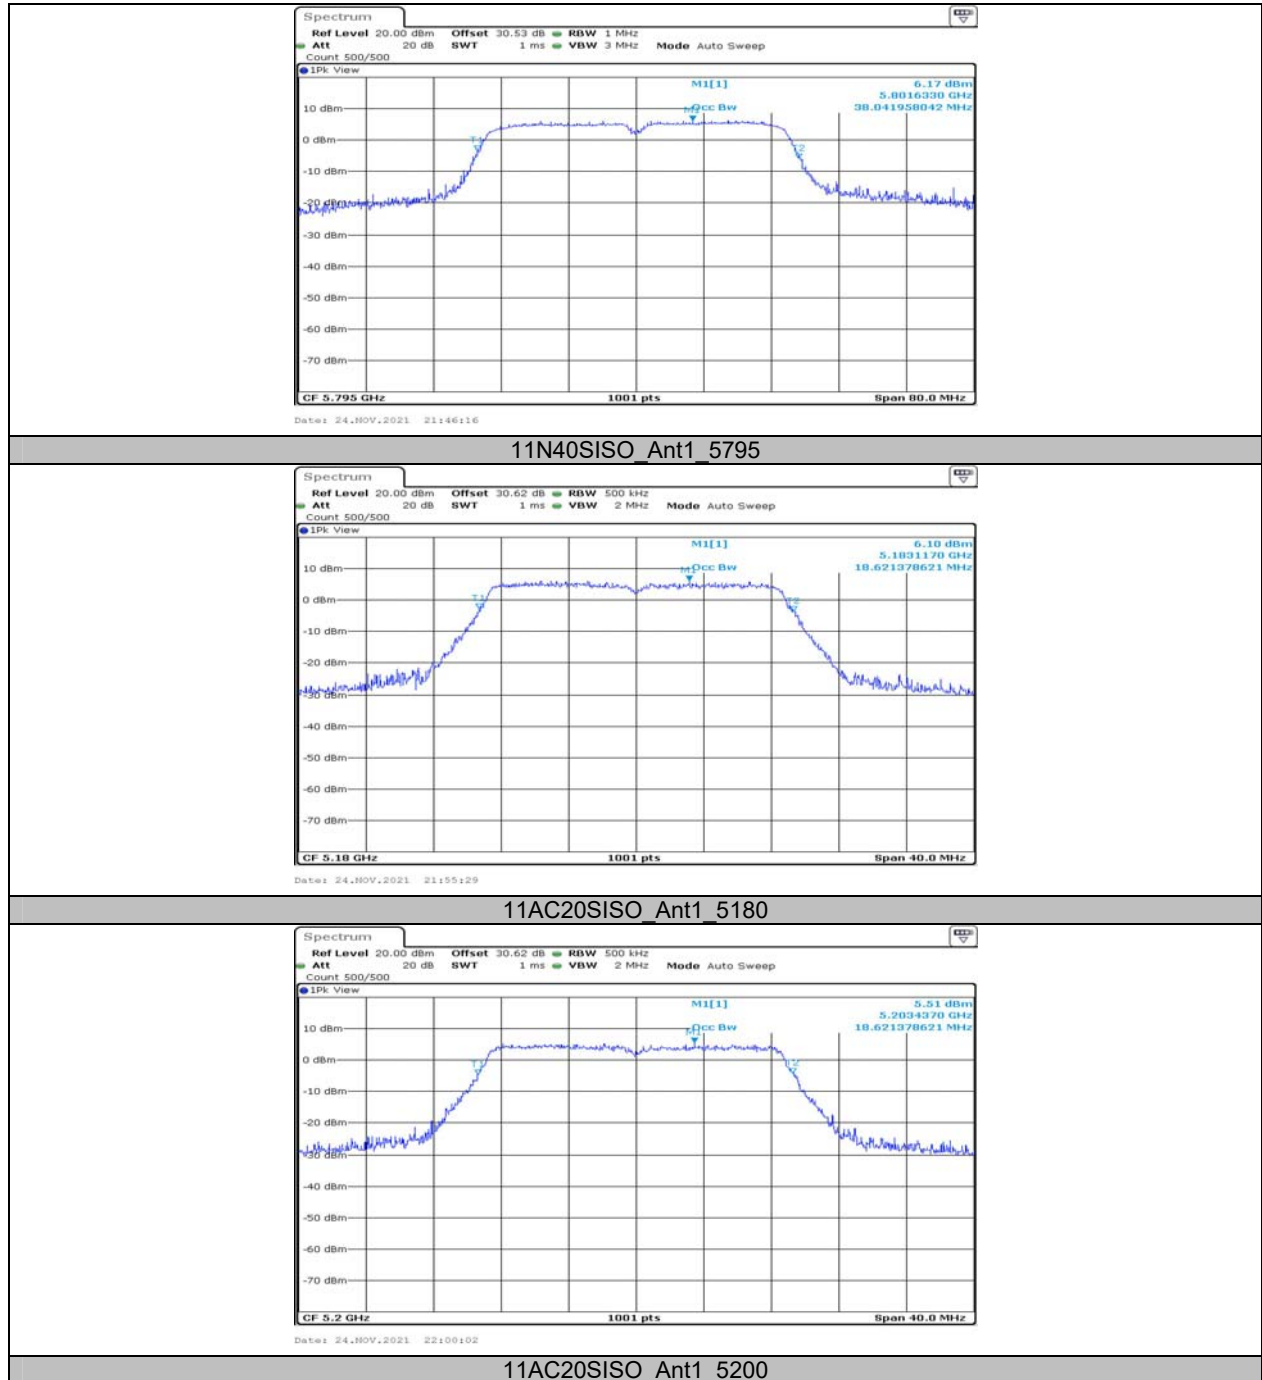

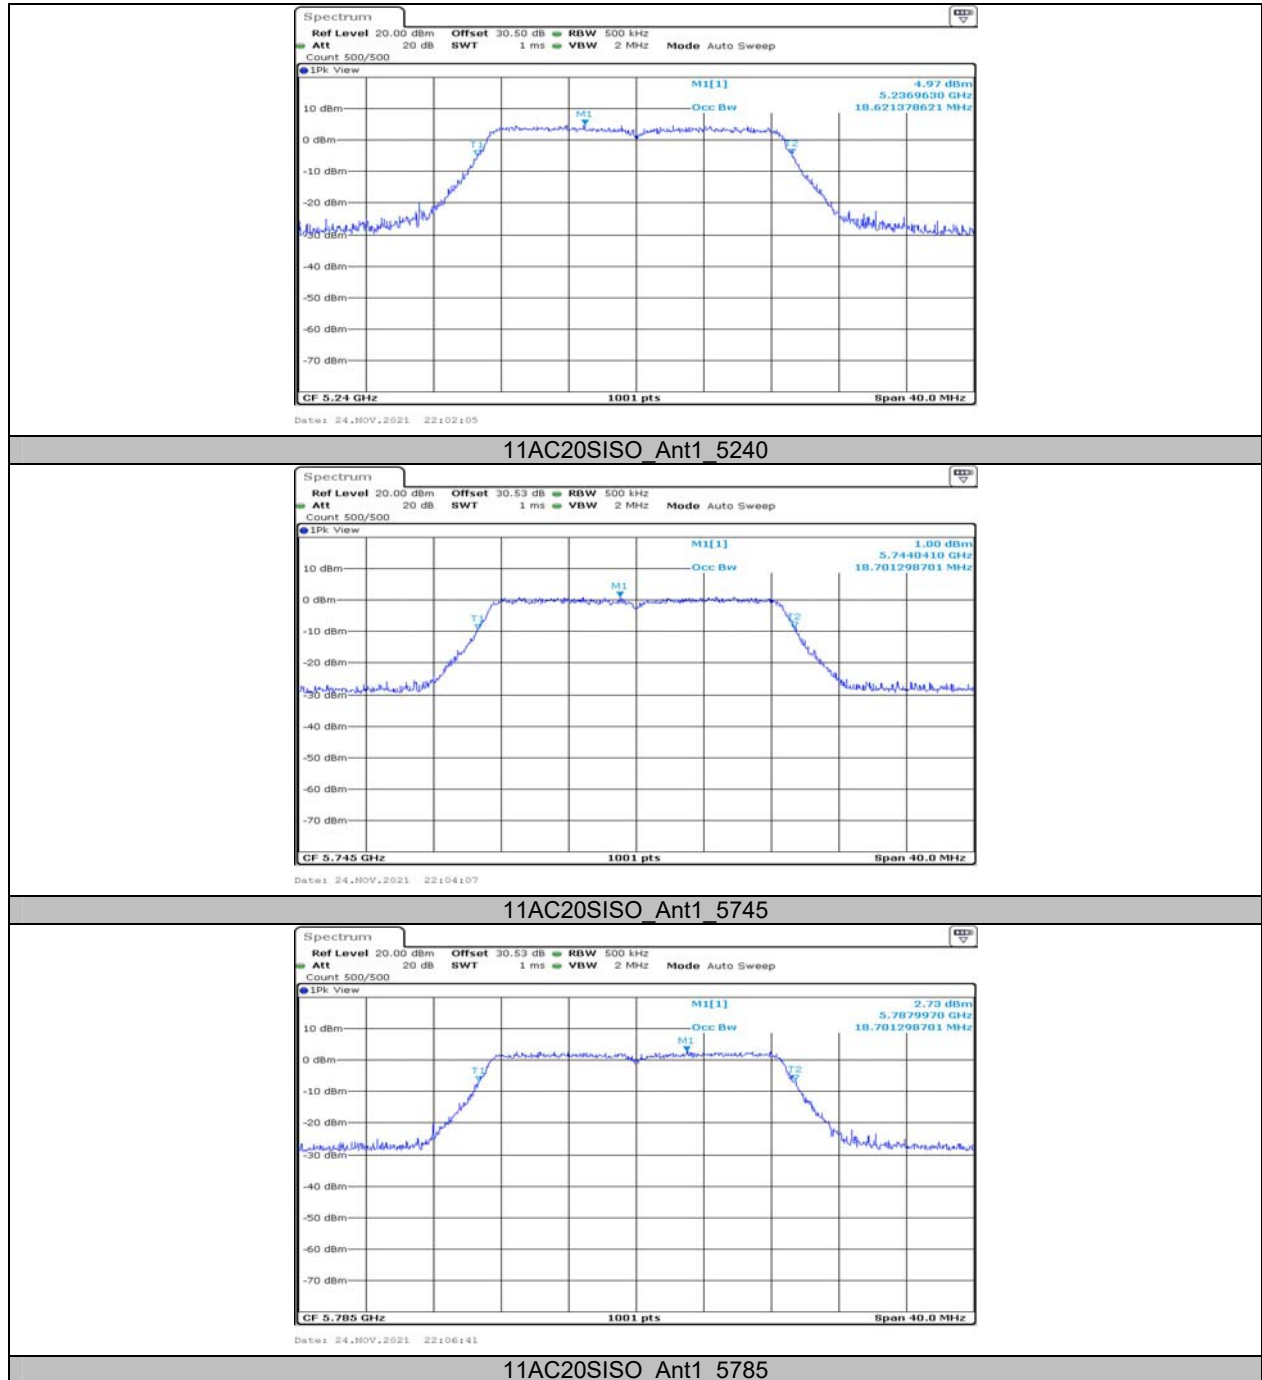

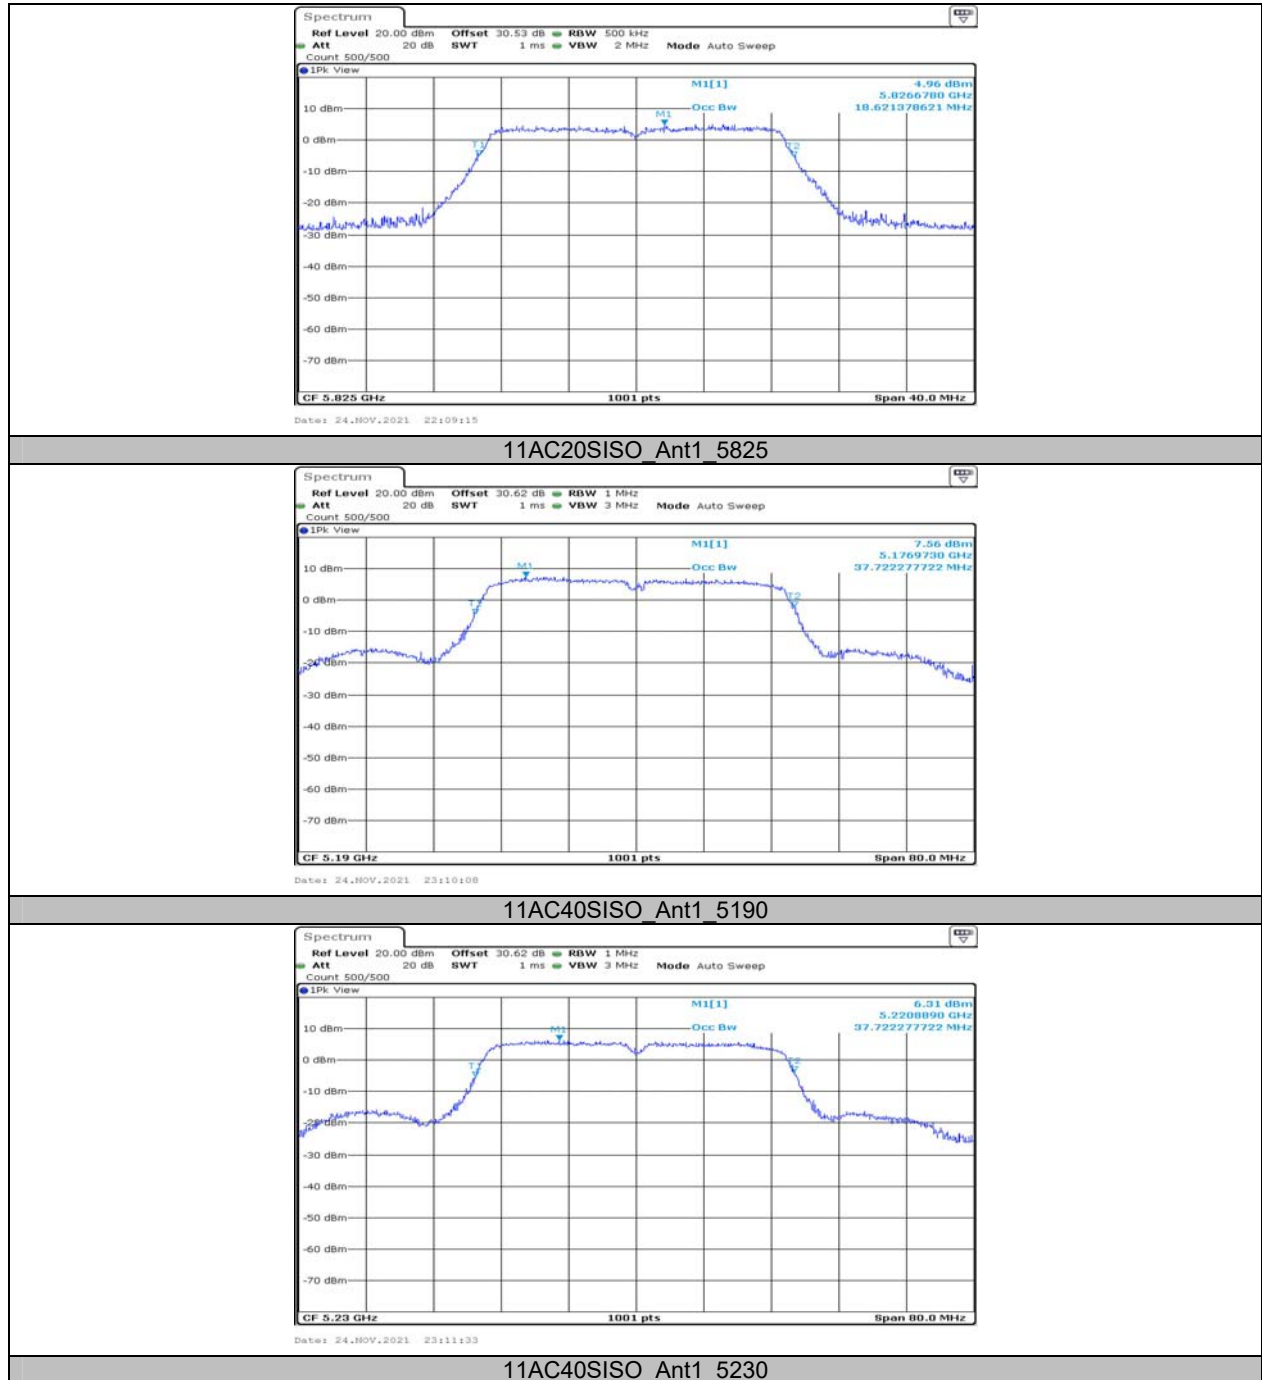

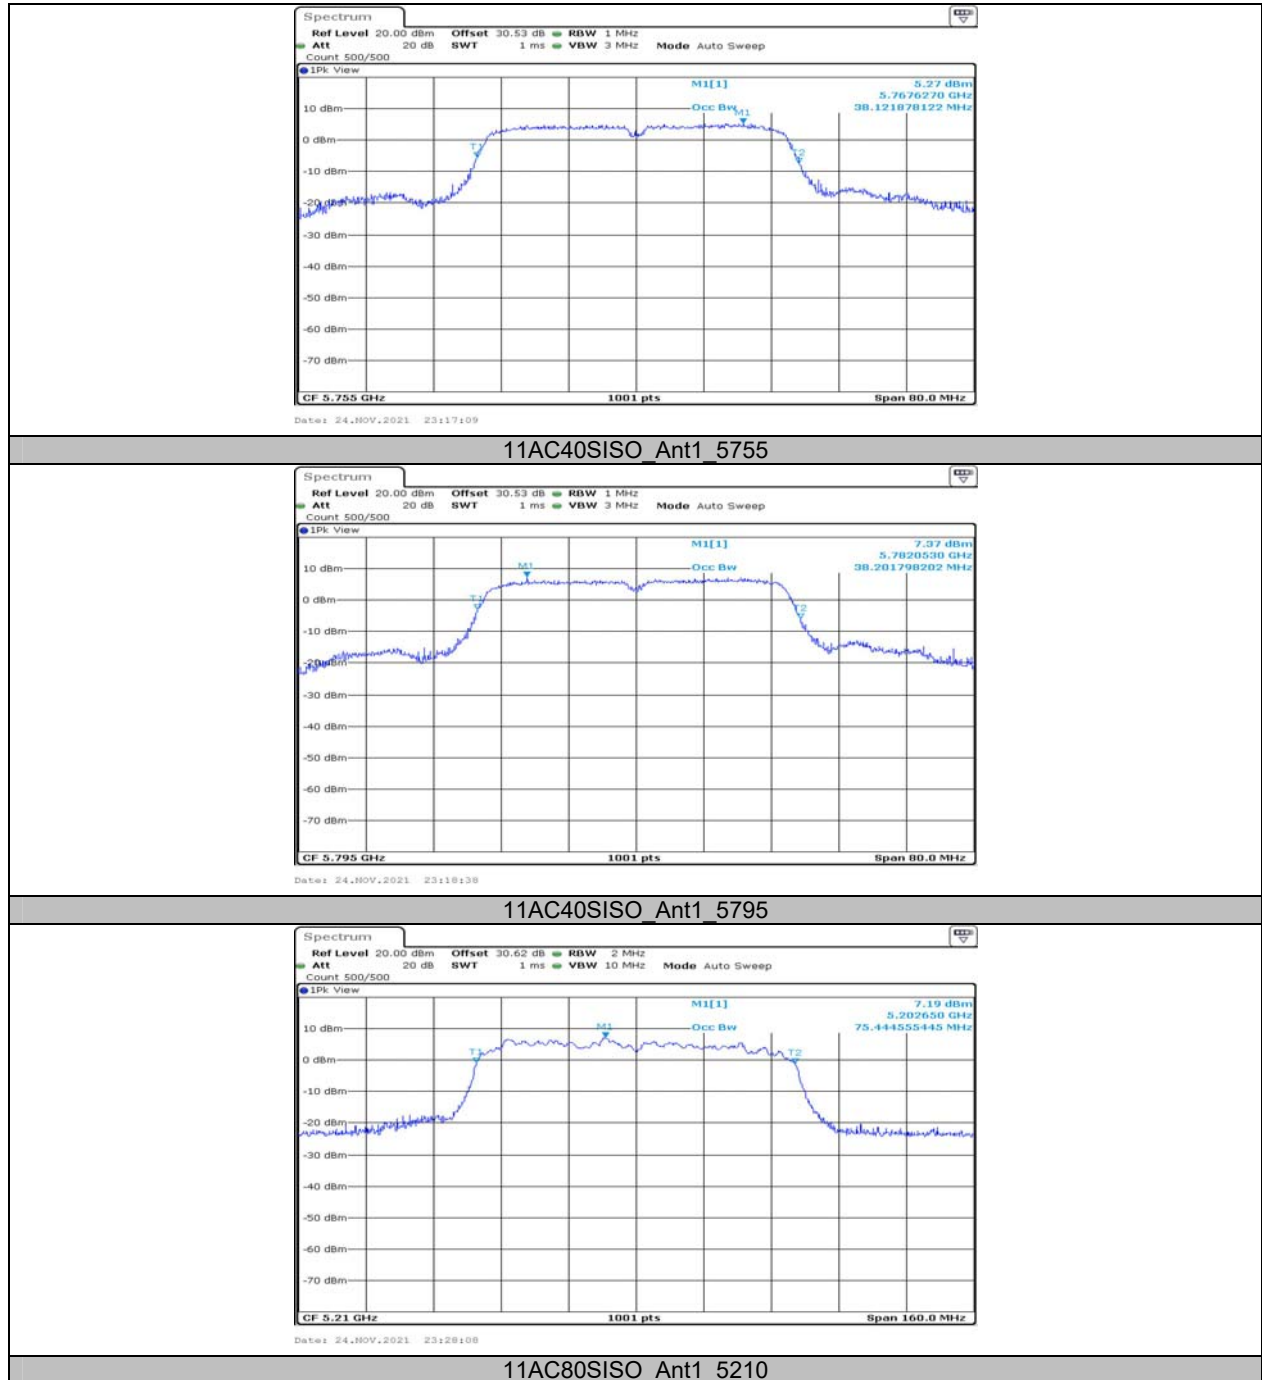

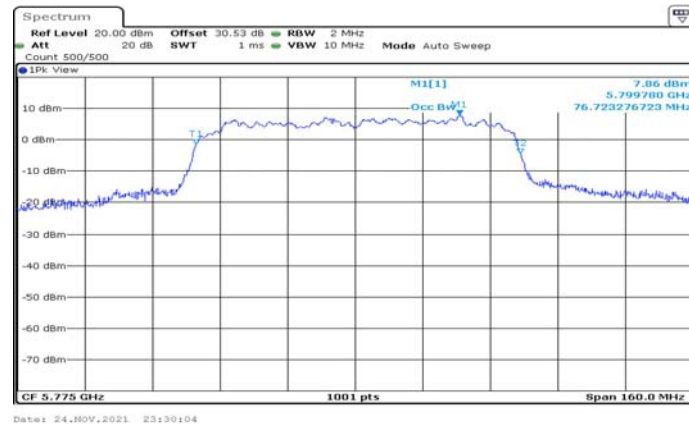



11AC80SISO_Ant1_5775


**Appendix A3: Min emission bandwidth
Test Result**


Test Mode	Antenna	Channel	6db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.400	0.5	PASS
		5785	16.400	0.5	PASS
		5825	16.400	0.5	PASS
11N20SISO	Ant1	5745	17.680	0.5	PASS
		5785	17.680	0.5	PASS
		5825	17.680	0.5	PASS
11N40SISO	Ant1	5755	35.680	0.5	PASS
		5795	35.520	0.5	PASS
11AC20SISO	Ant1	5745	17.680	0.5	PASS
		5785	17.680	0.5	PASS
		5825	17.680	0.5	PASS
11AC40SISO	Ant1	5755	35.360	0.5	PASS
		5795	35.440	0.5	PASS
11AC80SISO	Ant1	5775	71.680	0.5	PASS

Test Graphs

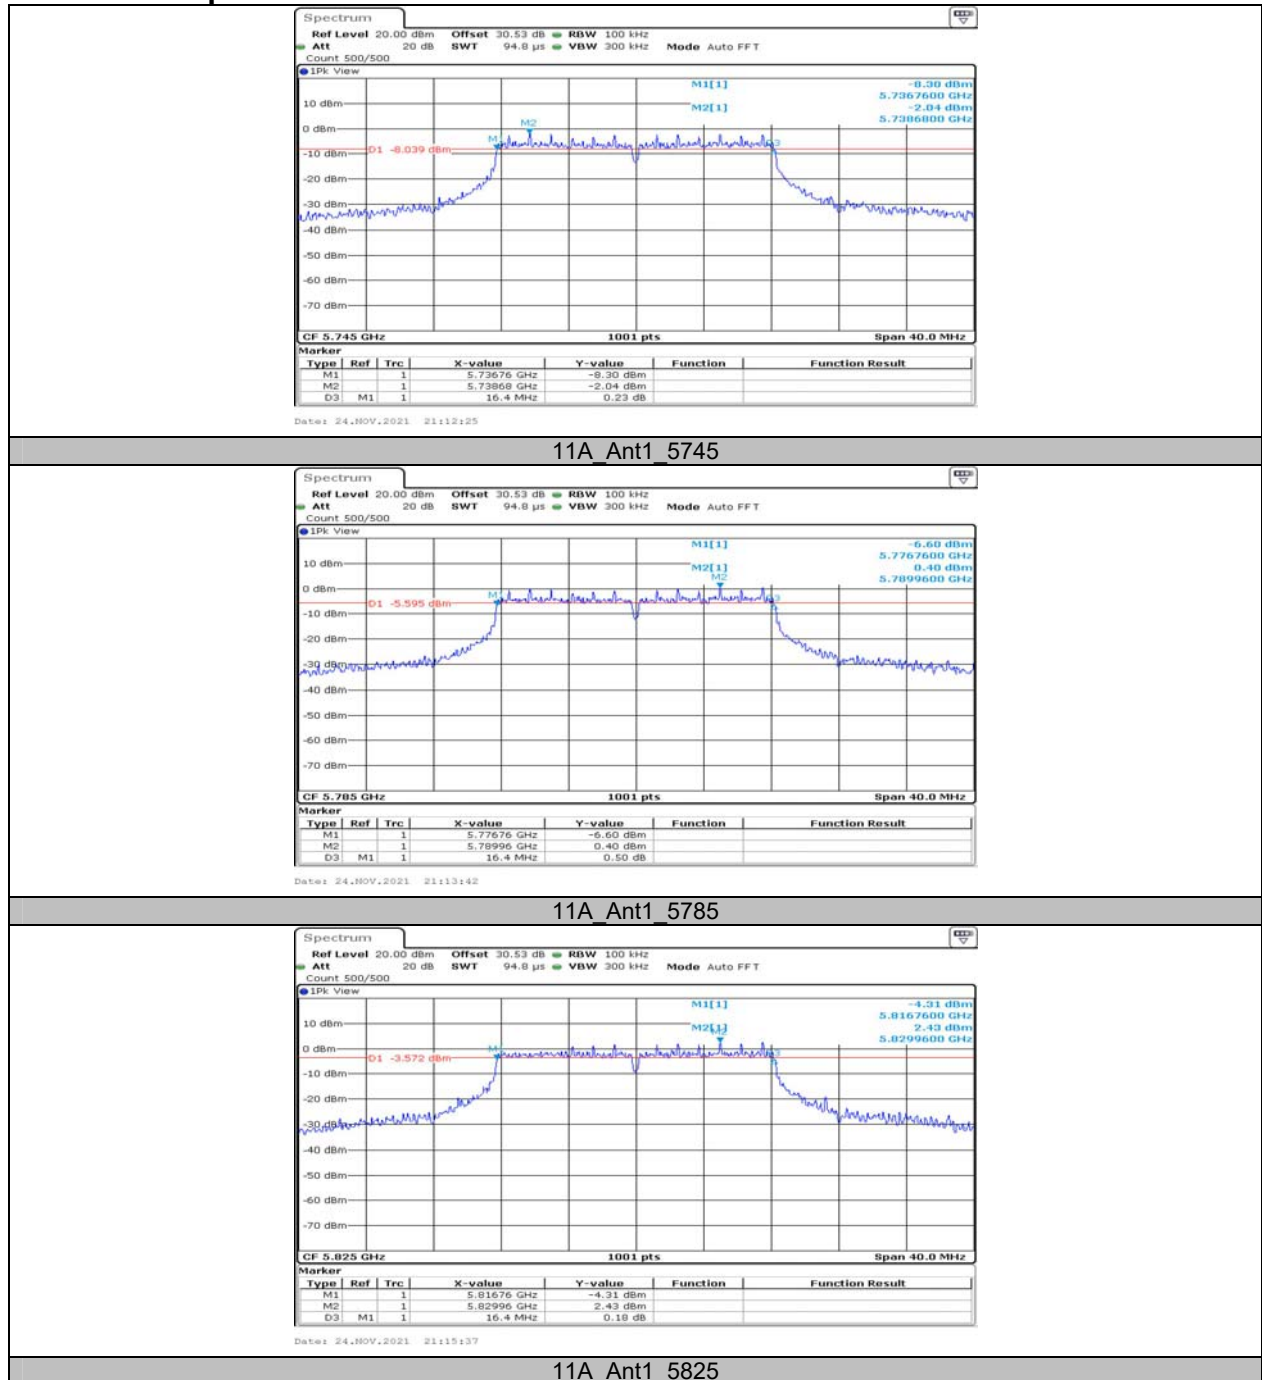

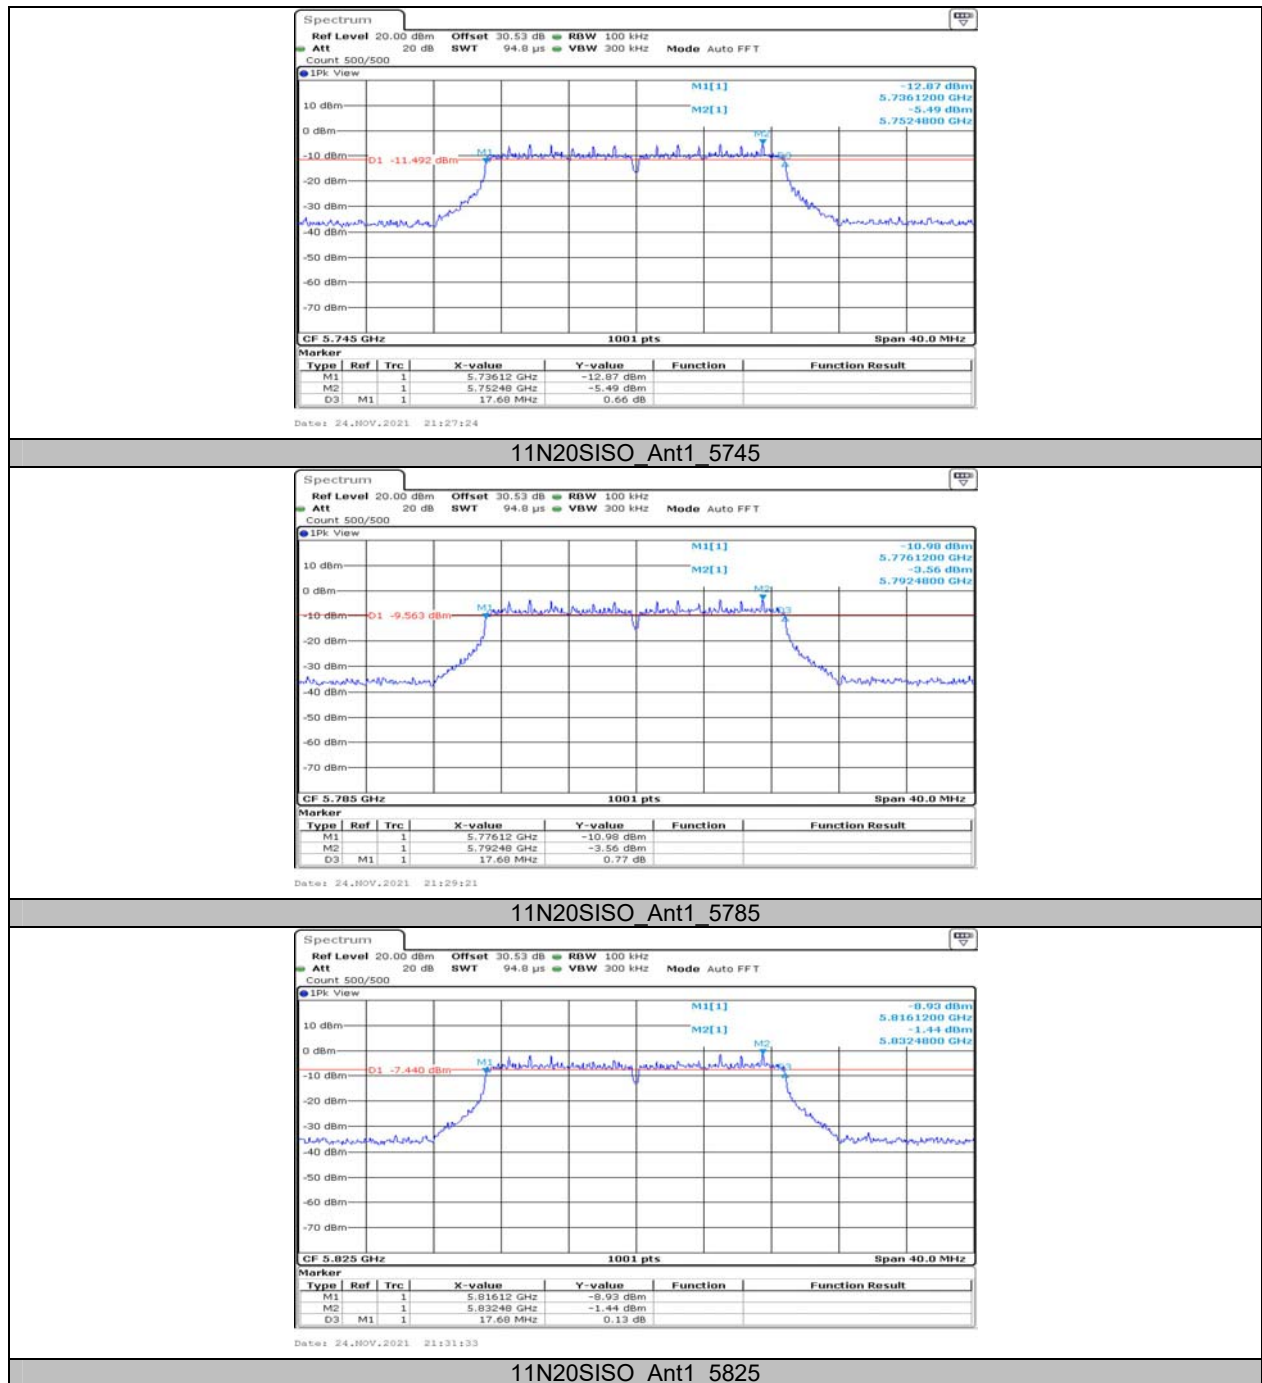

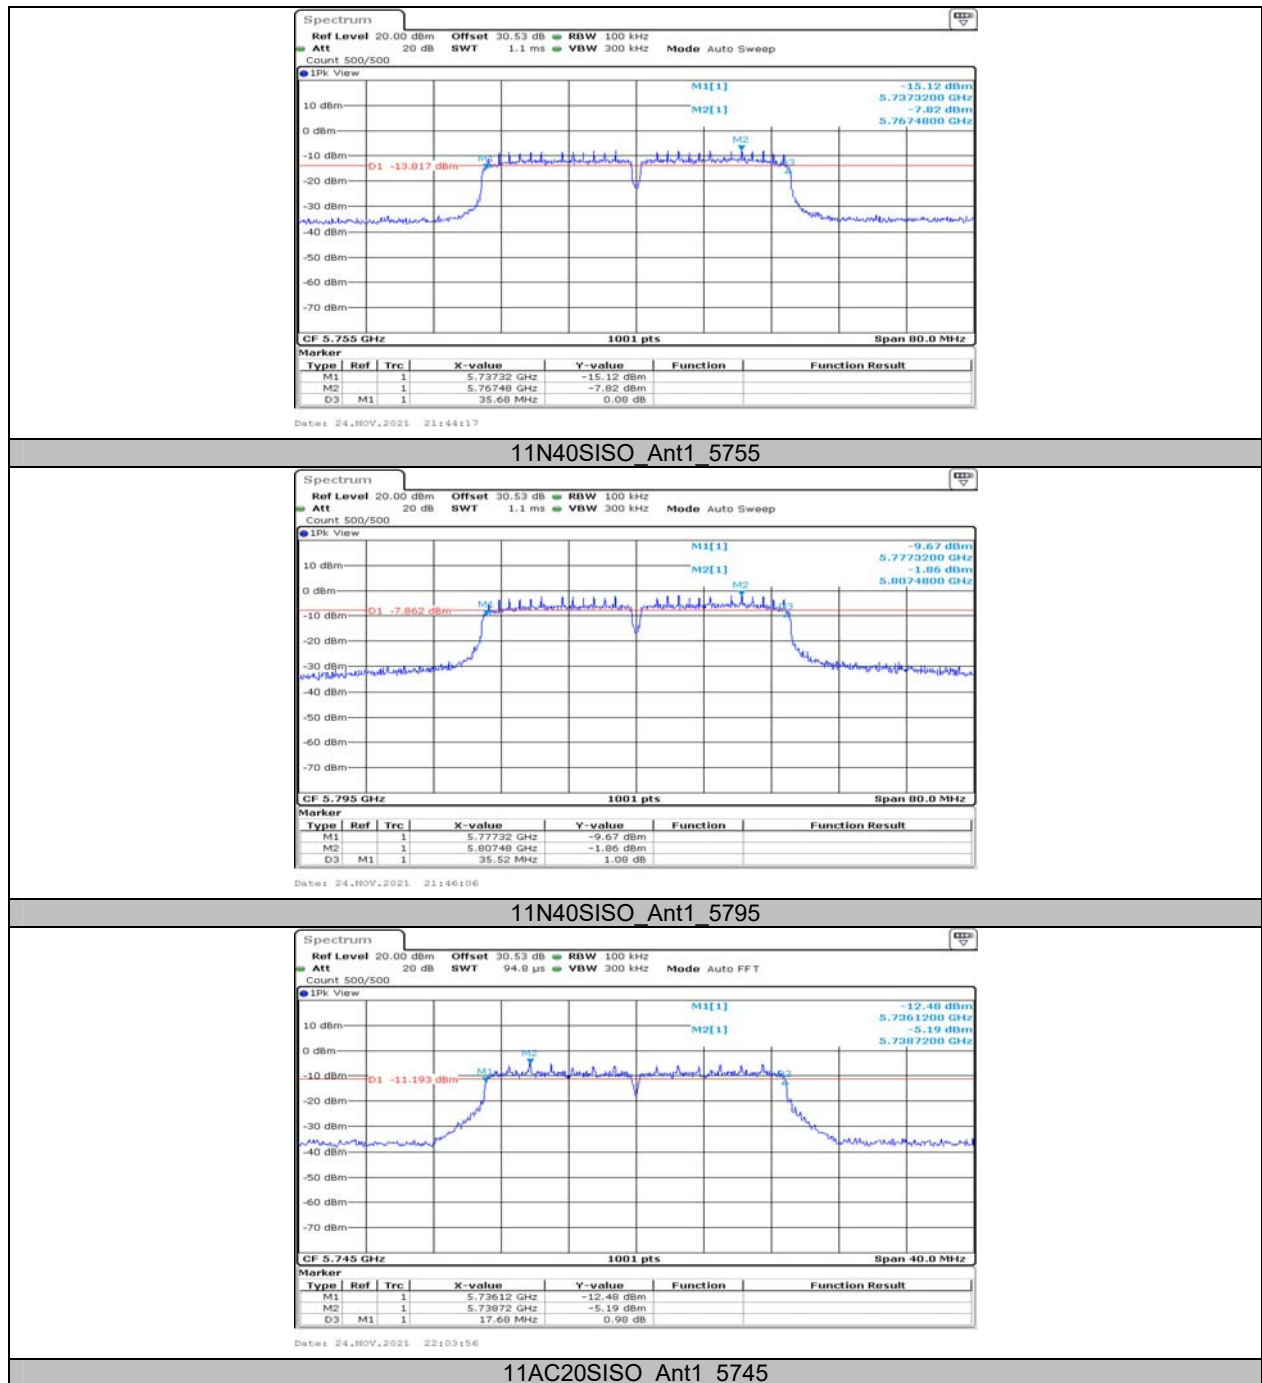

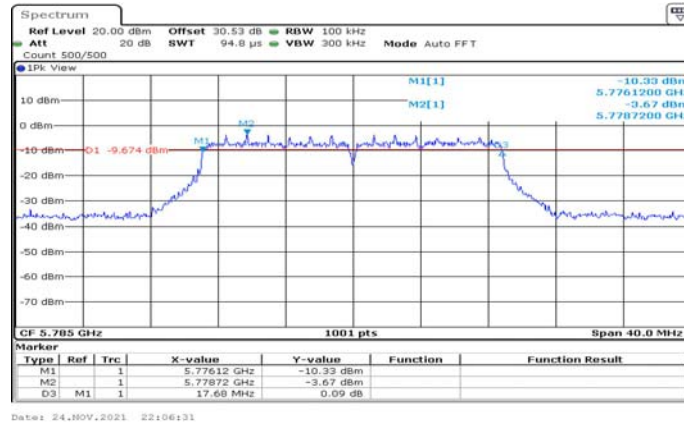


11AC20SISO Ant1_5785



11AC20SISO Ant1_5825



11AC40SISO Ant1_5755

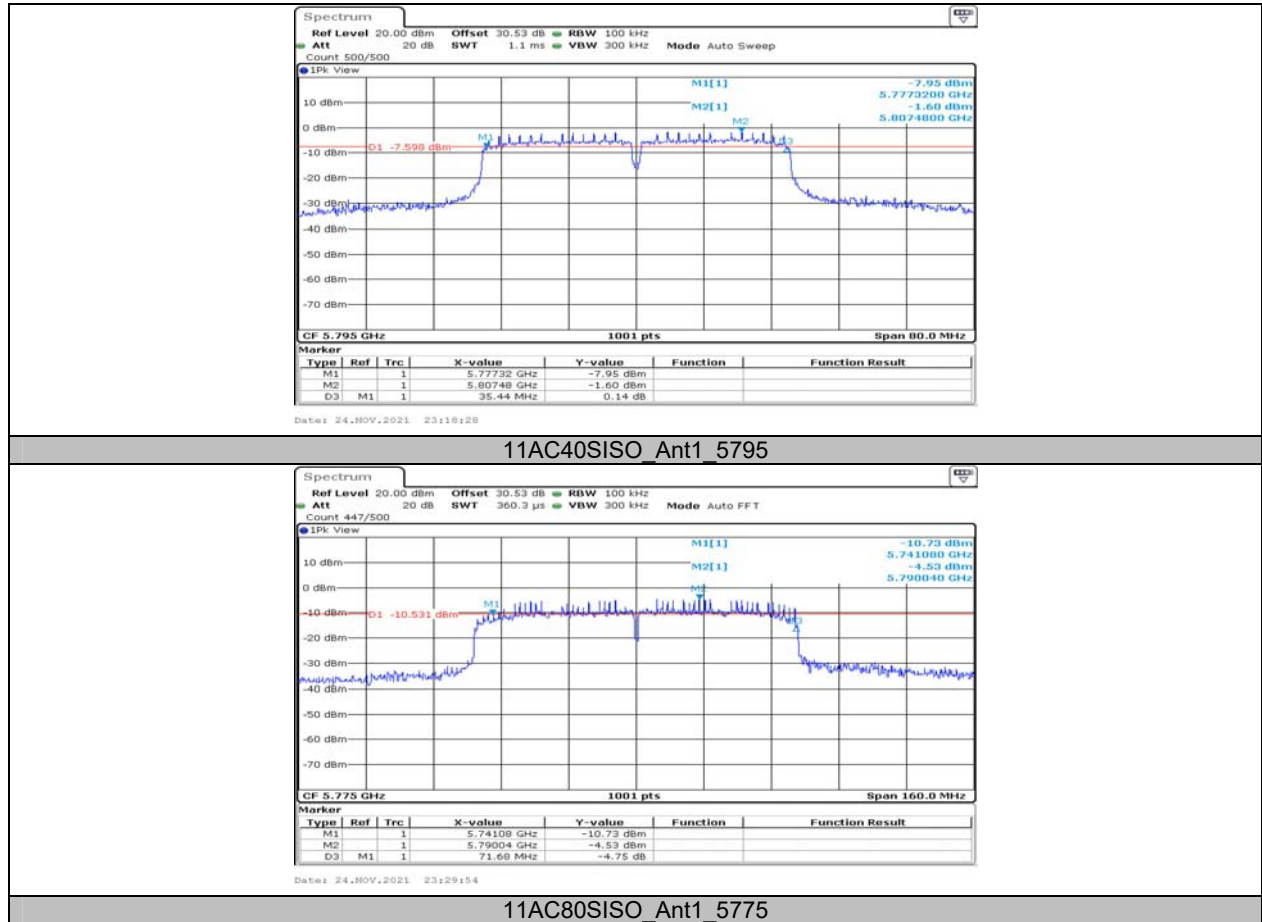

Appendix B: Maximum conducted output power Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	15.30	≤23.98	PASS
		5200	14.95	≤23.98	PASS
		5240	14.68	≤23.98	PASS
		5745	10.53	≤30	PASS
		5785	12.50	≤30	PASS
		5825	14.49	≤30	PASS
11N20SISO	Ant1	5180	15.77	≤23.98	PASS
		5200	15.27	≤23.98	PASS
		5240	14.26	≤23.98	PASS
		5745	11.07	≤30	PASS
		5785	12.91	≤30	PASS
		5825	14.67	≤30	PASS
11N40SISO	Ant1	5190	15.13	≤23.98	PASS
		5230	13.71	≤23.98	PASS
		5755	11.35	≤30	PASS
		5795	12.99	≤30	PASS
11AC20SISO	Ant1	5180	15.75	≤23.98	PASS
		5200	15.20	≤23.98	PASS
		5240	14.06	≤23.98	PASS
		5745	11.46	≤30	PASS
		5785	13.27	≤30	PASS
		5825	15.06	≤30	PASS
11AC40SISO	Ant1	5190	12.83	≤23.98	PASS
		5230	11.85	≤23.98	PASS
		5755	11.61	≤30	PASS
		5795	13.23	≤30	PASS
11AC80SISO	Ant1	5210	12.03	≤23.98	PASS
		5775	13.37	≤30	PASS


Appendix B: Maximum power spectral density Test Result


Test Mode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	3.52	≤11	PASS
		5200	2.96	≤11	PASS
		5240	2.82	≤11	PASS
		5745	-4.67	≤30	PASS
		5785	-2.7	≤30	PASS
		5825	-0.7	≤30	PASS
11N20SISO	Ant1	5180	3.72	≤11	PASS
		5200	3	≤11	PASS
		5240	2.32	≤11	PASS
		5745	-4.64	≤30	PASS
		5785	-2.52	≤30	PASS
		5825	-0.59	≤30	PASS
11N40SISO	Ant1	5190	0.24	≤11	PASS
		5230	-1.05	≤11	PASS
		5755	-7.09	≤30	PASS
		5795	-5.36	≤30	PASS
11AC20SISO	Ant1	5180	3.44	≤11	PASS
		5200	2.69	≤11	PASS
		5240	2.59	≤11	PASS
		5745	-4.25	≤30	PASS
		5785	-2.4	≤30	PASS
		5825	-0.2	≤30	PASS
11AC40SISO	Ant1	5190	-2.12	≤11	PASS
		5230	-2.5	≤11	PASS
		5755	-6.99	≤30	PASS
		5795	-4.79	≤30	PASS
11AC80SISO	Ant1	5210	-5.58	≤11	PASS
		5775	-7.91	≤30	PASS

Note: 1.The Result and LimitUnit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor is compensated in the graph.

Test Graphs

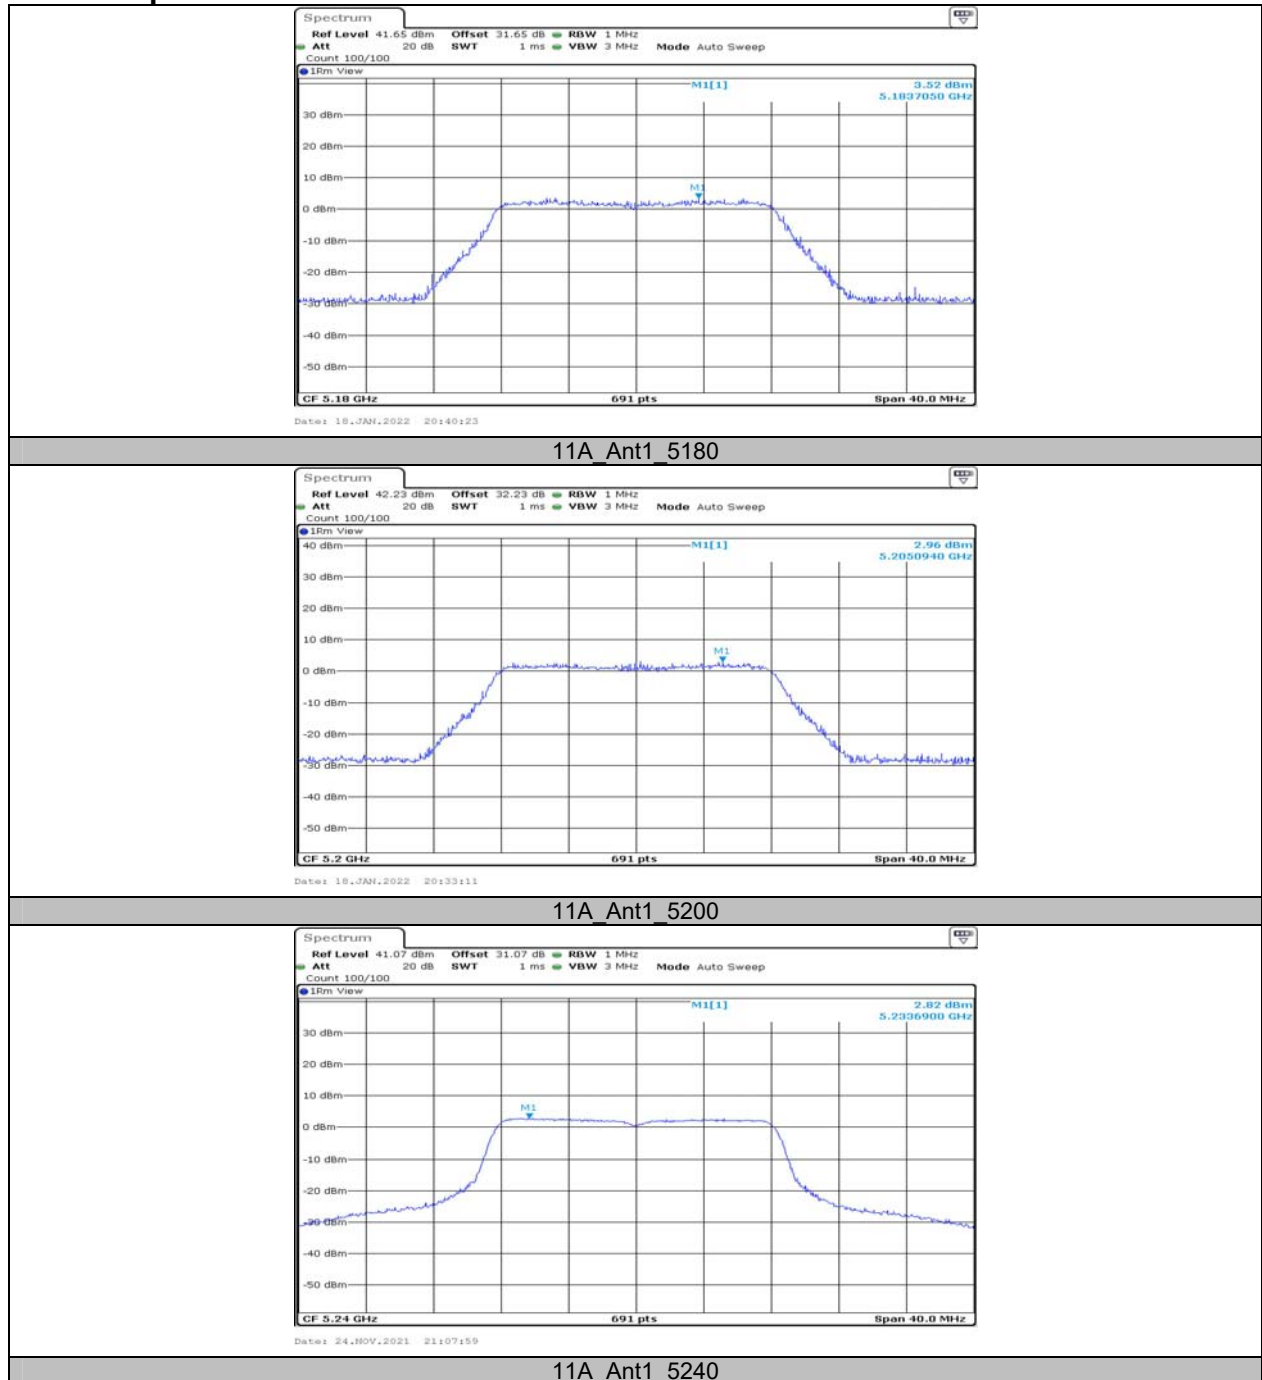

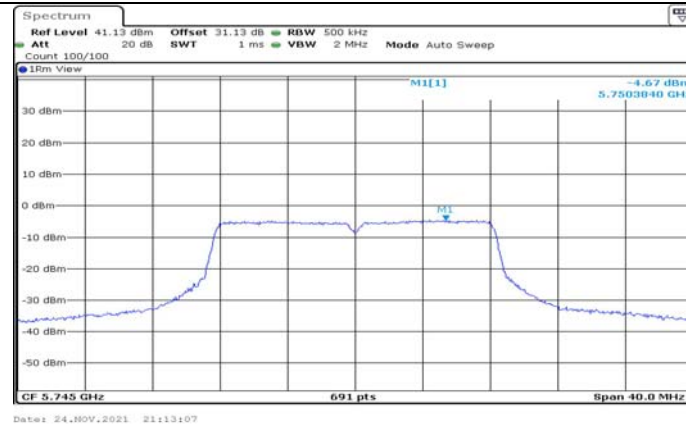

11A_Ant1_5745

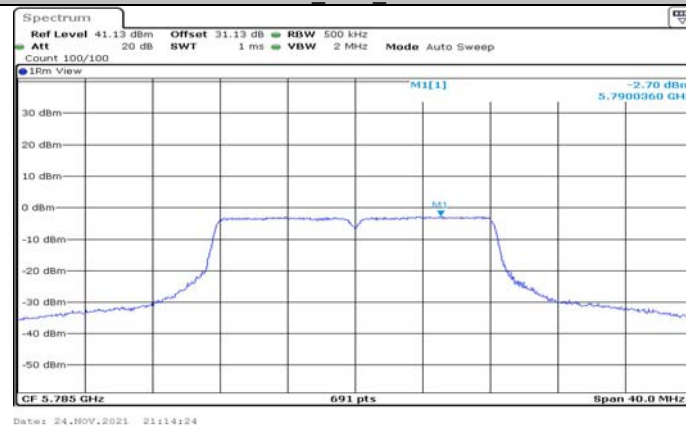

11A_Ant1_5785




11A_Ant1_5825



11N20SISO Ant1 5180



11N20SISO Ant1 5200

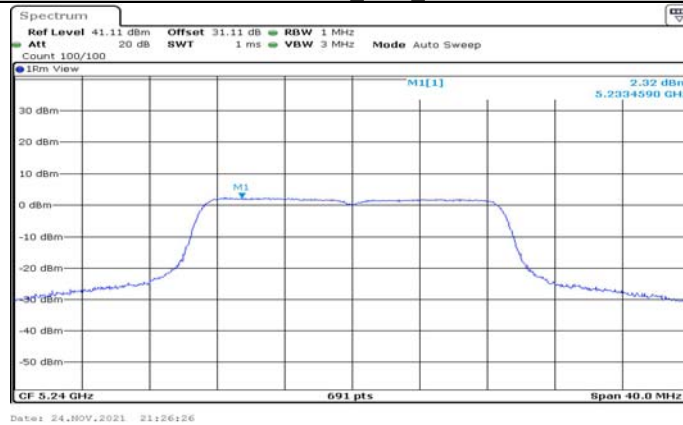

11N20SISO Ant1 5240



11N20SISO Ant1 5745



11N20SISO Ant1 5785



11N20SISO Ant1 5825



11N40SISO Ant1 5190



11N40SISO Ant1 5230



11N40SISO Ant1 5755



11N40SISO Ant1 5795



11AC20SISO Ant1 5180



11AC20SISO Ant1 5200



11AC20SISO Ant1_5240



11AC20SISO Ant1_5745



11AC20SISO Ant1_5785



11AC20SISO Ant1 5825



11AC40SISO Ant1 5190



11AC40SISO Ant1 5230



11AC40SISO Ant1 5755



11AC40SISO Ant1 5795



11AC80SISO Ant1 5210




Appendix C: Duty Cycle Test Result


Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5200	1.35	1.55	87.10
		5785	1.35	1.55	87.10
11N20SISO	Ant1	5200	1.27	1.46	86.99
		5785	1.27	1.47	86.39
11N40SISO	Ant1	5190	0.63	0.83	75.90
		5755	0.63	0.83	75.90
11AC20SISO	Ant1	5200	1.14	1.34	85.07
		5785	1.14	1.34	85.07
11AC40SISO	Ant1	5190	0.57	0.77	74.03
		5755	0.57	0.77	74.03
11AC80SISO	Ant1	5210	0.25	0.45	55.56
		5775	0.25	0.45	55.56

Test Graphs




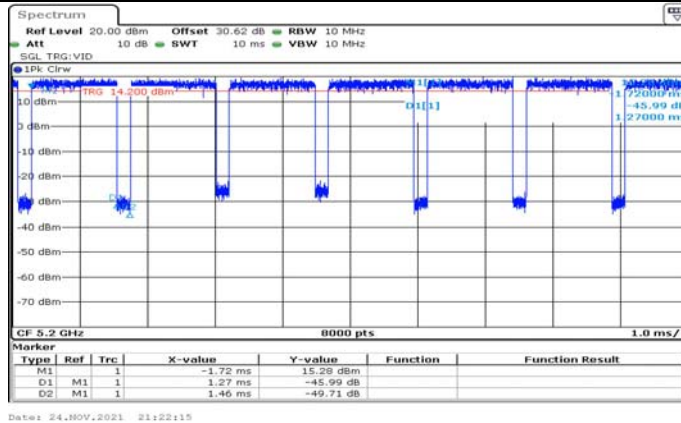


11N20SISO Ant1 5200

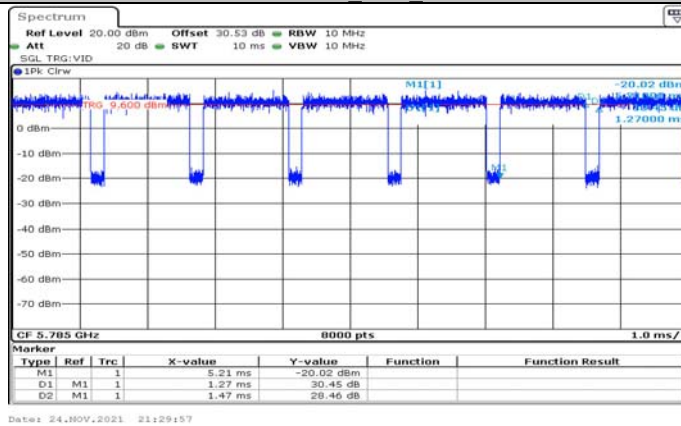


11N20SISO Ant1 5785

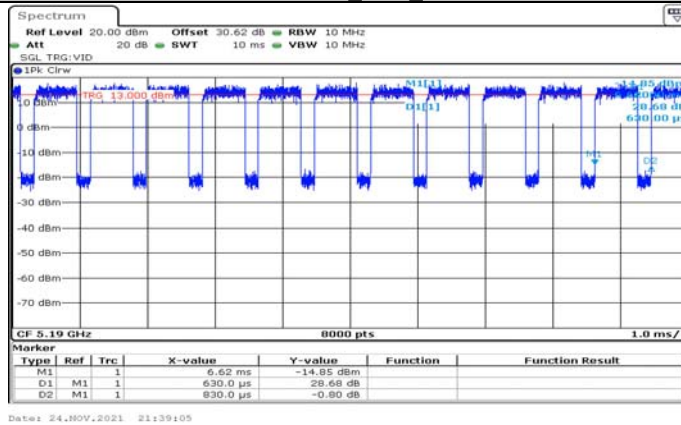


11N40SISO Ant1 5190

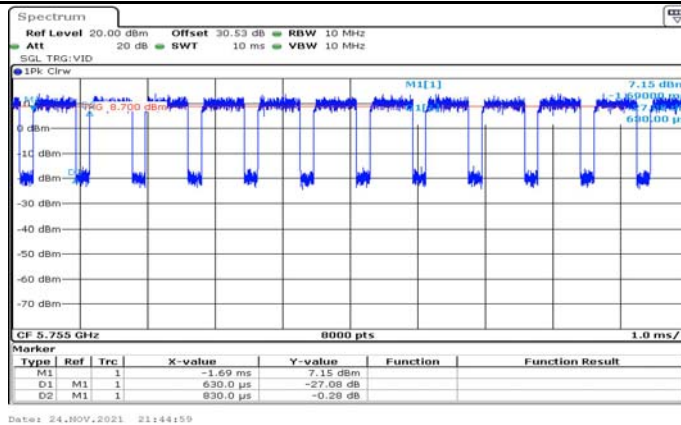


11N40SISO Ant1 5755

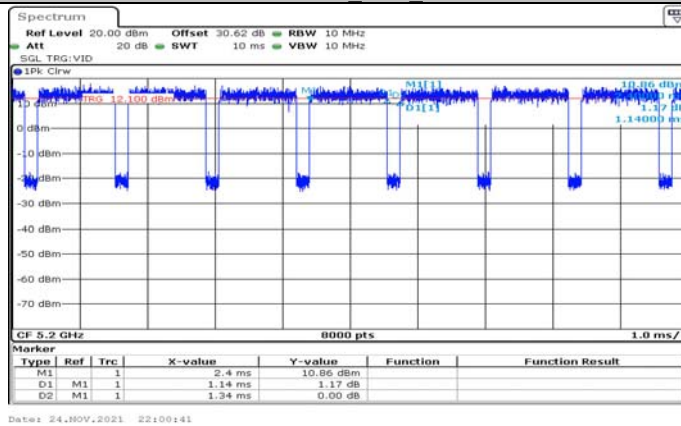


11AC20SISO Ant1 5200

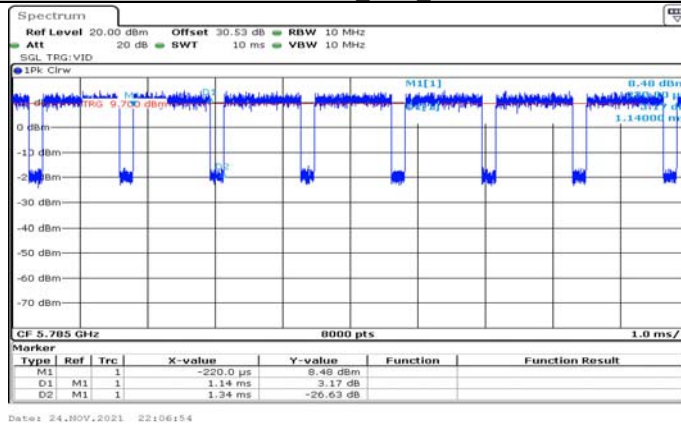


11AC20SISO Ant1 5785

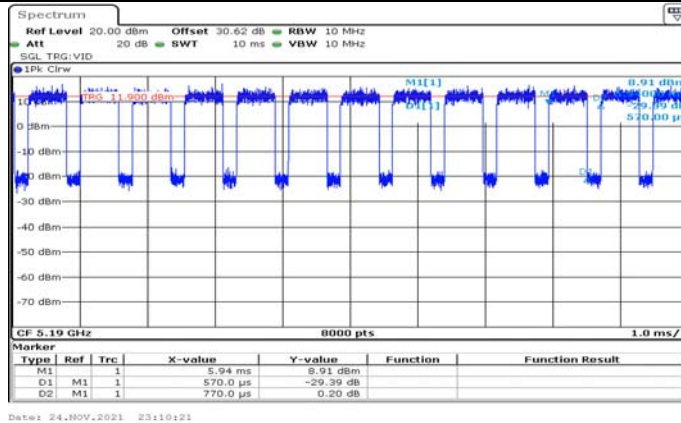


11AC40SISO Ant1_5190

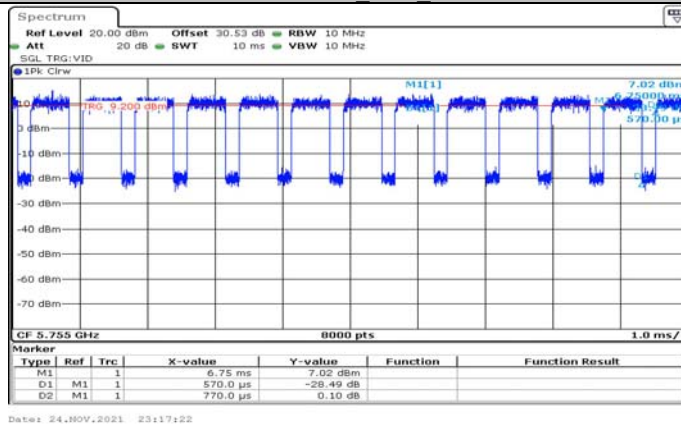

11AC40SISO Ant1_5755

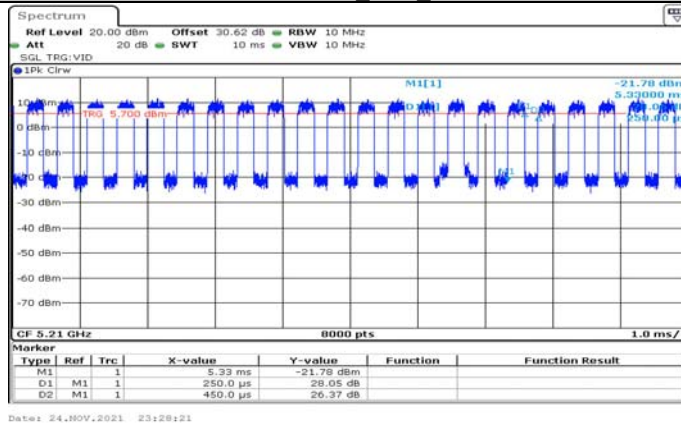

11AC80SISO Ant1_5210

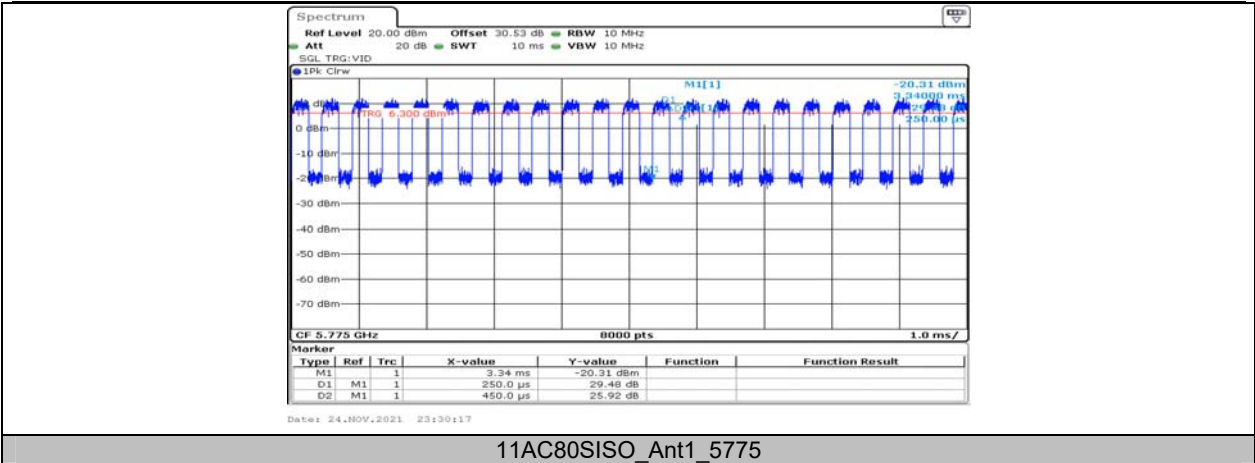

***** END OF REPORT *****