

FCC TEST REPORT

REPORT NO.: RF930911L01

MODEL NO.: WAPA-118GD

RECEIVED: Sep. 13, 2004

TESTED: Sep. 14 ~ Sep. 23, 2004

APPLICANT: Gemtek Technology Co., Ltd.

ADDRESS: No.1, Jen Ai Road, Hsinchu Industrial Park,
Hukou Hsinchu, Taiwan, R.O.C. 303

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 70 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES.....	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	8
3.4	DESCRIPTION OF SUPPORT UNITS	9
3.5	CONFIGURATION OF SYSTEM UNDER TEST	10
4	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS.....	15
4.2	RADIATED EMISSION MEASUREMENT	21
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	21
4.2.2	TEST INSTRUMENTS	22
4.2.3	TEST PROCEDURES	23
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	24
4.2.6	EUT OPERATING CONDITIONS	24
4.2.7	TEST RESULTS.....	25
4.2.8	TEST RESULTS (A)	27
4.2.9	TEST RESULTS (B).....	30
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE.....	34
4.3.4	DEVIATION FROM TEST STANDARD	34
4.3.5	TEST SETUP	34
4.3.6	EUT OPERATING CONDITIONS	34
4.3.7	TEST RESULTS (A)	35
4.3.8	TEST RESULTS (B).....	39



4.4	MAXIMUM PEAK OUTPUT POWER	43
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	43
4.4.2	TEST INSTRUMENTS	43
4.4.3	TEST PROCEDURES	44
4.4.4	DEVIATION FROM TEST STANDARD	44
4.4.5	TEST SETUP	44
4.4.6	EUT OPERATING CONDITIONS	44
4.4.7	TEST RESULTS (A)	45
4.4.8	TEST RESULTS (B).....	46
4.5	POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
4.5.2	TEST INSTRUMENTS	47
4.5.3	TEST PROCEDURE.....	48
4.5.4	DEVIATION FROM TEST STANDARD	48
4.5.5	TEST SETUP	48
4.5.6	EUT OPERATING CONDITIONS	48
4.5.7	TEST RESULTS (A)	49
4.5.8	TEST RESULTS (B).....	53
4.6	BAND EDGES MEASUREMENT	57
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	57
4.6.2	TEST INSTRUMENTS	57
4.6.3	TEST PROCEDURE.....	57
4.6.4	DEVIATION FROM TEST STANDARD	57
4.6.5	EUT OPERATING CONDITION.....	57
4.6.6	TEST RESULTS.....	58
4.6.7	TEST RESULTS(A)	58
4.6.8	TEST RESULTS(B).....	58
4.7	ANTENNA REQUIREMENT	67
4.7.1	STANDARD APPLICABLE.....	67
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	67
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	68
6	INFORMATION ON THE TESTING LABORATORIES.....	70



1 CERTIFICATION

PRODUCT : Dell Wireless 4350 Small Network Access Point
MODEL NO. : WAPA-118GD
BRAND NAME : Dell
APPLICANT : Gemtek Technology Co., Ltd.
TESTED : Sep. 14 ~ Sep. 23, 2004
TEST SAMPLE : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou , **DATE:** Sep. 27, 2004
(Windy Chou)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Sep. 27, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Sep. 27, 2004
(Cody Chang,
Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -11.40dB at 13.797MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.13dB at 2360.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Dell Wireless 4350 Small Network Access Point
MODEL NO.	WAPA-118GD
POWER SUPPLY	12Vdc from AC adapter
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	80.91mW
ANTENNA TYPE	Dipole antenna with 2.0dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was tested with the following adapter:

BRAND:	Potrans Electrical Corporation
MODEL :	WD411200500
INPUT :	120Vac, 60Hz, 11W
OUTPUT :	12Vdc, 500mA

2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
4. Two test results were presented in the following sections. The test result A was for CCK technique and the test result B was for OFDM technique.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Dell Wireless 4350 Small Network Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4: 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 act as a communication partner to transfer data.

3.5 CONFIGURATION OF SYSTEM UNDER TEST

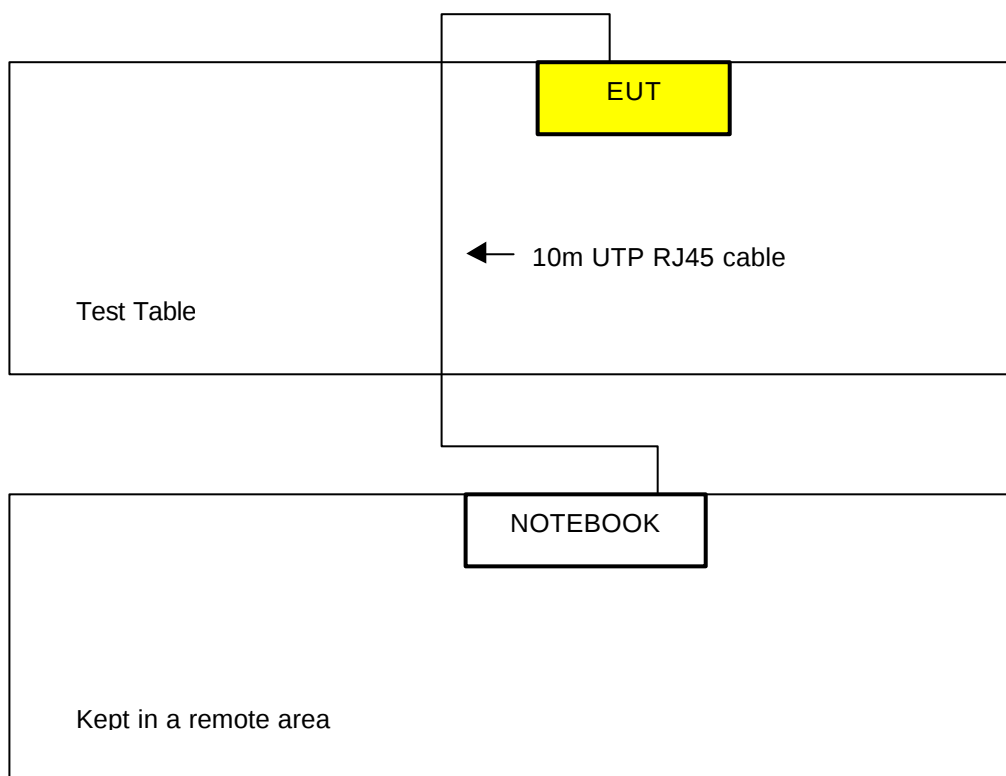

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Dec. 12, 2004
RF signal cable Woken	5D-FB	Cable-HYC01-01	Mar. 02, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Mar. 03, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Mar. 02, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

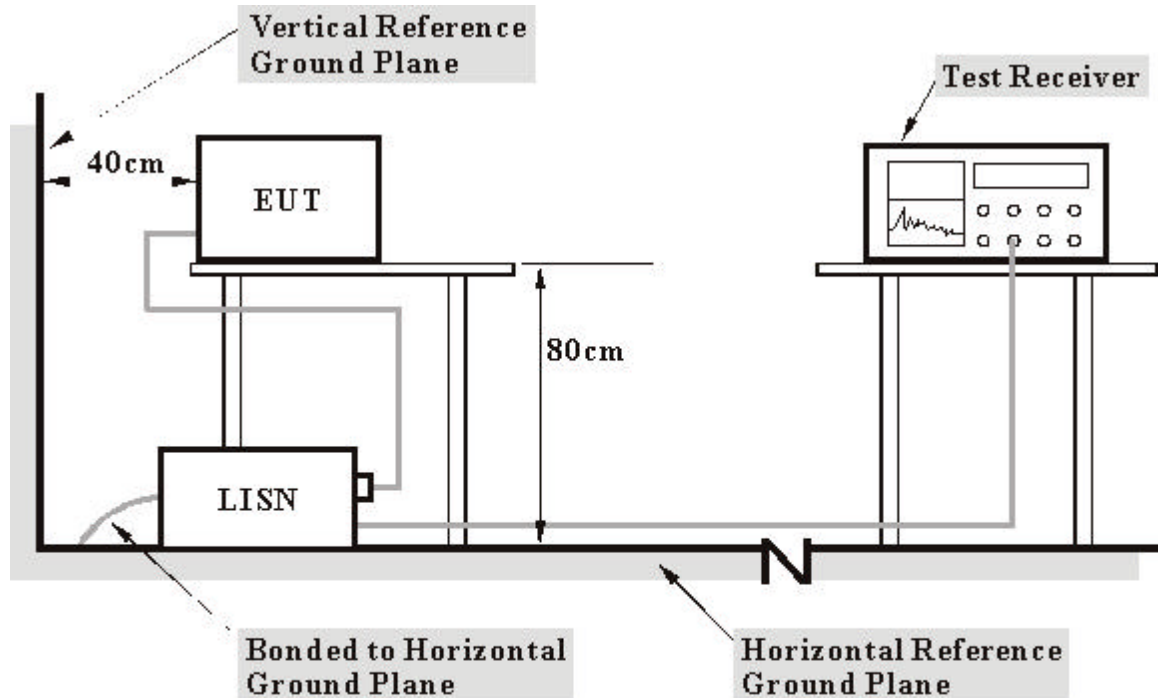

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared another Notebook system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PING".

4.1.7 TEST RESULTS

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Rush Kao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.240	0.12	45.75	-	45.87	-	62.10	52.10	-16.23	-
2	0.365	0.13	43.43	-	43.56	-	58.62	48.62	-15.06	-
3	0.845	0.14	34.16	-	34.30	-	56.00	46.00	-21.70	-
4	1.234	0.15	23.50	-	23.65	-	56.00	46.00	-32.35	-
5	13.797	0.66	47.94	-	48.60	-	60.00	50.00	-11.40	-
6	18.242	0.94	41.51	-	42.45	-	60.00	50.00	-17.55	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

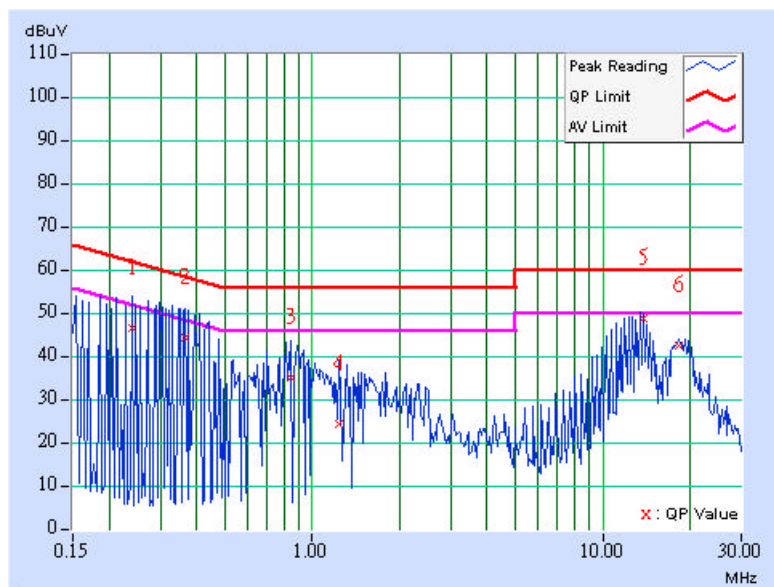

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Rush Kao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.11	44.59	-	44.70	-	64.61	54.61	-19.91	-
2	0.263	0.11	40.67	-	40.78	-	61.33	51.33	-20.55	-
3	0.369	0.12	35.61	-	35.73	-	58.53	48.53	-22.80	-
4	1.469	0.15	26.58	-	26.73	-	56.00	46.00	-29.27	-
5	11.887	0.42	41.50	-	41.92	-	60.00	50.00	-18.08	-
6	13.805	0.55	36.86	-	37.41	-	60.00	50.00	-22.59	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

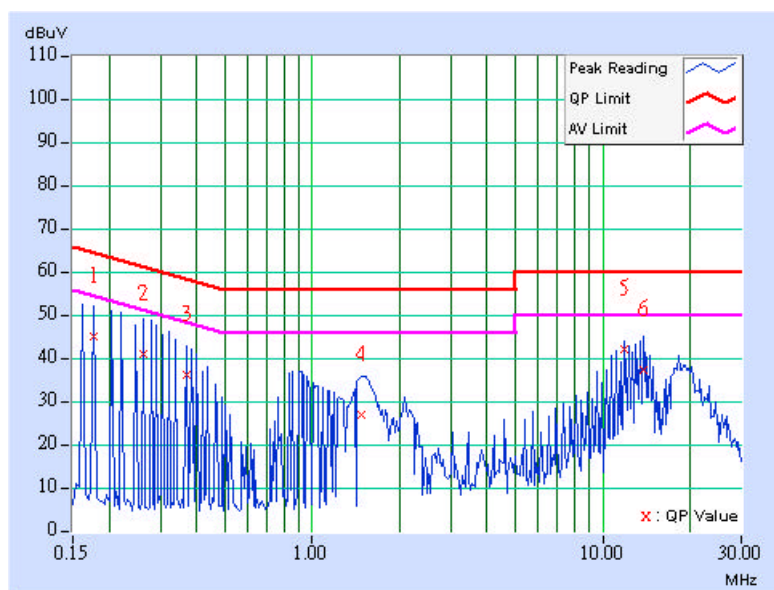

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Rush Kao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.12	46.31	-	46.43	-	63.11	53.11	-16.68	-
2	0.298	0.12	44.85	-	44.97	-	60.29	50.29	-15.31	-
3	0.408	0.13	42.78	-	42.91	-	57.69	47.69	-14.79	-
4	2.148	0.16	24.64	-	24.80	-	56.00	46.00	-31.20	-
5	11.883	0.48	46.81	-	47.29	-	60.00	50.00	-12.71	-
6	13.797	0.66	47.73	-	48.39	-	60.00	50.00	-11.61	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

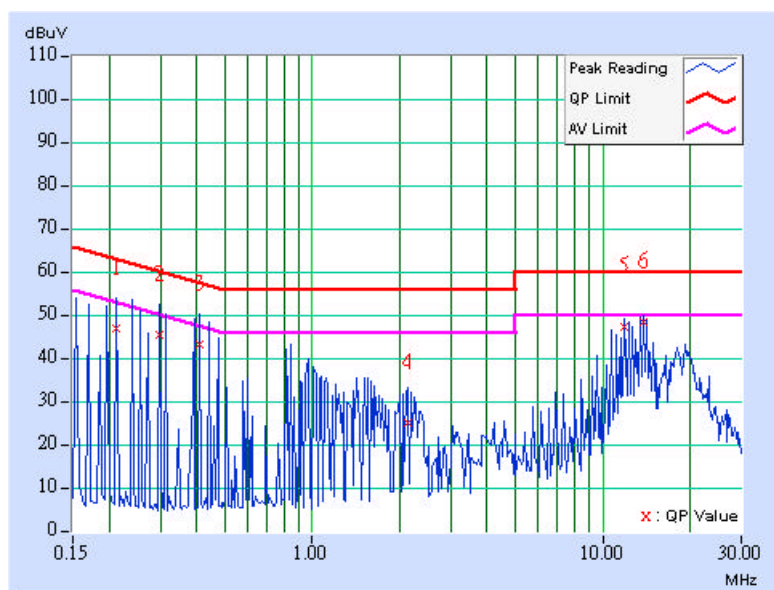

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Rush Kao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.11	43.33	-	43.44	-	63.11	53.11	-19.67	-
2	0.298	0.11	38.99	-	39.10	-	60.29	50.29	-21.18	-
3	0.873	0.14	28.39	-	28.53	-	56.00	46.00	-27.47	-
4	1.484	0.15	27.11	-	27.26	-	56.00	46.00	-28.74	-
5	13.414	0.53	42.06	-	42.59	-	60.00	50.00	-17.41	-
6	19.160	0.70	39.37	-	40.07	-	60.00	50.00	-19.93	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

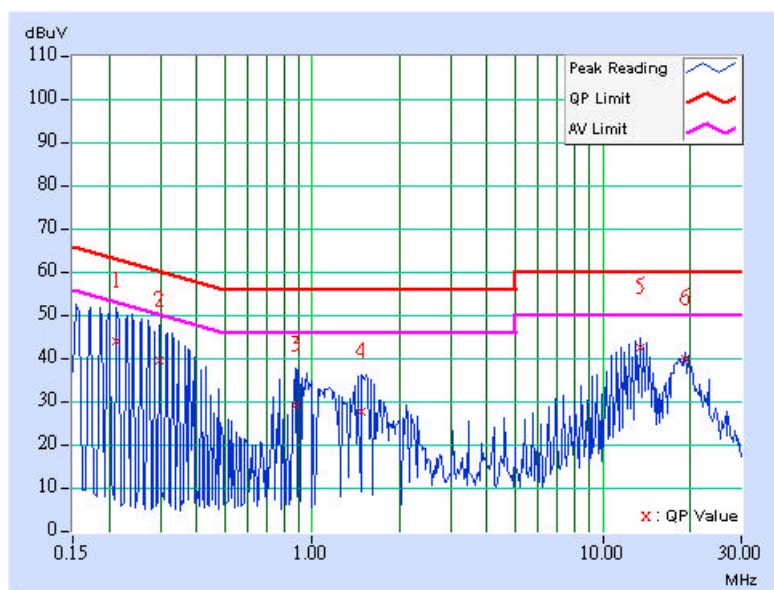

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Rush Kao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.298	0.12	44.97	-	45.09	-	60.29	50.29	-15.19	-
2	0.408	0.13	42.79	-	42.92	-	57.69	47.69	-14.78	-
3	0.888	0.14	33.29	-	33.43	-	56.00	46.00	-22.57	-
4	1.789	0.16	21.46	-	21.62	-	56.00	46.00	-34.38	-
5	11.883	0.48	46.07	-	46.55	-	60.00	50.00	-13.45	-
6	14.180	0.70	46.41	-	47.11	-	60.00	50.00	-12.89	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

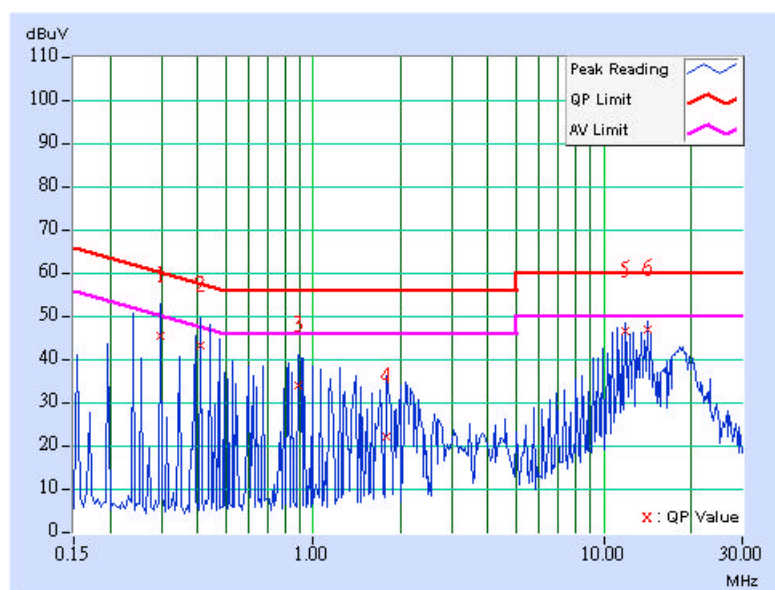

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Rush Kao	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.244	0.11	42.02	-	42.13	-	61.97	51.97	-19.84	-
2	0.318	0.11	37.94	-	38.05	-	59.76	49.76	-21.71	-
3	0.912	0.14	28.16	-	28.30	-	56.00	46.00	-27.70	-
4	2.051	0.16	19.41	-	19.57	-	56.00	46.00	-36.43	-
5	11.883	0.42	41.60	-	42.02	-	60.00	50.00	-17.98	-
6	19.160	0.70	39.57	-	40.27	-	60.00	50.00	-19.73	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

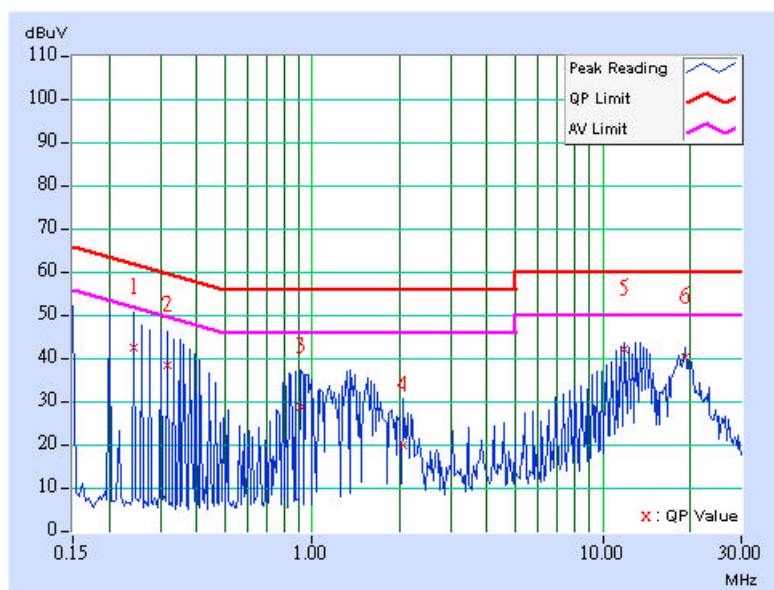

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

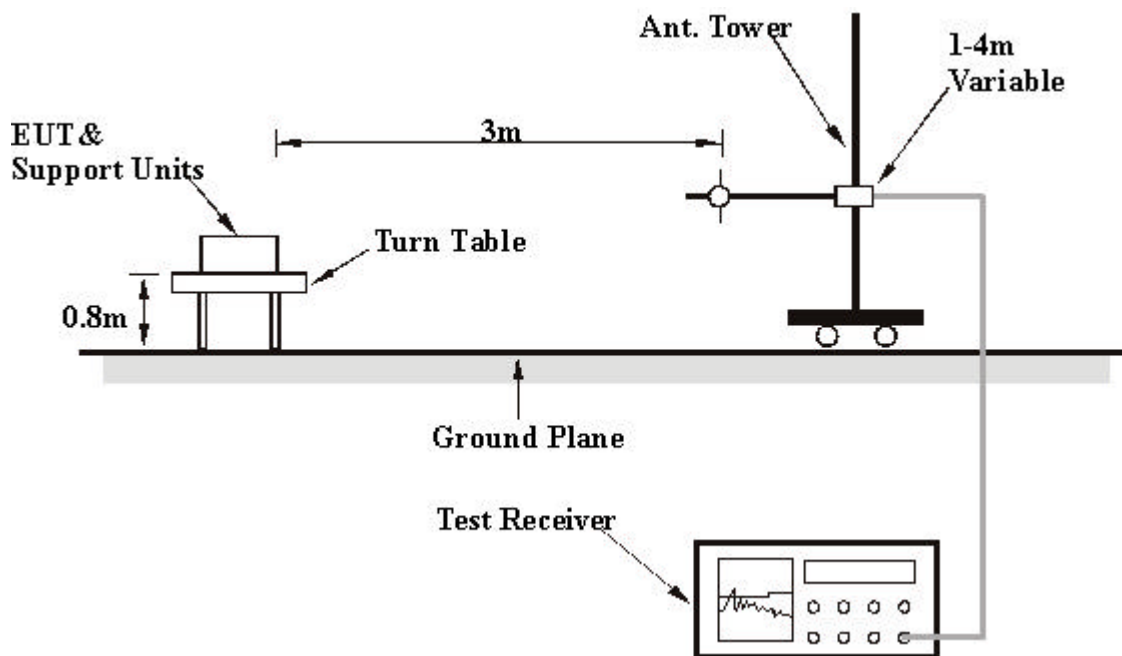

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 60% RH, 991 hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.21	33.88 QP	40.00	-6.12	1.75 H	37	19.89	13.99
2	98.04	32.60 QP	43.50	-10.90	1.75 H	88	21.77	10.83
3	212.73	33.97 QP	43.50	-9.53	1.25 H	49	22.30	11.67
4	249.66	41.60 QP	46.00	-4.40	1.25 H	250	28.39	13.22
5	269.10	38.65 QP	46.00	-7.35	1.00 H	118	24.91	13.73
6	374.07	33.74 QP	46.00	-12.26	1.00 H	37	17.56	16.18
7	449.88	32.05 QP	46.00	-13.95	1.00 H	217	13.98	18.07
8	500.42	38.42 QP	46.00	-7.58	1.50 H	319	19.68	18.74
9	539.30	35.48 QP	46.00	-10.52	1.75 H	85	16.00	19.48
10	630.66	35.45 QP	46.00	-10.55	1.50 H	319	14.03	21.42
11	720.08	39.00 QP	46.00	-7.00	1.25 H	319	16.21	22.79
12	811.44	35.75 QP	46.00	-10.25	1.50 H	106	11.85	23.90
13	912.53	39.30 QP	46.00	-6.70	1.00 H	253	14.06	25.24

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 60% RH, 991 hPa	TESTED BY: Match Tsui	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.55	35.99 QP	40.00	-4.01	1.00 V	328	20.76	15.23
2	58.71	38.01 QP	40.00	-1.99	1.06 V	284	24.18	13.84
3	98.04	34.24 QP	43.50	-9.26	1.25 V	202	23.41	10.83
4	127.19	32.02 QP	43.50	-11.48	1.00 V	208	18.49	13.53
5	179.68	34.05 QP	43.50	-9.45	1.00 V	208	21.06	12.99
6	269.10	39.75 QP	46.00	-6.25	1.25 V	238	26.01	13.73
7	360.46	32.78 QP	46.00	-13.22	1.50 V	250	16.90	15.88
8	449.88	36.33 QP	46.00	-9.67	1.25 V	163	18.26	18.07
9	500.42	35.68 QP	46.00	-10.32	1.50 V	4	16.94	18.74
10	539.30	35.69 QP	46.00	-10.31	1.00 V	187	16.20	19.48
11	630.66	38.08 QP	46.00	-7.92	1.00 V	178	16.66	21.42
12	720.08	36.74 QP	46.00	-9.26	1.50 V	178	13.94	22.79
13	811.44	33.86 QP	46.00	-12.14	1.25 V	346	9.95	23.90
14	900.86	38.30 QP	46.00	-7.70	1.25 V	28	13.18	25.12

REMARKS

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS (A)

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 62% RH, 991 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	48.05 PK	74.00	-25.95	1.00 H	262	17.43	30.62
1	2016.00	43.22 AV	54.00	-10.78	1.00 H	262	12.60	30.62
2	2390.00	48.55 PK	74.00	-25.45	1.14 H	34	16.75	31.80
2	2390.00	39.97 AV	54.00	-14.03	1.14 H	34	8.17	31.80
3	*2412.00	105.05 PK			1.14 H	34	73.18	31.87
3	*2412.00	96.47 AV			1.14 H	34	64.60	31.87
4	4824.00	49.83 PK	74.00	-24.17	1.03 H	204	11.72	38.11
4	4824.00	36.54 AV	54.00	-17.46	1.03 H	204	-1.57	38.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	54.91 PK	74.00	-19.09	1.00 V	3	24.29	30.62
1	2016.00	52.52 AV	54.00	-1.48	1.00 V	3	21.90	30.62
2	2360.00	63.48 PK	74.00	-10.52	1.22 V	360	31.77	31.71
2	2360.00	50.35 AV	54.00	-3.65	1.22 V	360	18.64	31.71
3	2390.00	59.00 PK	74.00	-15.00	1.13 V	293	27.20	31.80
3	2390.00	49.89 AV	54.00	-4.11	1.13 V	293	18.09	31.80
4	*2412.00	115.50 PK			1.13 V	293	83.63	31.87
4	*2412.00	106.39 AV			1.13 V	293	74.52	31.87
5	4824.00	53.21 PK	74.00	-20.79	1.10 V	37	15.10	38.11
5	4824.00	39.05 AV	54.00	-14.95	1.10 V	37	0.94	38.11

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 62% RH, 991 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	50.41 PK	74.00	-23.59	1.02 H	223	19.79	30.62
1	2016.00	47.27 AV	54.00	-6.73	1.02 H	223	16.65	30.62
2	*2437.00	106.42 PK			1.08 H	360	74.47	31.95
2	*2437.00	97.55 AV			1.08 H	360	65.60	31.95
3	4874.00	49.71 PK	74.00	-24.29	1.07 H	34	11.43	38.28
3	4874.00	35.20 AV	54.00	-18.80	1.07 H	34	-3.08	38.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	57.89 PK	74.00	-16.11	1.07 V	293	27.27	30.62
1	2016.00	50.94 AV	54.00	-3.06	1.07 V	293	20.32	30.62
2	2186.00	58.49 PK	74.00	-15.51	1.04 V	163	27.46	31.03
2	2186.00	47.69 AV	54.00	-6.31	1.04 V	163	16.66	31.03
3	2360.00	65.18 PK	74.00	-8.82	1.00 V	351	33.47	31.71
3	2360.00	48.62 AV	54.00	-5.38	1.00 V	351	16.91	31.71
4	*2437.00	115.92 PK			1.14 V	4	83.97	31.95
4	*2437.00	107.60 AV			1.14 V	4	75.65	31.95
5	4874.00	51.22 PK	74.00	-22.78	1.19 V	223	12.94	38.28
5	4874.00	36.96 AV	54.00	-17.04	1.19 V	223	-1.32	38.28

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.



EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 62% RH, 991 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	49.74 PK	74.00	-24.26	1.04 H	1	19.12	30.62
1	2016.00	46.01 AV	54.00	-7.99	1.04 H	1	15.39	30.62
2	*2462.00	107.17 PK			1.05 H	16	75.15	32.02
2	*2462.00	98.78 AV			1.05 H	16	66.76	32.02
3	2484.00	49.17 PK	74.00	-24.83	1.05 H	16	17.08	32.09
3	2484.00	40.78 AV	54.00	-13.22	1.05 H	16	8.69	32.09
4	4924.00	48.98 PK	74.00	-25.02	1.10 H	203	10.49	38.49
4	4924.00	36.63 AV	54.00	-17.37	1.10 H	203	-1.86	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	58.82 PK	74.00	-15.18	1.07 V	241	28.20	30.62
1	2016.00	56.54 AV	54.00	2.54	1.07 V	241	25.92	30.62
2	2360.00	64.18 PK	74.00	-9.82	1.23 V	183	32.47	31.71
2	2360.00	50.48 AV	54.00	-3.52	1.23 V	183	18.77	31.71
3	*2462.00	115.72 PK			1.12 V	13	83.70	32.02
3	*2462.00	107.46 AV			1.12 V	13	75.44	32.02
4	2484.00	57.72 PK	74.00	-16.28	1.12 V	13	25.63	32.09
4	2484.00	49.46 AV	54.00	-4.54	1.12 V	13	17.37	32.09
5	4924.00	51.44 PK	74.00	-22.56	1.07 V	103	12.95	38.49
5	4924.00	36.98 AV	54.00	-17.02	1.07 V	103	-1.51	38.49

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.

4.2.9 TEST RESULTS (B)

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 62% RH, 991 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	48.89 PK	74.00	-25.11	1.00 H	45	18.27	30.62
1	2016.00	44.34 AV	54.00	-9.66	1.00 H	45	13.72	30.62
2	2390.00	51.17 PK	74.00	-22.83	1.09 H	295	19.37	31.80
2	2390.00	39.61 AV	54.00	-14.39	1.09 H	295	7.81	31.80
3	*2412.00	99.84 PK			1.09 H	295	67.97	31.87
3	*2412.00	88.28 AV			1.09 H	295	56.41	31.87
4	4824.00	48.27 PK	74.00	-25.73	1.00 H	212	10.16	38.11
4	4824.00	35.75 AV	54.00	-18.25	1.00 H	212	-2.36	38.11

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	53.64 PK	74.00	-20.36	1.12 V	196	23.02	30.62
1	2016.00	51.09 AV	54.00	-2.91	1.12 V	196	20.47	30.62
2	2360.00	61.30 PK	74.00	-12.70	1.15 V	7	29.59	31.71
2	2360.00	51.32 AV	54.00	-2.68	1.15 V	7	19.61	31.71
3	2390.00	62.07 PK	74.00	-11.93	1.12 V	242	30.27	31.80
3	2390.00	50.58 AV	54.00	-3.42	1.12 V	242	18.78	31.80
4	*2412.00	110.74 PK			1.12 V	242	78.87	31.87
4	*2412.00	99.25 AV			1.12 V	242	67.38	31.87
5	4824.00	49.31 PK	74.00	-24.69	1.00 V	212	11.20	38.11
5	4824.00	37.18 AV	54.00	-16.82	1.00 V	212	-0.93	38.11

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency.

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 62% RH, 991 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	51.69 PK	74.00	-22.31	1.00 H	225	21.07	30.62
1	2016.00	48.50 AV	54.00	-5.50	1.00 H	225	17.88	30.62
2	*2437.00	105.40 PK			1.08 H	156	73.45	31.95
2	*2437.00	93.62 AV			1.08 H	156	61.67	31.95
3	4874.00	47.92 PK	74.00	-26.08	1.09 H	49	9.64	38.28
3	4874.00	35.68 AV	54.00	-18.32	1.09 H	49	-2.60	38.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	58.62 PK	74.00	-15.38	1.07 V	1	28.00	30.62
1	2016.00	56.05 AV	54.00	2.05	1.07 V	1	25.43	30.62
2	2360.00	63.25 PK	74.00	-10.75	1.16 V	6	31.54	31.71
2	2360.00	51.69 AV	54.00	-2.31	1.16 V	6	19.98	31.71
3	*2437.00	115.30 PK			1.18 V	191	83.35	31.95
3	*2437.00	103.93 AV			1.18 V	191	71.98	31.95
4	4874.00	47.79 PK	74.00	-26.21	1.11 V	175	9.51	38.28
4	4874.00	37.02 AV	54.00	-16.98	1.11 V	175	-1.26	38.28

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency.



EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 62% RH, 991 hPa	TESTED BY	Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	48.16 PK	74.00	-25.84	1.00 H	20	17.54	30.62
1	2016.00	44.18 AV	54.00	-9.82	1.00 H	20	13.56	30.62
2	*2462.00	104.97 PK			1.31 H	30	72.95	32.02
2	*2462.00	94.49 AV			1.31 H	30	62.47	32.02
3	2483.50	55.85 PK	74.00	-18.15	1.31 H	30	23.76	32.09
3	2483.50	45.37 AV	54.00	-8.63	1.31 H	30	13.28	32.09
4	4924.00	48.10 PK	74.00	-25.90	1.02 H	131	9.61	38.49
4	4924.00	35.96 AV	54.00	-18.04	1.02 H	131	-2.53	38.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	56.70 PK	74.00	-17.30	1.09 V	196	26.08	30.62
1	2016.00	55.29 AV	54.00	1.29	1.09 V	196	24.67	30.62
2	2360.00	62.21 PK	74.00	-11.79	1.14 V	295	30.50	31.71
2	2360.00	52.87 AV	54.00	-1.13	1.14 V	295	21.16	31.71
3	*2462.00	114.05 PK			1.12 V	197	82.03	32.02
3	*2462.00	101.73 AV			1.12 V	197	69.71	32.02
4	2483.50	64.93 PK	74.00	-9.07	1.12 V	197	32.84	32.09
4	2483.50	52.61 AV	54.00	-1.39	1.12 V	197	20.52	32.09
5	4924.00	48.68 PK	74.00	-25.32	1.15 V	20	10.19	38.49
5	4924.00	36.39 AV	54.00	-17.61	1.15 V	20	-2.10	38.49

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS (A)


EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.26	0.5	PASS
6	2437	12.10	0.5	PASS
11	2462	12.46	0.5	PASS


CH1

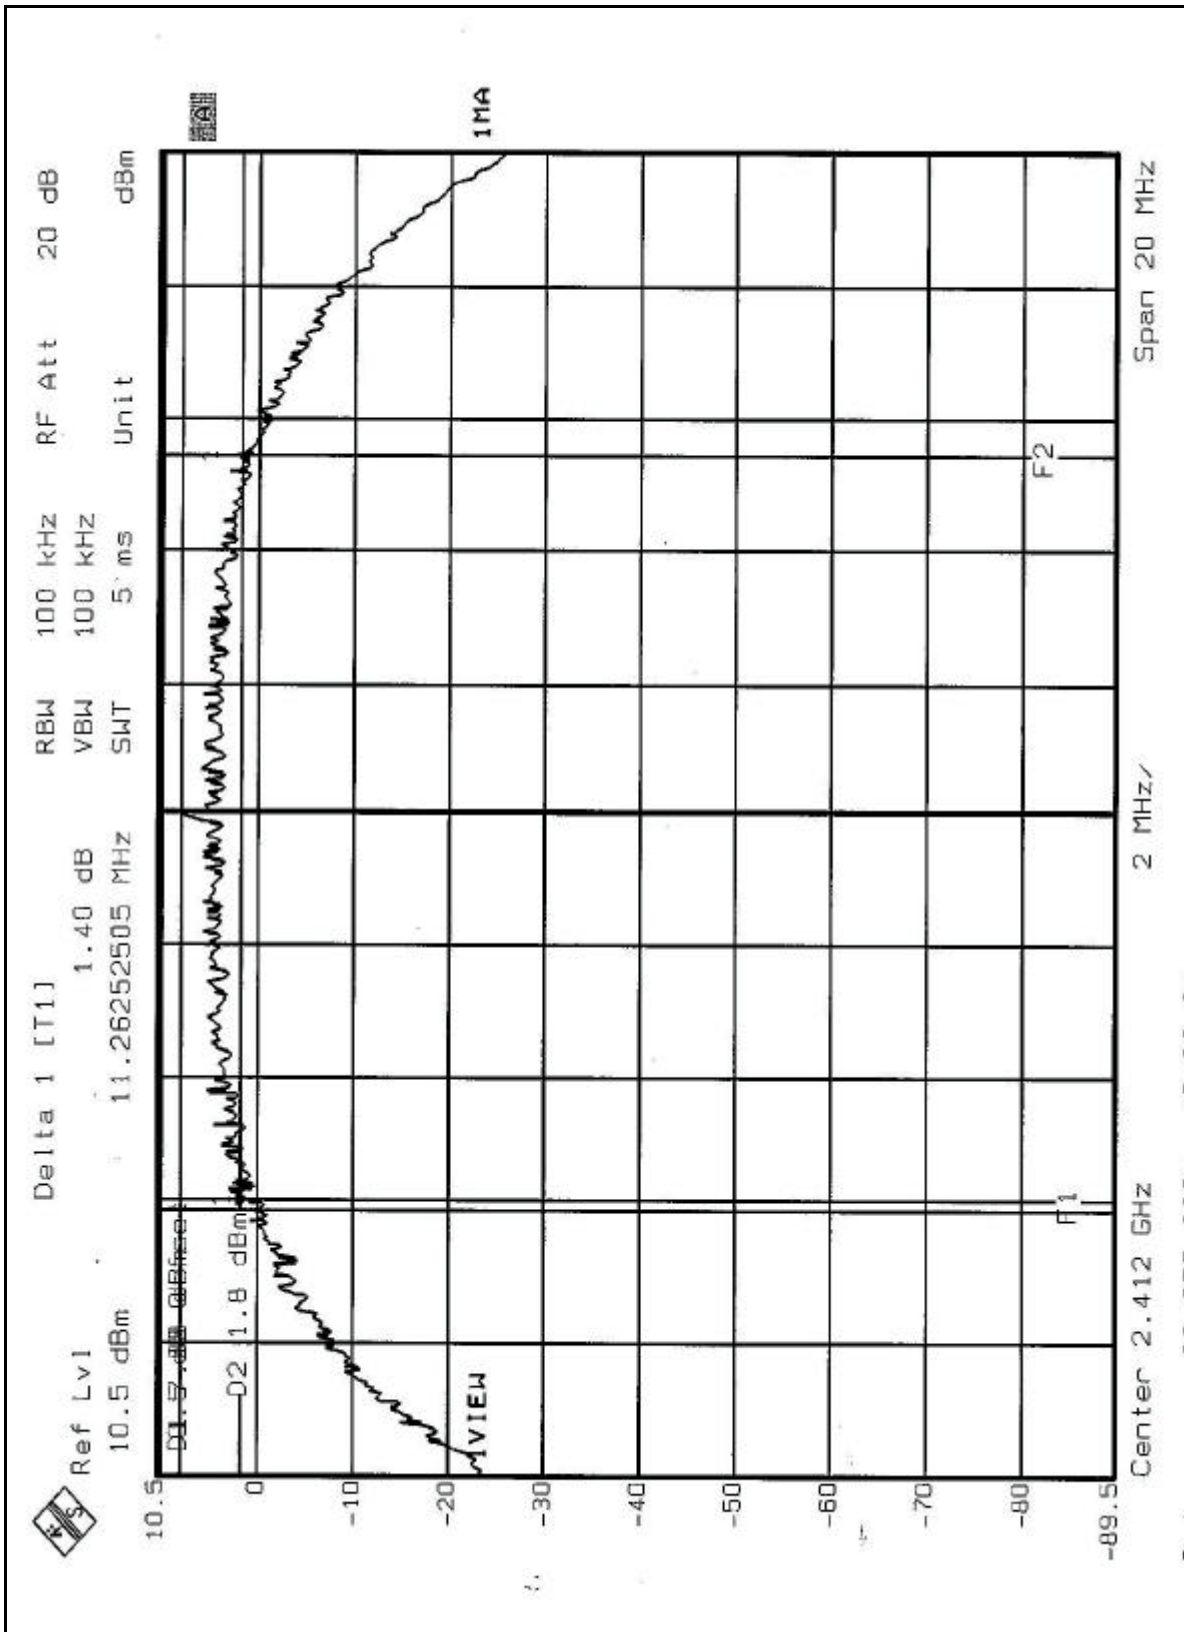

CH6

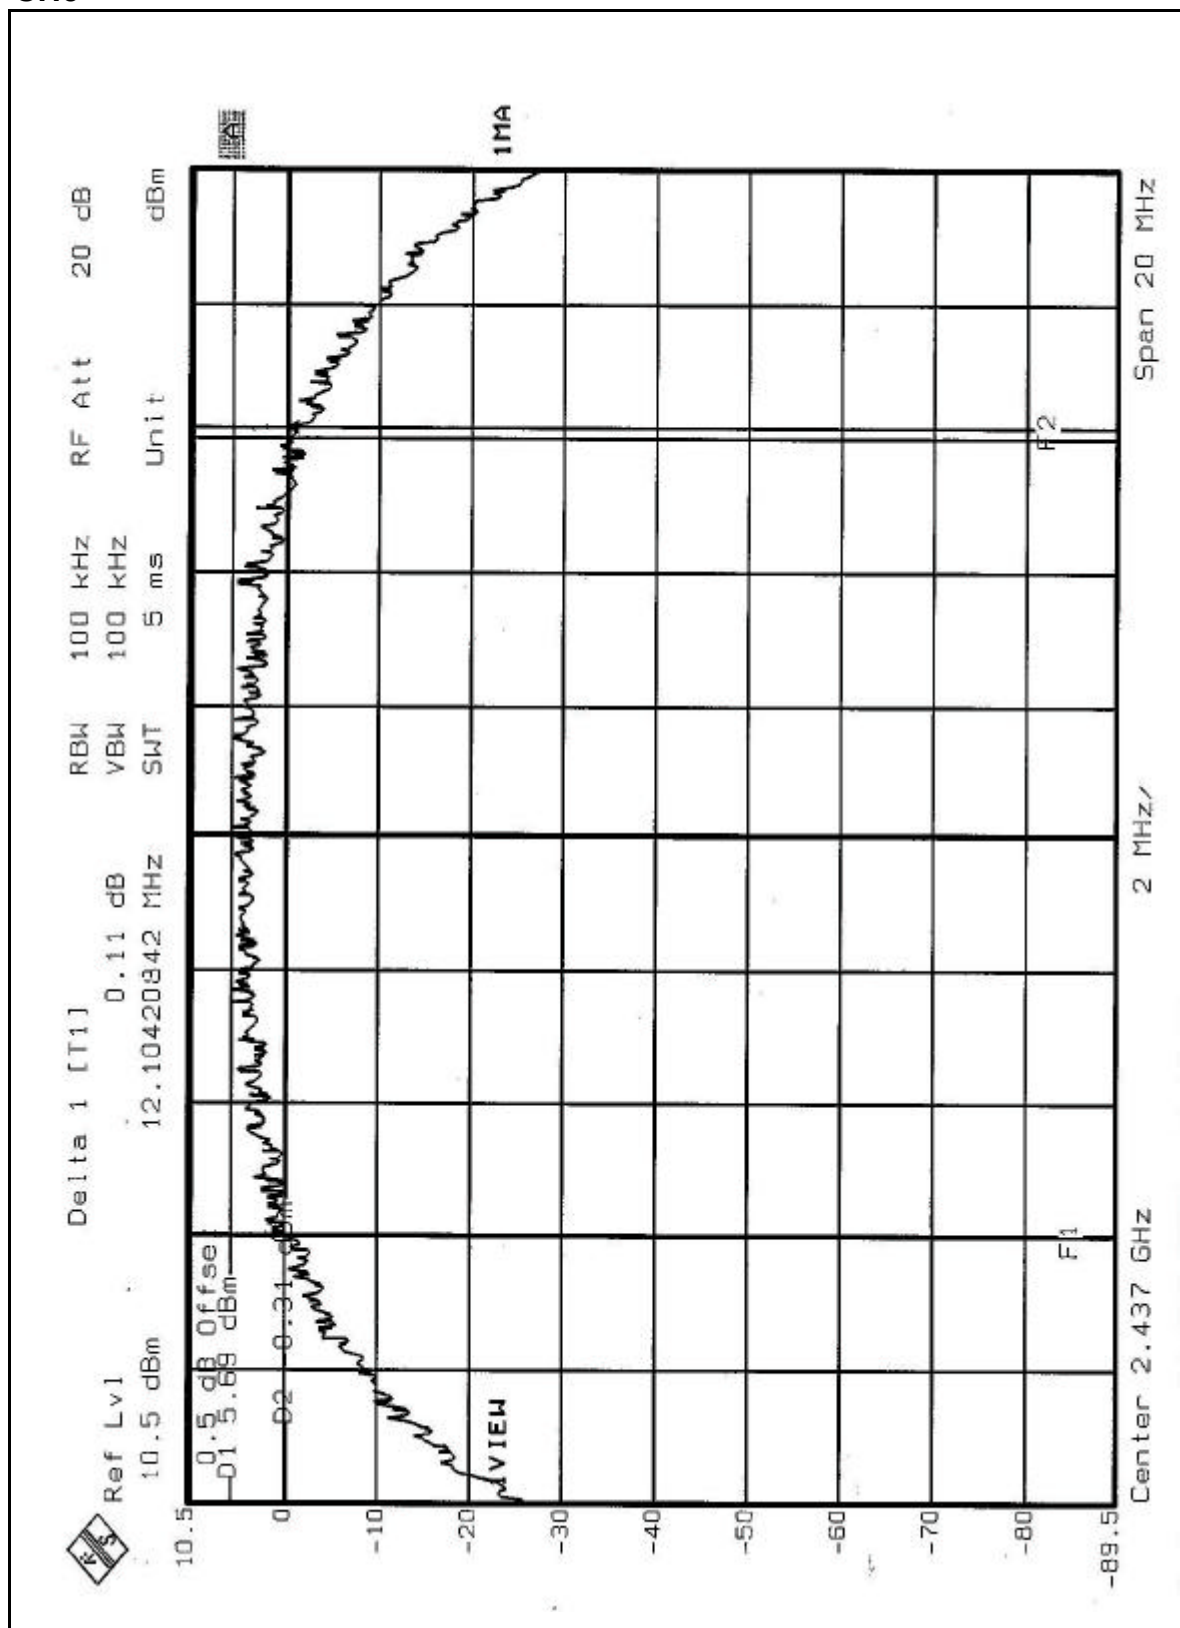

CH11

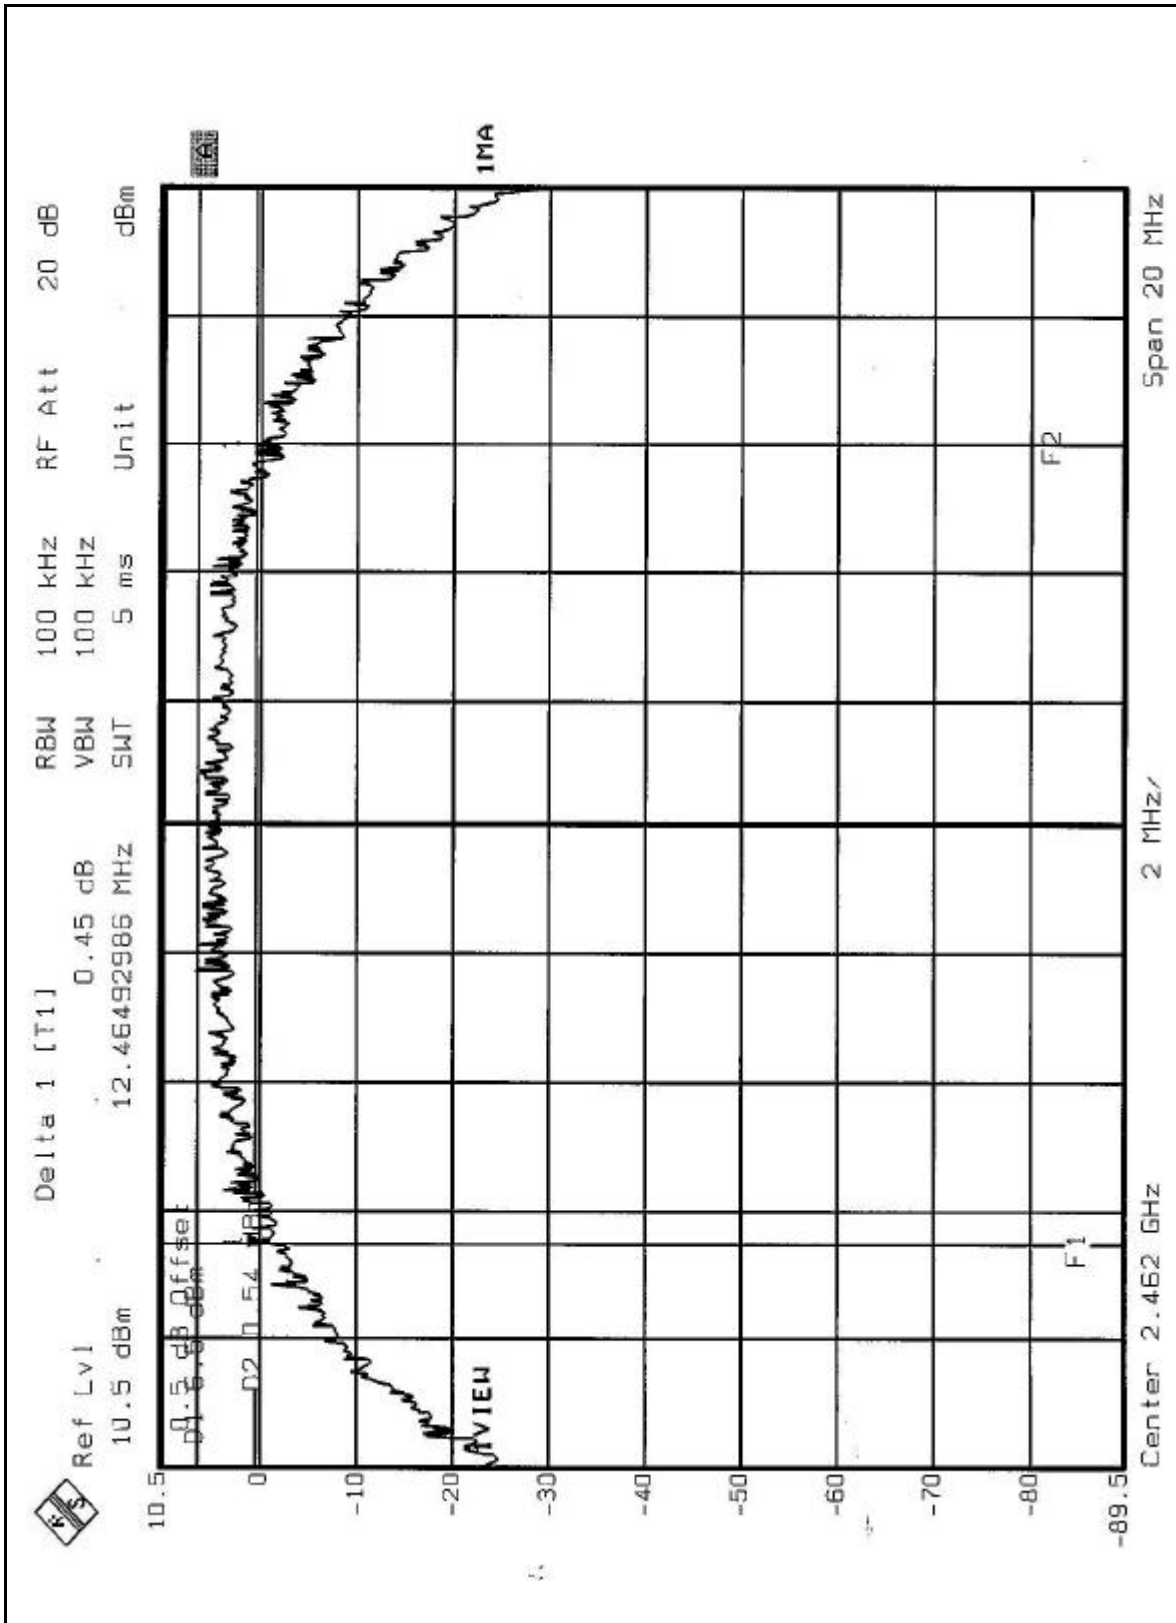


4.3.8 TEST RESULTS (B)


EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.47	0.5	PASS
6	2437	16.35	0.5	PASS
11	2462	16.39	0.5	PASS

CH6

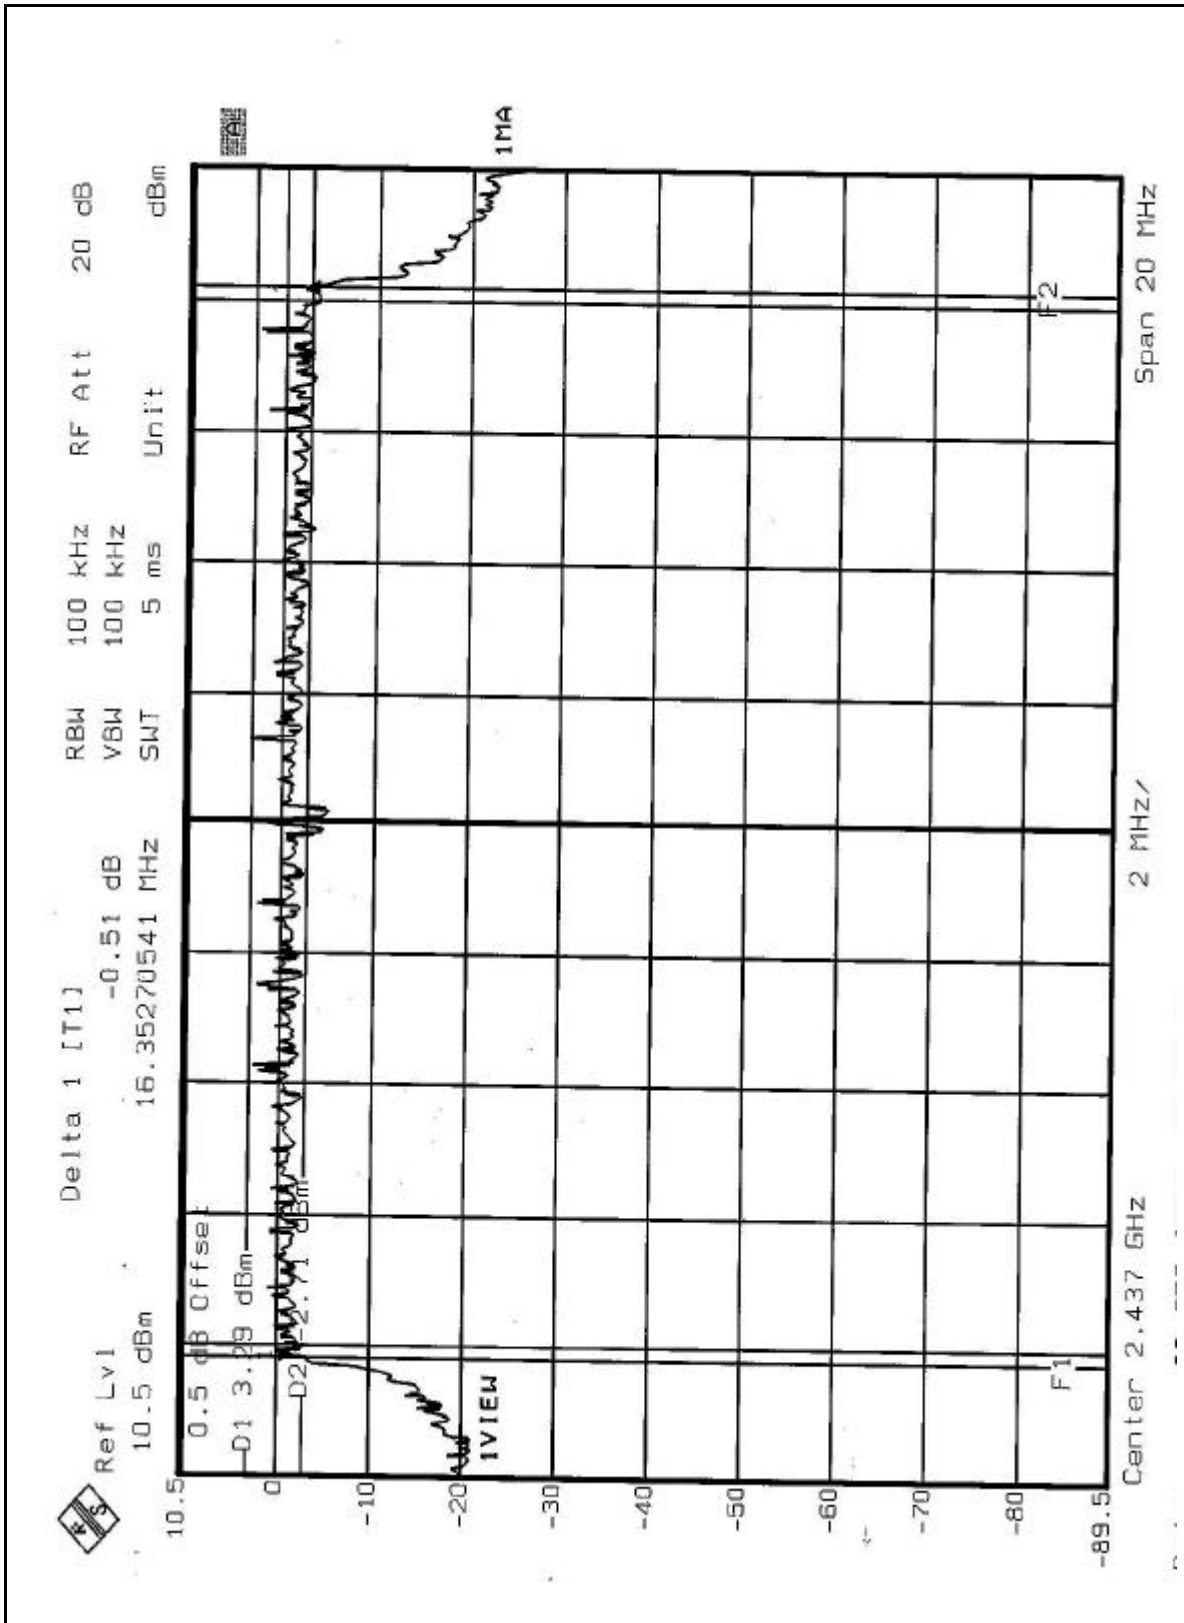

CH11

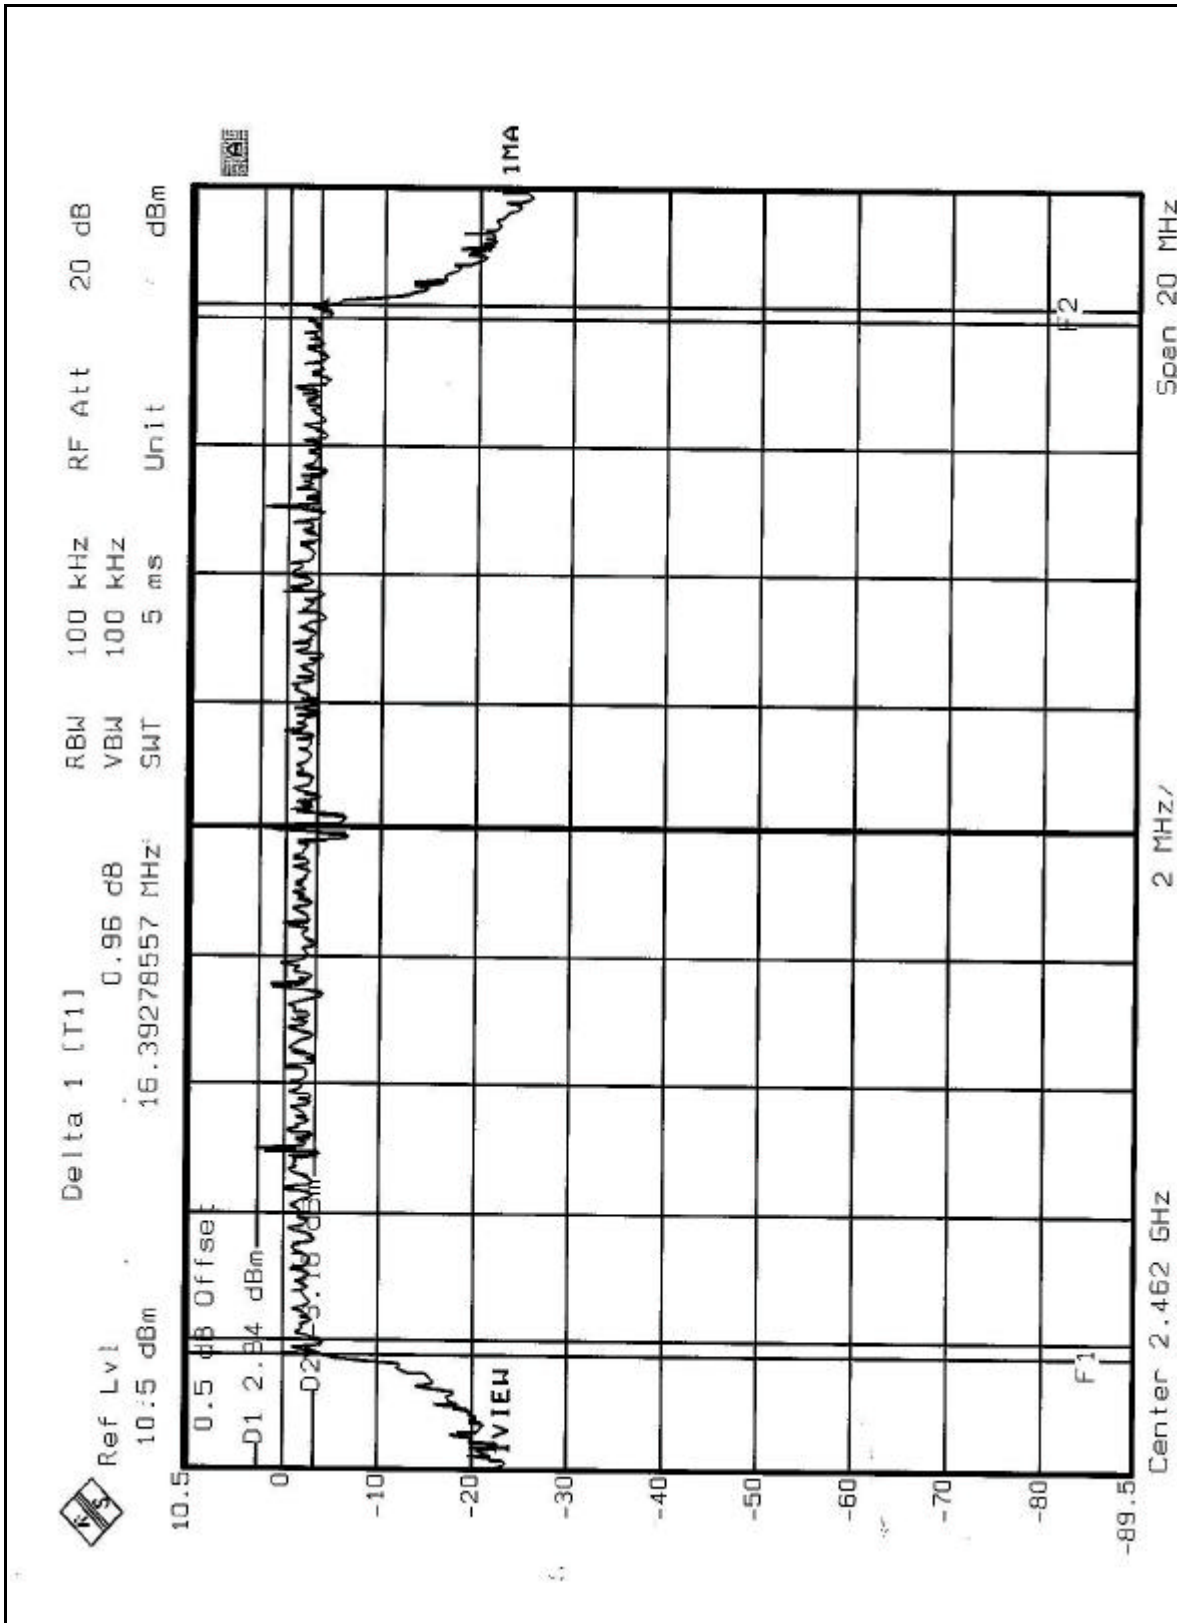

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G. was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS (A)

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	79.799	19.02	30	PASS
6	2437	80.910	19.08	30	PASS
11	2462	79.433	19.00	30	PASS



4.4.8 TEST RESULTS (B)

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	40.087	16.03	30	PASS
6	2437	79.799	19.02	30	PASS
11	2462	79.433	19.00	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6

4.5.7 TEST RESULTS (A)

EUT	Dell Wireless 4350 Small Network Access Point	MODEL	WAPA-118GD
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa
TESTED BY	Leo Hung		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-0.58	8	PASS
6	2437	-0.94	8	PASS
11	2462	-0.23	8	PASS

Marker 1 [T1]
 Ref Lvl 10.5 dBm
 Center 2.41201718 GHz
 Span 1.5 MHz
 RBW 3 kHz
 VBW 30 kHz
 SWT 500 s
 Unit dBm
 0.5 dB Offset
 1V1EW
 1MA