


# FCC Test Report

**Equipment** : Wireless 450N Dual Band USB Adapter  
**Brand Name** : EDIMAX  
**Model No.** : EW-7733UND / GWU-H733Und / EW-7733UnD  
**FCC ID** : NDD9577331111  
**Standard** : 47 CFR FCC Part 15.407  
**Operating Band** : 5150 MHz – 5250 MHz  
5725 MHz – 5850 MHz  
**FCC Classification** : UNII  
**Applicant** : EDIMAX TECHNOLOGY CO., LTD.  
**Manufacturer** : No.3,Wu-Chuan 3rd Road,Wu-Ku Industrial Park,  
New Taipei City, Taiwan

The product sample received on Jul. 05, 2011 and completely tested on Mar. 29, 2016.  
The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Kevin Liang / Assistant Manager



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Support Equipment.....	8
1.3	Testing Applied Standards .....	8
1.4	Testing Location Information .....	8
1.5	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION OF EUT.....</b>	<b>10</b>
2.1	The Worst Case Modulation Configuration .....	10
2.2	The Worst Case Power Setting Parameter .....	10
2.3	The Worst Case Measurement Configuration.....	11
2.4	Test Setup Diagram .....	12
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>15</b>
3.1	AC Power-line Conducted Emissions .....	15
3.2	Emission Bandwidth .....	18
3.3	RF Output Power.....	21
3.4	Peak Power Spectral Density.....	24
3.5	Transmitter Radiated Bandedge Emissions.....	28
3.6	Transmitter Radiated Unwanted Emissions .....	32
3.7	Frequency Stability.....	69
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>71</b>
<b>APPENDIX A. TEST PHOTOS</b>		
<b>APPENDIX B. PHOTOGRAPHS OF EUT</b>		

## Summary of Test Result

Conformance Test Specifications			
Report Clause	Ref. Std. Clause	Description	Result
1.1.2	15.203	Antenna Requirement	Complied
3.1	15.207	AC Power-line Conducted Emissions	Complied
3.2	15.407(a)	Emission Bandwidth	Complied
3.3	15.407(a)	RF Output Power (Maximum Conducted Output Power)	Complied
3.4	15.407(a)	Peak Power Spectral Density	Complied
3.5	15.407(b)	Transmitter Bandedge Emissions	Complied
3.6	15.407(b)	Transmitter Unwanted Emissions	Complied
3.7	15.407(g)	Frequency Stability	Complied



SPORTON INTERNATIONAL INC.  
TEL : 886-3-327-3456  
FAX : 886-3-327-0973

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information (5150-5250MHz band)					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	RF Output Power (dBm)
5150-5250	a	5180-5240	36-48 [4]	1	11.760
5150-5250	n (HT20)	5180-5240	36-48 [4]	3	15.869
5150-5250	n (HT40)	5190-5230	38-46 [2]	3	15.915
Note 1: RF output power specifies that Maximum Conducted Output Power.					
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.					

RF General Information (5725-5850MHz band)					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	RF Output Power (dBm)
5725-5850	a	5745-5825	149-165 [5]	1	6.090
5725-5850	n (HT20)	5745-5825	149-165 [5]	3	10.129
5725-5850	n (HT40)	5755-5795	151-159 [2]	3	9.933
Note 1: RF output power specifies that Maximum Conducted Output Power.					
Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.					

**1.1.2 Antenna Information**

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	Single power level with corresponding antenna(s).
<input type="checkbox"/>	Multiple power level and corresponding antenna(s).

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	PIFA	4.00
2	Integral	PIFA	4.00
3	Integral	PCB	2.00

Directional Gain (DG) Result					
Transmit Chains No.		1	2	3	-
Maximum G <sub>ANT</sub> (dBi)		4.00	4.00	2.00	-
Modulation Mode	DG (dBi)	N <sub>TX</sub>	N <sub>SS</sub> (Min.)	STBC	Array Gain (dB)
11b	4.00	1	1	-	0
11g	4.00	1	1	-	0
HT20	3.43	3	1	-	0
HT40	3.43	3	1	-	0

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:  
Any transmit signals are correlated, Directional Gain =  $G_{ANT} + 10 \log(N_{TX})$   
All transmit signals are completely uncorrelated, Directional Gain =  $G_{ANT}$

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:  
Any transmit signals are correlated, Directional Gain =  $10 \log[(10^{G_{1/20}} + \dots + 10^{G_{N/20}})^2 / N_{TX}]$   
All transmit signals are completely uncorrelated, Directional Gain =  $10 \log[(10^{G_{1/10}} + \dots + 10^{G_{N/10}}) / N_{TX}]$

Note 3: For Spatial Multiplexing, Directional Gain (DG) =  $G_{ANT} + 10 \log(N_{TX}/N_{SS})$ ,  
where N<sub>ss</sub> = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:  
Directional Gain (DG) =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows:  
Array Gain = 0 dB (i.e., no array gain) for  $N_{TX} \leq 4$ ;  
Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{TX}$ ;

**1.1.3 Type of EUT**

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

**1.1.4 Test Signal Duty Cycle**

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100.00% - IEEE 802.11a	0.00
<input checked="" type="checkbox"/> 100.00% - IEEE 802.11n (HT20)	0.00
<input checked="" type="checkbox"/> 100.00% - IEEE 802.11n (HT40)	0.00

**1.1.5 EUT Operational Condition**

<b>Supply Voltage</b>	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	<input type="checkbox"/>
<b>Type of DC Source</b>	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> System	<input type="checkbox"/> External DC adapter

## 1.2 Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	PP20L	DoC
2	(USB) Mouse	Microsoft	1004	N/A
3	iPod nano	Apple	A1199	N/A
4	AP (Remote Workstation)	D-Link	DNS-G120	DoC

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5540	DoC
2	AC Adapter for Notebook	DELL	HA65NM130	DoC

Support Equipment - Radiation Emissions				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5540-05	DoC
2	AC Adapter for Notebook	DELL	LA65NS2-01	DoC

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ FCC KDB 789033 D02 v01r02
- ◆ FCC KDB 644545 D03 v01
- ◆ FCC-14-30A1-UNII

## 1.4 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.	
		TEL : 886-3-327-3456      FAX : 886-3-327-0973	
Test site registered number [636805] with FCC.			
Test Condition	Test Site No.	Test Engineer	Test Environment
AC Conduction	CO04-HY	Jason	26.1°C / 56.8%
RF Conducted	TH06-HY	Jeremy	22.1°C / 61%
Radiated Emission	03CH03-HY	Jeff	22.3°C / 51%



## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		±2.26 dB
Emission bandwidth, 26dB bandwidth		±1.42 %
RF output power, conducted		±0.63 dB
Power density, conducted		±0.81 dB
Unwanted emissions, conducted	9 – 150 kHz	±0.38 dB
	0.15 – 30 MHz	±0.42 dB
	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.49 dB
	0.15 – 30 MHz	±2.28 dB
	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.42 %
Duty Cycle		±1.42 %

## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS	Worst Data Rate / MCS
11a,6-54Mbps	1	6-54Mbps	6 Mbps
HT20,M16-23	3	M16-23	M16
HT40,M16-23	3	M16-23	M16

### 2.2 The Worst Case Power Setting Parameter







The Worst Case Power Setting Parameter (5150-5250MHz band)						
Test Software/Version	Ralink QA_ 3573					
Modulation Mode	N <sub>TX</sub>	Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5180	5200	5240	5190	5230
11a,6-54Mbps	1	1F	1F	1F	-	-
HT20,M16-23	3	1F,1F,1F	1F,1F,1F	1F,1F,1F	-	-
HT40,M16-23	3	-	-	-	1D,1D,1D	1F,1F,1F

The Worst Case Power Setting Parameter (5725-5850MHz band)						
Test Software Version	Ralink QA_ 3573					
Modulation Mode	N <sub>TX</sub>	Test Frequency (MHz)				
		NCB: 20MHz			NCB: 40MHz	
		5745	5785	5825	5755	5795
11a,6-54Mbps	1	10	11	11	-	-
HT20,M16-23	3	0F,0F,0F	0F,0F,0F	11,11,11	-	-
HT40,M16-23	3	-	-	-	10,10,10	10,10,10


## 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	AC power & Radio link


The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	RF Output Power, Peak Power Spectral Density, Emission Bandwidth, Peak Excursion
<b>Test Condition</b>	Conducted measurement at transmit chains
<b>Modulation Mode</b>	11a, HT20, HT40

The Worst Case Mode for Following Conformance Tests			
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
<b>User Position</b>	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed three orthogonal planes.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes.		
<b>Operating Mode</b>	<input checked="" type="checkbox"/> AC power & Transmitter		
<b>Modulation Mode</b>	11a, HT20, HT40		
<b>Orthogonal Planes of EUT</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			
<b>Worst Planes of EUT</b>	V		
<b>Orthogonal Planes of Antenna</b>	<b>X Plane</b>	<b>Y Plane</b>	<b>Z Plane</b>
			
<b>Worst Planes of Antenna</b>			V


## 2.4 Test Setup Diagram

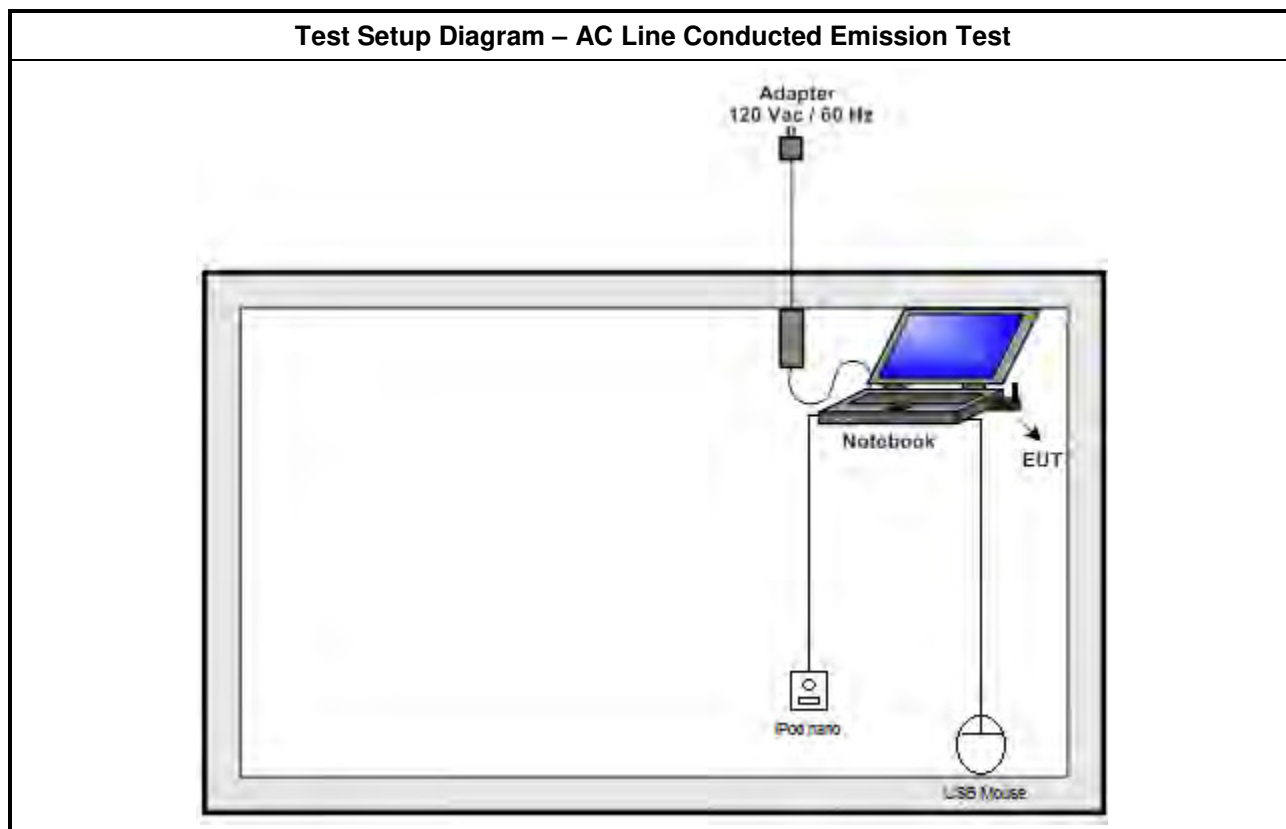


**Test Setup Diagram - Radiated Emission(5150-5250MHz band)  
For radiated emissions 9kHz~1GHz**

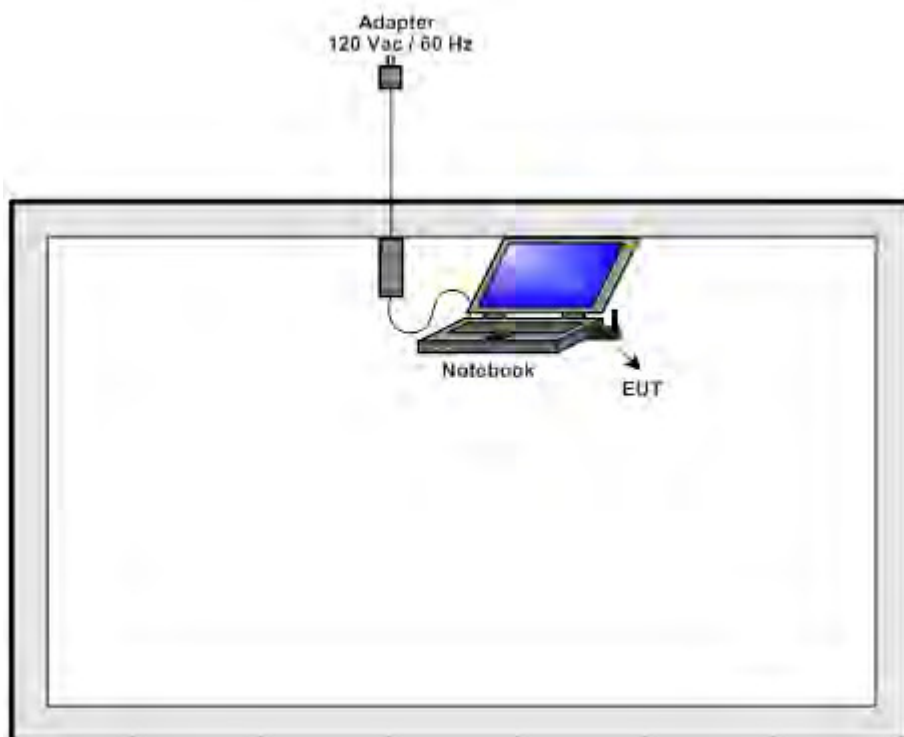

**Test Setup Diagram - Radiated Emission(5150-5250MHz band)  
For radiated emissions above 1GHz**

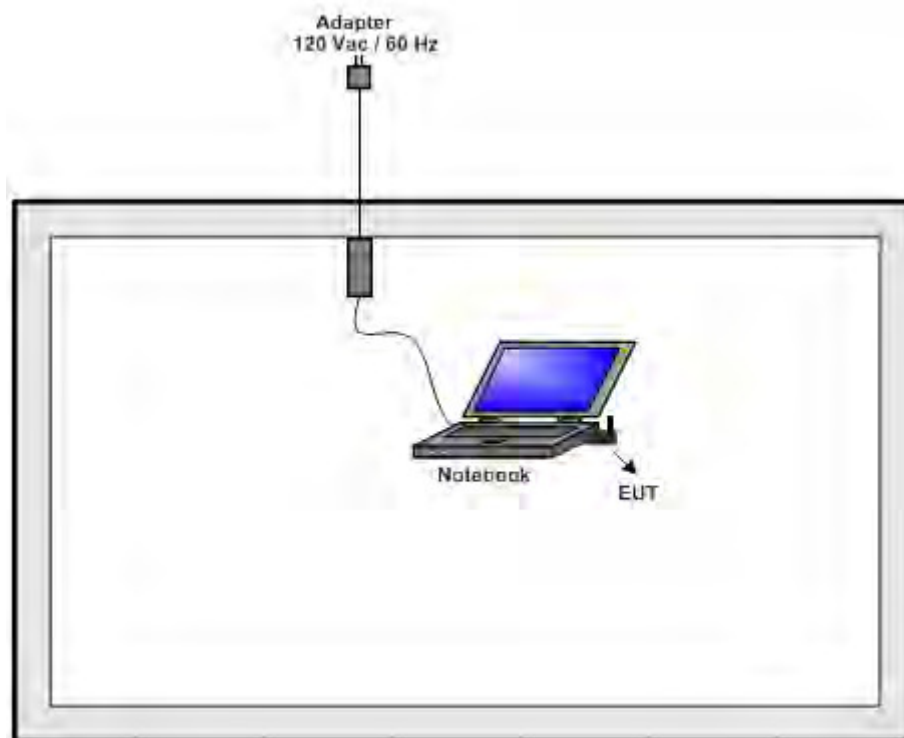

**Test Setup Diagram - Radiated Emission(5725-5850MHz band)**

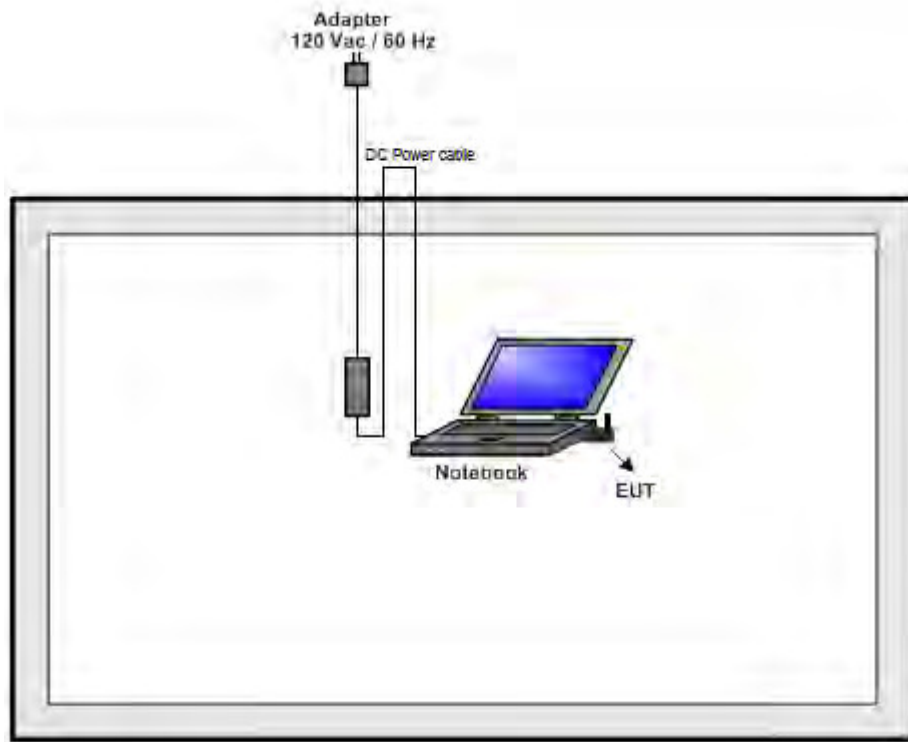

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

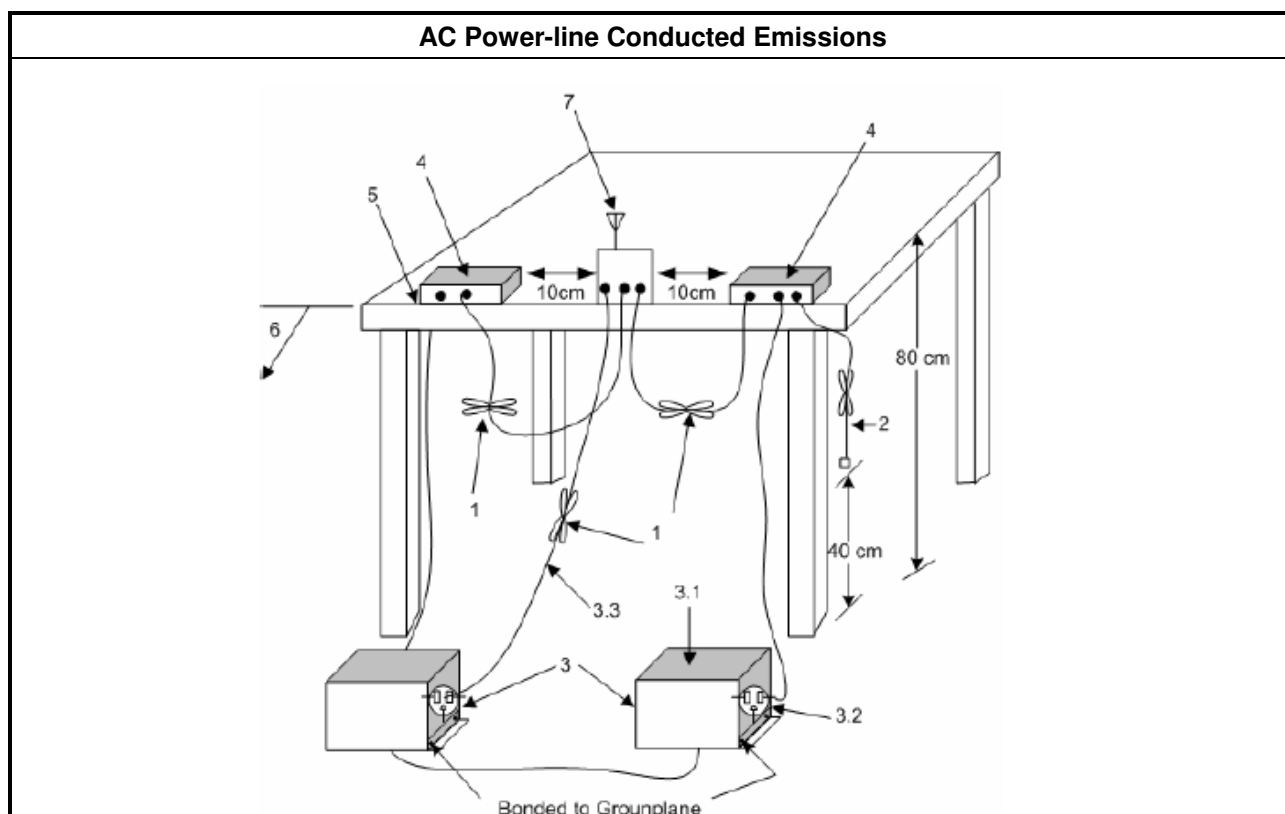


### 3.1.5 Test Result of AC Power-line Conducted Emissions

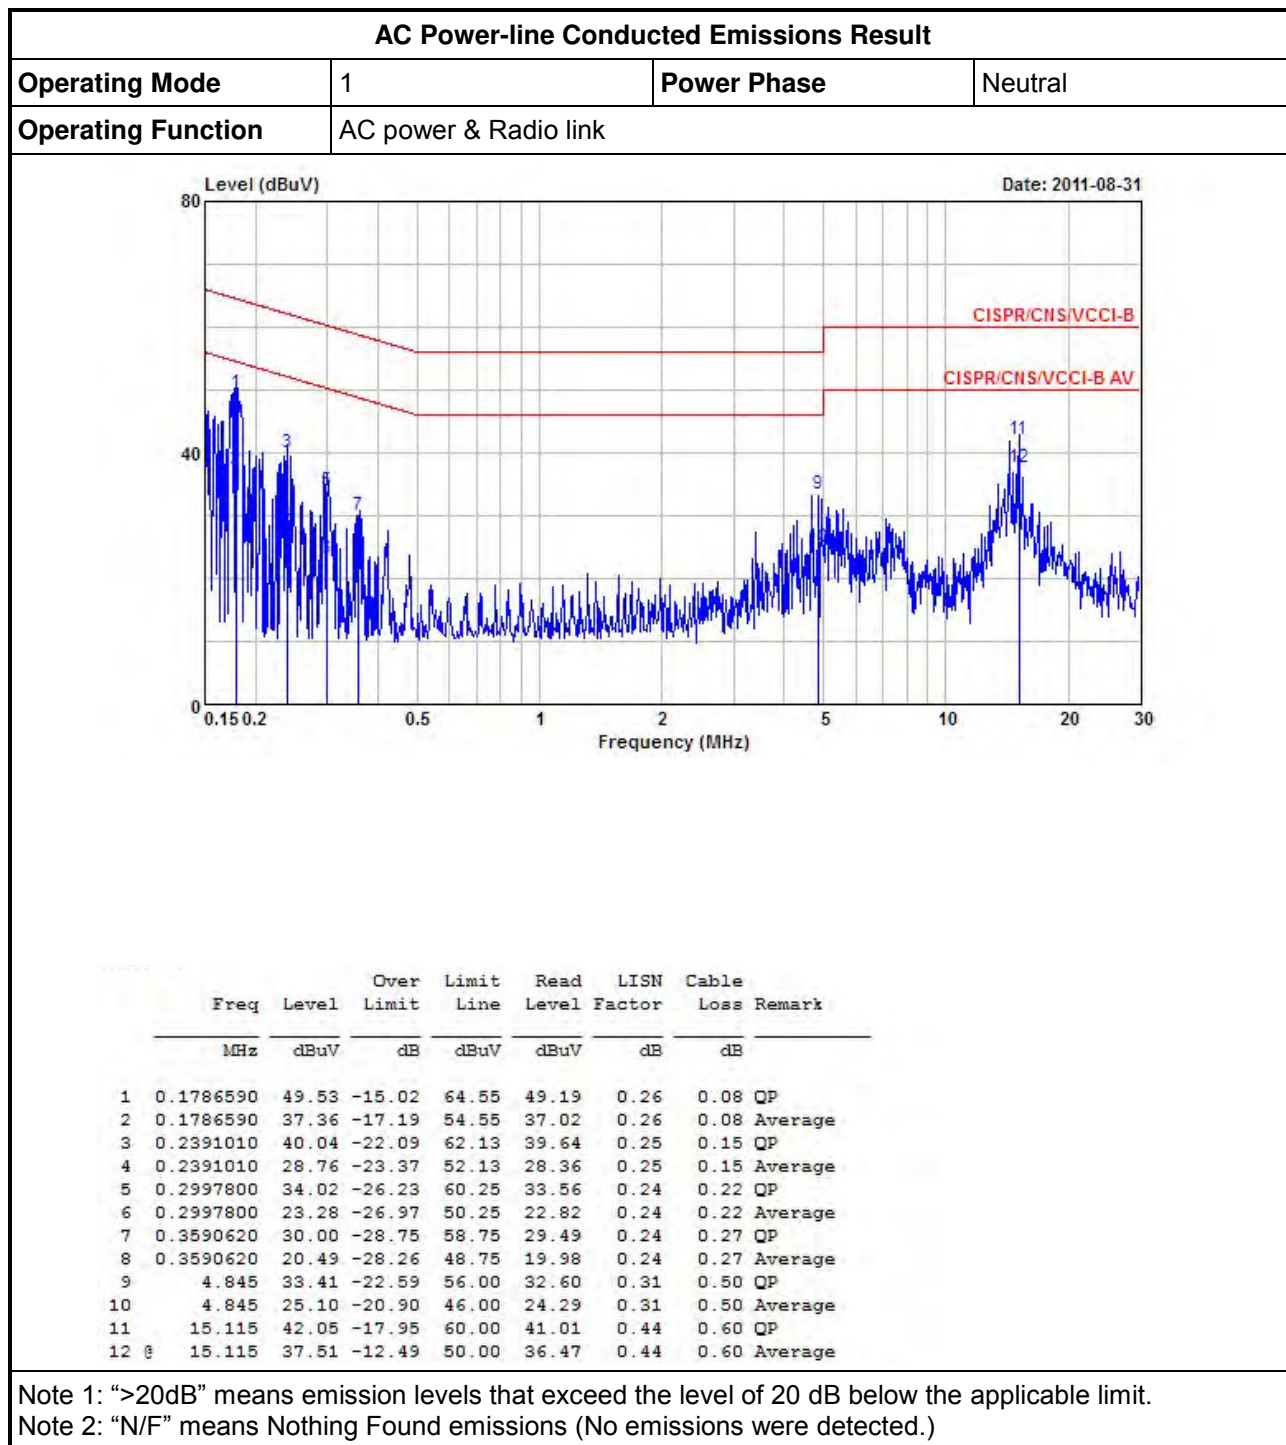



**AC Power-line Conducted Emissions Result**

Operating Mode	1	Power Phase	Line
Operating Function	AC power & Radio link		

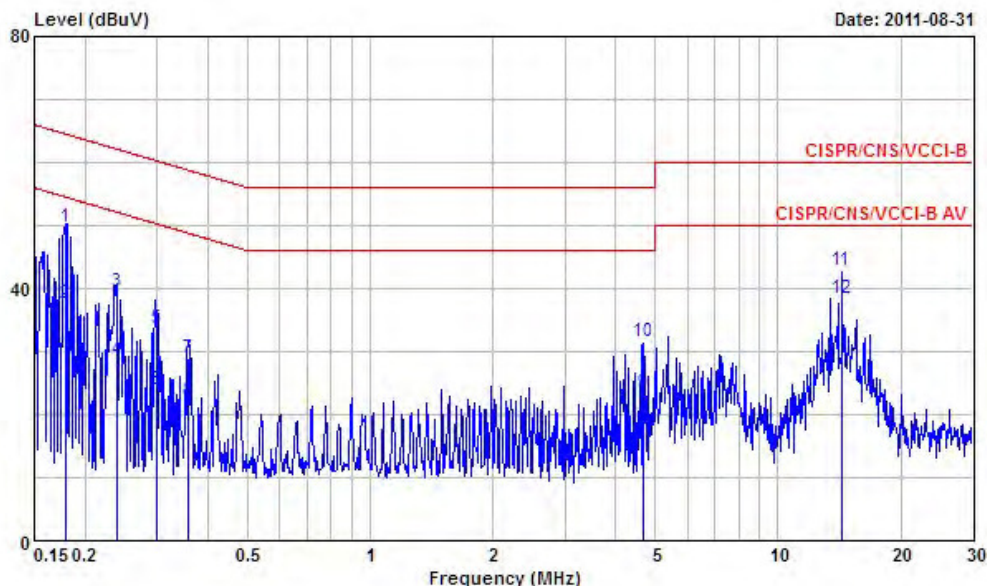

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1786590	49.61	-14.94	64.55	49.23	0.30	0.08	QP
2	0.1786590	37.53	-17.02	54.55	37.15	0.30	0.08	Average
3	0.2403720	39.44	-22.64	62.08	38.99	0.30	0.15	QP
4	0.2403720	28.63	-23.45	52.08	28.18	0.30	0.15	Average
5	0.2989200	33.69	-26.58	60.27	33.17	0.30	0.22	QP
6	0.2989200	24.07	-26.20	50.27	23.55	0.30	0.22	Average
7	0.3576520	28.82	-29.96	58.78	28.25	0.30	0.27	QP
8	0.3576520	22.05	-26.73	48.78	21.48	0.30	0.27	Average
9	4.665	23.42	-22.58	46.00	22.56	0.36	0.50	Average
10	4.665	31.59	-24.41	56.00	30.73	0.36	0.50	QP
11	14.300	43.00	-17.00	60.00	41.89	0.52	0.59	QP
12	14.300	38.35	-11.65	50.00	37.24	0.52	0.59	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth (EBW) Limit

Emission Bandwidth Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
<input checked="" type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 6.6 for bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain port 1.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/>	Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/>	Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

### 3.2.4 Test Setup

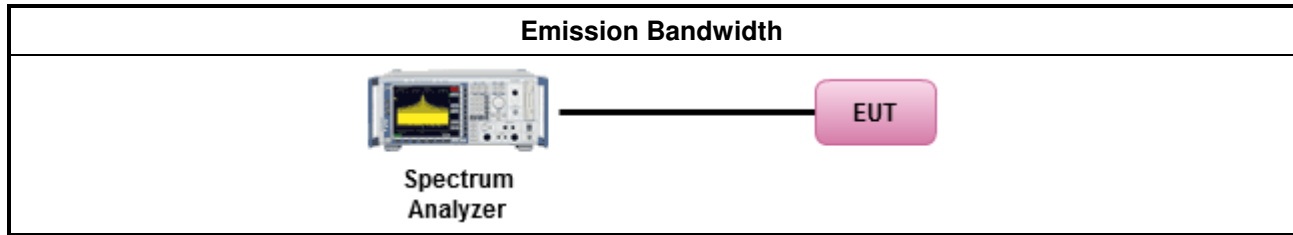


### 3.2.5 Test Result of Emission Bandwidth

UNII Emission Bandwidth Result (5150-5250MHz band)								
Condition			Emission Bandwidth (MHz)					
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Bandwidth			26dB Bandwidth		
			Chain- Port 1	Chain- Port 2	Chain- Port 3	Chain- Port 1	Chain- Port 2	Chain- Port 3
11a	1	5180	17.00	-	-	24.20	-	-
11a	1	5200	17.10	-	-	25.10	-	-
11a	1	5240	17.10	-	-	24.80	-	-
HT20	3	5180	17.70	17.60	17.70	20.80	20.00	22.10
HT20	3	5200	17.70	17.60	17.80	20.50	20.00	22.50
HT20	3	5240	17.70	17.60	17.70	20.30	20.20	22.00
HT40	3	5190	36.00	36.00	36.00	40.00	40.00	40.60
HT40	3	5230	36.00	36.00	36.20	40.00	40.00	46.80
<b>Result</b>			<b>Complied</b>					

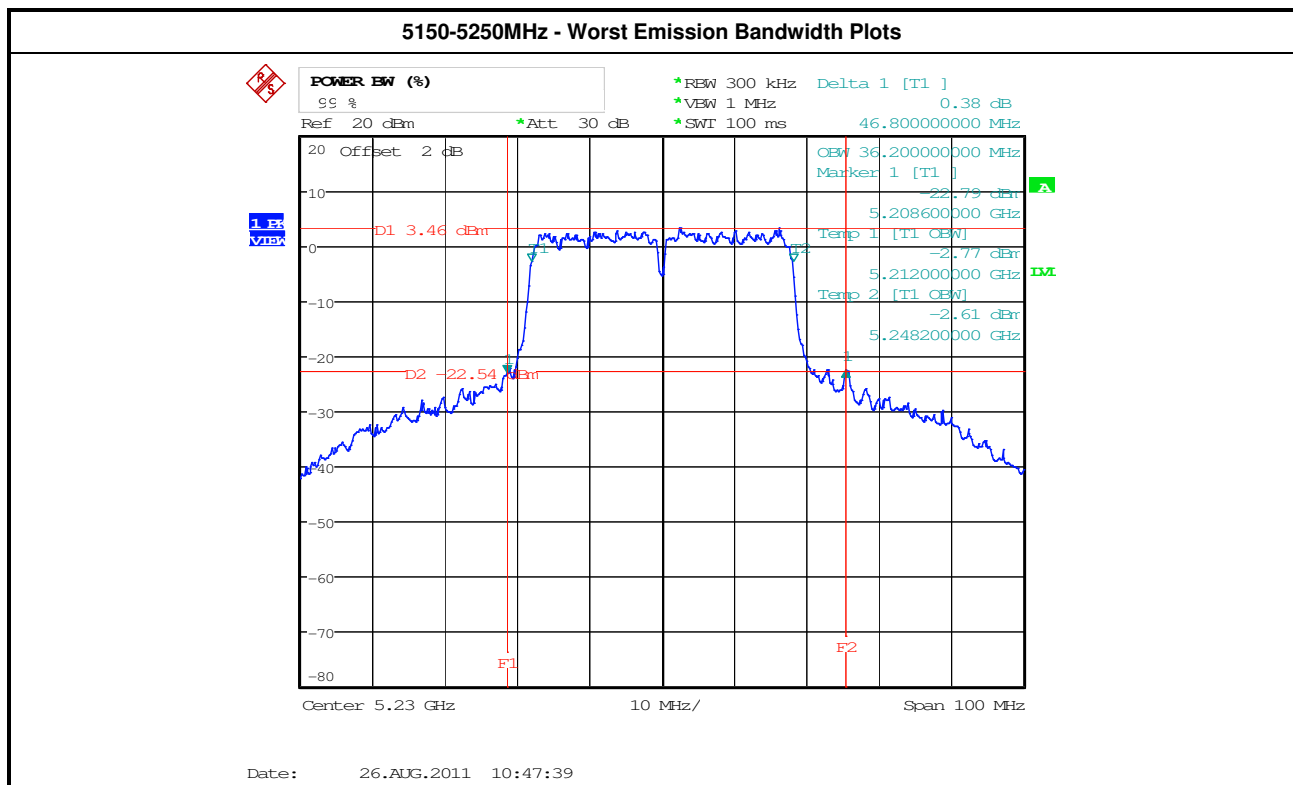

UNII Emission Bandwidth Result (5725-5850MHz band)								
Condition			Emission Bandwidth (MHz)					
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Bandwidth			6dB Bandwidth		
			Chain- Port 1	Chain- Port 2	Chain- Port 3	Chain- Port 1	Chain- Port 2	Chain- Port 3
11a	1	5745	16.31	-	-	16.38	-	-
11a	1	5785	16.31	-	-	16.38	-	-
11a	1	5825	16.35	-	-	16.39	-	-
HT20	3	5745	17.43	17.42	17.43	17.35	17.29	17.55
HT20	3	5785	17.42	17.48	17.45	17.53	17.56	17.55
HT20	3	5825	17.36	17.48	17.45	17.32	17.55	17.55
HT40	3	5755	35.62	35.54	35.58	35.40	35.40	34.84
HT40	3	5795	35.62	35.62	35.66	35.40	35.04	34.96
<b>Result</b>			<b>Complied</b>					

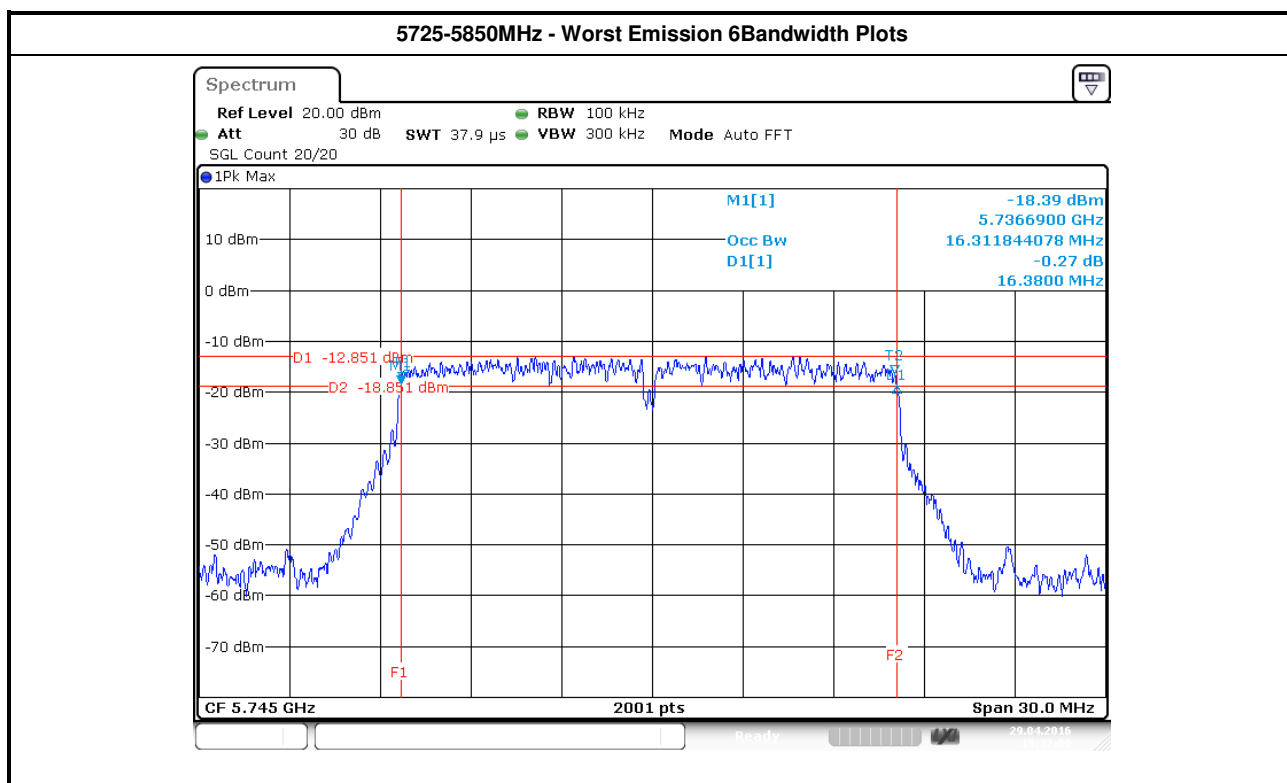

### 3.3 RF Output Power

#### 3.3.1 RF Output Power Limit

Maximum Conducted Output Power Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	Outdoor AP: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ . e.i.r.p. at any elevation angle above 30 degrees $\leq 125$ mW [21dBm]
<input checked="" type="checkbox"/>	Indoor AP: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
<input type="checkbox"/>	Point-to-point AP: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$ .
<input type="checkbox"/>	Mobile or Portable Client: the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .
<input type="checkbox"/> For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .	
<input type="checkbox"/> For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ .
<input type="checkbox"/>	Point-to-point systems (P2P): the maximum conducted output power ( $P_{Out}$ ) shall not exceed the lesser of 1 W.
$P_{Out}$ = maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Conducted Output Power
	[duty cycle $\geq 98\%$ or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle $< 98\%$ and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method PM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain port 1.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

### 3.3.4 Test Setup

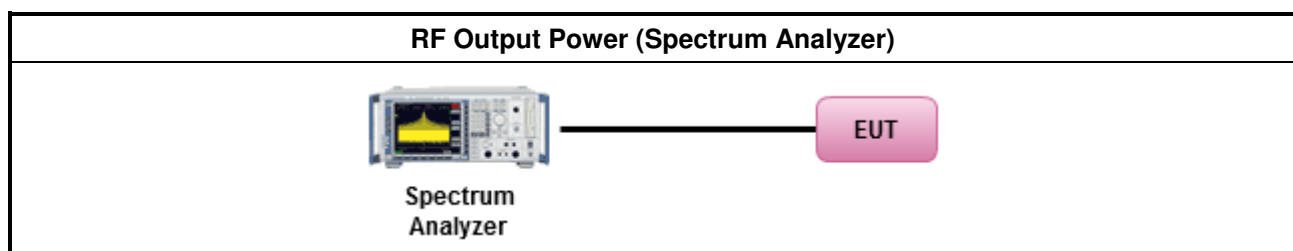


### 3.3.5 Test Result of Maximum Conducted Output Power

Maximum Conducted (Average) Output Power (5150-5250MHz band)								
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Output Power (dBm)				Antenna Gain (dBi)	Power Limit
			Chain Port 1	Chain Port 1	Chain Port 1	Sum Chain		
11a	1	5180	11.57	-	-	11.57	4.00	24.00
11a	1	5200	11.76	-	-	11.76	4.00	24.00
11a	1	5240	11.65	-	-	11.65	4.00	24.00
HT20	3	5180	11.12	10.97	10.79	15.73	3.43	24.00
HT20	3	5200	10.78	11.58	10.89	15.87	3.43	24.00
HT20	3	5240	10.74	11.47	10.45	15.68	3.43	24.00
HT40	3	5190	10.54	11.24	11.44	15.86	3.43	24.00
HT40	3	5230	10.39	11.36	11.59	15.91	3.43	24.00
<b>Result</b>			<b>Complied</b>					

Maximum Conducted (Average) Output Power (5725-5850MHz band)								
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Output Power (dBm)				Antenna Gain (dBi)	Power Limit
			Chain Port 1	Chain Port 1	Chain Port 1	Sum Chain		
11a	1	5745	6.09	-	-	6.09	4.00	30.00
11a	1	5785	5.60	-	-	5.60	4.00	30.00
11a	1	5825	5.51	-	-	5.51	4.00	30.00
HT20	3	5745	6.59	4.93	4.20	10.13	3.43	30.00
HT20	3	5785	6.00	4.34	4.19	9.69	3.43	30.00
HT20	3	5825	5.51	3.63	4.09	9.26	3.43	30.00
HT40	1	5755	6.43	4.69	3.99	9.93	3.43	30.00
HT40	3	5795	6.27	3.95	4.09	9.68	3.43	30.00
<b>Result</b>			<b>Complied</b>					

**5725-5850MHz - Worst RF Output Power Plots**

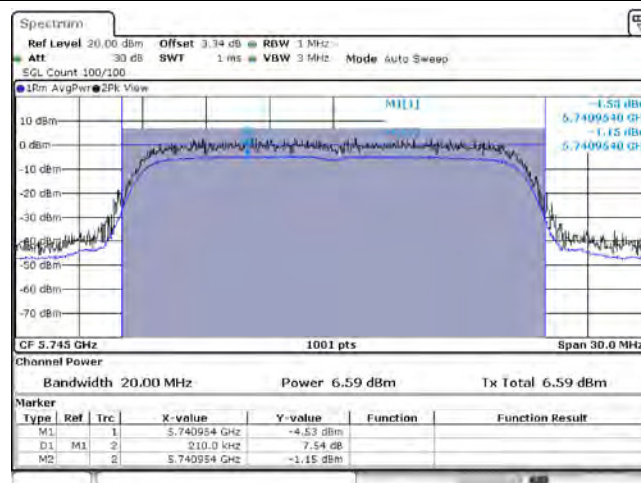

### 3.4 Peak Power Spectral Density

#### 3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$ .
<input checked="" type="checkbox"/>	Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$ .
<input type="checkbox"/>	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$ .
<input type="checkbox"/>	Mobile or Portable Client: the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .
<input type="checkbox"/>	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) $\leq 30$ dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$ .
<input type="checkbox"/>	Point-to-point systems (P2P): the peak power spectral density (PPSD) $\leq 30$ dBm/500kHz.
<b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz <b><math>G_{TX}</math></b> = the maximum transmitting antenna directional gain in dBi.	

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



### 3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth [duty cycle ≥ 98% or external video / power trigger]
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain port 1.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/>	The EUT supports multiple transmit chains using options given below:
<input checked="" type="checkbox"/>	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input type="checkbox"/>	Option 2: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
<input type="checkbox"/>	Each individually PPSD plots refer as test report clause 3.3.5 with each individually PPSD plots.


### 3.4.4 Test Setup

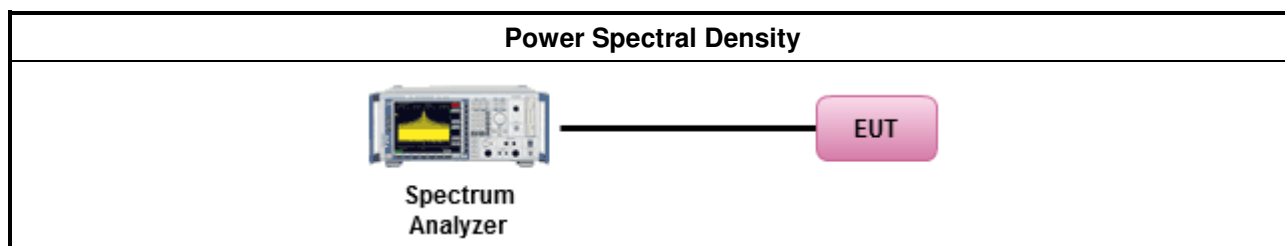

### 3.4.5 Test Result of Peak Power Spectral Density



Peak Power Spectral Density Result (5150-5250MHz band)					
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Peak Power Spectral Density (dBm)	PSD Limit	Antenna Gain (dBi)
11a	1	5180	2.13	11.00	4.00
11a	1	5200	1.14	11.00	4.00
11a	1	5240	0.80	11.00	4.00
HT20	3	5180	3.44	8.80	8.20
HT20	3	5200	3.77	8.80	8.20
HT20	3	5240	3.18	8.80	8.20
HT40	3	5190	2.69	8.80	8.20
HT40	3	5230	2.86	8.80	8.20
<b>Result</b>			<b>Complied</b>		

Peak Power Spectral Density Result (5725-5850MHz band)					
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Peak Power Spectral Density (dBm/500kHz)	PSD Limit	Antenna Gain (dBi)
11a	1	5745	-6.24	30.00	4.00
11a	1	5785	-5.80	30.00	4.00
11a	1	5825	-5.93	30.00	4.00
HT20	3	5745	-1.82	27.80	8.20
HT20	3	5785	-3.38	27.80	8.20
HT20	3	5825	-3.70	27.80	8.20
HT40	3	5755	-5.32	27.80	8.20
HT40	3	5795	-4.43	27.80	8.20
<b>Result</b>			<b>Complied</b>		

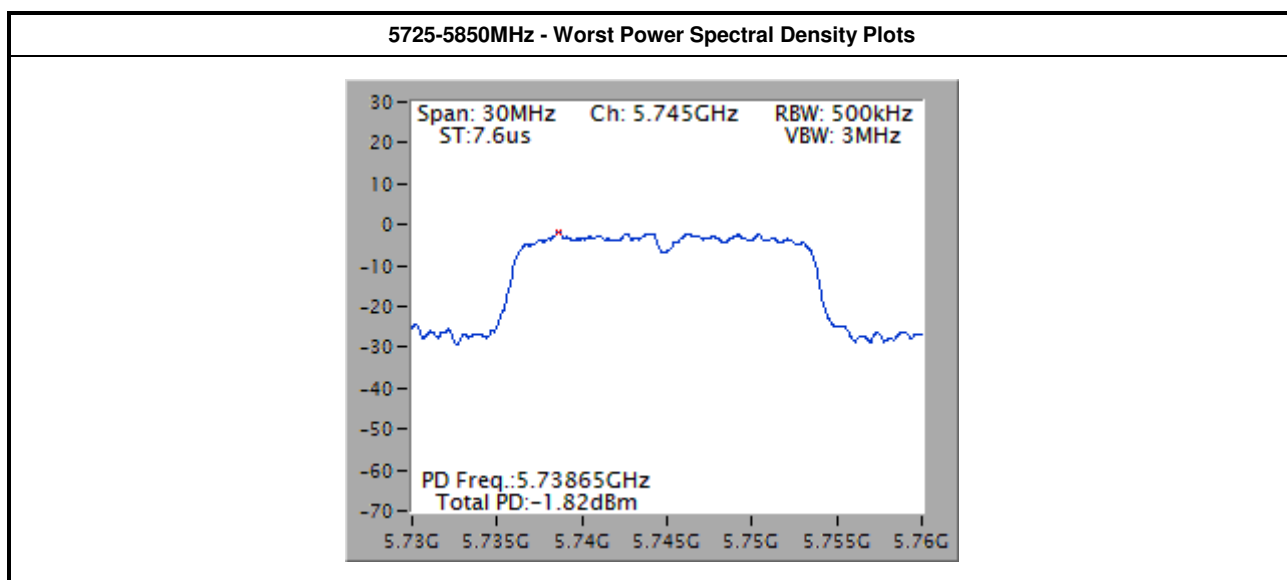

### 3.5 Transmitter Radiated Bandedge Emissions

#### 3.5.1 Transmitter Radiated Bandedge Emissions Limit

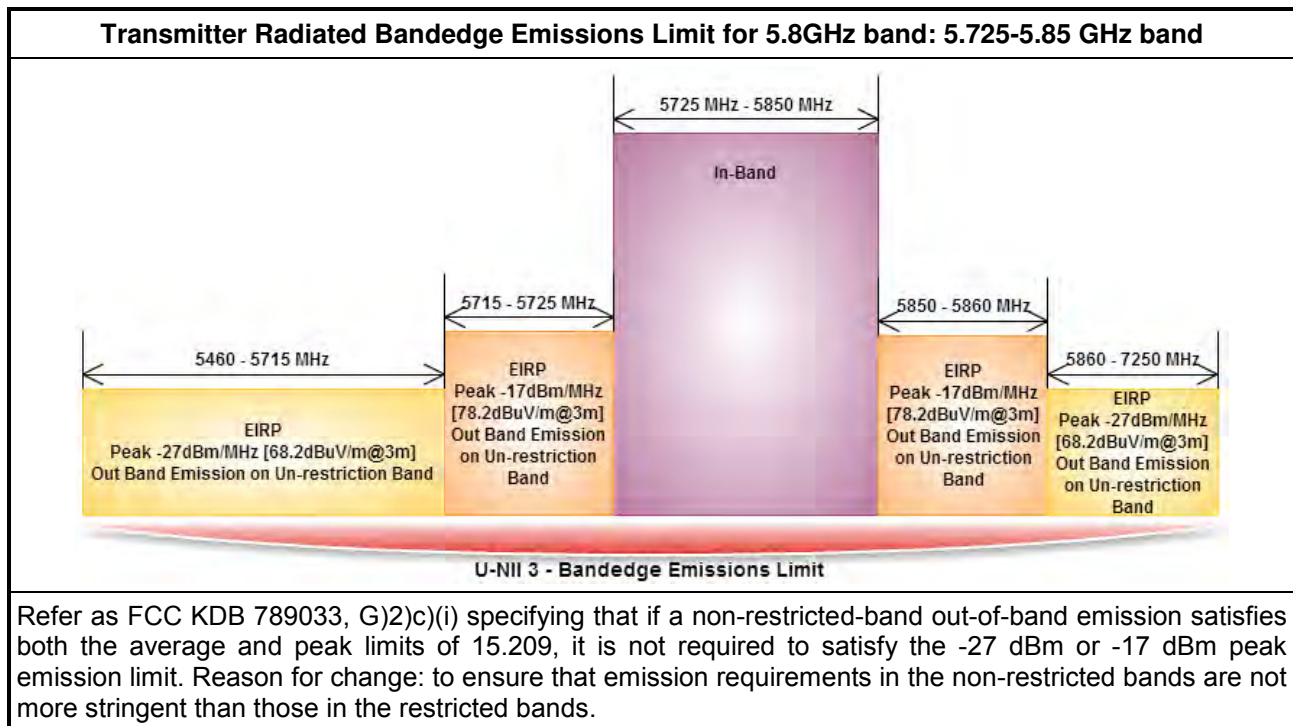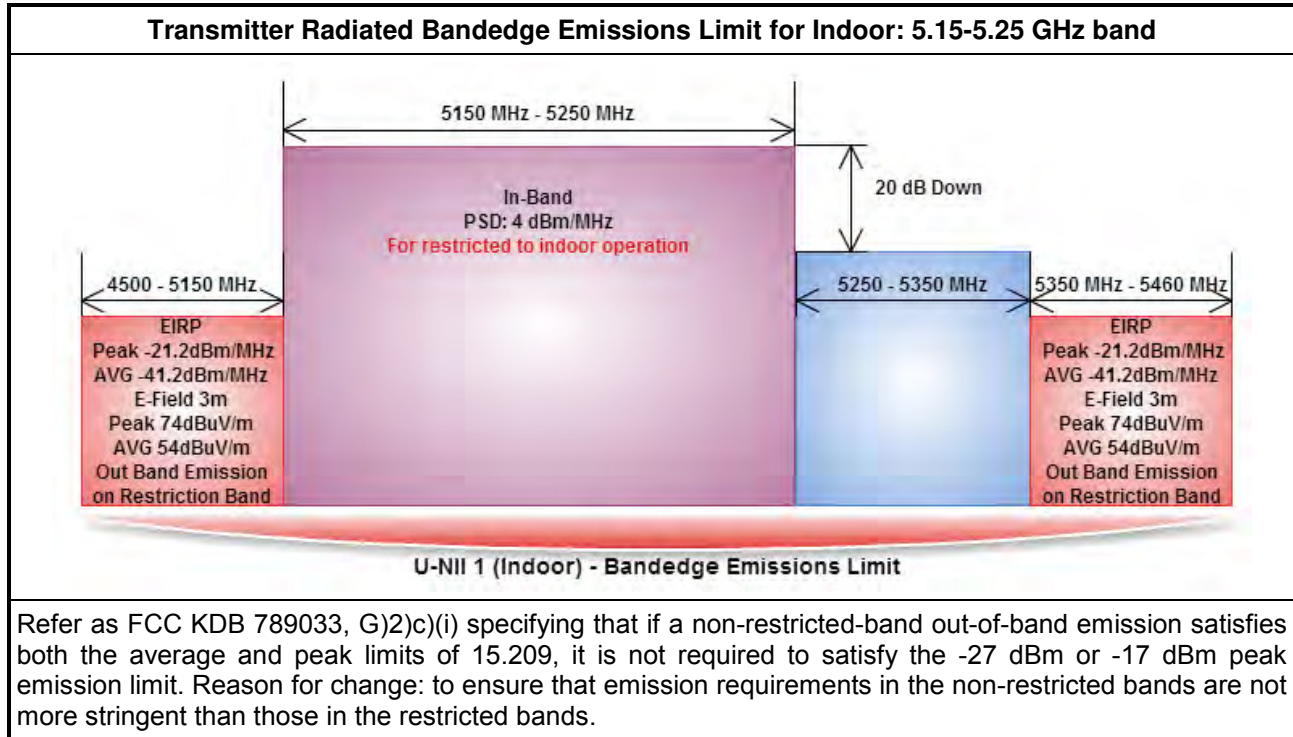


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input type="checkbox"/>	If EUT operate in adjacent contiguous bands, bandedge testing performed at the lowest frequency channel at lower-band and highest frequency channel at higher-band. Transmitter in-band emissions will consist of adjacent contiguous bands (e.g., IEEE 802.11ac VHT160 The lowest frequency channel at lower-band and highest frequency channel at higher-band in-band emissions will consist of two adjacent contiguous bands.)
<input type="checkbox"/>	<input type="checkbox"/> Operating in 5.15-5.25 GHz band (lower-band) and 5.25-5.35 GHz band (higher-band). <input type="checkbox"/> Operating in 5.47-5.725 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
<input type="checkbox"/>	If EUT operate in individual non-contiguous bands, bandedge testing performed at the lowest frequency channel and highest frequency channel within lower-band and higher-band. (e.g., IEEE 802.11ac VHT160)
<input type="checkbox"/>	<input type="checkbox"/> Operating in 5.25-5.35 GHz band (lower-band) and 5.47-5.725 GHz band (higher-band). <input type="checkbox"/> Operating in 5.15-5.25 GHz band (lower-band) and 5.725-5.85 GHz band (higher-band).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	<input type="checkbox"/> Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	<input type="checkbox"/> Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	<input type="checkbox"/> Refer as FCC KDB 789033, clause G)3)d) for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.10 for band-edge testing.
<input type="checkbox"/>	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.6.2 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.6. Test distance is 3m.
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 3m, because the instrumentation noise floor is typically close to the radiated emission limit.

### 3.5.4 Test Setup

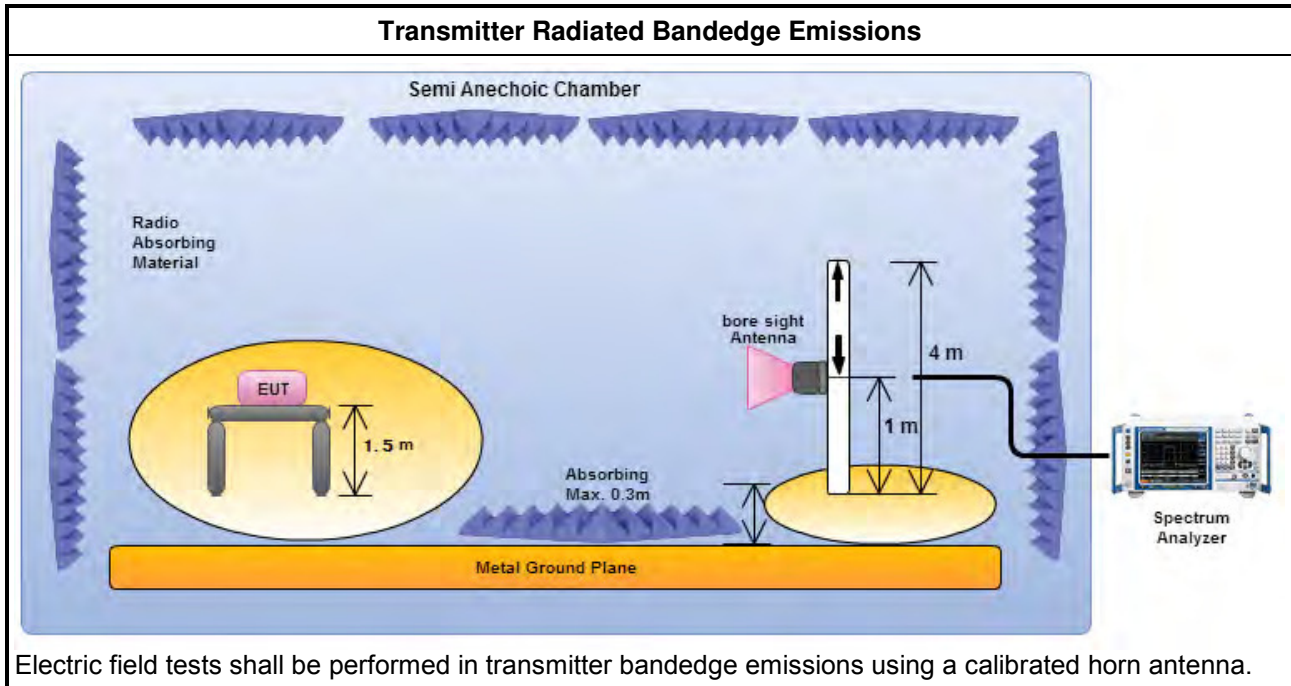

### 3.5.5 Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna)										
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	1	5180	3	5101.400	57.48	74	5127.000	43.68	54	V
11a	1	5240	3	5373.000	57.28	74	5359.800	44.07	54	V
HT20	3	5180	3	5118.400	58.50	74	5148.400	44.78	54	V
HT20	3	5240	3	5364.600	57.87	74	5359.800	44.18	54	V
HT40	3	5190	3	5147.080	66.21	74	5149.940	52.62	54	V
HT40	3	5230	3	5132.400	58.81	74	5125.800	44.84	54	V

Note 1: Measurement worst emissions of receive antenna polarization.

5725-5850MHz Transmitter Radiated Bandedge (with Antenna)							
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	1	5745	3	5690.740	58.75	68.2	V
11a	1	5745	3	5720.560	58.85	78.2	V
11a	1	5825	3	5893.960	58.78	68.2	V
11a	1	5825	3	5856.790	57.46	78.2	V
HT20	3	5745	3	5701.030	60.40	68.2	V
HT20	3	5745	3	5720.560	63.84	78.2	V
HT20	3	5825	3	5898.370	58.99	68.2	V
HT20	3	5825	3	5850.280	58.26	78.2	V
HT40	3	5755	3	5711.880	65.24	68.2	V
HT40	3	5755	3	5724.620	67.33	78.2	V
HT40	3	5795	3	5911.300	58.48	68.2	V
HT40	3	5795	3	5853.400	57.98	78.2	V

Note 1: Measurement worst emissions of receive antenna polarization.



### 3.6 Transmitter Radiated Unwanted Emissions

#### 3.6.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.825 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.825 5.835 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



### 3.6.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging).
<input type="checkbox"/>	Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. For 1 GHz to 5 GHz, test distance is 3m; For 5 GHz to 40 GHz, test distance is 3m.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### 3.6.4 Test Setup

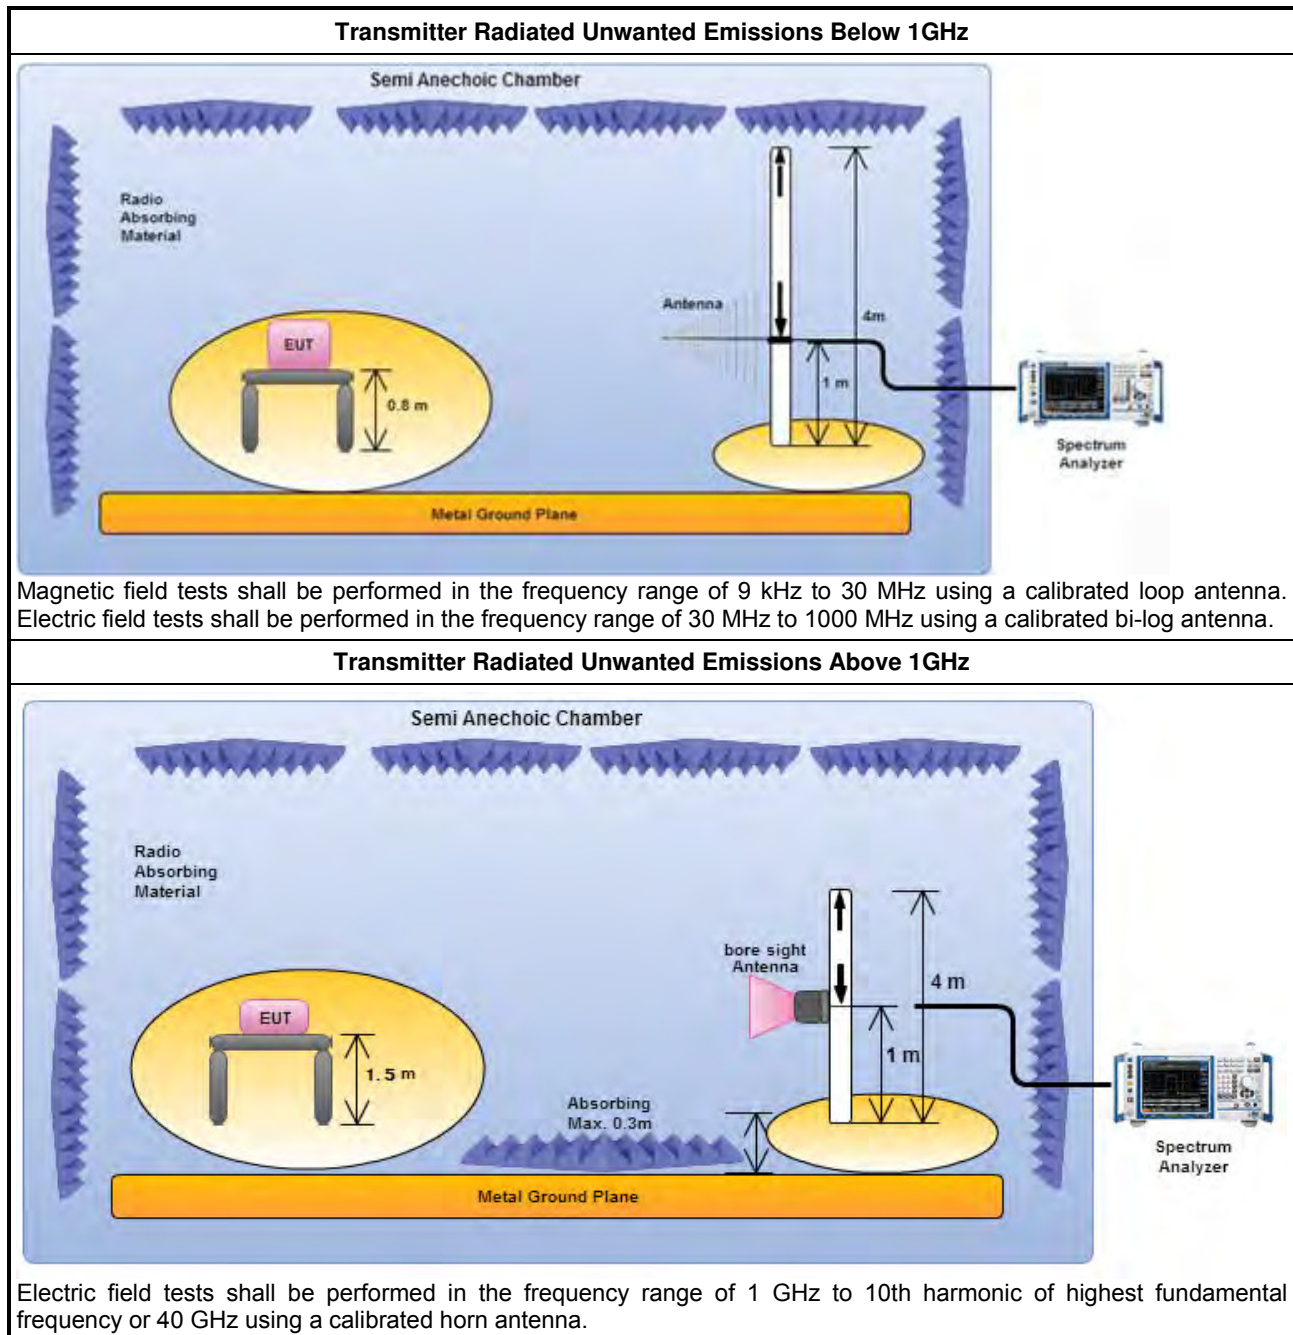


### 3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

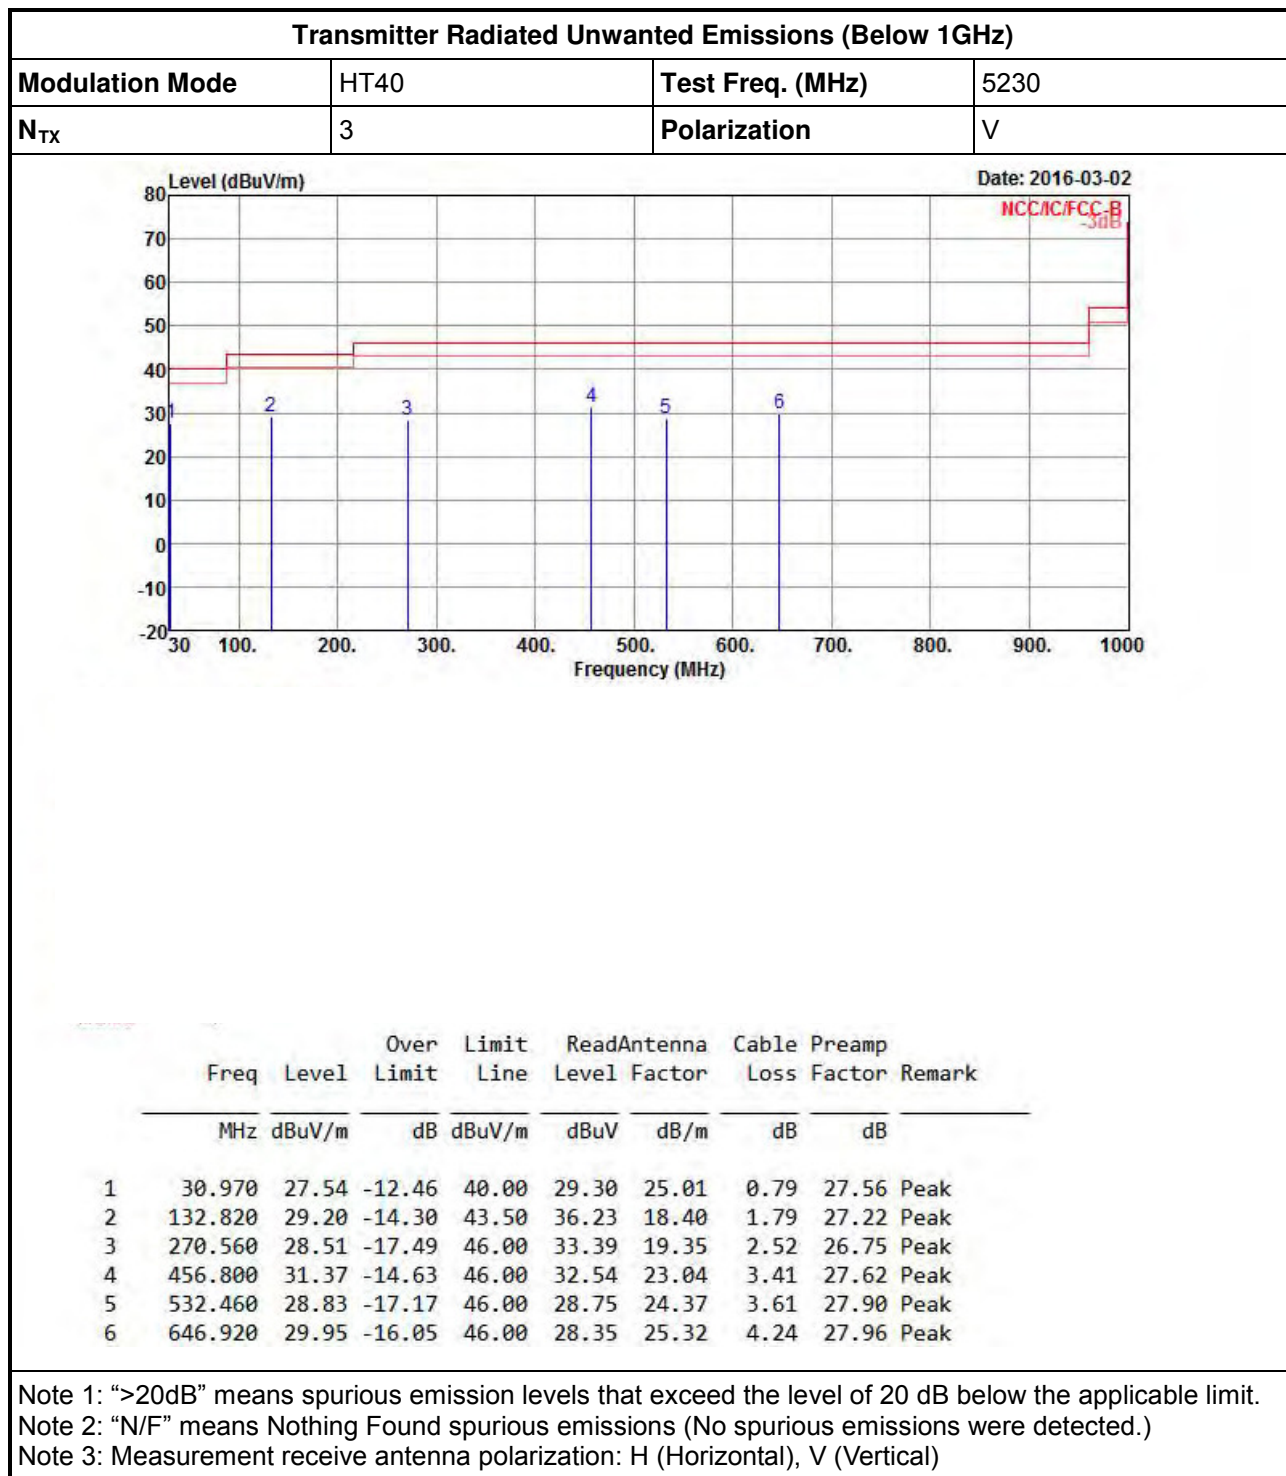**3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)**


## Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation Mode	HT40	Test Freq. (MHz)	5230
N <sub>TX</sub>	3	Polarization	H

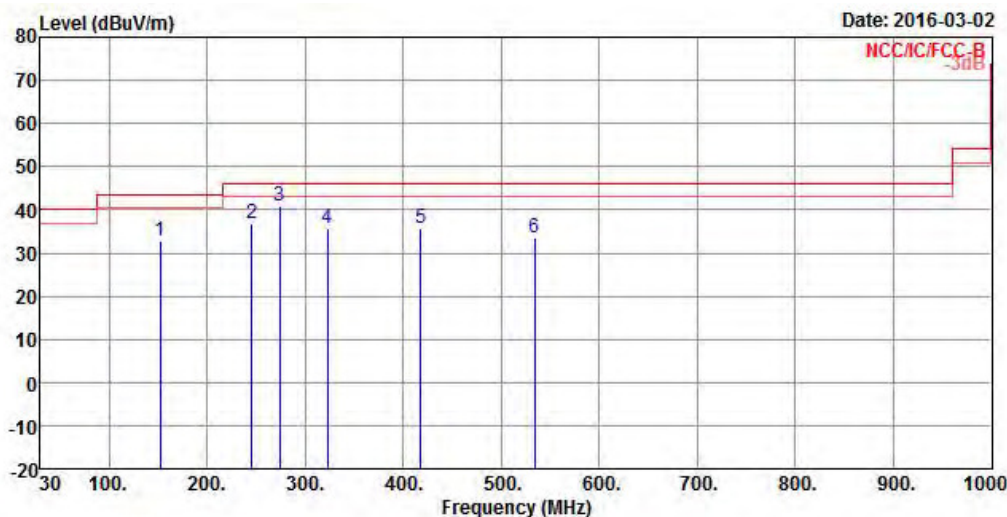


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	152.220	32.94	-10.56	43.50	41.34	16.81	1.93	27.14 Peak
2	245.340	36.77	-9.23	46.00	42.66	18.49	2.44	26.82 Peak
3	274.440	40.78	-5.22	46.00	45.60	19.39	2.53	26.74 Peak
4	322.940	35.61	-10.39	46.00	39.13	20.46	2.83	26.81 Peak
5	418.000	35.75	-10.25	46.00	37.32	22.56	3.29	27.42 Peak
6	534.400	33.60	-12.40	46.00	33.48	24.40	3.62	27.90 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

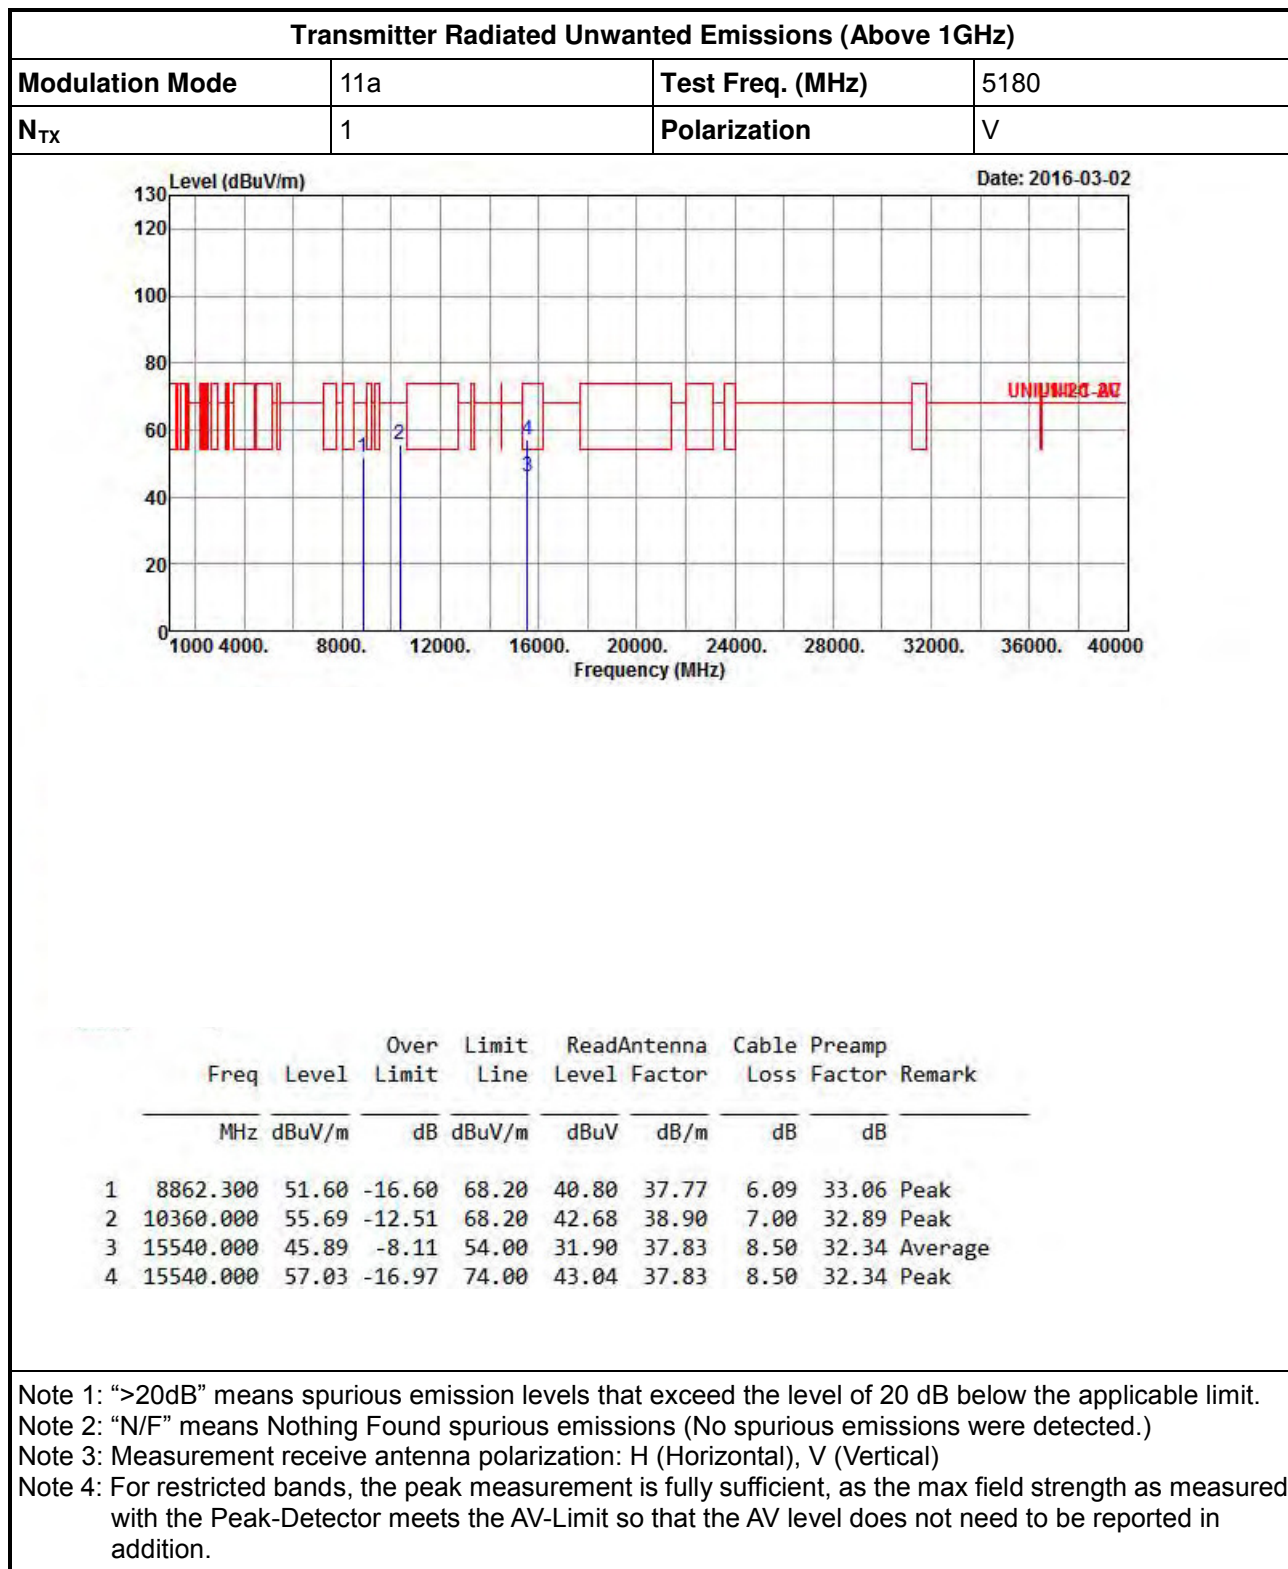

**3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz**


**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

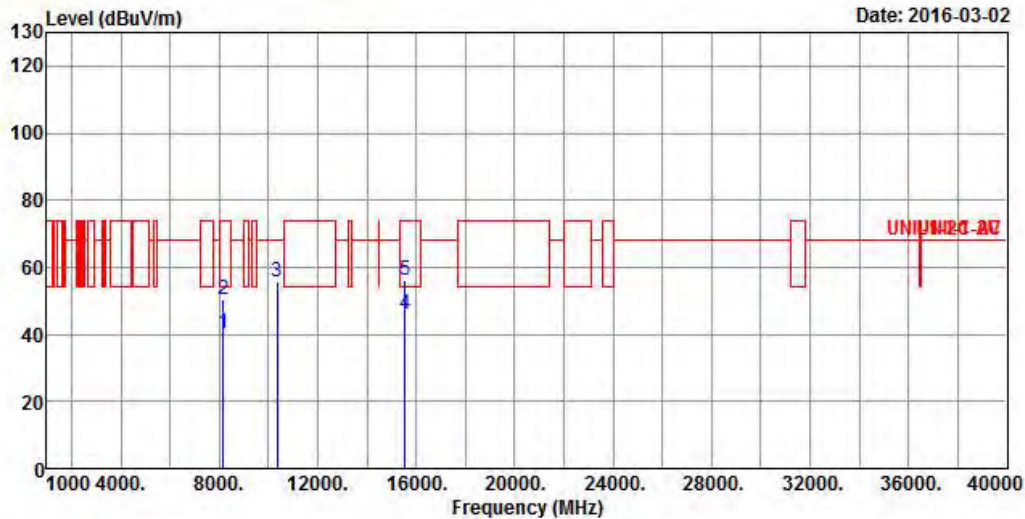

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8167.700	40.44	-13.56	54.00	30.14	37.31	5.93	32.94	Average
2	8167.700	50.48	-23.52	74.00	40.18	37.31	5.93	32.94	Peak
3	10360.000	55.47	-12.73	68.20	42.46	38.90	7.00	32.89	Peak
4	15540.000	45.87	-8.13	54.00	31.88	37.83	8.50	32.34	Average
5	15540.000	56.06	-17.94	74.00	42.07	37.83	8.50	32.34	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	V

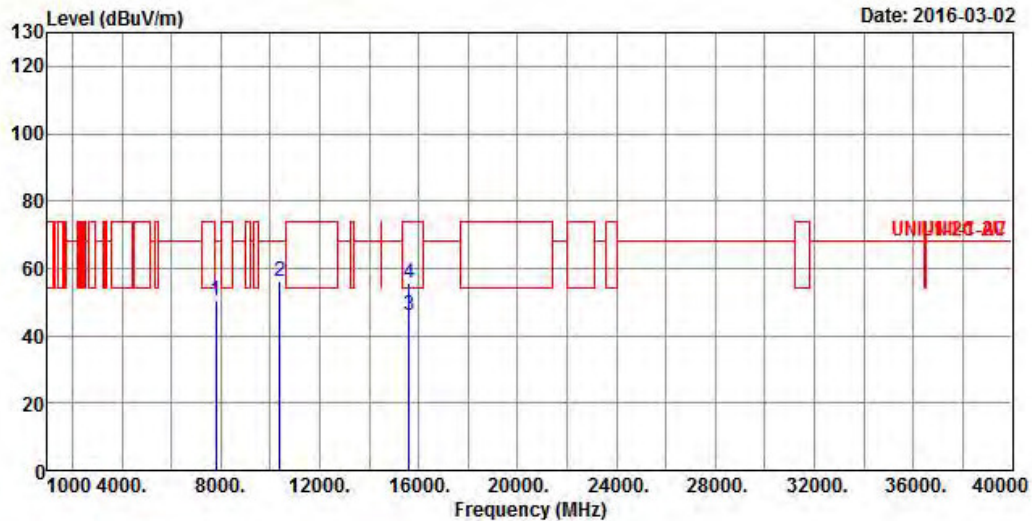

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7808.400	50.49	-17.71	68.20	40.76	36.86	5.78	32.91 Peak
2	10400.000	56.13	-12.07	68.20	43.08	38.90	7.00	32.85 Peak
3	15600.000	45.96	-8.04	54.00	32.13	37.69	8.50	32.36 Average
4	15600.000	55.70	-18.30	74.00	41.87	37.69	8.50	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

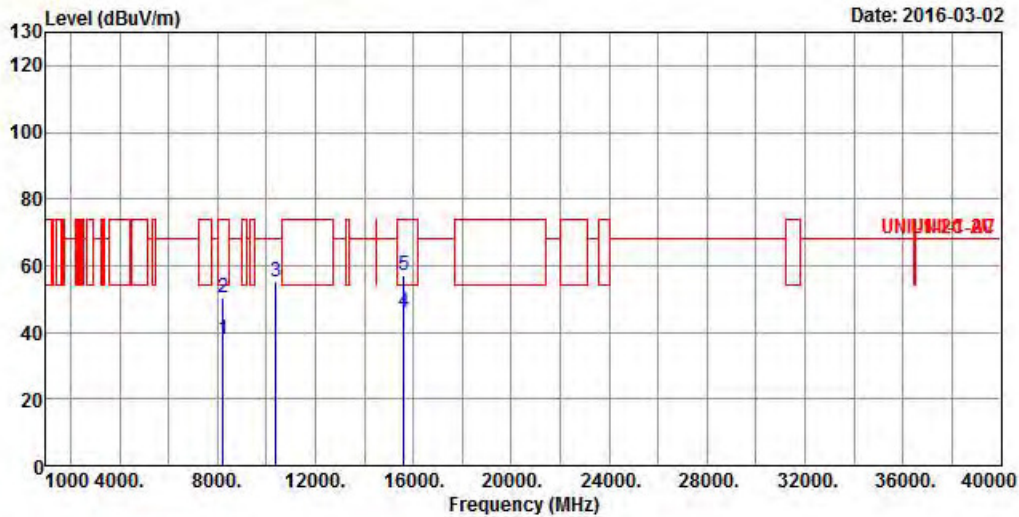

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8215.600	38.06	-15.94	54.00	27.70	37.35	5.95	32.94	Average
2	8215.600	50.55	-23.45	74.00	40.19	37.35	5.95	32.94	Peak
3	10400.000	55.27	-12.93	68.20	42.22	38.90	7.00	32.85	Peak
4	15600.000	46.02	-7.98	54.00	32.19	37.69	8.50	32.36	Average
5	15600.000	56.89	-17.11	74.00	43.06	37.69	8.50	32.36	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	V

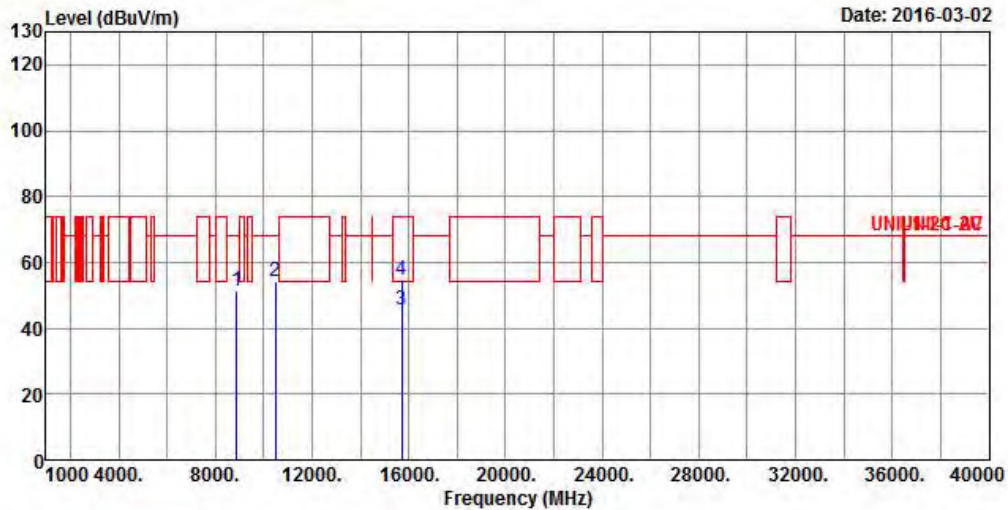

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8878.200	51.12	-17.08	68.20	40.33	37.77	6.09	33.07 Peak
2	10480.000	54.36	-13.84	68.20	41.25	38.90	6.99	32.78 Peak
3	15720.000	45.59	-8.41	54.00	32.01	37.45	8.52	32.39 Average
4	15720.000	54.87	-19.13	74.00	41.29	37.45	8.52	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

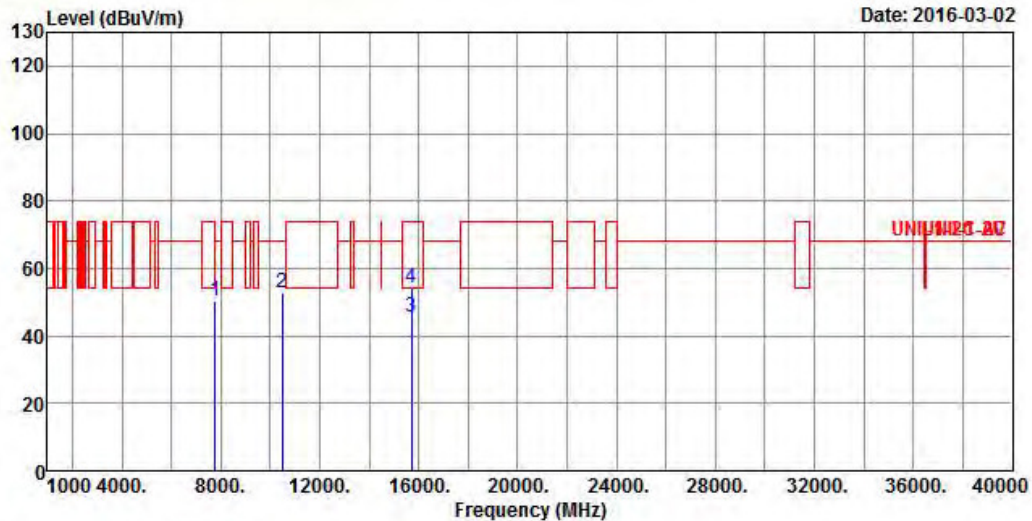

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7788.400	50.30	-17.90	68.20	40.59	36.84	5.77	32.90 Peak
2	10480.000	52.59	-15.61	68.20	39.48	38.90	6.99	32.78 Peak
3	15720.000	45.40	-8.60	54.00	31.82	37.45	8.52	32.39 Average
4	15720.000	54.29	-19.71	74.00	40.71	37.45	8.52	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

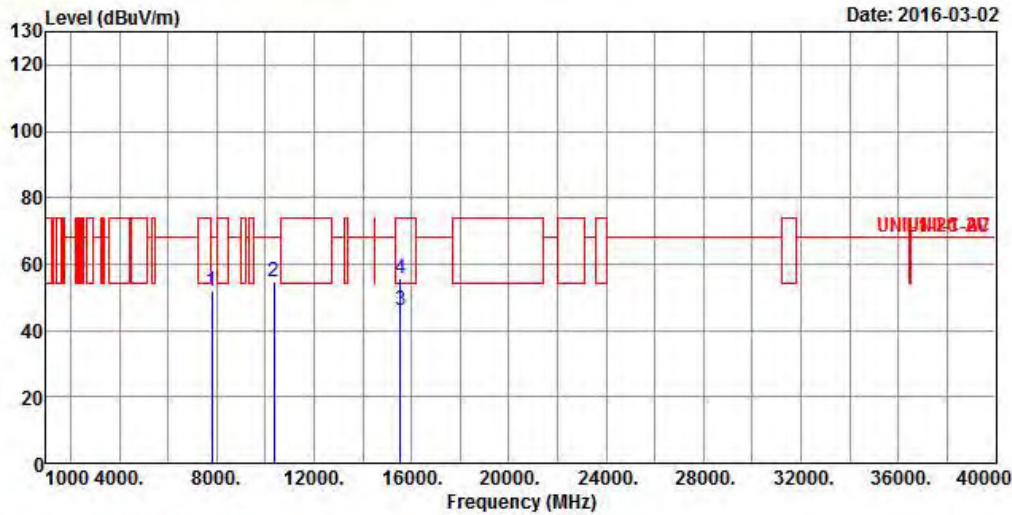

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7804.400	51.64	-16.56	68.20	41.92	36.86	5.77	32.91 Peak
2	10360.000	54.47	-13.73	68.20	41.46	38.90	7.00	32.89 Peak
3	15540.000	45.87	-8.13	54.00	31.88	37.83	8.50	32.34 Average
4	15540.000	55.43	-18.57	74.00	41.44	37.83	8.50	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5180
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

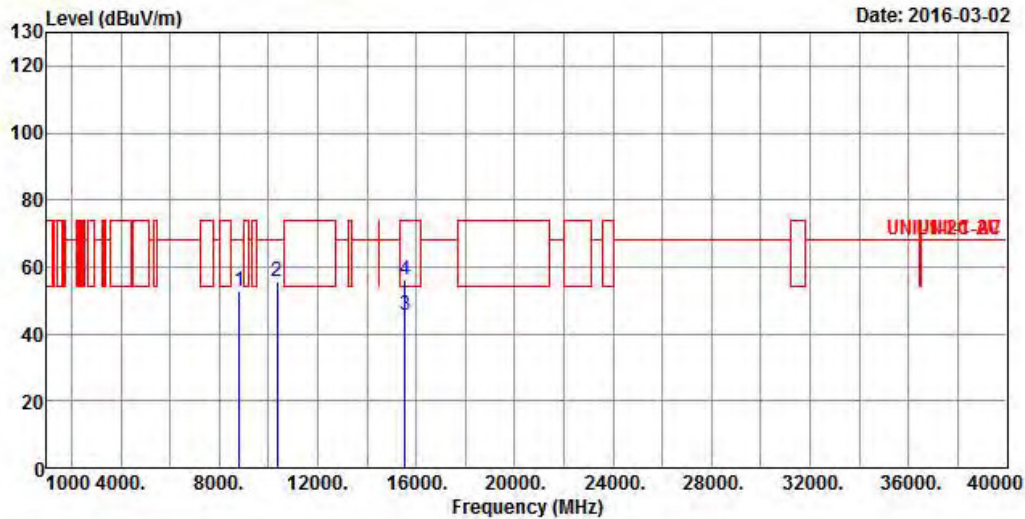

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8834.300	52.76	-15.44	68.20	41.95	37.77	6.09	33.05 Peak
2	10360.000	55.86	-12.34	68.20	42.85	38.90	7.00	32.89 Peak
3	15540.000	45.77	-8.23	54.00	31.78	37.83	8.50	32.34 Average
4	15540.000	56.33	-17.67	74.00	42.34	37.83	8.50	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

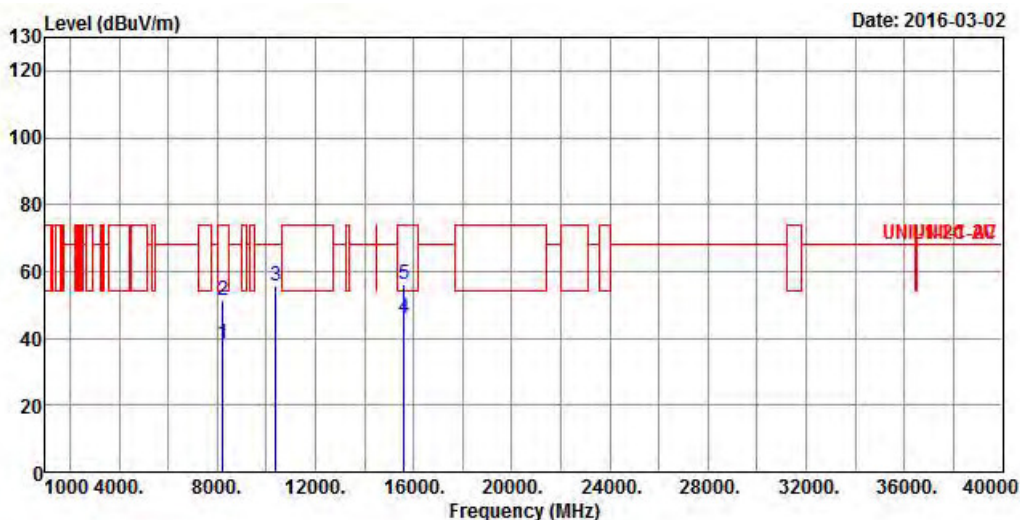

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8243.500	38.41	-15.59	54.00	27.98	37.39	5.98	32.94 Average
2	8243.500	51.20	-22.80	74.00	40.77	37.39	5.98	32.94 Peak
3	10400.000	55.77	-12.43	68.20	42.72	38.90	7.00	32.85 Peak
4	15600.000	45.96	-8.04	54.00	32.13	37.69	8.50	32.36 Average
5	15600.000	56.28	-17.72	74.00	42.45	37.69	8.50	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5200
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

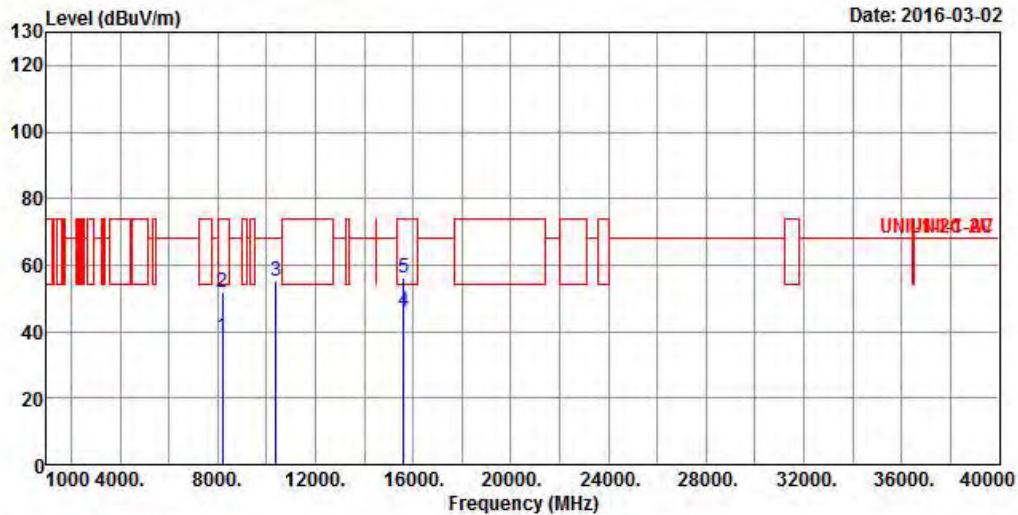

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8211.600	38.20	-15.80	54.00	27.84	37.35	5.95	32.94 Average
2	8211.600	52.04	-21.96	74.00	41.68	37.35	5.95	32.94 Peak
3	10400.000	55.30	-12.90	68.20	42.25	38.90	7.00	32.85 Peak
4	15600.000	46.00	-8.00	54.00	32.17	37.69	8.50	32.36 Average
5	15600.000	56.32	-17.68	74.00	42.49	37.69	8.50	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

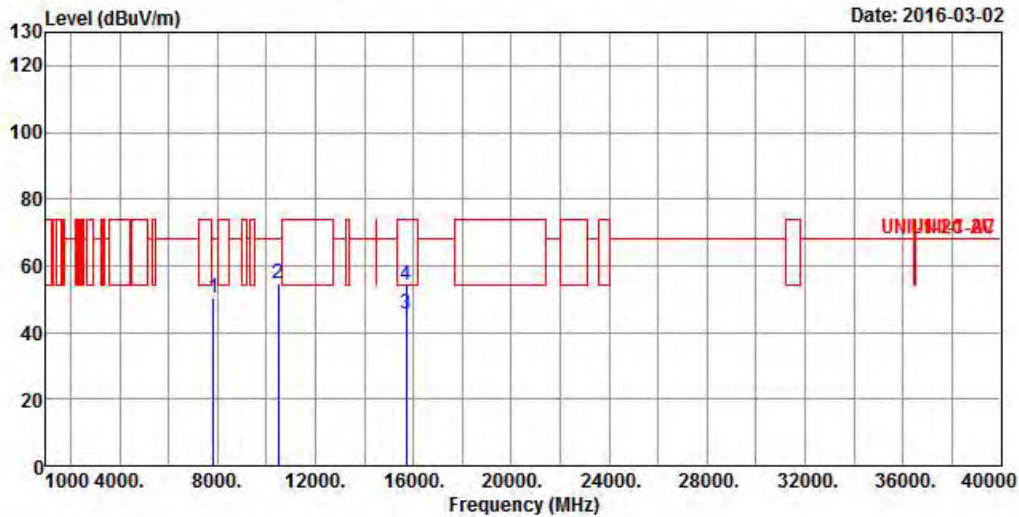

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7848.300	50.36	-17.84	68.20	40.57	36.92	5.79	32.92 Peak
2	10480.000	54.56	-13.64	68.20	41.45	38.90	6.99	32.78 Peak
3	15720.000	45.57	-8.43	54.00	31.99	37.45	8.52	32.39 Average
4	15720.000	54.24	-19.76	74.00	40.66	37.45	8.52	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5240
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

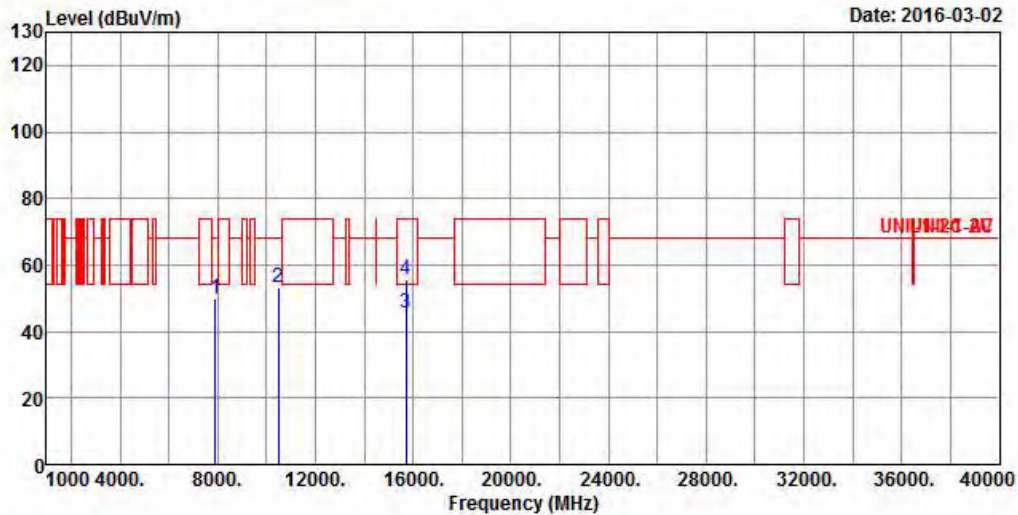

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7897.000	50.11	-18.09	68.20	40.25	36.98	5.80	32.92 Peak
2	10480.000	53.25	-14.95	68.20	40.14	38.90	6.99	32.78 Peak
3	15720.000	45.55	-8.45	54.00	31.97	37.45	8.52	32.39 Average
4	15720.000	55.74	-18.26	74.00	42.16	37.45	8.52	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5190
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

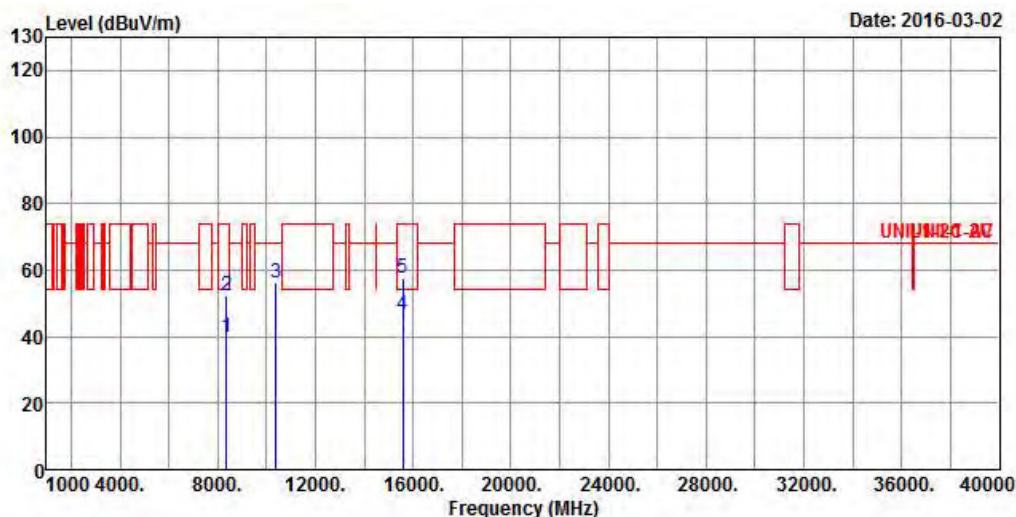

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8349.300	39.99	-14.01	54.00	29.40	37.51	6.02	32.94 Average
2	8349.300	52.45	-21.55	74.00	41.86	37.51	6.02	32.94 Peak
3	10380.000	56.00	-12.20	68.20	42.97	38.90	7.00	32.87 Peak
4	15570.000	46.33	-7.67	54.00	32.42	37.76	8.50	32.35 Average
5	15570.000	57.53	-16.47	74.00	43.62	37.76	8.50	32.35 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5190
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

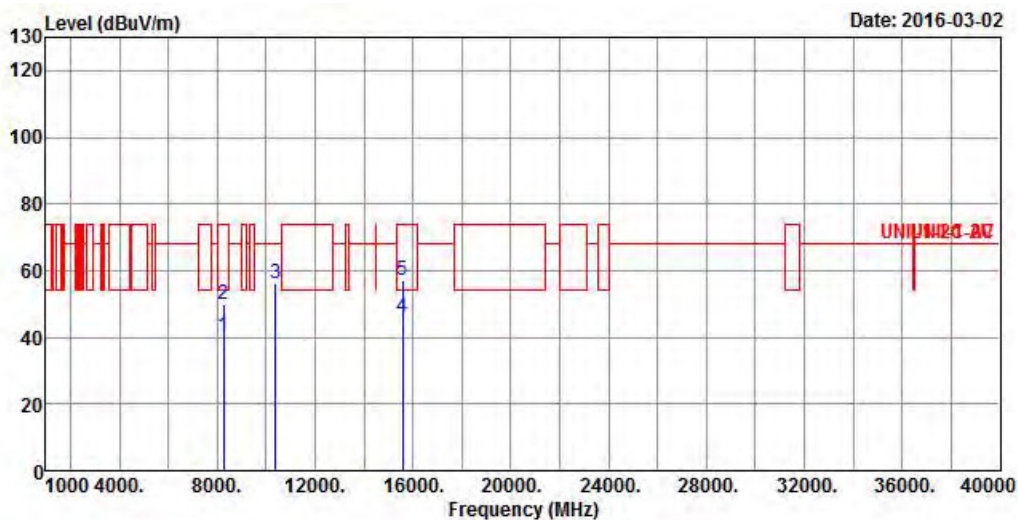

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8265.500	40.29	-13.71	54.00	29.84	37.41	5.98	32.94	Average
2	8265.500	49.90	-24.10	74.00	39.45	37.41	5.98	32.94	Peak
3	10380.000	56.29	-11.91	68.20	43.26	38.90	7.00	32.87	Peak
4	15570.000	46.26	-7.74	54.00	32.35	37.76	8.50	32.35	Average
5	15570.000	57.17	-16.83	74.00	43.26	37.76	8.50	32.35	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5230
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

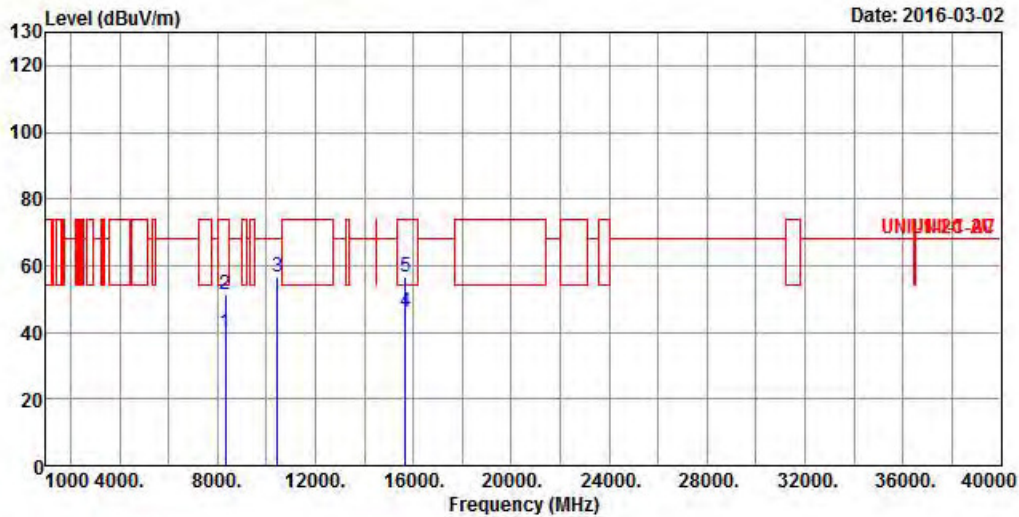

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8329.300	39.68	-14.32	54.00	29.11	37.49	6.02	32.94	Average
2	8329.300	51.19	-22.81	74.00	40.62	37.49	6.02	32.94	Peak
3	10460.000	56.43	-11.77	68.20	43.34	38.90	6.99	32.80	Peak
4	15690.000	46.05	-7.95	54.00	32.40	37.52	8.52	32.39	Average
5	15690.000	56.46	-17.54	74.00	42.81	37.52	8.52	32.39	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5230
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

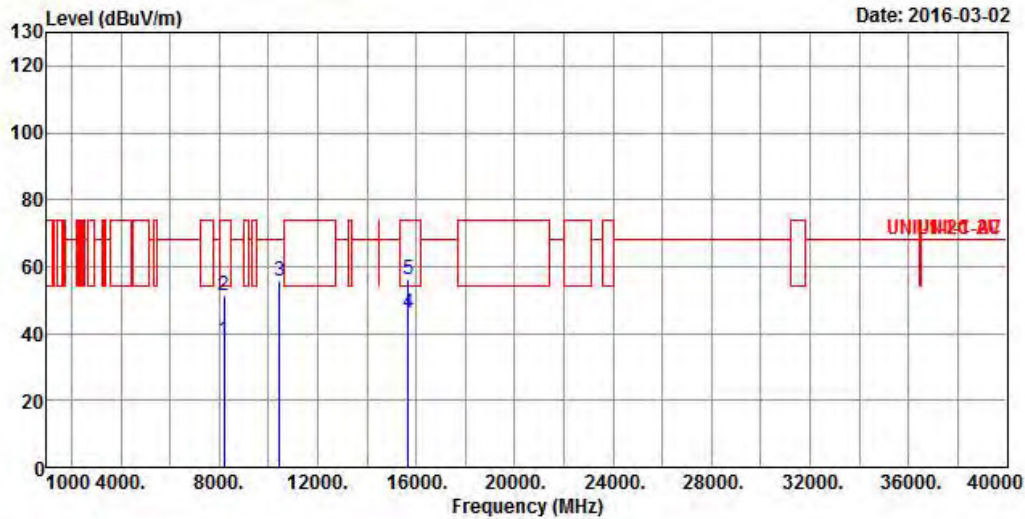

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8197.600	38.08	-15.92	54.00	27.74	37.33	5.95	32.94	Average
2	8197.600	51.20	-22.80	74.00	40.86	37.33	5.95	32.94	Peak
3	10460.000	55.58	-12.62	68.20	42.49	38.90	6.99	32.80	Peak
4	15690.000	46.00	-8.00	54.00	32.35	37.52	8.52	32.39	Average
5	15690.000	56.29	-17.71	74.00	42.64	37.52	8.52	32.39	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

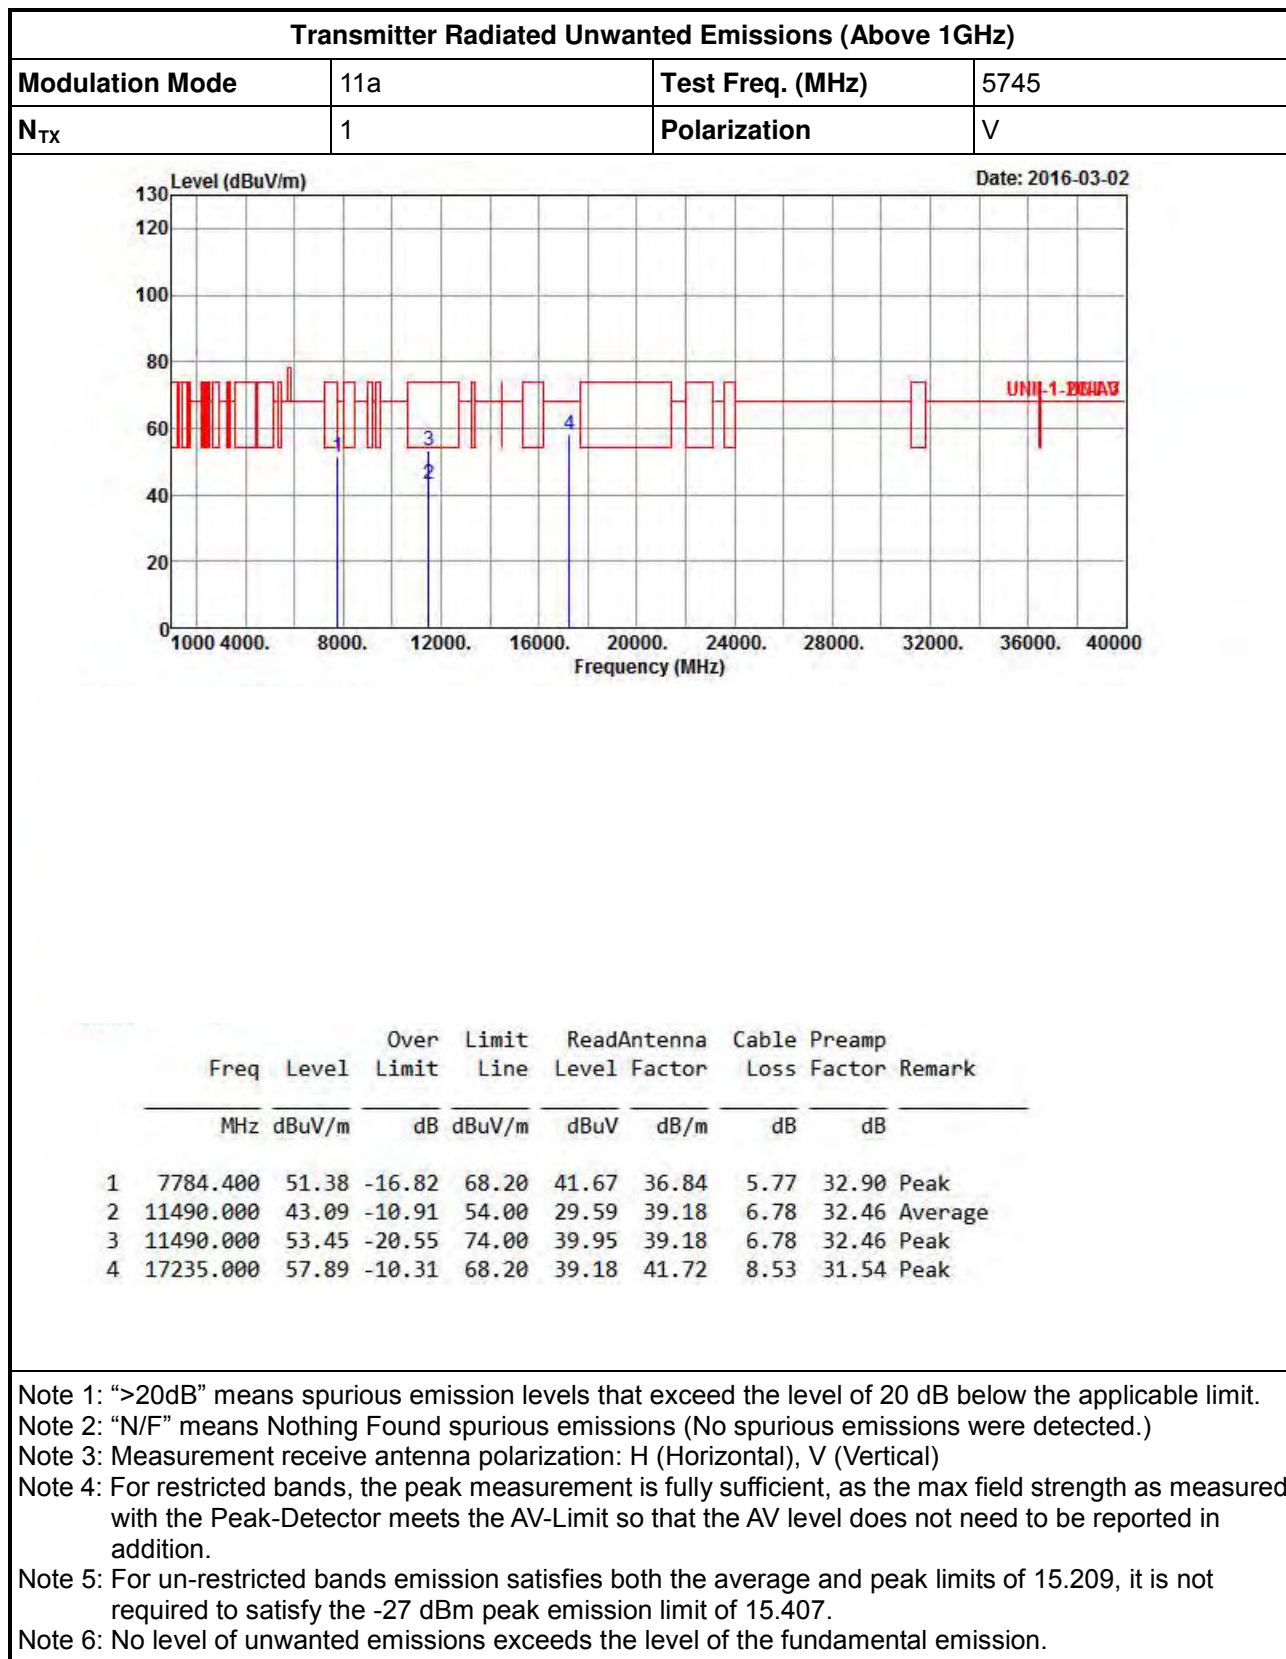

**3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz**


**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

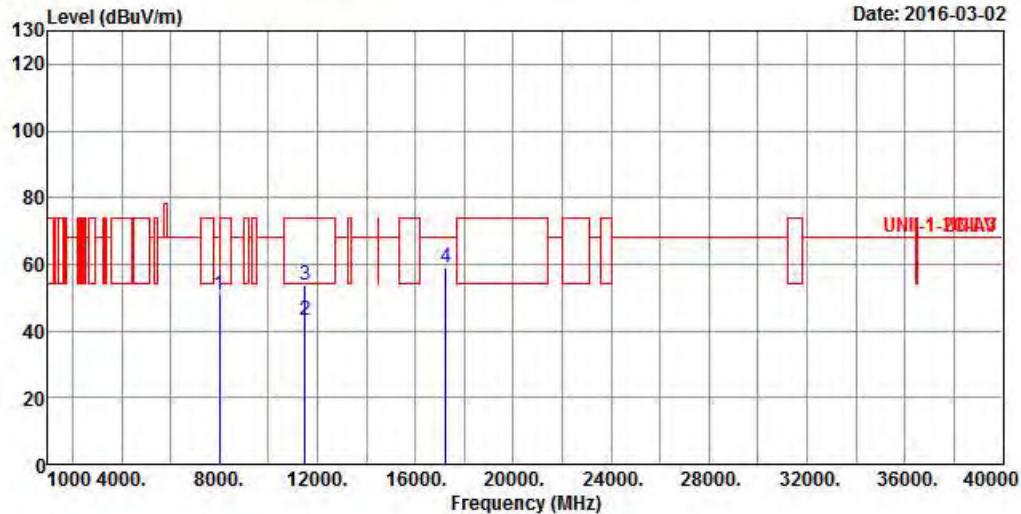

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7988.000	50.70	-17.50	68.20	40.74	37.08	5.82	32.94	Peak
2	11490.000	43.17	-10.83	54.00	29.67	39.18	6.78	32.46	Average
3	11490.000	53.75	-20.25	74.00	40.25	39.18	6.78	32.46	Peak
4	17235.000	58.78	-9.42	68.20	40.07	41.72	8.53	31.54	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	V

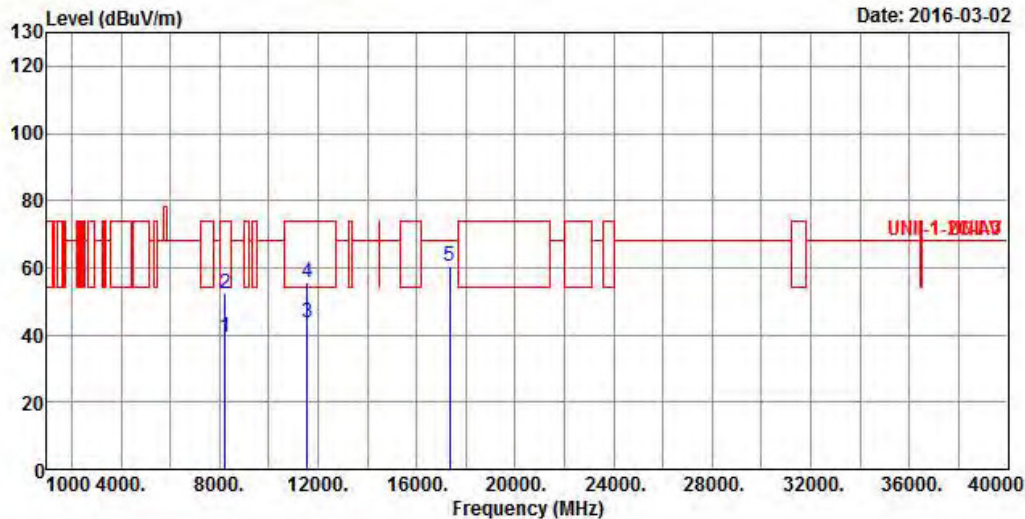

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8223.600	39.27	-14.73	54.00	28.89	37.37	5.95	32.94 Average
2	8223.600	52.11	-21.89	74.00	41.73	37.37	5.95	32.94 Peak
3	11570.000	43.63	-10.37	54.00	30.03	39.23	6.84	32.47 Average
4	11570.000	55.73	-18.27	74.00	42.13	39.23	6.84	32.47 Peak
5	17355.000	60.29	-7.91	68.20	40.77	42.63	8.46	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

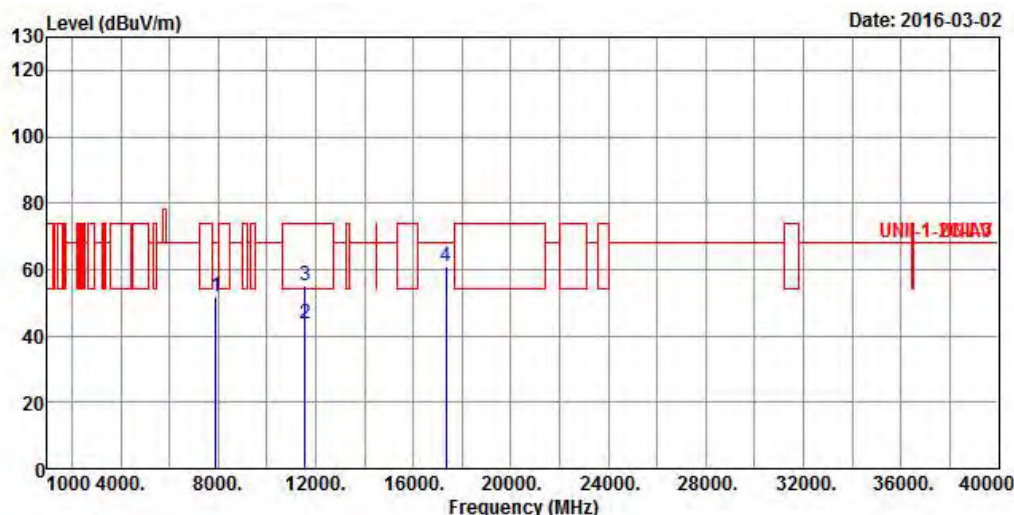

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7889.000	51.80	-16.40	68.20	41.96	36.96	5.80	32.92 Peak
2	11570.000	43.54	-10.46	54.00	29.94	39.23	6.84	32.47 Average
3	11570.000	55.26	-18.74	74.00	41.66	39.23	6.84	32.47 Peak
4	17355.000	61.06	-7.14	68.20	41.54	42.63	8.46	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	V

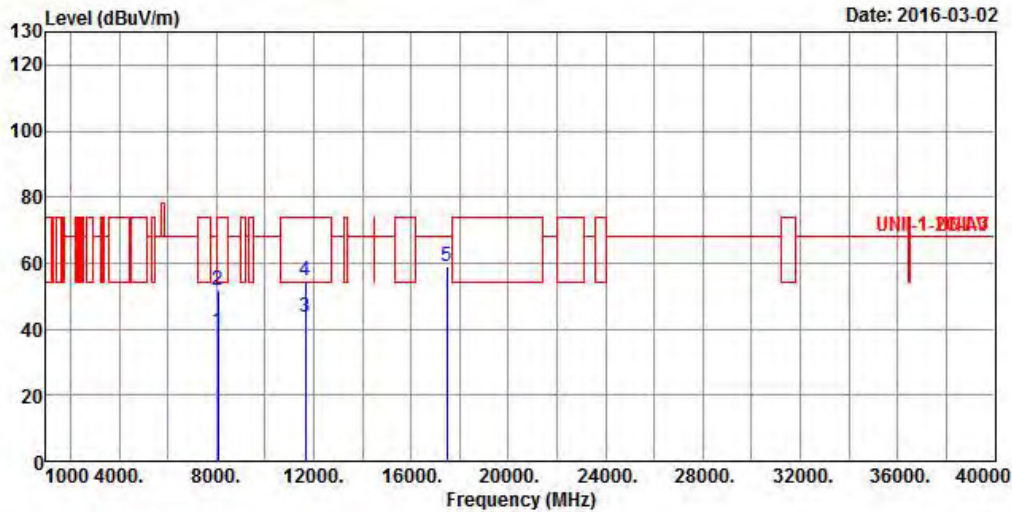

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8055.900	39.53	-14.47	54.00	29.45	37.16	5.86	32.94 Average
2	8055.900	52.02	-21.98	74.00	41.94	37.16	5.86	32.94 Peak
3	11650.000	43.65	-10.35	54.00	29.97	39.26	6.90	32.48 Average
4	11650.000	54.72	-19.28	74.00	41.04	39.26	6.90	32.48 Peak
5	17475.000	58.93	-9.27	68.20	38.60	43.54	8.40	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>N<sub>TX</sub></b>	1	<b>Polarization</b>	H

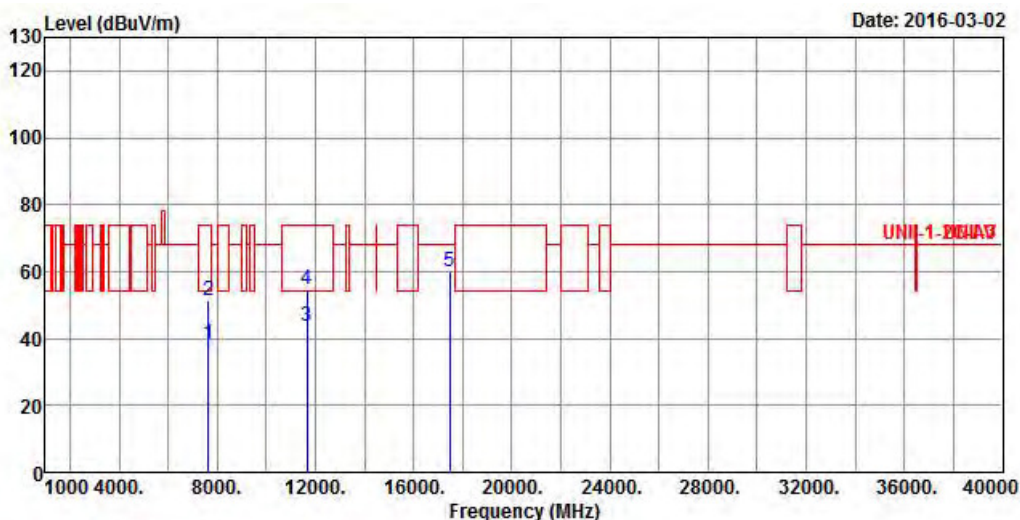

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7640.700	38.30	-15.70	54.00	28.77	36.68	5.73	32.88	Average
2	7640.700	51.17	-22.83	74.00	41.64	36.68	5.73	32.88	Peak
3	11650.000	43.63	-10.37	54.00	29.95	39.26	6.90	32.48	Average
4	11650.000	54.60	-19.40	74.00	40.92	39.26	6.90	32.48	Peak
5	17475.000	60.15	-8.05	68.20	39.82	43.54	8.40	31.61	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5745
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

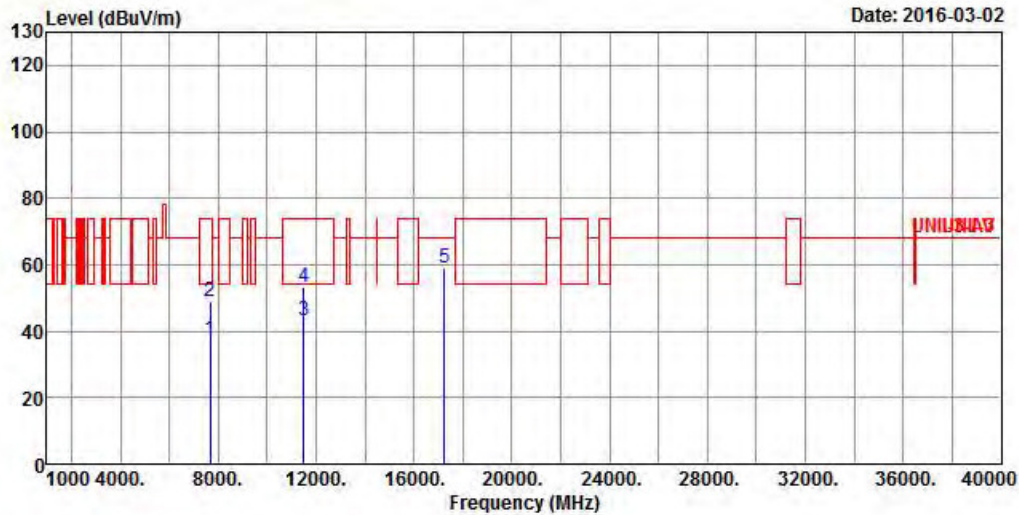

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7680.600	37.41	-16.59	54.00	27.84	36.72	5.74	32.89 Average
2	7680.600	48.77	-25.23	74.00	39.20	36.72	5.74	32.89 Peak
3	11490.000	43.21	-10.79	54.00	29.71	39.18	6.78	32.46 Average
4	11490.000	53.28	-20.72	74.00	39.78	39.18	6.78	32.46 Peak
5	17235.000	58.88	-9.32	68.20	40.17	41.72	8.53	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5745
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

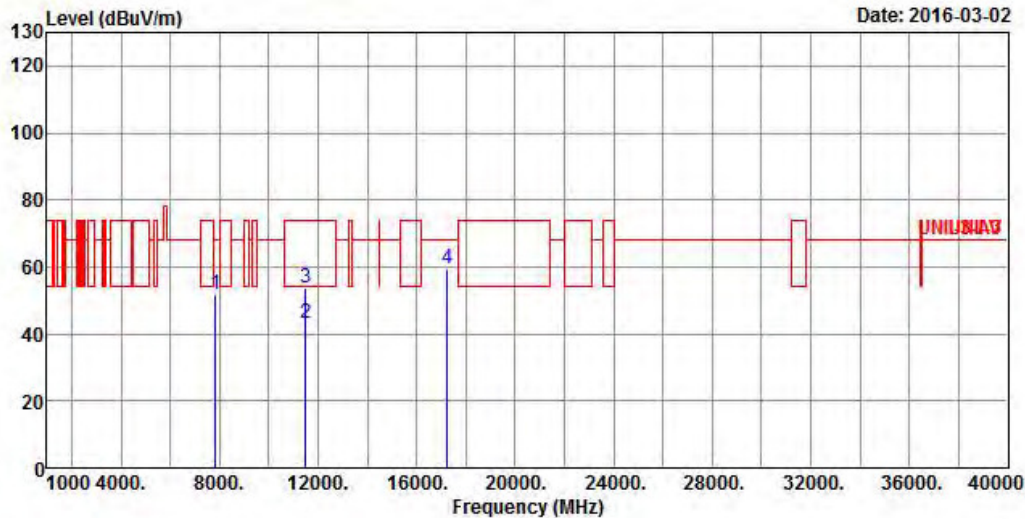

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7848.300	51.86	-16.34	68.20	42.07	36.92	5.79	32.92	Peak
2	11490.000	43.04	-10.96	54.00	29.54	39.18	6.78	32.46	Average
3	11490.000	53.51	-20.49	74.00	40.01	39.18	6.78	32.46	Peak
4	17235.000	59.47	-8.73	68.20	40.76	41.72	8.53	31.54	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5785
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

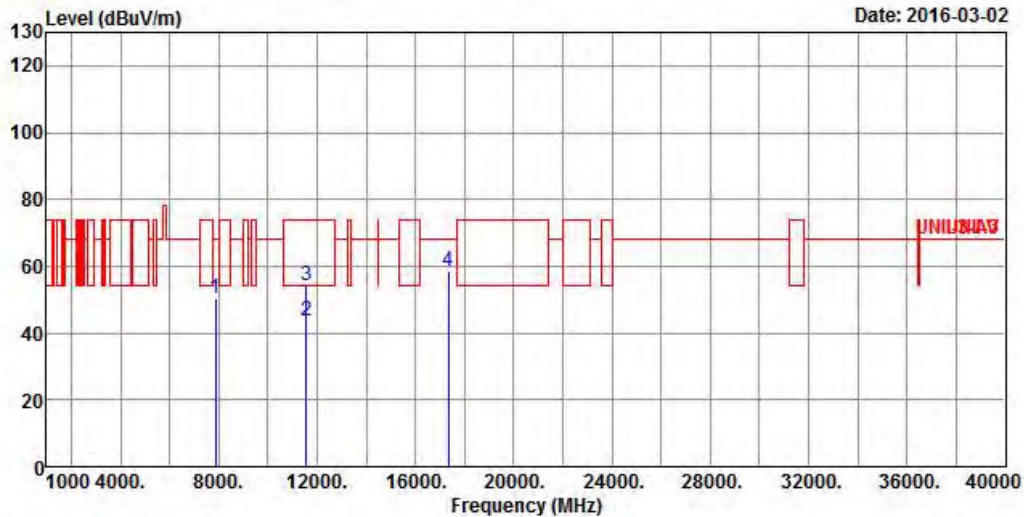

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7856.300	50.32	-17.88	68.20	40.53	36.92	5.79	32.92 Peak
2	11570.000	43.47	-10.53	54.00	29.87	39.23	6.84	32.47 Average
3	11570.000	54.10	-19.90	74.00	40.50	39.23	6.84	32.47 Peak
4	17355.000	58.39	-9.81	68.20	38.87	42.63	8.46	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5785
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

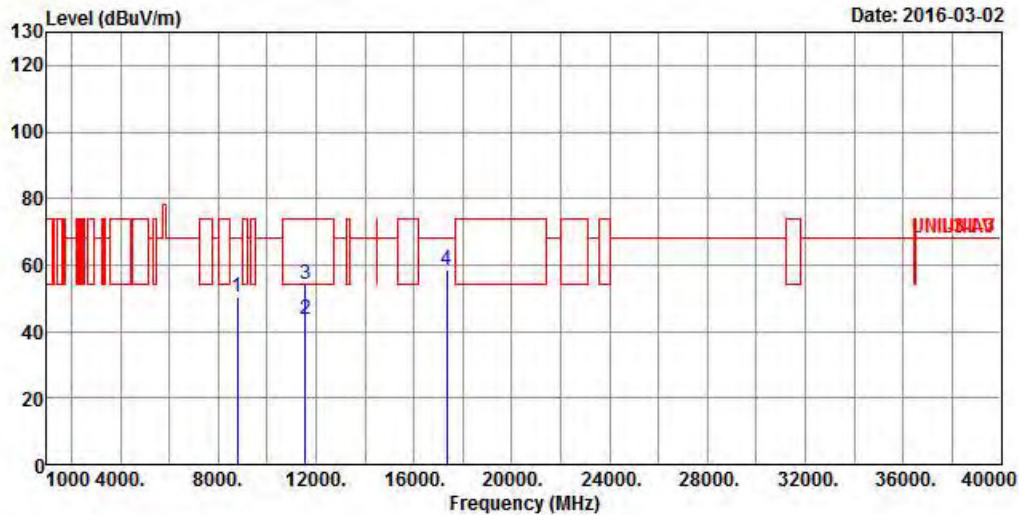

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8798.400	50.54	-17.66	68.20	39.73	37.76	6.09	33.04 Peak
2	11570.000	43.49	-10.51	54.00	29.89	39.23	6.84	32.47 Average
3	11570.000	54.19	-19.81	74.00	40.59	39.23	6.84	32.47 Peak
4	17355.000	58.51	-9.69	68.20	38.99	42.63	8.46	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5825
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

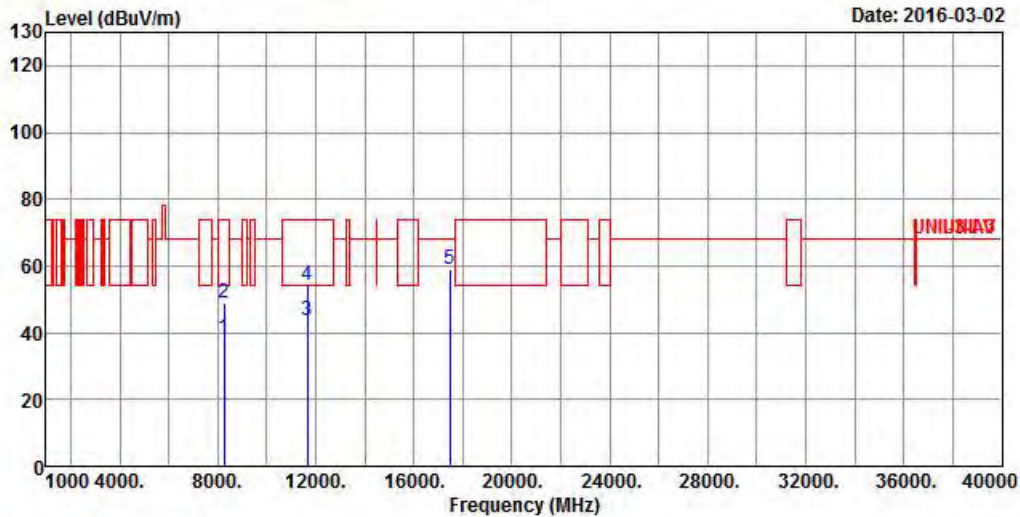

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8251.500	38.34	-15.66	54.00	27.89	37.41	5.98	32.94	Average
2	8251.500	48.96	-25.04	74.00	38.51	37.41	5.98	32.94	Peak
3	11650.000	43.53	-10.47	54.00	29.85	39.26	6.90	32.48	Average
4	11650.000	53.99	-20.01	74.00	40.31	39.26	6.90	32.48	Peak
5	17475.000	59.17	-9.03	68.20	38.84	43.54	8.40	31.61	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT20	<b>Test Freq. (MHz)</b>	5825
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

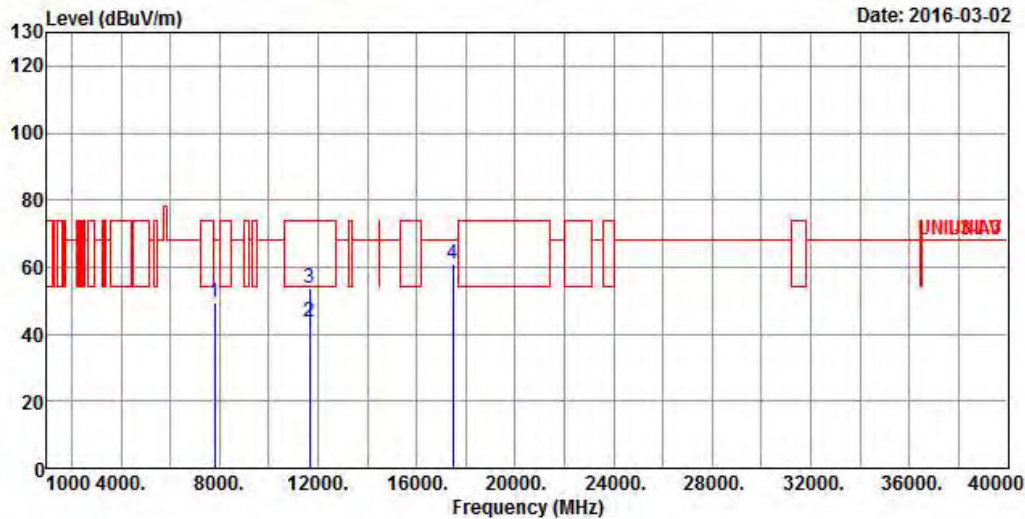

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7796.400	49.45	-18.75	68.20	39.73	36.86	5.77	32.91	Peak
2	11650.000	43.51	-10.49	54.00	29.83	39.26	6.90	32.48	Average
3	11650.000	53.96	-20.04	74.00	40.28	39.26	6.90	32.48	Peak
4	17475.000	60.78	-7.42	68.20	40.45	43.54	8.40	31.61	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5755
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

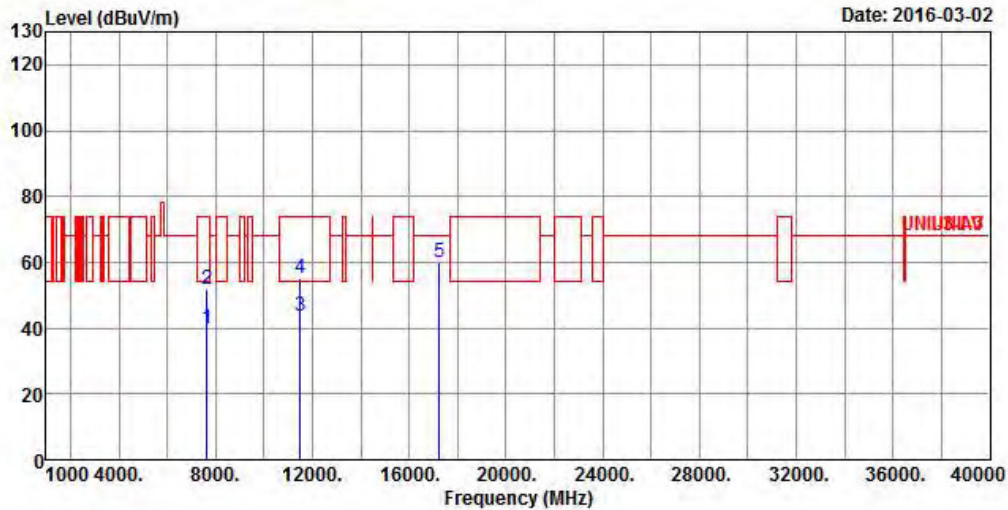

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7644.700	39.99	-14.01	54.00	30.46	36.68	5.73	32.88 Average
2	7644.700	51.83	-22.17	74.00	42.30	36.68	5.73	32.88 Peak
3	11510.000	43.63	-10.37	54.00	30.11	39.20	6.78	32.46 Average
4	11510.000	55.39	-18.61	74.00	41.87	39.20	6.78	32.46 Peak
5	17265.000	60.14	-8.06	68.20	41.21	41.98	8.50	31.55 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5755
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

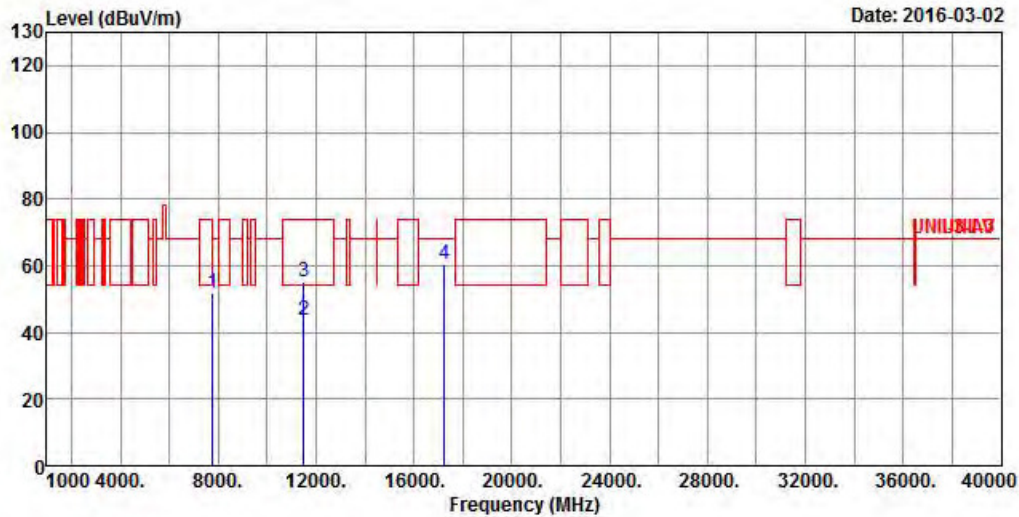

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7780.400	51.76	-16.44	68.20	42.05	36.84	5.77	32.90 Peak
2	11510.000	43.62	-10.38	54.00	30.10	39.20	6.78	32.46 Average
3	11510.000	55.11	-18.89	74.00	41.59	39.20	6.78	32.46 Peak
4	17265.000	60.60	-7.60	68.20	41.67	41.98	8.50	31.55 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5795
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	V

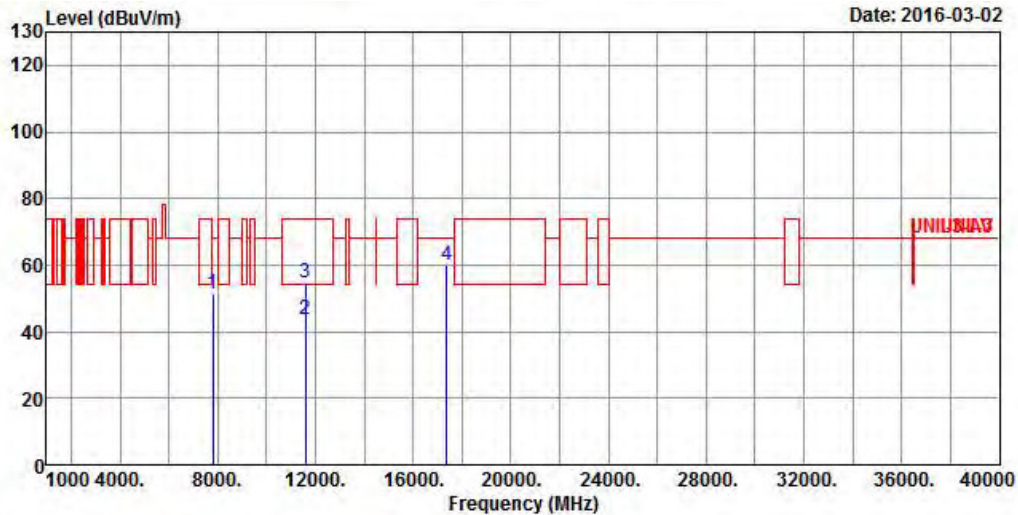

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7800.400	51.42	-16.78	68.20	41.70	36.86	5.77	32.91 Peak
2	11590.000	43.82	-10.18	54.00	30.19	39.23	6.87	32.47 Average
3	11590.000	54.86	-19.14	74.00	41.23	39.23	6.87	32.47 Peak
4	17385.000	60.19	-8.01	68.20	40.45	42.89	8.44	31.59 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	HT40	<b>Test Freq. (MHz)</b>	5795
<b>N<sub>TX</sub></b>	3	<b>Polarization</b>	H

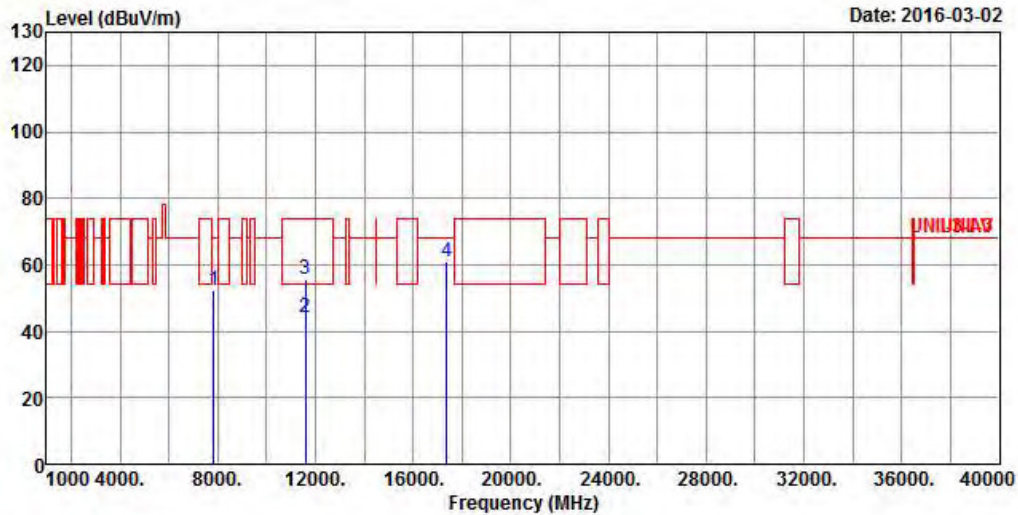

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7836.500	52.34	-15.86	68.20	42.57	36.90	5.78	32.91 Peak
2	11590.000	44.00	-10.00	54.00	30.37	39.23	6.87	32.47 Average
3	11590.000	55.58	-18.42	74.00	41.95	39.23	6.87	32.47 Peak
4	17385.000	60.76	-7.44	68.20	41.02	42.89	8.44	31.59 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

### 3.7 Frequency Stability

#### 3.7.1 Frequency Stability Limit

Frequency Stability Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
<b>LE-LAN Devices</b>	
<input checked="" type="checkbox"/>	N/A
<b>IEEE Std. 802.11n-2009</b>	
<input checked="" type="checkbox"/>	The transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band and $\pm 25$ ppm maximum for the 2.4 GHz band.


#### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.7.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For conducted measurements on devices with multiple transmit chains: Measurements need only to be performed on one of the active transmit chains (antenna outputs)
<input type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

#### 3.7.4 Test Setup

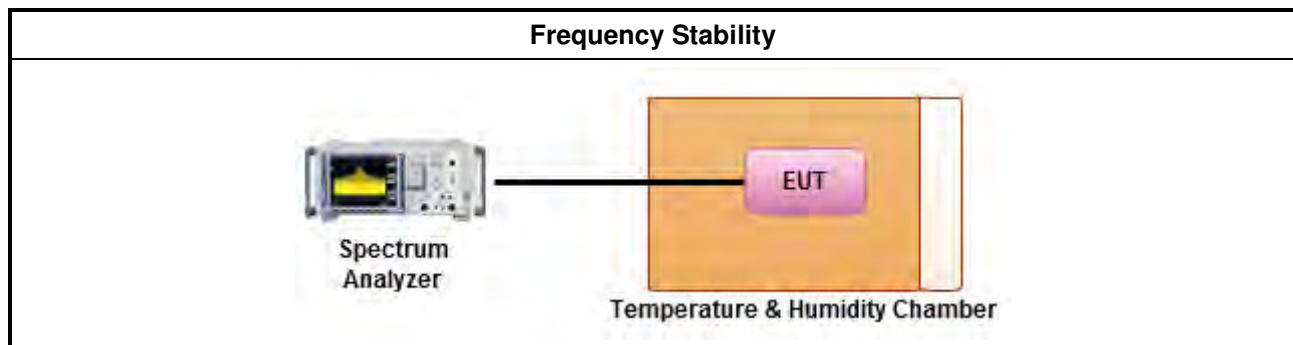

### 3.7.5 Test Result of Frequency Stability

Frequency Stability Result									
Mode		Frequency Stability (ppm)							
Condition	Freq. (MHz)	Test Frequency (MHz)				Frequency Stability (ppm)			
		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min
T20°CVmax	5180	5744.89276	5744.89190	5744.89190	5744.89146	-18.6667	-18.8164	-18.8164	-18.8930
T20°CVmin	5180	5744.89190	5744.89233	5744.89233	5744.89103	-18.8164	-18.7415	-18.7415	-18.9678
T50°CVnom	5180	5744.93401	5744.93444	5744.93444	5744.93488	-11.4865	-11.4117	-11.4117	-11.3351
T40°CVnom	5180	5744.90492	5744.90535	5744.90622	5744.90622	-16.5500	-16.4752	-16.3238	-16.3238
T30°CVnom	5180	5744.89233	5744.89276	5744.89320	5744.89363	-18.7415	-18.6667	-18.5901	-18.5152
T20°CVnom	5180	5744.89276	5744.89146	5744.89146	5744.89103	-18.6667	-18.8930	-18.8930	-18.9678
T10°CVnom	5180	5744.89711	5744.89711	5744.89667	5744.89624	-17.9095	-17.9095	-17.9861	-18.0609
T0°CVnom	5180	5744.90883	5744.90839	5744.90796	5744.90753	-15.8695	-15.9460	-16.0209	-16.0957
T-10°CVnom	5180	5744.92272	5744.92229	5744.92229	5744.92185	-13.4517	-13.5265	-13.5265	-13.6031
T-20°CVnom	5180	5744.93184	5744.93227	5744.93271	5744.93271	-11.8642	-11.7894	-11.7128	-11.7128
Limit (ppm)		-				± 20			
Result		Complied							
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom]. Note 2: The nominal voltage refer test report clause 1.1.5 for EUT operational condition.									



## 4 Test Equipment and Calibration Data

### < AC Power-line Conducted Emissions >

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 20, 2011	Apr. 19, 2012
LISN	MessTec	NNB-2/16Z	99041	9kHz ~ 30MHz	Mar. 10, 2011	Mar. 09, 2012
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	May 04, 2011	May 03, 2012
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 21, 2011	Apr. 20, 2012
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	N/A

### < RF Conducted > (5150-5250MHz band)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	R&S	FSP 30	100023	9KHz ~ 30GHz	Mar. 15, 2011	Mar. 14, 2012
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 03, 2011	Jun. 02, 2012
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Oct. 22, 2010	Oct. 21, 2011
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 02, 2010	Dec. 01, 2011
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 02, 2010	Dec. 01, 2011
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 07, 2011	Jun. 06, 2012
Power Sensor	Anritsu	MA2411B	0917017	300MHz~40GHz	Jan. 06, 2011	Jan. 05, 2012
Power Meter	Anritsu	ML2495A	0949003	300MHz~40GHz	Jan. 06, 2011	Jan. 05, 2012
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011	Jun. 08, 2012

### (5725-5850MHz band)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101500	9kHz ~ 40GHz	May 06, 2015	May 05, 2016
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	-20 ~ 100℃	Jun. 12, 2015	Jun. 11, 2016
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 28, 2015	Jul. 27, 2016
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Feb. 22, 2016	Feb. 21, 2017
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Feb. 22, 2016	Feb. 21, 2017
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jul. 22, 2015	Jul. 21, 2016

**<Radiation Emissions >  
(5150-5250MHz band)**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz ~ 40 GHz	Feb. 11, 2011	Feb. 10, 2012
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz ~ 1 GHz 3m	May 11, 2011	May 10, 2012
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz ~ 2 GHz	Jan. 25, 2011	Jan. 24, 2012
Amplifier	Agilent	8449B	3008A02120	1 GHz ~ 26.5 GHz	Aug. 04, 2011	Aug. 03, 2012
Horn Antenna	ETS-LINDGREN	3117	00091920	1 GHz ~ 18 GHz	Nov. 11, 2010	Nov. 10, 2011
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz ~ 1 GHz	Mar. 07, 2011	Mar. 06, 2012
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1 GHz ~ 40 GHz	Mar. 07, 2011	Mar. 06, 2012
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz ~ 2 GHz	Oct. 16, 2010	Oct. 15, 2011
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	N/A
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	N/A
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010	Jul. 28, 2011

**(5725-5850MHz band)**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Last Cal.	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 28, 2015	Nov. 27, 2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 18GHz 3m	Dec. 16, 2015	Dec. 15, 2016
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 11, 2015	May 10, 2016
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 02, 2015	Sep. 01, 2016
Spectrum	R&S	FSV40	101513	9kHz ~ 40GHz	Feb. 16, 2016	Feb. 15, 2017
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 18, 2015	Sep. 17, 2016
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jul. 15, 2015	Jul. 14, 2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 29, 2016	Jan. 28, 2017