




FCC RADIO TEST REPORT

Applicant : ELO TOUCH SOLUTIONS, INC.
Address : 670 N. McCarthy Blvd., Suite 100 Milpitas, CA 95035
USA
Equipment : Computer Box
Model No. : ESY00I1E
Trade Name : Elo or 
FCC ID : RBWESY00I1E

I HEREBY CERTIFY THAT :

The sample was received on Aug. 19, 2024 and the testing was completed on Oct. 26, 2024 at Cerpass Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of Cerpass Technology Corp., the test report shall not be reproduced except in full.

Approved by:

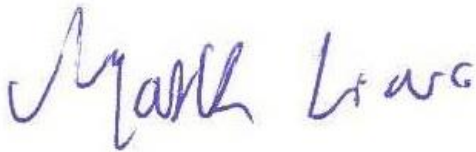

Mark Liao / Supervisor

Laboratory Accreditation:

Cerpass Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results	5
1.1 Applicable Standards	5
2. Test Configuration of Equipment under Test	6
2.1 Feature of Equipment under Test	6
2.2 Carrier Frequency of Channels	8
2.3 Test Mode and Test Software	9
2.4 Description of Test System	11
2.5 General Information of Test	12
2.6 Measurement Uncertainty	13
3. Test Equipment and Ancillaries Used for Tests	14
4. Antenna Requirements	17
4.1 Standard Applicable	17
4.2 Antenna Construction and Directional Gain	17
5. Test of AC Power Line Conducted Emission	18
5.1 Test Limit	18
5.2 Test Procedures	18
5.3 Typical Test Setup	19
5.4 Test Result and Data	20
5.5 Test Photographs	22
6. Test of Radiated Spurious Emission	23
6.1 Test Limit	23
6.2 Test Procedures	24
6.3 Typical Test Setup	25
6.4 Test Result and Data (9KHz ~ 30MHz)	27
6.5 Test Result and Data (30MHz ~ 1GHz)	27
6.6 Test Result and Data (1GHz ~ 25GHz)	29
6.7 Restricted Bands of Operation	53
6.8 Test Photographs (30MHz ~ 1GHz)	54
6.9 Test Photographs (1GHz ~ 25GHz)	55
7. Test of Conducted Spurious Emission	57
7.1 Test Limit	57
7.2 Test Procedure	57
7.3 Test Setup Layout	57
7.4 Test Result and Data	57
8. On Time, Duty Cycle and Measurement methods	68
8.1 Test Limit	68
8.2 Test Procedure	68
8.3 Test Setup Layout	68
8.4 Test Result and Data	68
9. 6dB Bandwidth Measurement Data	70
9.1 Test Limit	70
9.2 Test Procedures	70



9.3	Test Setup Layout	70
9.4	Test Result and Data.....	71
10.	Maximum Average Output Power	76
10.1	Test Limit	76
10.2	Test Procedures	76
10.3	Test Setup Layout	76
10.4	Test Result and Data.....	77
11.	Power Spectral Density	79
11.1	Test Limit	79
11.2	Test Procedures	79
11.3	Test Setup Layout	79
11.4	Test Result and Data.....	80
12.	Radio Frequency Exposure	85
12.1	Applicable Standards	85
12.2	EUT Specification.....	86
12.3	Result	87



History of this test report

Report No.	Issued Date	Description
24080253-TRFCC03	Nov. 06, 2024	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	PASS
15.207	. AC Power Line Conducted Emission	PASS
15.209 15.205	. Radiated Spurious Emission	PASS
15.247(d)	. Conducted Spurious Emission	PASS
15.247(a)(2)	. 6dB Bandwidth	PASS
15.247(b)	. Output Power	PASS
15.247(e)	. Power Spectral Density	PASS
2.1091	. Radio Frequency Exposure	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Operation Frequency Range	BT / BLE: 2400-2483.5MHz WLAN:802.11b/g/n/ax: 2400-2483.5MHz 5GHz:802.11a/n/ac/ax:5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz 6GHz: 802.11a/ax: 5925MHz~6425MHz, 6425MHz~6525MHz 6525MHz~6875MHz, 6875MHz~7125MHz
Center Frequency Range	BT / BLE: 2402MHz-2480MHz WLAN:802.11b/g/n/ax: 2412MHz-2462MHz 5GHz:802.11a/n/ac/ax:5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz 6GHz: 802.11a/ax: 5955MHz~6415MHz, 6435MHz~6515MHz 6535MHz~6855MHz, 6895MHz~7115MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz: 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 6GHz: 802.11a: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS, OFDMA
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, 2Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ax: MCS0 – MCS11, HE20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/160 802.11ax: MCS0 – MCS11, HE20/40/80/160 6GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ax: MCS0 – MCS11, HE20/40/80/160
Antenna Type	Dipole Antenna



Antenna Gain	For BT / BLE: 2402-2480MHz: ANT A: 3dBi For WLAN: 2412-2462MHz: ANT A: 3dBi, ANT B: 3dBi 5180-5240MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5260-5320MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5500-5700MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5745-5825MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5945~6425MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 6425~6525MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 6525~6875MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 6875~7125MHz: ANT A: 3.5dBi, ANT B: 3.5dBi
Adapter	Brand: Billion Model: BA070-190342MBX
Adapter	Brand: Delta Model: ADP-65JH HB
Power cord (US)	Brand: I-SHENG Model: V44VS336T1218000-A01
Power cord (EU)	Brand: I-SHENG Model: EU85B300S121800

Note:

- 1.EUT support TPC Function.
- 2.WLAN and BT can simultaneously transmission.
- 3.EUT supports DFS Client Mode, without radar detection.
- 4.The device not support Channel Puncturing or Bandwidth Reduction mechanisms supported.
- 5.802.11ax EUT only Support Full RU.
- 6.EUT Operating mode: Indoor Client.
- 7.For more details, please refer to the User's manual of the EUT.



2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT20, 802.11ax HE20 (2412MHz-2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
*01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	*11	2462
*06	2437	---	---

802.11n HT40, 802.11ax HE40 (2422MHz-2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
*03	2422	*09	2452
04	2427	---	---
05	2432	---	---
*06	2437	---	---

Note: Channels remarked * are selected to perform test.



2.3 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- The complete test system included remote workstation and EUT for RF test. The remote workstation included Notebook.
- An executive program, "QRCT V4.0.211.0" under Windows OS system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	802.11b (1Mbps), From Adapter
2	802.11g (6Mbps), From Adapter
3	802.11ax HE20 (7.3Mbps), From Adapter
4	802.11ax HE40 (14.6Mbps), From Adapter
caused "Test Mode 3" generated the worst case, it was reported as the final data.	
Radiation Emissions (9KHz ~30MHz & 30MHz ~ 1GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps), Power from Adapter
2	802.11g (6Mbps), Power from Adapter
3	802.11ax HE20 (7.3Mbps), From Adapter
4	802.11ax HE40 (14.6Mbps), From Adapter
caused "Test Mode 3" generated the worst case, they were reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	802.11b (1Mbps), Power from Adapter
2	802.11g (6Mbps), Power from Adapter
3	802.11ax HE20 (7.3Mbps), From Adapter
4	802.11ax HE40 (14.6Mbps), From Adapter
caused "Test Mode 1~4" generated the worst case, they were reported as the final data.	

Note:1. There are two kinds of test voltage: AC 120V / 60Hz and AC 240V / 60Hz.
worst case (V)

Test Item /test voltage	AC 120V / 60Hz	AC 240V / 60Hz.
AC Power Line Conducted Emission: SISO ANT/ MIMO ANT	V	
Radiation Emissions (Below 1GHz) : SISO ANT/ MIMO ANT	V	

2.The EUT has Two types of Adapters. After engineering evaluation,

For AC Power Line Conducted Emission, ADP-65JH HB is worst case.

For Radiated Spurious Emission(9kHz~30MHz,30MHz~1GHz), BA070-190342MBX is worst case.

For Radiated Spurious Emission(1GHz~40GHz), ADP-65JH HB is worst case., hence, are used at test report

Adapter	Brand: Billion Model: BA070-190342MBX
Adapter	Brand: Delta Model: ADP-65JH HB



The EUT incorporates a MIMO function

Modulation Type	TX CONFIGURATION
802.11b	1TX(Diversity)
802.11g	1TX(Diversity)
802.11n HT20	2TX
802.11n HT40	2TX
802.11ax HE20	2TX
802.11ax HE40	2TX



2.4 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	lenovo	S1GL2W	N/A	N/A
USB Cable (A to A)	BENEVO	E210567AWM	1m / NS	N/A

Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	DELL	Latitude E5470	N/A	Adapter / 1.8m / NS
USB Cable (A to A)	BENEVO	E210567AWM	1m / NS	N/A
Flash*2	TranScend	USB3.0 16GB	N/A	N/A
Monitor	LG	24UD58	N/A	N/A
HDMI Cable	J5Create	HDMI 8K	1.8m / NS	N/A
TYPE-C(Blue)	kolin	KEX-DLCP08	1m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
MicroSDHC	ADATA	8G	N/A	N/A
Mouse	DELL	MS116t	1.85m / NS	N/A

AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
USB Cable (A to A)	BENEVO	E210567AWM	1m / NS	N/A
Notebook	Lenovo	S1GL2W	N/A	Adapter / 1.8m / NS
Monitor	LG	24UD58	N/A	N/A
HDMI Cable	YD-TECH	H1	1.8m / S	N/A
Mouse	Micsoft	MSK-1113	1.85m / S	N/A



2.5 General Information of Test

☒ Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 9kHz to 25,000MHz	
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.	

ANT A

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/09/27	27.4°C / 45%	Leon Huang
RF Conducted	RFCON01-NK	2024/09/30	27.8°C / 51%	Leon Huang
Radiated Emissions	3M02-NK	2024/09/30	21.8°C / 53%	Park Chen
Radiated Emissions	3M02-NK	2024/10/26	23.1°C / 53%	Park Chen

ANT B

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/09/27	27.4°C / 45%	Leon Huang
RF Conducted	RFCON01-NK	2024/09/30	27.8°C / 51%	Leon Huang

ANT A , B

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
RF Conducted	RFCON01-NK	2024/09/30	27.8°C / 51%	Leon Huang
RF Conducted	RFCON01-NK	2024/10/01	25.5°C / 46%	Leon Huang
Radiated Emissions	3M02-NK	2024/09/30	21.8°C / 53%	Park Chen
Radiated Emissions	3M02-NK	2024/10/26	23.1°C / 53%	Park Chen
AC Power Line Conducted Emission	CON02-NK	2024/10/07	24°C / 62%	Leon Huang



2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.12dB
Radiated Spurious Emission(9KHz~30MHz)	±3.5dB
Radiated Spurious Emission(30MHz~1GHz)	±5.1dB
Radiated Spurious Emission(1GHz~40GHz)	±5.2dB
Conducted Spurious Emission	±2.1dB
6dB Bandwidth	±5.4%
20dB Bandwidth	±4.4%
Occupied Bandwidth	±4.5%
Peak Output Power(Conducted Power Meter)	±1.1dB
Dwell Time / Deactivation Time	±7.6%
Power Spectral Density	±2.0dB
Duty Cycle	±3.5%



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK) (2024/9/30)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2024/02/19	2025/02/18
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2024/01/16	2025/01/15
Horn Antenna	EMCO	3115	31589	2024/02/26	2025/02/25
Horn Antenna	EMCO	3116	31974	2023/10/16	2024/10/15
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2024/07/16	2025/07/15
Preamplifier	Agilent	8449B	3008A01954	2024/03/01	2025/02/28
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2023/10/13	2024/10/12
Preamplifier	EM Electronics corp.	EM330	60659	2024/02/17	2025/02/16
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2024/02/23	2025/02/22
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2024/03/05	2025/03/04
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2024/03/05	2025/03/04
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2024/03/05	2025/03/04
Cable-1m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	804398/2	2023/10/12	2024/10/11
Cable-3m(1G-40G)	HUBER SUHNER	HUBER SUHNER / SF102	804619/2	2023/10/12	2024/10/11
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC 2J1	2024/07/03	2025/07/02
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFW C4M1	2024/03/11	2025/03/10
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFW C2J1	2024/03/11	2025/03/10



Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)(2024/10/26)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	369	2024/02/19	2025/02/18
Active Loop Antenna	Schwarzbeck	FMZB 1513	414	2024/01/16	2025/01/15
Horn Antenna	EMCO	3115	31589	2024/02/26	2025/02/25
Horn Antenna	EMCO	3116	31970	2024/02/23	2025/02/22
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2024/07/16	2025/07/15
Preamplifier	Agilent	8449B	3008A01954	2024/03/01	2025/02/28
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2024/10/15	2025/10/14
Preamplifier	EM Electronics corp.	EM330	60659	2024/02/17	2025/02/16
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2024/02/23	2025/02/22
Cable-0.5m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2024/03/05	2025/03/04
Cable-3m(1G-40G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2024/03/05	2025/03/04
Cable-8m(1G-26.5G)	WOKEN	WCBA-WCA203SM	CCE1374	2024/03/05	2025/03/04
Cable-3m(10M-40G)	HUBER SUHNER	SF102	804619/2	2024/10/14	2025/10/13
Cable-1m(10M-40G)	HUBER SUHNER	SF102	804398/2	2024/10/14	2025/10/13
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
High Pass Filter	Warison	WFIL-H3000-18000F-03	WRJ5CFWC 2J1	2024/07/03	2025/07/02
Notch Filter	Warison	WFIL-N5925-7125F-04	WRQ4BFW C4M1	2024/03/11	2025/03/10
Hipass Filter	Warison	WFIL-H7500-18000F	WRQ4BFW C2J1	2024/03/11	2025/03/10

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2023/11/06	2024/11/05
Power Meter	Anritsu	ML2495A	1224005	2024/02/17	2025/02/16
Power Sensor	Anritsu	MA2411B	1207295	2024/02/17	2025/02/16
Attenuator	KEYSIGHT	8491B	MY39250703	2024/02/20	2025/02/19



Test Item	AC Power Line Conducted Emission				
Test Site	CON02-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESR 7	101906	2024/05/13	2025/05/12
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127740	2024/08/27	2025/08/26
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	102185	2024/08/27	2025/08/26
Cable-4m(9k-3G)	EMEC	RG-223	18274M	2024/08/08	2025/08/07
E3	AUDIX	v8.2014-8-6	RK-000536	NA	NA



4. Antenna Requirements

4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2 Antenna Construction and Directional Gain

Antenna Type	Dipole Antenna
Antenna Gain	2412-2462MHz: ANT A: 3dBi, ANT B: 3dBi

(Non-Beamforming)

SISO ANT A

2412-2462MHz

For Power directional gain= G_{ant} = 3.00 dBi

For PSD directional gain = G_{ant} = 3.00 dBi

SISO ANT B

2412-2462MHz

For Power directional gain= G_{ant} = 3.00 dBi

For PSD directional gain = G_{ant} = 3.00 dBi

MIMO

2412-2462MHz

For Power directional gain= G_{ant} = 3.00 dBi

For PSD directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2 / N_{ANT}]$
= 6.01 (dBi)

*MIMO type: Cyclic Delay Diversity (CDD) mode.



5. Test of AC Power Line Conducted Emission

5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

5.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



5.3 Typical Test Setup

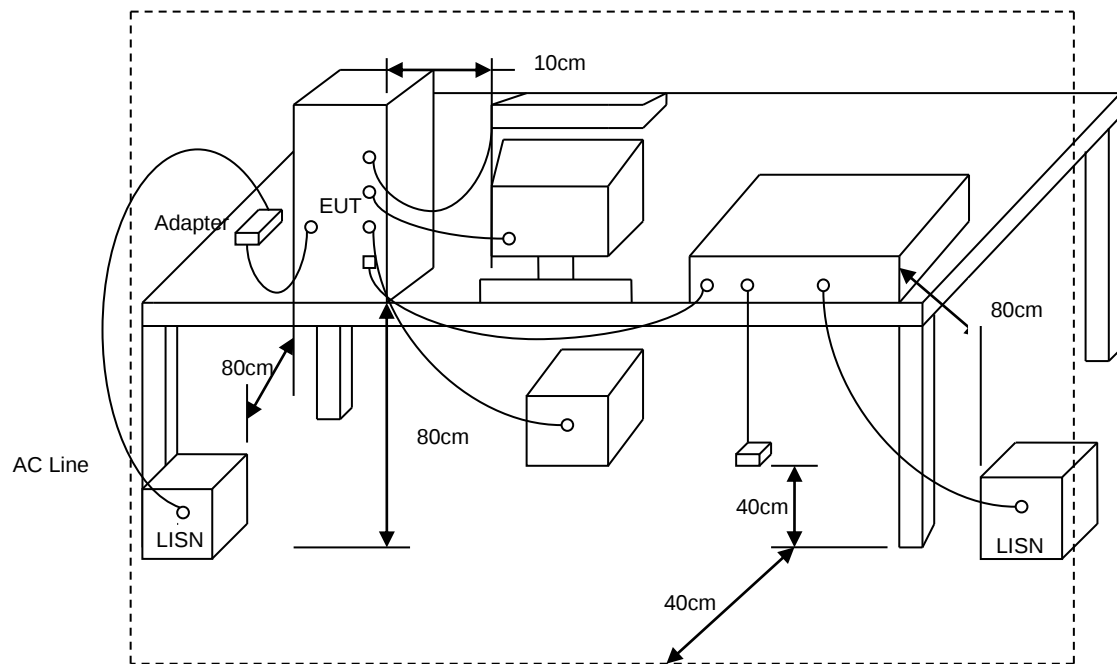




5.4 Test Result and Data

MIMO

Test Mode : 2TX 11ax20 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Phase : Line

Data: 3

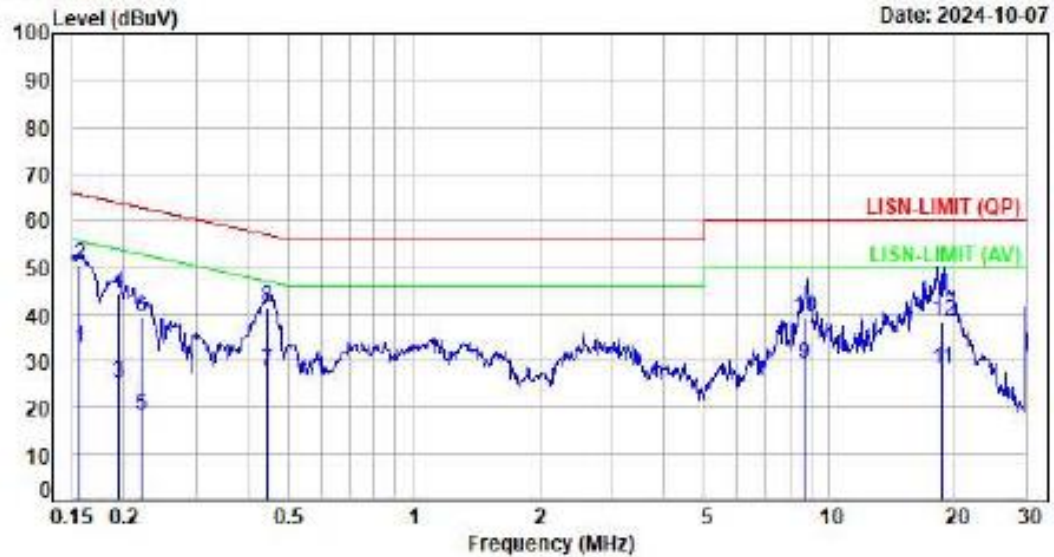

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1565	9.63	22.90	32.53	55.65	-23.12	Average	P
2	0.1565	9.63	40.80	50.43	65.65	-15.22	QP	P
3	0.1941	9.63	15.28	24.91	53.86	-28.95	Average	P
4	0.1941	9.63	34.90	44.53	63.86	-19.33	QP	P
5	0.2214	9.63	8.51	18.14	52.76	-34.62	Average	P
6	0.2214	9.63	29.63	39.26	62.76	-23.50	QP	P
7	0.4427	9.65	18.28	27.93	47.81	-19.88	Average	P
8	0.4427	9.65	31.62	41.27	57.81	-15.74	QP	P
9	8.6682	9.82	19.60	29.42	50.00	-20.58	Average	P
10	8.6682	9.82	29.18	39.00	60.00	-21.00	QP	P
11	18.6462	9.90	18.08	27.98	50.00	-22.02	Average	P
12	18.6462	9.90	28.59	38.49	60.00	-21.51	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 2TX 11ax20 CH06 NSS1 MCS0
Voltage : From Adapter(AC 120V/60Hz)
Phase : Neutral

Data: 4

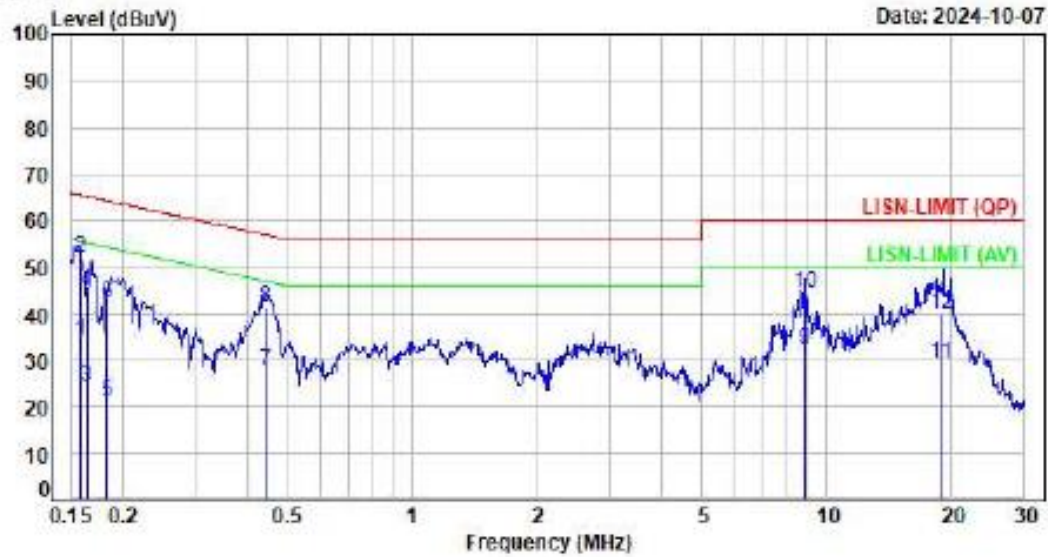

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1576	9.61	24.73	34.34	55.59	-21.25	Average	P
2	0.1576	9.61	42.31	51.92	65.59	-13.67	QP	P
3	0.1634	9.61	14.68	24.29	55.29	-31.00	Average	P
4	0.1634	9.61	35.12	44.73	65.29	-20.56	QP	P
5	0.1825	9.61	11.46	21.07	54.37	-33.30	Average	P
6	0.1825	9.61	32.56	42.17	64.37	-22.20	QP	P
7	0.4427	9.62	18.38	27.92	47.01	-19.09	Average	P
8	0.4427	9.62	31.92	41.54	57.01	-15.47	QP	P
9	8.8408	9.81	22.64	32.45	50.00	-17.55	Average	P
10	8.8408	9.81	34.62	44.43	60.00	-15.57	QP	P
11	18.8238	9.97	19.16	29.13	50.00	-20.87	Average	P
12	18.8238	9.97	29.80	39.77	60.00	-20.23	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



6. Test of Radiated Spurious Emission

6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



6.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.


Note:

- 1.The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(Y-AXIS is the worst.)
- 2.Due to the test software function limit the operation band setting(200dBuV/m).
There's no corresponding limitation in the actual test item.




6.3 Typical Test Setup

Below 30MHz test setup

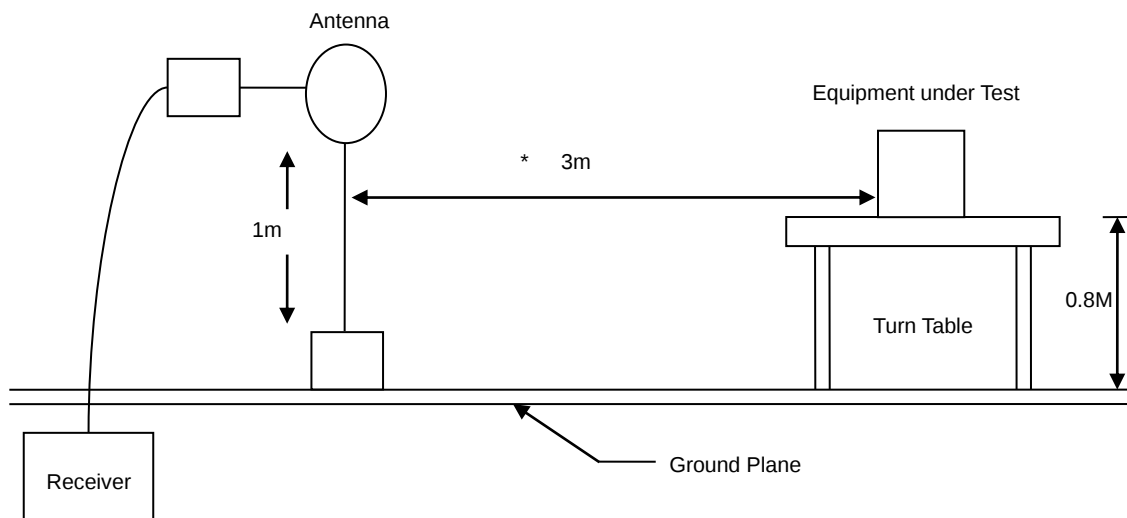


30MHz- 1GHz Test Setup

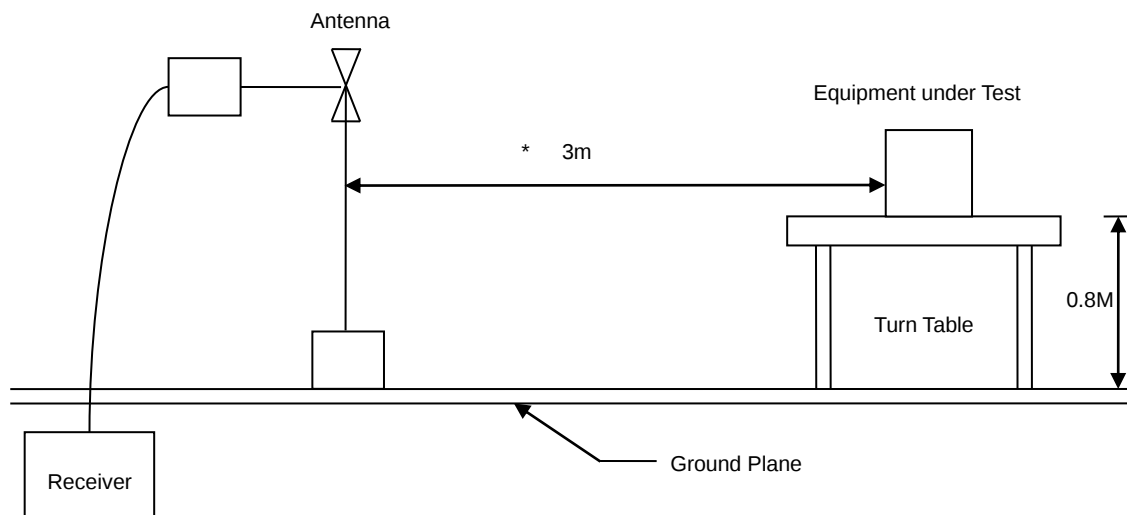



Above 1GHz Test Setup

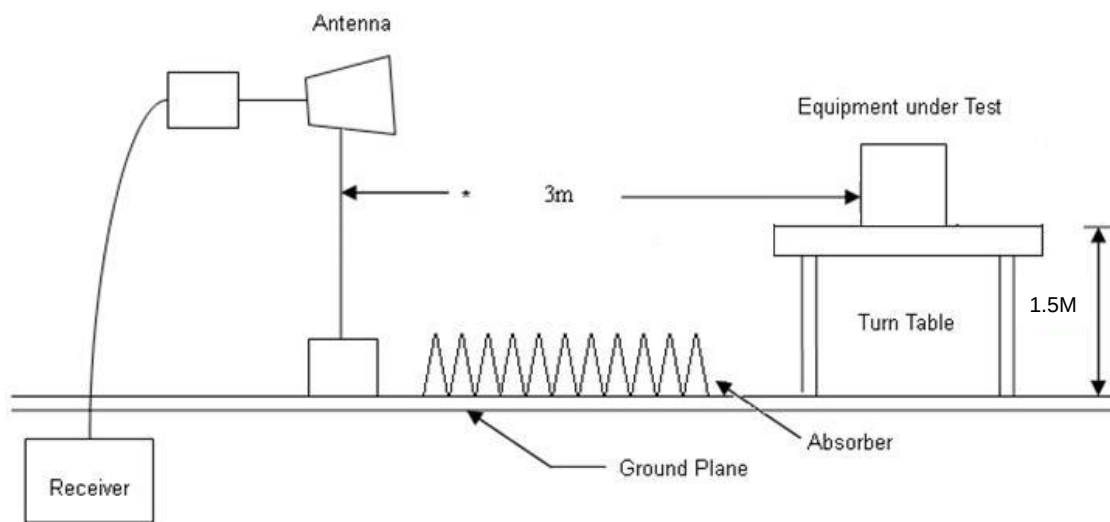




6.4 Test Result and Data (9KHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

6.5 Test Result and Data (30MHz ~ 1GHz)

MIMO

Test Mode : 2TX 11ax20 CH06 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

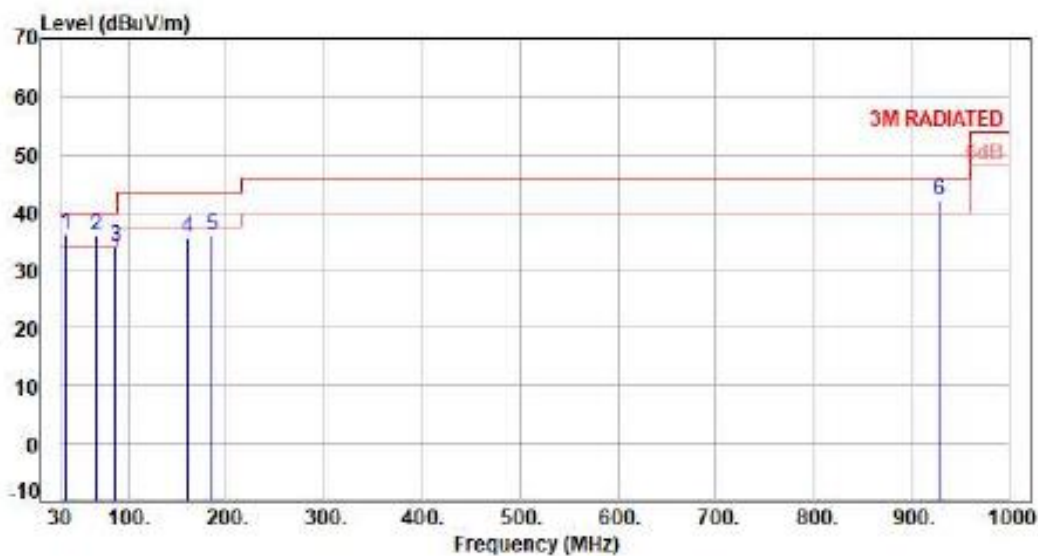

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	35.82	-10.22	46.44	36.22	40.00	-3.78	Peak	400	0	P
2	66.86	-10.99	47.04	36.05	40.00	-3.95	QP	100	221	P
3	86.26	-15.85	50.04	34.19	40.00	-5.81	Peak	400	0	P
4	159.98	-9.39	45.16	35.77	43.50	-7.73	Peak	400	0	P
5	185.20	-11.17	47.14	35.97	43.50	-7.53	Peak	400	0	P
6	928.22	4.41	37.51	41.92	46.00	-4.08	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11x20 CH06 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

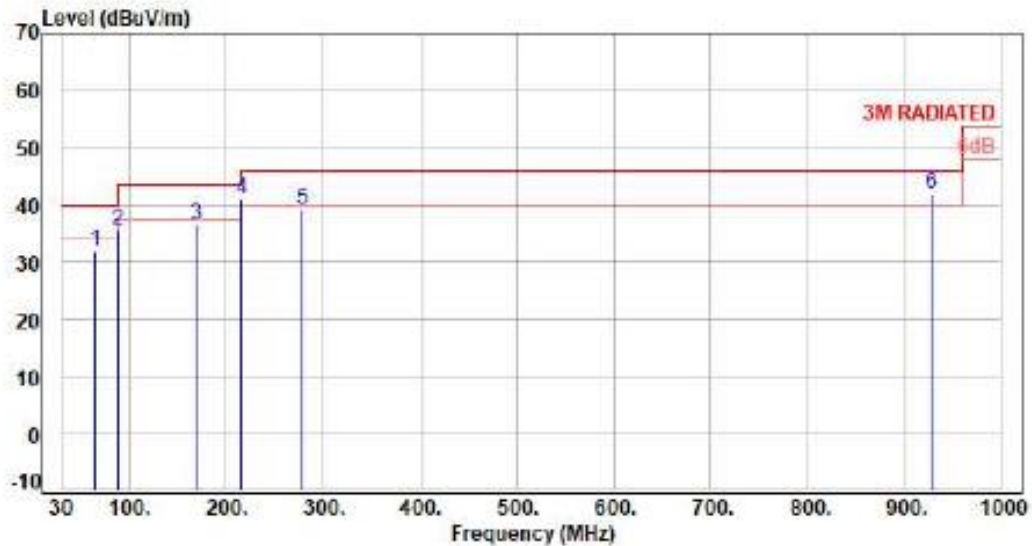

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	64.92	-10.48	42.50	32.02	46.00	-7.98	Peak	100	360	P
2	88.20	-15.96	51.54	35.58	46.00	-7.92	Peak	100	360	P
3	169.68	-9.71	46.33	36.62	46.00	-6.88	Peak	100	360	P
4	216.24	-11.95	52.96	41.01	46.00	-4.99	Peak	100	360	P
5	278.32	-9.27	48.41	39.14	46.00	-6.86	Peak	100	360	P
6	928.22	4.41	37.52	41.93	46.00	-4.07	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



6.6 Test Result and Data (1GHz ~ 25GHz)

SISO ANT A

Test Mode : ITX 11b CH01 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

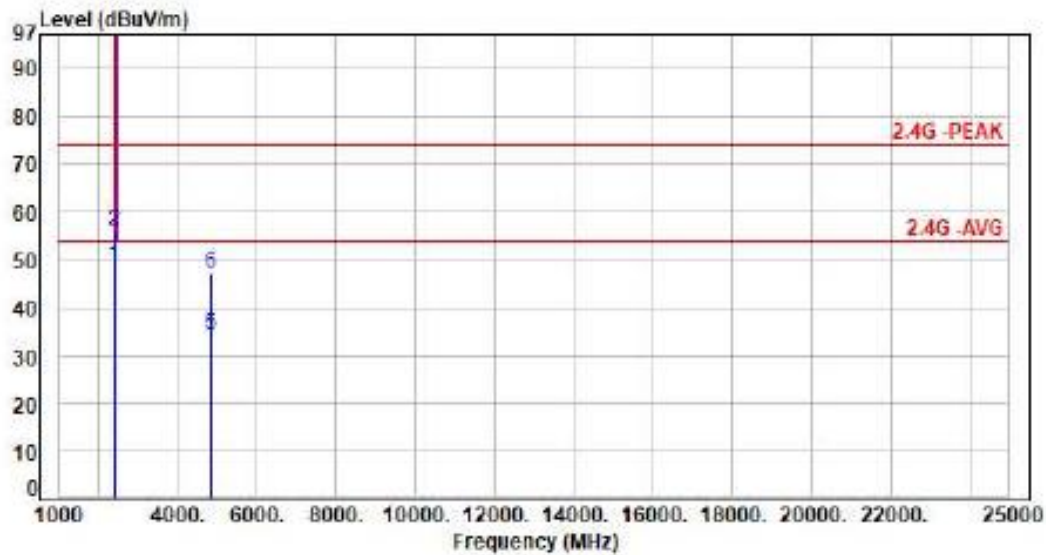

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	51.09	48.76	54.00	-5.24	Average	189	82	P
2	2390.00	-2.33	58.43	56.10	74.00	-17.90	Peak	189	82	P
3	2412.00	-2.29	109.91	107.62	200.00	-92.38	Average	189	82	P
4	2412.00	-2.29	112.46	110.17	200.00	-89.83	Peak	189	82	P
5	4824.00	5.95	28.52	34.47	54.00	-19.53	Average	100	151	P
6	4824.00	5.95	41.16	47.11	74.00	-26.89	Peak	100	151	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH01 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

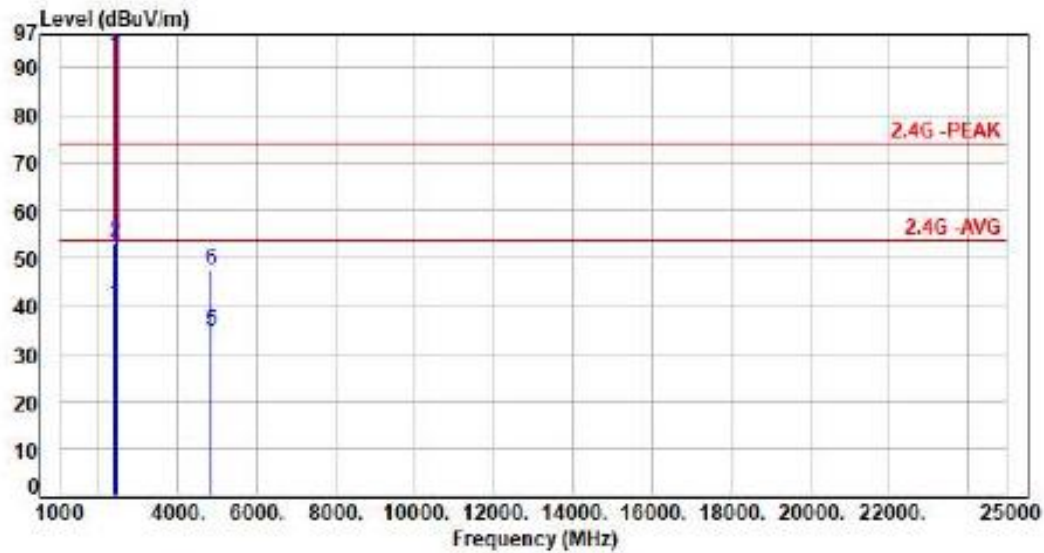

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2398.00	-2.33	42.55	40.22	54.00	-13.78	Average	337	303	P
2	2398.00	-2.33	55.41	53.08	74.00	-20.92	Peak	337	303	P
3	2412.00	-2.29	96.74	94.45	200.00	-105.55	Average	337	303	P
4	2412.00	-2.29	99.34	97.05	200.00	-102.95	Peak	337	303	P
5	4824.00	5.95	28.71	34.66	54.00	-19.34	Average	100	172	P
6	4824.00	5.95	41.57	47.52	74.00	-26.48	Peak	100	172	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH86 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

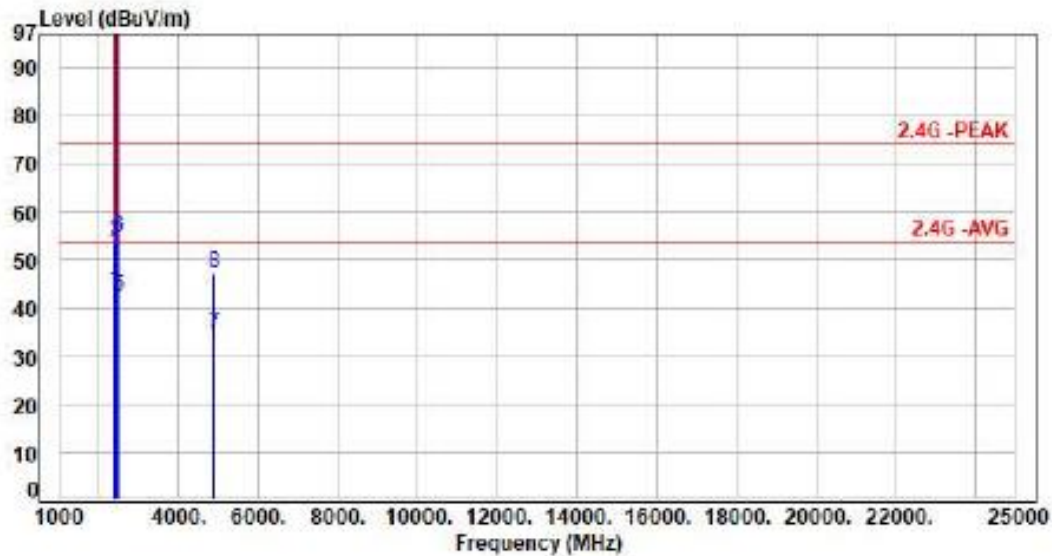

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	45.86	43.53	54.00	-10.47	Average	203	199	P
2	2390.00	-2.33	56.23	53.90	74.00	-20.10	Peak	203	199	P
3	2437.00	-2.17	108.87	106.70	200.00	-93.30	Average	203	199	P
4	2437.00	-2.17	111.43	109.26	200.00	-90.74	Peak	203	199	P
5	2483.50	-2.01	44.46	42.45	54.00	-11.55	Average	203	199	P
6	2483.50	-2.01	56.67	54.66	74.00	-19.34	Peak	203	199	P
7	4874.00	6.10	28.60	34.70	54.00	-19.30	Average	100	157	P
8	4874.00	6.10	41.27	47.37	74.00	-26.63	Peak	100	157	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11b CH06 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

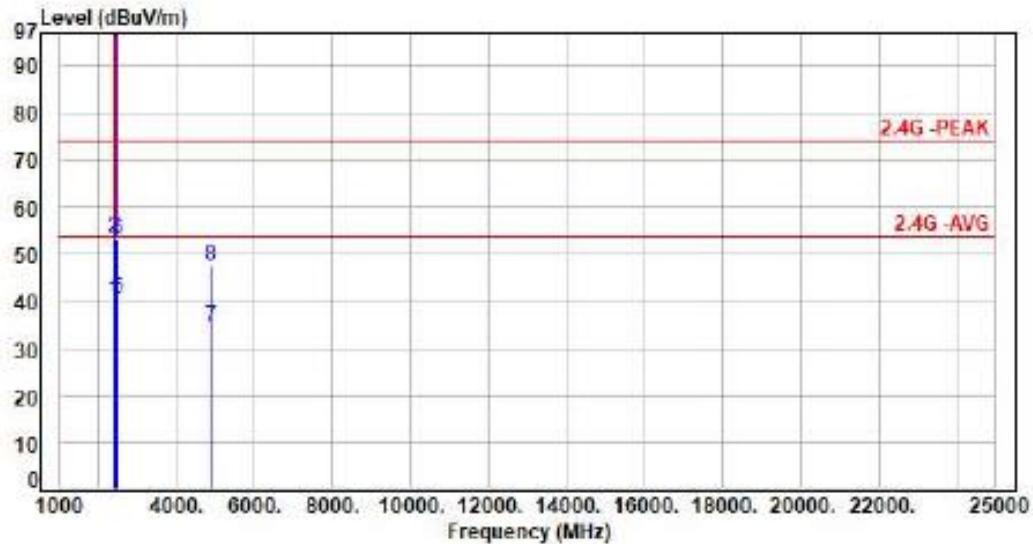

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	42.36	40.03	54.00	-13.97	Average	113	41	P
2	2390.00	-2.33	55.65	53.32	74.00	-20.68	Peak	113	41	P
3	2437.00	-2.17	97.17	95.00	200.00	-105.00	Average	113	41	P
4	2437.00	-2.17	99.81	97.64	200.00	-102.36	Peak	113	41	P
5	2483.50	-2.01	42.49	40.48	54.00	-13.52	Average	113	41	P
6	2483.50	-2.01	55.14	53.13	74.00	-20.87	Peak	113	41	P
7	4874.00	6.10	28.55	34.65	54.00	-19.35	Average	100	172	P
8	4874.00	6.10	41.38	47.48	74.00	-26.52	Peak	100	172	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11b CH11 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

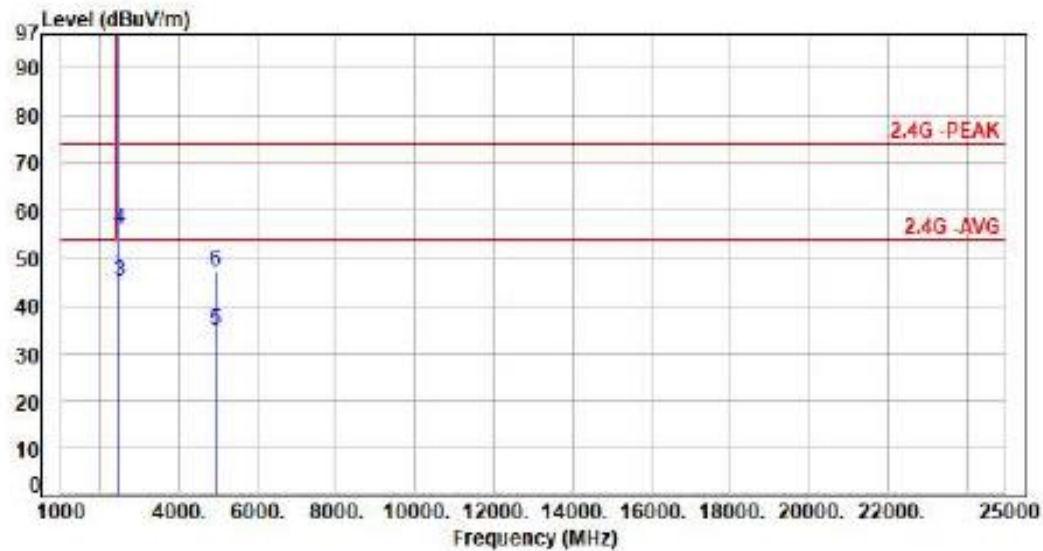

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	108.70	106.66	200.00	-93.34	Average	188	189	P
2	2462.00	-2.04	111.26	109.22	200.00	-90.78	Peak	188	189	P
3	2483.50	-2.01	47.10	45.09	54.00	-8.91	Average	188	189	P
4	2483.50	-2.01	57.94	55.93	74.00	-18.07	Peak	188	189	P
5	4924.00	6.26	28.47	34.73	54.00	-19.27	Average	100	153	P
6	4924.00	6.26	41.12	47.38	74.00	-26.62	Peak	100	153	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11b CH11 1Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

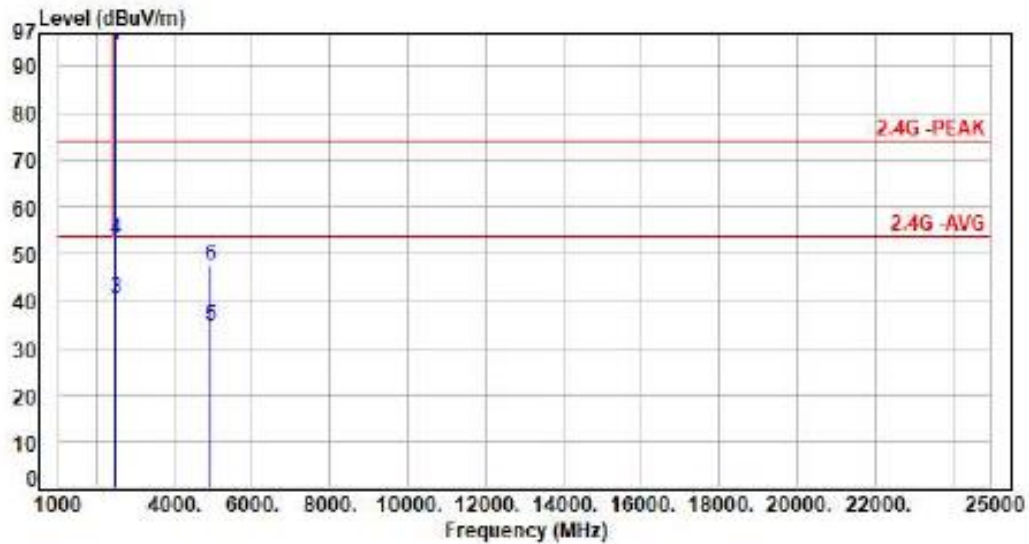

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	96.39	94.35	200.00	-105.65	Average	119	42	P
2	2462.00	-2.04	99.03	96.99	200.00	-103.01	Peak	119	42	P
3	2483.50	-2.01	42.69	40.68	54.00	-13.32	Average	119	42	P
4	2483.50	-2.01	55.02	53.01	74.00	-20.99	Peak	119	42	P
5	4924.00	6.26	28.57	34.83	54.00	-19.17	Average	100	177	P
6	4924.00	6.26	41.26	47.52	74.00	-26.48	Peak	100	177	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

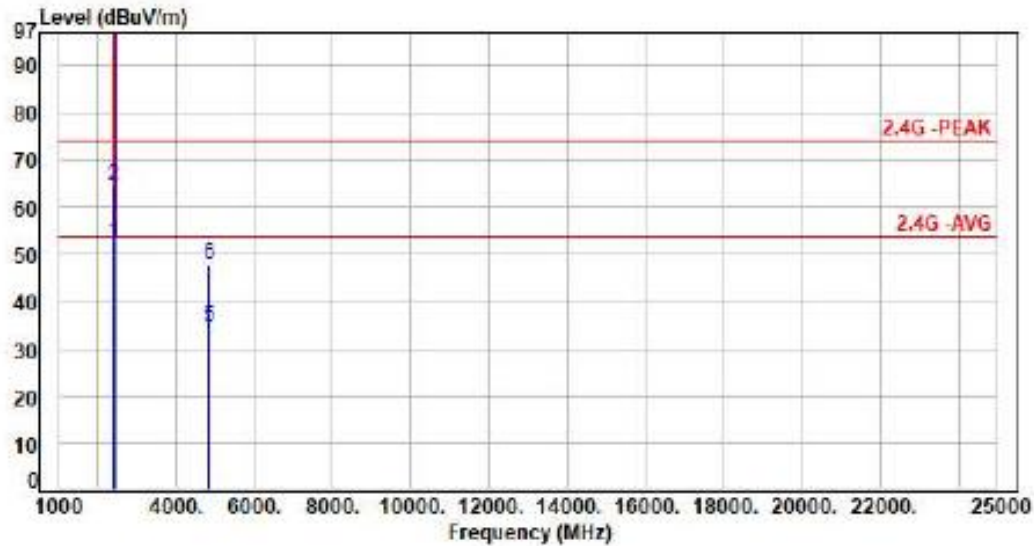

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	54.71	52.38	54.00	-1.62	Average	187	82	P
2	2390.00	-2.33	66.84	64.51	74.00	-9.49	Peak	187	82	P
3	2412.00	-2.29	103.85	101.56	200.00	-98.44	Average	187	82	P
4	2412.00	-2.29	113.26	110.97	200.00	-89.03	Peak	187	82	P
5	4824.00	5.95	28.56	34.51	54.00	-19.49	Average	100	156	P
6	4824.00	5.95	41.84	47.79	74.00	-26.21	Peak	100	156	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH01 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

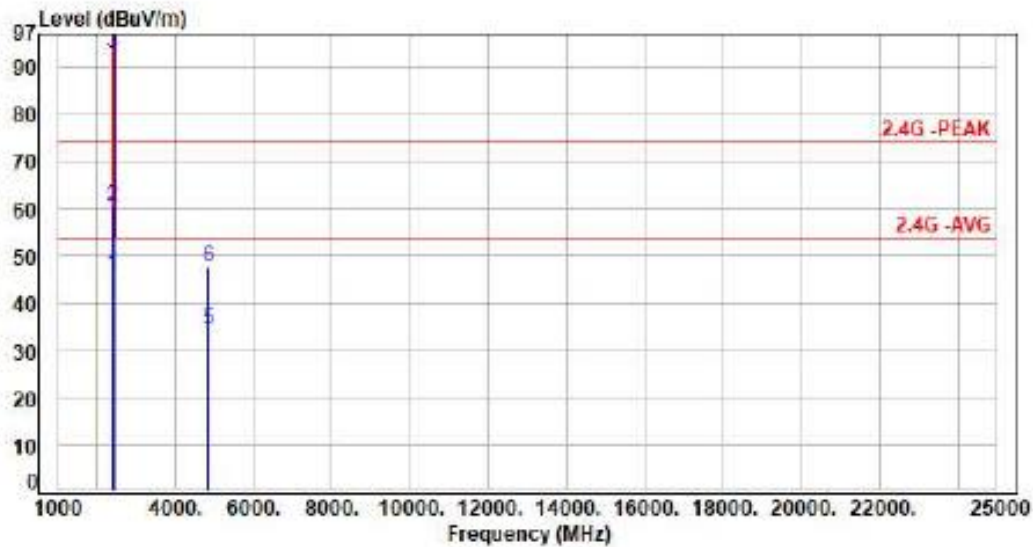

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	48.50	46.17	54.00	-7.83	Average	100	305	P
2	2390.00	-2.33	62.94	60.61	74.00	-13.39	Peak	100	305	P
3	2412.00	-2.29	95.41	93.12	200.00	-106.88	Average	100	305	P
4	2412.00	-2.29	104.77	102.48	200.00	-97.52	Peak	100	305	P
5	4824.00	5.95	28.51	34.46	54.00	-19.54	Average	100	173	P
6	4824.00	5.95	41.68	47.63	74.00	-26.37	Peak	100	173	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

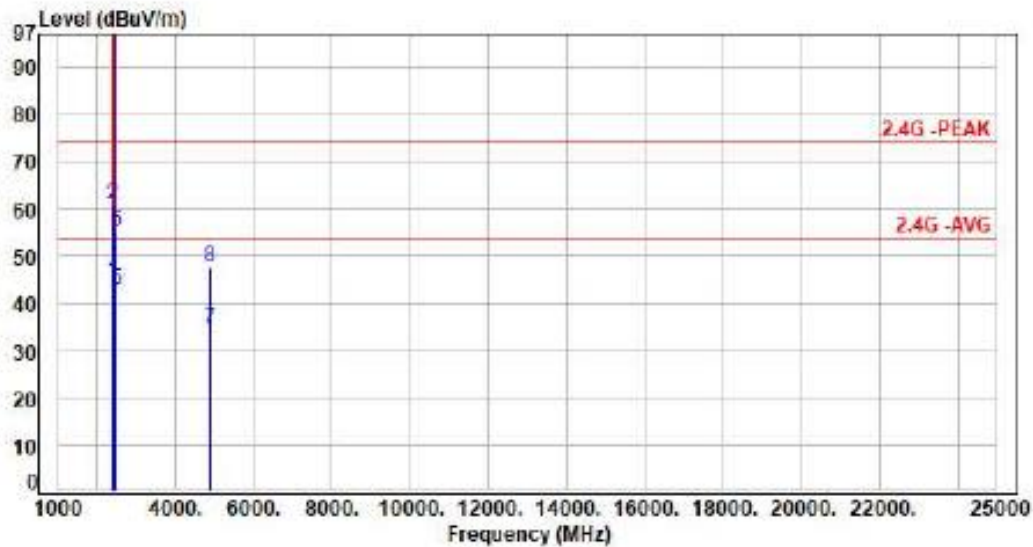

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	47.03	44.70	54.00	-9.30	Average	205	199	P
2	2390.00	-2.33	63.13	60.80	74.00	-13.20	Peak	205	199	P
3	2437.00	-2.17	105.46	103.29	200.00	-96.71	Average	205	199	P
4	2437.00	-2.17	115.98	113.81	200.00	-86.19	Peak	205	199	P
5	2483.50	-2.01	44.91	42.90	54.00	-11.10	Average	205	199	P
6	2483.50	-2.01	57.35	55.34	74.00	-18.66	Peak	205	199	P
7	4874.00	6.10	28.60	34.70	54.00	-19.30	Average	100	152	P
8	4874.00	6.10	41.32	47.42	74.00	-26.58	Peak	100	152	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH06 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

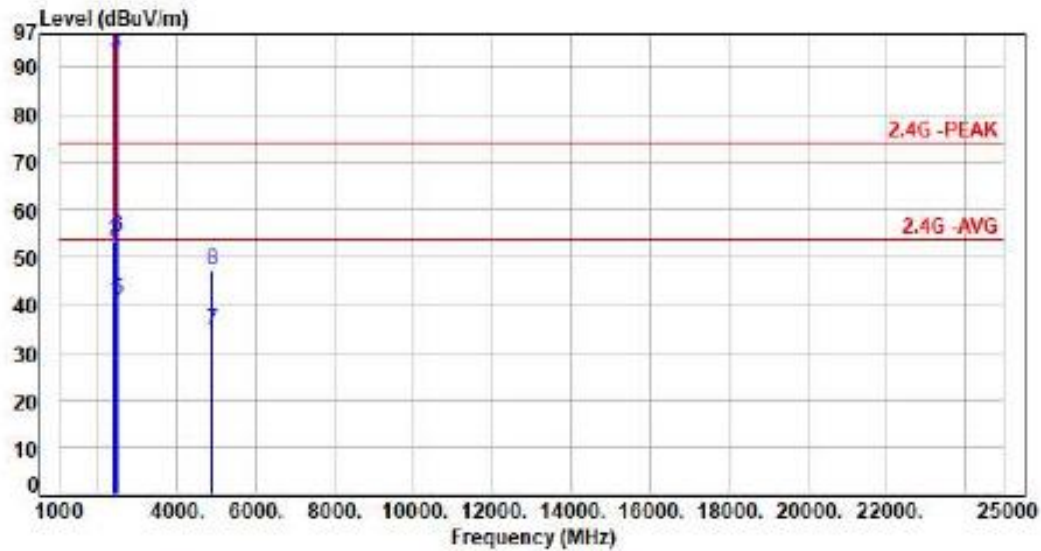

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2390.00	-2.33	42.81	40.48	54.00	-13.52	Average	111	328	P
2	2390.00	-2.33	55.72	53.39	74.00	-20.61	Peak	111	328	P
3	2437.00	-2.17	95.01	92.84	200.00	-107.16	Average	111	328	P
4	2437.00	-2.17	104.24	102.07	200.00	-97.93	Peak	111	328	P
5	2483.50	-2.01	42.85	40.84	54.00	-13.16	Average	111	328	P
6	2483.50	-2.01	56.35	54.34	74.00	-19.66	Peak	111	328	P
7	4874.00	6.10	28.59	34.69	54.00	-19.31	Average	100	175	P
8	4874.00	6.10	41.27	47.37	74.00	-26.63	Peak	100	175	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : ITX 11g CH11 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

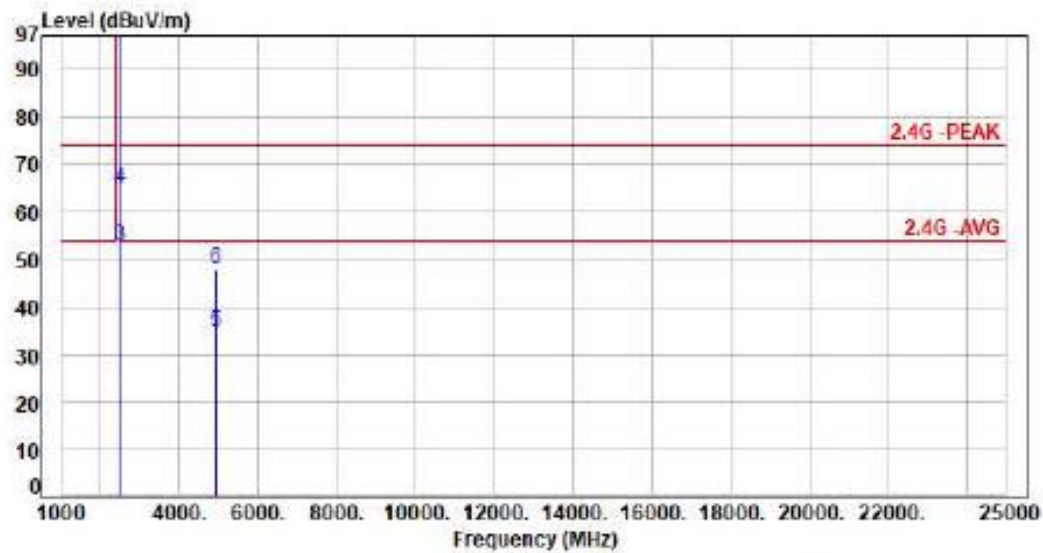

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	104.02	101.98	200.00	-98.02	Average	191	189	P
2	2462.00	-2.04	114.09	112.05	200.00	-87.95	Peak	191	189	P
3	2483.50	-2.01	54.70	52.69	54.00	-1.31	Average	191	189	P
4	2483.50	-2.01	66.94	64.93	74.00	-9.07	Peak	191	189	P
5	4924.00	6.26	28.26	34.52	54.00	-19.48	Average	100	158	P
6	4924.00	6.26	41.68	47.94	74.00	-26.06	Peak	100	158	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11g CH11 6Mbps
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

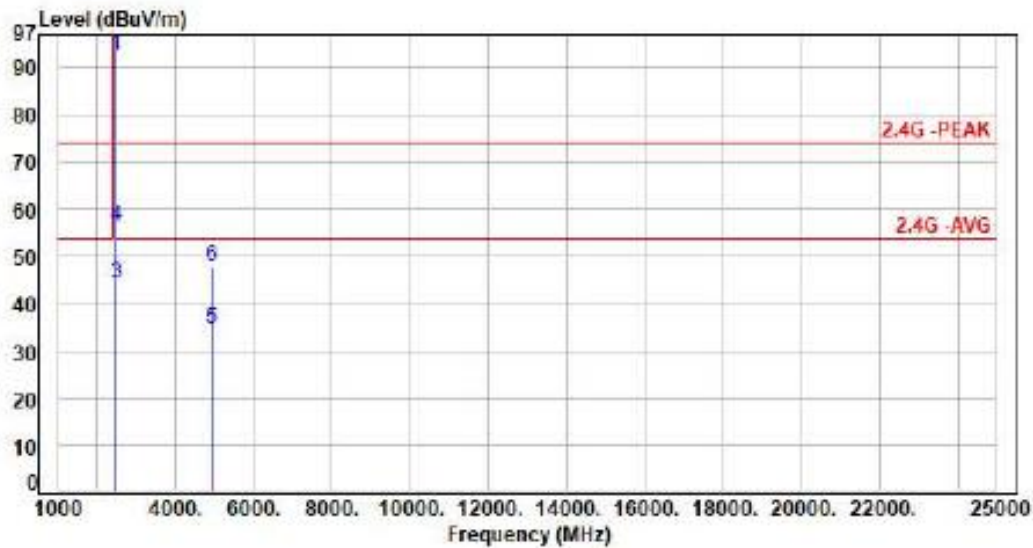

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2462.00	-2.04	94.51	92.47	200.00	-107.53	Average	100	329	P
2	2462.00	-2.04	103.63	101.59	200.00	-98.41	Peak	100	329	P
3	2483.50	-2.01	46.23	44.22	54.00	-9.78	Average	100	329	P
4	2483.50	-2.01	58.46	56.45	74.00	-17.55	Peak	100	329	P
5	4924.00	6.26	28.34	34.60	54.00	-19.40	Average	100	171	P
6	4924.00	6.26	41.54	47.80	74.00	-26.20	Peak	100	171	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor