

FCC Test Report

Report No.: RFBHKO-WTW-P21030299-2

FCC ID: 2ACIX-ZEP

Test Model: ZWM

Received Date: Mar. 10, 2021

Test Date: Mar. 11 to May 31, 2021

Issued Date: Jun. 7, 2021

Applicant: B&W Group Ltd.

Address: Dale Road Worthing, BN11 2BH United Kingdom

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

FCC Registration /
Designation Number: 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards and references	12
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures	15
4.1.4 Deviation from Test Standard	15
4.1.5 Test Setup	16
4.1.6 EUT Operating Conditions	17
4.1.7 Test Results	18
4.2 Conducted Emission Measurement	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup	33
4.2.6 EUT Operating Conditions	33
4.2.7 Test Results	34
4.3 6dB Bandwidth Measurement	36
4.3.1 Limits of 6dB Bandwidth Measurement	36
4.3.2 Test Setup	36
4.3.3 Test Instruments	36
4.3.4 Test Procedure	36
4.3.5 Deviation from Test Standard	36
4.3.6 EUT Operating Conditions	36
4.3.7 Test Result	37
4.4 Conducted Output Power Measurement	39
4.4.1 Limits of Conducted Output Power Measurement	39
4.4.2 Test Setup	39
4.4.3 Test Instruments	39
4.4.4 Test Procedures	39
4.4.5 Deviation from Test Standard	39
4.4.6 EUT Operating Conditions	39
4.4.7 Test Results	40
4.5 Power Spectral Density Measurement	42
4.5.1 Limits of Power Spectral Density Measurement	42
4.5.2 Test Setup	42
4.5.3 Test Instruments	42
4.5.4 Test Procedure	42
4.5.5 Deviation from Test Standard	42

4.5.6 EUT Operating Condition	42
4.5.7 Test Results	43
4.6 Conducted Out of Band Emission Measurement	46
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	46
4.6.2 Test Setup.....	46
4.6.3 Test Instruments	46
4.6.4 Test Procedure	46
4.6.5 Deviation from Test Standard	46
4.6.6 EUT Operating Condition	46
4.6.7 Test Results	46
Annex A- Band Edge Measurement	55
5 Pictures of Test Arrangements.....	59
Appendix – Information of the Testing Laboratories	60

Release Control Record

Issue No.	Description	Date Issued
RFBHKO-WTW-P21030299-2	Original release.	Jun. 7, 2021

1 Certificate of Conformity

Product: Zeppelin Wireless Module
Brand: Bowers & Wilkins
Test Model: ZWM
Sample Status: Engineering sample
Applicant: B&W Group Ltd.
Test Date: Mar. 11 to May 31, 2021
Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Jessica Cheng , **Date:** Jun. 7, 2021
Jessica Cheng / Senior Specialist

Approved by : Rex Lai , **Date:** Jun. 7, 2021
Rex Lai / Associate Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -21.67dB at 0.36119MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.96dB at 4924.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

Note:

- For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Conducted Emissions	9kHz ~ 40GHz	2.63 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.61 dB
	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.42 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Zeppelin Wireless Module
Brand	Bowers & Wilkins
Test Model	ZWM
Status of EUT	Engineering sample
Power Supply Rating	5Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 300Mbps
Operating Frequency	2412MHz ~ 2462MHz
Number of Channel	802.11b/ 802.11g/802.11n (HT20): 11 802.11n (HT40): 7
Output Power	179.294mW
Antenna Type	Ant 0: PIFA antenna with 3.27dBi gain Ant 1: PIFA antenna with 3.44dBi gain
Antenna Connector	i-pex(MHF)
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. The EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function	RX Function
802.11b	2TX	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX

2. WLAN & Bluetooth technologies can transmit at same time. 2.4GHz & 5GHz WLAN technologies cannot transmit at same time.
3. The emission of the simultaneous operation (BT and WLAN) has been evaluated and no non-compliance was found.
4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	11	OFDM	BPSK	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	11	OFDM	BPSK	6.0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	16deg. C, 72%RH	120Vac, 60Hz	Jed Wu
RE<1G	16deg. C, 72%RH	120Vac, 60Hz	Jed Wu
PLC	25deg. C, 75%RH	120Vac, 60Hz	Ian Chang
APCM	25deg. C, 76%RH	120Vac, 60Hz	StarItaly Wu

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.

If duty cycle of test signal is $< 98\%$, duty factor shall be considered.


802.11b: Duty cycle = $12.48/12.66 = 0.986$

802.11g: Duty cycle = $2.08/2.1 = 0.99$

802.11n (HT20): Duty cycle = $1.94/1.96 = 0.99$

802.11n (HT40): Duty cycle = $0.966/1.005 = 0.961$, Duty factor = $10 * \log(1/0.961) = 0.17$


802.11b

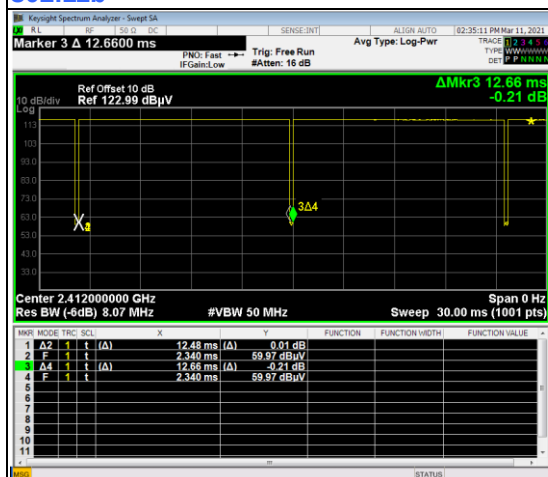


802.11g



802.11n (HT20)

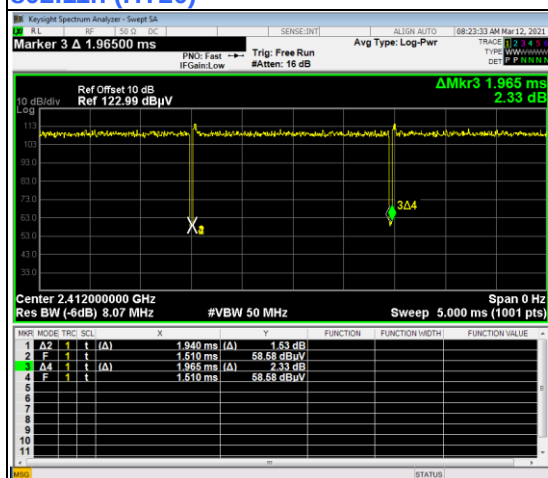

802.11n (HT40)

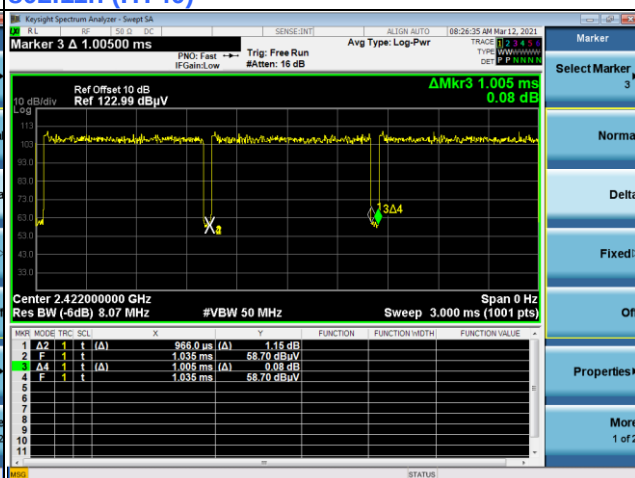

3.4 Description of Support Units

The ET has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Mechanical tool	N/A	N/A	N/A	N/A	Supplied by client

Note: All power cords of the above support units are non-shielded (1.8m).

No.	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/ No)	Cores (Qty.)	Remarks
1.	AC power cable	1	1.8	N	0	Supplied by client

NOTE: The core(s) is(are) originally attached to the cable(s).

3.4.1 Configuration of System under Test

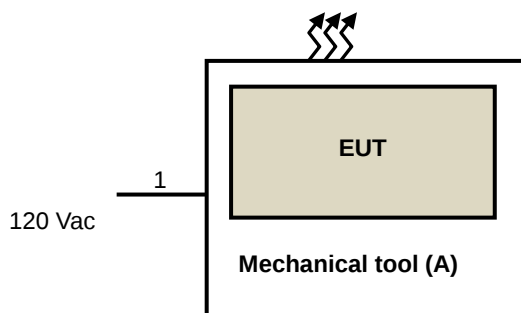

3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	Feb. 18, 2021	Feb. 17, 2022
HP Preamplifier	8449B	3008A01201	Feb. 19, 2021	Feb. 18, 2022
MITEQ Preamplifier	AMF-6F-260400-33-8P	892164	Feb. 18, 2021	Feb. 17, 2022
Agilent TEST RECEIVER	N9038A	MY51210129	Mar. 18, 2020	Mar. 17, 2021
			Mar. 12, 2021	Mar. 11, 2022
Schwarzbeck Antenna	VULB 9168	139	Nov. 6, 2020	Nov. 5, 2021
Schwarzbeck Antenna	VHBA 9123	480	Jun. 3, 2019	Jun. 2, 2021
Schwarzbeck Horn Antenna	BBHA-9170	212	Nov. 22, 2020	Nov. 21, 2021
EMCO Horn Antenna	3115	00027024	Nov. 22, 2020	Nov. 21, 2021
ADT. Turn Table	TT100	0306	NA	NA
ADT. Tower	AT100	0306	NA	NA
Software	Radiated_V7.6.15.9.5	NA	NA	NA
SUHNER RF cable With 4dB PAD	SF102	Cable-CH6-01	Jul. 9, 2020	Jul. 8, 2021
EMEC RF cable With 3/4dB PAD	EM102-KMKM	01	Aug. 21, 2020	Aug. 20, 2021
KEYSIGHT MIMO Powermeasurement Test set	U2021XA	U2021XA-001	Jun. 16, 2020	Jun. 15, 2021
KEYSIGHT Spectrum Analyzer	N9030A	MY54490260	Jul. 22, 2020	Jul. 21, 2021
Loop Antenna EMCI	LPA600	270	Aug. 23, 2019	Aug. 22, 2021
EMCO Horn Antenna	3115	00028257	Nov. 22, 2020	Nov. 21, 2021
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	NA	NA
ROHDE & SCHWARZ Spectrum Analyzer	FSV40	101042	Sep. 8, 2020	Sep. 7, 2021
Anritsu Power Sensor	MA2411B	0738404	Apr. 13, 2020	Apr. 12, 2021
			Apr. 15, 2021	Apr. 14, 2022
Anritsu Power Meter	ML2495A	0842014	Apr. 13, 2020	Apr. 12, 2021
			Apr. 14, 2021	Apr. 13, 2022

- NOTE:** 1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in Chamber No. 6.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
(802.11b: RBW = 1MHz, VBW = 10Hz; 802.11g: RBW = 1MHz, VBW = 10Hz;
802.11n (HT20): RBW = 1MHz, VBW = 10Hz; 802.11n (HT40): RBW = 1MHz, VBW = 1.1kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

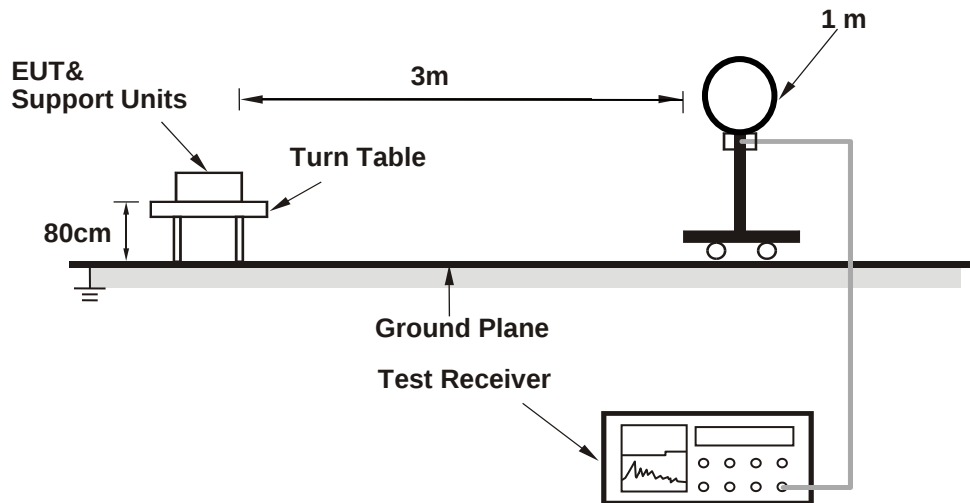

For Radiated emission 30MHz to 1GHz

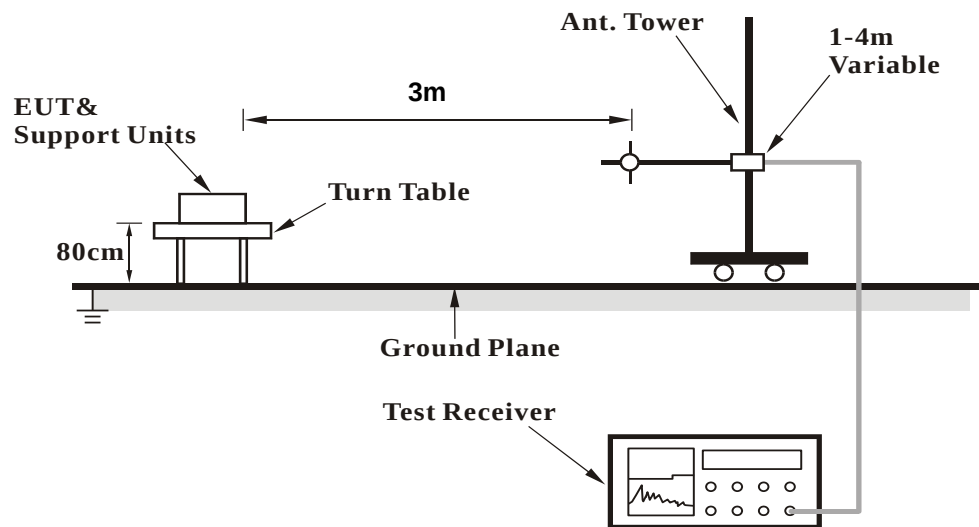

For Radiated emission above 1GHz

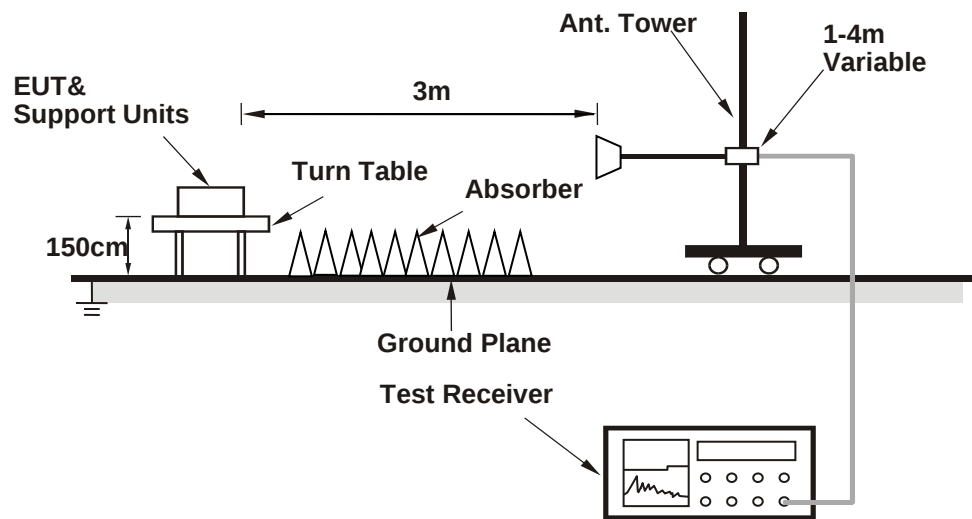

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency continuously.

4.1.7 Test Results

ABOVE 1GHz DATA

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.18 PK	74.00	-18.82	3.61 H	37	54.22	0.96
2	2390.00	42.49 AV	54.00	-11.51	3.61 H	37	41.53	0.96
3	*2412.00	106.63 PK			3.61 H	37	105.56	1.07
4	*2412.00	103.09 AV			3.61 H	37	102.02	1.07
5	4824.00	53.63 PK	74.00	-20.37	1.28 H	280	44.64	8.99
6	4824.00	47.19 AV	54.00	-6.81	1.28 H	280	38.20	8.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.84 PK	74.00	-15.16	1.21 V	260	57.88	0.96
2	2390.00	49.42 AV	54.00	-4.58	1.21 V	260	48.46	0.96
3	*2412.00	109.61 PK			1.21 V	260	108.54	1.07
4	*2412.00	106.06 AV			1.21 V	260	104.99	1.07
5	4824.00	57.09 PK	74.00	-16.91	1.04 V	260	48.10	8.99
6	4824.00	52.46 AV	54.00	-1.54	1.04 V	260	43.47	8.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.38 PK			2.42 H	44	102.23	1.15
2	*2437.00	100.71 AV			2.42 H	44	99.56	1.15
3	4874.00	56.29 PK	74.00	-17.71	2.91 H	19	47.23	9.06
4	4874.00	51.50 AV	54.00	-2.50	2.91 H	19	42.44	9.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.22 PK			1.49 V	306	106.07	1.15
2	*2437.00	104.25 AV			1.49 V	306	103.10	1.15
3	4874.00	57.23 PK	74.00	-16.77	1.25 V	259	48.17	9.06
4	4874.00	52.31 AV	54.00	-1.69	1.25 V	259	43.25	9.06

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.76 PK			3.84 H	12	103.48	1.28
2	*2462.00	101.42 AV			3.84 H	12	100.14	1.28
3	2483.50	55.58 PK	74.00	-18.42	3.84 H	12	54.15	1.43
4	2483.50	41.52 AV	54.00	-12.48	3.84 H	12	40.09	1.43
5	4924.00	56.60 PK	74.00	-17.40	3.30 H	17	47.49	9.11
6	4924.00	52.05 AV	54.00	-1.95	3.30 H	17	42.94	9.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.05 PK			1.14 V	256	105.77	1.28
2	*2462.00	103.57 AV			1.14 V	256	102.29	1.28
3	2483.50	56.61 PK	74.00	-17.39	1.14 V	256	55.18	1.43
4	2483.50	42.55 AV	54.00	-11.45	1.14 V	256	41.12	1.43
5	4924.00	57.60 PK	74.00	-16.40	1.09 V	257	48.49	9.11
6	4924.00	53.04 AV	54.00	-0.96	1.09 V	257	43.93	9.11

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.55 PK	74.00	-12.45	1.43 H	189	60.59	0.96
2	2390.00	47.20 AV	54.00	-6.80	1.43 H	189	46.24	0.96
3	*2412.00	109.48 PK			1.43 H	189	108.41	1.07
4	*2412.00	97.82 AV			1.43 H	189	96.75	1.07
5	4824.00	51.35 PK	74.00	-22.65	2.47 H	233	42.36	8.99
6	4824.00	39.79 AV	54.00	-14.21	2.47 H	233	30.80	8.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.22 PK	74.00	-11.78	1.51 V	305	61.26	0.96
2	2390.00	46.53 AV	54.00	-7.47	1.51 V	305	45.57	0.96
3	*2412.00	110.27 PK			1.51 V	305	109.20	1.07
4	*2412.00	99.60 AV			1.51 V	305	98.53	1.07
5	4824.00	53.25 PK	74.00	-20.75	2.51 V	242	44.26	8.99
6	4824.00	40.95 AV	54.00	-13.05	2.51 V	242	31.96	8.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.64 PK			2.91 H	44	106.49	1.15
2	*2437.00	97.07 AV			2.91 H	44	95.92	1.15
3	4874.00	50.39 PK	74.00	-23.61	2.77 H	241	41.33	9.06
4	4874.00	39.88 AV	54.00	-14.12	2.77 H	241	30.82	9.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.70 PK			1.65 V	302	109.55	1.15
2	*2437.00	99.40 AV			1.65 V	302	98.25	1.15
3	4874.00	51.70 PK	74.00	-22.30	2.63 V	254	42.64	9.06
4	4874.00	40.84 AV	54.00	-13.16	2.63 V	254	31.78	9.06

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.09 PK			1.60 H	146	101.81	1.28
2	*2462.00	92.12 AV			1.60 H	146	90.84	1.28
3	2483.50	56.71 PK	74.00	-17.29	1.60 H	146	55.28	1.43
4	2483.50	42.57 AV	54.00	-11.43	1.60 H	146	41.14	1.43
5	4924.00	51.17 PK	74.00	-22.83	2.29 H	316	42.06	9.11
6	4924.00	40.13 AV	54.00	-13.87	2.29 H	316	31.02	9.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.78 PK			1.18 V	302	108.50	1.28
2	*2462.00	98.89 AV			1.18 V	302	97.61	1.28
3	2483.50	68.96 PK	74.00	-5.04	1.18 V	302	67.53	1.43
4	2483.50	50.41 AV	54.00	-3.59	1.18 V	302	48.98	1.43
5	4924.00	51.21 PK	74.00	-22.79	2.34 V	303	42.10	9.11
6	4924.00	41.02 AV	54.00	-12.98	2.34 V	303	31.91	9.11

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.99 PK	74.00	-14.01	2.55 H	3	59.03	0.96
2	2390.00	45.93 AV	54.00	-8.07	2.55 H	3	44.97	0.96
3	*2412.00	106.81 PK			2.55 H	3	105.74	1.07
4	*2412.00	95.38 AV			2.55 H	3	94.31	1.07
5	4824.00	51.01 PK	74.00	-22.99	2.16 H	240	42.02	8.99
6	4824.00	38.04 AV	54.00	-15.96	2.16 H	240	29.05	8.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.08 PK	74.00	-6.92	1.18 V	258	66.12	0.96
2	2390.00	51.31 AV	54.00	-2.69	1.18 V	258	50.35	0.96
3	*2412.00	110.96 PK			1.18 V	258	109.89	1.07
4	*2412.00	99.07 AV			1.18 V	258	98.00	1.07
5	4824.00	51.37 PK	74.00	-22.63	1.91 V	227	42.38	8.99
6	4824.00	39.64 AV	54.00	-14.36	1.91 V	227	30.65	8.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.23 PK			2.41 H	45	105.08	1.15
2	*2437.00	94.67 AV			2.41 H	45	93.52	1.15
3	4874.00	50.80 PK	74.00	-23.20	2.98 H	325	41.74	9.06
4	4874.00	38.55 AV	54.00	-15.45	2.98 H	325	29.49	9.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.52 PK			1.49 V	308	107.37	1.15
2	*2437.00	97.44 AV			1.49 V	308	96.29	1.15
3	4874.00	50.13 PK	74.00	-23.87	2.72 V	304	41.07	9.06
4	4874.00	39.47 AV	54.00	-14.53	2.72 V	304	30.41	9.06

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.38 PK			3.78 H	35	104.10	1.28
2	*2462.00	93.99 AV			3.78 H	35	92.71	1.28
3	2483.50	62.18 PK	74.00	-11.82	3.78 H	35	60.75	1.43
4	2483.50	47.55 AV	54.00	-6.45	3.78 H	35	46.12	1.43
5	4924.00	50.94 PK	74.00	-23.06	2.03 H	257	41.83	9.11
6	4924.00	38.31 AV	54.00	-15.69	2.03 H	257	29.20	9.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.22 PK			1.15 V	306	105.94	1.28
2	*2462.00	95.84 AV			1.15 V	306	94.56	1.28
3	2483.50	62.68 PK	74.00	-11.32	1.15 V	306	61.25	1.43
4	2483.50	48.04 AV	54.00	-5.96	1.15 V	306	46.61	1.43
5	4924.00	50.83 PK	74.00	-23.17	1.98 V	263	41.72	9.11
6	4924.00	39.96 AV	54.00	-14.04	1.98 V	263	30.85	9.11

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.85 PK	74.00	-14.15	3.92 H	29	58.89	0.96
2	2390.00	46.58 AV	54.00	-7.42	3.92 H	29	45.62	0.96
3	*2422.00	104.35 PK			3.92 H	29	103.24	1.11
4	*2422.00	94.53 AV			3.92 H	29	93.42	1.11
5	4844.00	50.43 PK	74.00	-23.57	2.01 H	156	41.40	9.03
6	4844.00	38.33 AV	54.00	-15.67	2.01 H	156	29.30	9.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.54 PK	74.00	-9.46	1.51 V	261	63.58	0.96
2	2390.00	49.11 AV	54.00	-4.89	1.51 V	261	48.15	0.96
3	*2422.00	106.25 PK			1.51 V	261	105.14	1.11
4	*2422.00	96.71 AV			1.51 V	261	95.60	1.11
5	4844.00	50.65 PK	74.00	-23.35	2.16 V	184	41.62	9.03
6	4844.00	38.46 AV	54.00	-15.54	2.16 V	184	29.43	9.03

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.85 PK			3.51 H	42	101.70	1.15
2	*2437.00	92.60 AV			3.51 H	42	91.45	1.15
3	4874.00	50.08 PK	74.00	-23.92	2.45 H	286	41.02	9.06
4	4874.00	38.16 AV	54.00	-15.84	2.45 H	286	29.10	9.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.06 PK			1.64 V	308	104.91	1.15
2	*2437.00	95.82 AV			1.64 V	308	94.67	1.15
3	4874.00	50.63 PK	74.00	-23.37	2.33 V	271	41.57	9.06
4	4874.00	38.69 AV	54.00	-15.31	2.33 V	271	29.63	9.06

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11n (HT40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.28 PK			3.13 H	30	102.06	1.22
2	*2452.00	93.72 AV			3.13 H	30	92.50	1.22
3	2483.50	60.48 PK	74.00	-13.52	3.13 H	30	59.05	1.43
4	2483.50	48.58 AV	54.00	-5.42	3.13 H	30	47.15	1.43
5	4904.00	50.00 PK	74.00	-24.00	2.16 H	169	40.91	9.09
6	4904.00	38.08 AV	54.00	-15.92	2.16 H	169	28.99	9.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	105.68 PK			1.02 V	304	104.46	1.22
2	*2452.00	95.74 AV			1.02 V	304	94.52	1.22
3	2483.50	69.31 PK	74.00	-4.69	1.02 V	304	67.88	1.43
4	2483.50	52.54 AV	54.00	-1.46	1.02 V	304	51.11	1.43
5	4904.00	50.97 PK	74.00	-23.03	1.87 V	279	41.88	9.09
6	4904.00	38.55 AV	54.00	-15.45	1.87 V	279	29.46	9.09

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.47	27.40 QP	40.00	-12.60	1.49 H	218	35.79	-8.39
2	172.06	36.32 QP	43.50	-7.18	1.84 H	172	42.98	-6.66
3	221.19	35.55 QP	46.00	-10.45	1.61 H	176	44.16	-8.61
4	319.50	38.16 QP	46.00	-7.84	2.47 H	139	41.77	-3.61
5	368.64	42.38 QP	46.00	-3.62	2.04 H	328	45.09	-2.71
6	393.22	37.15 QP	46.00	-8.85	1.29 H	172	39.36	-2.21

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

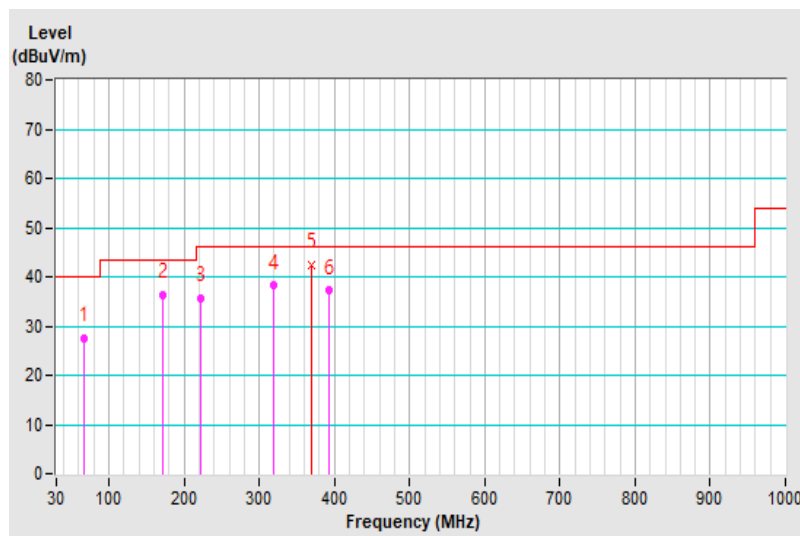


RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.05	33.06 QP	40.00	-6.94	1.68 V	360	40.10	-7.04
2	172.01	28.55 QP	43.50	-14.95	1.35 V	105	35.20	-6.65
3	221.19	29.12 QP	46.00	-16.88	1.79 V	110	37.73	-8.61
4	319.50	29.29 QP	46.00	-16.71	1.88 V	234	32.90	-3.61
5	368.63	31.84 QP	46.00	-14.16	1.54 V	236	34.55	-2.71
6	614.42	34.48 QP	46.00	-11.52	2.19 V	161	31.73	2.75

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

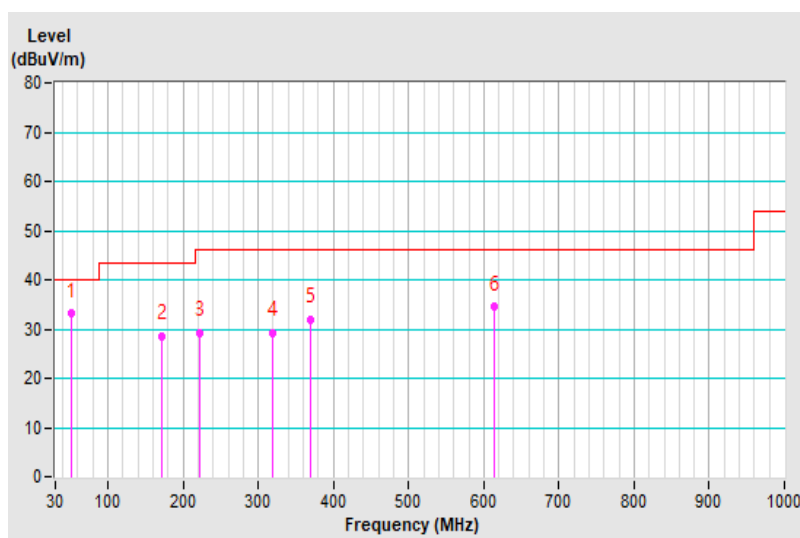

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
ROHDE & SCHWARZ TEST RECEIVER	ESR3	102412	Jan. 29, 2021	Jan. 28, 2022
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ENV216	101197	Jun. 10, 2020	Jun. 9, 2021
LISN With Adapter (for EUT)	101197	NA	Jun. 10, 2020	Jun. 9, 2021
ROHDE & SCHWARZ Artificial Mains Network (for peripherals)	ESH3-Z5	100218	Dec. 2, 2020	Dec. 1, 2021
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK8129	8129229	May 20, 2021	May 19, 2022
SCHWARZBECK Artificial Mains Network (For EUT)	NNLK 8121	8121-808	Apr. 18, 2021	Apr. 17, 2022
Software	Cond_V7.3.7.4	NA	NA	NA
RF cable (JYEBAO) With 10dB PAD	5D-FB	Cable-C10.01	Feb. 10, 2021	Feb. 9, 2022
LYNICS Terminator (For ROHDE & SCHWARZ LISN)	0900510	E1-011484	May 25, 2021	May 24, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Shielded Room No. 10. (Conduction 10)

3. The VCCI Site Registration No. C-11852.

4. Tested Date: May 26, 2021

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

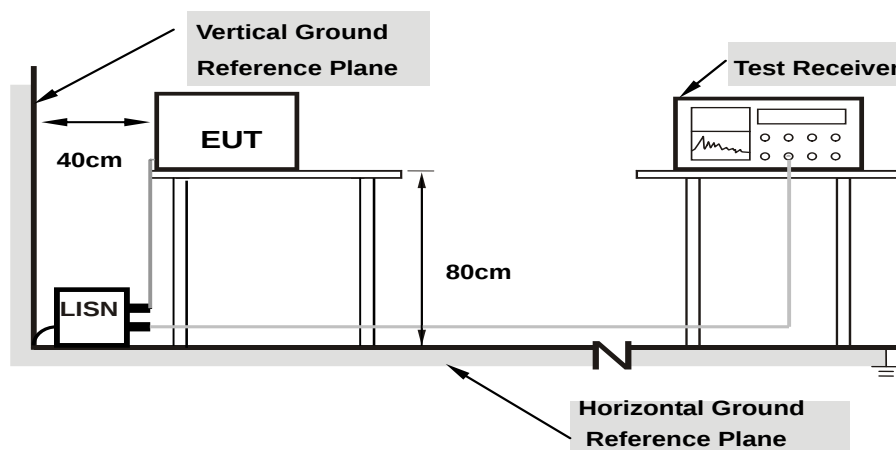

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.72	33.91	17.75	43.63	27.47	65.79	55.79	-22.16	-28.32
2	0.36119	9.72	24.27	17.31	33.99	27.03	58.70	48.70	-24.71	-21.67
3	0.45897	9.72	10.46	1.69	20.18	11.41	56.71	46.71	-36.53	-35.30
4	2.42812	9.80	12.62	11.09	22.42	20.89	56.00	46.00	-33.58	-25.11
5	3.81262	9.84	12.45	10.31	22.29	20.15	56.00	46.00	-33.71	-25.85
6	12.86893	9.96	11.81	6.52	21.77	16.48	60.00	50.00	-38.23	-33.52

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

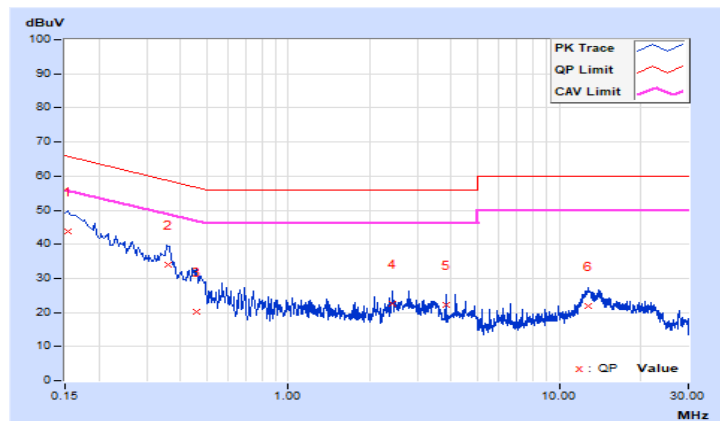


RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16564	9.72	30.28	14.53	40.00	24.25	65.18	55.18	-25.18	-30.93
2	0.25560	9.72	20.56	7.94	30.28	17.66	61.57	51.57	-31.29	-33.91
3	0.36119	9.72	21.19	14.83	30.91	24.55	58.70	48.70	-27.79	-24.15
4	1.26656	9.76	8.14	2.37	17.90	12.13	56.00	46.00	-38.10	-33.87
5	2.77229	9.81	12.78	10.07	22.59	19.88	56.00	46.00	-33.41	-26.12
6	12.73205	9.98	11.97	6.70	21.95	16.68	60.00	50.00	-38.05	-33.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

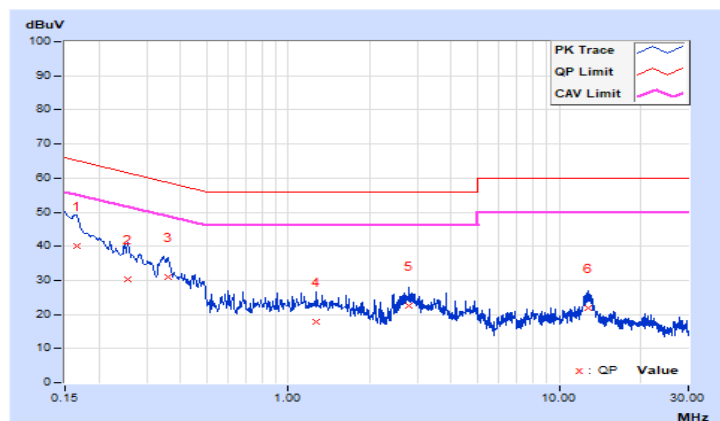


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.12	8.12	0.5	Pass
6	2437	8.12	8.13	0.5	Pass
11	2462	8.12	8.14	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.58	16.1	0.5	Pass
6	2437	15.73	16.02	0.5	Pass
11	2462	15.79	15.69	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.85	16.59	0.5	Pass
6	2437	16.83	16.83	0.5	Pass
11	2462	16.84	16.58	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.81	35.55	0.5	Pass
6	2437	35.53	35.57	0.5	Pass
9	2452	35.8	35.28	0.5	Pass

Spectrum Plot of Worst Value


802.11b

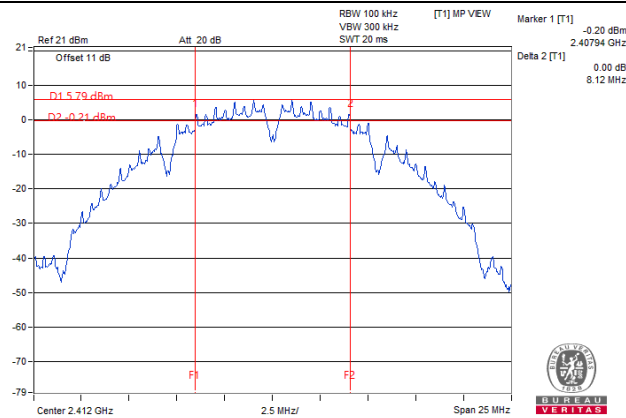


802.11g

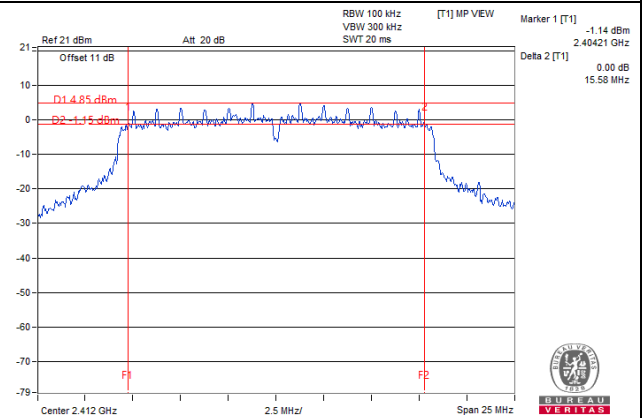

802.11n (HT20)

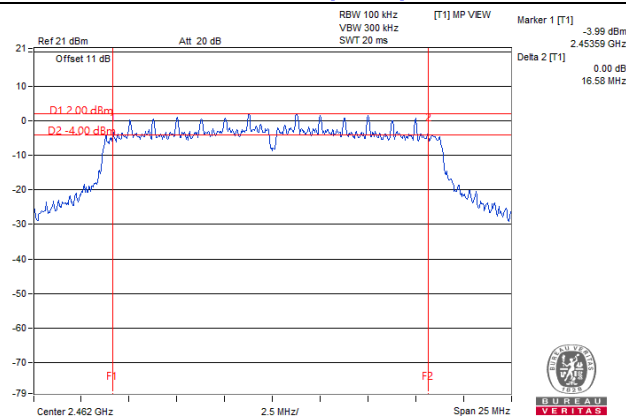

802.11n (HT40)

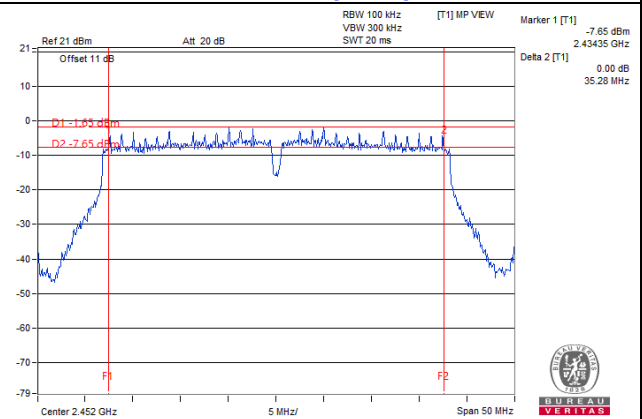

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	17.60	17.13	109.186	20.38	30	Pass
6	2437	16.75	16.25	89.485	19.52	30	Pass
11	2462	16.95	16.90	98.523	19.94	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.60	18.94	169.544	22.29	30	Pass
6	2437	19.37	19.08	167.406	22.24	30	Pass
11	2462	19.58	19.47	179.294	22.54	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	18.24	17.93	128.768	21.10	30	Pass
6	2437	18.06	17.81	124.368	20.95	30	Pass
11	2462	17.76	17.68	118.317	20.73	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.66	18.14	138.614	21.42	30	Pass
6	2437	18.74	18.42	144.319	21.59	30	Pass
9	2452	18.44	18.28	137.121	21.37	30	Pass

FOR AVERAGE POWER

802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
1	2412	15.25	14.92	64.542	18.10
6	2437	14.48	14.08	53.64	17.29
11	2462	14.72	14.73	59.365	17.74

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
1	2412	15.13	14.95	63.844	18.05
6	2437	15.11	15.04	64.349	18.09
11	2462	15.19	15.16	65.846	18.19

802.11n (HT20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
1	2412	13.75	13.62	46.728	16.70
6	2437	13.57	13.54	45.345	16.57
11	2462	13.53	13.50	44.93	16.53

802.11n (HT40)


Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Avg.Power (mW)	Total Avg.Power (dBm)
		Chain 0	Chain 1		
3	2422	13.05	12.96	39.953	16.02
6	2437	13.19	13.03	40.936	16.12
9	2452	13.08	13.03	40.414	16.07

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

Chan.	Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-2.95	-3.22	-0.07	7.63	Pass
6	2437	-4.17	-4.38	-1.26	7.63	Pass
11	2462	-3.87	-4.11	-0.98	7.63	Pass

Note:

1. Method E) 2) b) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] = 6.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.37 - 6) = 7.63\text{dBm}$.

802.11g

Chan.	Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-10.97	-12.18	-8.52	7.63	Pass
6	2437	-10.33	-12.38	-8.22	7.63	Pass
11	2462	-10.74	-12.52	-8.53	7.63	Pass

Note:

1. Method E) 2) b) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] = 6.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.37 - 6) = 7.63\text{dBm}$.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
1	2412	-12.70	-13.22	-9.94	7.63	Pass
6	2437	-12.33	-13.17	-9.72	7.63	Pass
11	2462	-11.98	-13.79	-9.78	7.63	Pass

Note:

1. Method E) 2) b) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] = 6.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.37 - 6) = 7.63\text{dBm}$.

802.11n (HT40)


Chan.	Freq. (MHz)	PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
		Chain 0	Chain 1			
3	2422	-16.22	-17.59	-13.84	7.63	Pass
6	2437	-16.77	-17.76	-14.23	7.63	Pass
9	2452	-16.64	-18.21	-14.34	7.63	Pass

Note:


1. Method E) 2) b) of power density measurement of KDB 662911 is using for calculating total power density.
2. Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})/N_{ANT}] = 6.37\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8 - (6.37 - 6) = 7.63\text{dBm}$.

Spectrum Plot of Worst Value


802.11b

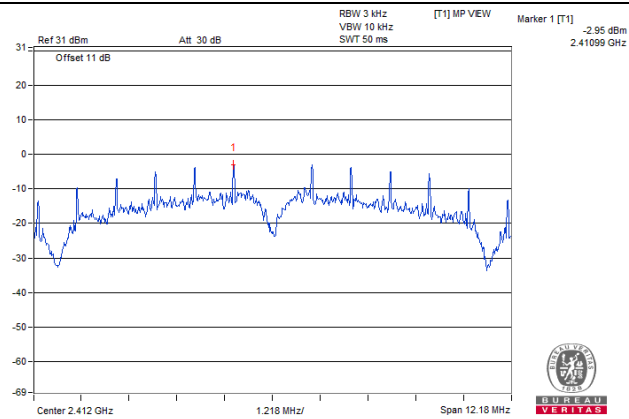


802.11g

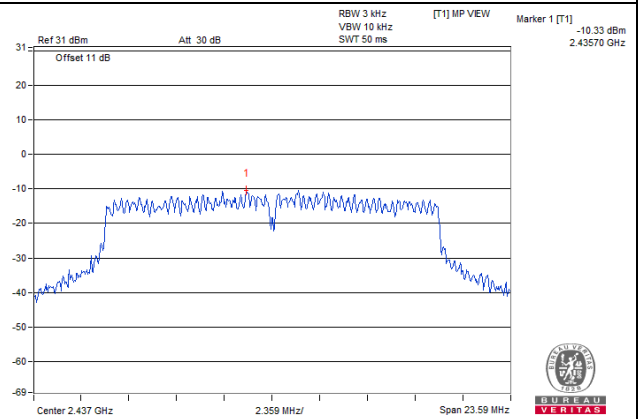

802.11n (HT20)

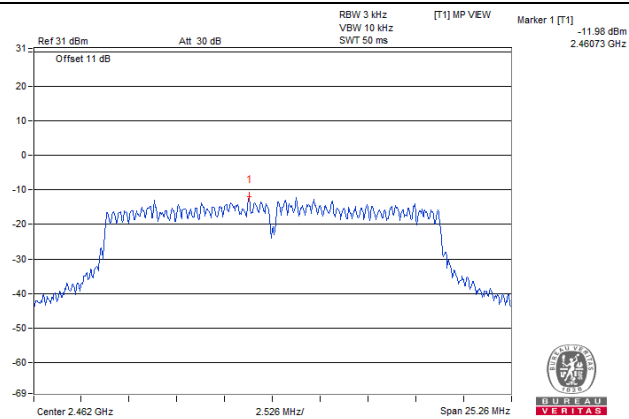

802.11n (HT40)

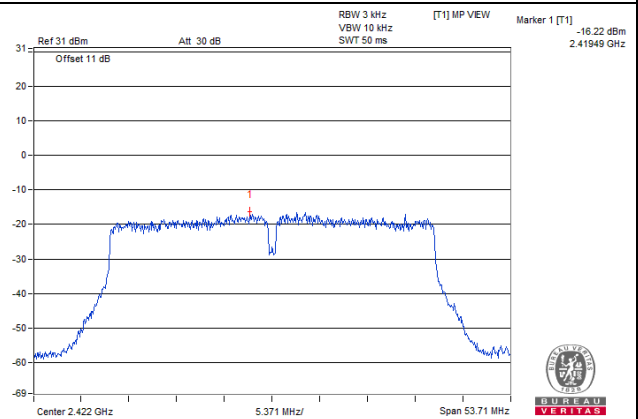


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b_Chain 0



CH 1

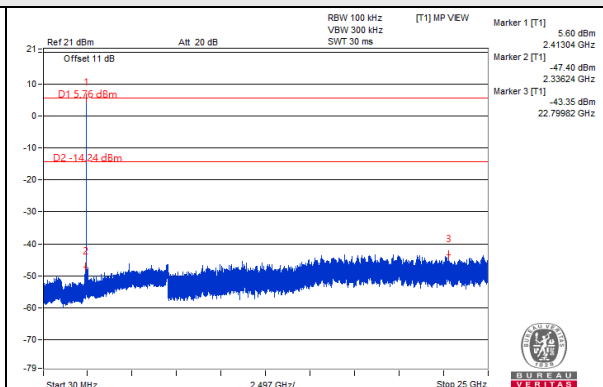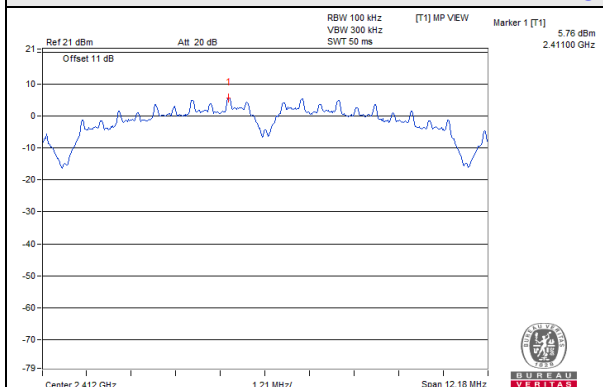


CH 6

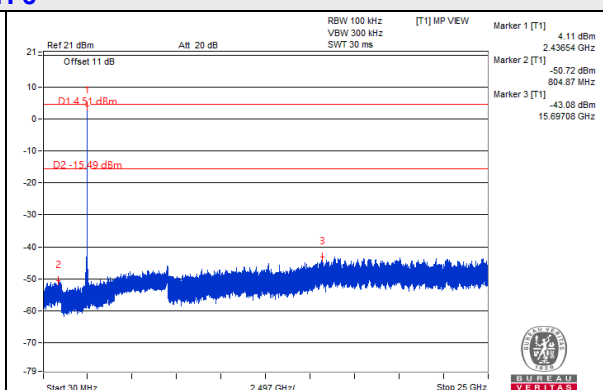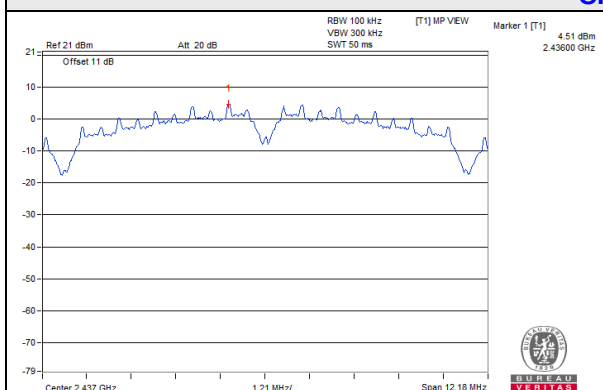


CH 11

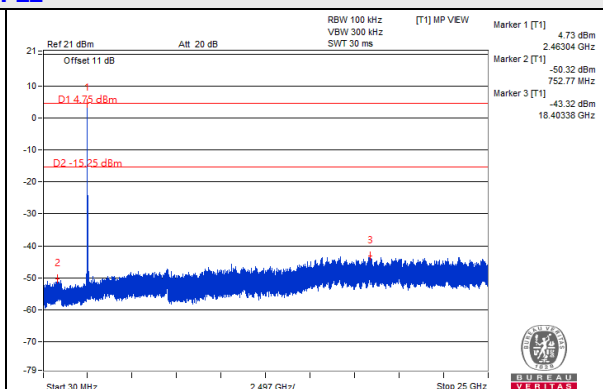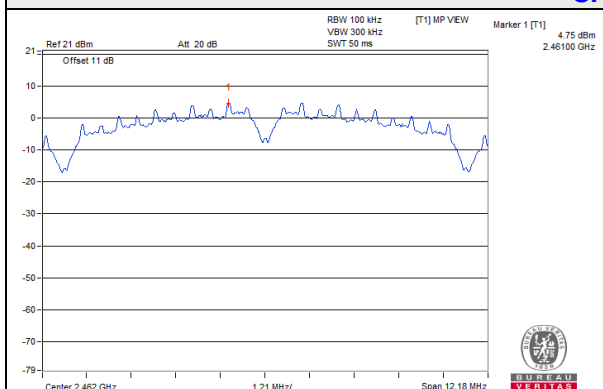

CH 1 Band edge


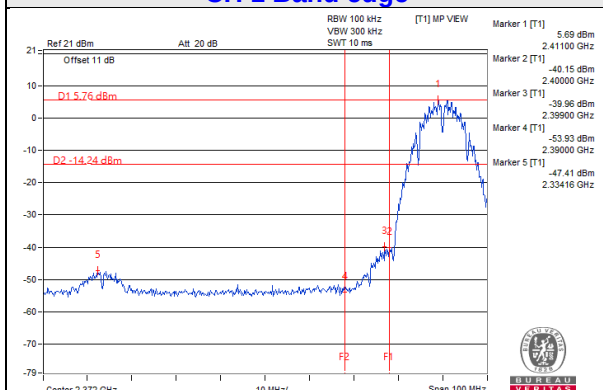


CH 11 Band edge


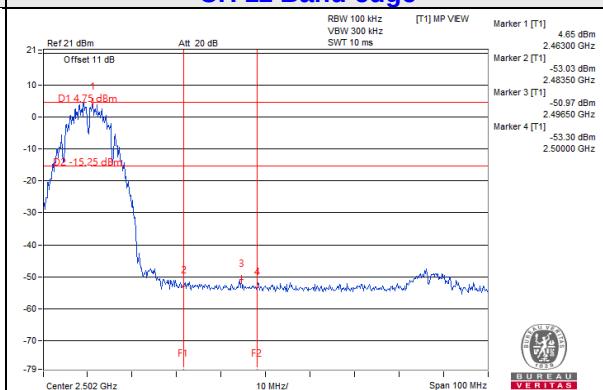


802.11b_Chain 1



CH 1

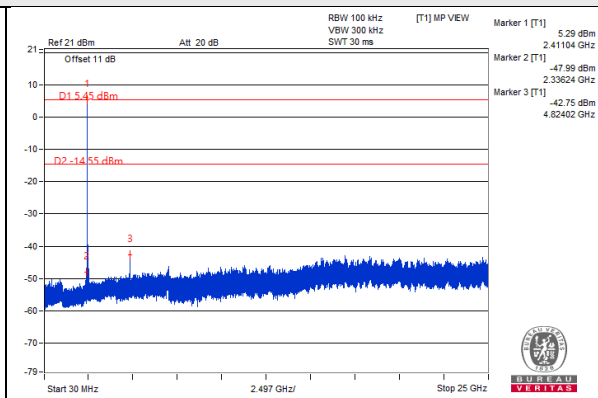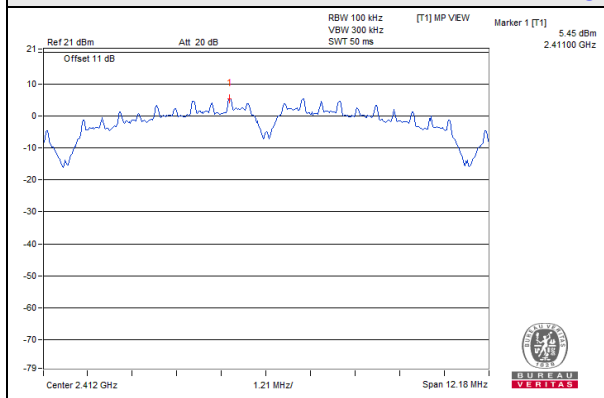


CH 6

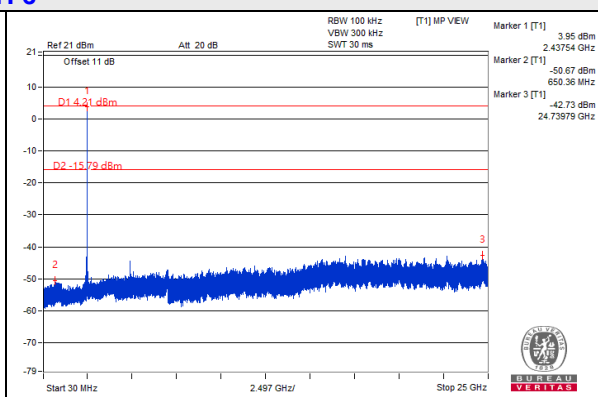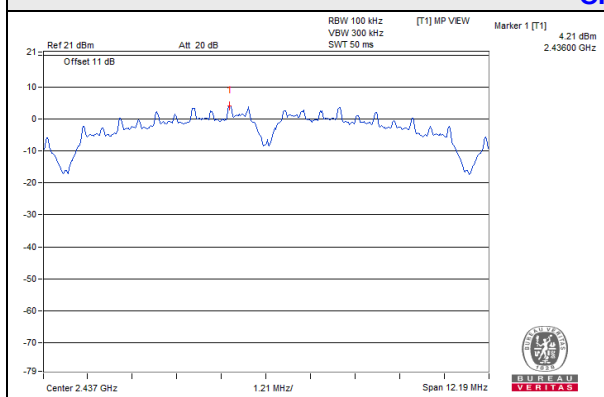


CH 11

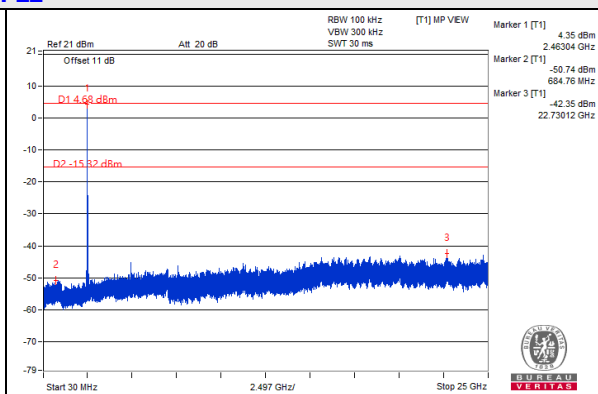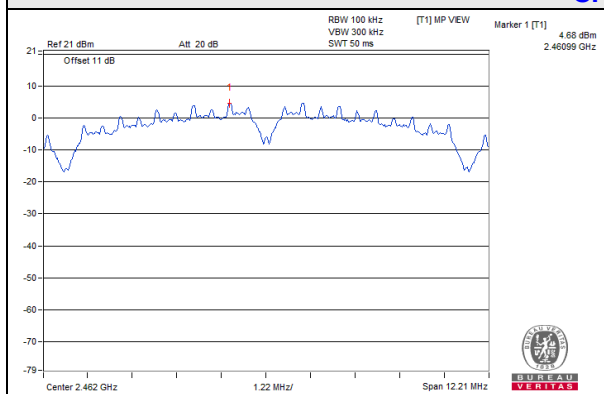

CH 1 Band edge


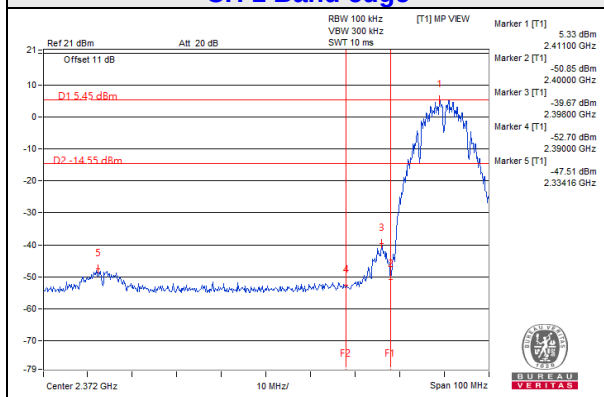


CH 11 Band edge


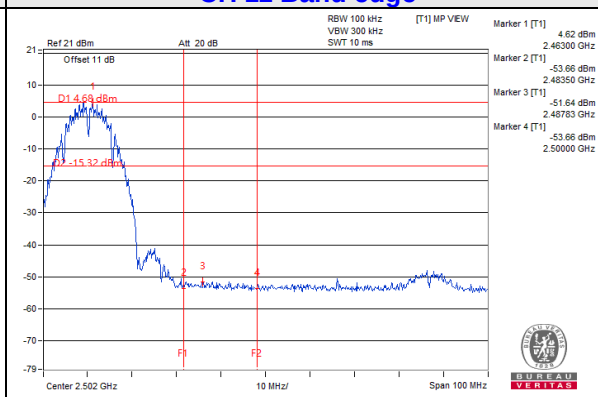


802.11g_Chain 0



CH 1

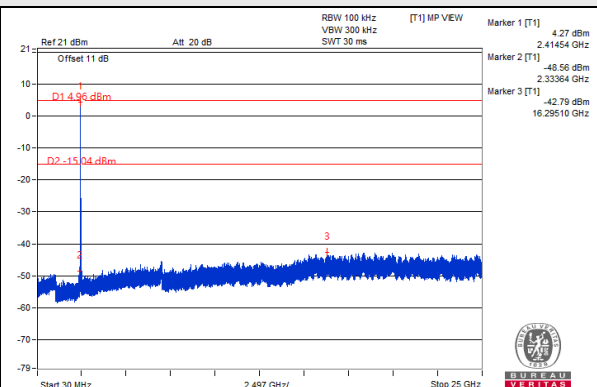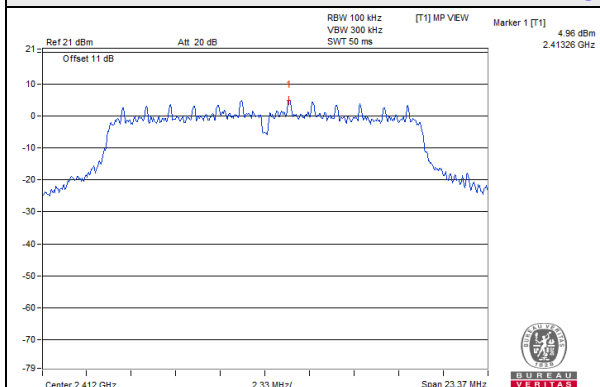



CH 6

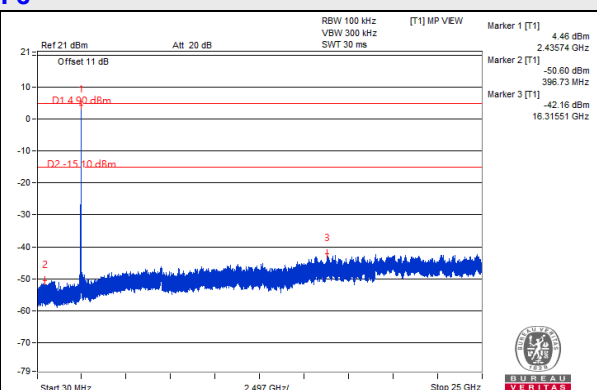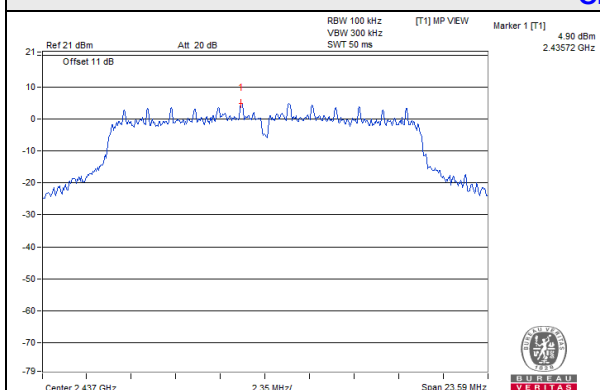

CH 11

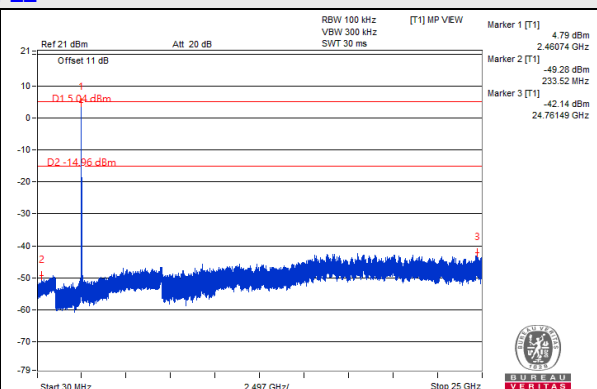
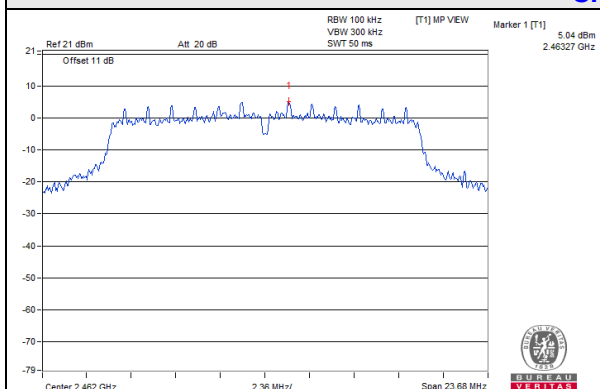


CH 1 Band edge

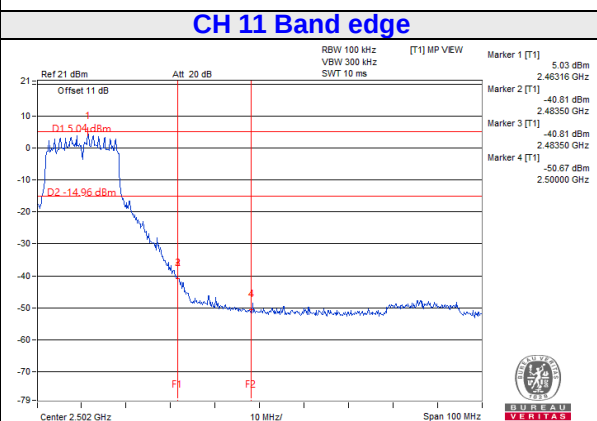
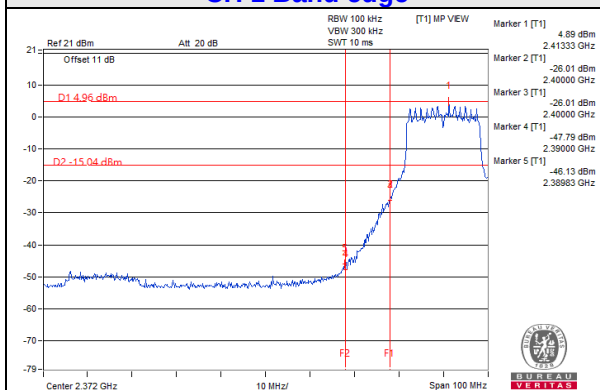


802.11g_Chain 1



CH 1

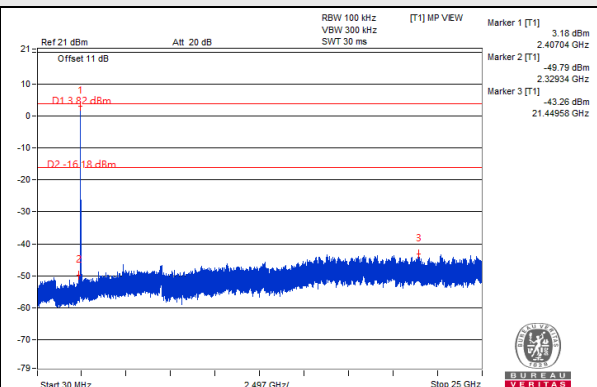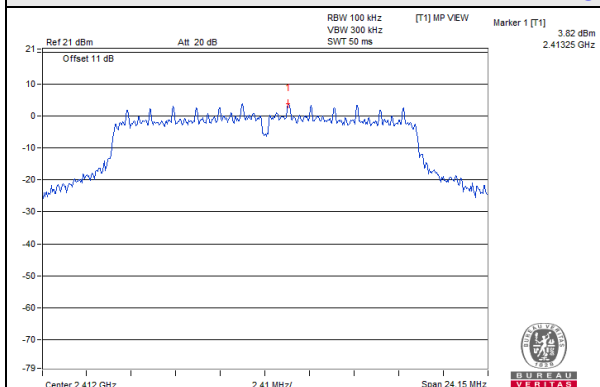


CH 6

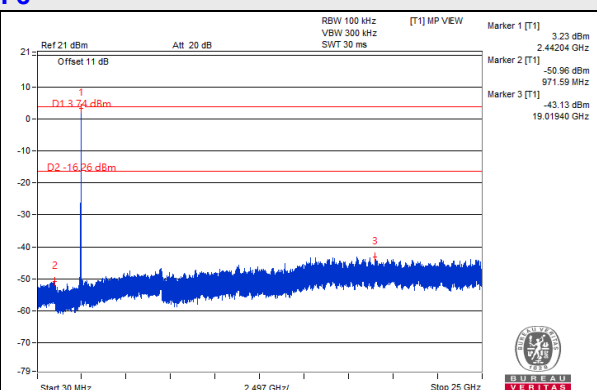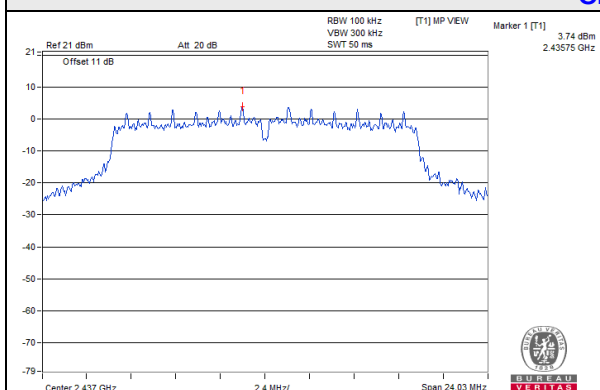


CH 11

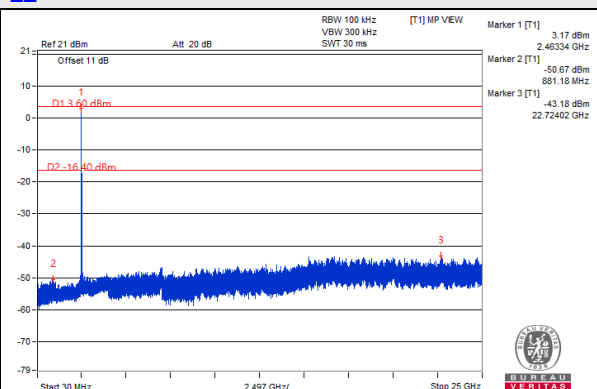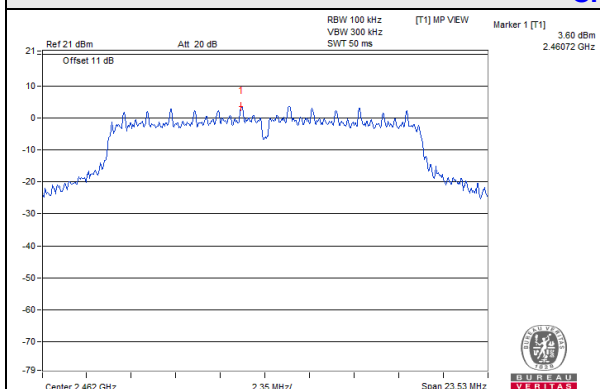

CH 1 Band edge


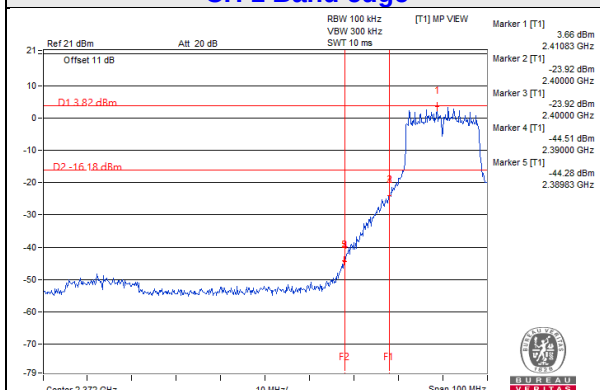


CH 11 Band edge


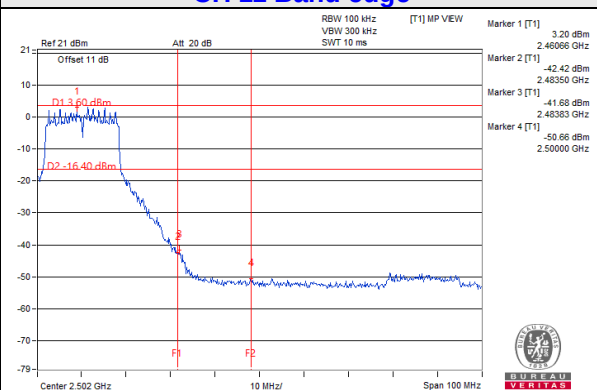


802.11n (HT20) _Chain 0



CH 1

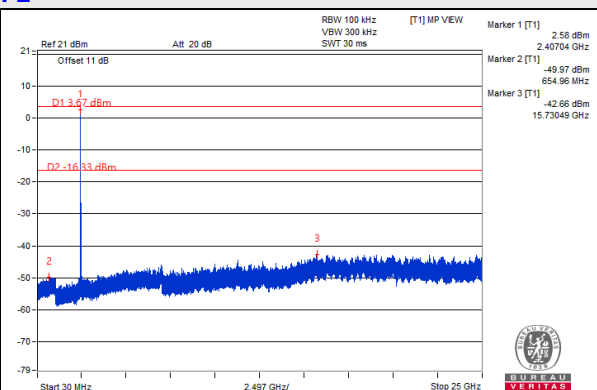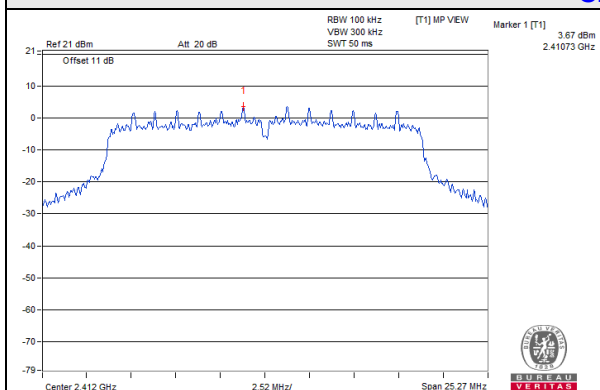


CH 6

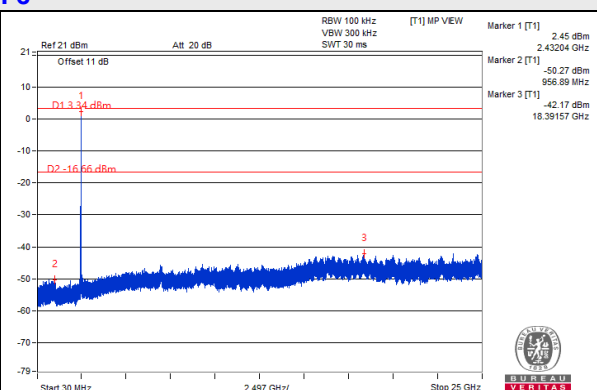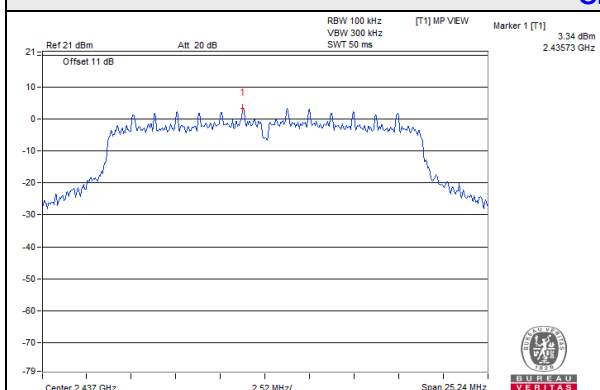


CH 11

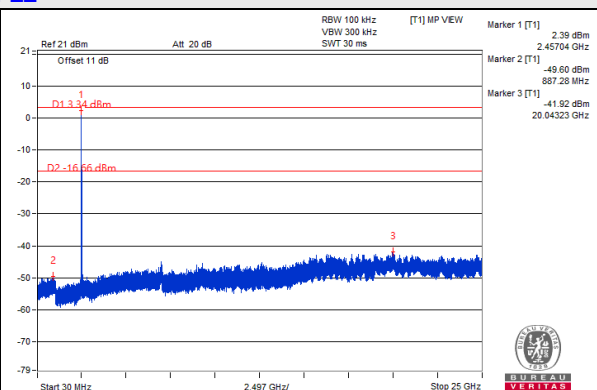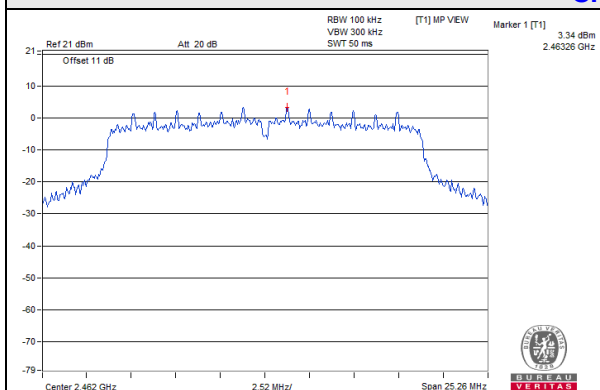

CH 1 Band edge


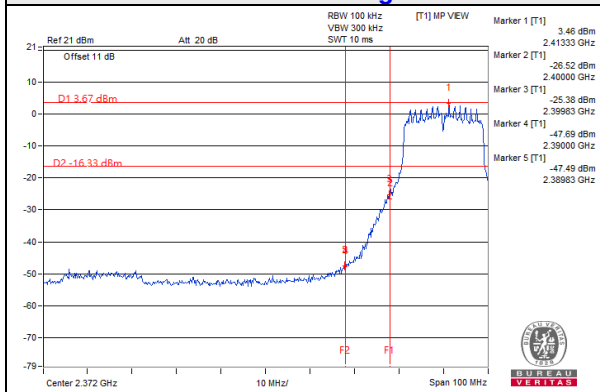


CH 11 Band edge


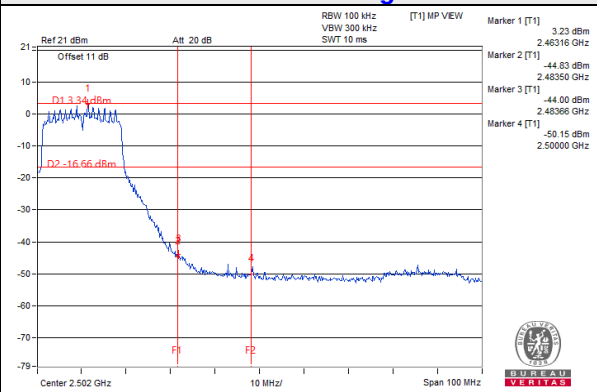


802.11n (HT20) _Chain 1



CH 1

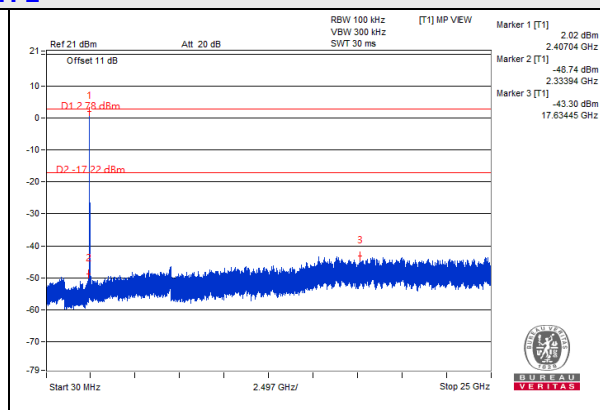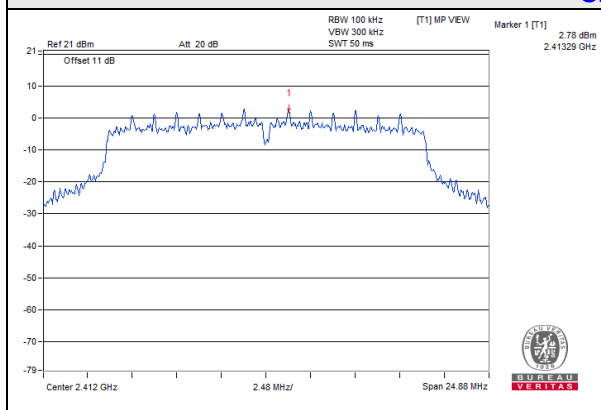


CH 6

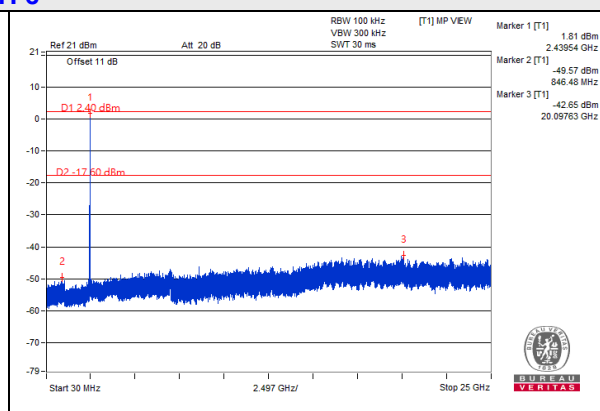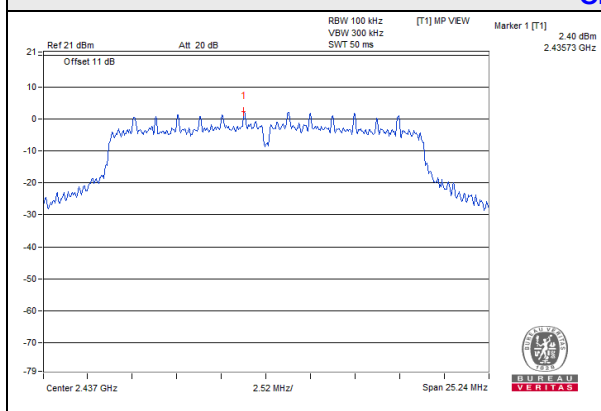


CH 11

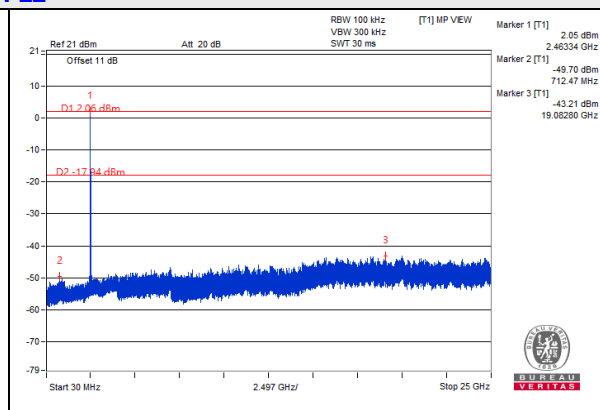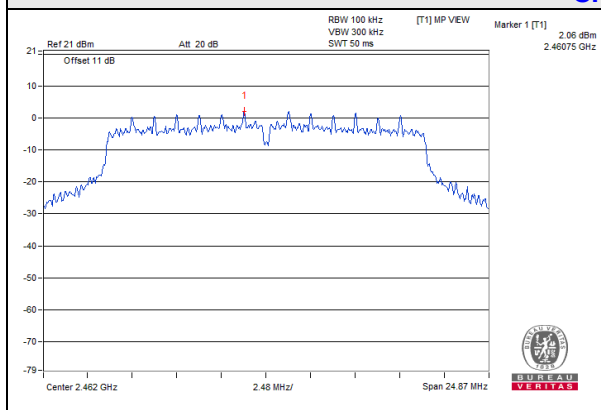

CH 1 Band edge


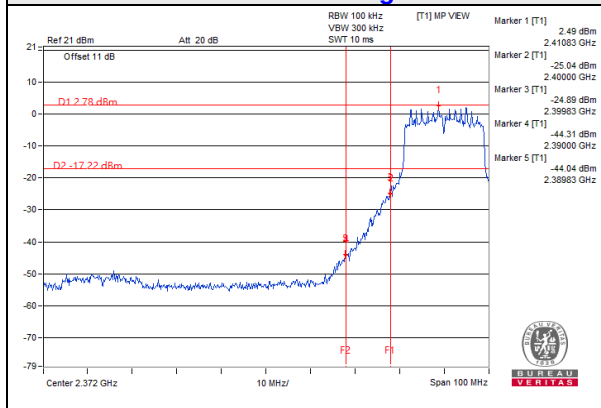


CH 11 Band edge


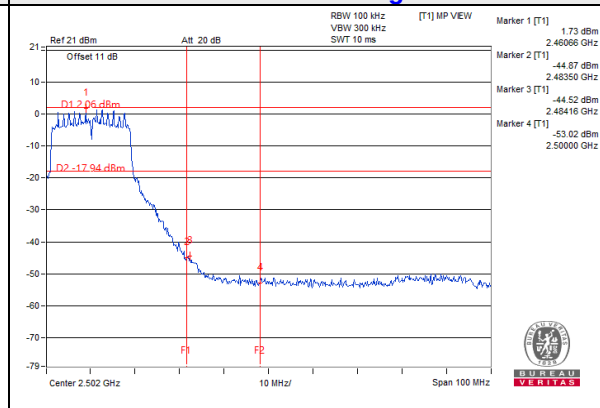


802.11n (HT40) _Chain 0



CH 3

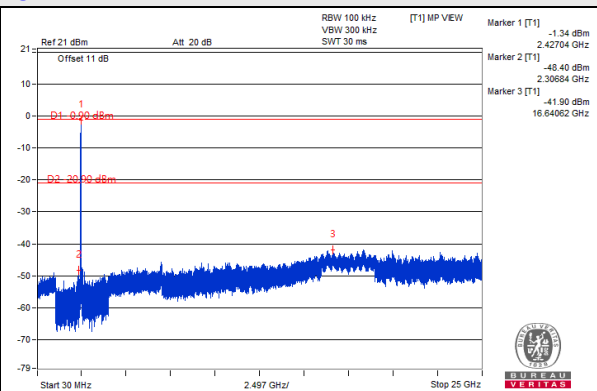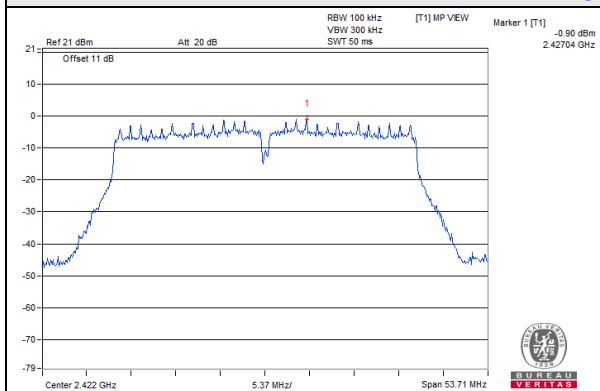


CH 6

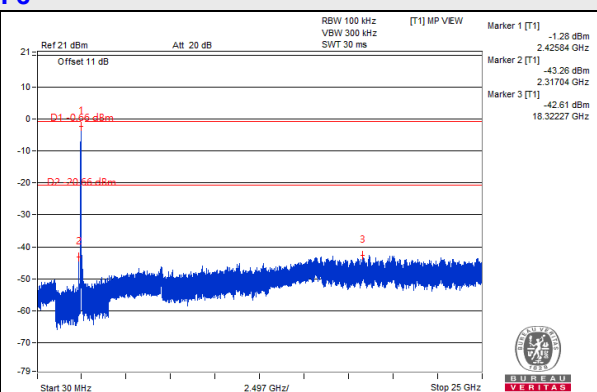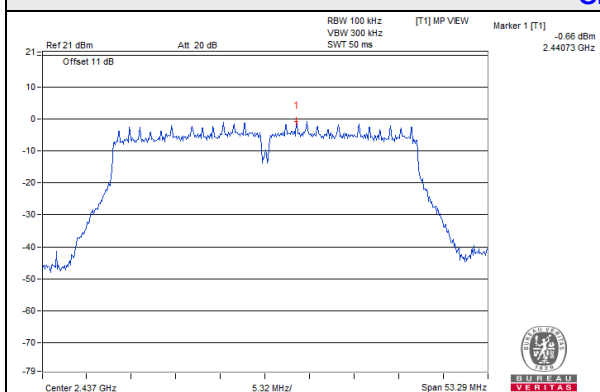


CH 9

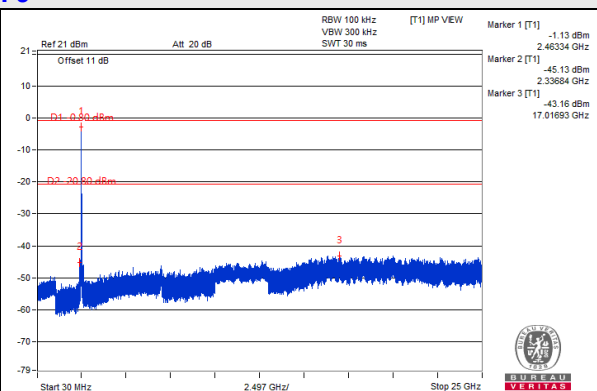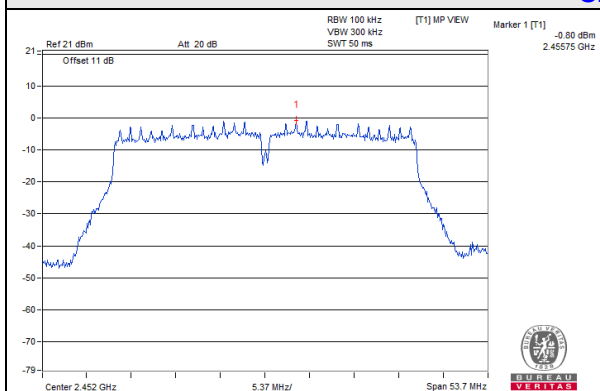

CH 3 Band edge


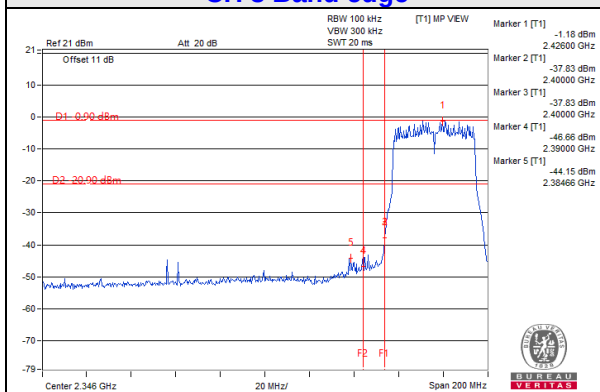


CH 9 Band edge


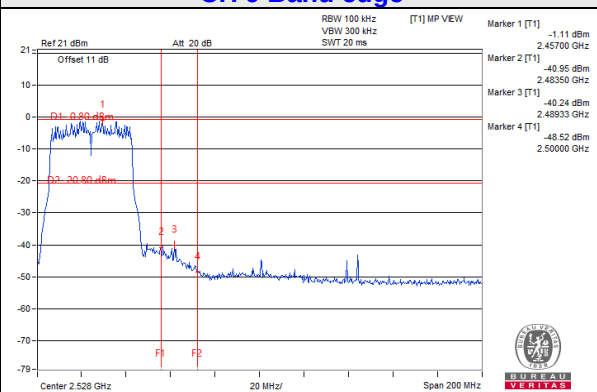


802.11n (HT40) _Chain 1



CH 3

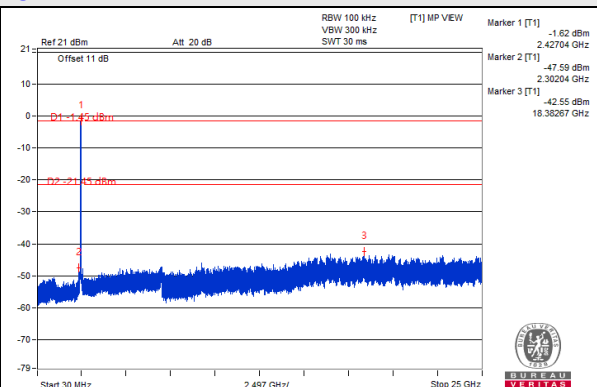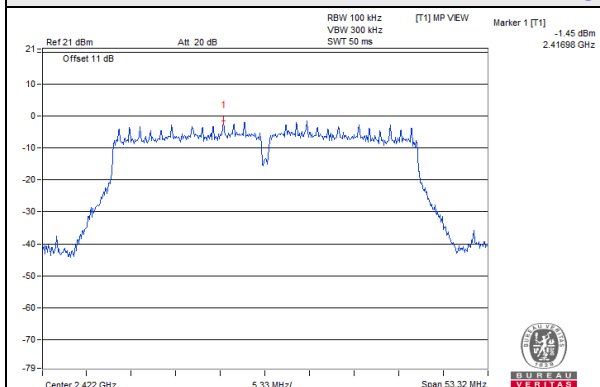


CH 6

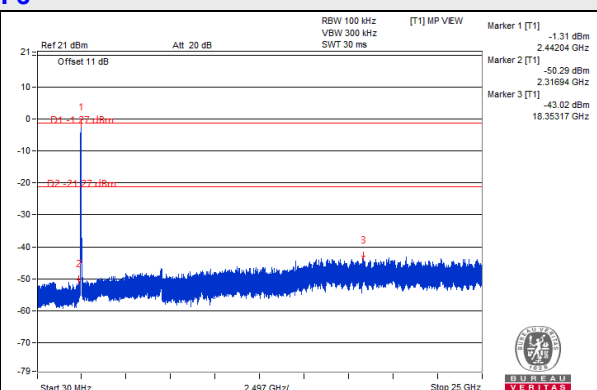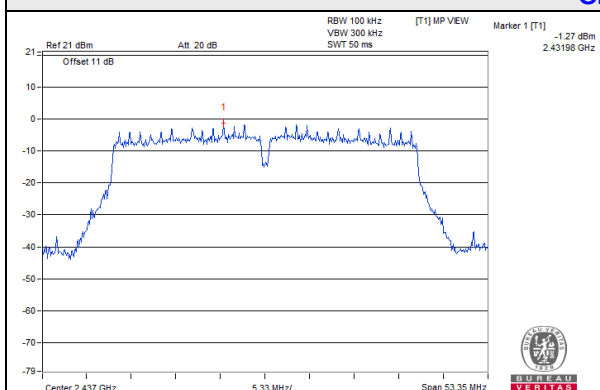


CH 9

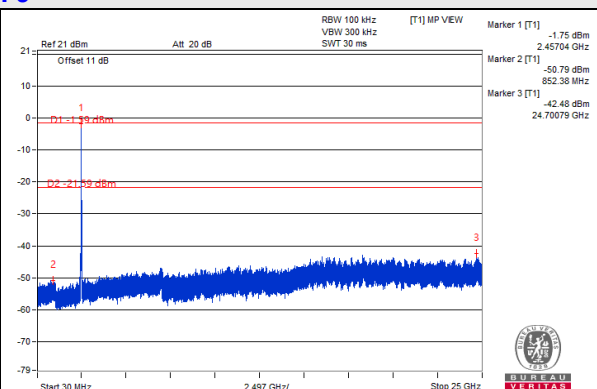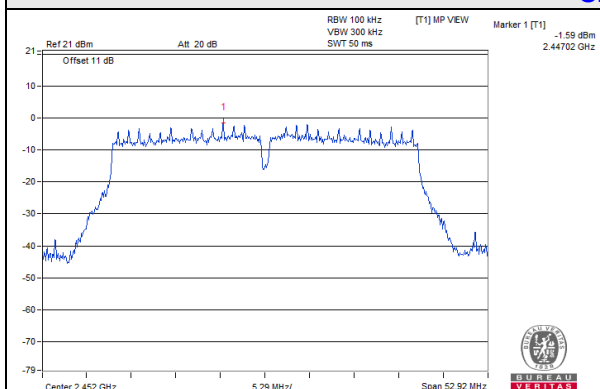


CH 3 Band edge

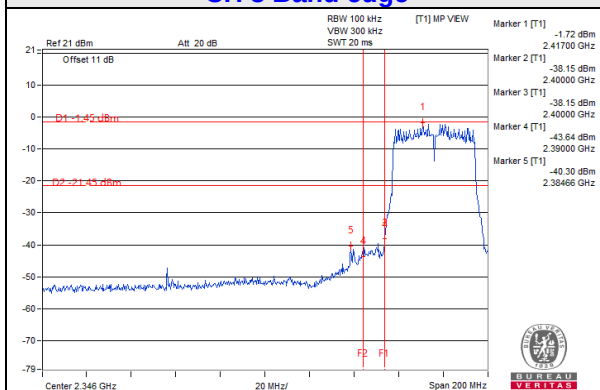



CH 9 Band edge

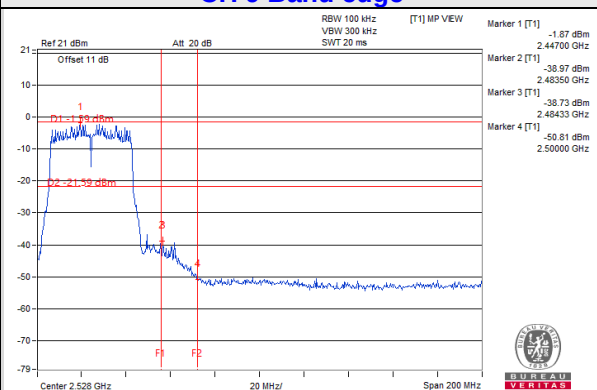


Annex A- Band Edge Measurement

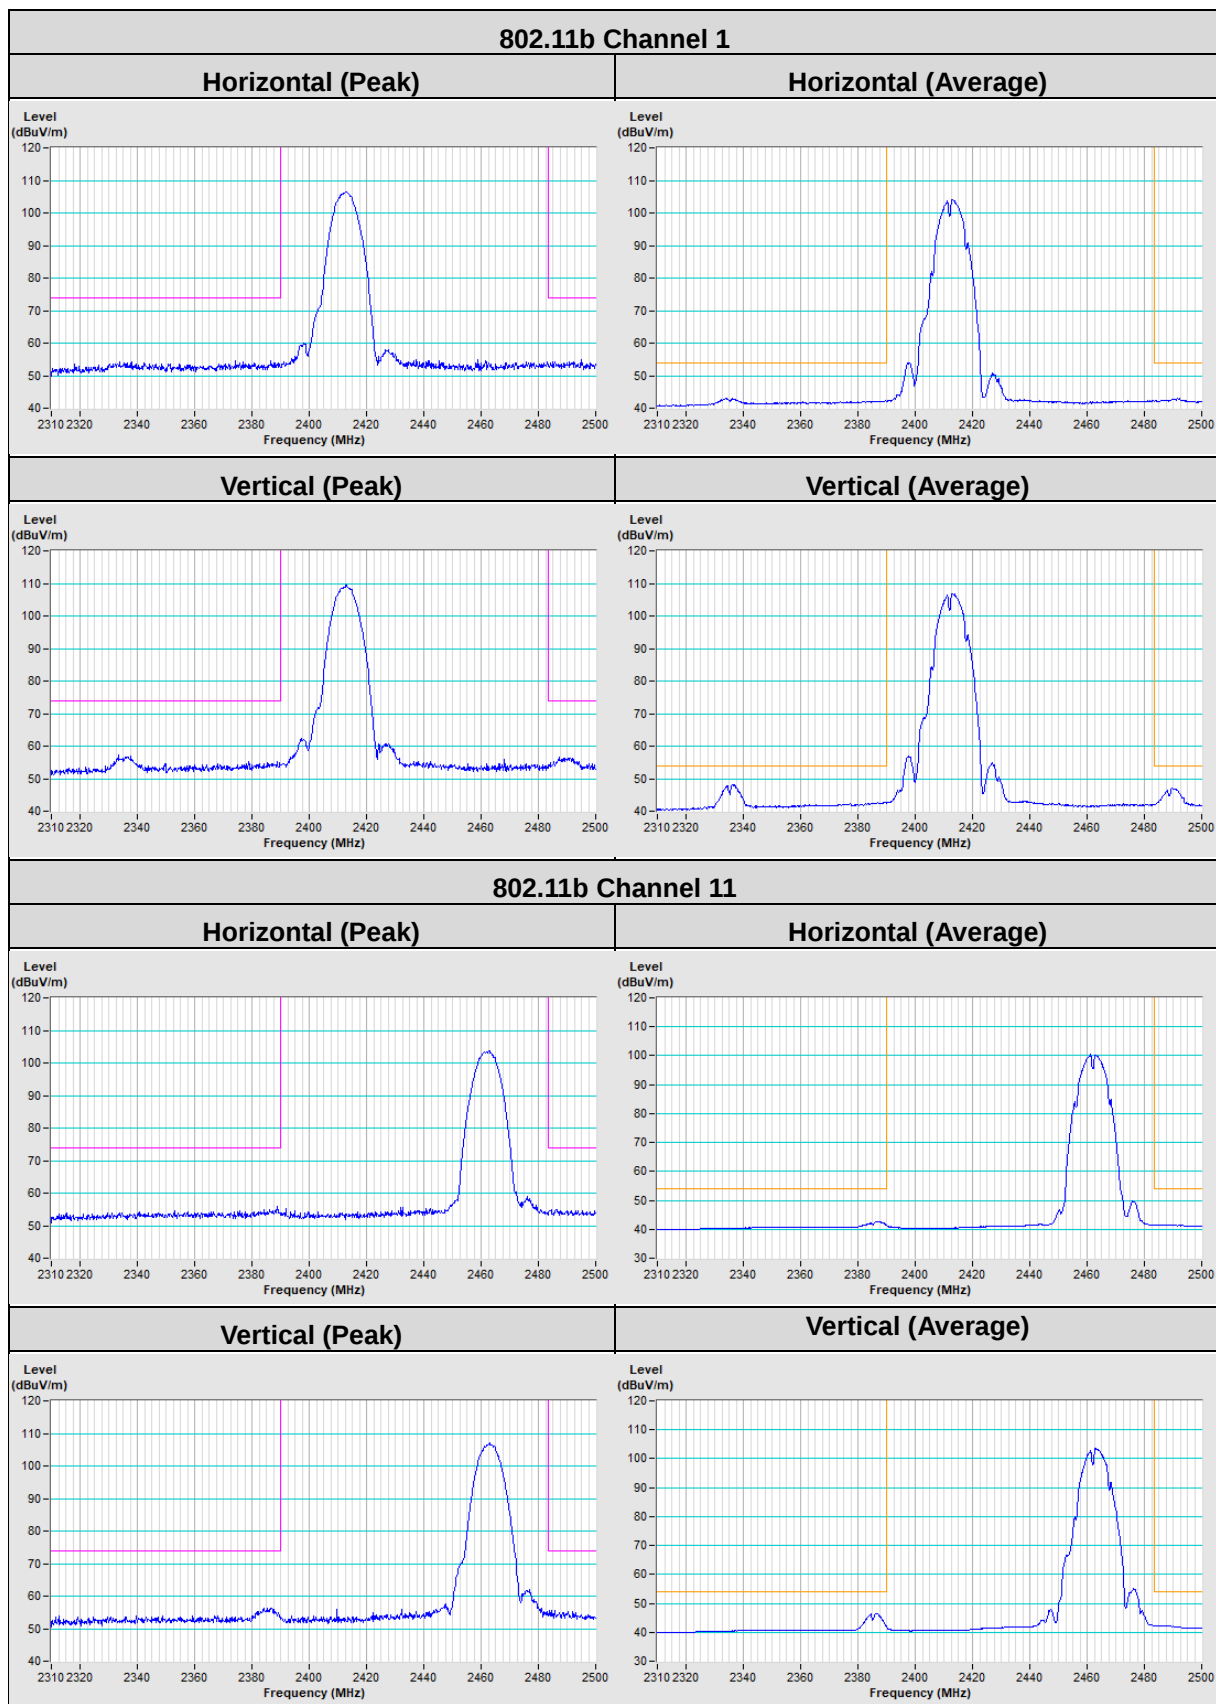

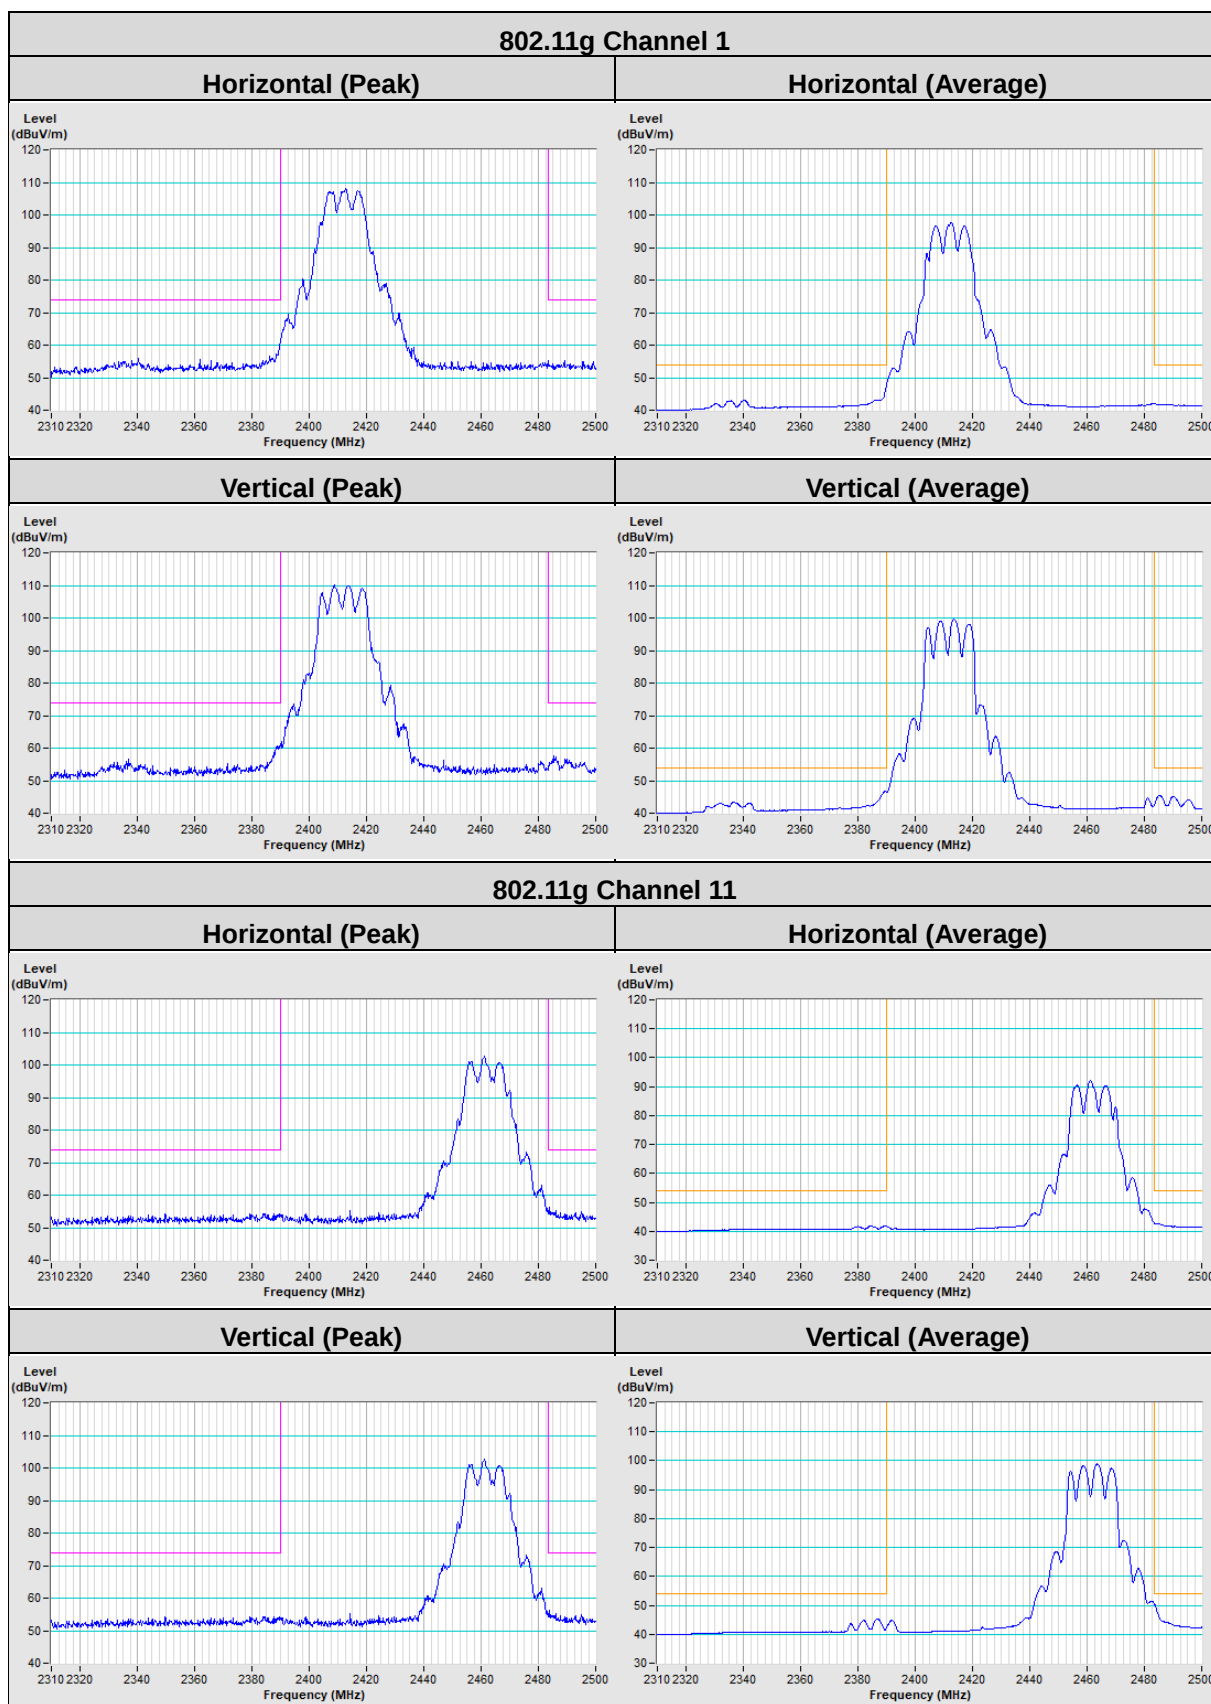

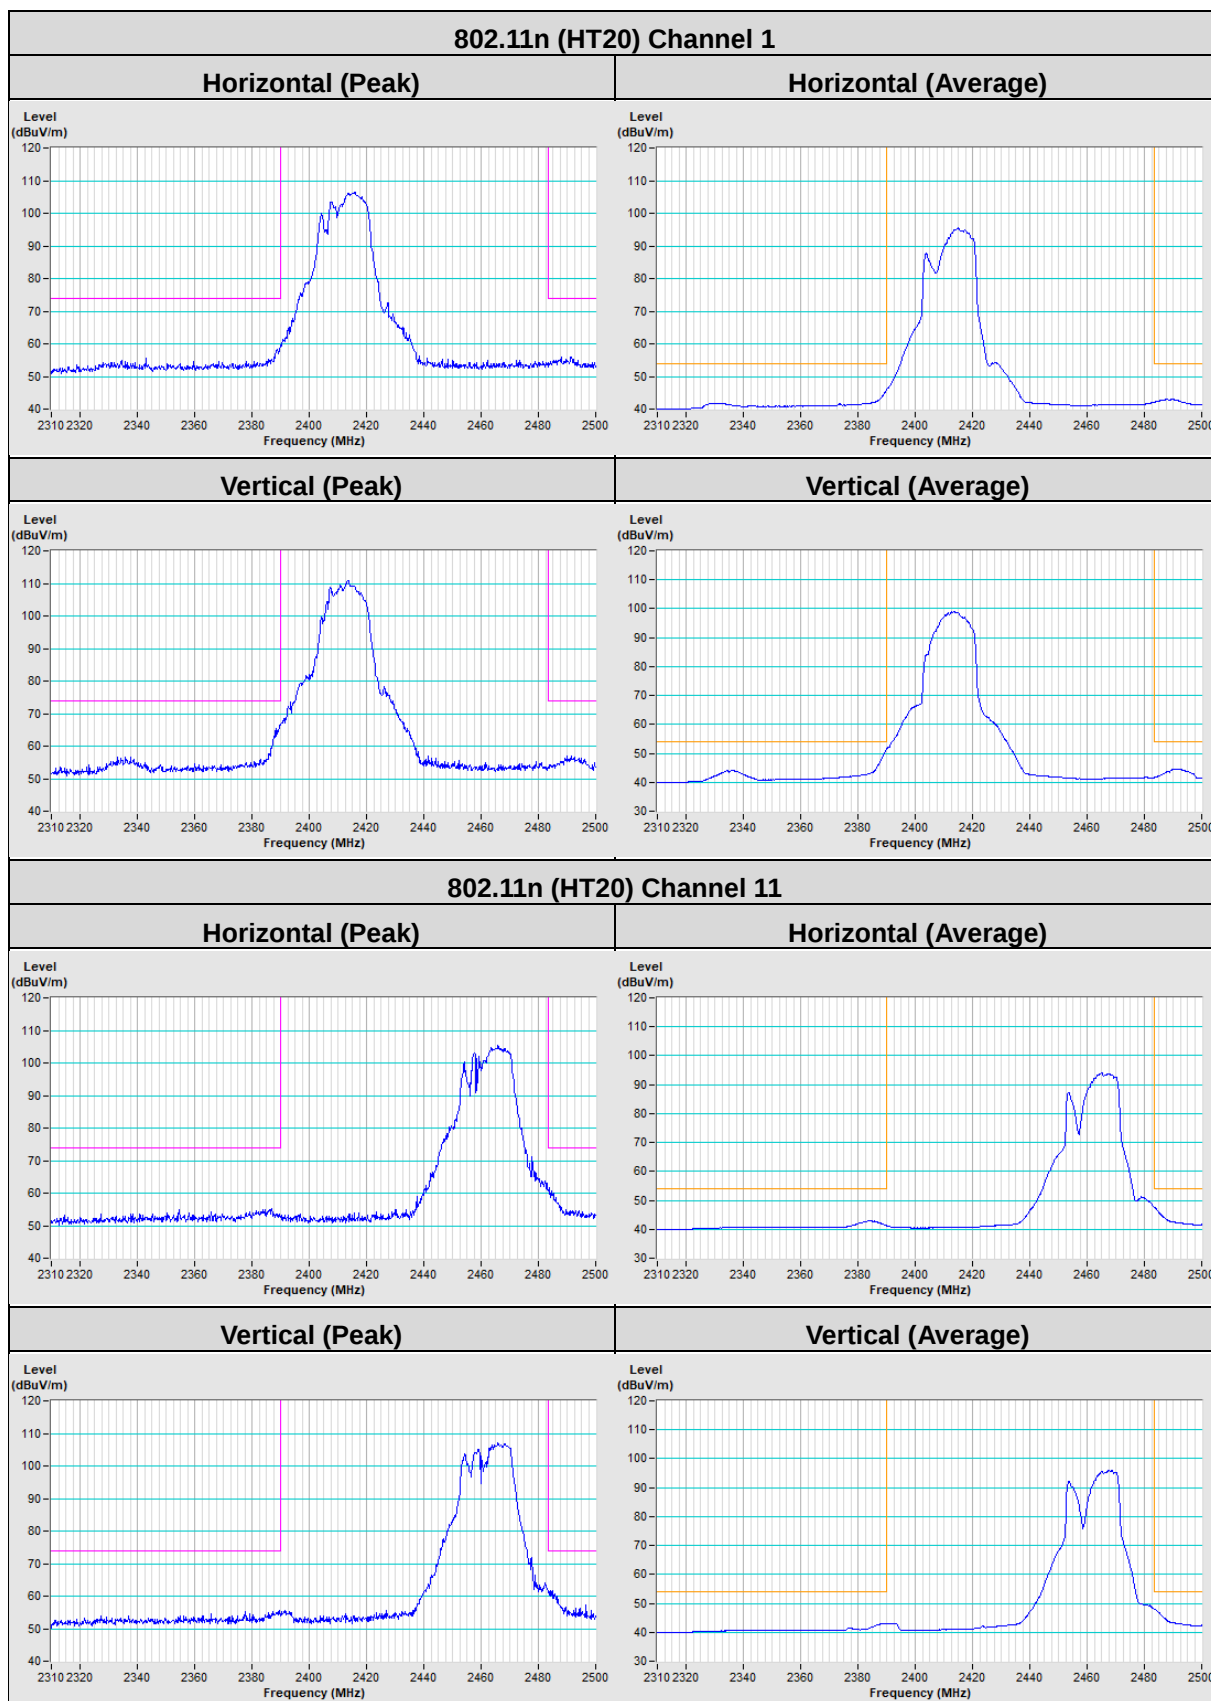

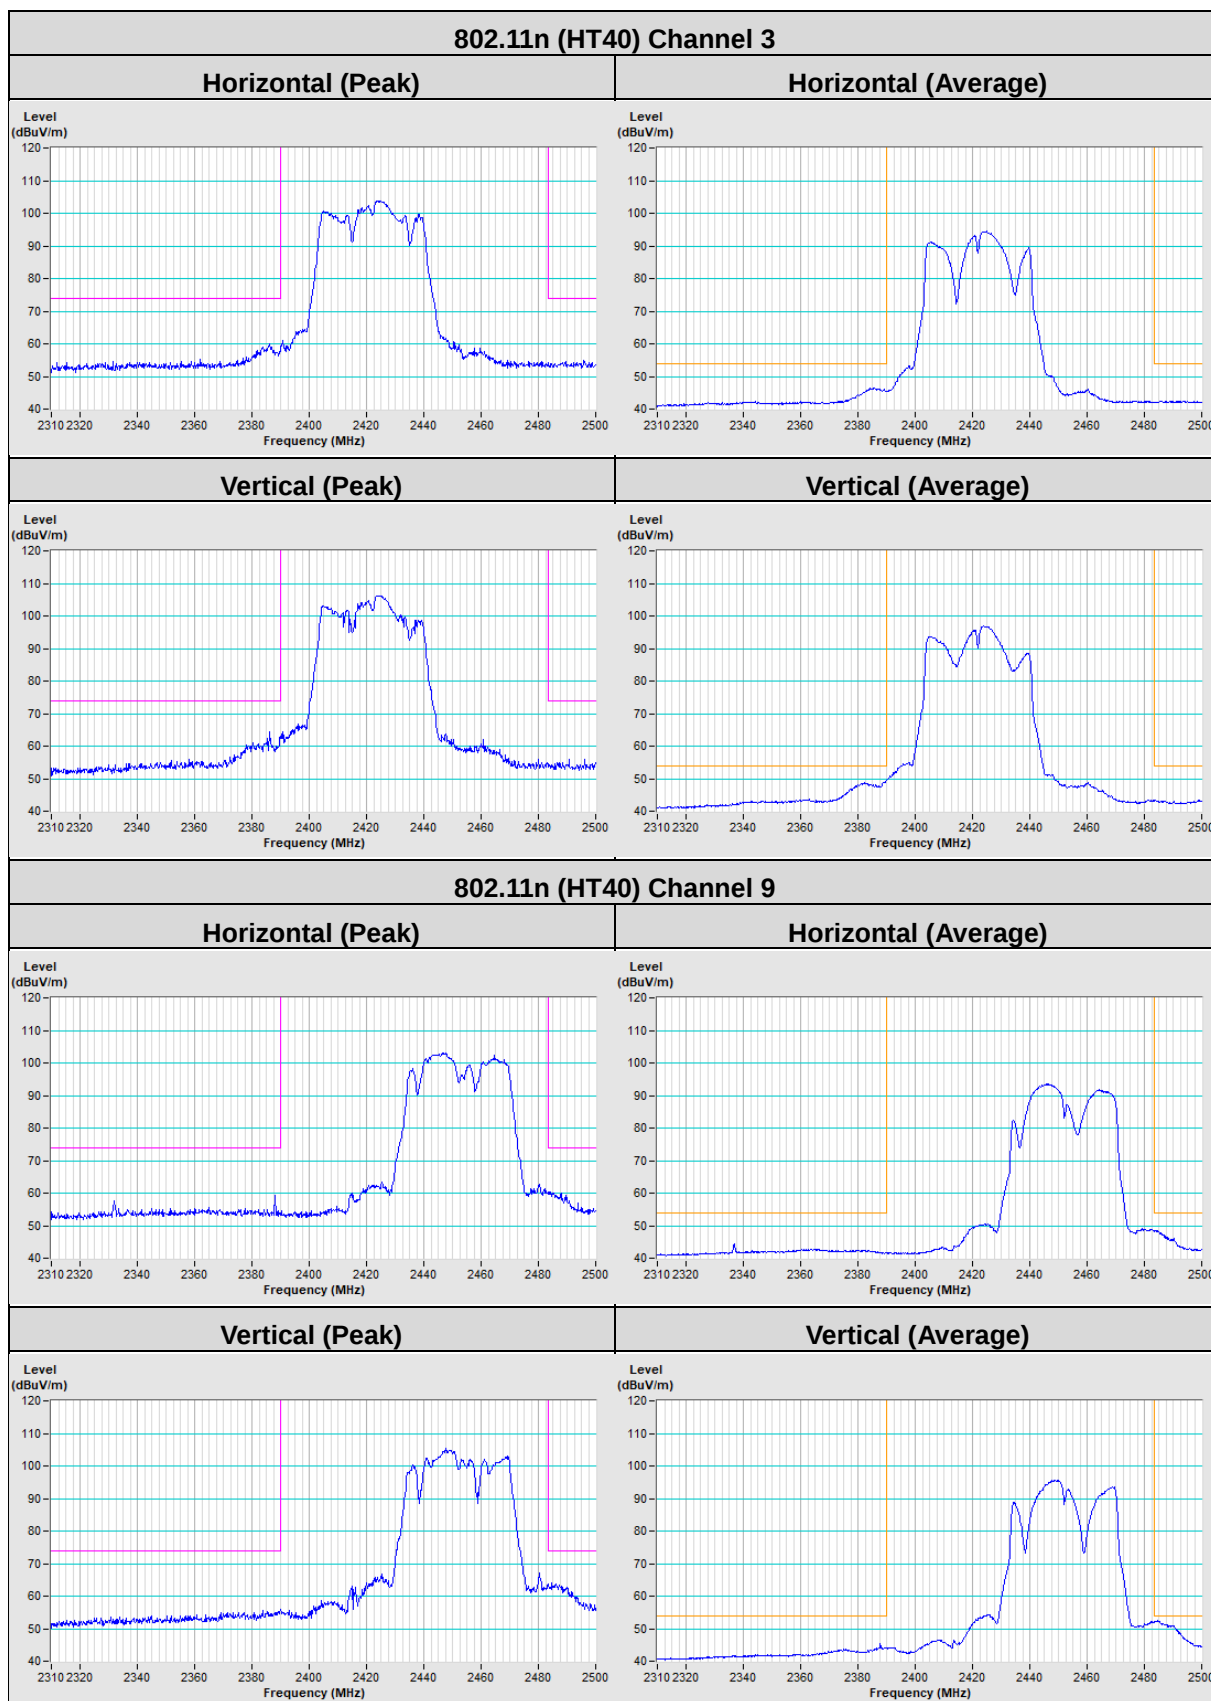

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---