

MEASUREMENT REPORT

of

Wireless LAN PCI Card

Applicant : TRENDware International, Inc.
EUT : 802.11g Wireless PCI Adapter
Model : TEW-443PI
FCC ID : S9ZTEW443PI

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.


We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and Subpart C Section 15.247.

Applicant : TRENDware International Inc.
Applicant address : 3135 Kashiwa Street Torrance, CA 90505, United States
FCC ID : S9ZTEW443PI
Report No. : C5115050388
Test Date : December 14, 2004

Prepared by:

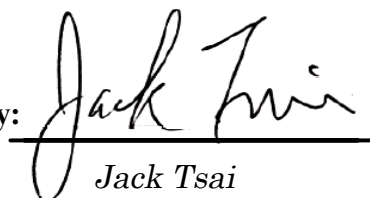
Jack Tsai

Approved by:

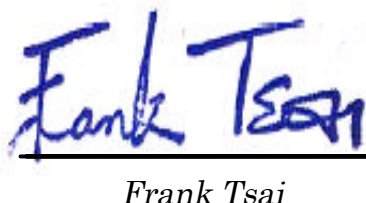
Frank Tsai

Conditions of issue :

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**
- (3) **This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.**

★ NVLAP LAB CODE: 200174-0

Federal Communications Commission

Declaration of Conformity

for the following equipment:

Product name : 802.11g Wireless PCI Adapter
 Trade name : TRENDnet
 Model name : TEW-443PI

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : C5115050388

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
 including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: CAMEO COMMUNICATIONS, INC.	To be determined
Computer address: 6F, No.22, Chung Shin Rd., Hsi-Chih, Taipei 221, Taiwan	
ZIP / Postal code 221	
Contact person: Jason Chang	
Title: Wireless Comm. R&D Dept Manager	
Internet e-mail address: jason_chang@mail.cameo.com.tw	
Tel / Fax: 886-2-26499800 / 886-2-26499984	

Tables of Contents

I.	GENERAL	6
1.1	Introduction	6
1.2	Description of EUT	6
1.3	Test method	6
1.4	Description of Support Equipment	7
1.5	Configuration of System Under Test	10
1.6	Verify the Frequency and Channel	12
1.7	Test Procedure	13
1.8	Location of the Test Site	13
1.9	General Test Condition	13
II.	Section 15.101(a) : Equipment Authorization of Unintentional Radiators	14
III.	Section 15.203 : Antenna Requirement	15
IV.	Section 15.207 : Power Line Conducted Emissions for AC Powered Units	16
4.1	Test Condition & Setup	16
4.2	List of Test Instruments	17
4.3	Test Result of Conducted Emissions	18
	RX mode	18
	IEEE 802.11b	19
	IEEE 802.11g	21
	Super 802.11g	22
V.	Section 15.247(a) : Technical Description of the EUT.....	23
VI.	Section 15.247(a)(2) : Bandwidth for Direct Sequence System	24
6.1	Test Condition & Setup	24
6.2	Test Instruments Configuration	24
6.3	List of Test Instruments	24

6.4	Test Result of Bandwidth	24
	IEEE 802.11b/g CH01	25
	IEEE 802.11b/g CH06	26
	IEEE 802.11b/g CH11	27
	Super 802.11g CH06	28
VII.	Section 15.247(b) : Power Output	29
7.1	Test Condition & Setup	29
7.2	List of Test Instruments	29
7.3	Test Result	30
VIII.	Section 15.247(c) : Spurious Emissions (Radiated)	31
8.1	Test Condition & Setup	31
8.2	List of Test Instruments	33
8.3	Test Result of Spurious Radiated Emissions	34
	RX mode	34
	IEEE 802.11b CH01.....	36
	IEEE 802.11b CH06.....	38
	IEEE 802.11b CH11.....	40
	IEEE 802.11g CH01.....	42
	IEEE 802.11g CH06.....	44
	IEEE 802.11g CH11.....	46
	Super 802.11g CH06	48
8.4	Test Result of Bandedge	50
	IEEE 802.11b	51
	IEEE 802.11g	53
IX.	Section 15.247(d) : Power Spectral Density	55
9.1	Test Condition & Setup	55
9.2	Test Instruments Configuration	55
9.3	List of Test Instruments.....	55
9.4	Test Result of Power Spectral Density	56
	IEEE 802.11b/g CH01	57
	IEEE 802.11b/g CH06	58
	IEEE 802.11b/g CH11	59
	Super 802.11g CH06	60

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID : S9ZTEW443PI
Model Name : TEW-443PI
Product Description : 802.11g Wireless PCI Adapter
Frequency Range : 2.412 GHz ~ 2.462GHz
Support Channel : 11 Channels
Modulation Skill : DBPSK, DQPSK, CCK, OFDM
Power Type : Powered by Protocol Control Information Interface of PC
Data Cable : None

1.3 Test method

1. Put the EUT into a personal computer's PCI slot and fix it.
2. Using the PC and software provided by the manufacturer to control EUT, the test is performed under the specific conditions.
3. Set different data rate and channel (CH01/CH06/CH11/Super 802.11g CH06) being tested and repeat the procedures above.
 - (3.1) Radiated for Intentional test:
making EUT to the mode of continuous transmission
 - (3.2) Conducted test and Radiated for unintentional test:
making EUT to the linking (Rx/Tx) mode with far support equipments

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : IBM 6840

Model No. : 6840MJV

Serial No. : 96CC 0BT

FCC ID : DoC (Declaration of Confirmation) Approved

BSMI : 3892I279

Power type : 100 ~ 127 / 200 ~ 240VAC, 4A/2A 50/60 Hz, Switching

Power cord : Non-shielded, 182cm length, Plastic hood, No ferrite core

Monitor : HP 15' Color Monitor

Model No. : D2827A

Serial No. : KR91161719

FCC ID : C5F7NFCMC1518X

BSMI : 3872B039

Power type : 100 ~ 240 VAC / 50 ~ 60 Hz, Switching

Power cord : Shielded, 1.83m long, No ferrite core

Data cable : Shielded, 1.46m long, with two ferrite cores

Printer : HP

Model No. : C6464A

Serial No. : TH16LEB5PK

FCC ID : N/A, DoC Approved

BSMI : 3892H381

Power type : Switching adaptor

Power cord : Non-shielded, 173cm length, No ferrite core

(between adaptor and AC source)

Non-shielded, 180cm length, with ferrite core

(between printer and adaptor)

Data cable : Shielded, 1.70m length, No ferrite core

PS/2 Keyboard : HP

Model No. : SK-2501K
Serial No. : MR81008879
FCC ID : GYUR38SK
BSMI : 3862A621
Power type : By PC
Data cable : Shielded, 1.73m long, with ferrite core

PS/2 Mouse : HP

Model No. : M-S34
Serial No. : LZB90910464
FCC ID : DZL211029
BSMI : 4862A011
Power type : By PC
Power cord : Non-shielded, 1.88m long, No ferrite core

Modem : ACEEX

Model No. : XDM-56V14
FCC ID : IFAXDM-56V14
Power type : Linear
Power cord : Non-shielded, 1.9m length, No ferrite cord
Data cable : RS232, Shielded, 1.2m length, No ferrite core
RJ11C x 2, 7' length non-shielded, No ferrite core

USB Gamepad : Rockfire

Model No. : QF-337uv
Serial No. : KR91379759
FCC ID : None (CE approval)
BSMI : 3862A574
Power type : By computer
Data Cable : Shielded, 1.81m length, Plastic, with ferrite core

Notebook : **IBM Think Pad X20**

Model No. : 2662-11T

Serial No. : FX-1192200/09

FCC ID : N/A, Doc Approved

BSMI : 3892B565

Adaptor : **IBM**

Model No. : PA2450U

Serial No. : 02K6654

FCC ID : N/A, Doc Approved

Power type : I/P: 100 ~ 240Vac, 50 ~ 60 Hz, 0.5A ~ 1.2A
O/P: 16Vdc, 4.5A

Power cord : Non-shielded, 1.80m long, Plastic, with ferrite core

WLAN Card : **Gemtek Technology Co., Ltd.**

Model No. : C911003


FCC ID : MXF-C911003

WLAN AP : **ASUS**

Model No. : WL-330g

1.5 Configuration of System Under Test


1.5.1 Conducted and Radiated for Unintentional

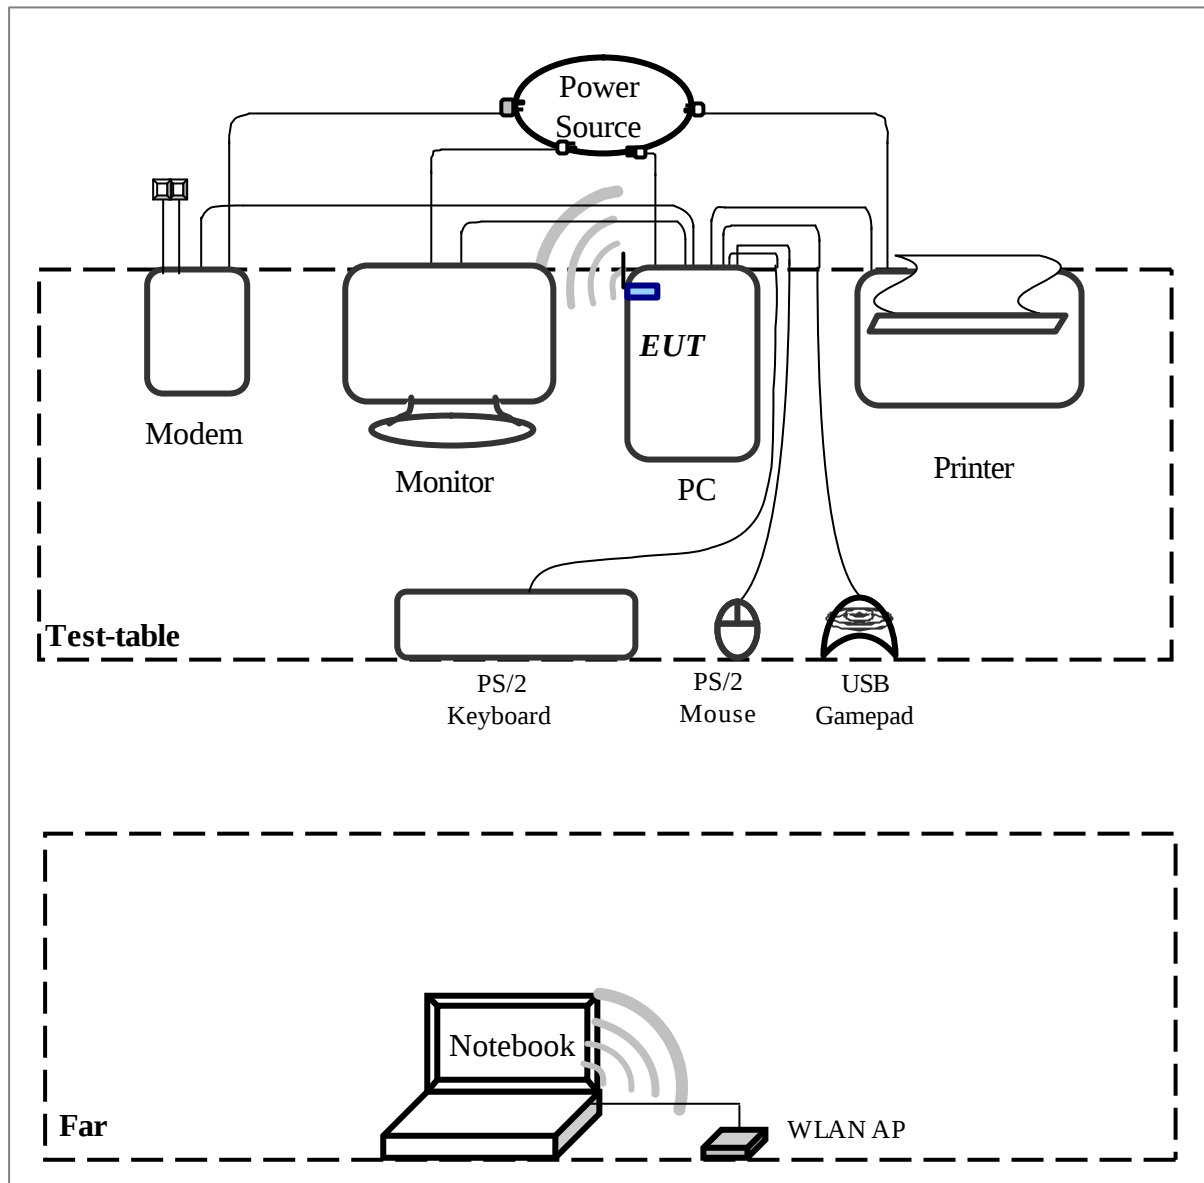

Connections of Computer:

- *Parallel Port --- a printer
- *Serial Port --- an external modem
- *PS/2 Port --- a PS/2 keyboard
- *PS/2 Port --- a PS/2 mouse
- *USB Port --- a USB gamepad
- *PCI Interface --- EUT

1.5.2 Radiated of Intentional

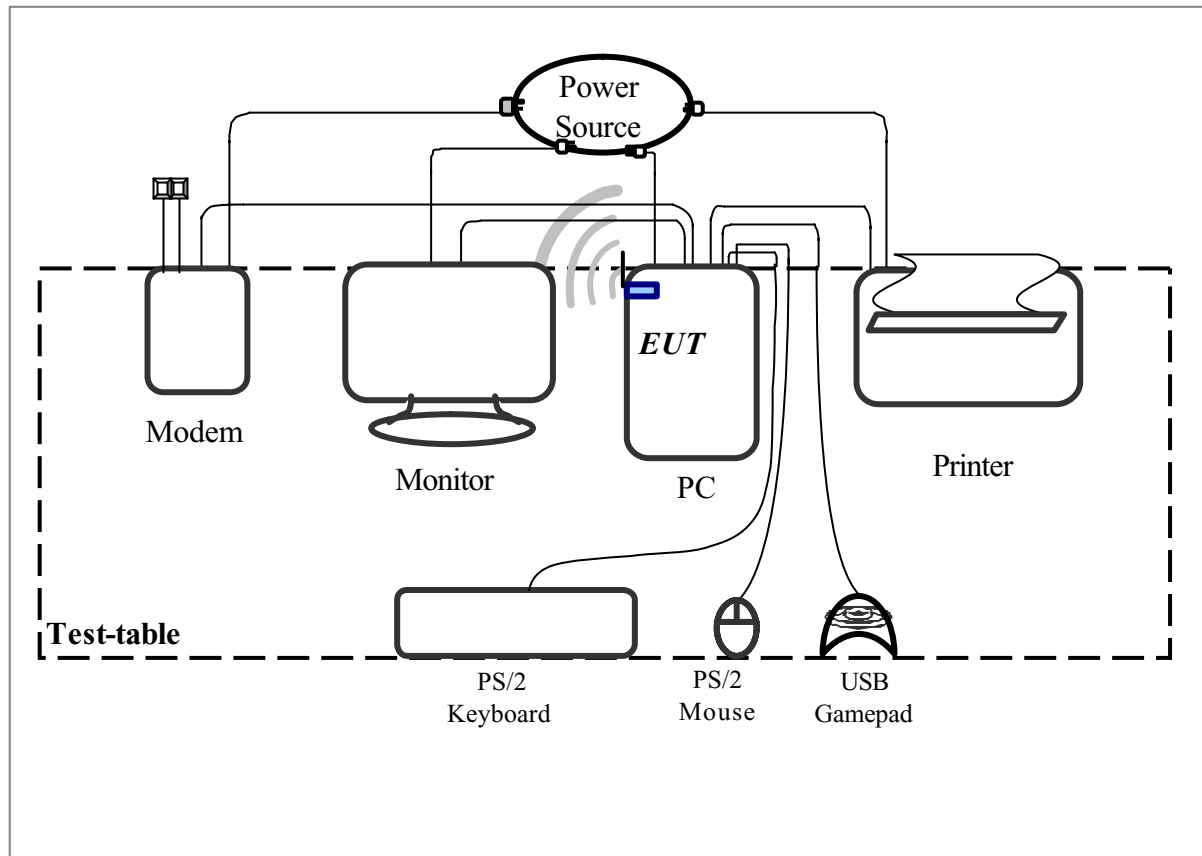

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by PC.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency	Channel	Frequency
1	2.412 GHz	7	2.442 GHz
2	2.417 GHz	8	2.447 GHz
3	2.422 GHz	9	2.452 GHz
4	2.427 GHz	10	2.457 GHz
5	2.432 GHz	11	2.462 GHz
6	2.437 GHz		

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Ch – 1; Middle: Ch – 6; Bottom: Ch – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The CH01, CH06 and CH11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a Protocol Control Information interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Section15.109 (Radiated emission limits) is same as Section15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT has a detachable antenna, the detachable antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector. The antenna requirement stated in Sect.15.203 is inapplicable to this EUT.

The antenna specification of list as follows, (Please Ref. to RF Exposure Calculations, antenna specification)

Detachable antenna

Manufacturer	:	WHA YU INDUSTRIAL CO., LTD.
Model	:	C056-510131-A, Rve:X1
Connector	:	SMA Plug Reverse
Antenna Type	:	Dipole Antenna
Antenna Gain	:	1.8dBi (Max.)

VI. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06), the other in bottom (CH11) and Supper 802.11g (only CH06).

4.2 List of Test Instruments

				<u>Calibration Date</u>
Instrument Name	Model	Brand	Serial No.	Next time
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
LISN (EUT)	LISN-01	TRC	99-05	10/07/05
LISN (Support E.)	LISN-01	TRC	9912-03, 04	11/04/05
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/05
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/05
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/05
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/05
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/05

4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: RX mode

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	199.000	33.72	---	---	64.60	54.60	-20.88
	329.000	28.70	---	---	60.89	50.89	-22.19
	528.000	29.44	---	---	56.00	46.00	-16.56
	788.000	28.40	---	---	56.00	46.00	-17.60
	1256.000	27.23	---	---	56.00	46.00	-18.77
	2437.000	26.37	---	---	56.00	46.00	-19.63
	2899.000	27.25	---	---	56.00	46.00	-18.75
	4406.000	33.90	---	---	56.00	46.00	-12.10
	6870.000	27.42	---	---	60.00	50.00	-22.58
	9510.000	29.14	---	---	60.00	50.00	-20.86
Line 2	199.000	34.70	---	---	64.60	54.60	-19.90
	264.000	30.86	---	---	62.74	52.74	-21.88
	329.000	32.86	---	---	60.89	50.89	-18.03
	528.000	32.51	---	---	56.00	46.00	-13.49
	788.000	31.42	---	---	56.00	46.00	-14.58
	989.000	29.79	---	---	56.00	46.00	-16.21
	1451.000	27.02	---	---	56.00	46.00	-18.98
	1836.000	24.84	---	---	56.00	46.00	-21.16
	4406.000	33.21	---	---	56.00	46.00	-12.79
	9290.000	30.33	---	---	60.00	50.00	-19.67

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit
and "-" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b, Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	528.000	29.28	---	---	56.00	46.00	-16.72
	788.000	27.44	---	---	56.00	46.00	-18.56
	1256.000	26.28	---	---	56.00	46.00	-19.72
	4406.000	33.65	---	---	56.00	46.00	-12.35
	4762.000	30.60	---	---	56.00	46.00	-15.40
	9330.000	31.19	---	---	60.00	50.00	-18.81
Line 2	329.000	33.07	---	---	60.89	50.89	-17.82
	528.000	32.86	---	---	56.00	46.00	-13.14
	724.000	29.93	---	---	56.00	46.00	-16.07
	788.000	31.56	---	---	56.00	46.00	-14.44
	989.000	30.19	---	---	56.00	46.00	-15.81
	4406.000	33.09	---	---	56.00	46.00	-12.91

Test mode: IEEE 802.11b, Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	199.000	33.38	---	---	64.60	54.60	-21.22
	528.000	28.91	---	---	56.00	46.00	-17.09
	788.000	27.67	---	---	56.00	46.00	-18.33
	1243.000	27.00	---	---	56.00	46.00	-19.00
	4406.000	33.38	---	---	56.00	46.00	-12.62
	9330.000	30.07	---	---	60.00	50.00	-19.93
Line 2	329.000	32.74	---	---	60.89	50.89	-18.15
	528.000	32.56	---	---	56.00	46.00	-13.44
	788.000	31.35	---	---	56.00	46.00	-14.65
	980.000	29.77	---	---	56.00	46.00	-16.23
	4406.000	32.93	---	---	56.00	46.00	-13.07
	9460.000	32.02	---	---	60.00	50.00	-17.98

Test mode: IEEE 802.11b, Channel 11

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	528.000	30.02	---	---	56.00	46.00	-15.98
	788.000	27.37	---	---	56.00	46.00	-18.63
	980.000	27.18	---	---	56.00	46.00	-18.82
	1582.000	27.21	---	---	56.00	46.00	-18.79
	4210.000	32.63	---	---	56.00	46.00	-13.37
	4762.000	29.95	---	---	56.00	46.00	-16.05
Line 2	528.000	33.35	---	---	56.00	46.00	-12.65
	592.000	29.98	---	---	56.00	46.00	-16.02
	724.000	29.74	---	---	56.00	46.00	-16.26
	788.000	31.00	---	---	56.00	46.00	-15.00
	989.000	29.63	---	---	56.00	46.00	-16.37
	4406.000	33.00	---	---	56.00	46.00	-13.00

Test mode: IEEE 802.11g, Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	528.000	29.30	---	---	56.00	46.00	-16.70
	788.000	27.90	---	---	56.00	46.00	-18.10
	1243.000	26.42	---	---	56.00	46.00	-19.58
	1518.000	26.26	---	---	56.00	46.00	-19.74
	3094.000	26.26	---	---	56.00	46.00	-19.74
	4406.000	34.37	---	---	60.00	50.00	-15.63
Line 2	528.000	33.19	---	---	56.00	46.00	-12.81
	592.000	30.19	---	---	56.00	46.00	-15.81
	788.000	31.58	---	---	56.00	46.00	-14.42
	4406.000	33.19	---	---	56.00	46.00	-12.81
	4762.000	31.07	---	---	56.00	46.00	-14.93
	9550.000	30.67	---	---	60.00	50.00	-19.33

Test mode: IEEE 802.11g, Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	528.000	29.07	---	---	56.00	46.00	-16.93
	788.000	28.63	---	---	56.00	46.00	-17.37
	4406.000	32.70	---	---	56.00	46.00	-13.30
	4762.000	30.37	---	---	56.00	46.00	-15.63
	8920.000	29.19	---	---	60.00	50.00	-20.81
	9290.000	30.51	---	---	60.00	50.00	-19.49
Line 2	329.000	33.21	---	---	60.89	50.89	-17.68
	528.000	33.09	---	---	56.00	46.00	-12.91
	788.000	31.63	---	---	56.00	46.00	-14.37
	989.000	29.88	---	---	56.00	46.00	-16.12
	4406.000	32.65	---	---	56.00	46.00	-13.35
	4762.000	30.88	---	---	56.00	46.00	-15.12

Test mode: IEEE 802.11g, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	523.000	29.26	---	---	56.00	46.00	-16.74
	788.000	28.02	---	---	56.00	46.00	-17.98
	1451.000	26.09	---	---	56.00	46.00	-19.91
	2636.000	26.35	---	---	56.00	46.00	-19.65
	4406.000	32.67	---	---	56.00	46.00	-13.33
	9420.000	31.38	---	---	60.00	50.00	-18.62
Line 2	329.000	32.79	---	---	60.89	50.89	-18.10
	528.000	32.58	---	---	56.00	46.00	-13.42
	788.000	31.35	---	---	56.00	46.00	-14.65
	4406.000	33.16	---	---	56.00	46.00	-12.84
	4762.000	30.81	---	---	56.00	46.00	-15.19
	9330.000	31.26	---	---	60.00	50.00	-18.74

Test mode: Super 802.11g mode (only CH06)

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	523.000	28.30	---	---	56.00	46.00	-17.70
	788.000	27.83	---	---	56.00	46.00	-18.17
	1243.000	27.37	---	---	56.00	46.00	-18.63
	4406.000	33.21	---	---	56.00	46.00	-12.79
	4762.000	30.91	---	---	56.00	46.00	-15.09
	9330.000	30.23	---	---	60.00	50.00	-19.77
Line 2	329.000	33.09	---	---	60.89	50.89	-17.80
	528.000	33.21	---	---	56.00	46.00	-12.79
	788.000	31.63	---	---	56.00	46.00	-14.37
	989.000	29.93	---	---	56.00	46.00	-16.07
	4406.000	33.26	---	---	56.00	46.00	-12.74
	4762.000	31.49	---	---	56.00	46.00	-14.51

V. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

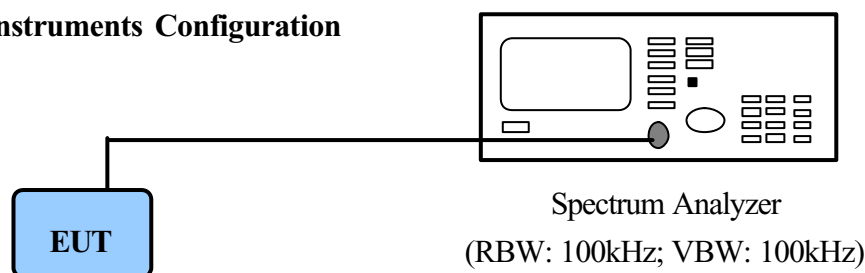

PC to control the EUT at maximal power output and channel Number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/30/04

6.4 Test Result of Bandwidth


Channel	802.11b	802.11g	Super 802.11g
01	11.28 MHz	16.80 MHz	None
06	11.28 MHz	16.84 MHz	33.50 MHz
11	11.36 MHz	16.84 MHz	None

- Note:
- The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)=100kHz and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 - The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)




IEEE 802.11b

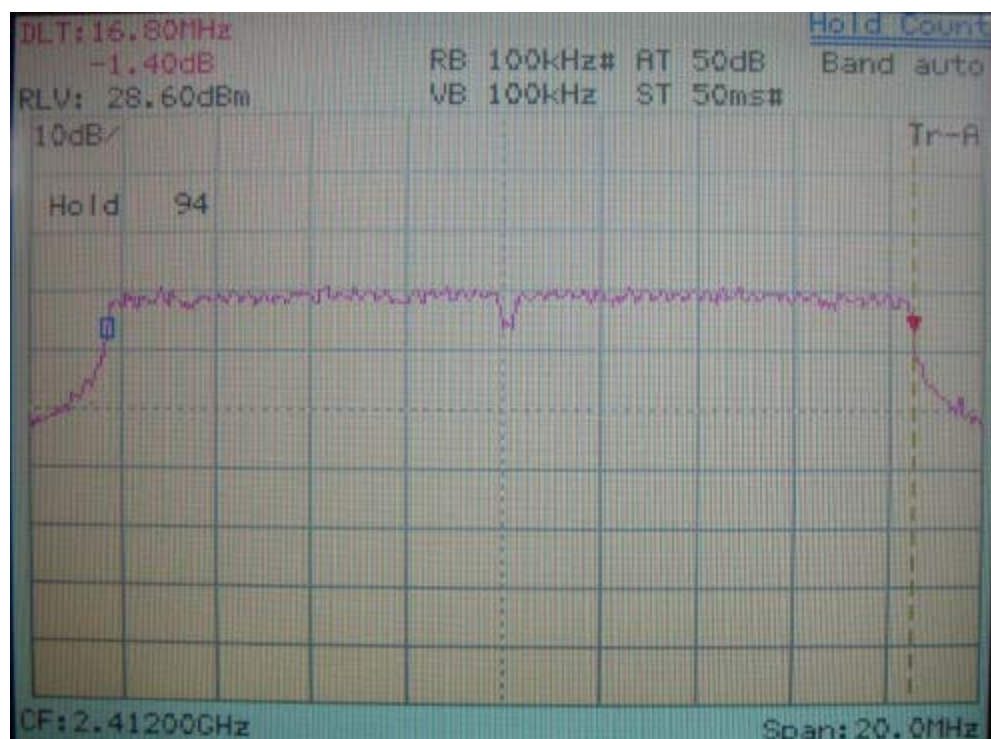


IEEE 802.11g

6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

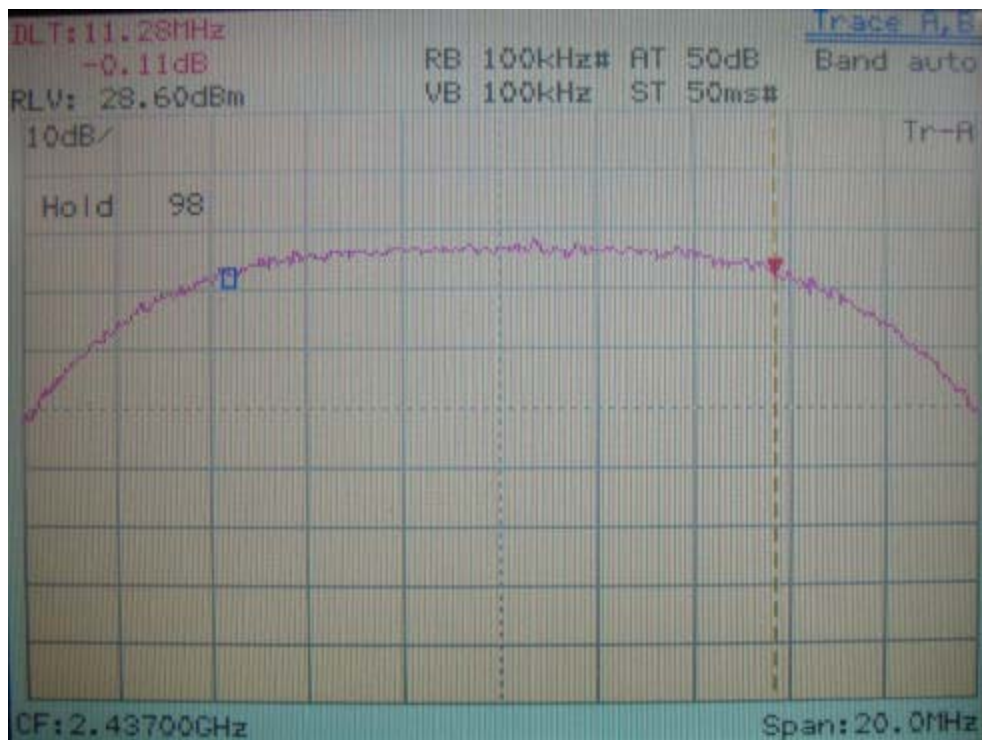


IEEE 802.11b

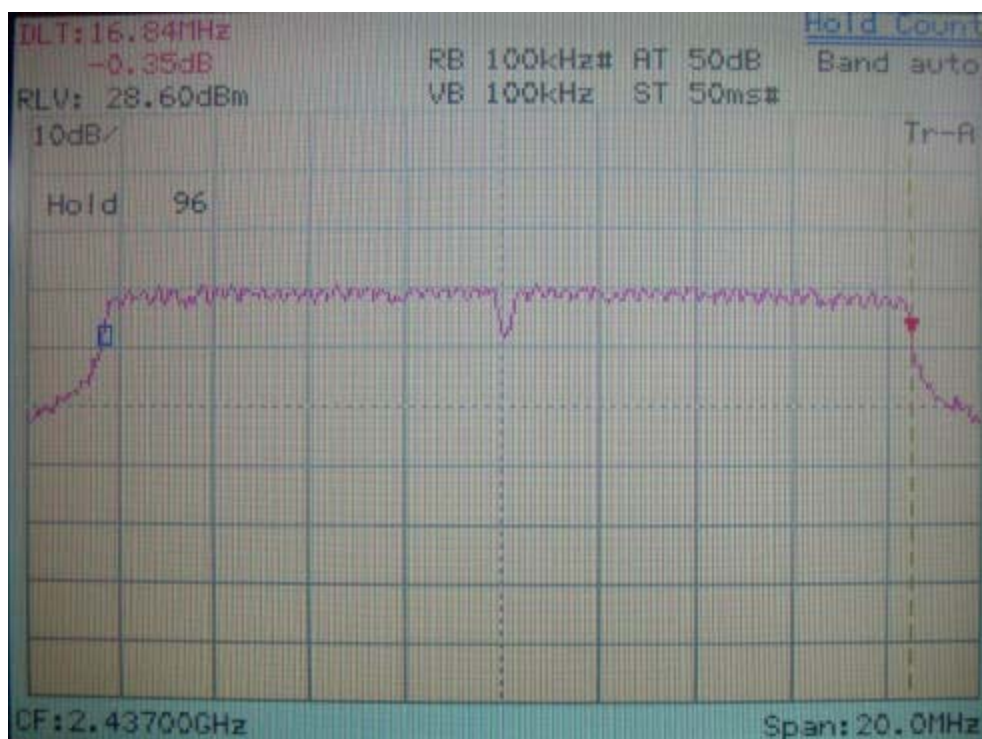


IEEE 802.11g

6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)

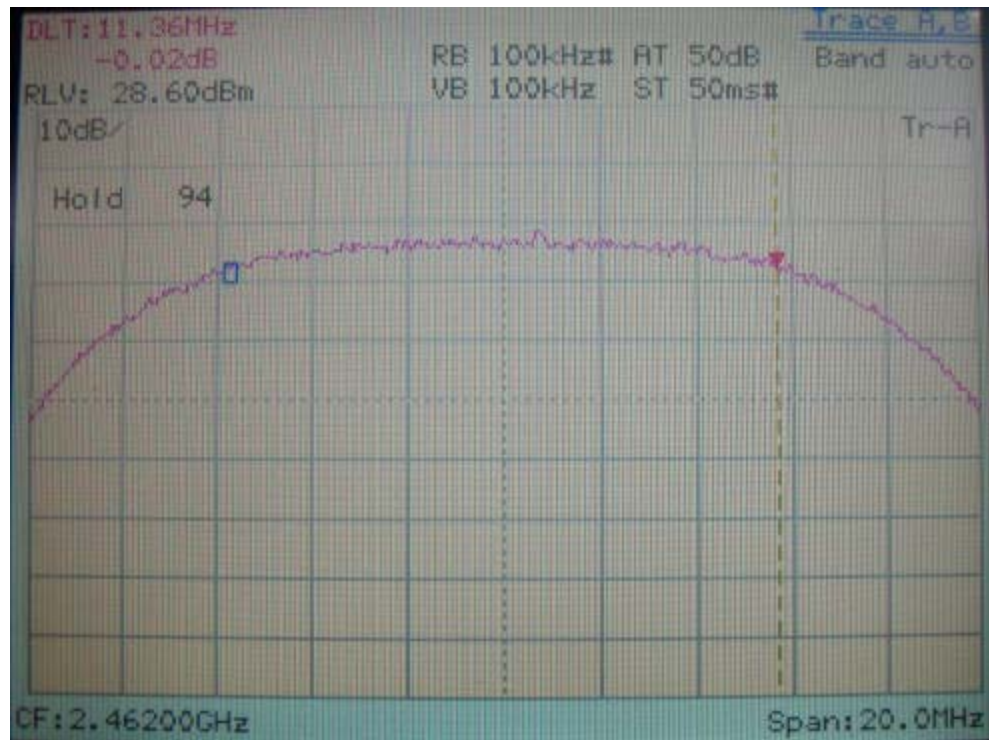

IEEE 802.11b

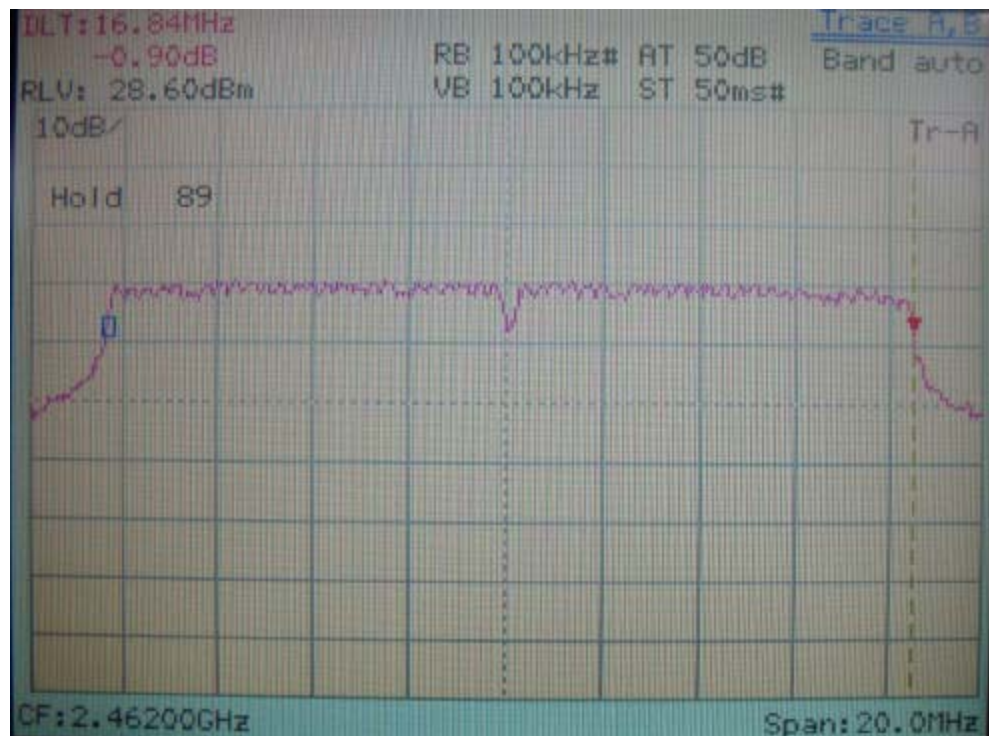

IEEE 802.11g


6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)



Super 802.11g

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup



1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	04/16/05
Peak Power Sensor	57340	BOONTON	2698	04/16/05

7.3 Test Result

Formula:

$$\text{RF Output of EUT} + |\text{Cable Loss}| = \text{Output Peak Power}$$

IEEE 802.11b

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
CH 01	20.72	0.60	21.32	135.52
CH 06	20.91	0.60	21.51	141.58
CH 11	20.51	0.60	21.11	129.12

IEEE 802.11g

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
CH 01	22.83	0.60	23.43	220.29
CH 06	22.72	0.60	23.32	214.78
CH 11	22.15	0.60	22.75	188.36

Super 802.11g (only CH06)

Channel	RF Output	Cable Loss	Output Peak Power	
	dBm	dBm	dBm	mW
CH 06	21.18	0.60	21.78	150.66

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission skill*: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06), the other in bottom (CH11) and super 11g (only CH06). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB μ V/m) is determined by algebraically adding the measured reading in dB μ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} + \text{Switching Box Loss}$$

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

$$\text{Correction Factors} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} + \text{Switching Box Loss}$$

8.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	10/11/05
Pre-amplifier	PA1F	TRC	1FAC	05/20/05
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/05
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/05
Spectrum Analyzer	8564E	HP	3720A00840	08/13/05
Microwave Preamplifier	84125C	HP	US36433002	08/13/05
Horn Antenna	3115	EMCO	9104-3668	12/18/04
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	12/18/04
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	12/18/04
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	12/12/04
Pre-amplifier	PA2F	TRC	2F1GZ	03/20/05
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	03/20/05
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	03/20/05

8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

Test mode: RX mode for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.70	22.02	1.00	143	5.83	27.85	40.00	-12.15
228.85	30.97	1.00	117	-4.08	26.89	43.50	-16.61
433.16	30.70	1.00	78	0.33	31.03	46.00	-14.97
499.84	28.85	1.00	70	2.89	31.74	46.00	-14.26
531.37	25.72	1.00	182	4.22	29.94	46.00	-16.06
565.32	26.15	1.00	182	5.52	31.67	46.00	-14.33

Test mode: RX mode for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	26.39	1.00	189	5.91	32.30	40.00	-7.70
67.59	27.15	1.00	38	1.55	28.70	40.00	-11.30
98.51	26.75	1.00	9	-1.10	25.65	43.50	-17.85
499.84	28.48	1.00	168	2.89	31.37	46.00	-14.63
532.58	26.31	1.00	320	4.27	30.58	46.00	-15.42
565.32	25.69	1.00	188	5.52	31.21	46.00	-14.79

Note:

1. Margin = Amplitude – Limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction Factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: RX mode for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1595.00	1.00	201	40.07	---	0.31	40.38	---	73.96	53.96	-13.58
4003.33	1.00	58	30.57	---	12.51	43.08	---	73.96	53.96	-10.88
7410.42	1.00	14	24.74	---	21.83	46.57	---	73.96	53.96	-7.39
9698.33	1.00	0	24.07	---	23.12	47.19	---	73.96	53.96	-6.77
19547.71	1.00	293	46.66	---	1.70	48.36	---	73.96	53.96	-5.60
21361.04	1.00	328	45.49	---	2.67	48.16	---	73.96	53.96	-5.80

Test mode: RX mode for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1587.92	1.00	201	39.74	---	0.28	40.02	---	73.96	53.96	-13.94
2671.67	1.00	154	31.08	---	8.02	39.10	---	73.96	53.96	-14.86
4060.00	1.00	0	30.24	---	12.60	42.84	---	73.96	53.96	-11.12
9677.08	1.00	91	24.74	---	23.08	47.82	---	73.96	53.96	-6.14
24017.29	1.00	39	47.32	---	3.12	50.44	---	73.96	53.96	-3.52

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.70	23.85	1.00	3	5.83	29.68	40.00	-10.32
366.47	28.62	1.00	221	-2.16	26.46	46.00	-19.54
399.81	27.56	1.00	157	-1.01	26.55	46.00	-19.45
433.16	31.50	1.00	75	0.33	31.83	46.00	-14.17
498.63	29.66	1.00	67	2.85	32.51	46.00	-13.49
565.32	26.28	1.00	177	5.52	31.80	46.00	-14.20

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	27.58	1.00	85	5.91	33.49	40.00	-6.51
66.37	24.29	1.00	59	1.66	25.95	40.00	-14.05
433.16	25.84	1.00	305	0.33	26.17	46.00	-19.83
501.06	29.58	1.00	176	2.94	32.52	46.00	-13.48
565.32	26.52	1.00	189	5.52	32.04	46.00	-13.96
632.01	24.27	1.00	168	7.82	32.09	46.00	-13.91

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
1599.16	1.00	172	38.86	25.17	14.34	53.20	39.51	73.96	53.96	-14.45
2160.42	1.00	345	43.00	---	8.54	51.54	---	73.96	53.96	-2.42
4823.12	1.00	171	42.44	---	3.76	46.20	---	73.96	53.96	-7.76
7233.75	1.00	300	36.28	---	10.07	46.35	---	73.96	53.96	-7.61
9648.04	1.00	73	41.95	37.44	11.46	53.41	48.90	73.96	53.96	-5.06
12061.04	1.00	281	37.77	---	9.81	47.58	---	73.96	53.96	-6.38

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2160.42	1.00	283	43.83	---	8.54	52.37	---	73.96	53.96	-1.59
2240.01	1.00	279	46.00	42.00	8.76	54.76	50.76	73.96	53.96	-3.20
2360.02	1.00	193	45.99	42.67	9.10	55.09	51.77	73.96	53.96	-2.19
9650.42	1.00	12	38.11	---	11.47	49.58	---	73.96	53.96	-4.38
12061.04	1.00	222	37.27	---	9.81	47.08	---	73.96	53.96	-6.88
24120.00	1.00	205	46.16	---	3.40	49.56	---	73.96	53.96	-4.40

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	23.34	1.00	177	5.91	29.25	40.00	-10.75
399.81	28.06	1.00	160	-1.01	27.05	46.00	-18.95
433.16	31.18	1.00	75	0.33	31.51	46.00	-14.49
500.45	28.55	1.00	67	2.92	31.47	46.00	-14.53
531.98	25.37	1.00	311	4.25	29.62	46.00	-16.38
565.32	26.45	1.00	182	5.52	31.97	46.00	-14.03

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	27.26	1.00	120	5.91	33.17	40.00	-6.83
66.98	25.16	1.00	100	1.61	26.77	40.00	-13.23
91.84	24.98	1.00	94	-0.57	24.41	43.50	-19.09
500.45	30.12	1.00	181	2.92	33.04	46.00	-12.96
530.76	28.19	1.00	3	4.20	32.39	46.00	-13.61
632.01	23.78	1.00	170	7.82	31.60	46.00	-14.40

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2318.75	1.00	34	42.84	---	8.98	51.82	---	73.96	53.96	-2.14
2358.33	1.00	34	43.50	---	9.09	52.59	---	73.96	53.96	-1.37
7312.29	1.00	28	36.27	---	10.30	46.57	---	73.96	53.96	-7.39
9747.08	1.00	4	40.10	---	11.89	51.99	---	73.96	53.96	-1.97
12187.92	1.00	55	39.44	---	9.74	49.18	---	73.96	53.96	-4.78
24371.46	1.00	261	45.49	---	3.26	48.75	---	73.96	53.96	-5.21

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2160.42	1.00	26	43.83	---	8.54	52.37	---	73.96	53.96	-1.59
2240.01	1.00	26	46.00	41.33	8.76	54.76	50.09	73.96	53.96	-3.87
2360.00	1.00	8	46.33	42.67	9.10	55.43	51.77	73.96	53.96	-2.19
9747.08	1.00	272	39.77	---	11.89	51.66	---	73.96	53.96	-2.30
12187.92	1.00	211	38.44	---	9.74	48.18	---	73.96	53.96	-5.78
21934.79	1.00	49	45.16	---	3.09	48.25	---	73.96	53.96	-5.71

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.70	22.04	1.00	270	5.83	27.87	40.00	-12.13
366.47	28.27	1.00	217	-2.16	26.11	46.00	-19.89
399.21	27.62	1.00	152	-1.03	26.59	46.00	-19.41
433.16	31.18	1.00	76	0.33	31.51	46.00	-14.49
499.24	29.20	1.00	61	2.87	32.07	46.00	-13.93
565.32	26.33	1.00	172	5.52	31.85	46.00	-14.15

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	27.61	1.00	217	5.91	33.52	40.00	-6.48
66.98	24.41	1.00	12	1.61	26.02	40.00	-13.98
285.84	28.77	1.00	325	-3.85	24.92	46.00	-21.08
433.16	26.63	1.00	300	0.33	26.96	46.00	-19.04
499.84	30.32	1.00	184	2.89	33.21	46.00	-12.79
565.32	26.08	1.00	184	5.52	31.60	46.00	-14.40

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2358.33	1.00	23	42.17	---	9.09	51.26	---	73.96	53.96	-2.70
4925.83	1.00	188	41.11	---	4.13	45.24	---	73.96	53.96	-8.72
7384.79	1.00	230	36.28	---	10.42	46.70	---	73.96	53.96	-7.26
9849.79	1.00	89	39.44	---	11.93	51.37	---	73.96	53.96	-2.59
12308.75	1.00	79	37.94	---	9.56	47.50	---	73.96	53.96	-6.46
24619.37	1.00	189	46.66	---	3.01	49.67	---	73.96	53.96	-4.29

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2400.00	1.00	35	44.99	37.50	9.21	54.20	46.71	73.96	53.96	-7.25
2520.02	1.00	35	44.50	38.33	9.53	54.03	47.86	73.96	53.96	-6.10
7384.79	1.00	147	35.28	---	10.42	45.70	---	73.96	53.96	-8.26
9849.79	1.00	8	38.11	---	11.93	50.04	---	73.96	53.96	-3.92
12308.75	1.00	123	37.61	---	9.56	47.17	---	73.96	53.96	-6.79
22157.92	1.00	160	45.82	---	3.25	49.07	---	73.96	53.96	-4.89

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.70	21.25	1.00	307	5.83	27.08	40.00	-12.92
366.47	30.15	1.00	196	-2.16	27.99	46.00	-18.01
399.81	28.15	1.00	164	-1.01	27.14	46.00	-18.86
433.16	32.37	1.00	239	0.33	32.70	46.00	-13.30
499.24	28.71	1.00	72	2.87	31.58	46.00	-14.42
565.32	25.46	1.00	343	5.52	30.98	46.00	-15.02

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.70	25.63	1.00	176	5.83	31.46	40.00	-8.54
66.37	25.02	1.00	64	1.66	26.68	40.00	-13.32
499.24	29.73	1.00	181	2.87	32.60	46.00	-13.40
531.98	27.42	1.00	351	4.25	31.67	46.00	-14.33
565.32	26.26	1.00	124	5.52	31.78	46.00	-14.22
630.79	23.97	1.00	156	7.77	31.74	46.00	-14.26

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1598.07	1.00	202	38.97	25.33	14.36	53.33	39.69	73.96	53.96	-14.27
2160.42	1.00	137	44.33	---	8.54	52.87	---	73.96	53.96	-1.09
2239.58	1.00	126	44.00	---	8.76	52.76	---	73.96	53.96	-1.20
7233.75	1.00	166	35.78	---	10.07	45.85	---	73.96	53.96	-8.11
9644.37	1.00	273	36.47	---	11.44	47.91	---	73.96	53.96	-6.05
12061.04	1.00	211	37.77	---	9.81	47.58	---	73.96	53.96	-6.38

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2160.01	1.00	352	45.50	41.50	8.54	54.04	50.04	73.96	53.96	-3.92
2240.01	1.00	352	45.50	41.67	8.76	54.26	50.43	73.96	53.96	-3.53
2358.01	1.00	270	44.84	32.17	9.09	53.93	41.26	73.96	53.96	-12.70
2518.48	1.00	270	44.34	33.67	9.52	53.86	43.19	73.96	53.96	-10.77
2637.17	1.00	293	45.00	32.50	9.75	54.75	42.25	73.96	53.96	-11.71
9650.42	1.00	33	36.11	---	11.47	47.58	---	73.96	53.96	-6.38
12061.04	1.00	278	38.44	---	9.81	48.25	---	73.96	53.96	-5.71
19296.25	1.00	283	46.99	---	1.60	48.59	---	73.96	53.96	-5.37

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	21.05	1.00	139	5.91	26.96	40.00	-13.04
75.47	23.96	1.00	3	0.69	24.65	40.00	-15.35
366.47	30.46	1.00	216	-2.16	28.30	46.00	-17.70
433.16	31.93	1.00	147	0.33	32.26	46.00	-13.74
499.84	29.68	1.00	66	2.89	32.57	46.00	-13.43
598.06	23.28	1.00	212	6.61	29.89	46.00	-16.11

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	27.86	1.00	100	5.91	33.77	40.00	-6.23
66.37	25.33	1.00	70	1.66	26.99	40.00	-13.01
91.84	26.69	1.00	179	-0.57	26.12	43.50	-17.38
499.84	29.91	1.00	179	2.89	32.80	46.00	-13.20
566.53	25.61	1.00	127	5.56	31.17	46.00	-14.83
631.40	23.48	1.00	156	7.79	31.27	46.00	-14.73

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
1600.00	1.00	183	38.33	---	14.33	52.66	---	73.96	53.96	-1.30
2160.01	1.00	355	45.17	41.67	8.54	53.71	50.21	73.96	53.96	-3.75
2320.01	1.00	261	44.33	41.00	8.99	53.32	49.99	73.96	53.96	-3.97
9747.08	1.00	151	35.60	---	11.89	47.49	---	73.96	53.96	-6.47
12187.92	1.00	90	38.94	---	9.74	48.68	---	73.96	53.96	-5.28
24371.46	1.00	307	46.49	---	3.26	49.75	---	73.96	53.96	-4.21

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2160.02	1.00	84	46.49	43.00	8.54	55.03	51.54	73.96	53.96	-2.42
2360.01	1.00	262	48.66	44.00	9.10	57.76	53.10	73.96	53.96	-0.86
2640.01	1.00	255	47.00	41.50	9.75	56.75	51.25	73.96	53.96	-2.71
9747.08	1.00	252	35.44	---	11.89	47.33	---	73.96	53.96	-6.63
12187.92	1.00	237	39.44	---	9.74	49.18	---	73.96	53.96	-4.78
24371.46	1.00	108	45.66	---	3.26	48.92	---	73.96	53.96	-5.04

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	22.78	1.00	3	5.91	28.69	40.00	-11.31
366.47	30.68	1.00	210	-2.16	28.52	46.00	-17.48
433.16	32.89	1.00	81	0.33	33.22	46.00	-12.78
501.06	28.68	1.00	334	2.94	31.62	46.00	-14.38
530.76	26.22	1.00	135	4.20	30.42	46.00	-15.58
598.66	24.35	1.00	213	6.63	30.98	46.00	-15.02

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.70	26.79	1.00	184	5.83	32.62	40.00	-7.38
66.37	25.20	1.00	64	1.66	26.86	40.00	-13.14
92.44	25.56	1.00	105	-0.62	24.94	43.50	-18.56
499.84	30.94	1.00	190	2.89	33.83	46.00	-12.17
565.32	26.35	1.00	141	5.52	31.87	46.00	-14.13
632.01	23.23	1.00	156	7.82	31.05	46.00	-14.95

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2160.01	1.00	119	45.17	41.50	8.54	53.71	50.04	73.96	53.96	-3.92
2320.00	1.00	360	44.50	40.50	8.99	53.49	49.49	73.96	53.96	-4.47
2358.28	1.00	41	44.84	31.00	9.09	53.93	40.09	73.96	53.96	-13.87
9849.79	1.00	122	35.61	---	11.93	47.54	---	73.96	53.96	-6.42
12308.75	1.00	131	38.44	---	9.56	48.00	---	73.96	53.96	-5.96
24619.37	1.00	192	45.99	---	3.01	49.00	---	73.96	53.96	-4.96

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude		Correction Factor	Corrected Amplitude		Limit		Margin
			Peak / Ave.			Peak / Ave.		Peak / Ave.		
MHz	m	degree	dBμV		dB/m	dBμV/m		dBμV/m		dB
2160.42	1.00	335	44.67	---	8.54	53.21	---	73.96	53.96	-0.75
2357.92	1.00	31	46.00	31.00	9.09	55.09	40.09	73.96	53.96	-13.87
2398.64	1.00	348	47.99	35.00	9.21	57.20	44.21	73.96	53.96	-9.75
2520.01	1.00	348	46.66	39.50	9.53	56.19	49.03	73.96	53.96	-4.93
2635.82	1.00	67	47.00	32.50	9.75	56.75	42.25	73.96	53.96	-11.71
9849.79	1.00	271	34.94	---	11.93	46.87	---	73.96	53.96	-7.09
12308.75	1.00	325	37.44	---	9.56	47.00	---	73.96	53.96	-6.96
24619.37	1.00	15	45.82	---	3.01	48.83	---	73.96	53.96	-5.13

Test mode: Super 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	23.55	1.00	230	5.91	29.46	40.00	-10.54
67.59	25.12	1.00	134	1.55	26.67	40.00	-13.33
299.18	31.40	1.00	281	-3.71	27.69	46.00	-18.31
433.16	31.79	1.00	250	0.33	32.12	46.00	-13.88
499.24	27.75	1.00	220	2.87	30.62	46.00	-15.38
597.45	26.43	1.00	164	6.59	33.02	46.00	-12.98

Test mode: Super 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
39.09	28.50	1.00	160	5.91	34.41	40.00	-5.59
67.59	25.85	1.00	65	1.55	27.40	40.00	-12.60
285.84	32.31	1.00	211	-3.85	28.46	46.00	-17.54
499.84	28.90	1.00	180	2.89	31.79	46.00	-14.21
530.76	30.78	1.00	9	4.20	34.98	46.00	-11.02
598.66	26.76	1.00	271	6.63	33.39	46.00	-12.61

Test mode: Super 802.11g CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2160.01	1.00	115	45.50	40.33	8.54	54.04	48.87	73.96	53.96	-5.09
2320.01	1.00	306	46.16	41.17	8.99	55.15	50.16	73.96	53.96	-3.80
2358.07	1.00	306	45.00	30.67	9.09	54.09	39.76	73.96	53.96	-14.20
9747.08	1.00	237	35.10	---	11.89	46.99	---	73.96	53.96	-6.97
12187.92	1.00	202	39.60	---	9.74	49.34	---	73.96	53.96	-4.62
21934.79	1.00	266	46.82	---	3.09	49.91	---	73.96	53.96	-4.05

Test mode: Super 802.11g CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>		<i>Margin</i>
			<i>Peak / Ave.</i>			<i>Peak / Ave.</i>		<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>		<i>dB</i>
2320.02	1.00	288	44.66	40.50	8.99	53.65	49.49	73.96	53.96	-4.47
2358.94	1.00	37	44.83	33.00	9.10	53.93	42.10	73.96	53.96	-11.86
2520.02	1.00	26	45.16	40.00	9.53	54.69	49.53	73.96	53.96	-4.43
7312.29	1.00	279	35.27	---	10.30	45.57	---	73.96	53.96	-8.39
9747.08	1.00	278	35.77	---	11.89	47.66	---	73.96	53.96	-6.30
12187.92	1.00	178	38.77	---	9.74	48.51	---	73.96	53.96	-5.45
21934.79	1.00	132	45.99	---	3.09	49.08	---	73.96	53.96	-4.88
24371.46	1.00	257	46.16	---	3.26	49.42	---	73.96	53.96	-4.54

8.5 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1 of IEEE 802.11b

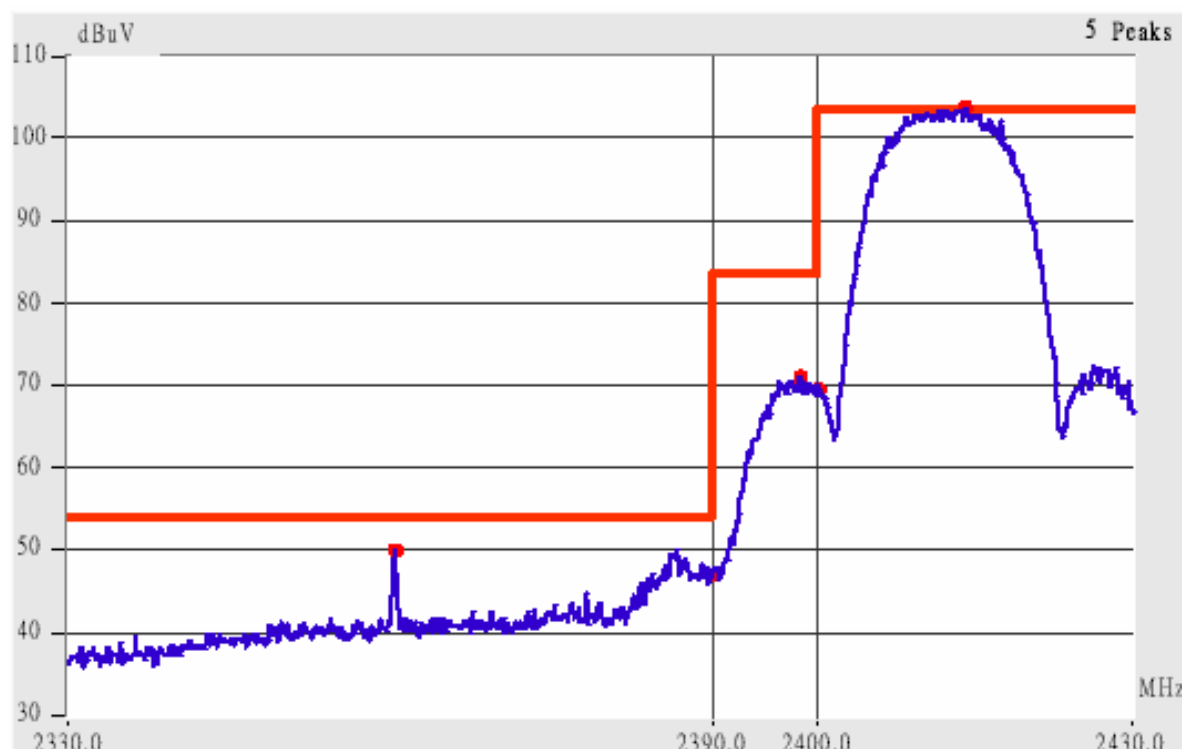


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2385.96	Hor	1.00	44	9.17	56.17	45.50	74.00	53.96	-8.46
2389.73	Hor	1.00	34	9.18	54.02	44.68	74.00	53.96	-9.28
2360.02	Ver	1.00	126	9.10	54.93	48.27	74.00	53.96	-5.69
2376.00	Ver	1.00	46	9.14	55.48	44.14	74.00	53.96	-9.82
2387.03	Ver	1.00	45	9.17	59.51	47.84	74.00	53.96	-6.12
2389.63	Ver	1.00	38	9.18	56.52	46.68	74.00	53.96	-7.28

Channel 11 of IEEE 802.11b

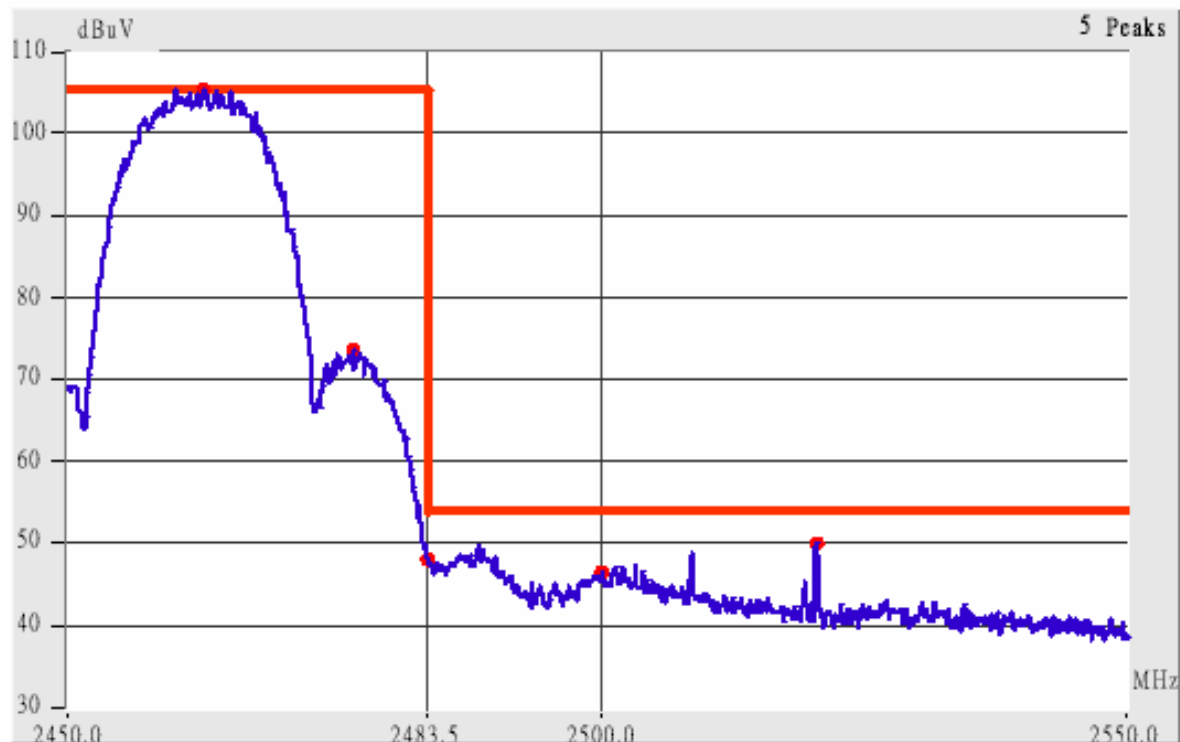


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2482.82	Hor	1.00	320	9.44	53.44	47.77	74.00	53.96	-6.19
2488.52	Hor	1.00	141	9.46	54.96	43.46	74.00	53.96	-10.50
2500.88	Hor	1.00	138	9.49	53.82	41.32	74.00	53.96	-12.64
2503.39	Hor	1.00	132	9.50	52.00	---	74.00	53.96	-1.96
2483.01	Ver	1.00	357	9.44	58.28	50.94	74.00	53.96	-3.02
2488.53	Ver	1.00	357	9.46	59.13	47.63	74.00	53.96	-6.33
2499.56	Ver	1.00	357	9.49	54.99	45.66	74.00	53.96	-8.30
2501.48	Ver	1.00	143	9.49	56.83	45.32	74.00	53.96	-8.64

Channel 1 of IEEE 802.11g

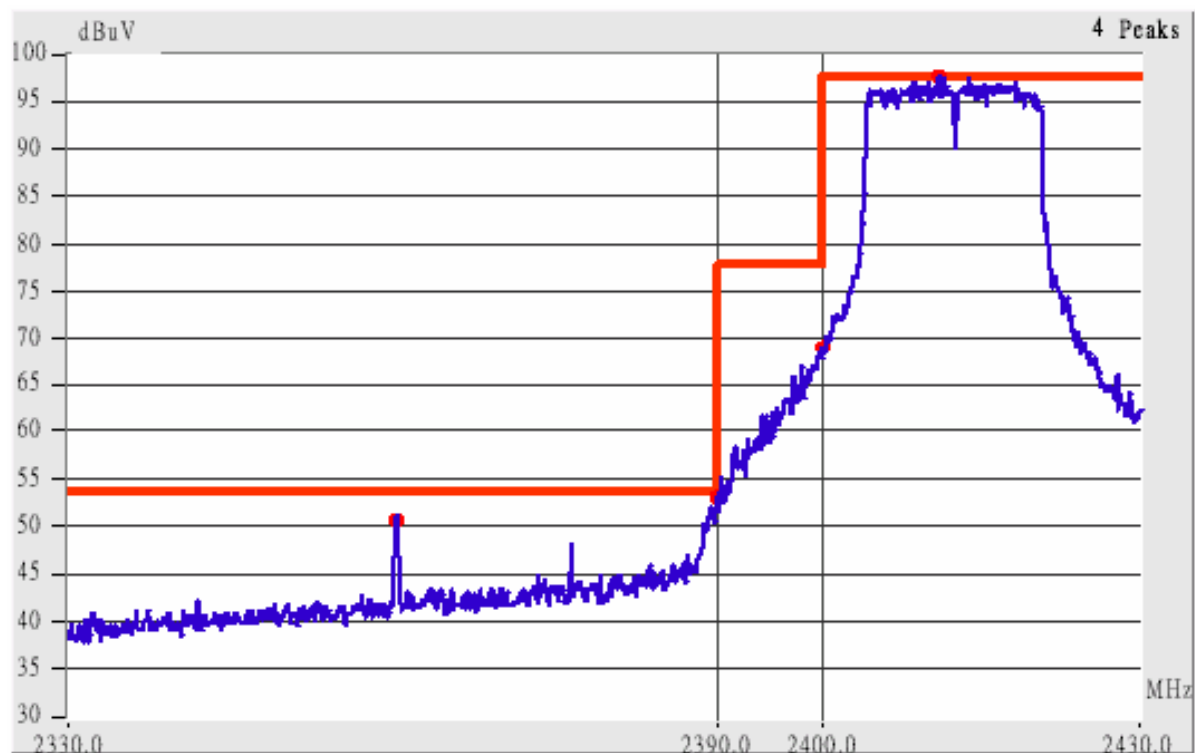


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2360.01	Hor	1.00	108	9.10	55.43	48.93	74.00	53.96	-5.03
2386.73	Hor	1.00	308	9.17	62.17	43.00	74.00	53.96	-10.96
2389.48	Hor	1.00	333	9.18	64.51	47.35	74.00	53.96	-6.61
2390.50	Hor	1.00	349	9.18	63.18	49.51	74.00	53.96	-4.45
2360.01	Ver	1.00	141	9.10	56.43	49.43	74.00	53.96	-4.53
2375.29	Ver	1.00	35	9.14	57.31	43.81	74.00	53.96	-10.15
2389.20	Ver	1.00	23	9.18	66.01	49.18	74.00	53.96	-4.78
2390.43	Ver	1.00	34	9.18	66.18	51.51	74.00	53.96	-2.45

Channel 11 of IEEE 802.11g

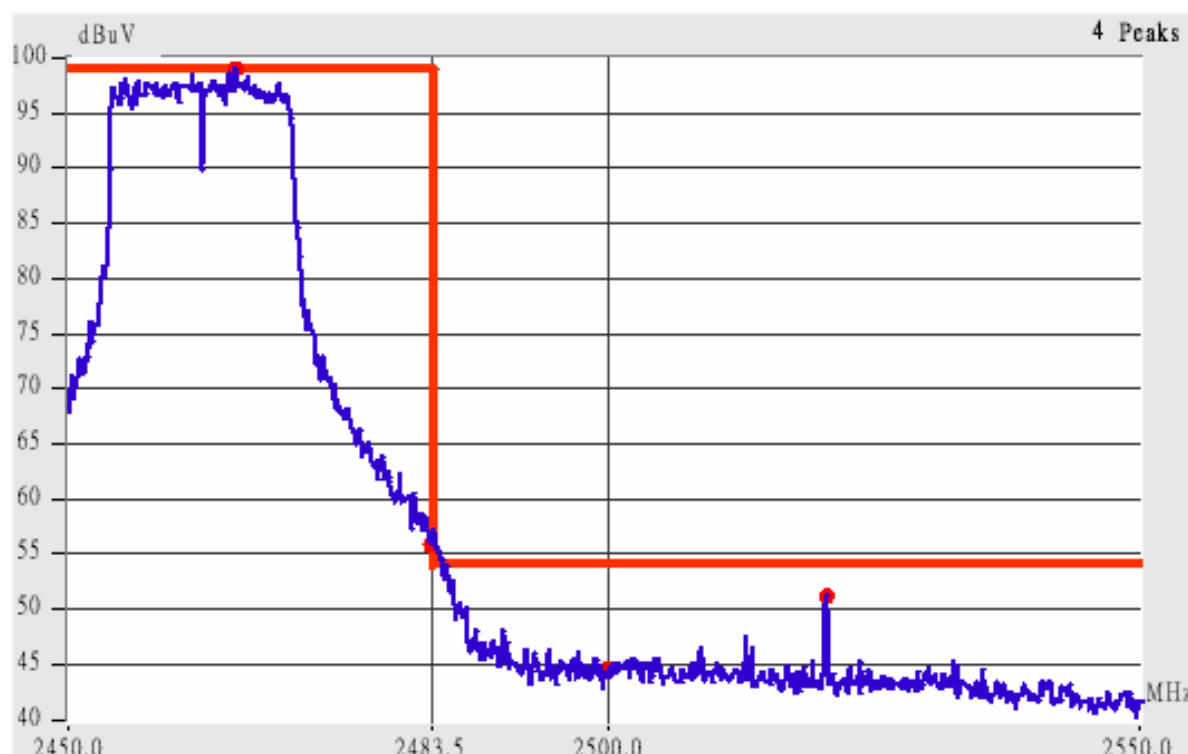

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

7. The lobe right by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


Radiated Emission					Corrected Amplitude		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Table (°)	Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
					Peak	Average	Peak	Ave.	
2483.27	Hor	1.00	327	9.44	66.61	48.61	74.00	53.96	-5.35
2484.57	Hor	1.00	324	9.45	63.78	45.95	74.00	53.96	-8.01
2500.01	Hor	1.00	132	9.49	50.49	---	74.00	53.96	-3.47
2501.30	Hor	1.00	155	9.49	54.16	40.66	74.00	53.96	-13.30
2483.26	Ver	1.00	354	9.44	68.78	52.61	74.00	53.96	-1.35
2484.16	Ver	1.00	120	9.45	68.95	50.78	74.00	53.96	-3.18
2500.02	Ver	1.00	354	9.49	56.32	44.49	74.00	53.96	-9.47
2520.01	Ver	1.00	34	9.53	57.53	49.03	74.00	53.96	-4.93

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

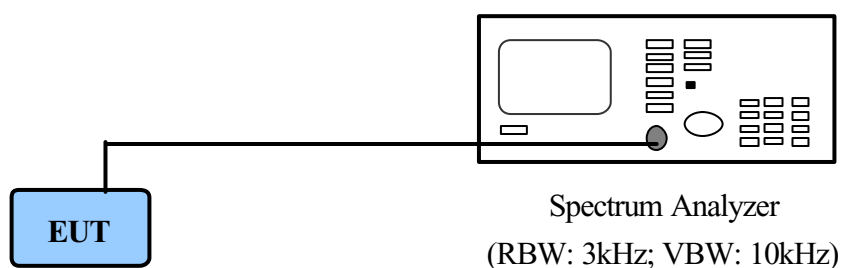

PC to control the EUT at maximal power output and channel Number and set antenna kit

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	12/30/04

9.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.

IEEE 802.11b

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-7.21	2.12	-5.09	8.00	-13.09
CH 06	-6.79	2.27	-4.52	8.00	-12.52
CH 11	-8.07	2.43	-5.64	8.00	-13.64

IEEE 802.11g

<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	-14.01	2.12	-11.89	8.00	-19.89
CH 06	-12.83	2.27	-10.56	8.00	-18.56
CH 11	-13.21	2.43	-10.78	8.00	-18.78

Super 802.11g


<i>Channel</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 06	-16.71	2.27	-14.44	8.00	-22.44

Note:


1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |\text{Cable Loss}|$

Power Spectral Density for Channel 1

IEEE 802.11b

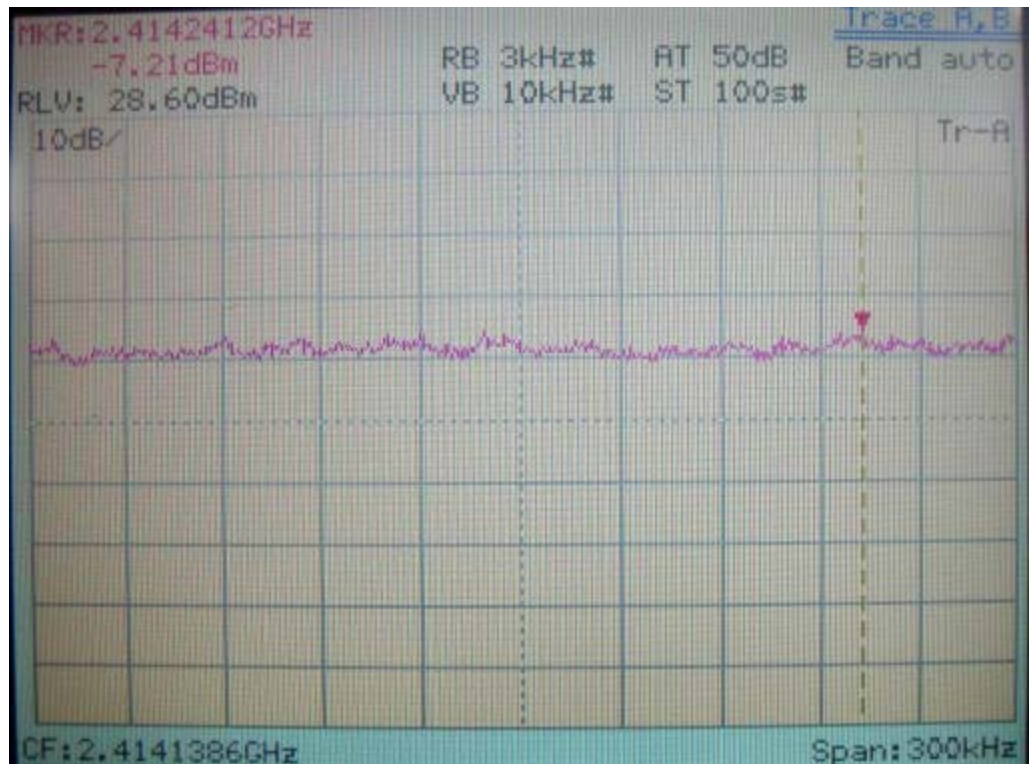


IEEE 802.11g

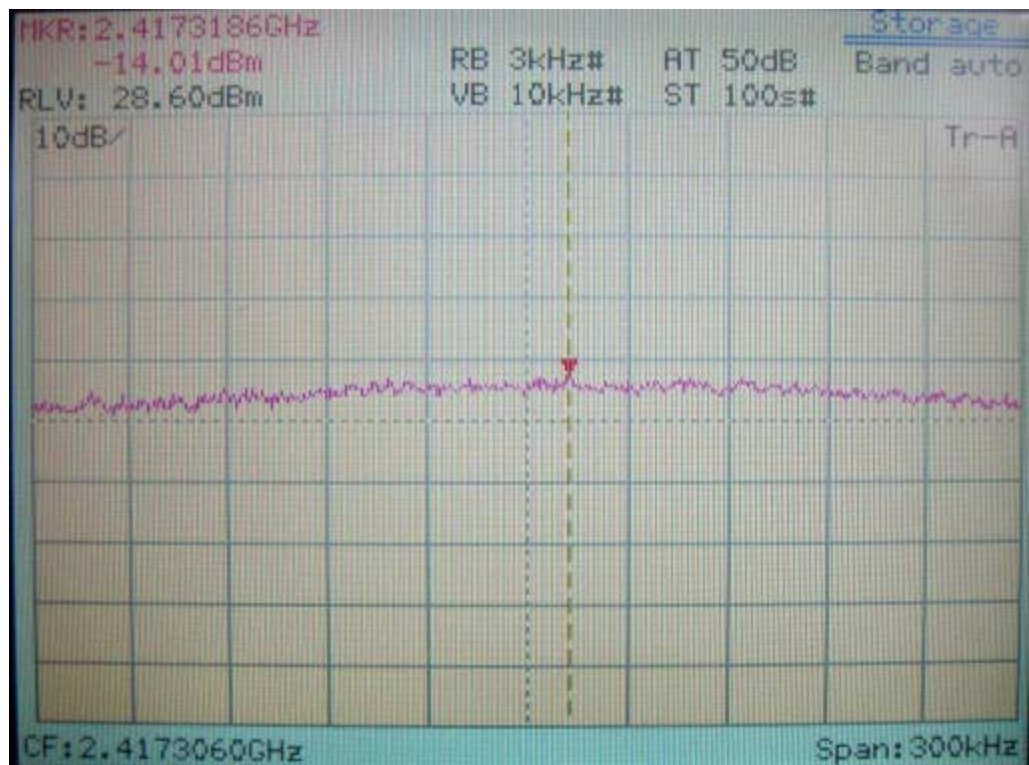


Power Spectral Density for Channel 6

IEEE 802.11b

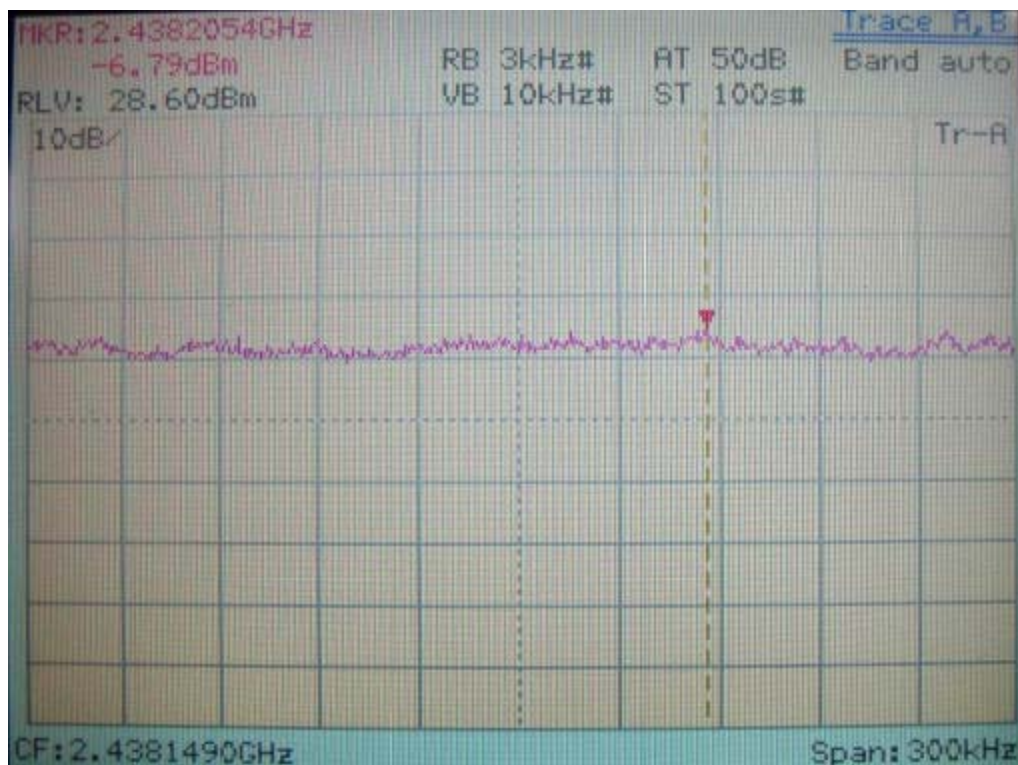


IEEE 802.11g

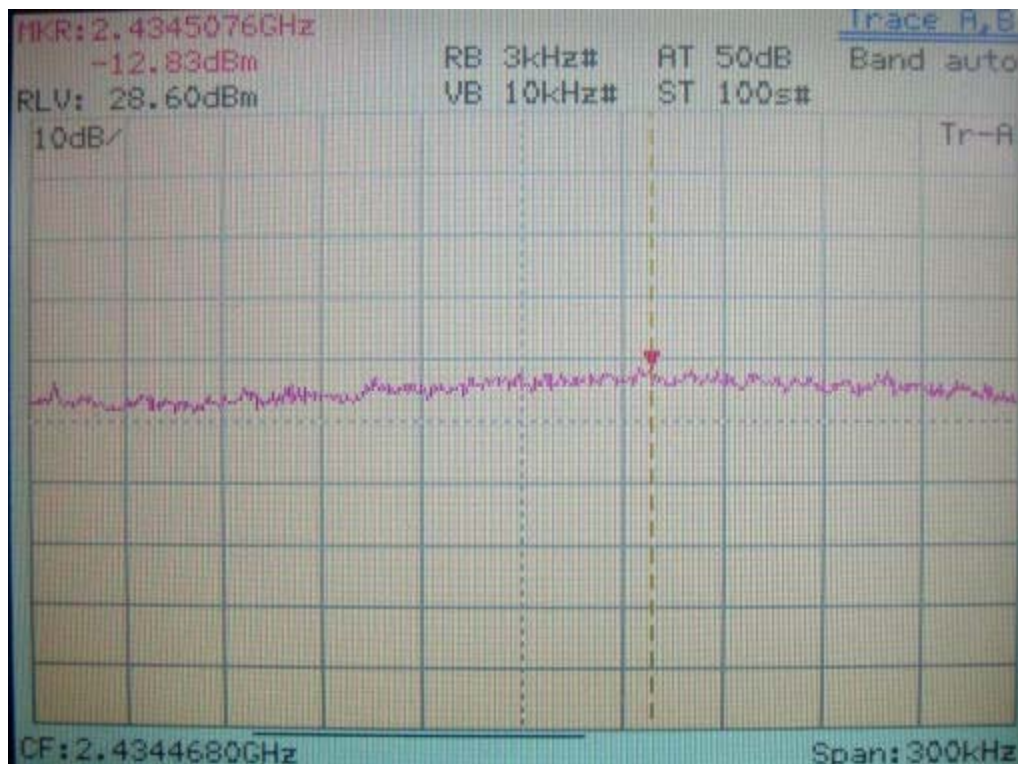


Power Spectral Density for Channel 11

IEEE 802.11b

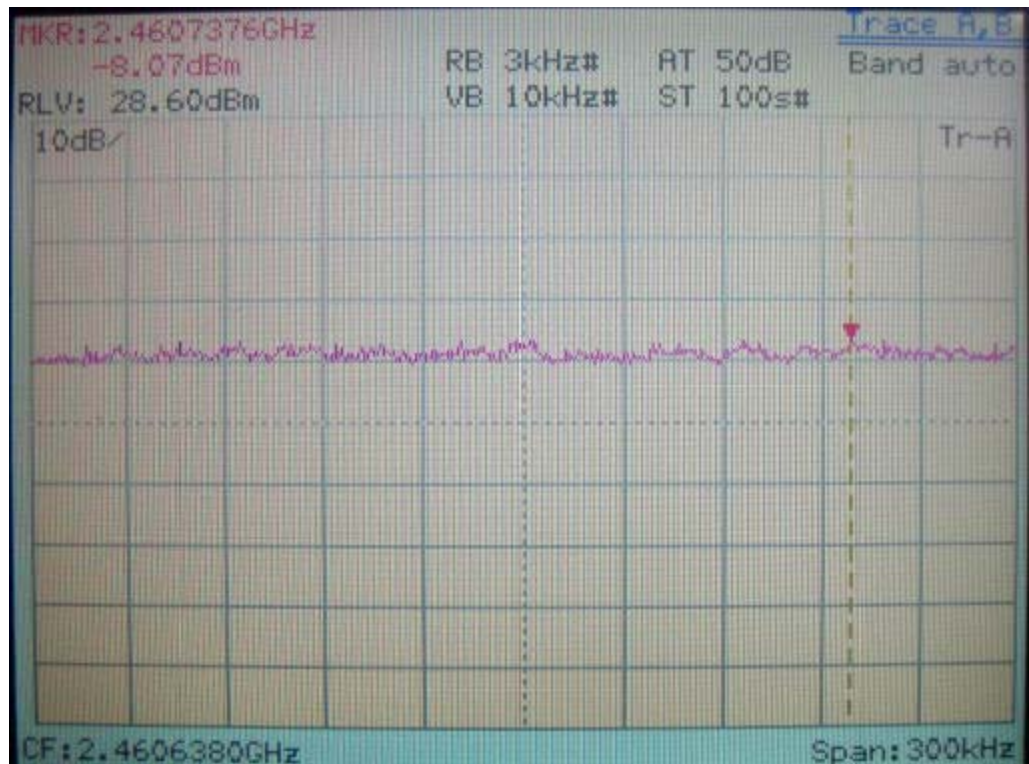

IEEE 802.11g

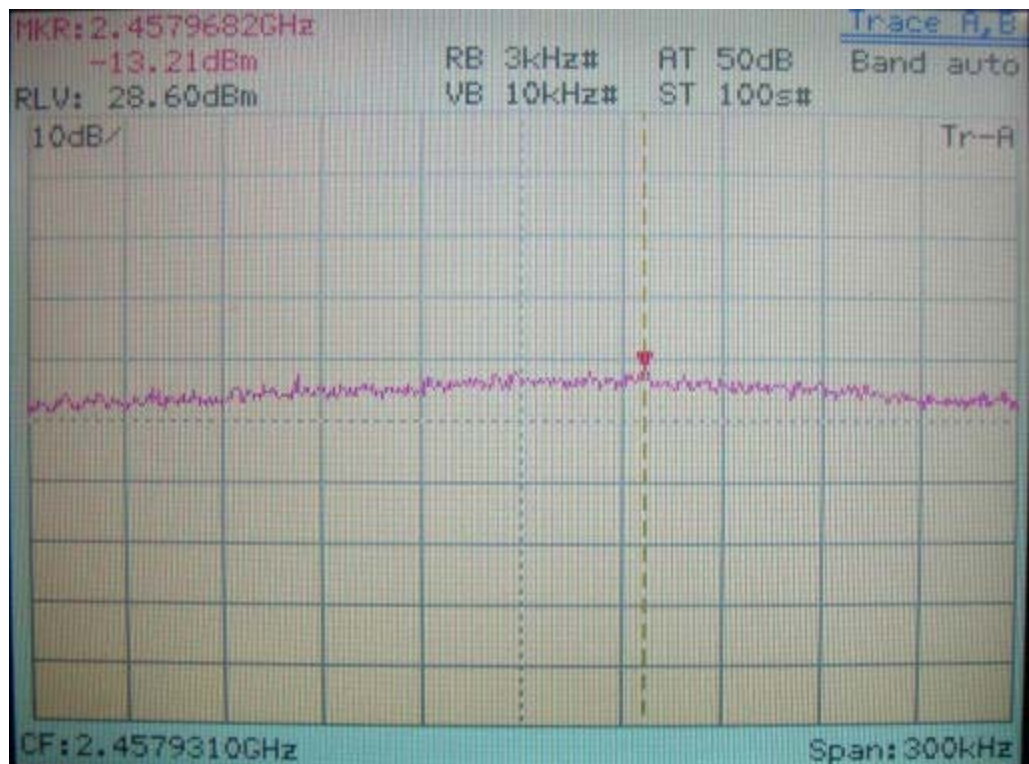

CHANNEL 6 of SUPER 802.11g

Super 802.11g

