


ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-196-RWD-040
AGR No. : A195A-316
Applicant : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Manufacturer : LG Innotek Co., Ltd.
Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
Type of Equipment : 802.11 a/b/g/n/ac Wi-Fi Module
FCC ID. : YZP-ETWFFTBC01
Model Name : ETWFFTBC01
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 119 pages (including this page)
Date of Incoming : June 07, 2019
Date of issue : June 19, 2019

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**
 This test report only contains the result of a single test of the sample supplied for the examination.
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 
 Tae-Ho, Kim / Senior Manager
 ONETECH Corp.

Approved by: 
 Ki-Hong, Nam / Chief Engineer
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	6
2. TEST SUMMARY	7
2.1 TEST ITEMS AND RESULTS	7
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	7
2.3 RELATED SUBMITTAL(S) / GRANT(S)	7
2.4 PURPOSE OF THE TEST	7
2.5 TEST METHODOLOGY.....	7
2.6 TEST FACILITY.....	7
3. GENERAL INFORMATION.....	8
3.1 PRODUCT DESCRIPTION.....	8
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	10
4. EUT MODIFICATIONS.....	10
5. SYSTEM TEST CONFIGURATION	11
5.1 JUSTIFICATION.....	11
5.2 PERIPHERAL EQUIPMENT	11
5.3 MODE OF OPERATION DURING THE TEST	12
5.4 CONFIGURATION OF TEST SYSTEM.....	16
5.5 ANTENNA REQUIREMENT	16
6. PRELIMINARY TEST	17
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	17
6.2 GENERAL RADIATED EMISSIONS TESTS	17
7. MIMIMUM 6 DB BANDWIDTH	18
7.1 OPERATING ENVIRONMENT	18
7.2 TEST SET-UP	18
7.3 TEST EQUIPMENT USED.....	18
7.4 TEST DATA FOR 802.11B WLAN MODE.....	19
7.4.1 Test data for Antenna 0	19
7.4.2 Test data for Antenna 1	21
7.5 TEST DATA FOR 802.11G WLAN MODE	23
7.5.1 Test data for Antenna 0	23
7.5.2 Test data for Antenna 1	25

7.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	27
7.6.1 Test data for Antenna 0	27
7.6.2 Test data for Antenna 1	29
7.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	31
7.7.1 Test data for Antenna 0	31
7.7.2 Test data for Antenna 1	33
8. MAXIMUM PEAK OUTPUT POWER	35
8.1 OPERATING ENVIRONMENT	35
8.2 TEST SET-UP	35
8.3 TEST EQUIPMENT USED	35
8.4 TEST DATA FOR 802.11B WLAN MODE	36
8.4.1 Test data for Antenna 0	36
8.4.2 Test data for Antenna 1	36
8.5 TEST DATA FOR 802.11G WLAN MODE	37
8.5.1 Test data for Antenna 0	37
8.5.2 Test data for Antenna 1	37
8.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	38
8.6.1 Test data for Antenna 0	38
8.6.2 Test data for Antenna 1	38
8.6.3 Test data for Multiple Transmit	39
8.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	40
8.7.1 Test data for Antenna 0	40
8.7.2 Test data for Antenna 1	40
8.7.3 Test data for Multiple Transmit	41
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	42
9.1 OPERATING ENVIRONMENT	42
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	42
9.3 TEST SET-UP FOR RADIATED MEASUREMENT	42
9.4 TEST EQUIPMENT USED	42
9.5 TEST DATA FOR CONDUCTED EMISSION	43
9.5.1 Test data for 802.11b WLAN Mode	43
9.5.2 Test data for 802.11g WLAN Mode	53
9.5.3 Test data for 802.11n_HT20 WLAN Mode	63
9.5.4 Test data for 802.11n_HT40 WLAN Mode	73
9.6 TEST DATA FOR RADIATED EMISSION	83
9.6.1 Radiated Emission which fall in the Restricted Band	83
9.6.2 Spurious & Harmonic Radiated Emission	89

10. PEAK POWER SPECTRUL DENSITY	95
10.1 OPERATING ENVIRONMENT	95
10.2 TEST SET-UP	95
10.3 TEST EQUIPMENT USED	95
10.4 TEST DATA FOR 802.11B WLAN MODE	96
<i>10.4.1 Test data for Antenna 0</i>	<i>96</i>
<i>10.4.2 Test data for Antenna 1</i>	<i>98</i>
10.5 TEST DATA FOR 802.11G WLAN MODE	100
<i>10.5.1 Test data for Antenna 0</i>	<i>100</i>
<i>10.5.2 Test data for Antenna 1</i>	<i>102</i>
10.6 TEST DATA FOR 802.11N_HT20 WLAN MODE	104
<i>10.6.1 Test data for Antenna 0</i>	<i>104</i>
<i>10.6.2 Test data for Antenna 1</i>	<i>106</i>
<i>10.6.3 Test data for Multiple Transmit</i>	<i>108</i>
10.7 TEST DATA FOR 802.11N_HT40 WLAN MODE	109
<i>10.7.1 Test data for Antenna 0</i>	<i>109</i>
<i>10.7.2 Test data for Antenna 1</i>	<i>111</i>
<i>10.7.3 Test data for Multiple Transmit</i>	<i>113</i>
11. RADIATED EMISSION TEST	114
11.1 OPERATING ENVIRONMENT	114
11.2 TEST SET-UP	114
11.3 TEST EQUIPMENT USED	114
11.4 TEST DATA	115
<i>11.4.1 Test data for 30 MHz ~ 1 000 MHz</i>	<i>115</i>
<i>11.4.2 Test data for Below 30 MHz</i>	<i>116</i>
<i>11.4.3 Test data for above 1 GHz</i>	<i>116</i>
12. CONDUCTED EMISSION TEST	117
12.1 OPERATING ENVIRONMENT	117
12.2 TEST SET-UP	117
12.3 TEST EQUIPMENT USED	117
12.4 TEST DATA	118

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-196-RWD-040	June 19, 2019	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : LG Innotek Co., Ltd.
 Address : 26, Hanamsandan 5beon-ro Gwangsan-gu, Gwangju, 506-731, South Korea
 Contact Person : Inchang Jeong / Senior Research Engineer
 Telephone No. : +82-62-950-0332
 FCC ID : YZP-ETWFFTBC01
 Model Name : ETWFFTBC01
 Serial Number : N/A
 Date : June 19, 2019

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Modular Transmitter, 802.11 a/b/g/n/ac Wi-Fi Module
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02 KDB662911 D01 Multiple Transmitter Output v02r01
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The LG Innotek Co., Ltd., Model ETWFFTBC01 (referred to as the EUT in this report) is a 802.11 a/b/g/n/ac Wi-Fi Module. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	802.11 a/b/g/n/ac Wi-Fi Module		
Operating Frequency	WLAN 2.4 GHz Band	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))	
		2 422 MHz ~ 2 452 MHz (802.11n(HT40))	
	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	5 180 MHz ~ 5 240 MHz (802.11a/n(HT20)/ac(VHT20))
			5 190 MHz ~ 5 230 MHz (802.11n(HT40)/ac(VHT40))
			5 210 MHz (802.11ac(VHT80))
		5 725 MHz ~ 5 850 MHz Band	5 745 MHz ~ 5 825 MHz (802.11a/n(HT20)/ac(VHT20))
			5 755 MHz ~ 5 795 MHz (802.11n(HT40)/ac(VHT40))
			5 775 MHz (802.11ac(VHT80))
RF Output Power	WLAN 2.4 GHz Band	Antenna 0	Wi-Fi 802.11b (21.80 dBm) Wi-Fi 802.11g (14.46 dBm) Wi-Fi 802.11n(HT20) (13.81 dBm) Wi-Fi 802.11n(HT40) (10.32 dBm)
		Antenna 1	Wi-Fi 802.11b (21.90 dBm) Wi-Fi 802.11g (13.98 dBm) Wi-Fi 802.11n(HT20) (13.85 dBm) Wi-Fi 802.11n(HT40) (10.50 dBm)
		Antenna 0 + Antenna 1	Wi-Fi 802.11n(HT20) (16.70 dBm) Wi-Fi 802.11n(HT40) (13.39 dBm)

RF Output Power	WLAN 5 GHz Band	5 150 MHz ~ 5 250 MHz Band	Antenna 0	Wi-Fi 802.11a (13.02 dBm) Wi-Fi 802.11n(HT20) (11.92 dBm) Wi-Fi 802.11n(HT40) (13.22 dBm) Wi-Fi 802.11ac(HT80) (12.70 dBm)
			Antenna 1	Wi-Fi 802.11a (12.86 dBm) Wi-Fi 802.11n(HT20) (11.57 dBm) Wi-Fi 802.11n(HT40) (13.15 dBm) Wi-Fi 802.11ac(HT80) (12.60 dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11n(HT20) (14.76 dBm) Wi-Fi 802.11n(HT40) (16.20 dBm) Wi-Fi 802.11ac(HT80) (15.66 dBm)
		5 725 MHz ~ 5 850 MHz Band	Antenna 0	Wi-Fi 802.11a (15.30 dBm) Wi-Fi 802.11n(HT20) (13.21 dBm) Wi-Fi 802.11n(HT40) (14.59 dBm) Wi-Fi 802.11ac(HT80) (12.62 dBm)
			Antenna 1	Wi-Fi 802.11a (16.05 dBm) Wi-Fi 802.11n(HT20) (15.50 dBm) Wi-Fi 802.11n(HT40) (15.85 dBm) Wi-Fi 802.11ac(HT80) (14.06 dBm)
			Antenna 0 + Antenna 1	Wi-Fi 802.11n(HT20) (17.51 dBm) Wi-Fi 802.11n(HT40) (18.28 dBm) Wi-Fi 802.11ac(HT80) (16.41 dBm)

Modulation Type	WLAN 2.4 GHz Band	DSSS Modulation(DBPSK/DQPSK/CCK) OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
	WLAN 5 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)	
Antenna Type	WLAN 2.4 GHz Band	Antenna 0	1.50 dBi
		Antenna 1	1.49 dBi
		Antenna 0 + Antenna 1	4.51 dBi
	5 150 MHz ~ 5 250 MHz Band	Antenna 0	1.46 dBi
		Antenna 1	1.01 dBi
		Antenna 0 + Antenna 1	4.25 dBi
	5 725 MHz ~ 5 850 MHz Band	Antenna 0	1.50 dBi
		Antenna 1	1.50 dBi
		Antenna 0 + Antenna 1	4.51 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	40 MHz		

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	LG Innotek Co., Ltd.	N/A	-

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
ETWFFTBC01	LG Innotek Co., Ltd.	802.11 a/b/g/n/ac Wi-Fi Module (EUT)	-
N/A	N/A	Jig Board	EUT
HP Pavilion g series	HP	Notebook PC	-
PPP009C	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

Modulation	DATA RATE	OUTPUT POWER[dBm]	
		Antenna 0	Antenna 1
802.11 b (Middle Channel)	1 Mbps	21.55	21.85
	2 Mbps	21.53	21.81
	5.5 Mbps	21.52	21.80
	11 Mbps	21.50	21.78
802.11g (Middle Channel)	6 Mbps	14.27	13.92
	9 Mbps	14.26	13.90
	12 Mbps	14.25	13.89
	18 Mbps	14.23	13.89
	24 Mbps	14.20	13.87
	36 Mbps	14.19	13.85
	48 Mbps	14.18	13.84
	54 Mbps	14.18	13.83
HT 20 (Middle Channel)	6.5 Mbps	13.37	13.85
	13 Mbps	13.36	13.84
	19.5 Mbps	13.34	13.83
	26 Mbps	13.33	13.80
	39 Mbps	13.33	13.79
	52 Mbps	13.30	13.79
	58.5 Mbps	13.29	13.77
	65 Mbps	13.27	13.75
HT 40 (Middle Channel)	13.5 Mbps	10.32	10.44
	27 Mbps	10.31	10.40
	40.5 Mbps	10.29	10.39
	54 Mbps	10.28	10.39
	81 Mbps	10.28	10.37
	108 Mbps	10.26	10.36
	121.5 Mbps	10.25	10.35
	135 Mbps	10.23	10.33

-. The worse case data rate for each modulation is determined 1 Mbps(Ant.0/Ant.1) for IEEE 802.11b, 6 Mbps(Ant.0/Ant.1) for IEEE 802.11g, 6.5 Mbps(Ant.0/Ant.1) for HT20, 13.5 Mbps(Ant.0/Ant.1) for HT40.

-. To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.


-. Duty Cycle


Mode	Duty Cycle [%]	Correction Factor [dB]
802.11 b	100.00	0.00
802.11 g	100.00	0.00
802.11 n(HT20)	100.00	0.00
802.11 n(HT40)	100.00	0.00

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100


Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

-. Test Plot

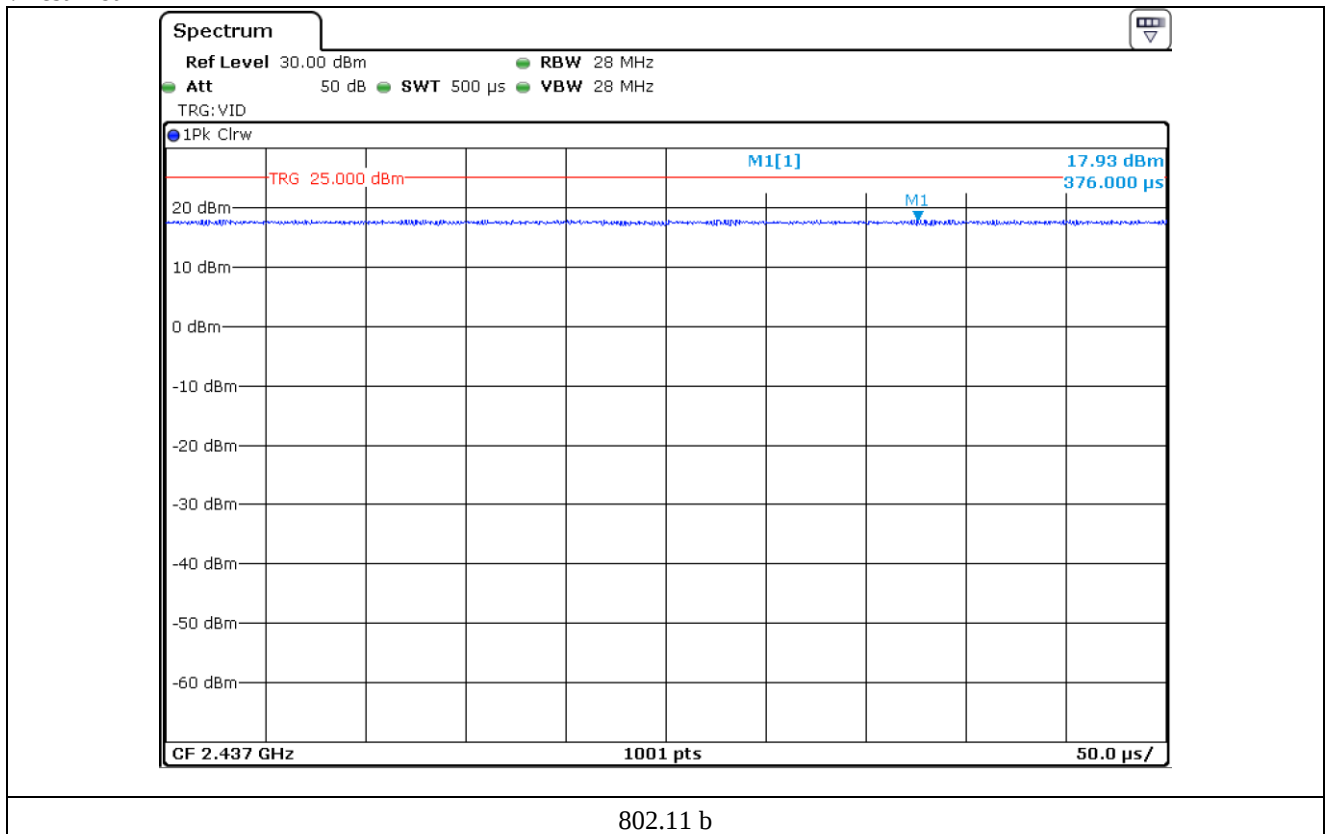


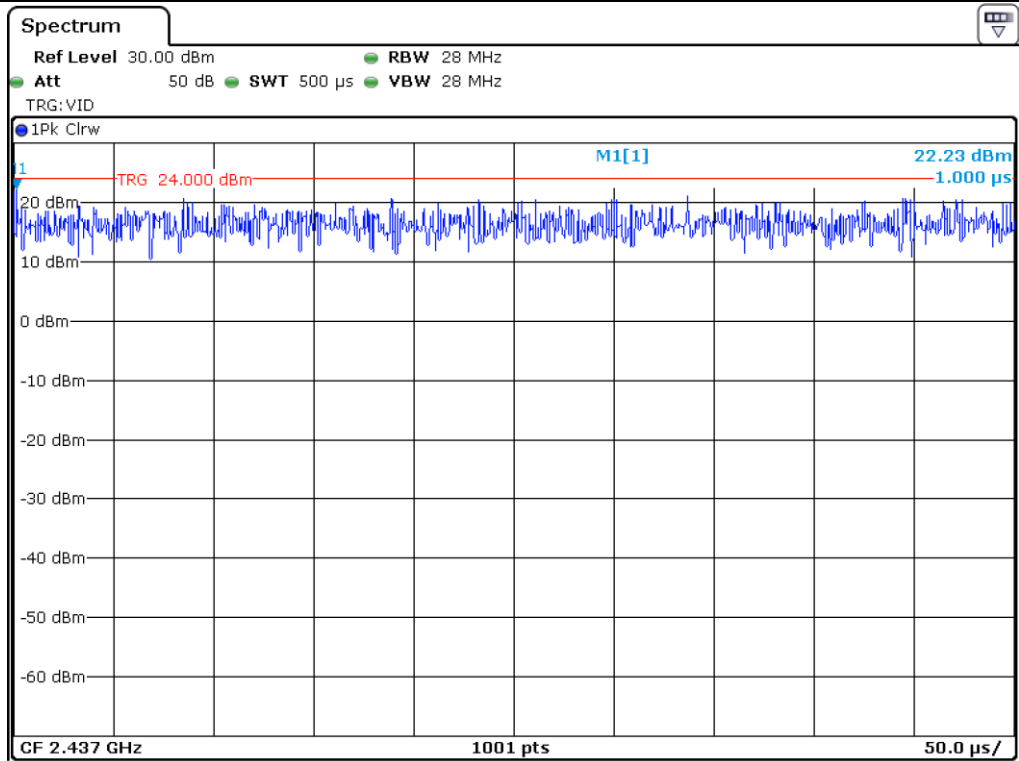

802.11 g

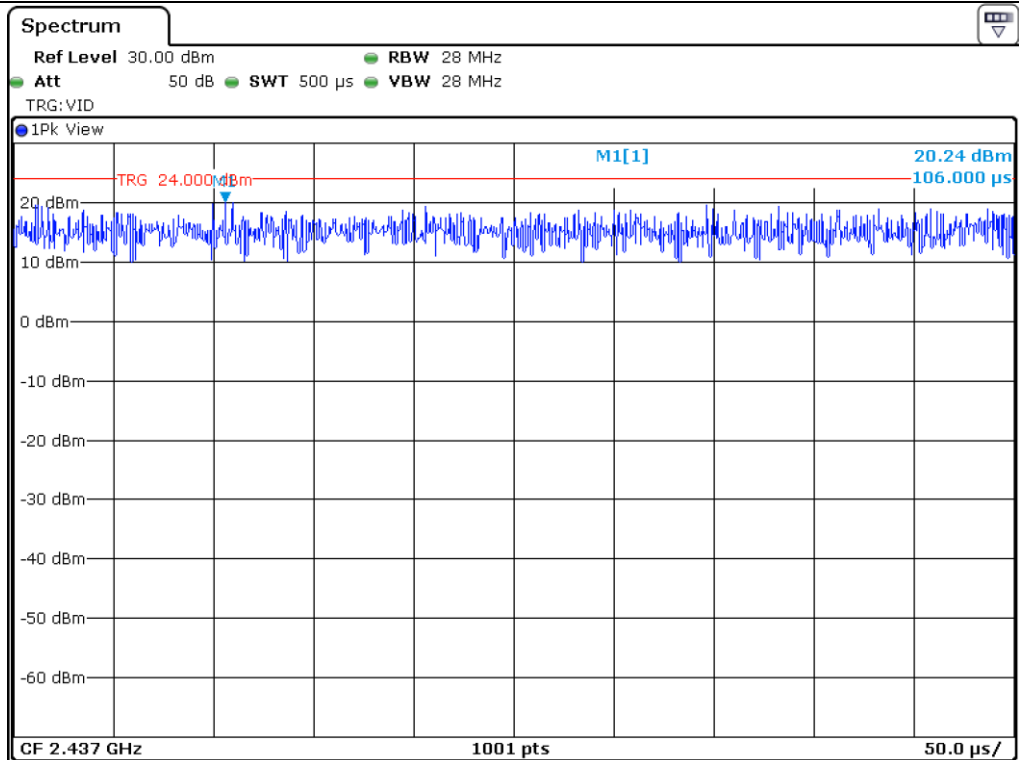

802.11 n(HT20)

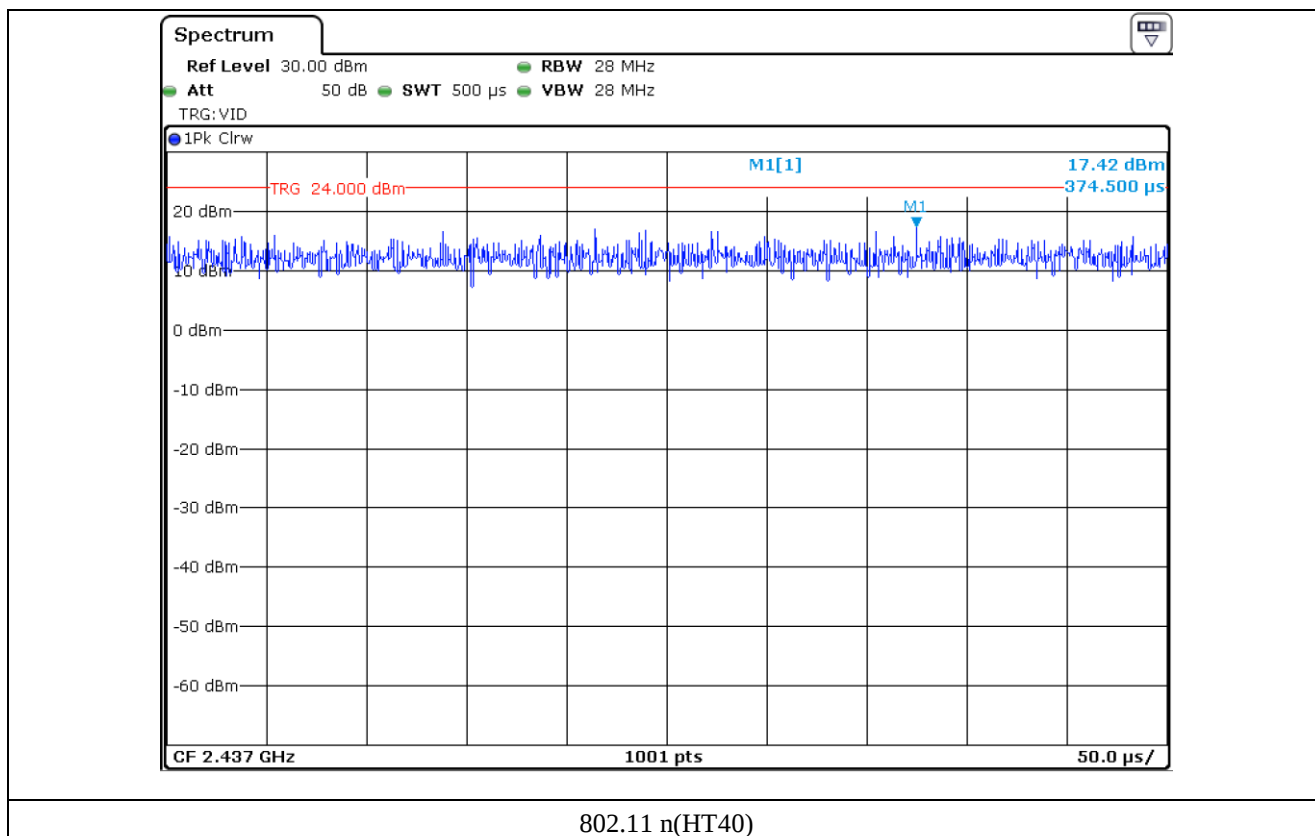

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to Jig Board and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a WLAN 2.4 GHz Band & WLAN 5 GHz Band is PCB Antenna(Antenna 0, Antenna 1) on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 41 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.



7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data for 802.11b WLAN Mode

7.4.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	10.09	0.50	9.59
Middle	2 437.00	10.04	0.50	9.54
High	2 462.00	10.04	0.50	9.54

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

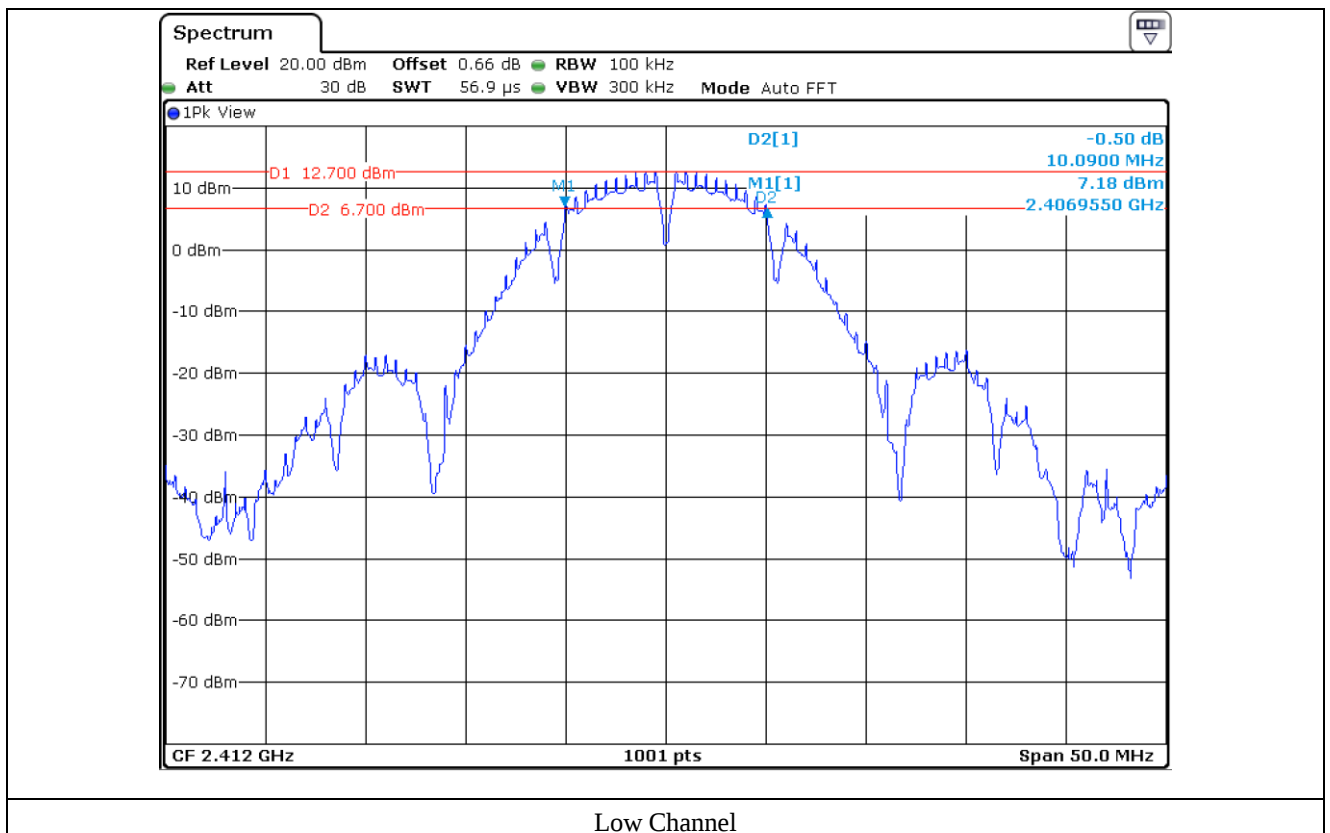

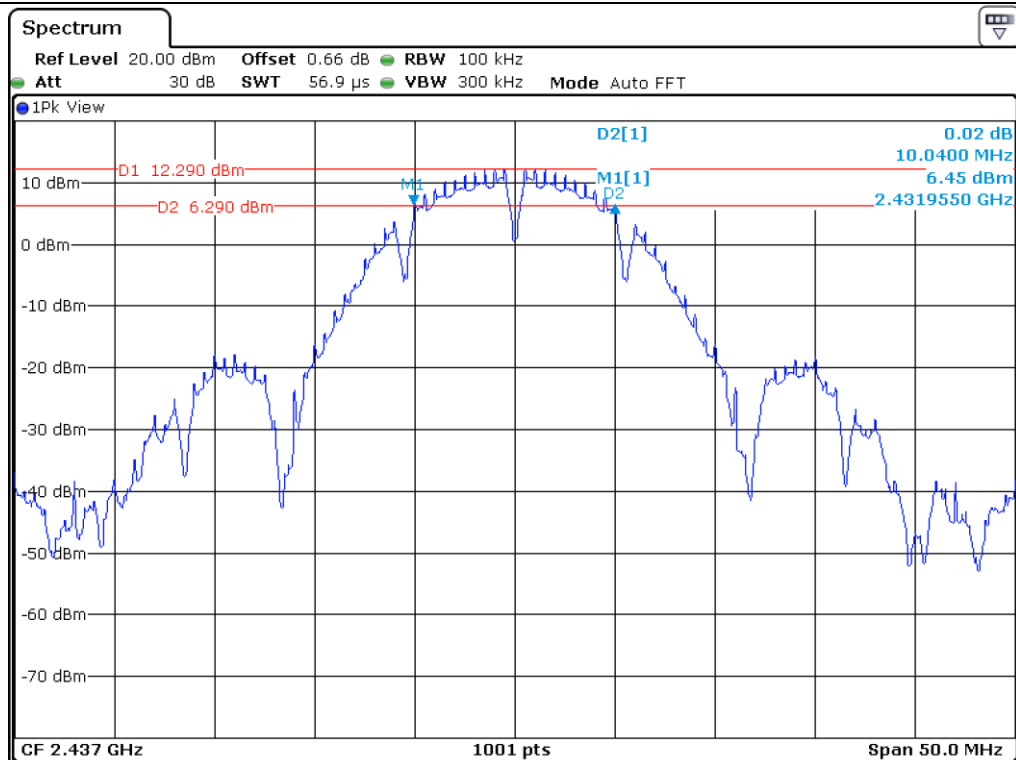

Middle Channel

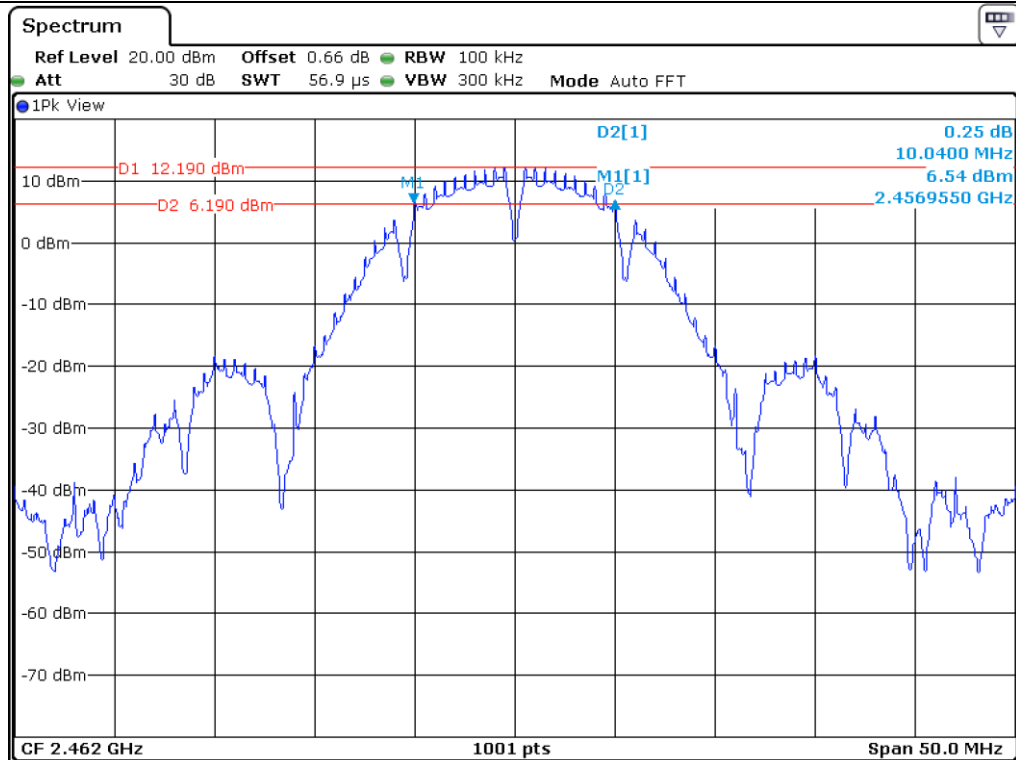

High Channel

7.4.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	10.09	0.50	9.59
Middle	2 437.00	10.09	0.50	9.59
High	2 462.00	10.09	0.50	9.59

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

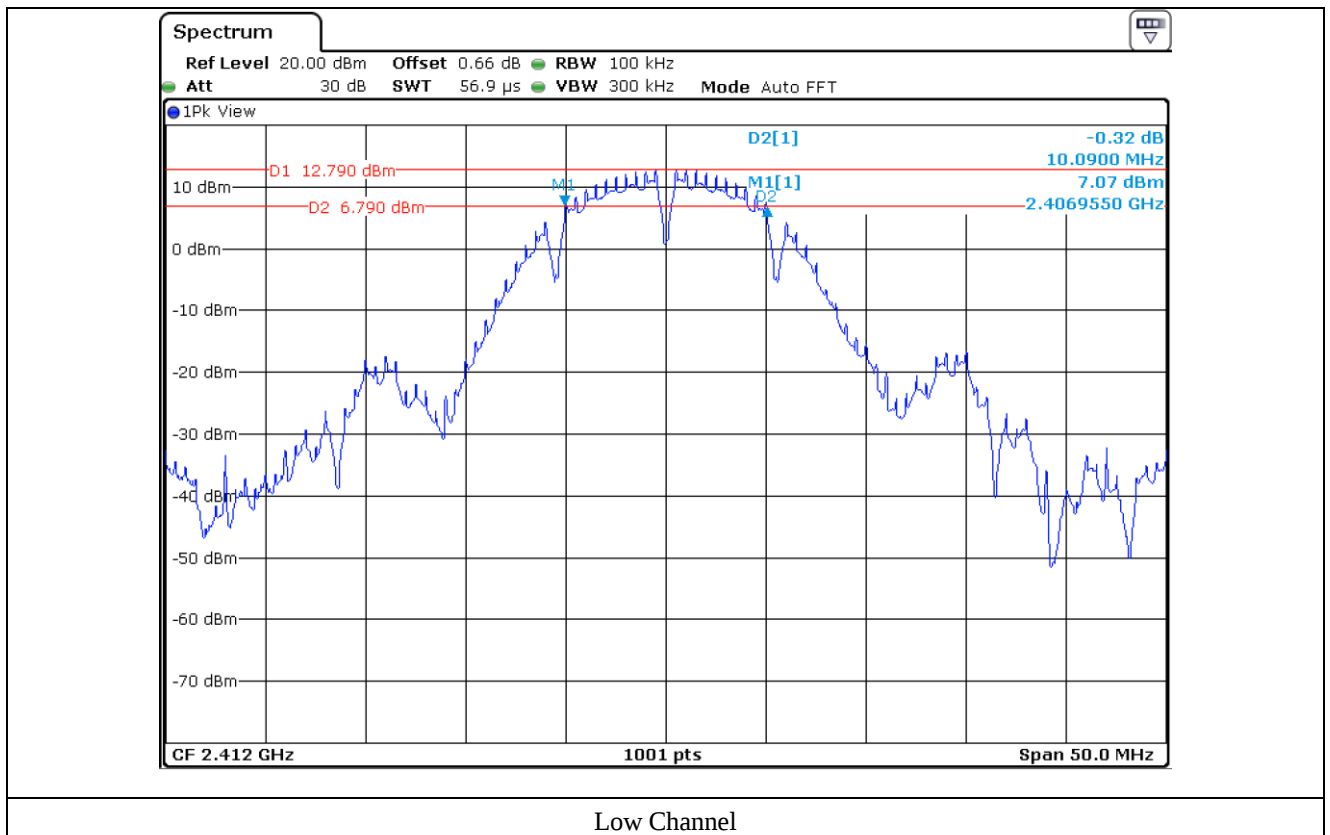

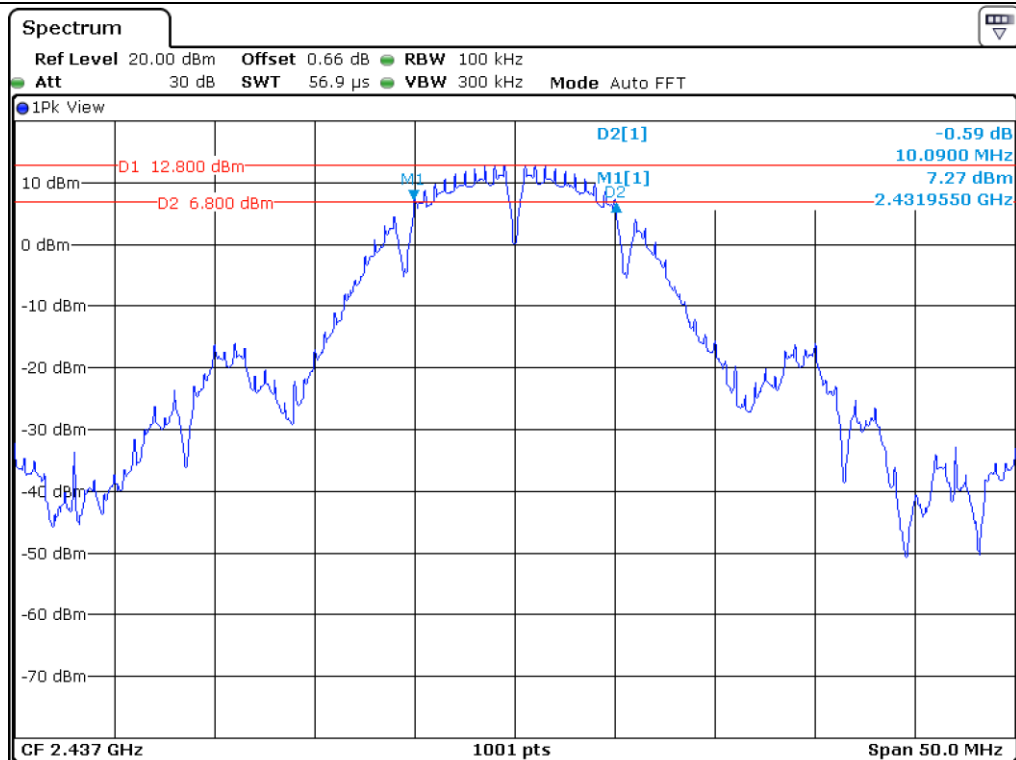

Middle Channel

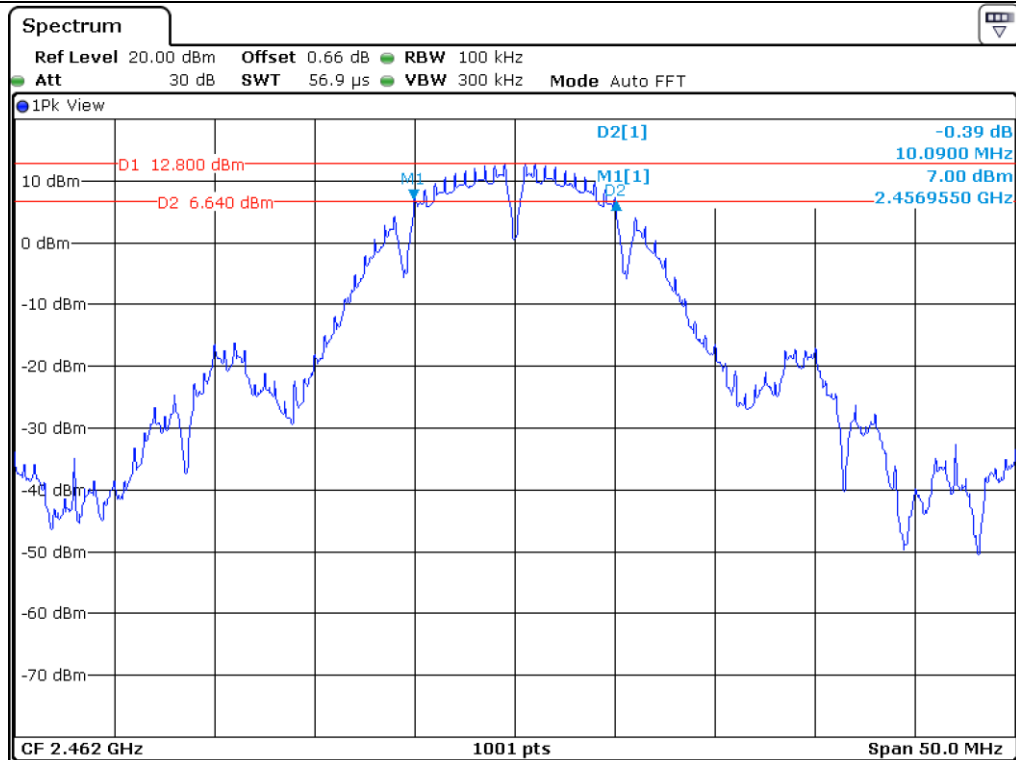

High Channel

7.5 Test data for 802.11g WLAN Mode

7.5.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.53	0.50	16.03
Middle	2 437.00	16.53	0.50	16.03
High	2 462.00	16.53	0.50	16.03

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

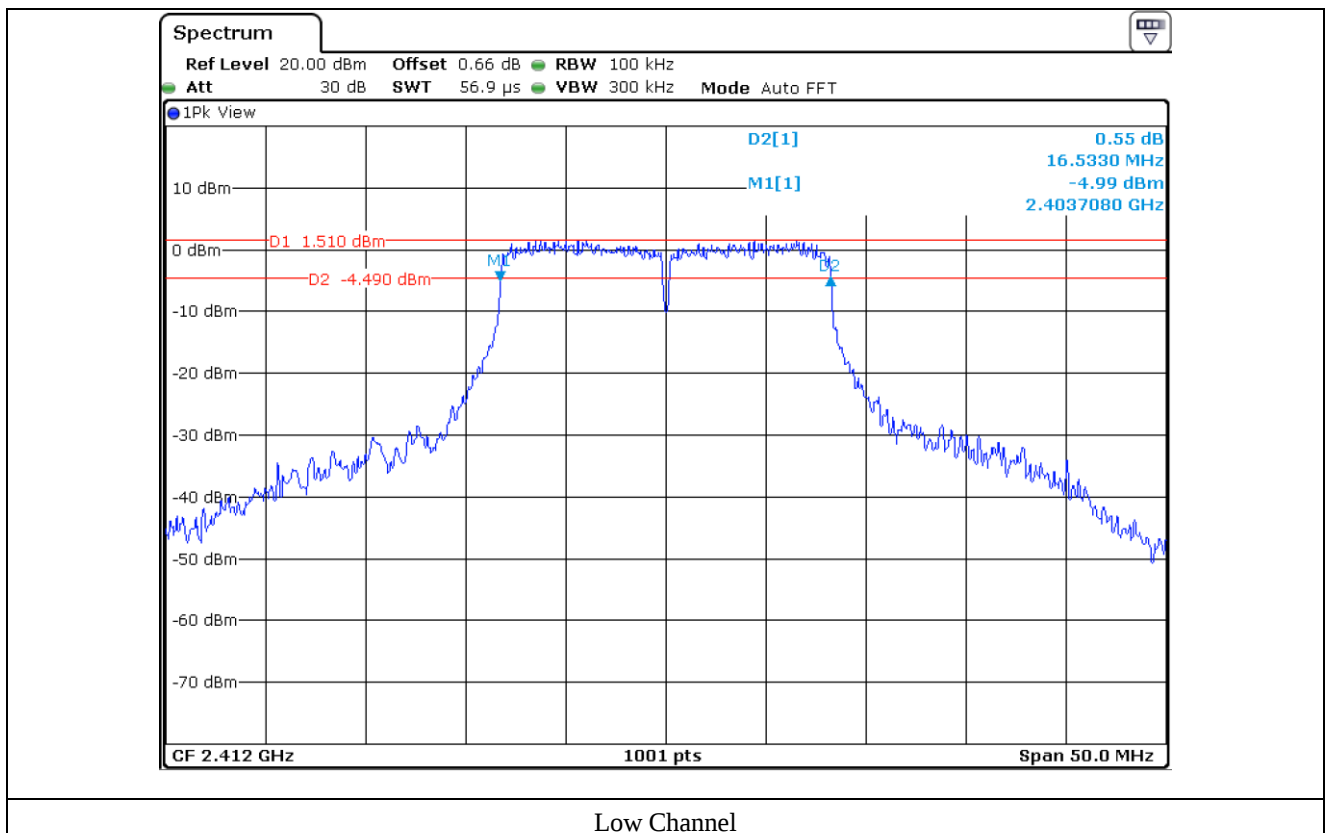

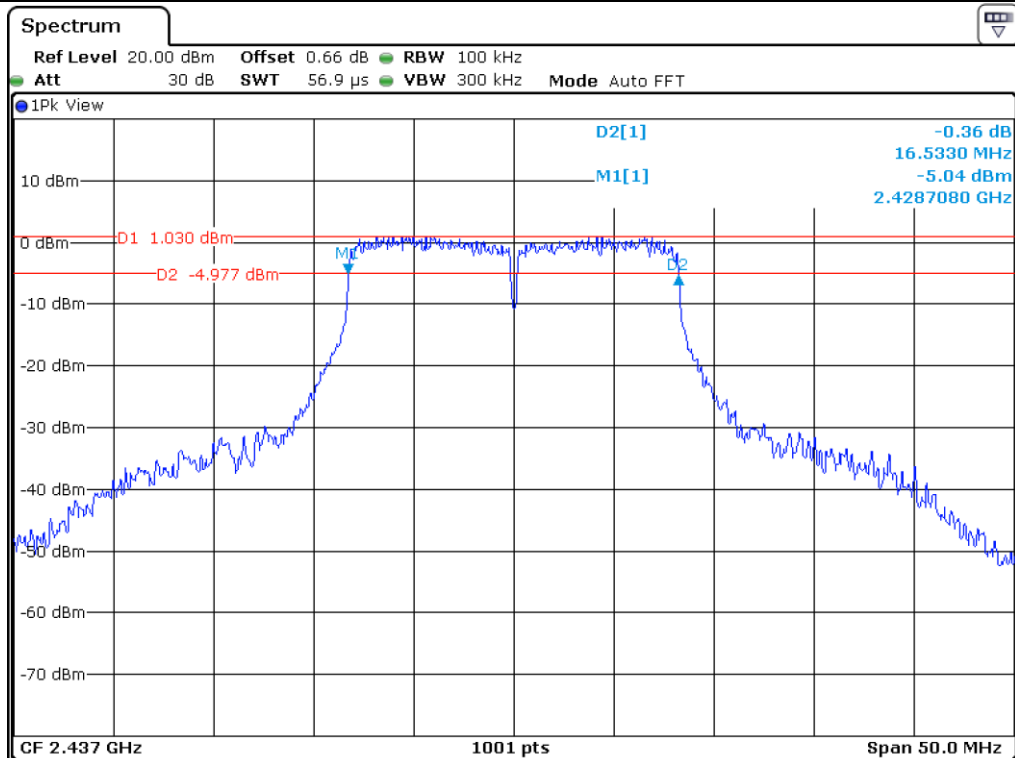

Middle Channel

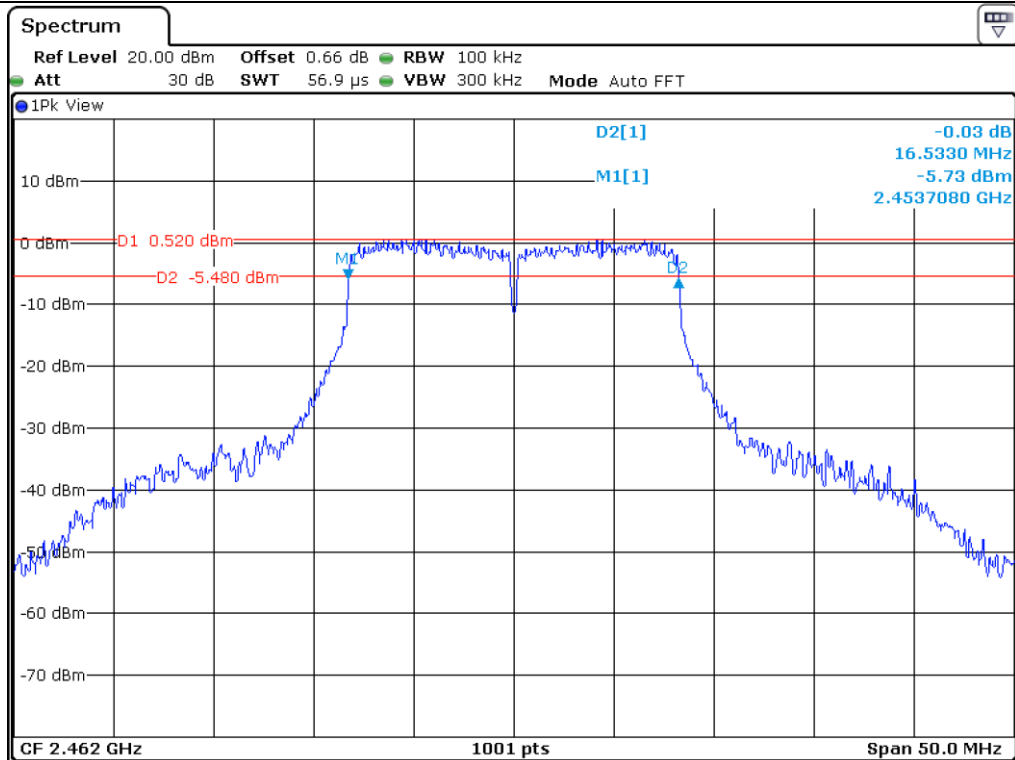

High Channel

7.5.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	16.43	0.50	15.93
Middle	2 437.00	16.43	0.50	15.93
High	2 462.00	16.43	0.50	15.93

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

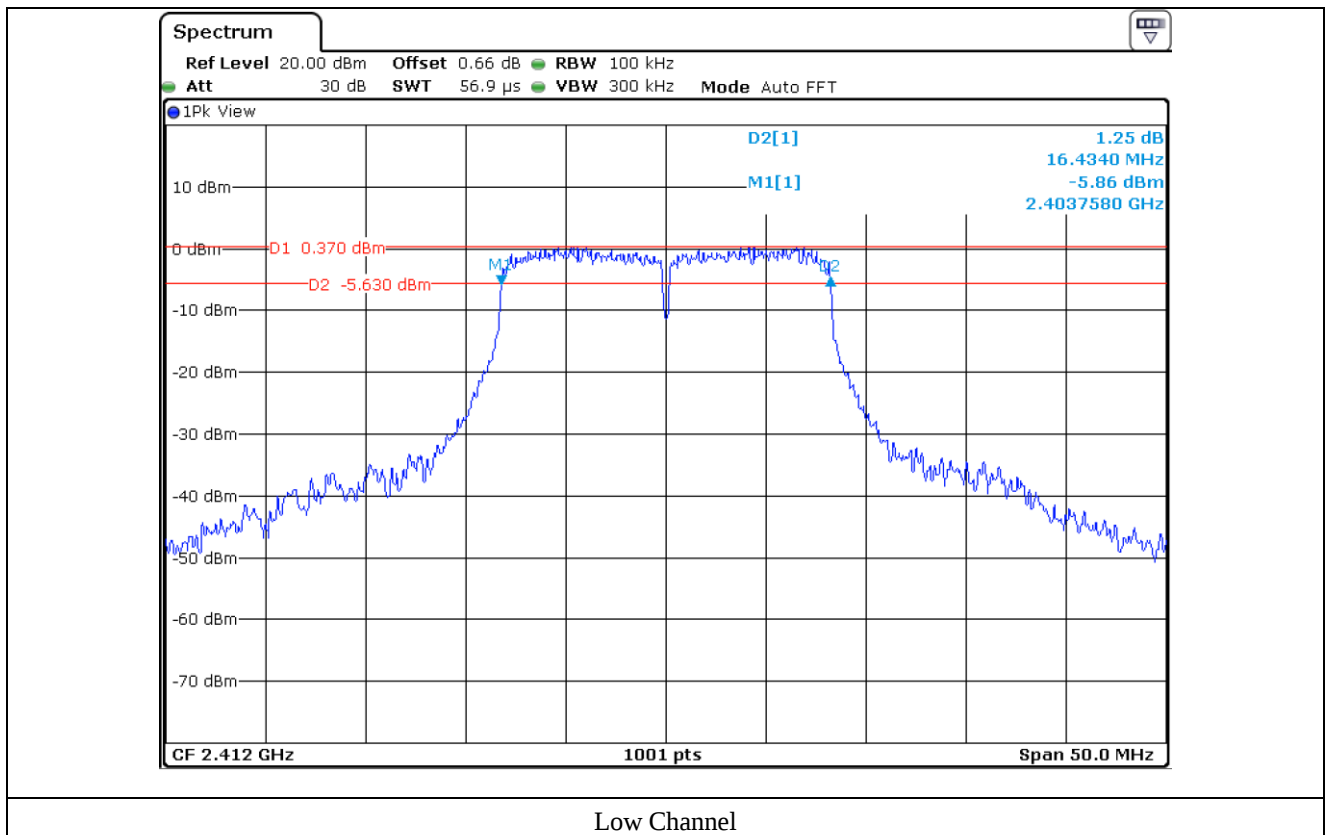

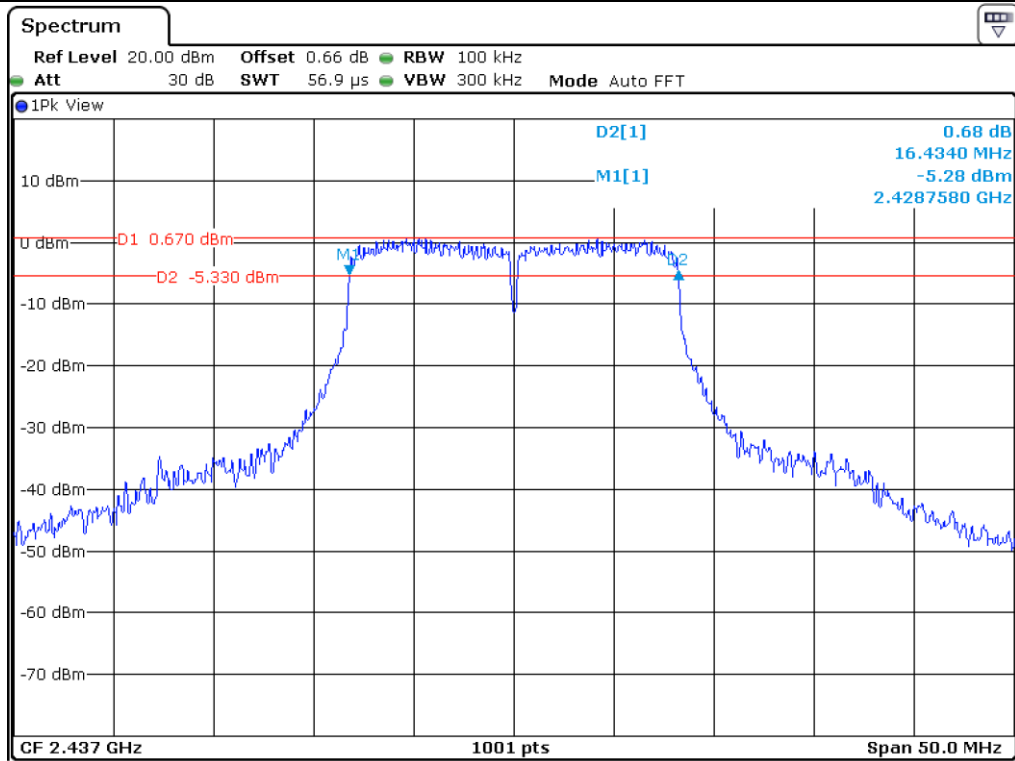

Middle Channel

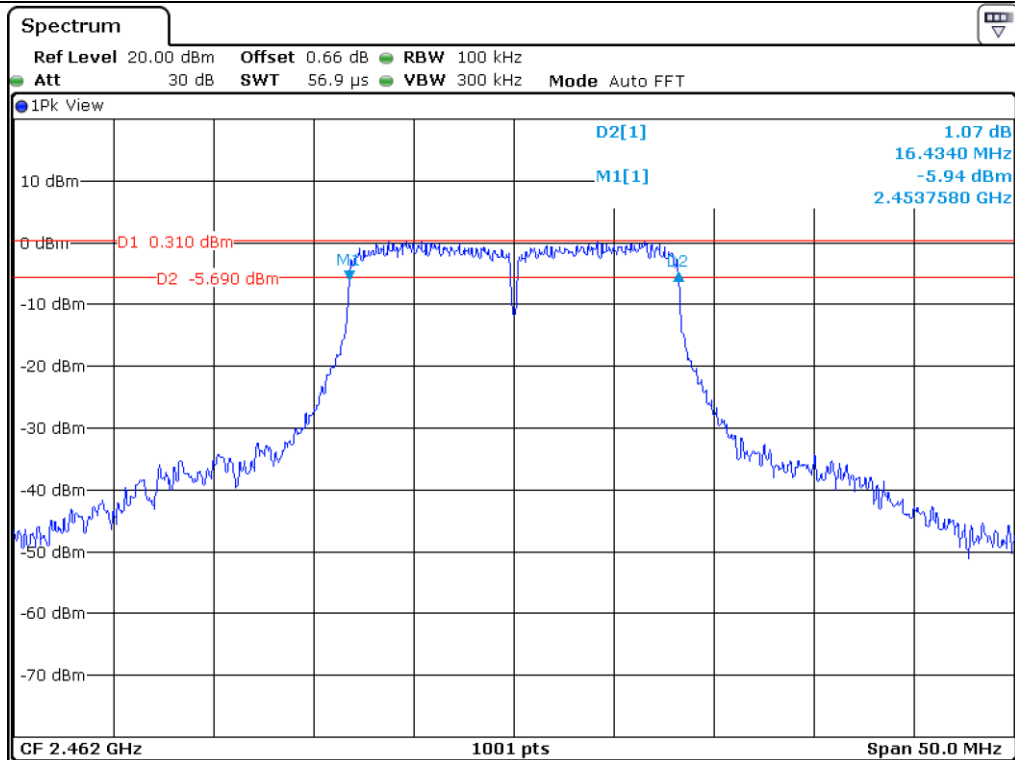

High Channel

7.6 Test data for 802.11n_HT20 WLAN Mode

7.6.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.73	0.50	17.23
Middle	2 437.00	17.68	0.50	17.18
High	2 462.00	17.68	0.50	17.18

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

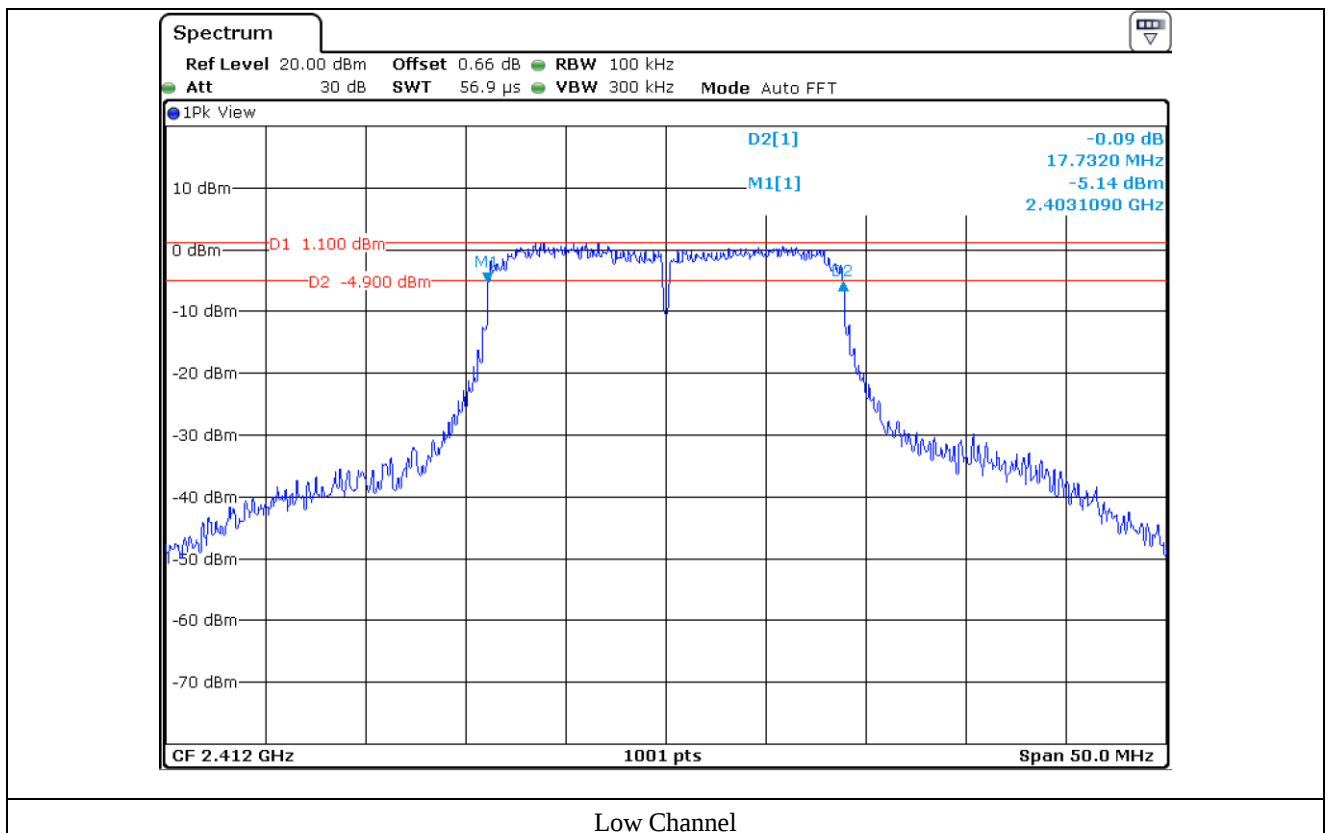

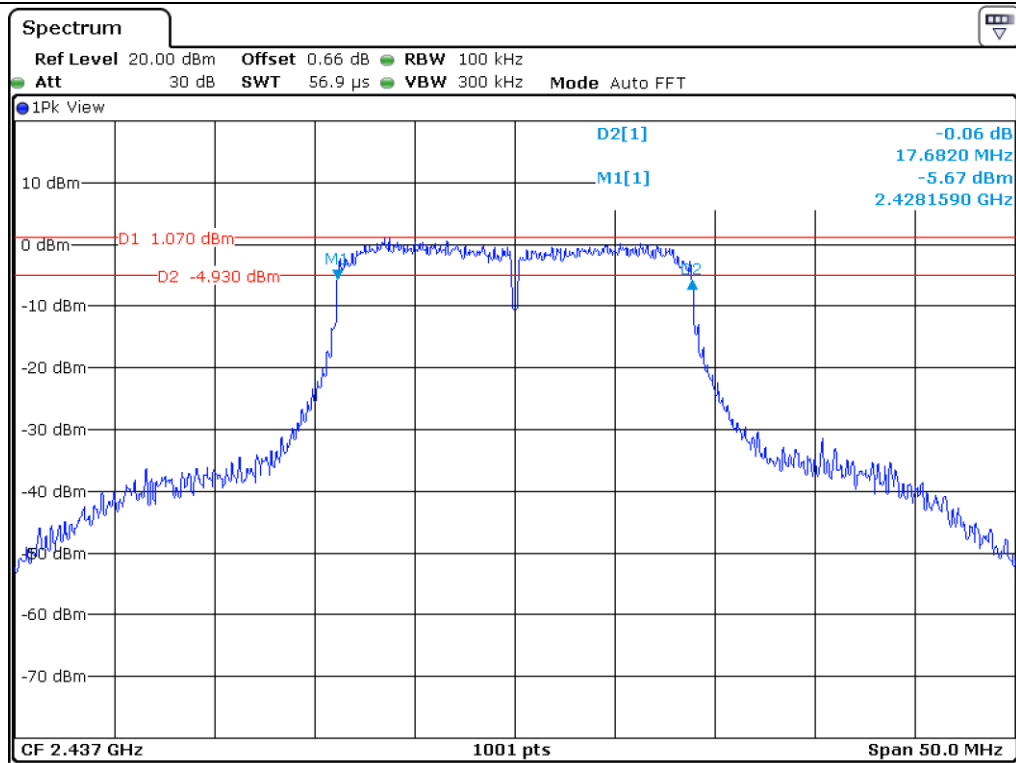

Middle Channel

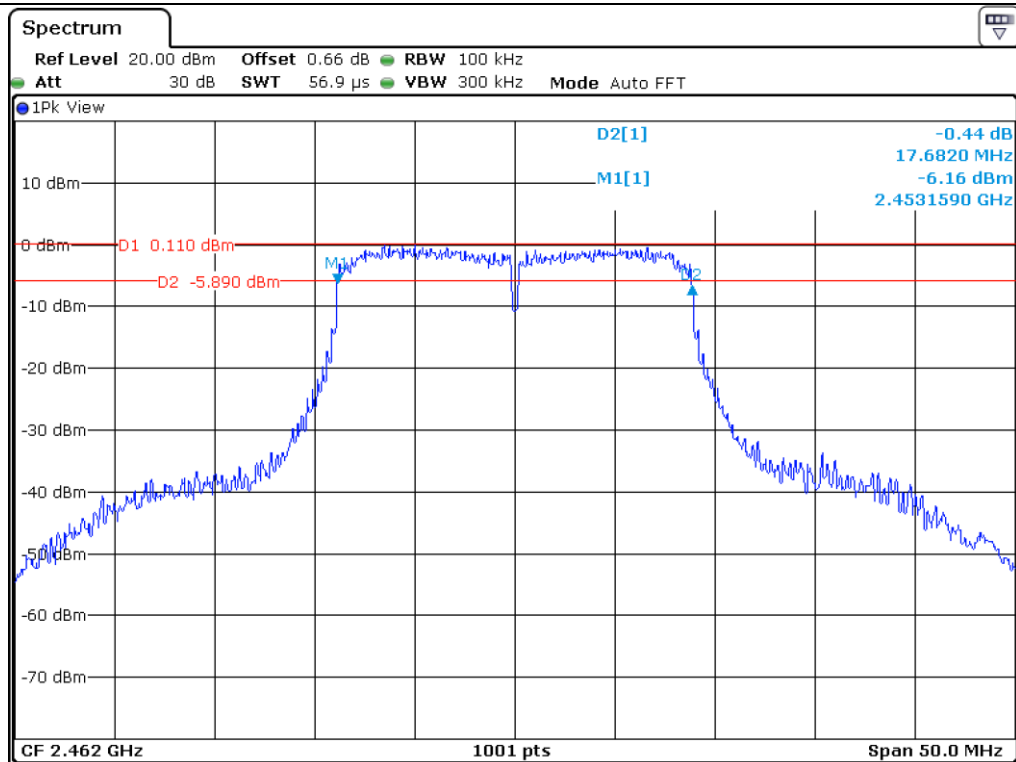

High Channel

7.6.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 412.00	17.63	0.50	17.13
Middle	2 437.00	17.63	0.50	17.13
High	2 462.00	17.63	0.50	17.13

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

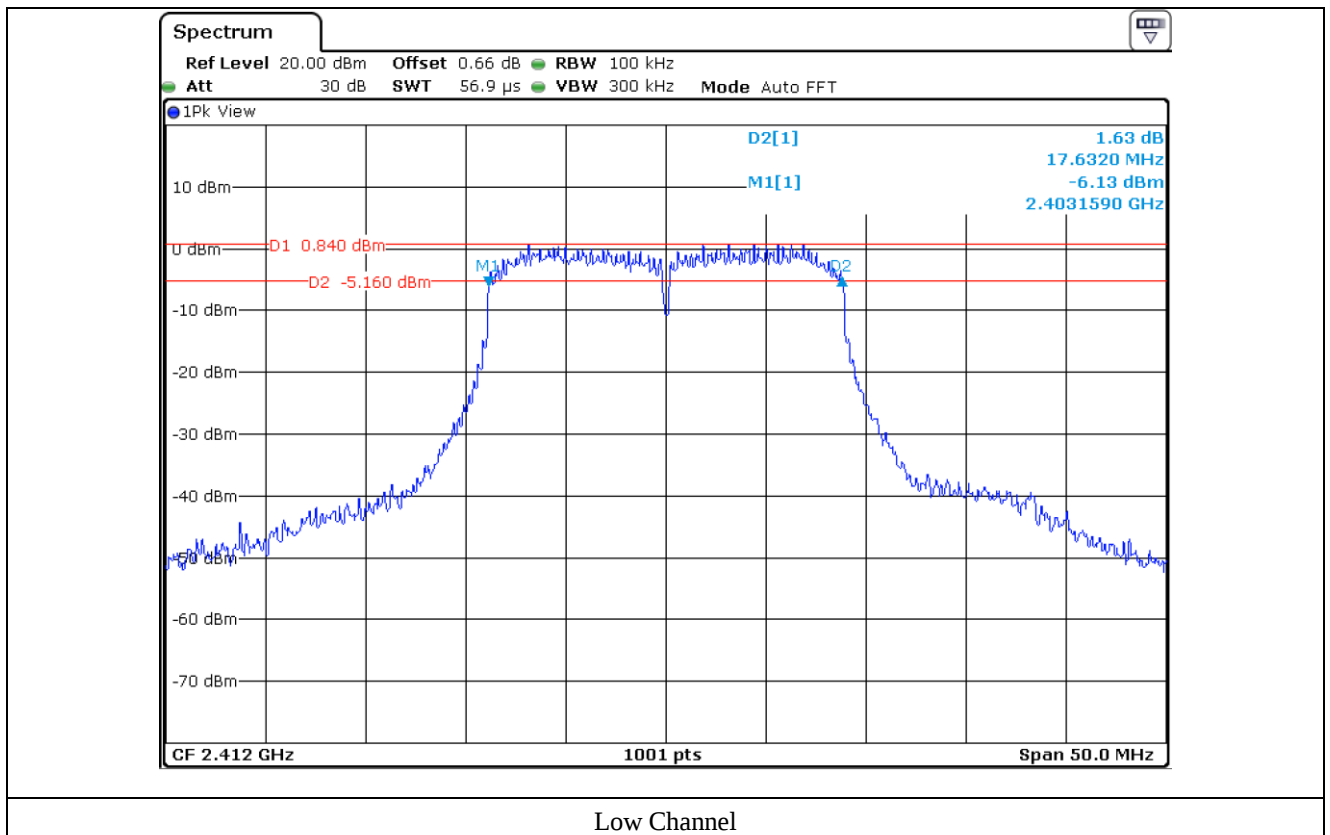

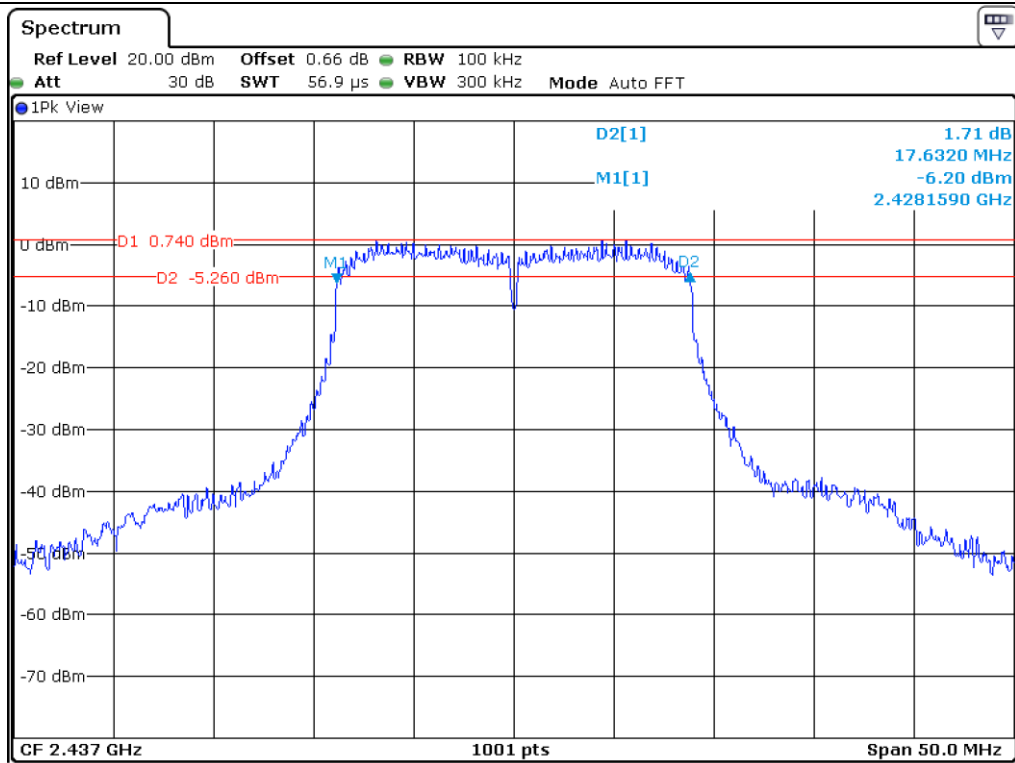

Middle Channel

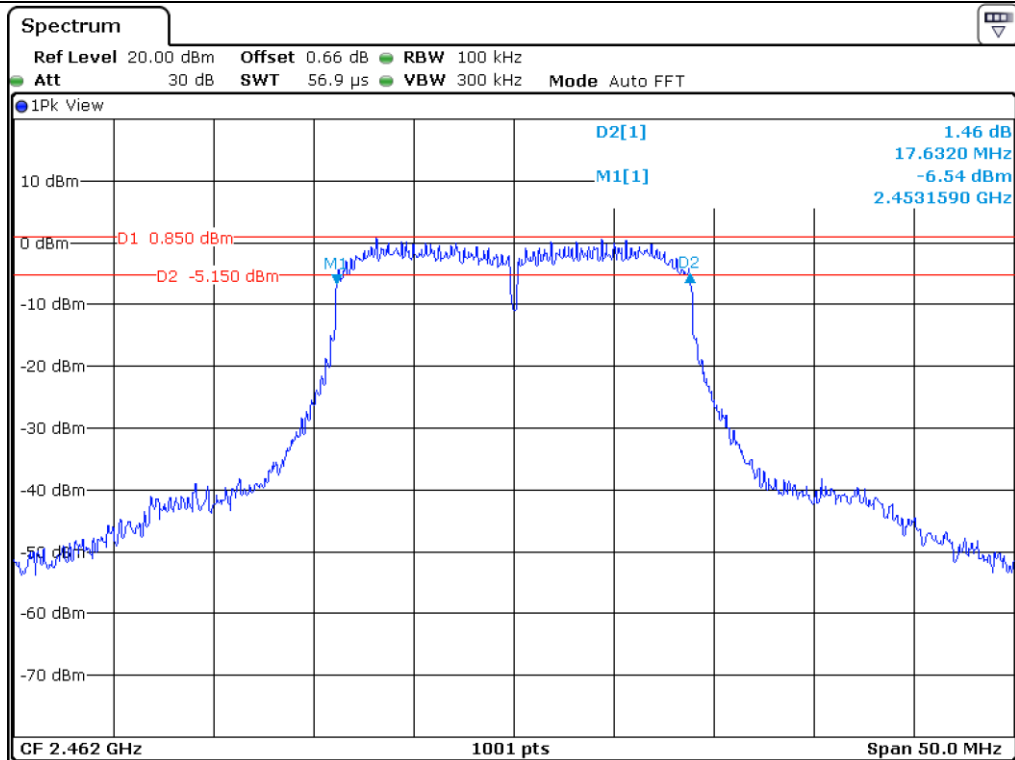

High Channel

7.7 Test data for 802.11n_HT40 WLAN Mode

7.7.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 422.00	36.56	0.50	36.06
Middle	2 437.00	36.56	0.50	36.06
High	2 452.00	36.56	0.50	36.06

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

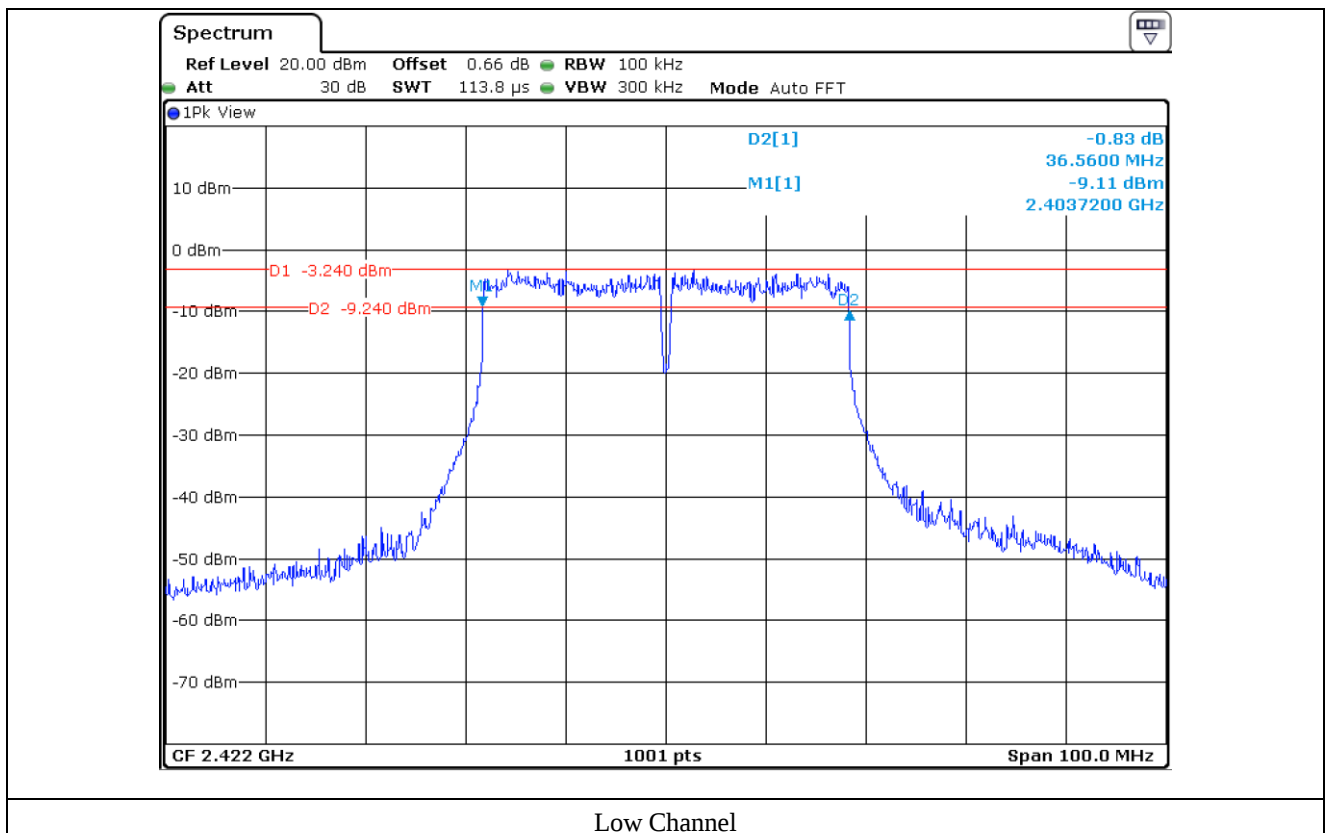

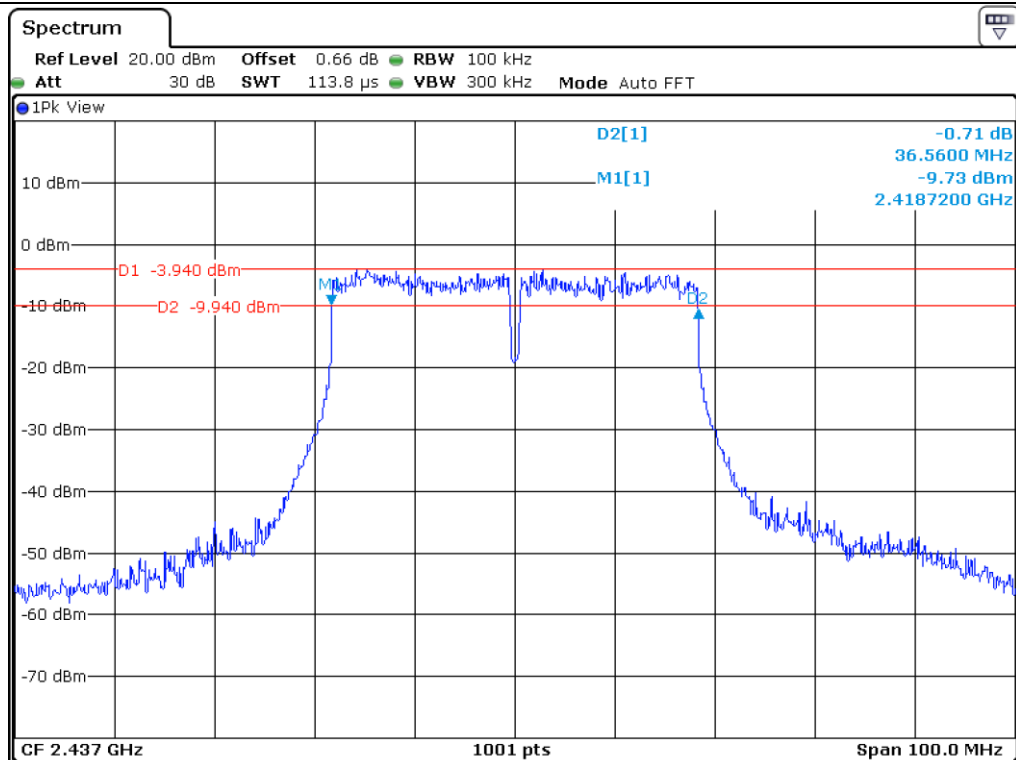

Middle Channel

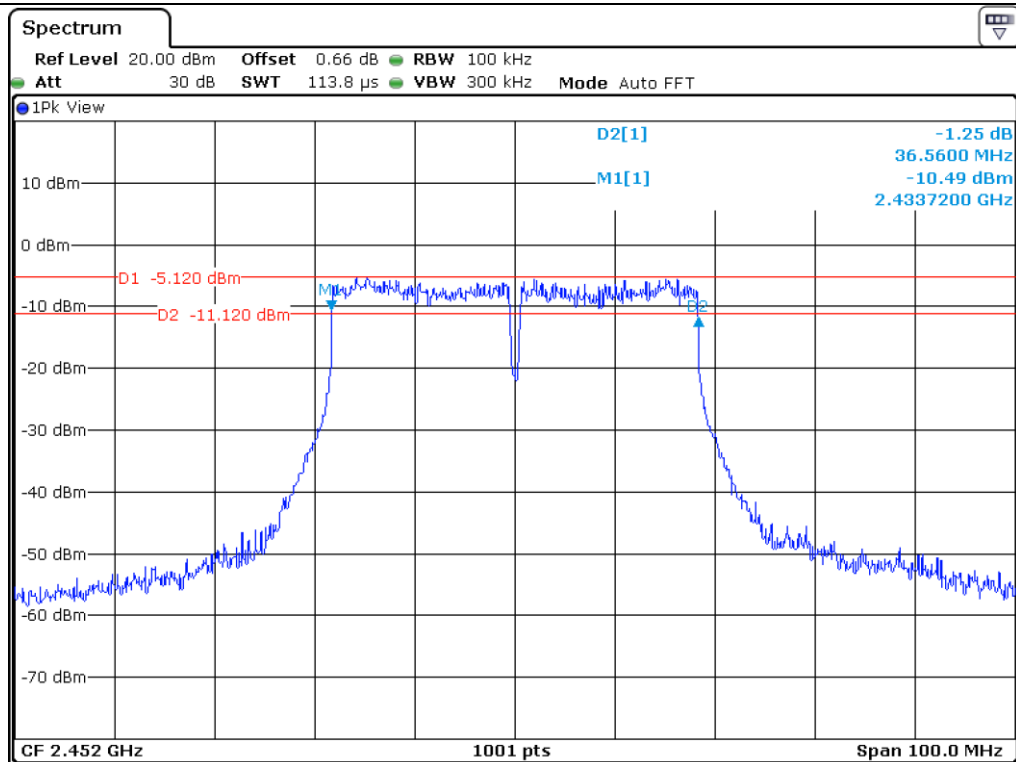

High Channel

7.7.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (MHz)	LIMIT (MHz)	Margin (MHz)
Low	2 422.00	36.56	0.50	36.06
Middle	2 437.00	36.56	0.50	36.06
High	2 452.00	36.56	0.50	36.06

Remark. Margin = Measured Value - Limit




Tested by: Hyung-Kwon, Oh / Assistant Manager

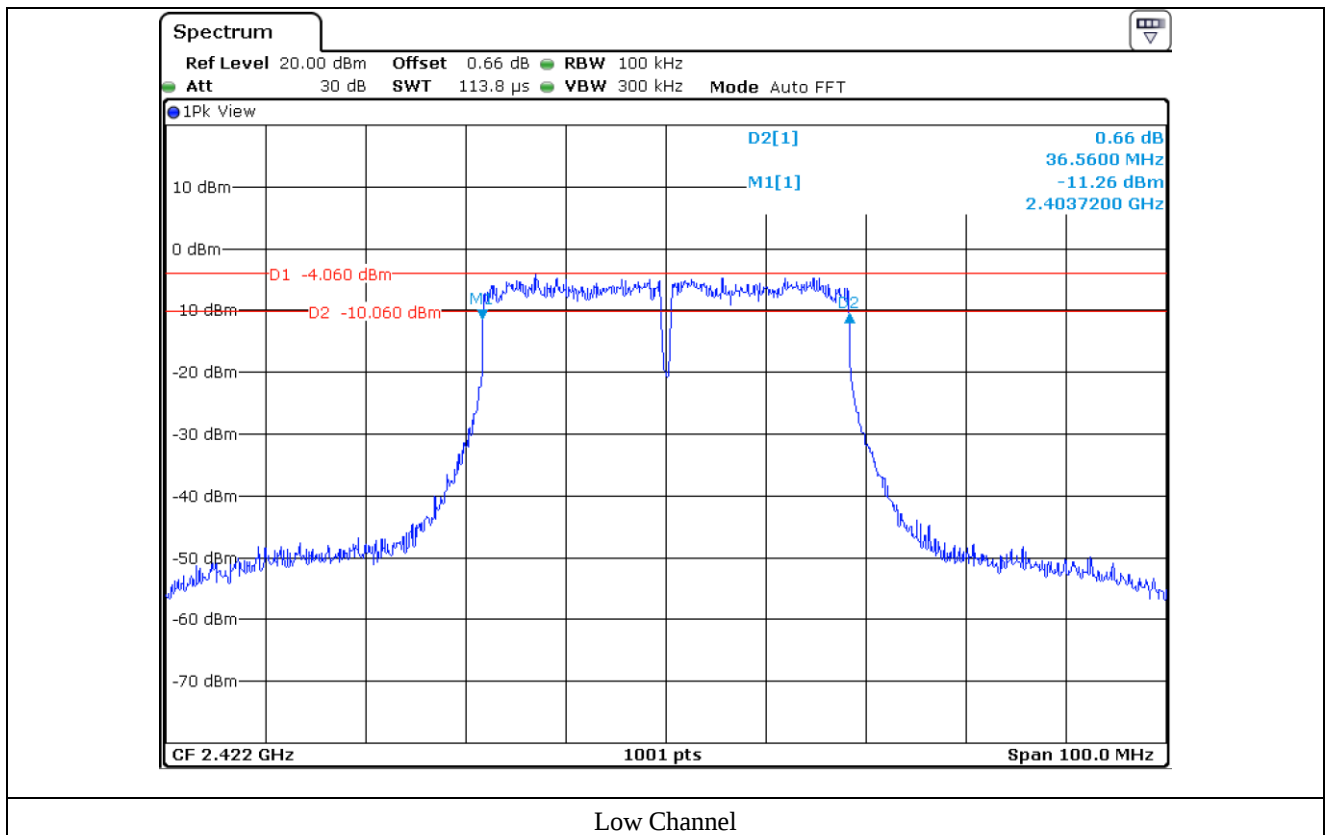

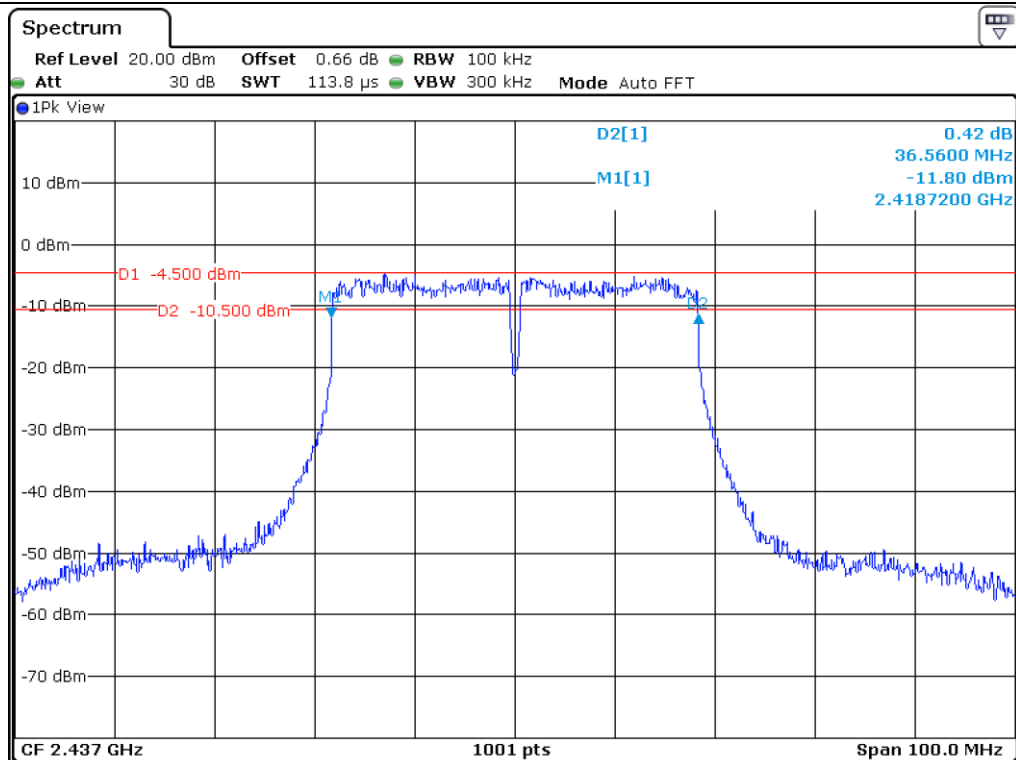

Middle Channel

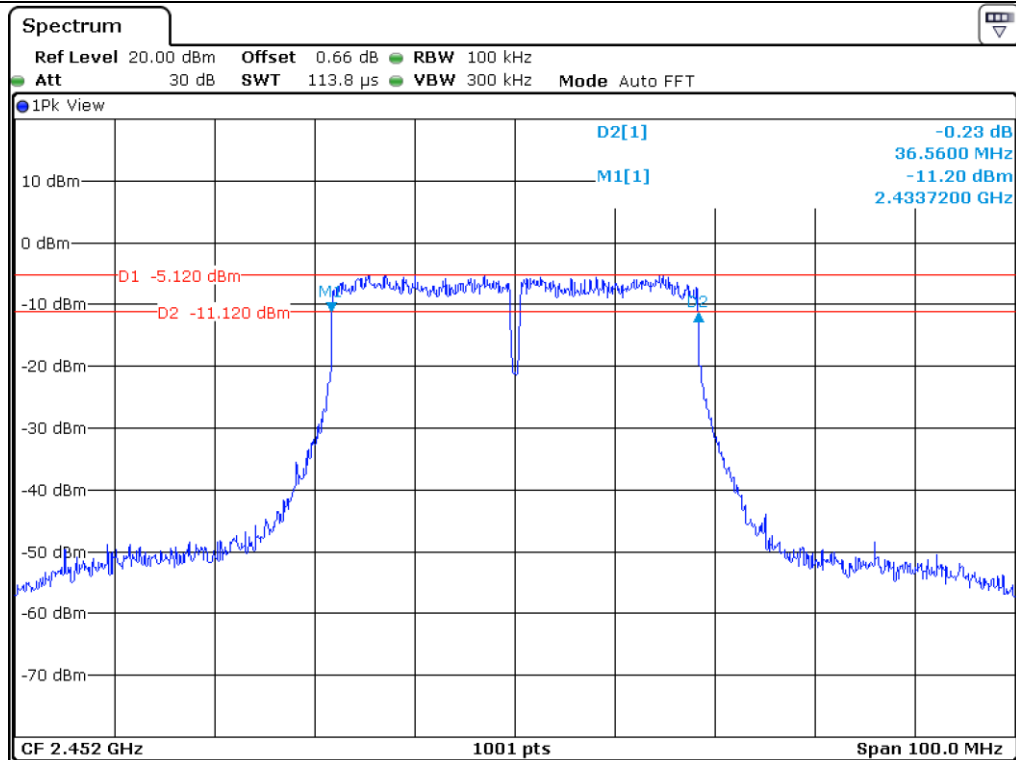

High Channel

8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment


Temperature : 23 °C
Relative humidity : 41 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT.

The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section 8.3.2(558074 D01 15.247 Meas Guidance v05r02).

Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

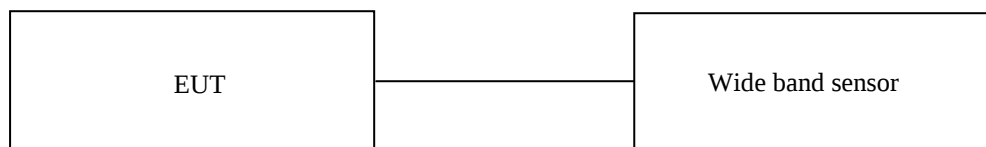

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - NRP-Z81	Rohde & Schwarz	Wide band Sensor	101975	Mar. 12, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data for 802.11b WLAN Mode

8.4.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	21.80	30.00	8.20
MIDDLE	2 437.00	21.55	30.00	8.45
HIGH	2 462.00	21.35	30.00	8.65

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)

8.4.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	21.81	30.00	8.19
MIDDLE	2 437.00	21.85	30.00	8.15
HIGH	2 462.00	21.90	30.00	8.10

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.5 Test data for 802.11g WLAN Mode

8.5.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	14.46	30.00	15.54
MIDDLE	2 437.00	14.27	30.00	15.73
HIGH	2 462.00	13.98	30.00	16.02

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)

8.5.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	13.84	30.00	16.16
MIDDLE	2 437.00	13.92	30.00	16.08
HIGH	2 462.00	13.98	30.00	16.02

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.6 Test data for 802.11n_HT20 WLAN Mode

8.6.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	13.81	30.00	16.19
MIDDLE	2 437.00	13.37	30.00	16.63
HIGH	2 462.00	13.10	30.00	16.90

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)

8.6.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	13.57	30.00	16.43
MIDDLE	2 437.00	13.85	30.00	16.15
HIGH	2 462.00	13.35	30.00	16.65

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.6.3 Test data for Multiple Transmit

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 412.00	16.70	30.00	13.30
MIDDLE	2 437.00	16.63	30.00	13.37
HIGH	2 462.00	16.24	30.00	13.76

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.7 Test data for 802.11n_HT40 WLAN Mode

8.7.1 Test data for Antenna 0

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	10.05	30.00	19.95
MIDDLE	2 437.00	10.32	30.00	19.68
HIGH	2 452.00	10.09	30.00	19.91

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)

8.7.2 Test data for Antenna 1

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	9.98	30.00	20.02
MIDDLE	2 437.00	10.44	30.00	19.56
HIGH	2 452.00	10.50	30.00	19.50

Remark : Margin = Limit – Measured Value (=Power Sensor Reading)



Tested by: Hyung-Kwon, Oh / Assistant Manager

8.7.3 Test data for Multiple Transmit

-. Test Date : June 07, 2019 ~ June 13, 2019

-. Test Result : Pass

-. Duty Cycle : 100.00 %

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 422.00	13.03	30.00	16.97
MIDDLE	2 437.00	13.39	30.00	16.61
HIGH	2 452.00	13.31	30.00	16.69

Remark 1 : Margin = Limit – Measured Value (=Power Sensor Reading - Cable Loss)

Remark 2 : Calculated Output Power= $10\log (10^{(\text{Antenna0 Output Power}/10)} + 10^{(\text{Antenna1 Output Power}/10)})$



Tested by: Hyung-Kwon, Oh / Assistant Manager


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
Relative humidity : 41 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

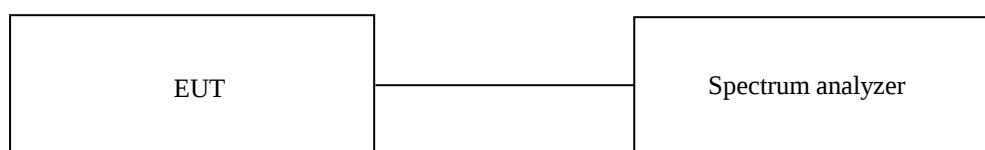

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	Mar. 11, 2019 (1Y)
■ -	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2018 (1Y)
■ -	310N	Sonoma Instrument	Pre-Amplifier	312545	Mar. 18, 2019 (1Y)
■ -	BBV9718B	Schwarzbeck	Amplifier	310	Mar. 20, 2019 (1Y)
■	SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Mar. 11, 2019 (1Y)
■ -	DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ -	MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-419	Aug. 09, 2018 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jan. 16, 2019 (1Y)


All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

9.5.1 Test data for 802.11b WLAN Mode


9.5.1.1 Test data for Antenna 0

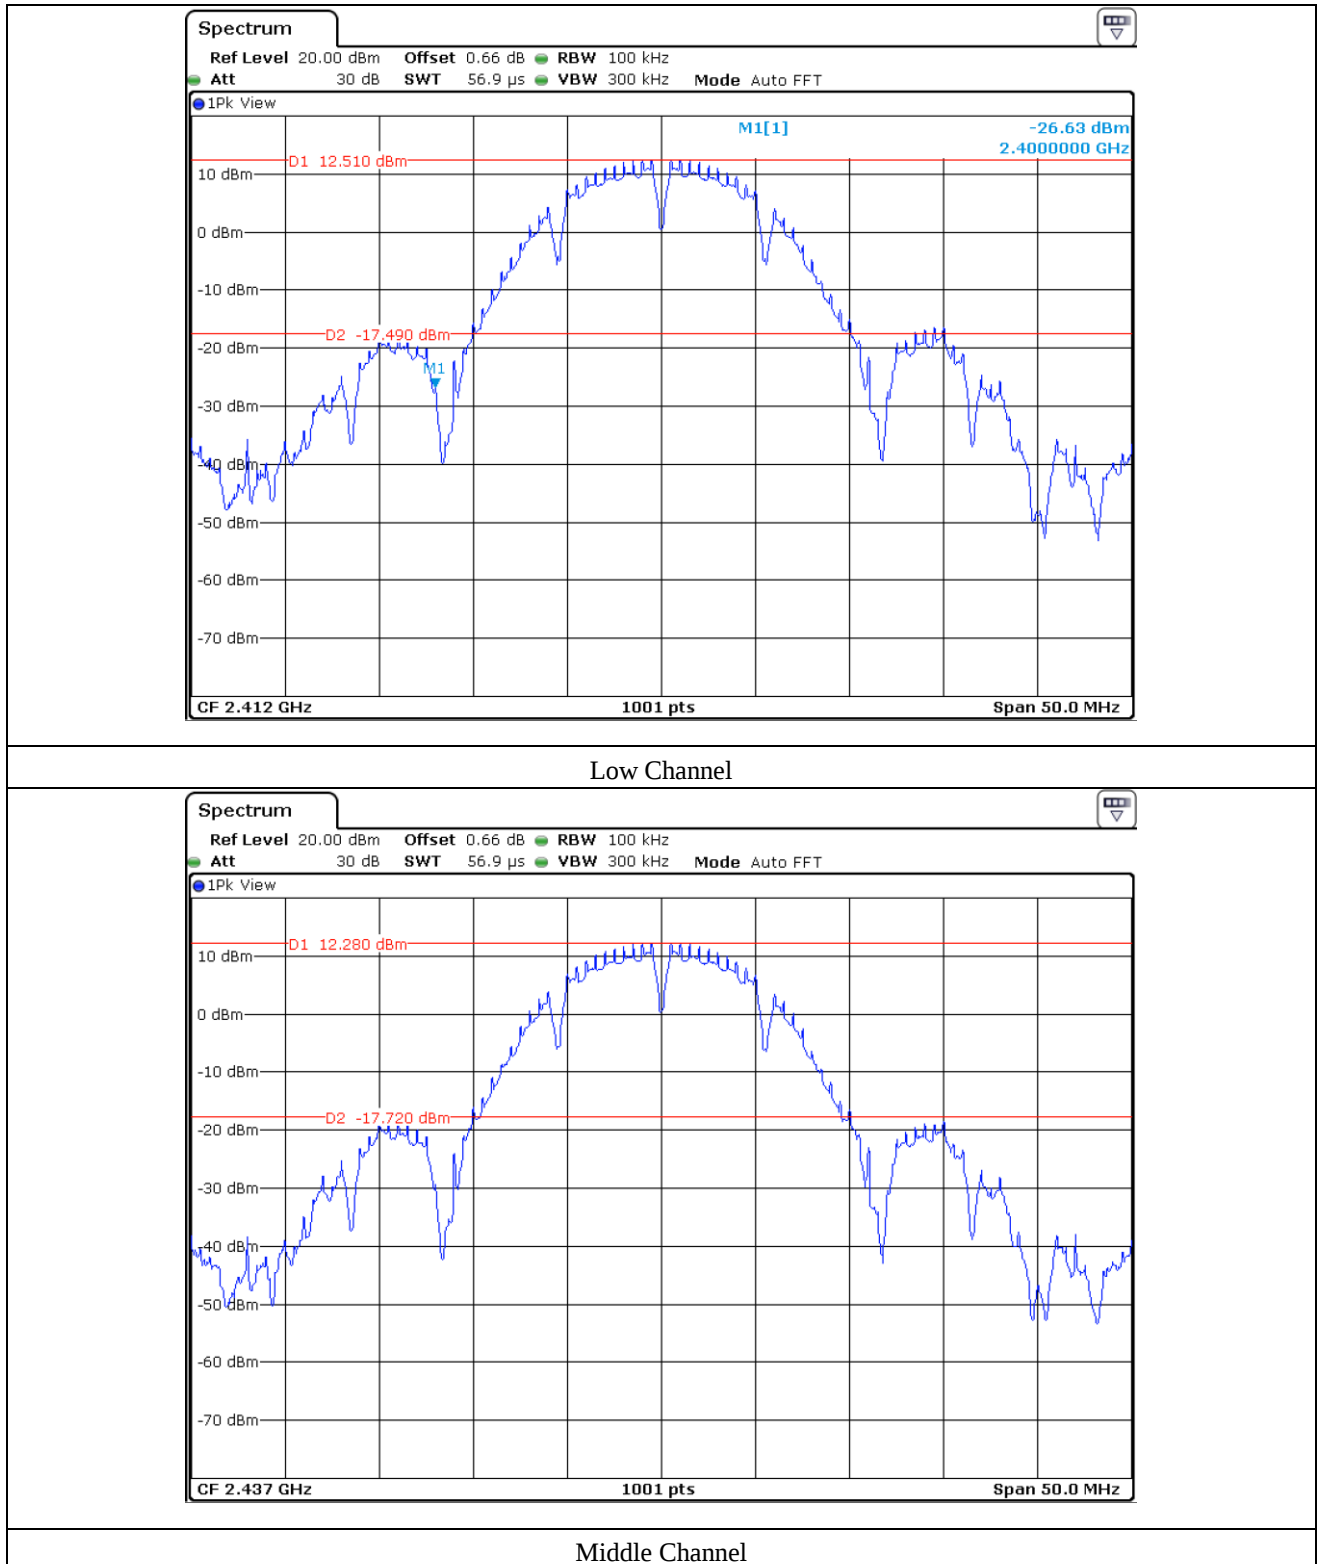

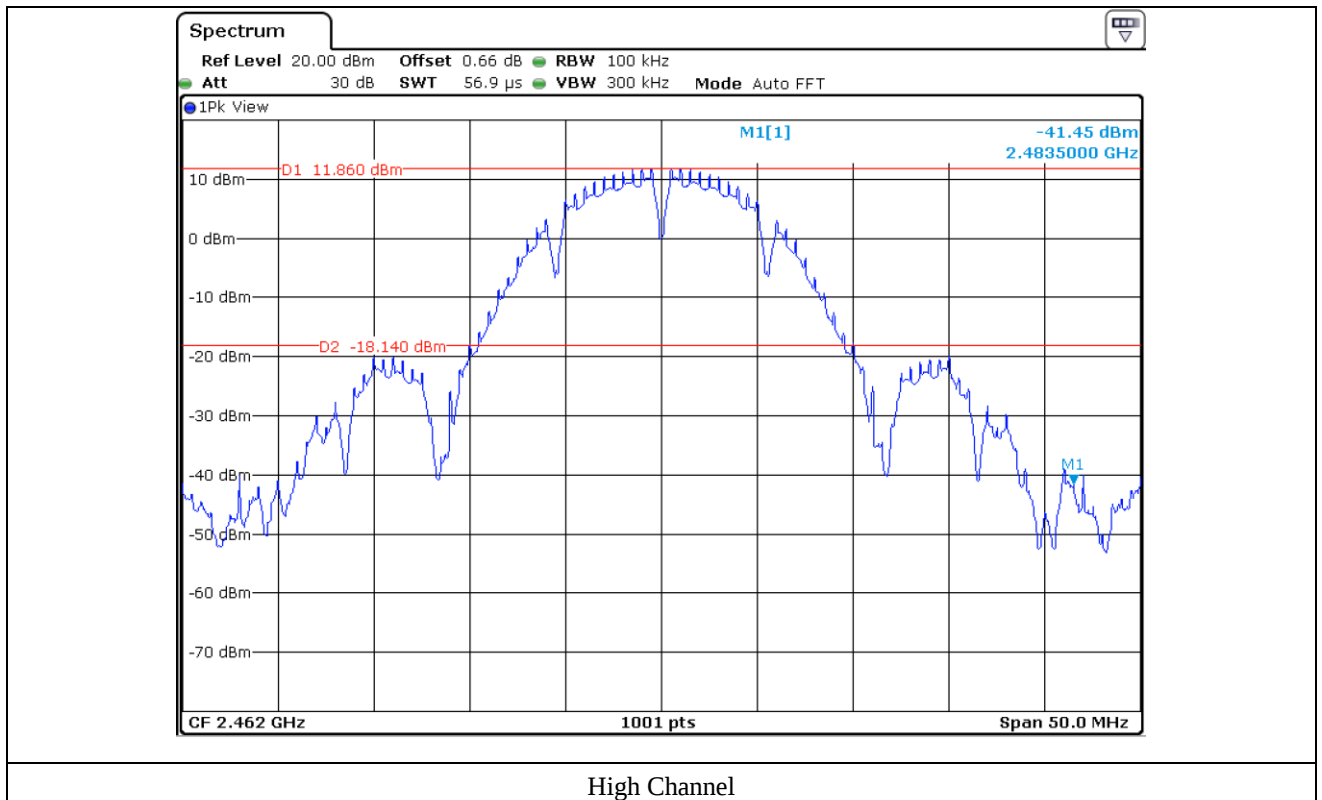


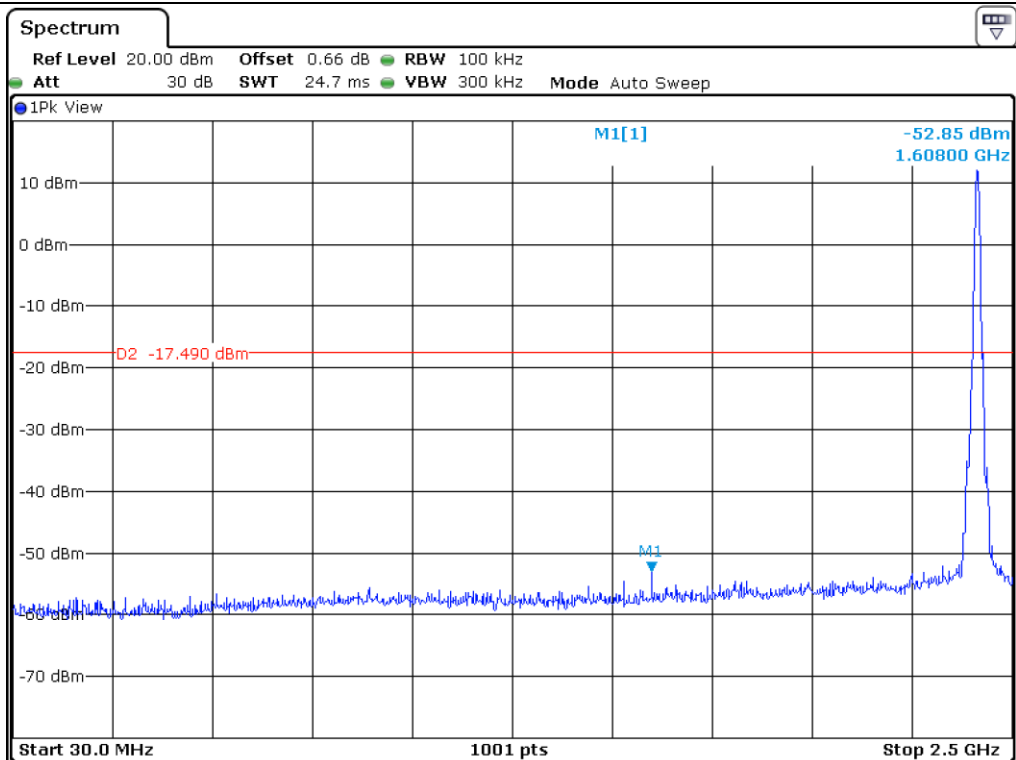


Low Channel

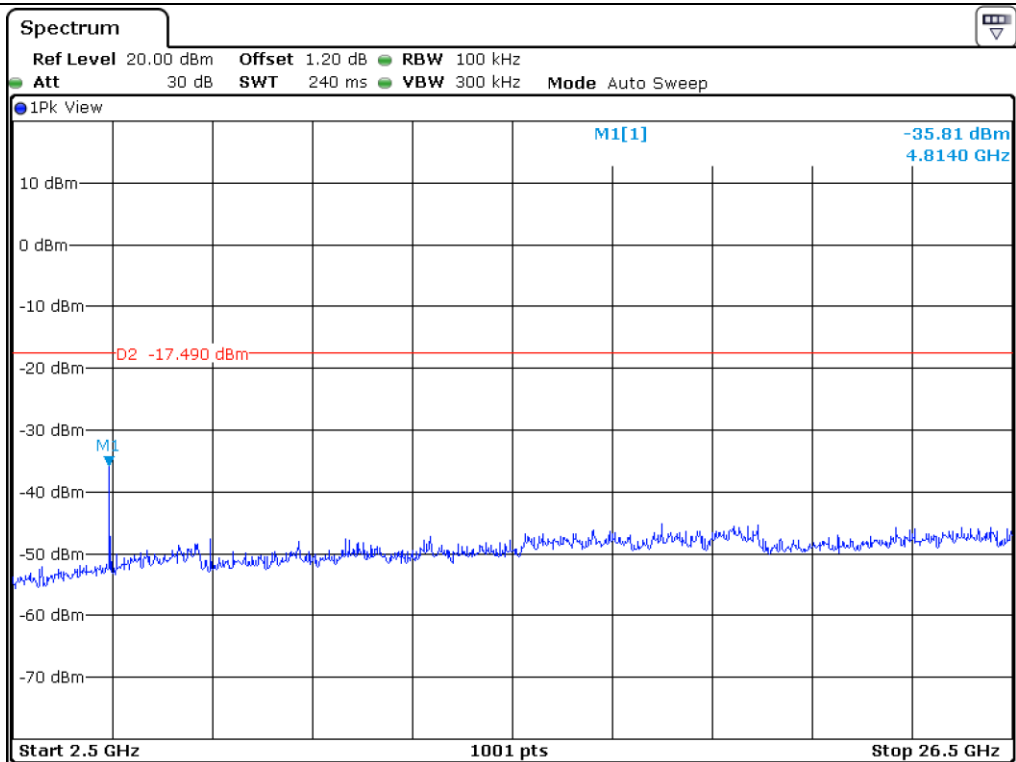


Low Channel

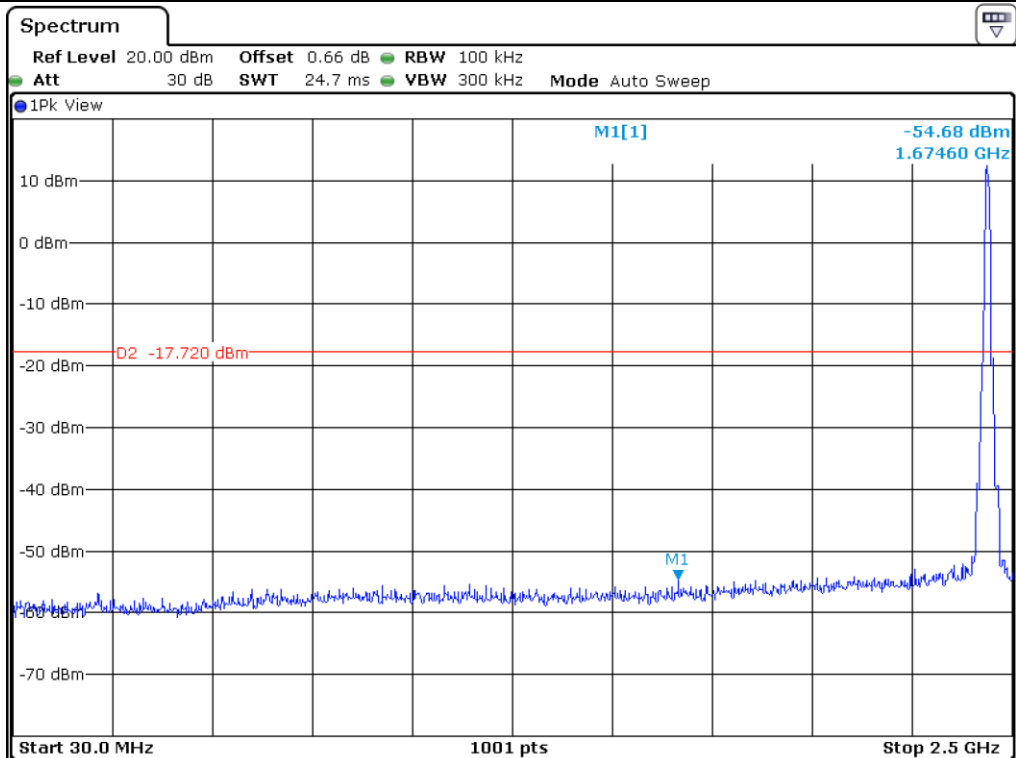


Middle Channel

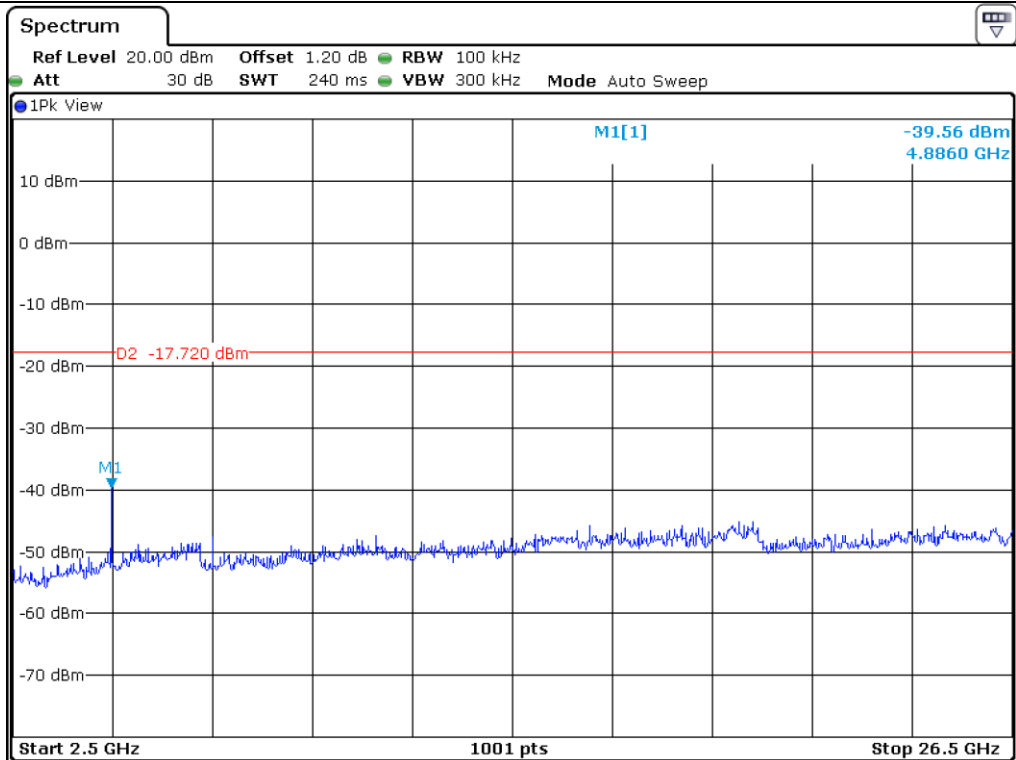

Middle Channel

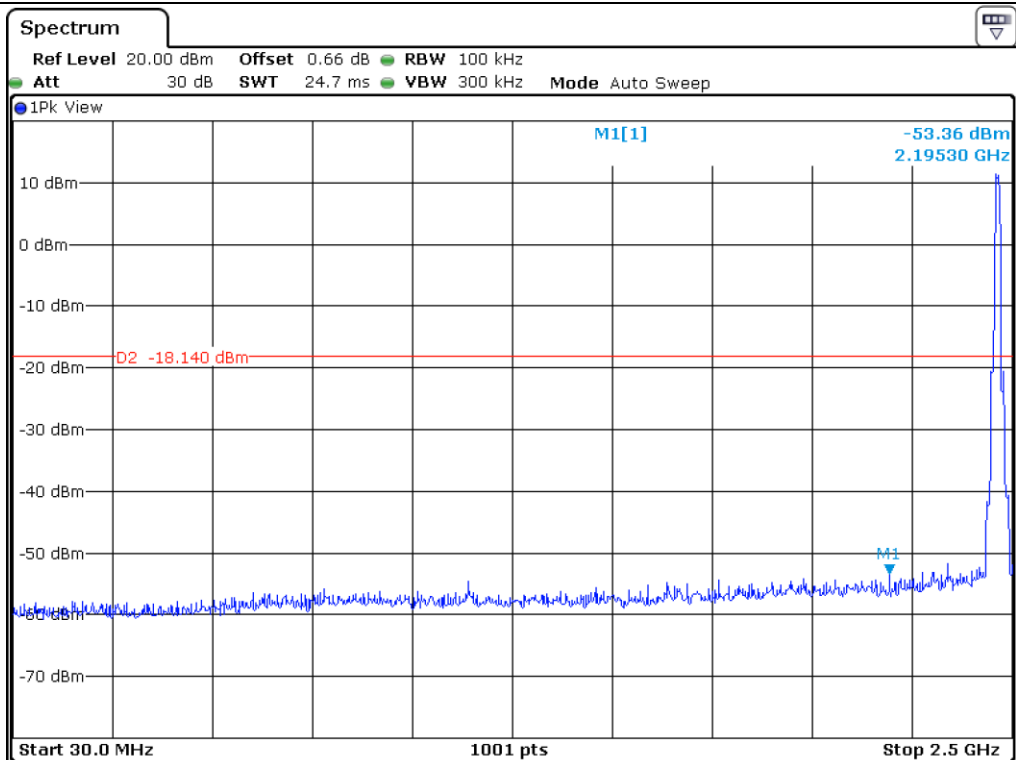


High Channel

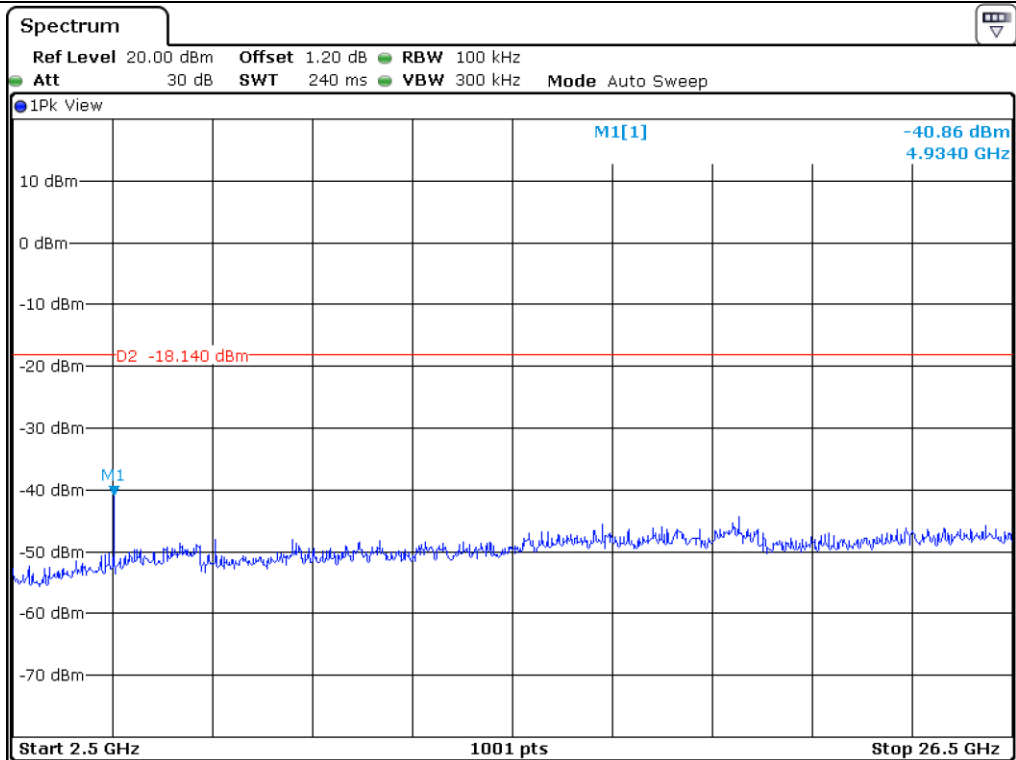


High Channel


9.5.1.2 Test data for Antenna 1

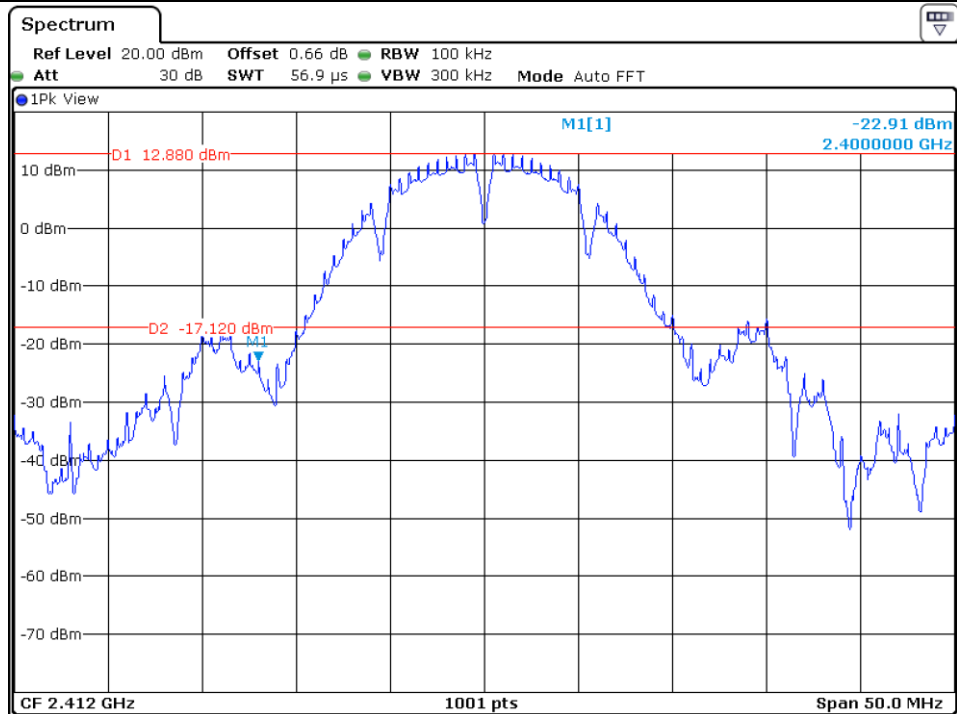


Low Channel

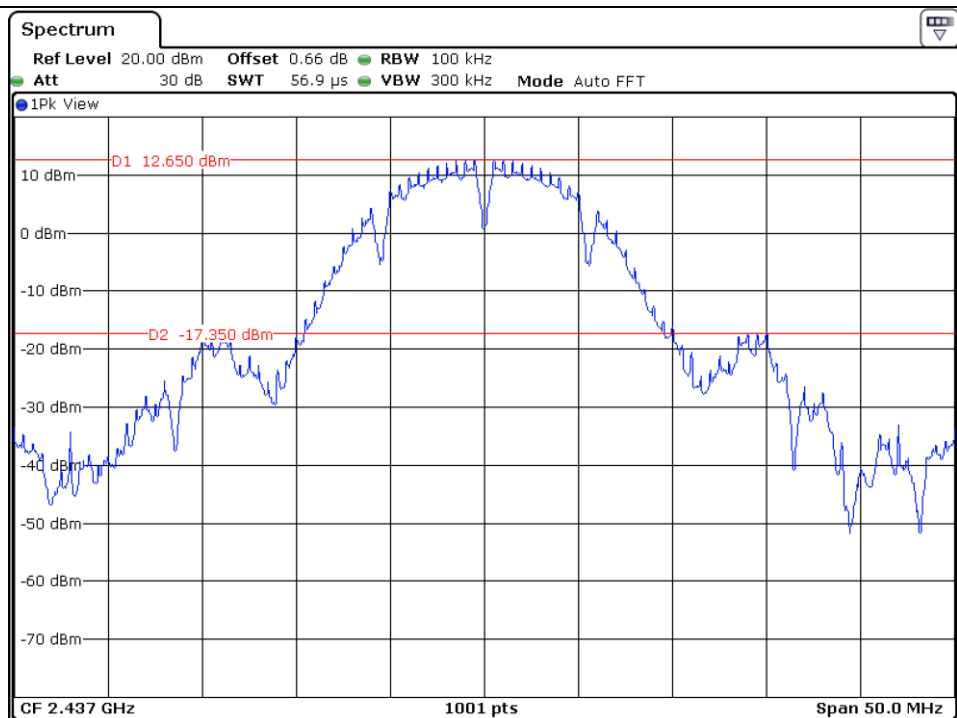


Middle Channel

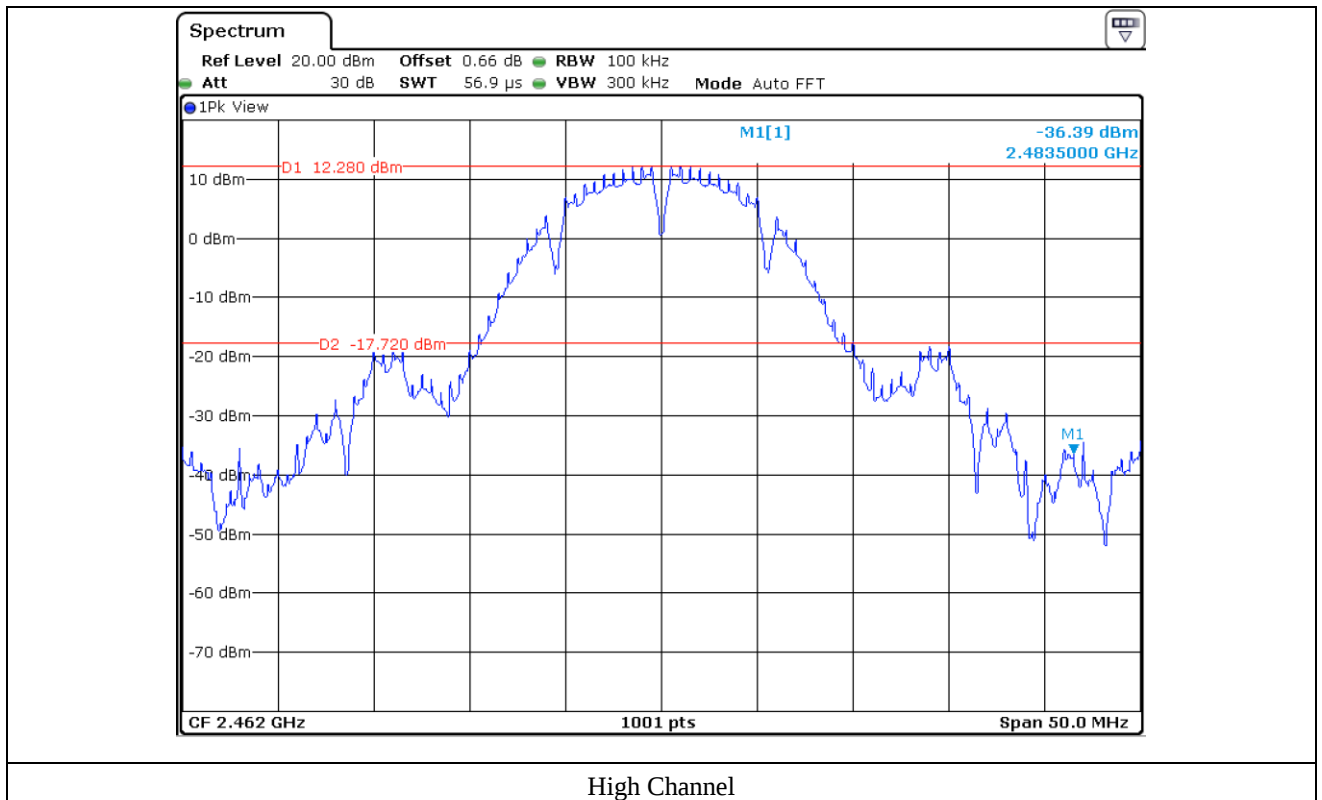


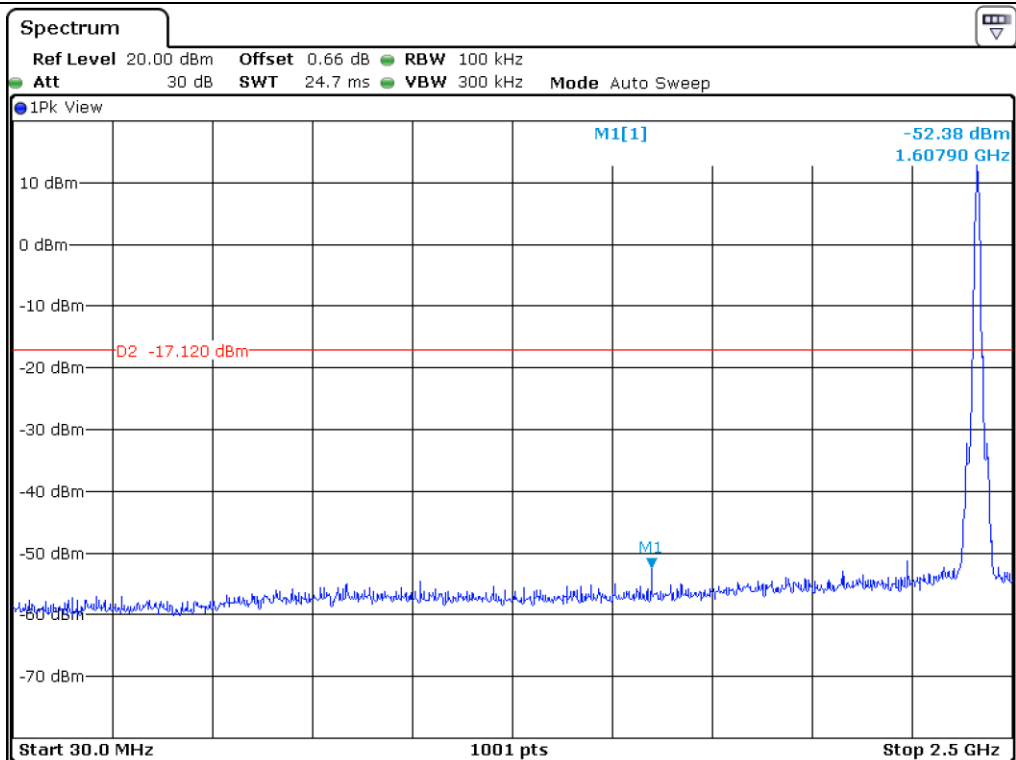


Low Channel

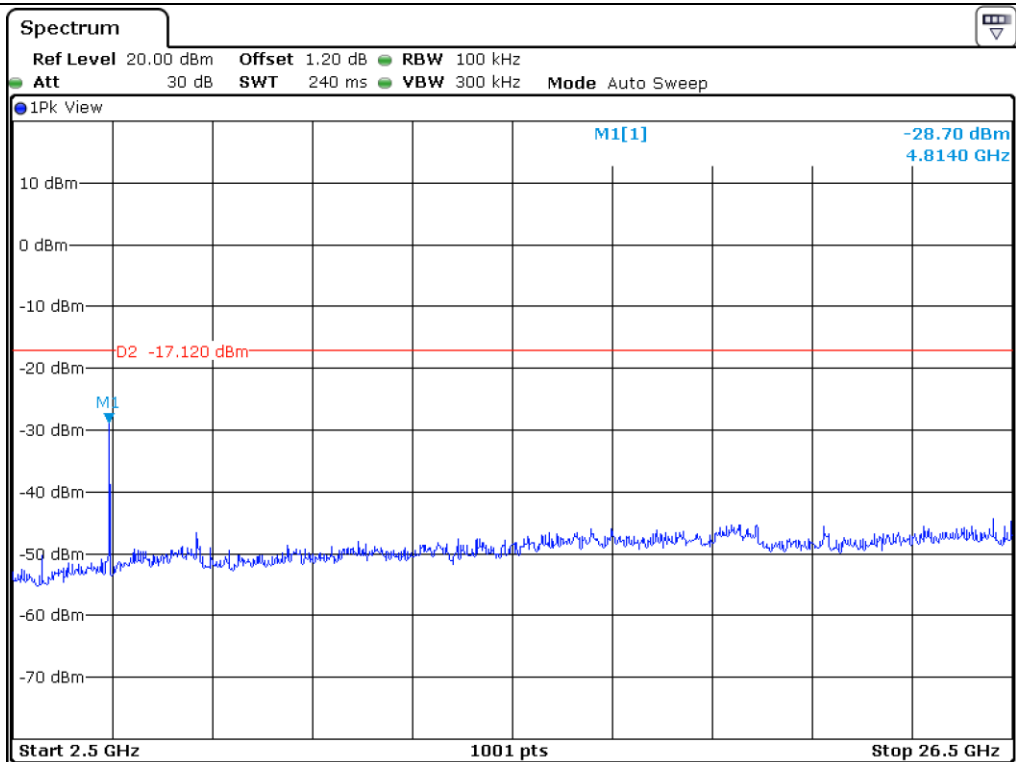


Low Channel

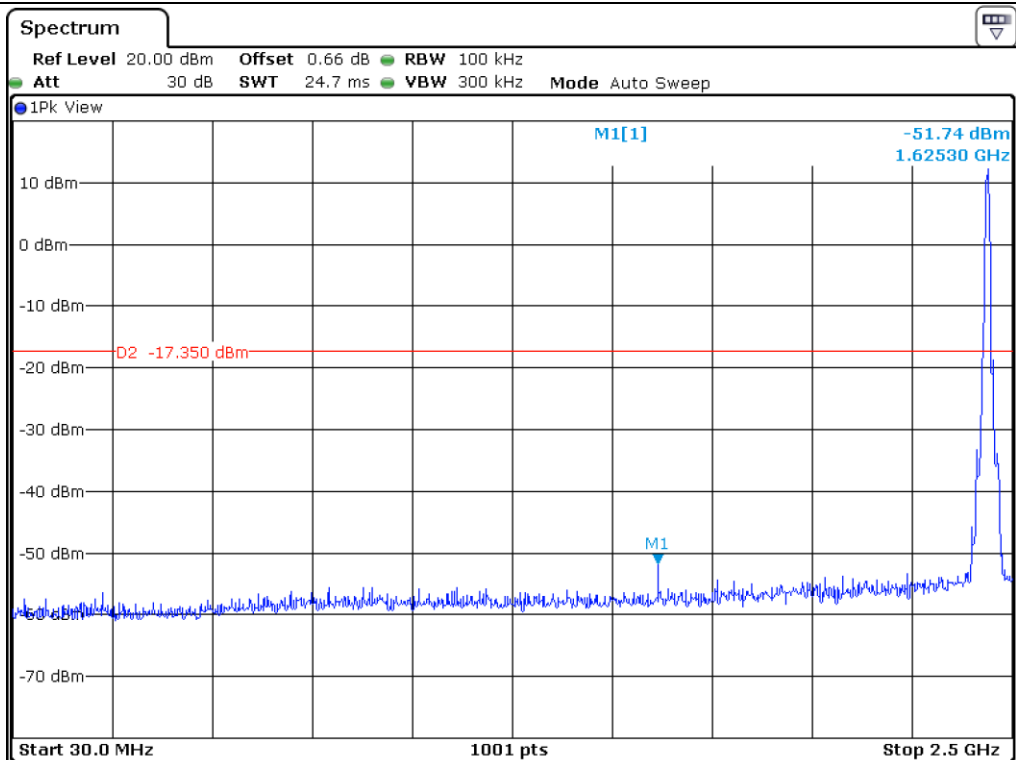


Middle Channel

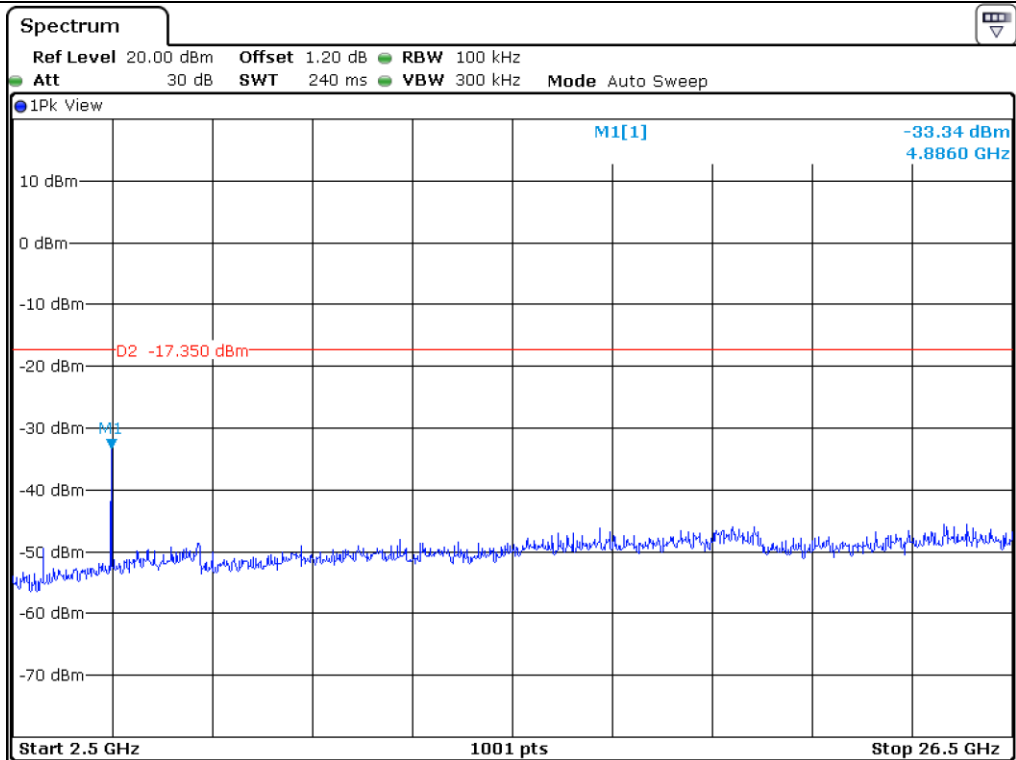

Middle Channel

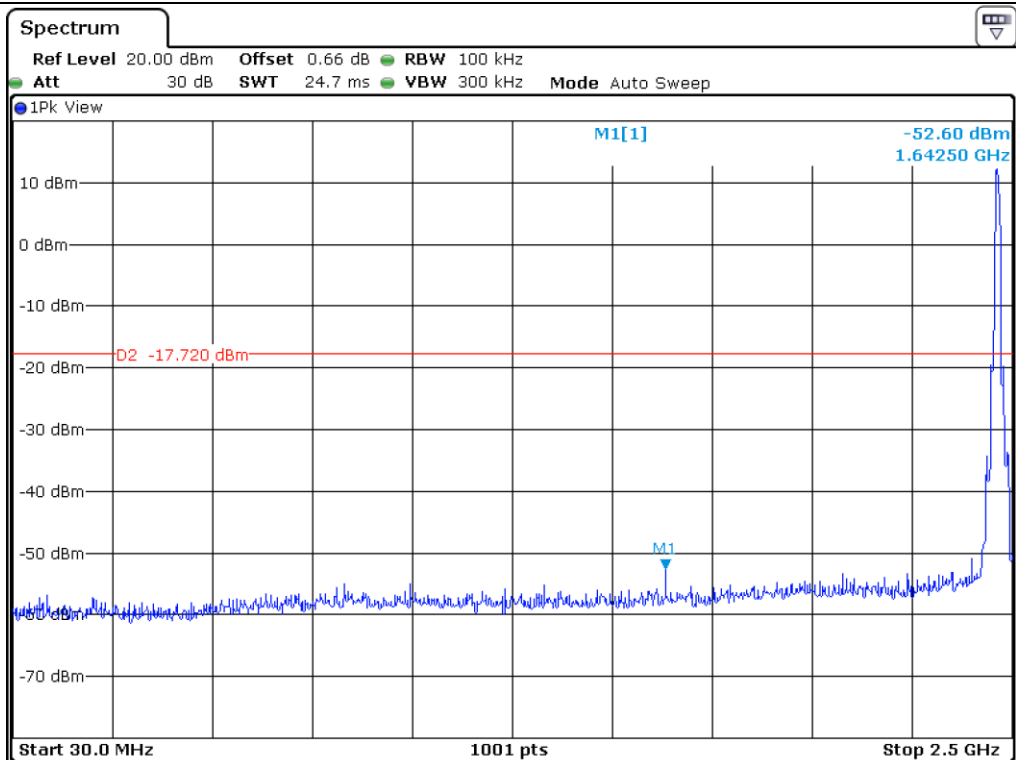


High Channel

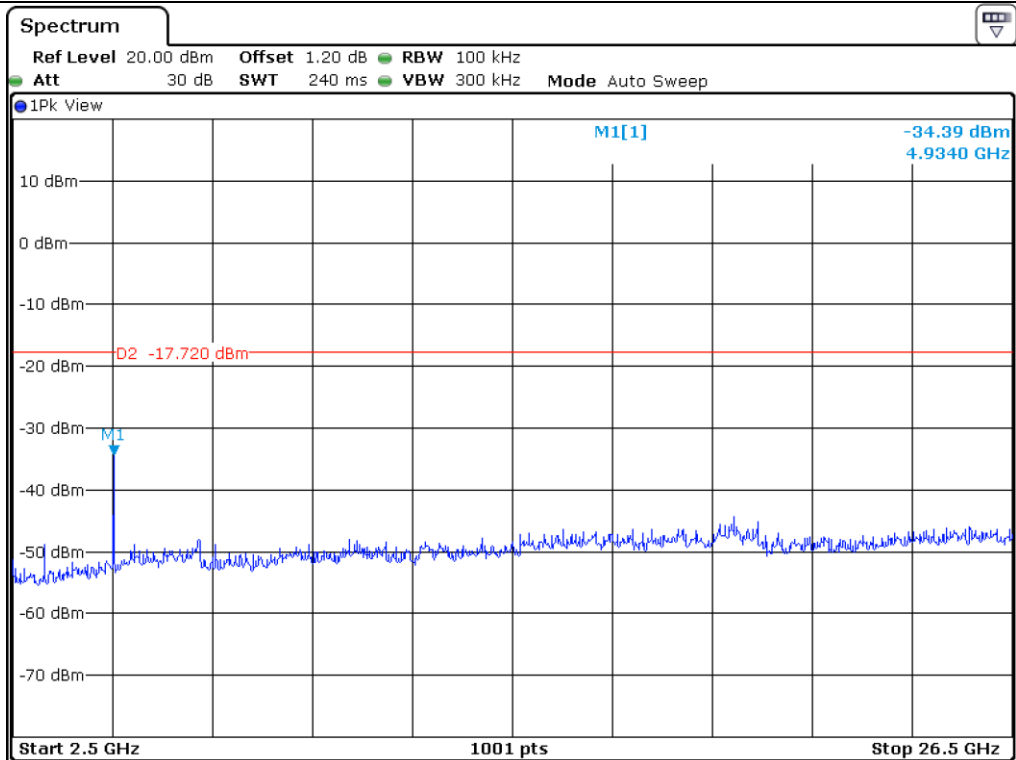


High Channel

9.5.2 Test data for 802.11g WLAN Mode


9.5.2.1 Test data for Antenna 0

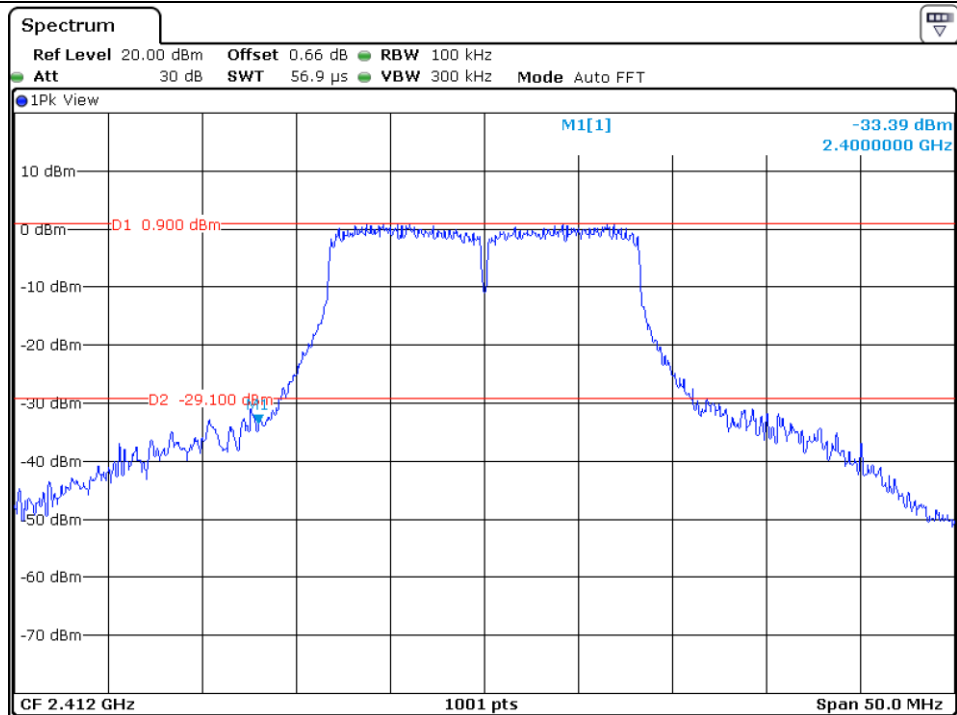


Low Channel

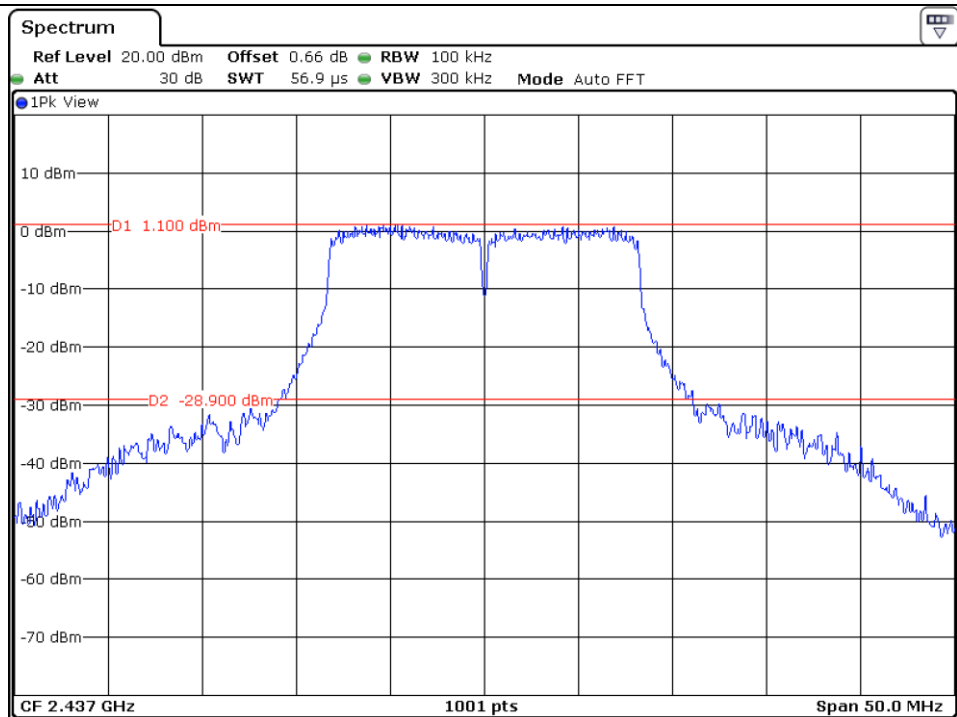


Middle Channel

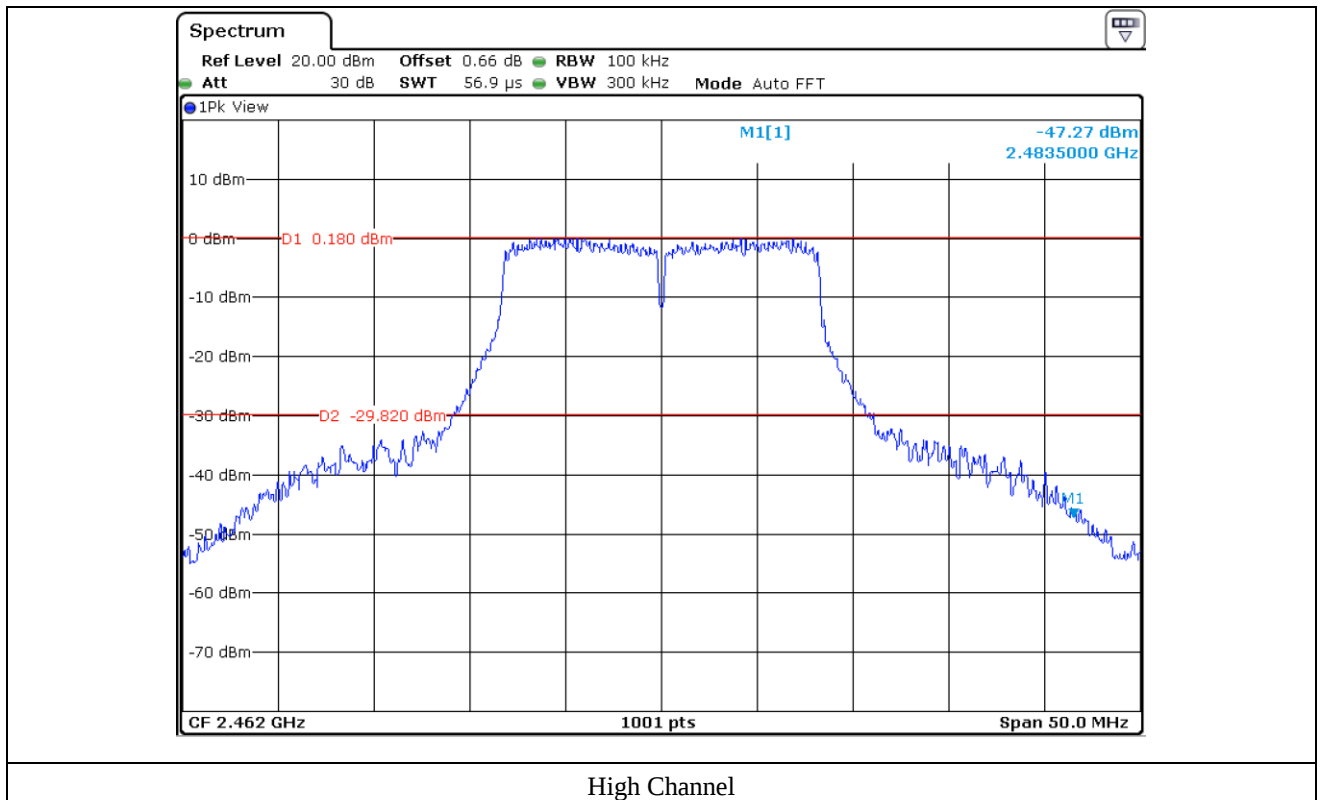


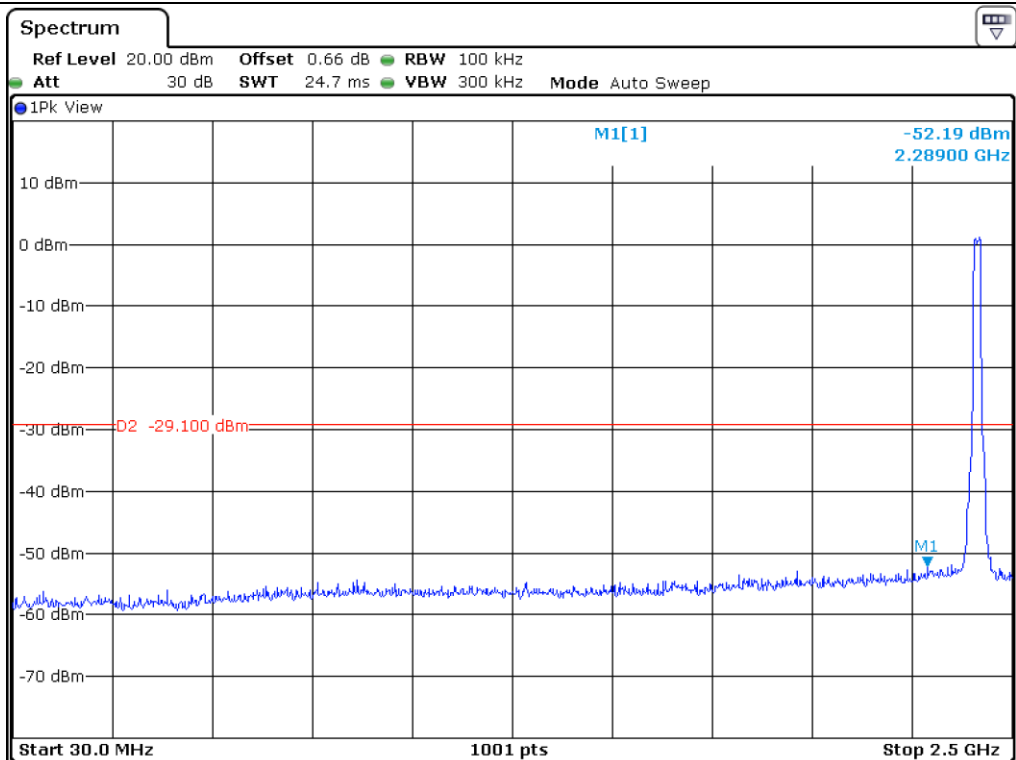


Low Channel

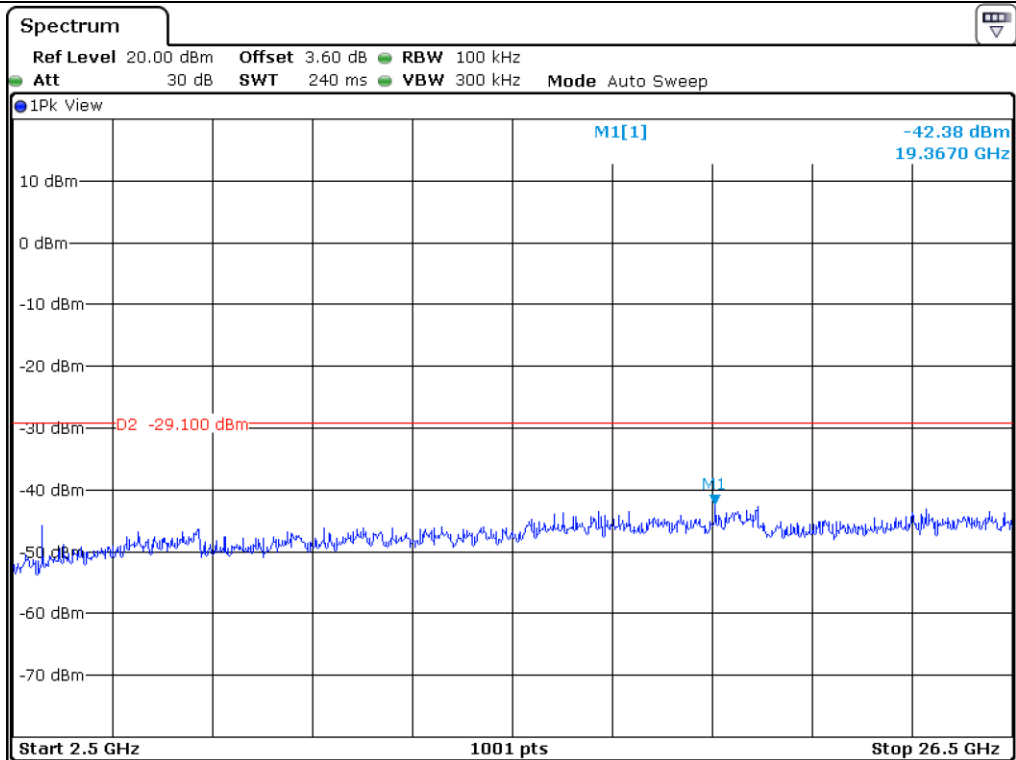


Low Channel

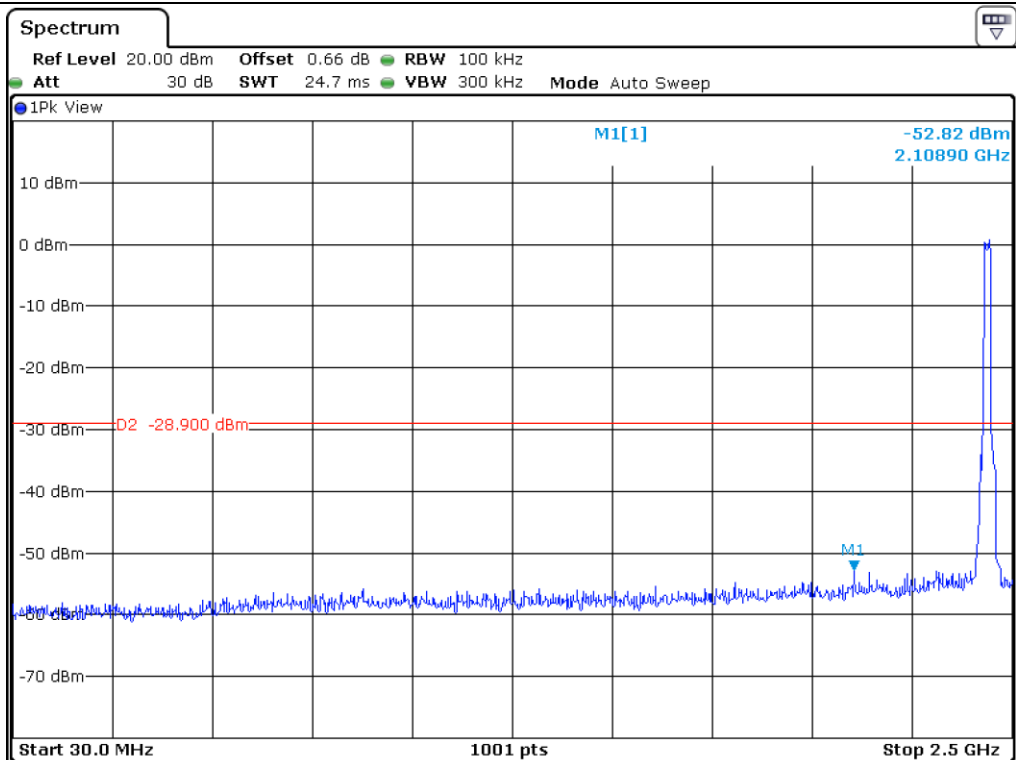


Middle Channel

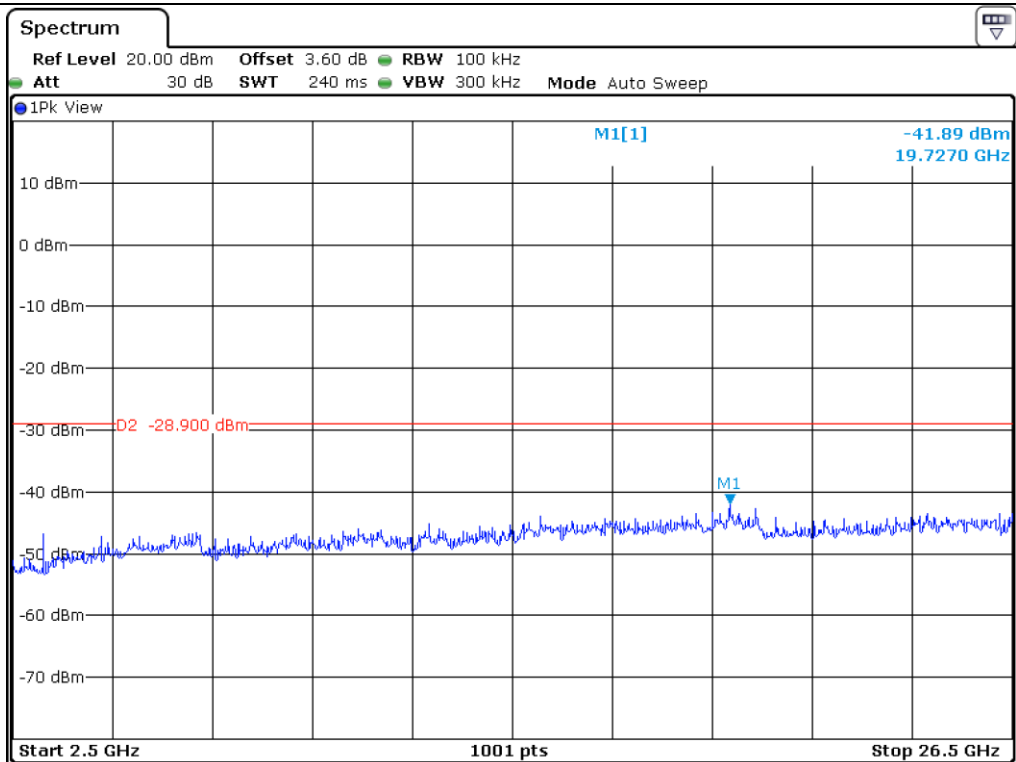

Middle Channel

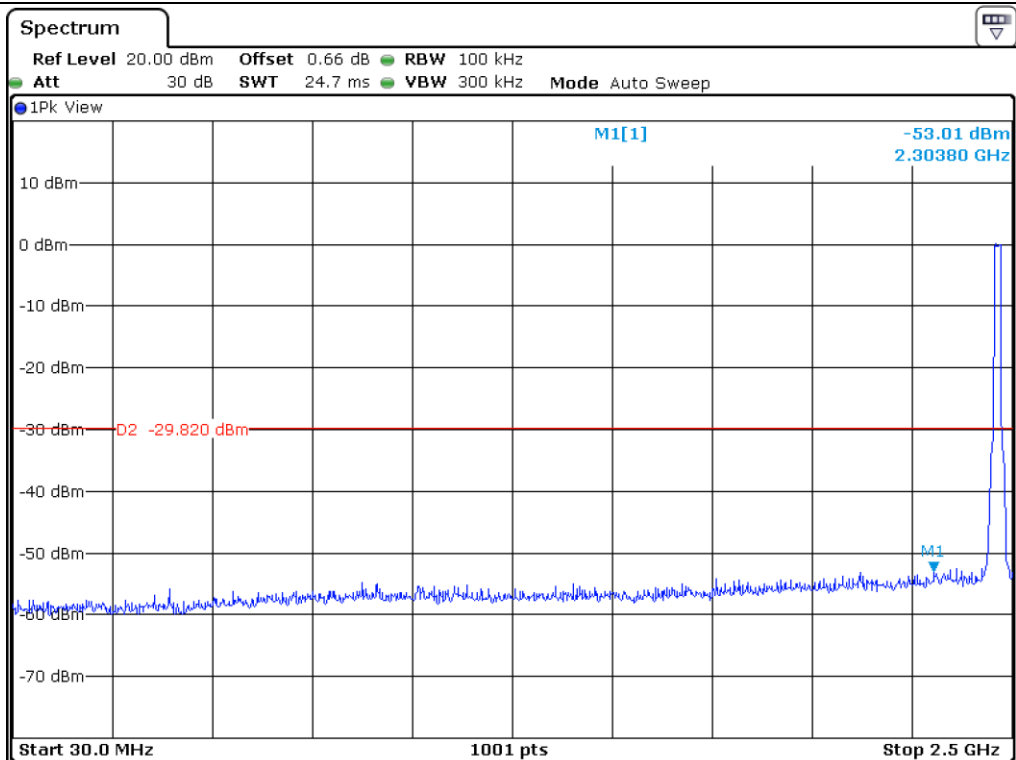


High Channel

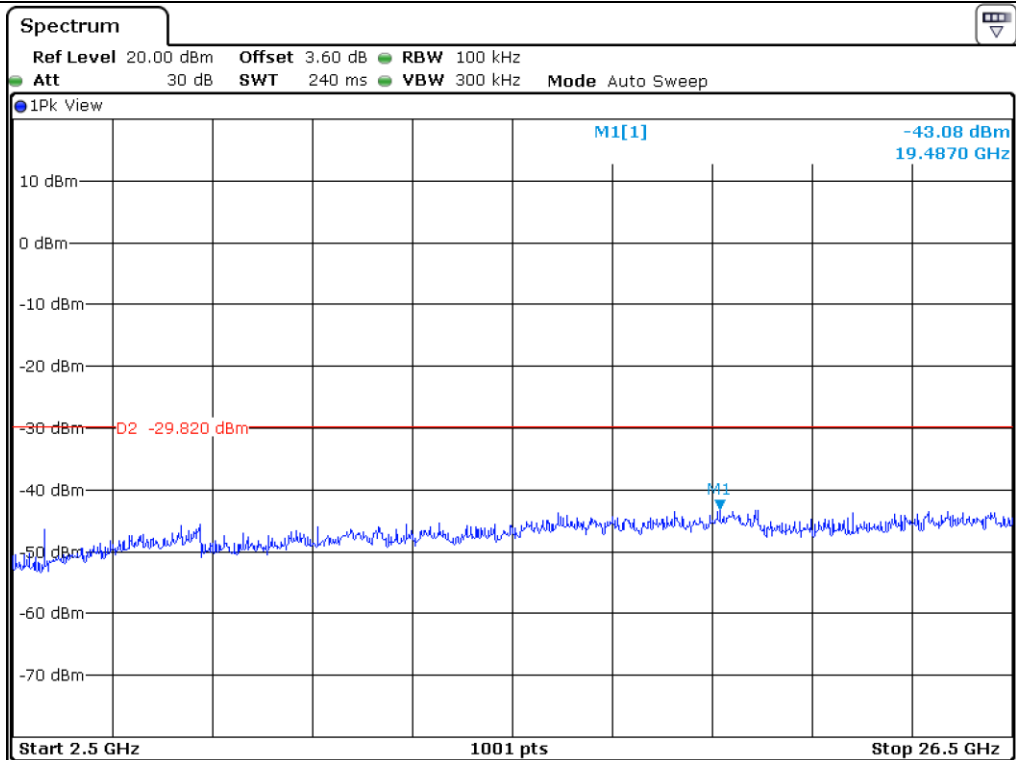


High Channel


9.5.2.2 Test data for Antenna 1

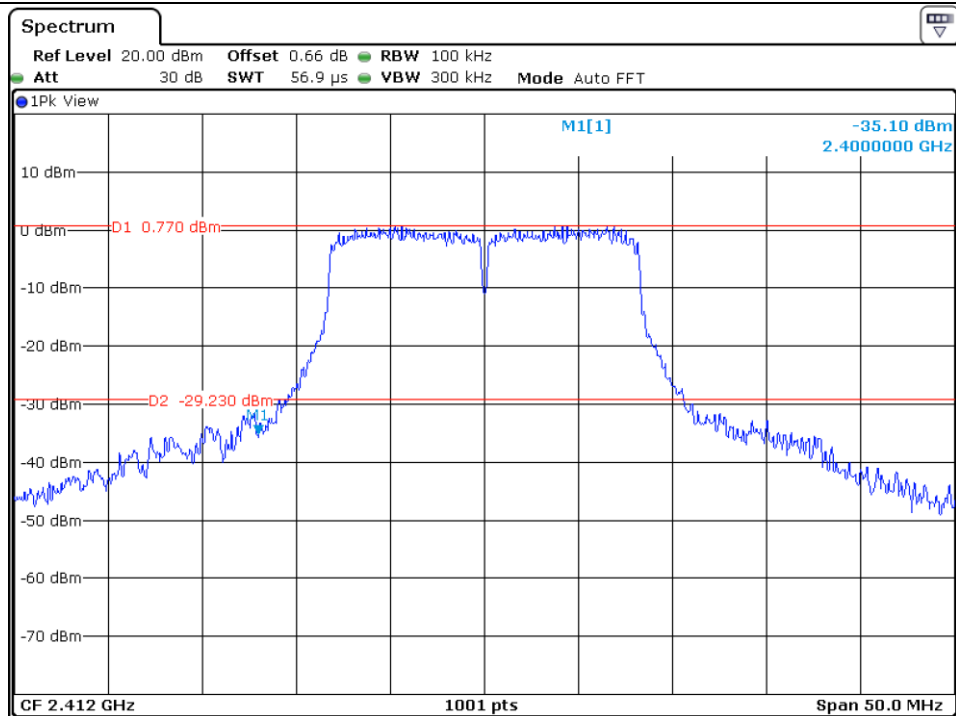


Low Channel

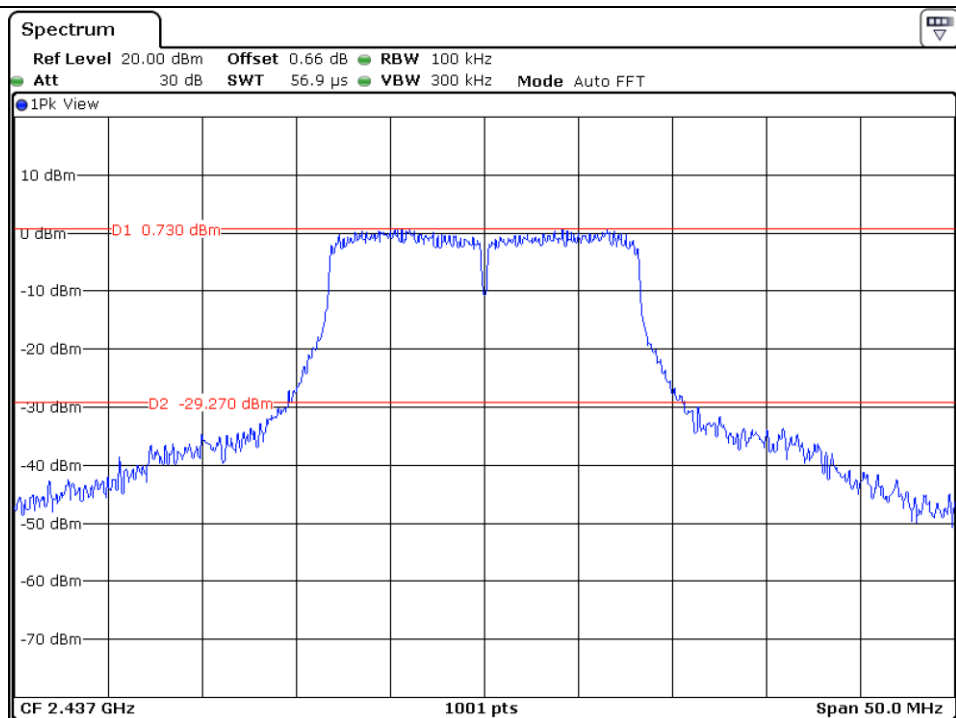


Middle Channel

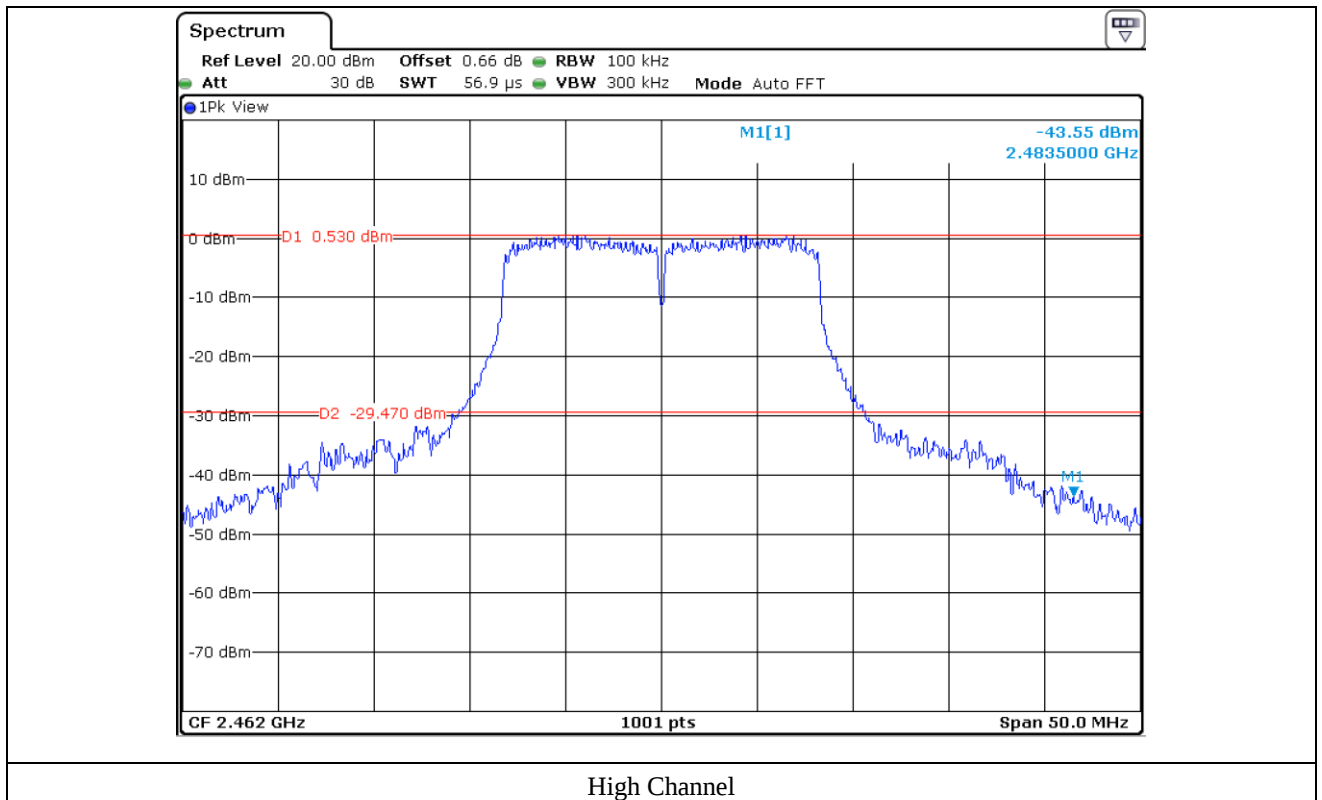


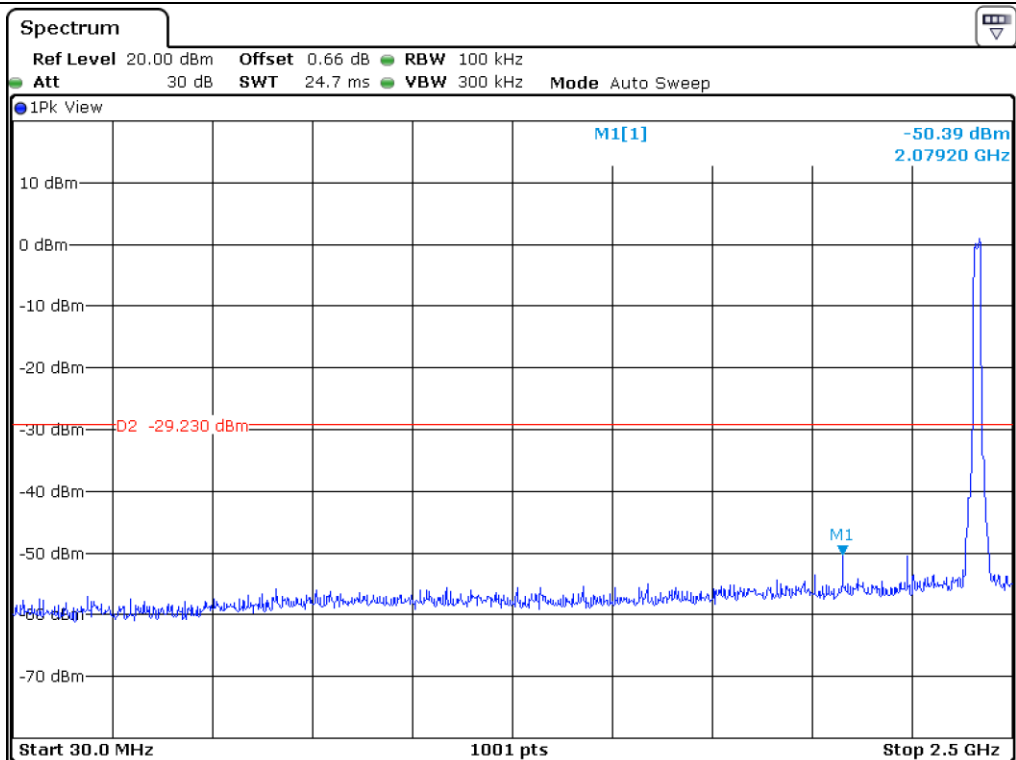


Low Channel

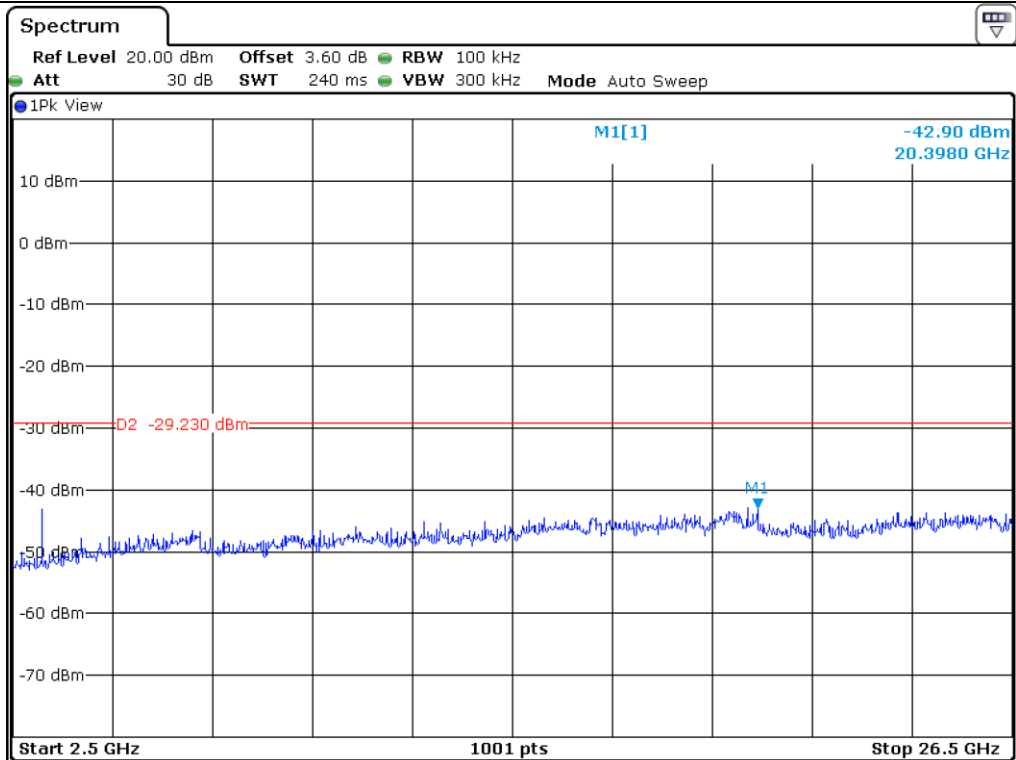


Low Channel

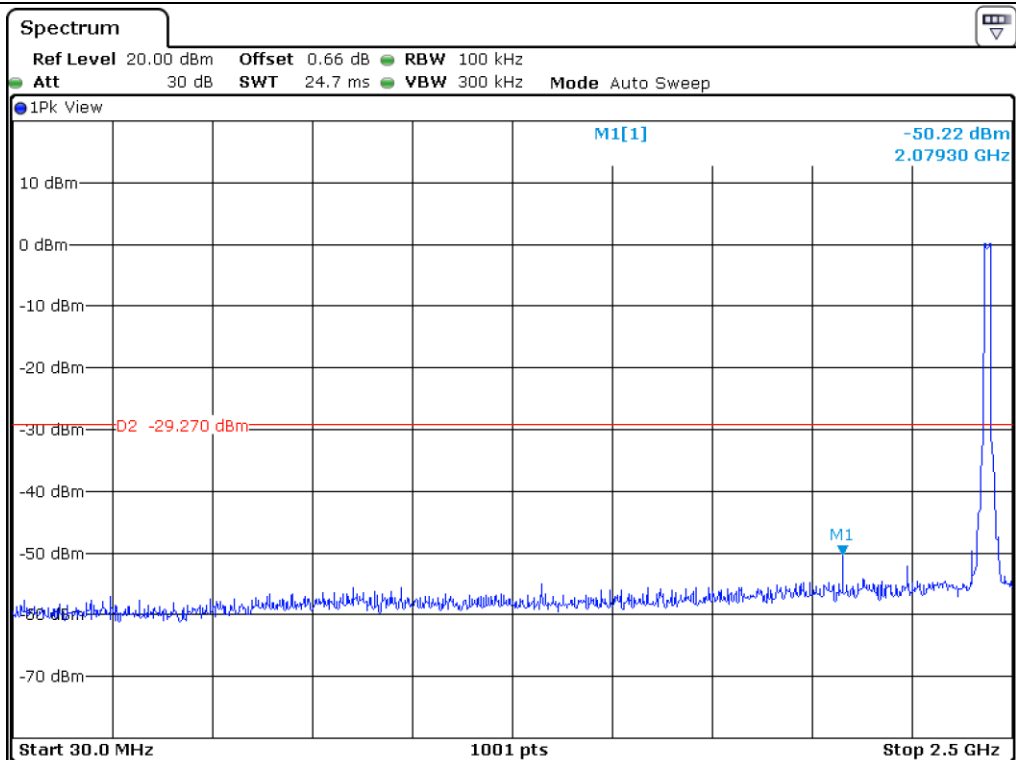


Middle Channel

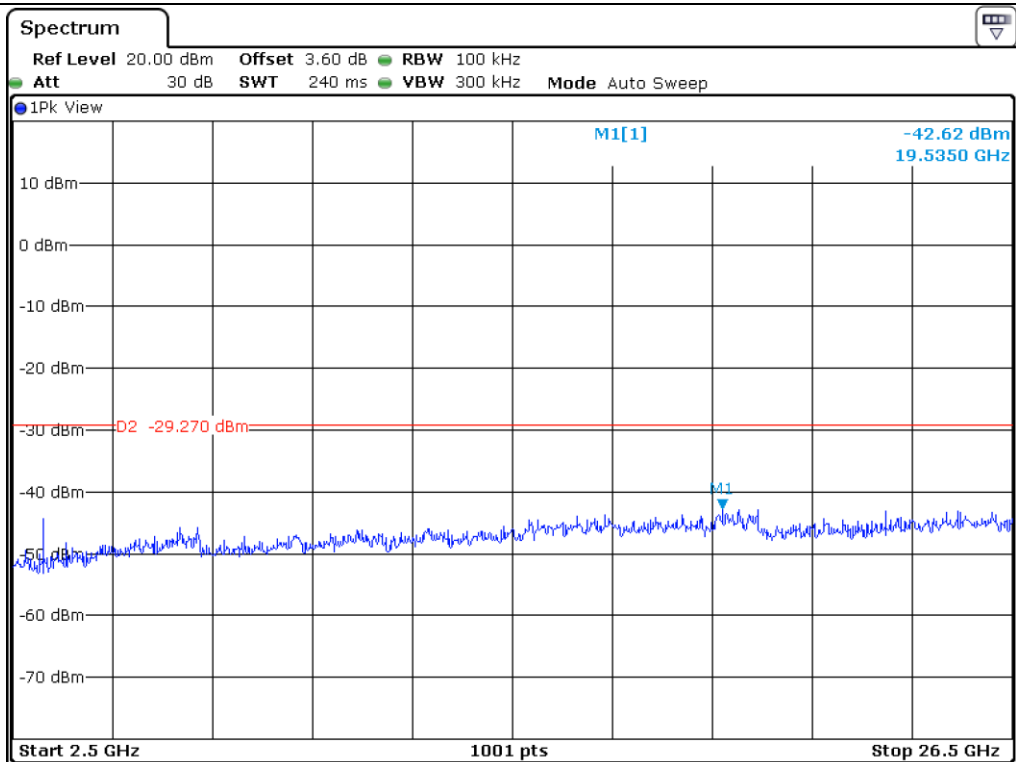

Middle Channel

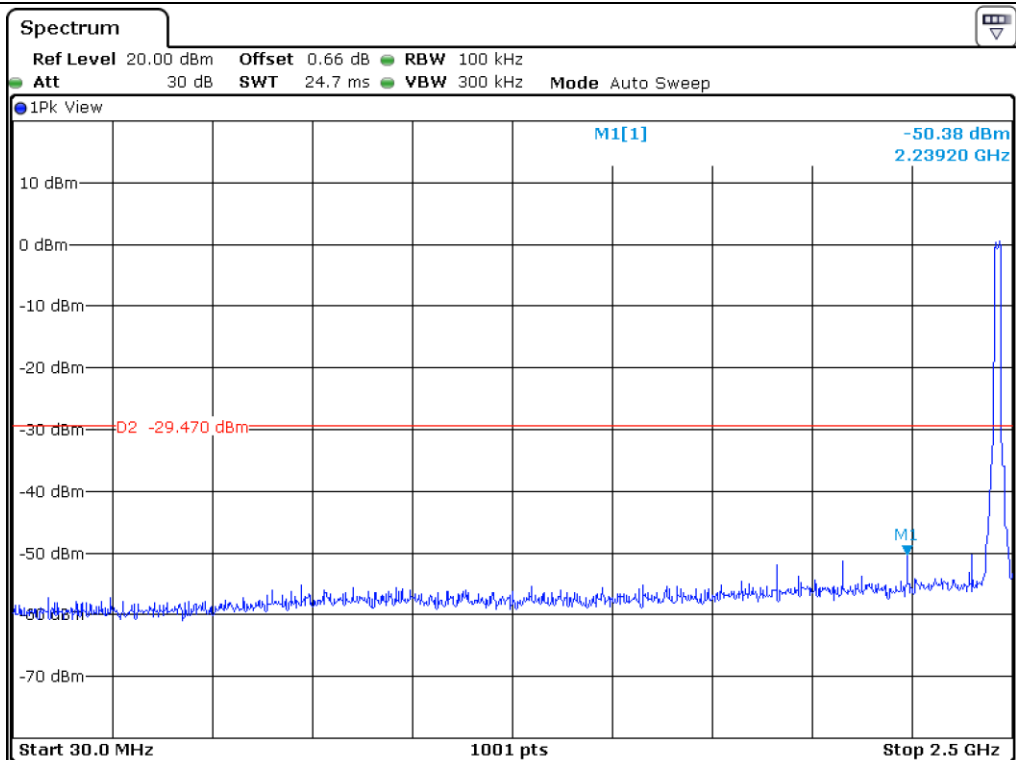

High Channel

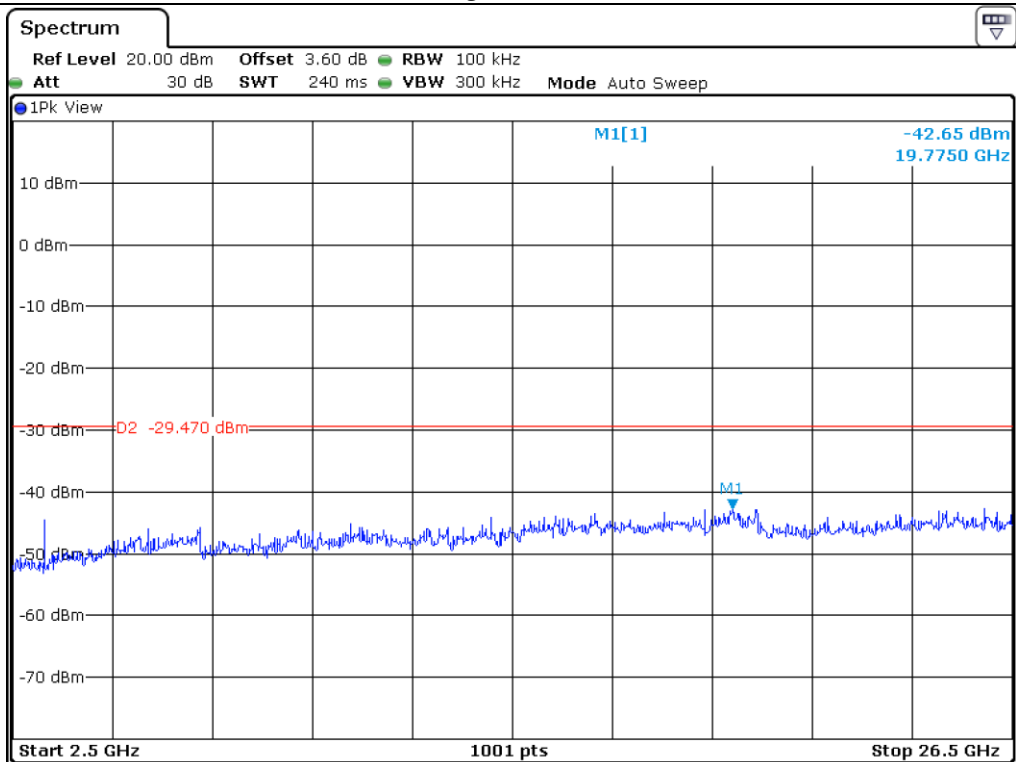

High Channel