

Report on the Testing of the Acuity Brands DTL DELC

In accordance with:
FCC 47 CFR part 15.247
ISED RSS-247 Issue 2, February 2017

Prepared for: Acuity Brands
1 Acuity Way
Decatur, Georgia 30035 USA



America

**Add value.
Inspire trust.**

COMMERCIAL-IN-CONFIDENCE

Document Number: AT72184157.1C0

SIGNATURE

A handwritten signature in black ink, appearing to read "A. Adusumilli".

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Divya Adusumilli	Senior Wireless Engineer TUV SUD America Inc.	Authorized Signatory	11/14/2022

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD America, Inc. document control rules.

FCC Accreditation Designation Number US1233
FCC Test Site Registration Number 967699
Innovation, Science, and Economic Development Canada Lab Code 23932

EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with the standards listed above.



A2LA Cert. No. 2955.09

DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD America with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD America. No part of this document may be reproduced without the prior written approval of TÜV SÜD America.
© TÜV SÜD.

ACCREDITATION

Our A2LA Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our A2LA Accreditation.

TÜV SÜD America
5945 Cabot Parkway, Suite 100
Alpharetta, GA 30005

Phone: 678-341-5900
www.tuv-sud-america.com

TÜV SÜD

TÜV®



Contents

1	Report Summary	3
1.1	Report Modification Record.....	3
1.2	Introduction.....	3
1.3	Brief Summary of Results	5
1.4	Product Information	6
1.5	Deviations from the Standard.....	9
1.6	EUT Modification Record	9
1.7	Test Location	10
2	Test Details	11
2.1	Antenna Requirement	11
2.2	Power Line Conducted Emissions	12
2.3	Fundamental Emission Output Power.....	15
2.4	6dB / 99% Bandwidth	18
2.5	Maximum Power Spectral Density in the Fundamental Emission	23
2.6	Band-Edge Compliance of RF Conducted Emissions	26
2.7	RF Conducted Spurious Emissions	28
2.8	Radiated Spurious Emissions into Restricted Frequency Bands.....	30
2.9	Test Equipment Used.....	40
3	Diagram of Test Set-ups.....	41
4	Accreditation, Disclaimers and Copyright.....	43



1 Report Summary

1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Table 1.1-1 – Modification Record

Issue	Description of Change	Date of Issue
0	First Issue	11/14/2022

1.2 Introduction

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations Section 15.247 and Innovation Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein.

Applicant	Mr. Albert Lu
Manufacturer	Acuity Brands
Applicant's Email Address	Albert.Lu@acuitybrands.com
Model Name	DTL DELC
Model Number	D4i LC
Serial Number	N/A
FCC ID	2ADCB-DELC
ISED Certification Number	6715C-DELC
Hardware Version(s)	REV4
Software Version(s)	C1677001_DELC_MANUF_0.0.220.s37
Number of Samples Tested	2
Test Specification/Issue/Date	US Code of Federal Regulation (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2021 ISED Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices, Issue 2, February 2017.
Order Number	72184157
Date of Receipt of EUT	10/12/2022
Start of Test	10/13/2022



Finish of Test	10/24/2022
Related Document(s)	<p>ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device.</p> <p>FCC OET KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, April 2, 2019</p> <p>US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2021.</p> <p>ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 5, Amendment 1 (March 2019), Amendment 2 (February 2021)</p>



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC Part 15.247 and ISED Canada's RSS-247 is shown below.

Table 1.3-1: Test Result Summary

Test Parameter	Test Plan (Yes/No)	Test Result	FCC 47 CFR Rule Part	ISED Canada's RSS	Test Report Page No
Antenna Requirement	Yes	Pass	15.203, 15.204	-----	11
6 dB Bandwidth	Yes	Pass	15.247(a)(2)	RSS-247 5.2(a)	18
99% Bandwidth	Yes	Pass	-----	RSS-GEN 6.7	18
Fundamental Emission Output Power	Yes	Pass	15.247(b)(3)	RSS-247 5.4(d)	15
Band-Edge Compliance of RF Conducted Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	26
RF Conducted Spurious Emissions	Yes	Pass	15.247(d)	RSS-247 5.5	28
Radiated Spurious Emissions into Restricted Frequency Bands	Yes	Pass	15.205, 15.209	RSS-GEN 8.9, 8.10	30
Power Spectral Density	Yes	Pass	15.247(e)	RSS-247 5.2(b)	23
AC Power Line Conducted Emissions	Yes	Pass	15.207	RSS-GEN 8.8	12



1.4 Product Information

1.4.1 Technical Description

EUT is used for wireless lightning control.

Table 1.4-1 – Wireless Technical Information

Detail	Description
FCC ID	2ADCB-DELC
IC ID	6715C-DELC
Transceiver Model Name / Numbers	DTL DELC / D4i, LC
Frequency Range (MHz)	2402 – 2480 MHz
Modulation Format	GFSK
Number of Channels	40
Maximum Rated Power	10 dBm
Data Rates	1 Mbps
Operating voltage	D4i: 12V to 22.5 V LC: 3.3V to 5.5 V
Antenna Type / Gain:	IFA/4.8dBi

A full description and detailed product specification details are available from the manufacturer.



Photo 1.4.1-1 – Front view of the EUT D4i Variant



Photo 1.4.1-2 – EUT with OSRAM 60W driver

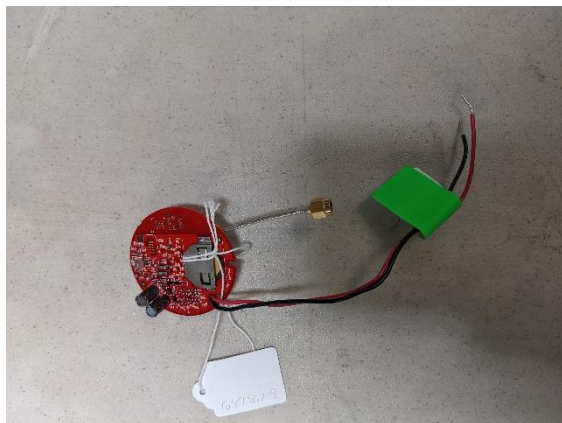


Photo 1.4.1-2 – Front view of the EUT LC Variant

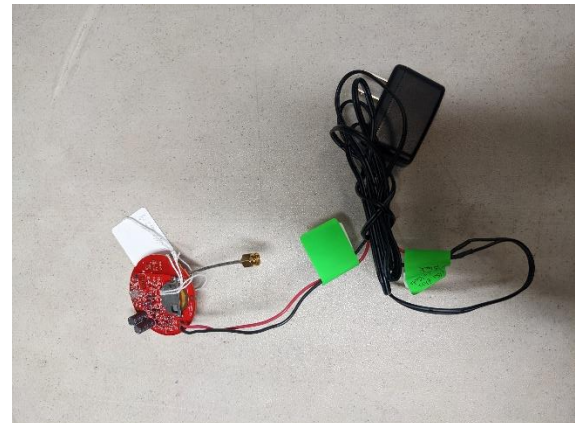


Photo 1.4.1-2 – EUT with 5W Wall wart

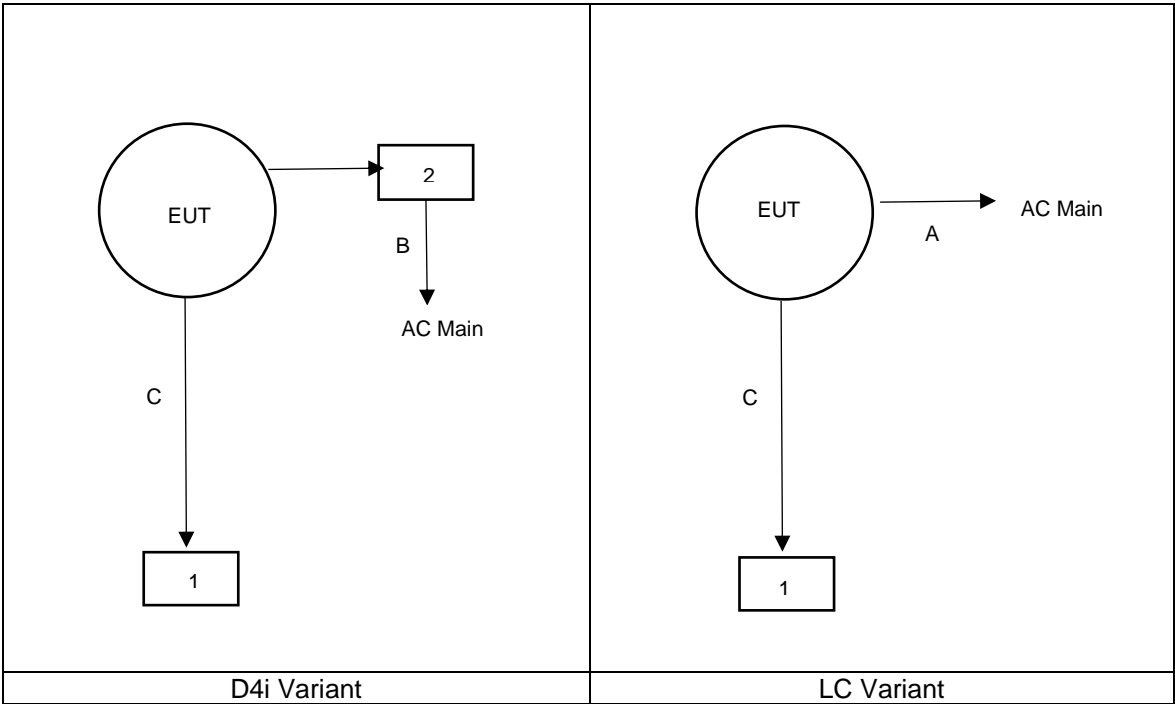


Figure 1.4.1-5 – Test Setup Block Diagram

Table 1.4.1-1 – Cable Descriptions

Item	Cable/Port	Description
A	Power supply cable for LC variant	1.5m wall wart power adapter cable
B	Power supply for D4i variant	2m power supply cable
C	FDTI USB programming cable	Programming cable

Table 1.4.1-2 – Support Equipment Descriptions

Item	Make/Model	Description
1	ThinkPad	Laptop for configuration
2	OSRAM	Optotronic 60W driver



1.4.2 Modes of Operation

Module provides 1 mode of operation using BLE classifications as outlined below.

Mode of Operation	Frequency Range (MHz)	Number of Channels	Stack / Mode	Data Rates Supported	Classification
1	2402 – 2480	40	GFSK	1 Mbps	BLE

1.4.3 Monitoring of Performance

Preliminary pre-scans (Radiated and Conducted Measurements) were performed on both D4i and LC variants. The test results represented in this report are for the worst case variant D4i.

For radiated emissions, the EUT was evaluated in worst orientations. See test setup photos for more information. The EUT was programmed to generate a continuously modulated signal on each channel evaluated.

For RF Conducted measurements, the EUT (standalone module) was connected to the test equipment with a temporary antenna port to SMA connector.

Power setting during test: 10 dBm

1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

1.6 EUT Modification Record

The table below details modifications made to the EUT during the test program. The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	Initial State		
1	First stage	Connected Fair-rite to D4i variant in between AC main and OSRAM driver for radiated emission testing. Two 043116428 Fair-rites were used	

The equipment was tested as provided without any modifications.



Figure 1.6-1: EUT setup pic with Fair-rite beads.

1.7 Test Location

TÜV SÜD conducted the following tests at our Alpharetta, GA test laboratory.

Test Name	Name of Engineer(s)	Accreditation
Antenna Requirement	Divya Adusumilli	A2LA
AC Power Line Conducted Emissions	Divya Adusumilli	A2LA
Fundamental Emission Output Power	Divya Adusumilli	A2LA
6dB / 99% Bandwidth	Divya Adusumilli	A2LA
Band-Edge Compliance of RF Conducted Emissions	Divya Adusumilli	A2LA
RF Conducted Spurious Emissions	Divya Adusumilli	A2LA
Radiated Spurious Emissions into Restricted Frequency Bands	Bhagyashree Chaudhary	A2LA
Power Spectral Density	Divya Adusumilli	A2LA

Office address:
TÜV SÜD America
5945 Cabot Parkway, Suite 100
Alpharetta, GA 30005, USA



2 Test Details

2.1 Antenna Requirement

2.1.1 Specification Reference

FCC Section: 15.203, 15.204

2.1.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “1”, as noted in §1.6.

2.1.3 Date of Test

10/13/2022

2.1.4 Test Method

N/A

2.1.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.1.6 Test Results

The EUT utilizes the inverted-F antenna with gain of 4.8 dBi which is internal to the enclosure and affixed to the PCB, therefore satisfying the requirements of Section 15.203.



2.2 Power Line Conducted Emissions

2.2.1 Specification Reference

FCC Section: 15.207
ISED Canada: RSS-Gen 8.8

2.2.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “1”, as noted in §1.6.

2.2.3 Date of Test

10/25/2022

2.2.4 Test Method

ANSI C63.10 section 6 was the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss
Margin = Corrected Reading - Applicable Limit

2.2.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar



2.2.6 Test Results

TUV SUD America

Conducted RF Emissions, 150 kHz to 30 MHz

Line Under Test Number 1 Results

EUT Name - 72184157 Acuity


Model Number - D4i variant

Part Number - N/A

Serial Number - N/A

Voltage - FCC/IC Class B: 120Vac/60Hz

Operating Mode - Eut On; TX on LCH

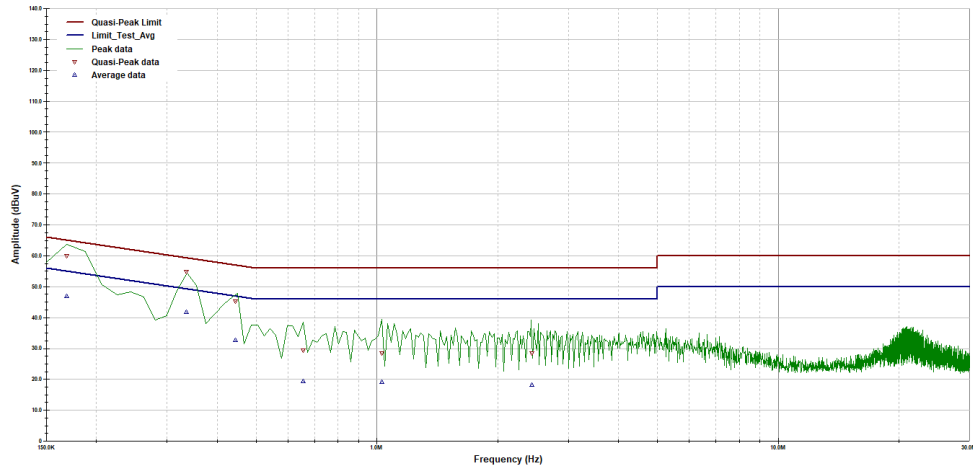

Operator: Divya

AC Mains Class B.11

Last Data Update 10:09:43 AM, Tuesday, October 25, 2022

Temperature = 23C

Relative Humidity = 40%

RF Bandwidth: 9kHz

VBW if Analyzer: 30kHz

Figure 2.2.6-1 – Graphical Results – AC Mains L1 Plot

Table 2.2.6-1 – Conducted Emissions Results on the AC Power Port (L1)

Frequency (MHz)	Avg Limit	Avg Level Corr	Avg Level	Corr Fact.	Avg Margin	Result
0.17	55.5	46.9	37.2	9.68	-8.6	PASS
0.33	50.7	41.7	32.1	9.658	-9	PASS
0.44	47.6	32.6	23	9.653	-15	PASS
0.66	46	19.5	9.8	9.659	-26.5	PASS
1.03	46	19.1	9.4	9.682	-26.9	PASS
2.43	46	18.1	8.4	9.787	-27.9	PASS

Frequency (MHz)	QP Limit	QP Level Corr	QP Level	Corr Fact.	QP Margin	Result
0.17	65.5	60	50.3	9.68	-5.5	PASS
0.33	60.7	54.8	45.1	9.658	-6	PASS
0.44	57.6	45.2	35.5	9.653	-12.4	PASS
0.66	56	29.3	19.7	9.659	-26.7	PASS
1.03	56	28.4	18.7	9.682	-27.6	PASS
2.43	56	28.4	18.6	9.787	-27.6	PASS



TUV SUD America

Conducted RF Emissions, 150 kHz to 30 MHz

Line Under Test Number 2 Results

EUT Name - 72184157 Acuity


Model Number - D4i variant

Part Number - N/A

Serial Number - N/A

Voltage - FCC/IC Class B; 120Vac/60Hz

Operating Mode - Eut On; TX on LCH

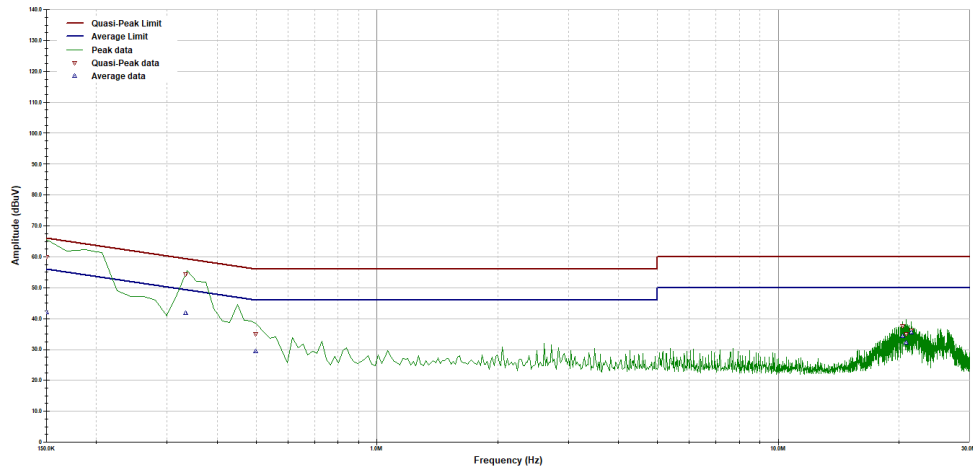

Operator: Divya

AC Mains Class B.11

Last Data Update 10:20:37 AM, Tuesday, October 25, 2022

Temperature - 23C

Relative Humidity - 40%

RF Bandwidth: 9kHz

VBW if Analyzer: 30kHz

Figure 2.2.6-2 – Graphical Results – AC Mains N Plot

Table 2.2.6-2 – Conducted Emissions Results on the AC Power Port (N)

Frequency (MHz)	Avg Limit	Avg Level Corr	Avg Level	Corr Fact.	Avg Margin	Result
0.15	56	42	32.3	9.675	-14	PASS
0.33	50.7	41.7	32.1	9.655	-9	PASS
0.5	46.1	29.5	19.8	9.63	-16.6	PASS
20.43	50	34.3	24.2	10.06	-15.7	PASS
20.82	50	32.2	22.1	10.06	-17.8	PASS
21.48	50	35.3	25.3	10.075	-14.7	PASS

Frequency (MHz)	QP Limit	QP Level Corr	QP Level	Corr Fact.	QP Margin	Result
0.15	66	60.1	50.4	9.675	-5.9	PASS
0.33	60.7	54.3	44.6	9.655	-6.5	PASS
0.5	56.1	34.9	25.3	9.63	-21.1	PASS
20.43	60	37.6	27.5	10.06	-22.4	PASS
20.82	60	34.9	24.9	10.06	-25.1	PASS
21.48	60	36.2	26.2	10.075	-23.8	PASS



2.3 Fundamental Emission Output Power

2.3.1 Specification Reference

FCC Sections: 15.247(b)(3)
ISED Canada: RSS-247 5.4(d)

2.3.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.3.3 Date of Test

10/17/2022

2.3.4 Test Method

The maximum peak conducted output power was measured in accordance with ANSI C63.10 Subclause 11.9.1.1 utilizing the RBW \geq DTS Bandwidth method. The RF output of the equipment under test was directly connected to the input of the analyzer applying suitable attenuation.

2.3.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.3.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.



Table 2.3.6-1: RF Output Power

Frequency [MHz]	Peak Output Power (dBm)	Data Rate
2402	9.1	1 Mbps
2440	9.3	1 Mbps
2480	9.6	1 Mbps

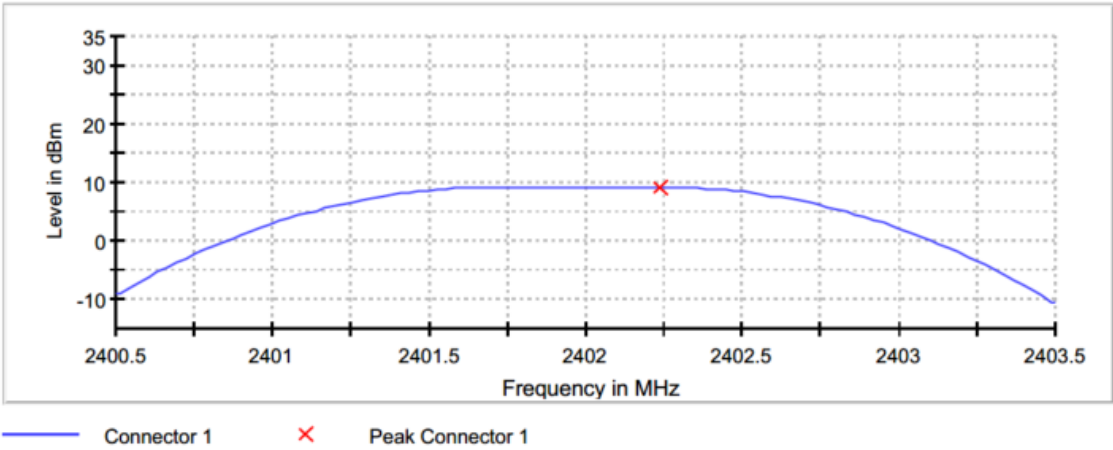


Figure 2.3.6-1: Output Power - LCH

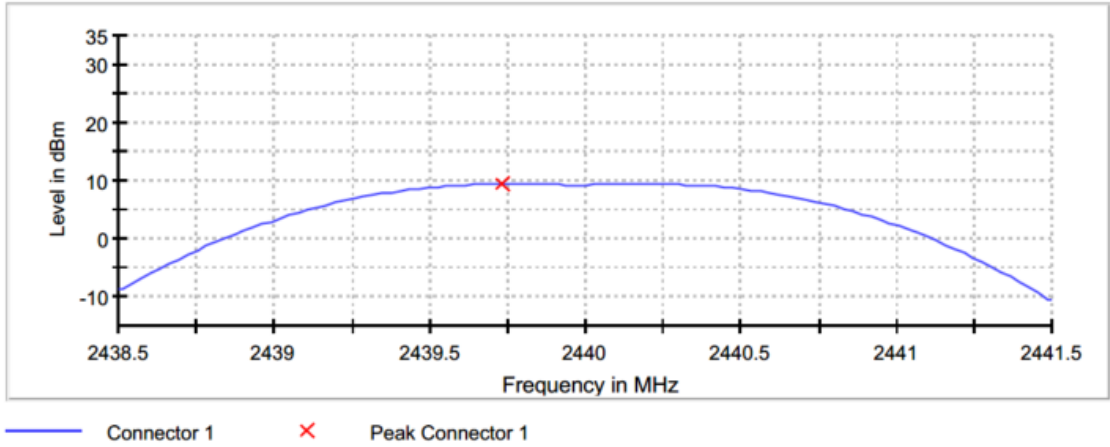


Figure 2.3.6-2: Output Power - MCH

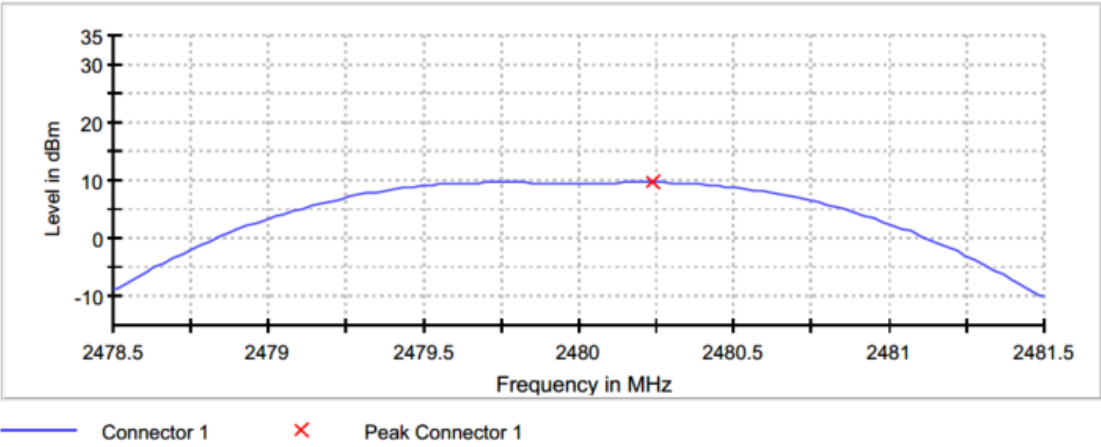


Figure 2.3.6-3: Output Power - HCH

Table 2.3.6.1-1: Sample Measurement Settings

Setting	Instrument Value	Target Value
Start Frequency	2.40050 GHz	2.40050 GHz
Stop Frequency	2.40350 GHz	2.40350 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 712.873 kHz
VBW	3.000 MHz	>= 3.000 MHz
Sweep Points	101	~ 101
Sweep time	1.907 us	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	Max Peak	Max Peak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	AUTO
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.01 dB	0.50 dB



2.4 6dB / 99% Bandwidth

2.4.1 Specification Reference

FCC Sections: 15.247(a)(2)
ISED Canada: RSS-247 5.2(a), RSS-GEN 6.7

2.4.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.4.3 Date of Test

10/17/2022

2.4.4 Test Method

The 6dB bandwidth was measured in accordance with the ANSI C63.10 Section 11.8. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.

2.4.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.4.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.



Table 2.4.6-1: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth (kHz)	99% Bandwidth (MHz)	Data Rate
2402	712.872	1.040	1 Mbps
2440	732.674	1.040	1 Mbps
s2480	712.872	1.040	1 Mbps

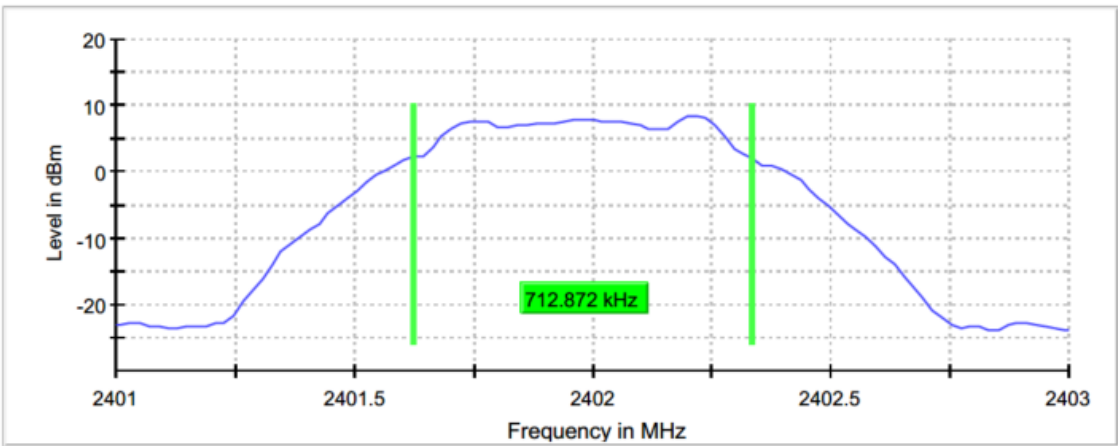


Figure 2.4.6-1: 6 dB BW - LCH

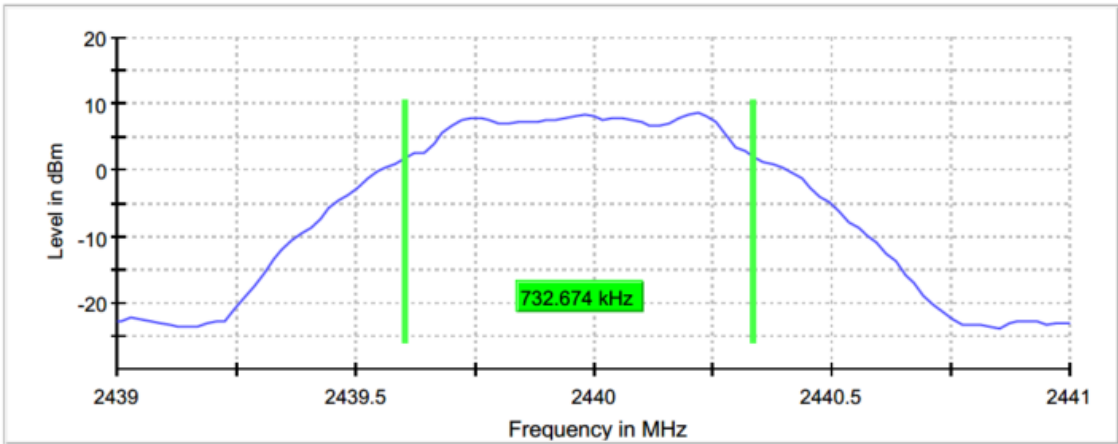


Figure 2.4.6-2: 6 dB BW - MCH

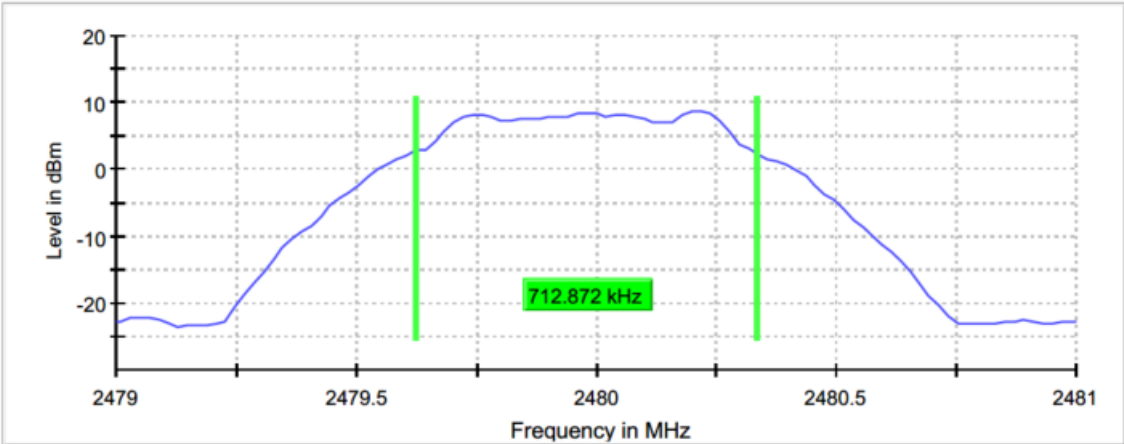


Figure 2.4.6-3: 6 dB BW - HCH

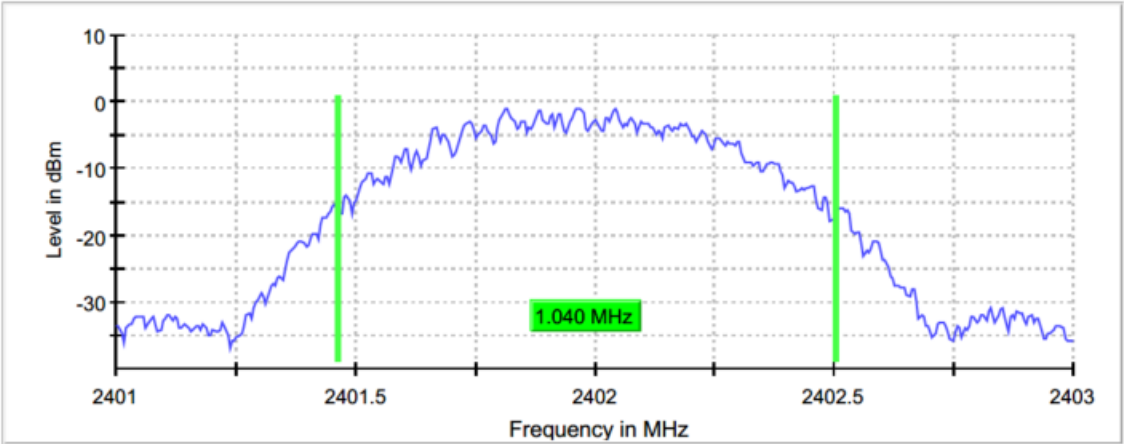


Figure 2.4.6-4: 99% BW - LCH

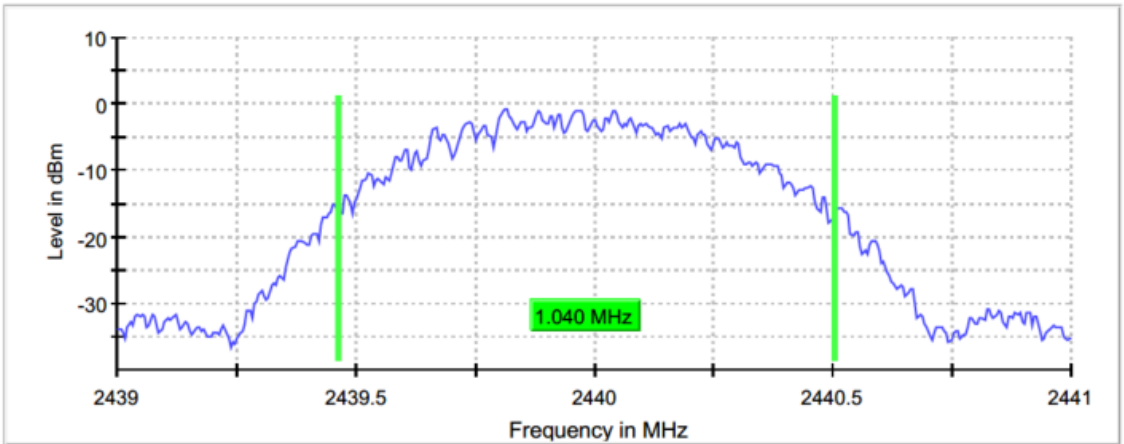


Figure 2.4.6-5: 99% BW - MCH

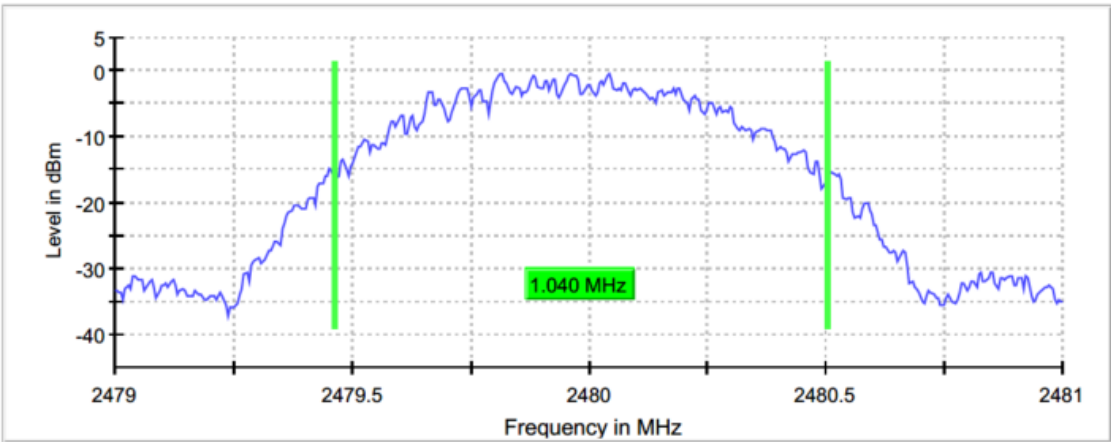


Figure 2.4.6-6: 99% BW - HCH

Table 2.4.6.1-1: Sample Measurement Setting (6dB BW)

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
Sweep Points	101	~ 80
Sweep time	18.938 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	Max Peak	Max Peak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	AUTO
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB

**Table 2.4.6.1-2: Sample Measurement Setting (99% BW)**

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	≥ 10.000 kHz
VBW	30.000 kHz	≥ 30.000 kHz
Sweep Points	400	~ 400
Sweep time	189.648 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	Max Peak	Max Peak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	FFT	AUTO
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.30 dB



2.5 Maximum Power Spectral Density in the Fundamental Emission

2.5.1 Specification Reference

FCC Sections: 15.247(e)
ISED Canada: RSS-247 5.2(b)

2.5.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.5.3 Date of Test

10/17/2022

2.5.4 Test Method

The power spectral density was measured in accordance with the ANSI C63.10 Section 11.10.2. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 10 kHz. The Video Bandwidth (VBW) was set to 30 kHz. Span was set to 1.5 times the channel bandwidth. The trace was set to max hold with the peak detector active.

2.5.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.5.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.



Table 2.5.6-1: RF Power Spectral Density

Frequency [MHz]	PSD (dBm)	Data Rate
2402	-0.819	1 Mbps
2440	-0.597	1 Mbps
2480	-0.325	1 Mbps

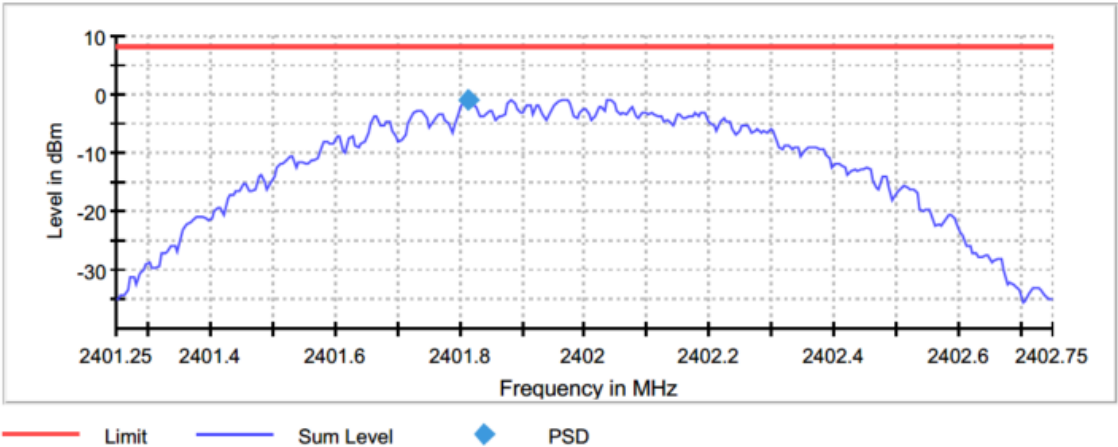


Figure 2.5.6-1: PSD – LCH

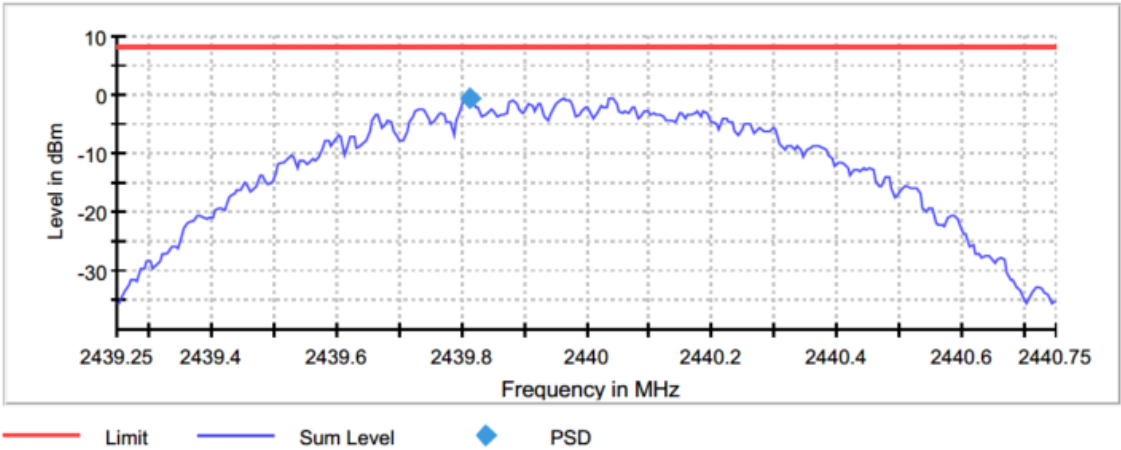


Figure 2.5.6-2: PSD – MCH

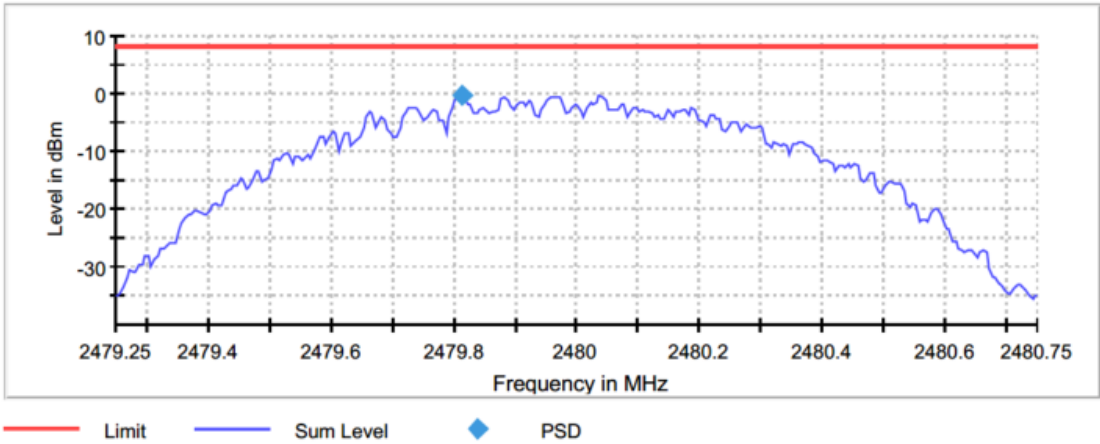


Figure 2.5.6-3: PSD – HCH

Table 2.5.6-1: Sample Measurement Settings (PSD)

Setting	Instrument Value	Target Value
Start Frequency	2.40125 GHz	2.40125 GHz
Stop Frequency	2.40275 GHz	2.40275 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
Sweep Points	300	~ 300
Sweep time	1.500 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
Sweep Count	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweep type	Sweep	Sweep
Preamp	off	off
Stable mode	Trace	Trace
Stable value	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.05 dB	0.50 dB



2.6 Band-Edge Compliance of RF Conducted Emissions

2.6.1 Specification Reference

FCC Sections: 15.247(d)
ISED Canada: RSS-247 5.5

2.6.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.6.3 Date of Test

10/17/2022

2.6.4 Test Method

The unwanted emissions into non-restricted bands were measured conducted in accordance with ANSI C63.10 Section 11.11. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 300 kHz. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit at the band edges.

2.6.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.6.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.

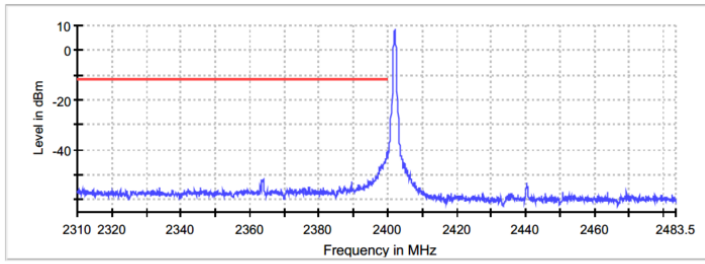


Figure 2.6.6-1: Lower Band-edge

Table 2.6.6-1: Lower Band-edge- Low Channel

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.825000	-40.8	29.2	-11.6	PASS
2399.775000	-41.1	29.5	-11.6	PASS
2399.875000	-41.1	29.5	-11.6	PASS
2399.675000	-41.4	29.8	-11.6	PASS
2399.725000	-41.6	30.0	-11.6	PASS
2399.925000	-41.6	30.0	-11.6	PASS
2399.975000	-41.7	30.1	-11.6	PASS
2399.625000	-41.8	30.2	-11.6	PASS
2399.575000	-42.8	31.2	-11.6	PASS
2399.525000	-43.0	31.4	-11.6	PASS
2399.475000	-43.3	31.7	-11.6	PASS
2399.375000	-43.4	31.8	-11.6	PASS
2399.325000	-43.8	32.2	-11.6	PASS
2399.425000	-44.2	32.6	-11.6	PASS
2399.275000	-44.5	32.9	-11.6	PASS

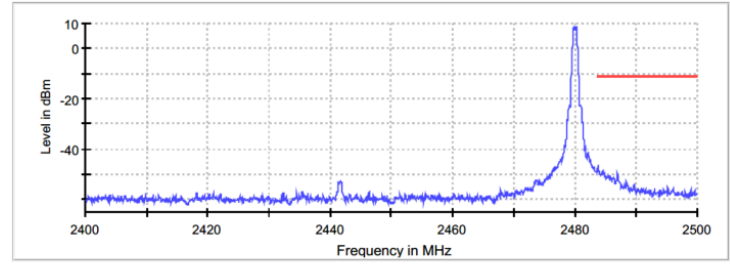


Figure 2.6.6-2: Upper Band-edge

Table 2.6.6-2: Upper Band-edge – High Channel

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.775000	-46.1	34.9	-11.3	PASS
2483.725000	-46.5	35.2	-11.3	PASS
2483.825000	-47.1	35.8	-11.3	PASS
2483.575000	-47.6	36.4	-11.3	PASS
2483.525000	-47.6	36.4	-11.3	PASS
2483.625000	-47.7	36.4	-11.3	PASS
2484.575000	-48.4	37.1	-11.3	PASS
2483.975000	-48.4	37.2	-11.3	PASS
2483.675000	-48.6	37.3	-11.3	PASS
2484.525000	-48.6	37.3	-11.3	PASS
2484.025000	-48.7	37.4	-11.3	PASS
2484.425000	-49.0	37.8	-11.3	PASS
2483.925000	-49.1	37.8	-11.3	PASS
2483.875000	-49.1	37.8	-11.3	PASS
2484.475000	-49.1	37.8	-11.3	PASS



2.7 RF Conducted Spurious Emissions

2.7.1 Specification Reference

FCC Sections: 15.247(d)
ISED Canada: RSS-247 5.5

2.7.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state "0", as noted in §1.6.

2.7.3 Date of Test

10/17/2022

2.7.4 Test Method

The unwanted emissions into non-restricted bands were measured conducted in accordance with ANSI C63.10 Section 11.11. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 300 kHz. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit at the band edges. The spectrum span was then adjusted for the measurement of spurious emissions from 30MHz to 26GHz, 10 times the highest fundamental frequency.

2.7.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.




Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.7.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.

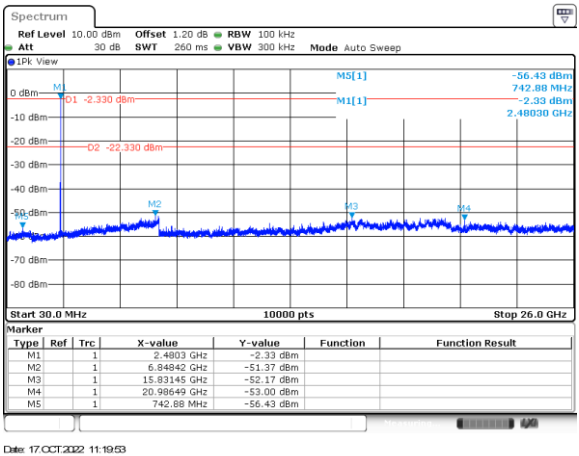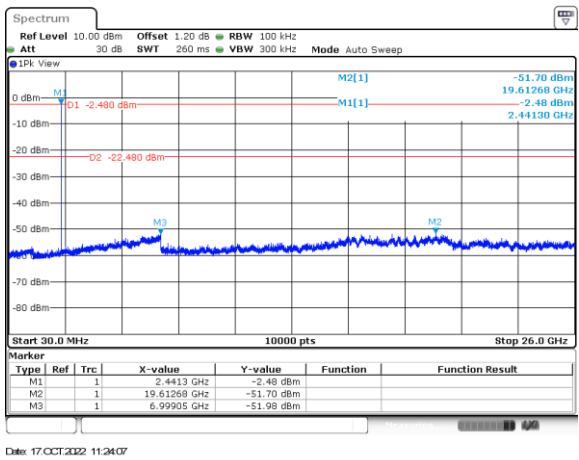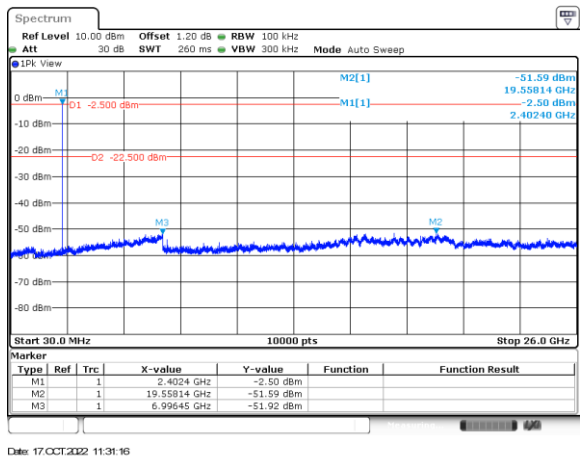



2.8 Radiated Spurious Emissions into Restricted Frequency Bands

2.8.1 Specification Reference

FCC Sections: 15.205, 15.209.
ISED Canada RSS – Gen 8.9/8.10

2.8.2 Equipment Under Test and Modification State

As shown in §1.4 with modification state “1”, as noted in §1.6.

2.8.3 Date of Test

10/19/2022 to 10/24/2022

2.8.4 Test Method

Radiated emissions tests were made over the frequency range of 9 kHz to 26 GHz, 10 times the highest fundamental frequency of 2.4 GHz. Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in Section 15.209.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 150 kHz, quasi-peak measurements were made using a resolution bandwidth RBW of 300 Hz and a video bandwidth VBW of 1 kHz and frequencies between 150 kHz and 30MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 10 kHz and a video bandwidth VBW of 30 kHz. For frequencies between 30 MHz and 1000 MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 100 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements were made with RBW of 1 MHz and VBW of 3 MHz

2.8.5 Environmental Conditions

The EUT was evaluated within the temperature, humidity and pressure range of the EUT as specified by the standard. The laboratory shall have an ambient temperature range of 15°C to 35°C, relative humidity range of 30% to 60% and atmospheric pressure range of 86 kPa to 106 kPa.

Ambient Temperature	22.3 °C
Relative Humidity	53.8 %
Atmospheric Pressure	972.2 mbar

2.8.6 Test Results

Test Summary: EUT was set to transmit mode.

Test Results: Pass

See data below for detailed results.



Table 2.8.6-1: Radiated Spurious Emissions Tabulated Data

Frequency	Peak Value	QP/Avg Value	Peak Limit	QP/Avg Limit	Peak Margin	QP/Avg Margin	Polarity	Peak Limit Results	QP/Avg Limit Results
MHz	dBμV/m	dBμV/m	dBμV/m	Limit_Avg	dB	dB	H/V	Pass/Fail	Pass/Fail
LCH - 2402 MHz									
117.689	----	29.526	----	43.5	----	-13.97	H	----	PASS
127.267	----	25.733	----	43.5	----	-17.77	H	----	PASS
4803.5	51.081	39.261	74	54	-22.92	-14.74	H	PASS	PASS
12011.03	54.107	42.355	74	54	-19.89	-11.64	H	PASS	PASS
114.829	----	30.638	----	43.5	----	-12.86	V	----	PASS
120.79	----	30.488	----	43.5	----	-13.01	V	----	PASS
131.124	----	25.556	----	43.5	----	-17.94	V	----	PASS
4803.5	51.096	40.174	74	54	-22.9	-13.83	V	PASS	PASS
12011.05	57.022	47.416	74	54	-16.98	-6.58	V	PASS	PASS
MCH - 2440 MHz									
115.677	----	33.331	----	43.5	----	-10.17	H	----	PASS
121.419	----	32.143	----	43.5	----	-11.36	H	----	PASS
4880.425	52.114	41.462	74	54	-21.89	-12.54	H	PASS	PASS
7320.625	56.605	46.055	74	54	-17.39	-7.94	H	PASS	PASS
12200.25	52.844	40.368	74	54	-21.16	-13.63	H	PASS	PASS
4880.425	50.067	37.342	74	54	-23.93	-16.66	V	PASS	PASS
7320.625	56.59	45.296	74	54	-17.41	-8.7	V	PASS	PASS
12198.65	57.614	47.851	74	54	-16.39	-6.15	V	PASS	PASS
HCH - 2480 MHz									
113.856	----	31.754	----	43.5	----	-11.75	H	----	PASS
119.093	----	31.555	----	43.5	----	-11.95	H	----	PASS
4960.4	52.144	41.284	74	54	-21.86	-12.72	H	PASS	PASS
7440.625	58.017	46.505	74	54	-15.98	-7.5	H	PASS	PASS
12399.78	49.801	35.381	74	54	-24.2	-18.62	H	PASS	PASS
111.555	----	32.223		43.5		-11.28	V	----	PASS
4959.95	49.488	35.913	74	54	-24.51	-18.09	V	PASS	PASS
7440.625	56.25	44.641	74	54	-17.75	-9.36	V	PASS	PASS
12401.05	58.17	48.36	74	54	-15.83	-5.64	V	PASS	PASS



Table 2.8.6-2: Radiated Band-Edge Tabulated Data

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
LCH										
2390	50.70	35.70	H	-2.04	48.66	33.66	74.0	54.0	25.3	20.3
2390	49.20	33.70	V	-2.04	47.16	31.66	74.0	54.0	26.8	22.3
HCH										
2483.5	64.80	50.70	H	-1.78	63.02	48.92	74.0	54.0	11.0	5.1
2483.5	54.50	40.50	V	-1.78	52.72	38.72	74.0	54.0	21.3	15.3

Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

- CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
 R_U = Uncorrected Reading
 R_C = Corrected Level
AF = Antenna Factor
CA = Cable Attenuation
AG = Amplifier Gain
DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $64.80 + -1.78 = 63.02\text{dB}\mu\text{V/m}$
Margin: $74\text{dB}\mu\text{V/m} - 63.02\text{dB}\mu\text{V/m} = 11.00\text{dB}$

Example Calculation: Average

Corrected Level: $50.70 + -1.78 - 0 = 48.92\text{dB}\mu\text{V}$
Margin: $54\text{dB}\mu\text{V} - 48.92\text{dB}\mu\text{V} = 5.1\text{dB}$

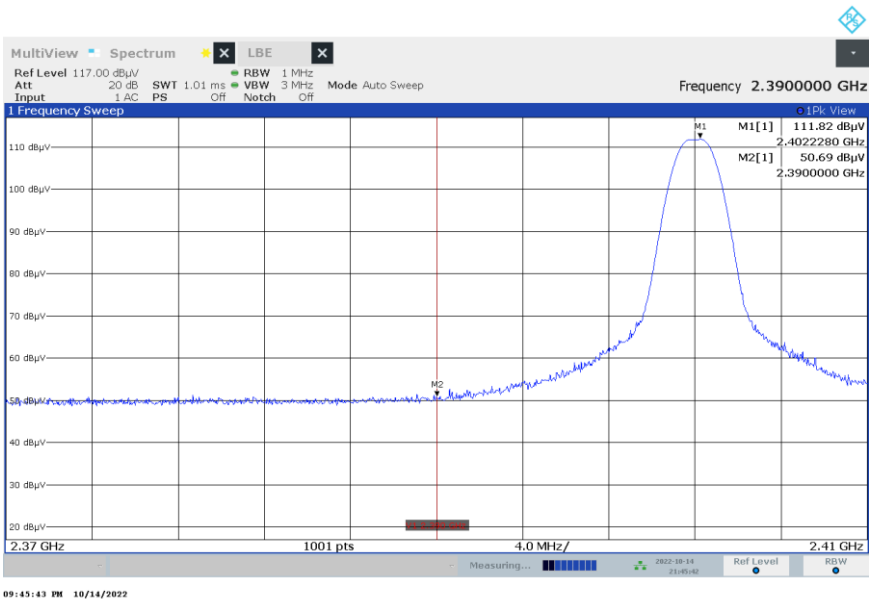


Figure 2.8.6-1: Reference plot Radiated Lower Band-edge – LCH

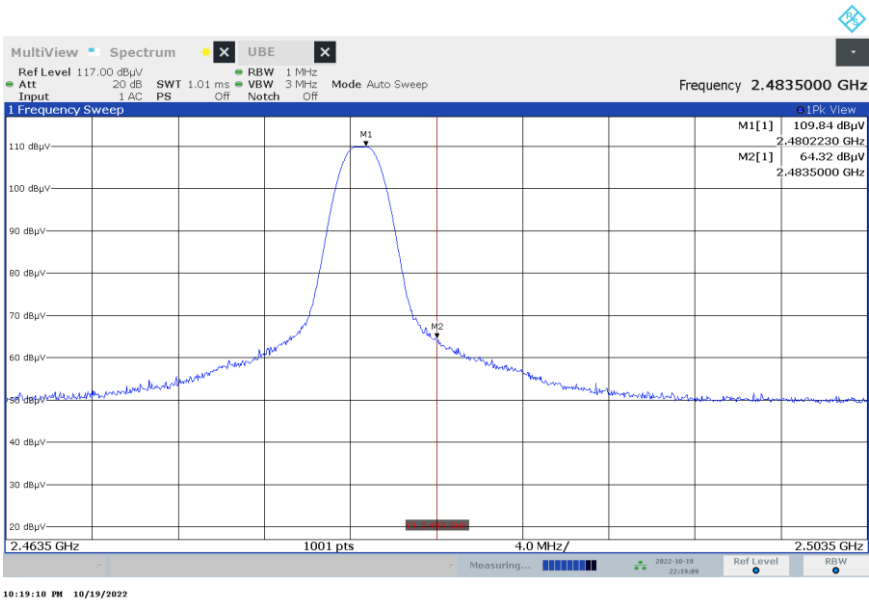


Figure 2.8.6-2: Reference plot Radiated Upper Band-edge – HCH

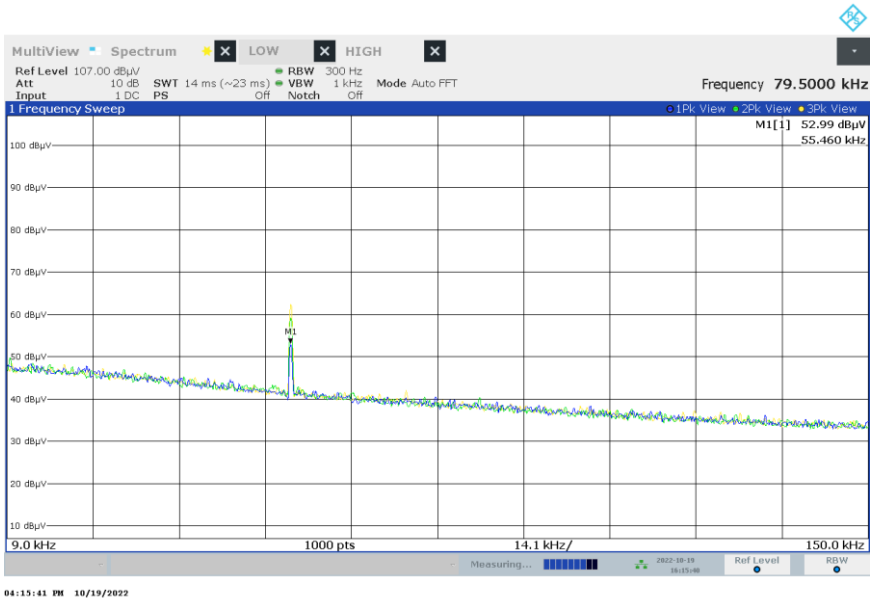


Figure 2.8.6-3: Reference plot for Radiated Spurious Emissions – 9 kHz – 150 kHz

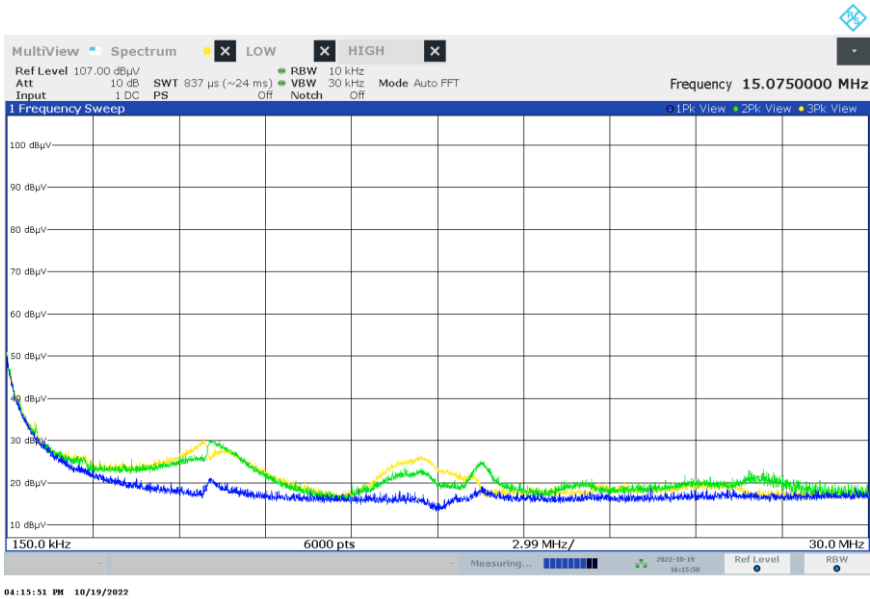


Figure 2.8.6-4: Reference plot for Radiated Spurious Emissions– 150 kHz – 30MHz
Note: Emissions above the noise floor are ambient not associated with the EUT.

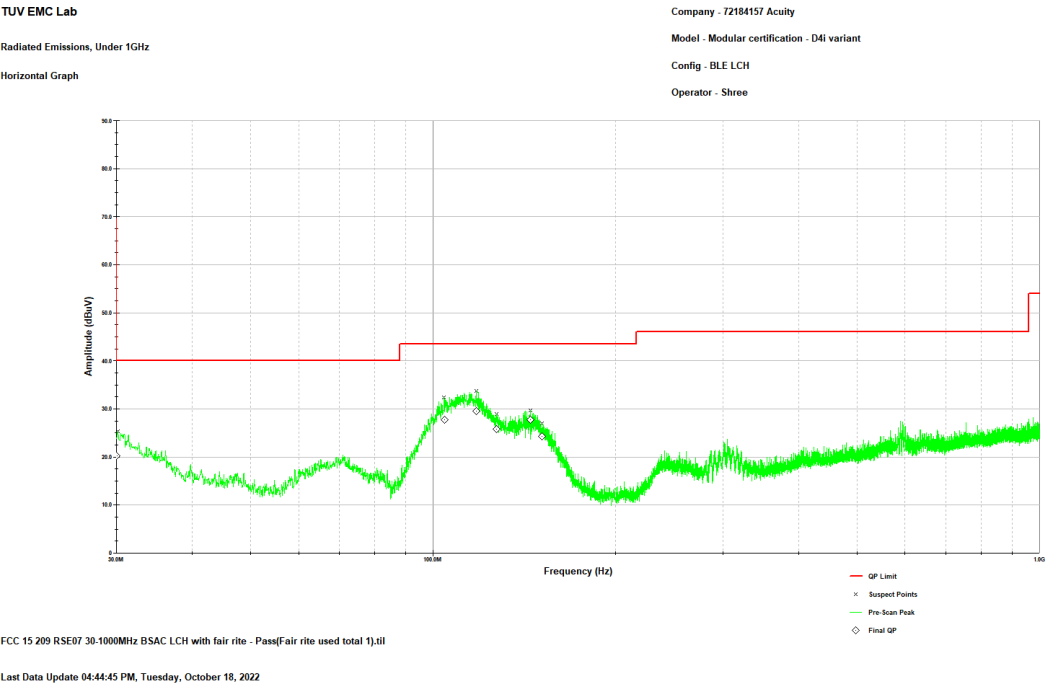


Figure 2.8.6-5: Reference plot for Radiated Spurious Emissions – 30 MHz – 1 GHz – H Polarity

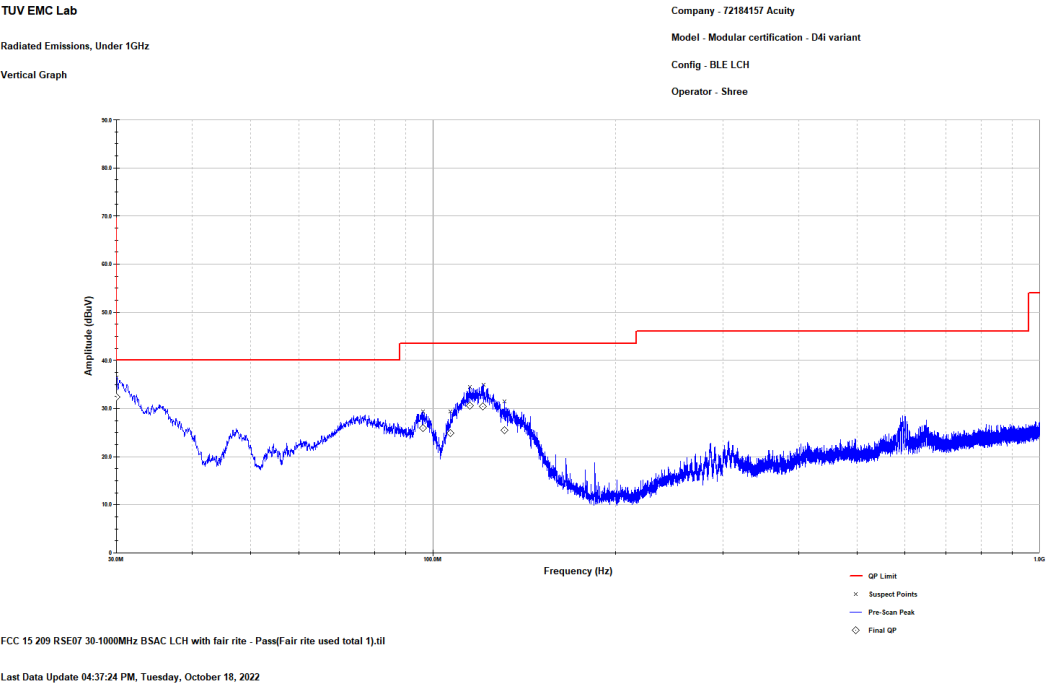


Figure 2.8.6-6: Reference plot for Radiated Spurious Emissions – 30 MHz – 1 GHz – V Polarity

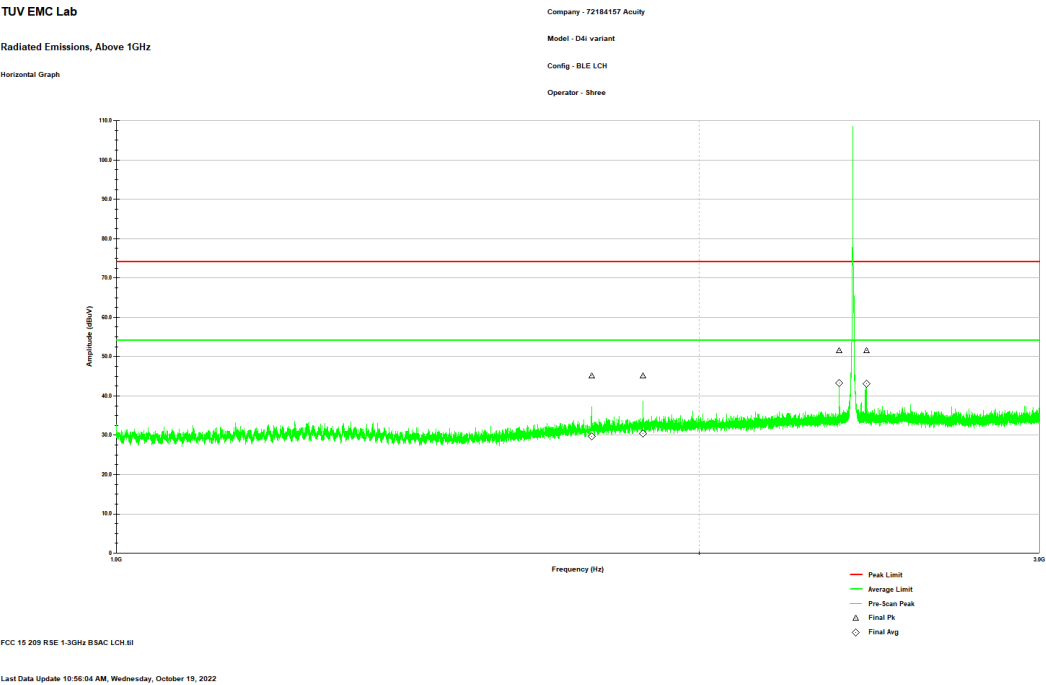


Figure 2.8.6-7: Reference plot for Radiated Spurious Emissions – 1 GHz – 3 GHz – H Polarity

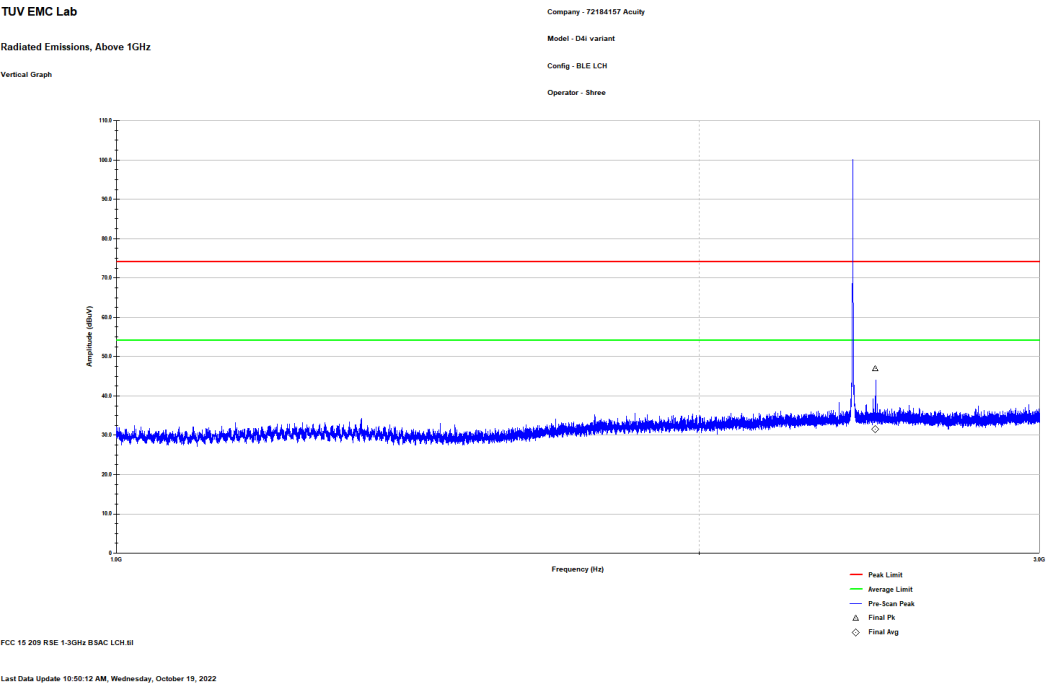


Figure 2.8.6-8: Reference plot for Radiated Spurious Emissions – 1 GHz – 3 GHz – V Polarity

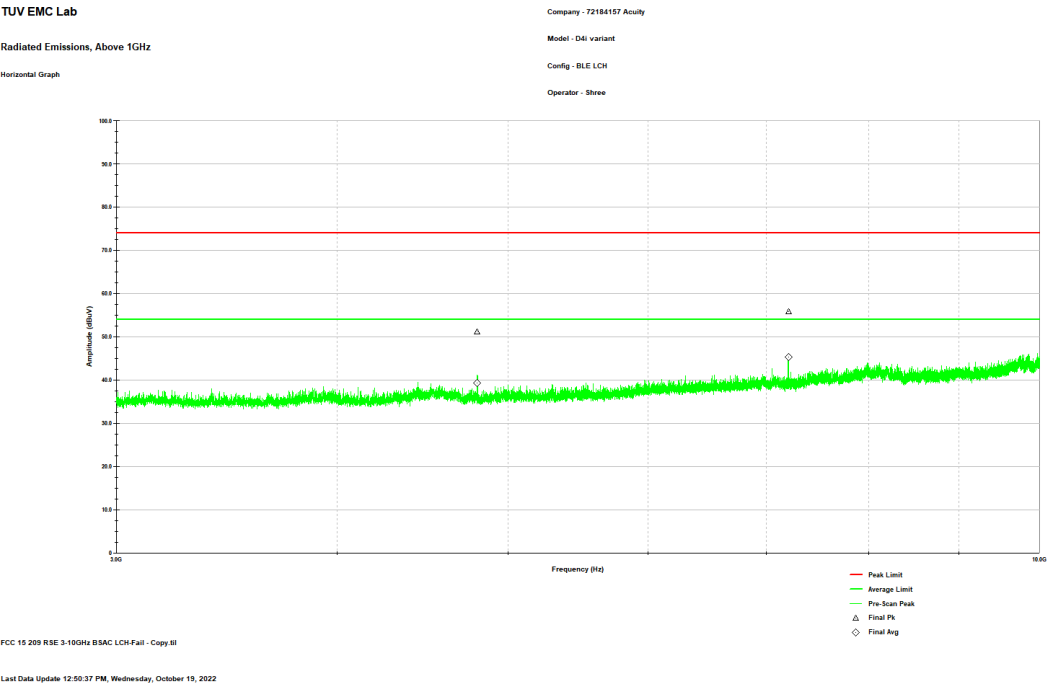


Figure 2.8.6-9: Reference plot for Radiated Spurious Emissions – 3 GHz – 10 GHz – H Polarity

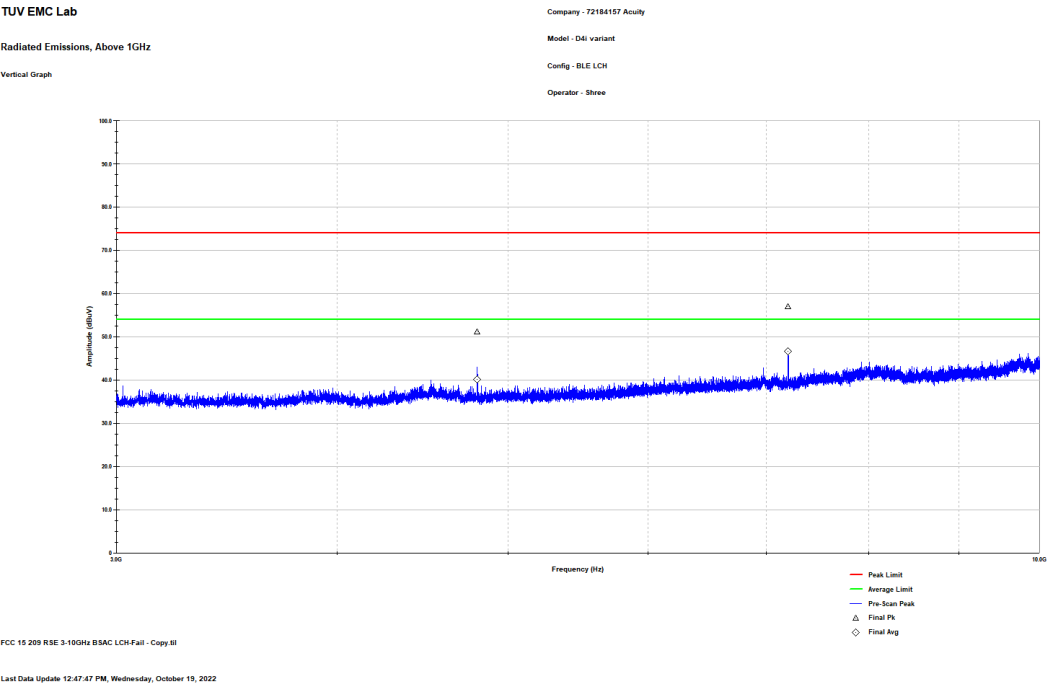


Figure 2.8.6-10: Reference plot for Radiated Spurious Emissions – 3 GHz – 10 GHz – V Polarity

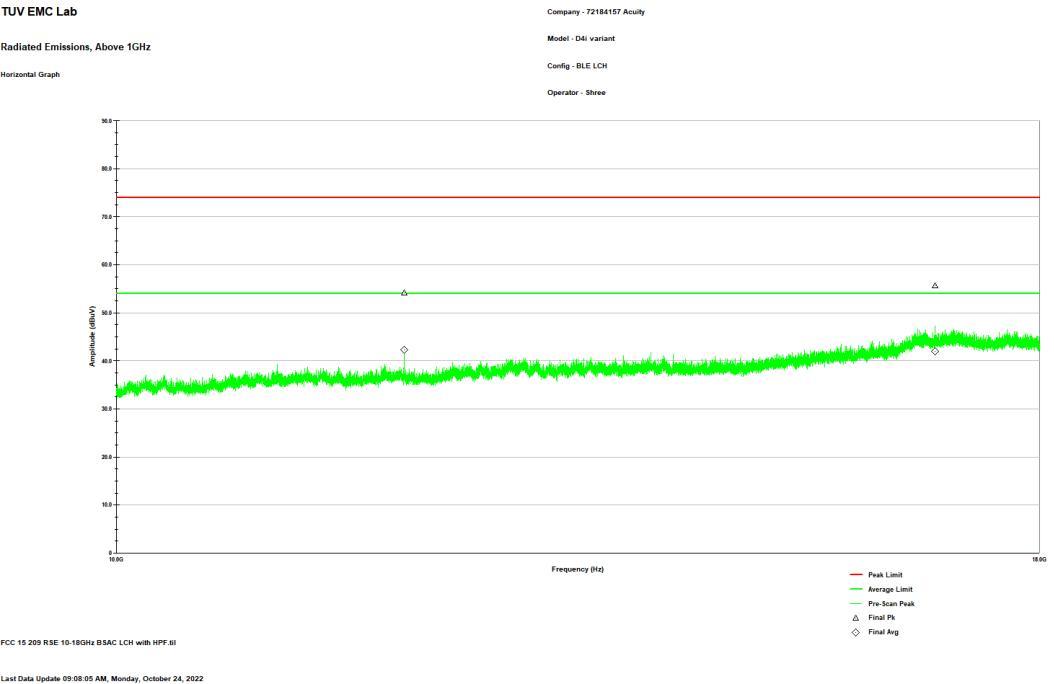


Figure 2.8.6-11: Reference plot for Radiated Spurious Emissions – 10 GHz – 18 GHz – H Polarity

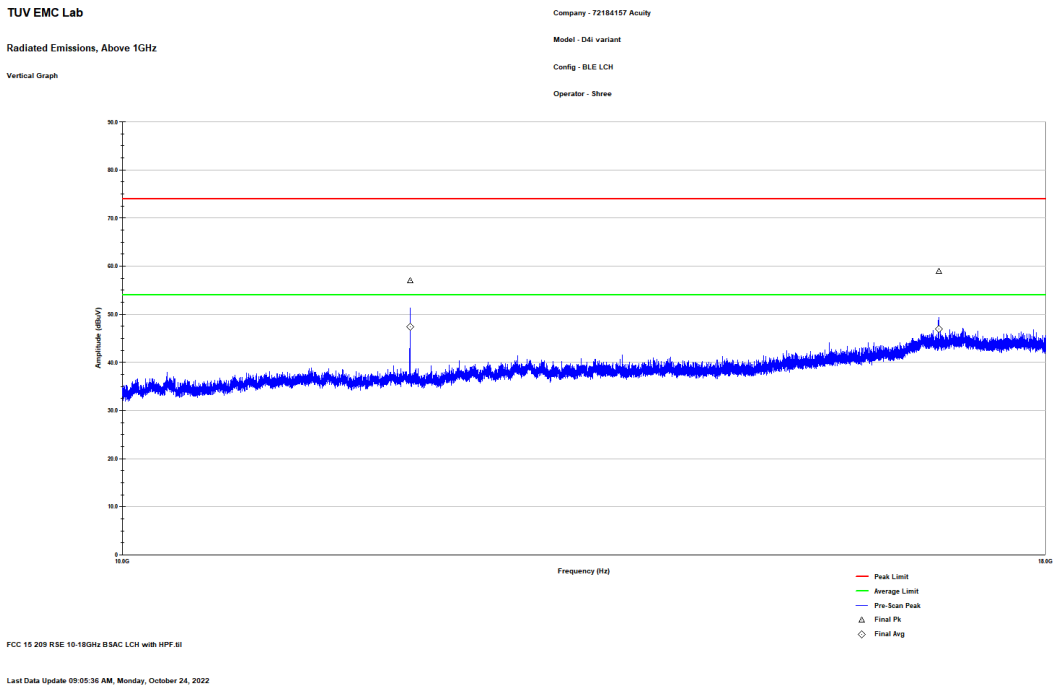


Figure 2.8.6-12: Reference plot for Radiated Spurious Emissions – 10 GHz – 18 GHz – V polarity

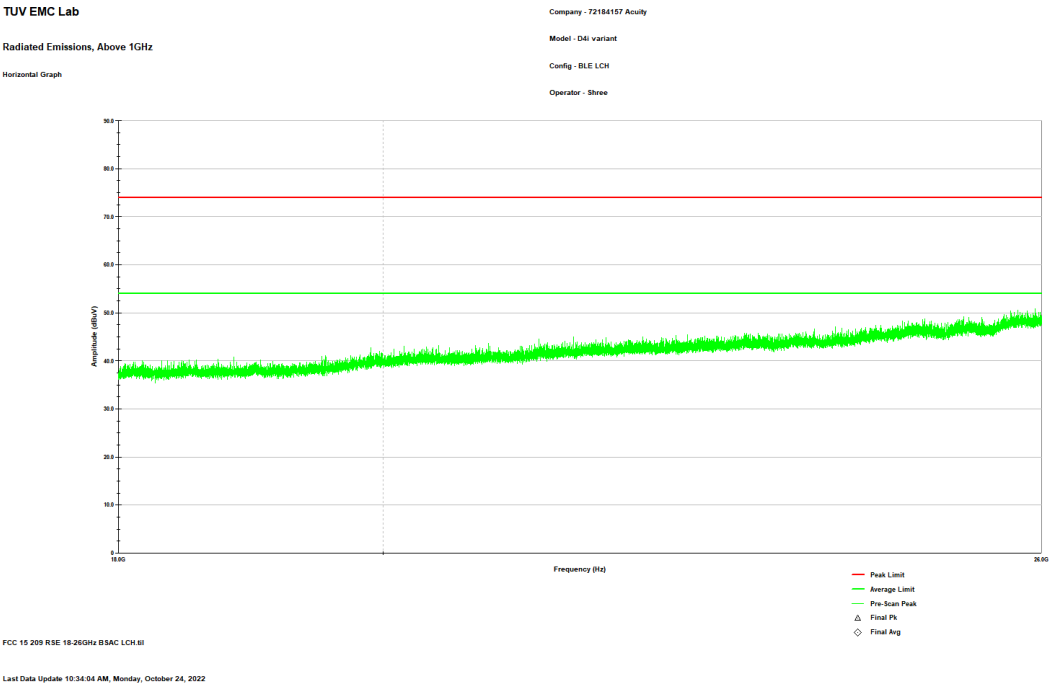


Figure 2.8.6-13: Reference plot for Radiated Spurious Emissions – 18 GHz – 26 GHz – H Polarity

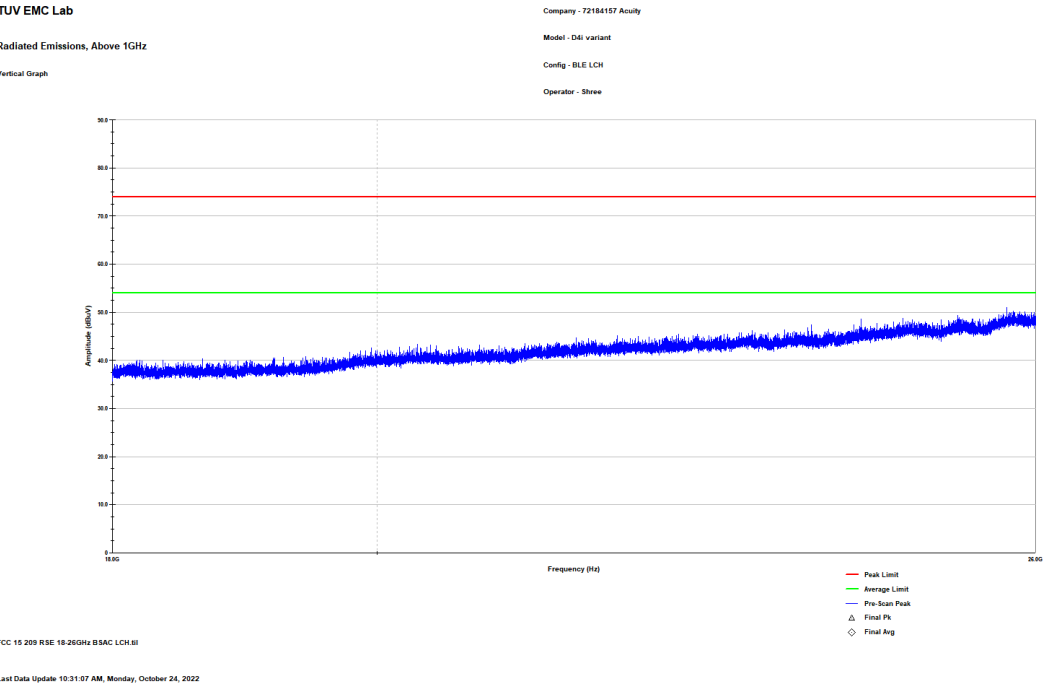


Figure 2.8.6-14: Reference plot for Radiated Spurious Emissions – 18 GHz – 26 GHz – V Polarity



2.9 Test Equipment Used

Table 2.9-1 –Equipment List

Asset ID	Manufacturer	Model	Equipment Type	Serial Number	Last Calibration Date	Calibration Due Date
853	Teseq	CBL6112D	BiLog Antenna	51616	7/15/2021	7/15/2023
884	ETS Lindgren (EMCO)	3117	DOUBLE-RIDGED GUIDE ANTENNA	240106	5/6/2021	5/6/2023
334	Rohde & Schwarz	3160-09	HF Antenna 18-26.5 GHz	45576	4/25/2022	5/25/2024
889	Com Power	PAM 103	Pre-amplifier	18020215	9/27/2022	9/27/2023
338	Hewlett Packard	8449B	High Frequency Pre-Amp	3008A01111	6/22/2021	6/22/2023
882	Rohde & Schwarz	ESW44	ESW44 EMI TEST RECEIVER	101961	7/14/2022	7/14/2023
22	Teledyne Storm Microwave	90-195-456	BSAC Cable	N/A	10/7/2022	10/7/2023
20	Teledyne Storm Microwave	R-90-195-036	BSAC Cable	N/A	7/12/2022	7/12/2023
21	Teledyne Storm Microwave	R-90-195-072	BSAC Cable	N/A	7/12/2022	7/12/2023
335	Suhner Sucoflex	SF-102A	RF Cable	882/2A	6/21/2022	6/21/2023
345	Suhner Sucoflex	102A	RF Cable	1077/2A	6/21/2022	6/21/2023
432	Microwave Circuits	H3G020G4	High pass Filter	264066	6/9/2022	6/9/2023
827	Rohde & Schwarz	RF Cable set	TS8997 Rack cable set	N/A	12/20/2021	12/20/2022
622	Rohde & Schwarz	FSV40 (v3.40)	FSV Signal Analyzer 10Hz to 40GHz	101338	10/05/2022	10/05/2023
872	HP	E7402A	EMI Receiver	US40240258	6/21/2022	6/21/2023
871	ACS	n/a	Conducted EMI Cable	871	4/1/2022	4/1/2023
3010	Rohde & Schwarz	ENV216	Two-Line V-Network	3010	6/22/2022	6/22/2023

N/A – Not Applicable



3 Diagram of Test Set-ups

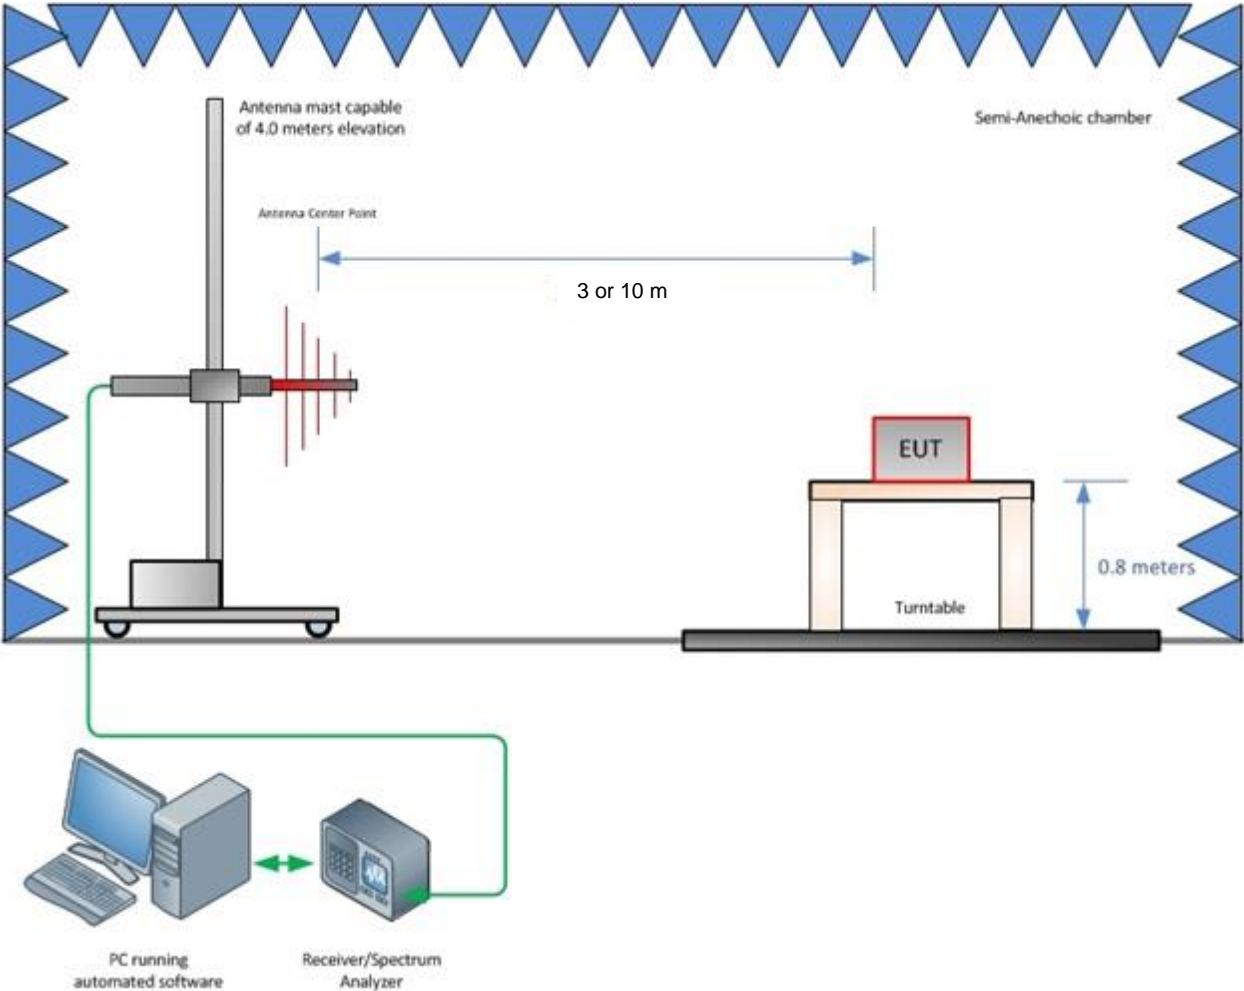


Figure 3-1 – Radiated Emissions Test Setup up to 1 GHz

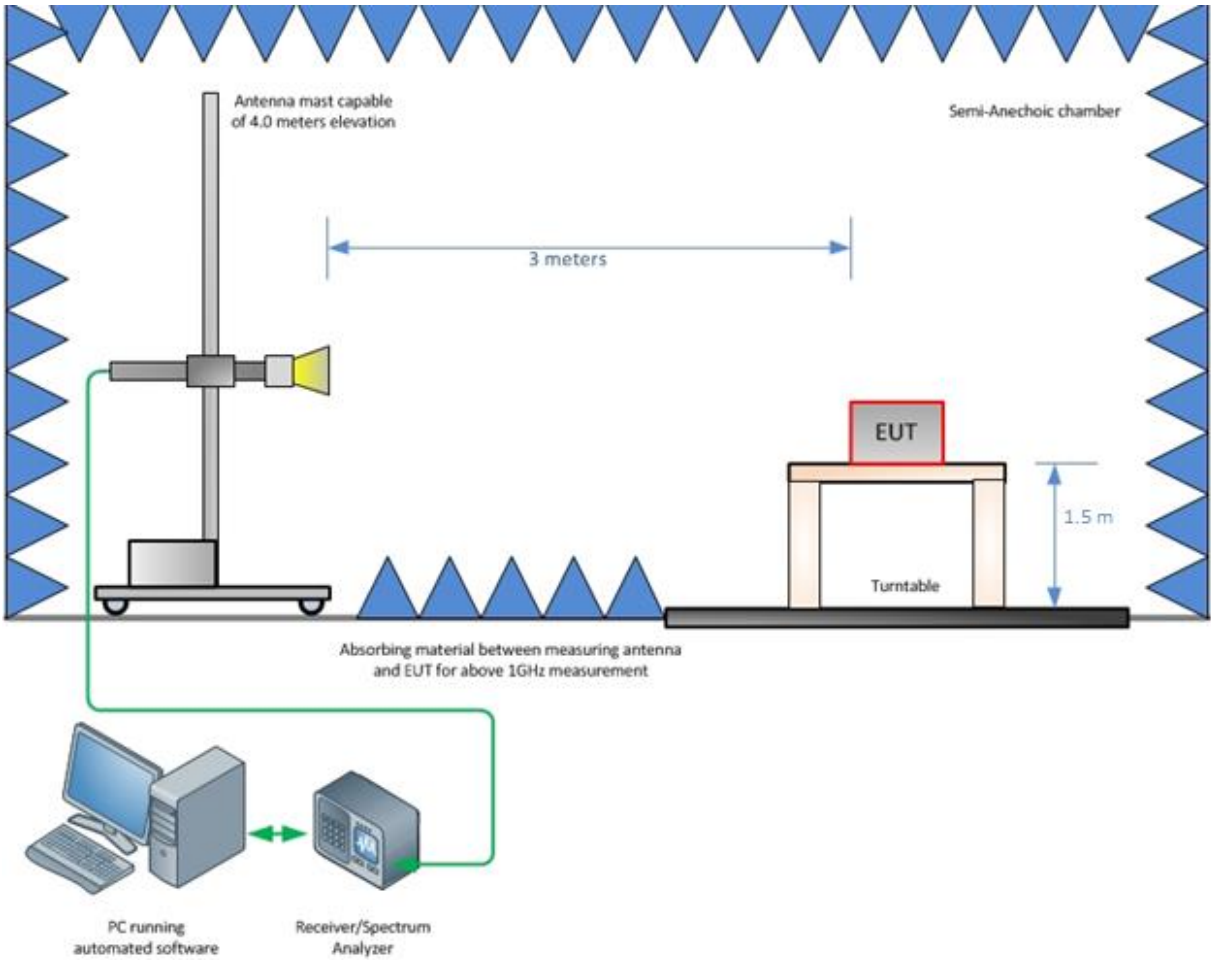


Figure 3-2 – Radiated Emissions Test Setup above 1 GHz

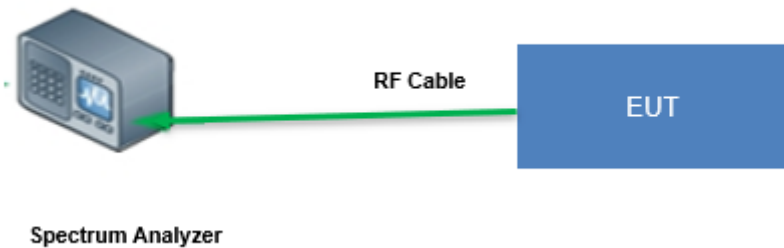


Figure 3-3 – Conducted Test Setup: Antenna Port measurement



4 Accreditation, Disclaimers and Copyright

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

STATEMENT OF MEASUREMENT UNCERTAINTY – Emissions

The expanded laboratory measurement uncertainty figures (U_{Lab}) provided below correspond to an expansion factor (coverage factor) $k = 1.96$ which provide confidence levels of 95%.

Table 4-1: Estimation of Measurement Uncertainty

Parameter	U_{lab}
Occupied Channel Bandwidth	$\pm 0.009 \%$
RF Conducted Output Power	$\pm 0.349 \text{ dB}$
Power Spectral Density	$\pm 0.372 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 1.264 \text{ dB}$
Radiated Emissions $\leq 1 \text{ GHz}$	$\pm 5.814 \text{ dB}$
Radiated Emissions $> 1 \text{ GHz}$	$\pm 4.318 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^{\circ}\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 3.360 \text{ dB}$

TEST EQUIPMENT

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated to meet test method standard requirements and/or manufacturer's specifications