



RF TEST REPORT

Applicant ZTE Corporation
FCC ID SRQ-ZTEBLADEA3
Product LTE/WCDMA/GSM(GPRS)
Multi-Mode Digital Mobile Phone
Model ZTE BLADE A3
Report No. R1807A0334-R2
Issue Date August 20, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR 47 Part 24E (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Jiang peng Lan

Performed by: Jiangpeng Lan

Kai Xu

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility.....	4
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	9
5.1. RF Power Output.....	9
5.2. Effective Isotropic Radiated Power	11
5.3. Occupied Bandwidth	14
5.4. Band Edge Compliance.....	16
5.5. Peak-to-Average Power Ratio (PAPR)	19
5.6. Frequency Stability	21
5.7. Spurious Emissions at Antenna Terminals	25
5.8. Radiates Spurious Emission	29
6. Main Test Instruments	34

Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	24.232(c)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 /24.238(a)	PASS
5	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 24.235	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
8	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: June 21, 2018 ~ August 3, 2018			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description			
Model	ZTE BLADE A3		
IMEI	869930030002115		
Hardware Version	uzfA		
Software Version	CLA_GT_A3_V1.0		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Test Mode(s)	GSM1900; WCDMA Band II;		
Test Modulation	(GSM)GMSK,8PSK; (WCDMA)QPSK;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	24		
HSUPA UE Category	6		
Maximum E.I.R.P	GSM 1900:	24.64dBm	
	WCDMA Band II:	18.15dBm	
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.5V Maximum: 4.2V		
Extreme Temperature	Lowest: -10°C Highest: +55°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM1900	1850 ~ 1910	1930 ~ 1990
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
EUT Accessory			
Adapter	Manufacturer: Shenzhen Dokocom Energy Technology Co., Ltd. Model: STC-A508A-Z		
Battery	Manufacturer: Jiade Energy Technology (Zhuhai) Co., Ltd. Model: Li3824T43P4h695945		
Earphone	Manufacturer: Shenzhen FDC Electronics Co. ,Ltd. Model: DEM-66		
USB Extend Cable	70cm Cable, Shielded		
Note: The information of the EUT is declared by the manufacturer.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2017)

FCC CFR 47 Part 24E (2017)

ANSI/TIA-603-E (2016)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 1900	WCDMA Band II
RF power output	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
Effective Isotropic Radiated power	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

5. Test Case Results

5.1.RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

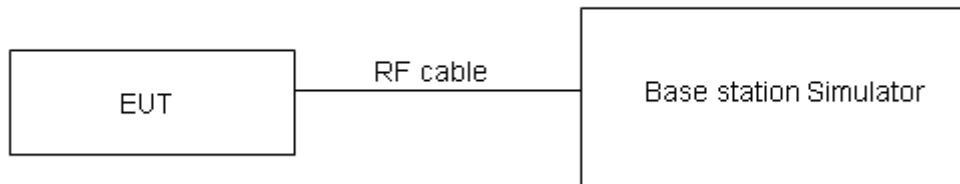

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

GSM 1900		Conducted Power(dBm)		
		Channel 512	Channel 661	Channel 810
		1850.2(MHz)	1880(MHz)	1909.8(MHz)
GSM	Results	30.42	30.14	30.04
GPRS (GMSK)	1TXslot	30.43	30.15	30.00
	2TXslots	28.02	27.75	27.65
	3TXslots	26.09	25.86	25.82
	4TXslots	24.05	23.84	23.74
EGPRS (8PSK)	1TXslot	26.17	26.01	25.92
	2TXslots	26.03	25.94	25.72
	3TXslots	25.90	25.39	25.02
	4TXslots	23.01	23.01	22.76

WCDMA Band II		Conducted Power(dBm)		
		Channel 9262	Channel 9400	Channel 9538
		1852.4(MHz)	1880(MHz)	1907.6(MHz)
RMC	12.2k	23.35	22.87	22.89
HSDPA	Sub - Test 1	22.31	21.79	21.83
	Sub - Test 2	22.30	21.81	21.80
	Sub - Test 3	21.77	21.31	21.32
	Sub - Test 4	21.78	21.32	21.30
HSUPA	Sub - Test 1	22.27	21.78	21.78
	Sub - Test 2	21.26	20.76	20.77
	Sub - Test 3	21.73	21.24	21.26
	Sub - Test 4	21.19	20.73	20.74
	Sub - Test 5	22.20	21.71	21.72
DC-HSDPA	Sub - Test 1	22.19	21.73	21.73
	Sub - Test 2	22.18	21.72	21.72
	Sub - Test 3	21.76	21.21	21.23
	Sub - Test 4	21.75	21.20	21.22

5.2. Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $ERP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

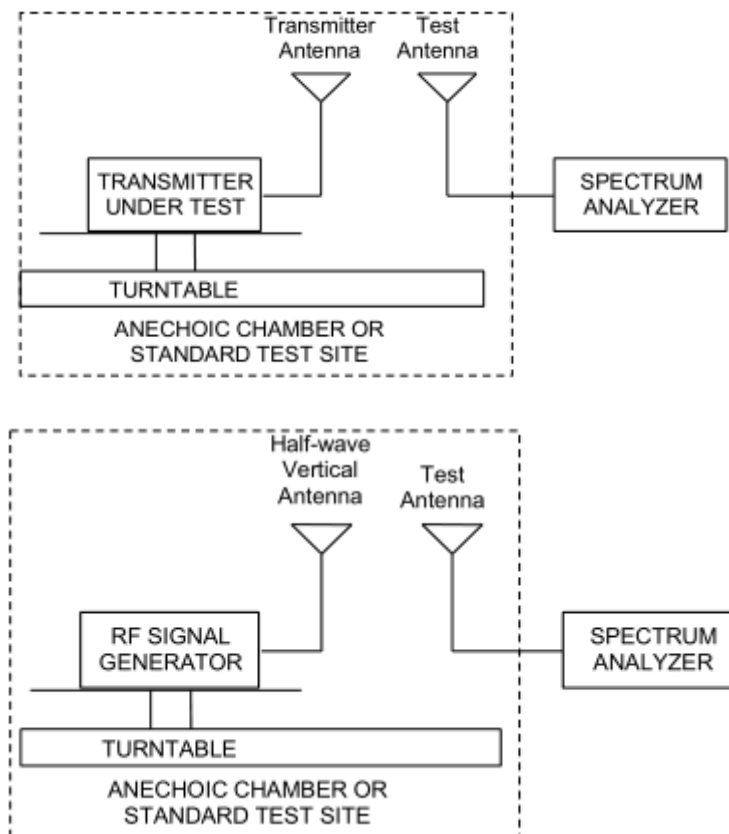

Limits

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit	$\leq 2 \text{ W}$ (33 dBm)
-------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	EIRP (dBm)	Limit (dBm)	Conclusion
GSM 1900	Low	1850.2	Horizontal	23.96	33	Pass
	Mid	1880	Horizontal	23.67	33	Pass
	High	1909.8	Horizontal	24.64	33	Pass
GPRS 1900	Low	1850.2	Horizontal	22.82	33	Pass
	Mid	1880	Horizontal	22.39	33	Pass
	High	1909.8	Horizontal	23.84	33	Pass
EGPRS 1900	Low	1850.2	Horizontal	22.42	33	Pass
	Mid	1880	Horizontal	21.98	33	Pass
	High	1909.8	Horizontal	23.47	33	Pass
WCDMA Band II	Low	1852.4	Horizontal	18.15	33	Pass
	Mid	1880	Horizontal	17.86	33	Pass
	High	1907.6	Horizontal	18.15	33	Pass

5.3.Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II,

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

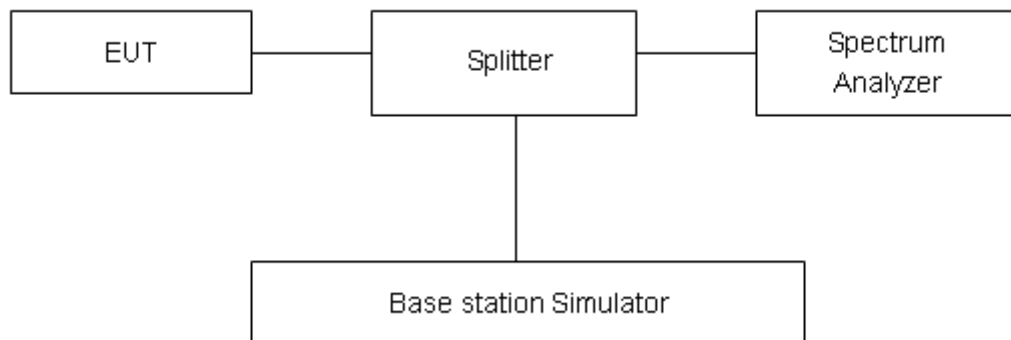

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.



Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 1900(GSM)	661	1880	0.24523	0.3061
GPRS 1900(GMSK)	661	1880	0.24595	0.3155
EGPRS 1900(8-PSK)	661	1880	0.24591	0.3096
WCDMA Band II (RMC)	9400	1880	4.14380	4.6820


GSM 1900 GSM CH-Middle

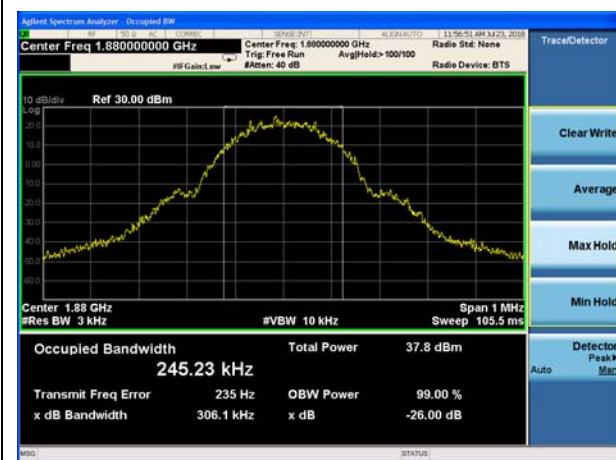


GSM 1900 GPRS CH-Middle



GSM 1900 EGPRS CH-Middle

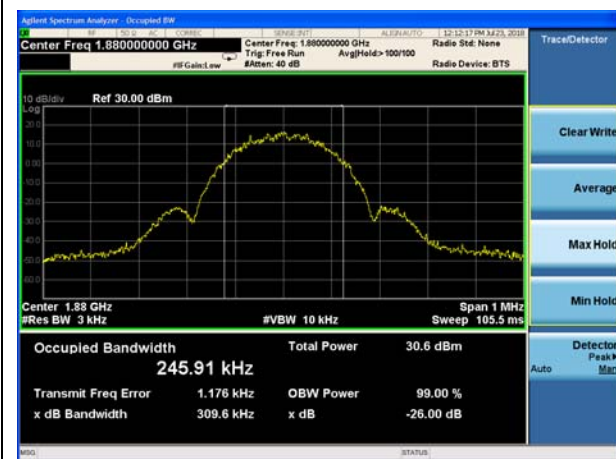

WCDMA Band II RMC CH-Middle

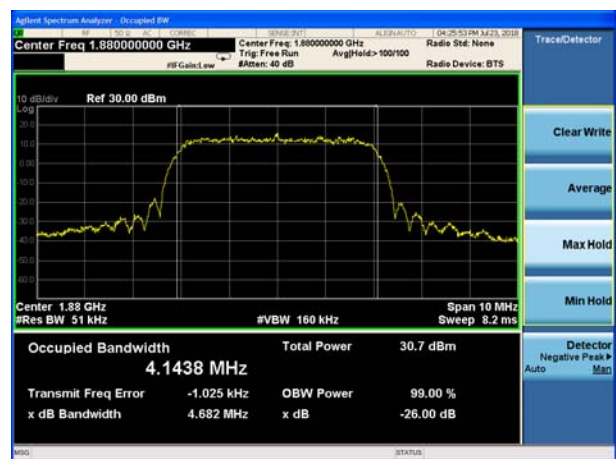

5.4. Band Edge Compliance

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900, RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band II,

Spectrum analyzer plots are included on the following pages.

Test Setup

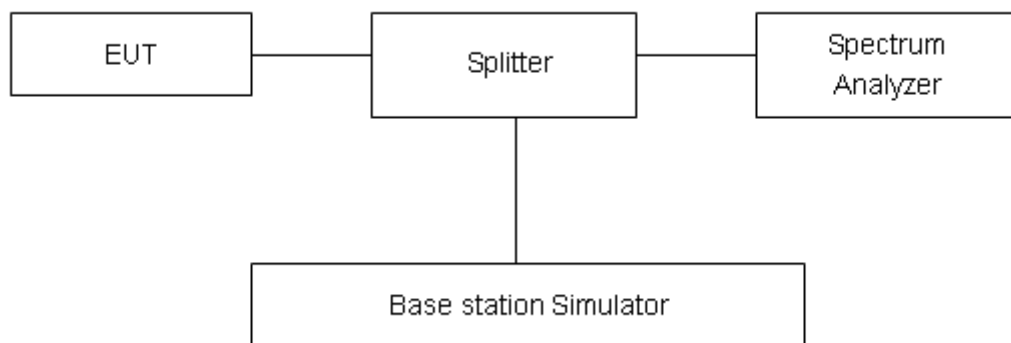

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

GSM1900 GSM CH-Low

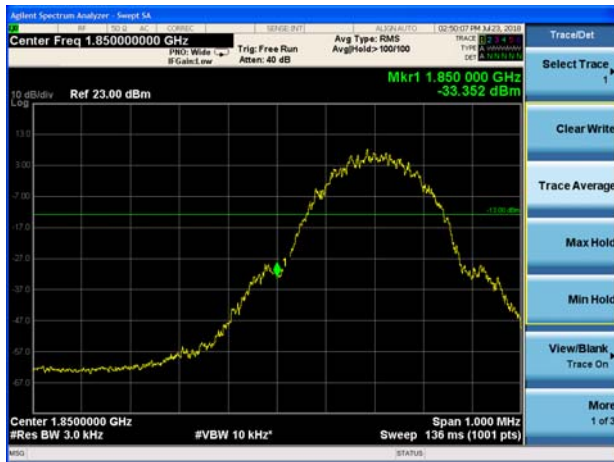

GSM 1900 GSM CH-High




GSM1900 GPRS CH-Low



GSM 1900 GPRS CH-High



GSM1900 EGPRS CH-Low

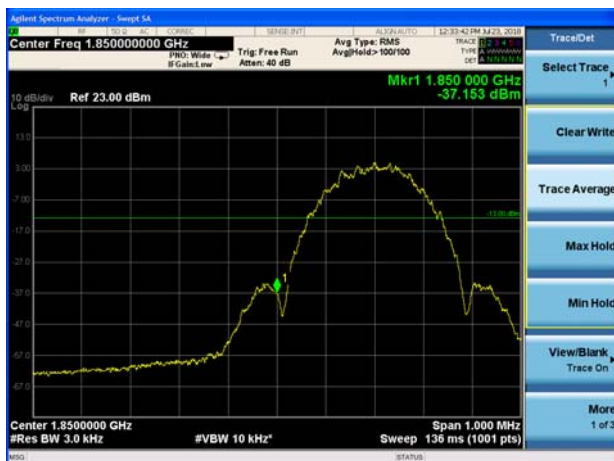


GSM 1900 EGPRS CH-High





WCDMA Band II RMC CH-Low

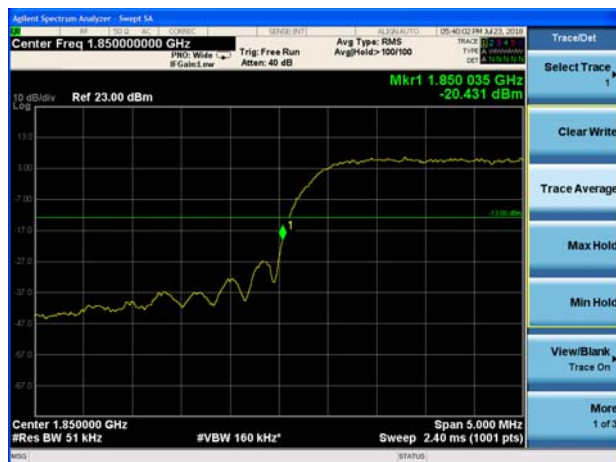

WCDMA Band II RMC CH-High



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as PPK. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

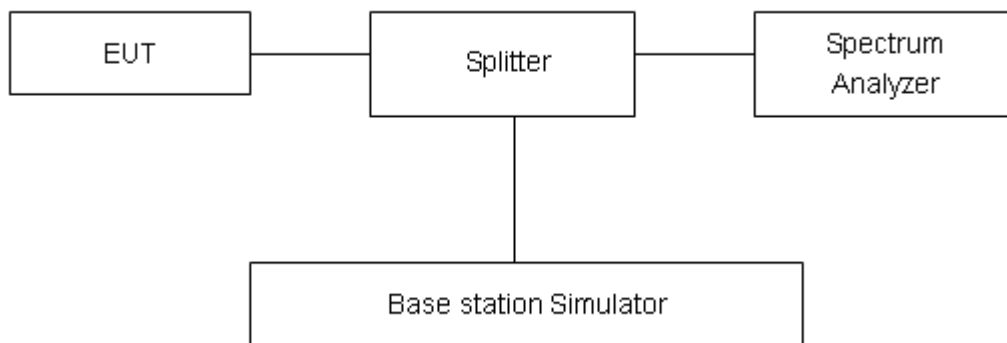

Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

Mode	Channel	Frequency (MHz)	Peak(dBm)	Avg(dBm)	PAPR(dB)	Limit(dB)	Conclusion
GSM 1900 (GSM)	512	1850.2	31.29	30.42	0.87	≤13	PASS
	661	1880	31.06	30.14	0.92	≤13	PASS
	810	1909.8	30.90	30.04	0.86	≤13	PASS
GPRS 1900 (GMSK)	512	1850.2	24.98	24.05	0.93	≤13	PASS
	661	1880	24.81	23.84	0.97	≤13	PASS
	810	1909.8	24.68	23.74	0.94	≤13	PASS
EGPRS 1900 (8-PSK)	512	1850.2	24.04	23.01	1.03	≤13	PASS
	661	1880	23.96	23.01	0.95	≤13	PASS
	810	1909.8	23.73	22.76	0.97	≤13	PASS
WCDMA Band II (RMC)	9262	1852.4	26.52	23.35	3.17	≤13	PASS
	9400	1880	26.05	22.87	3.18	≤13	PASS
	9538	1907.6	26.23	22.89	3.34	≤13	PASS

5.6.Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.5 V and 4.2 V, with a nominal voltage of 3.8V.

Test setup

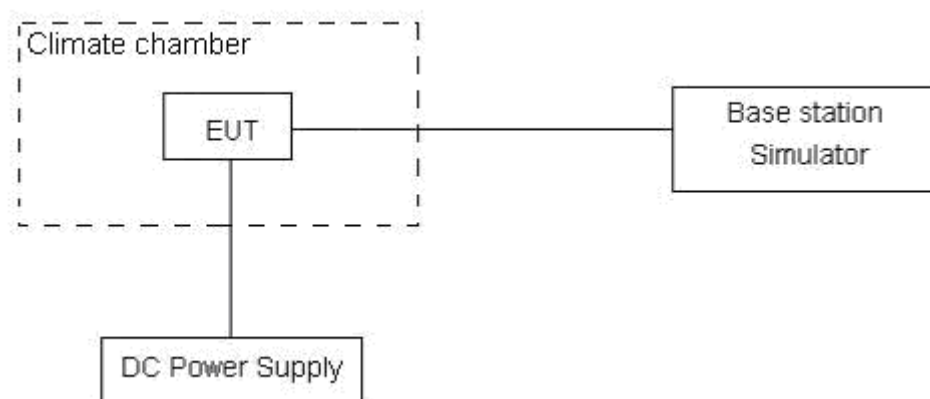

Limits

No specific frequency stability requirements in part 24.235

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.



Test Result

GSM 1900					
Condition		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1850.0664	1909.9502	-0.72	-0.00038
Extreme (55°C)		1850.0652	1909.9490	-2.82	-0.00150
Extreme (50°C)		1850.0651	1909.9489	0.36	0.00019
Extreme (40°C)		1850.0661	1909.9499	-3.76	-0.00200
Extreme (30°C)		1850.0652	1909.9490	3.04	0.00162
Extreme (20°C)		1850.0660	1909.9498	-1.59	-0.00085
Extreme (10C)		1850.0653	1909.9491	2.53	0.00135
Extreme (0°C)		1850.0659	1909.9497	-1.26	-0.00067
Extreme (-10°C)		1850.0654	1909.9492	1.98	0.00105
Extreme (-20°C)		1850.0658	1909.9496	2.62	0.00139
Extreme (-30°C)		1850.0655	1909.9493	-3.11	-0.00165
25°C	LV	1850.0656	1909.9494	0.14	0.00007
	HV	1850.0665	1909.9503	-0.18	-0.00010
GPRS 1900					
Condition		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1850.0604	1909.9436	-4.74	-0.00252
Extreme (55°C)		1850.0592	1909.9424	1.59	0.00085
Extreme (50°C)		1850.0591	1909.9423	-0.75	-0.00040
Extreme (40°C)		1850.0601	1909.9433	1.83	0.00097
Extreme (30°C)		1850.0592	1909.9424	-0.79	-0.00042
Extreme (20°C)		1850.0600	1909.9432	-0.06	-0.00003
Extreme (10C)		1850.0593	1909.9425	-3.54	-0.00188
Extreme (0°C)		1850.0599	1909.9431	2.83	0.00151
Extreme (-10°C)		1850.0594	1909.9426	-3.65	-0.00194
Extreme (-20°C)		1850.0598	1909.9430	-5.48	-0.00291
Extreme (-30°C)		1850.0595	1909.9427	5.08	0.00270
25°C	LV	1850.0596	1909.9428	-2.38	-0.00127
	HV	1850.0605	1909.9437	3.22	0.00171
EGPRS 1900					
Condition		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1850.0652	1909.9298	3.20	0.00170



Extreme (55°C)		1850.0640	1909.9286	-3.03	-0.00161
Extreme (50°C)		1850.0639	1909.9285	-0.20	-0.00011
Extreme (40°C)		1850.0649	1909.9295	2.42	0.00129
Extreme (30°C)		1850.0640	1909.9286	-0.44	-0.00023
Extreme (20°C)		1850.0648	1909.9294	1.58	0.00084
Extreme (10C)		1850.0641	1909.9287	-1.19	-0.00063
Extreme (0°C)		1850.0647	1909.9293	3.28	0.00174
Extreme (-10°C)		1850.0642	1909.9288	-2.93	-0.00156
Extreme (-20°C)		1850.0646	1909.9292	4.06	0.00216
Extreme (-30°C)		1850.0643	1909.9289	-2.29	-0.00122
25°C	LV	1850.0644	1909.9290	0.37	0.00020
	HV	1850.0653	1909.9299	-2.73	-0.00145

WCDMA Band II					
Condition		1850	1910	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1850.0291	1909.9496	1.94	0.00103
Extreme (55°C)		1850.0267	1909.9514	-2.85	-0.00152
Extreme (50°C)		1850.0273	1909.9508	-0.85	-0.00045
Extreme (40°C)		1850.0286	1909.9495	0.78	0.00041
Extreme (30°C)		1850.0293	1909.9488	-0.87	-0.00046
Extreme (20°C)		1850.0272	1909.9509	-2.11	-0.00112
Extreme (10C)		1850.0284	1909.9497	-1.95	-0.00104
Extreme (0°C)		1850.0271	1909.9514	4.11	0.00219
Extreme (-10°C)		1850.0266	1909.9515	-3.42	-0.00182
Extreme (-20°C)		1850.0277	1909.9504	3.13	0.00166
Extreme (-30°C)		1850.0312	1909.9471	-1.12	-0.00060
25C	LV	1850.0274	1909.9507	-2.06	-0.00110
	HV	1850.0284	1909.9501	0.97	0.00052

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

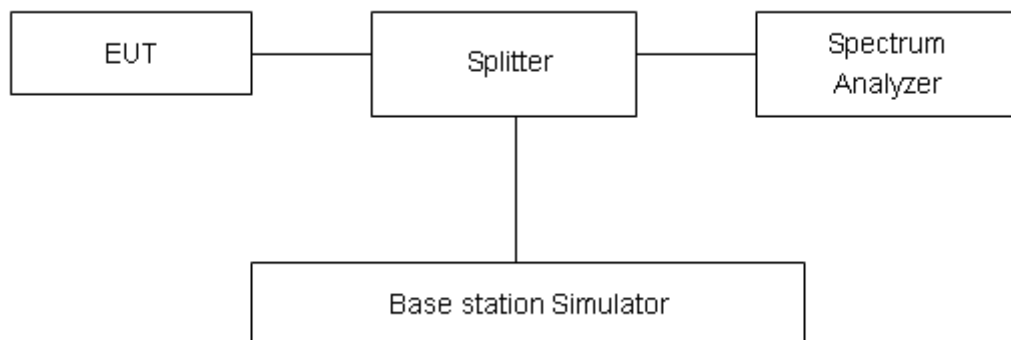

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB

Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


GSM 1900 CH-Low 30MHz~1GHz

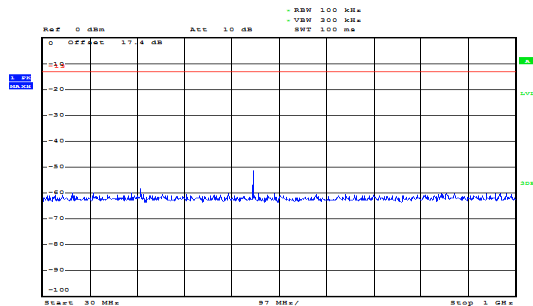


GSM 1900 CH-Middle 30MHz~1GHz

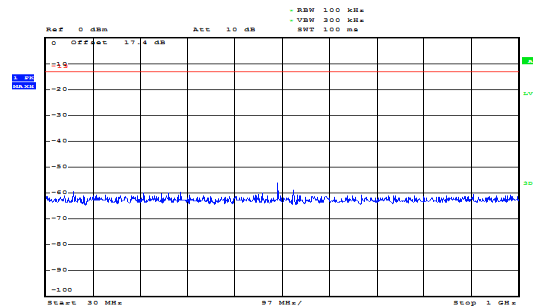


GSM 1900 CH-Low 1GHz~3GHz

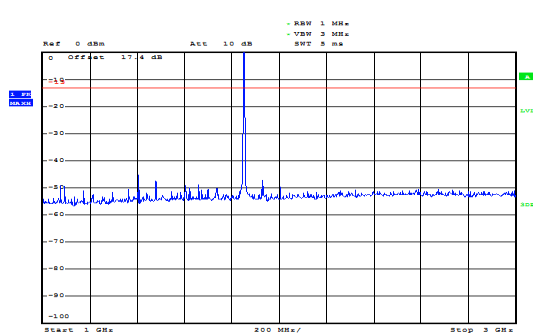


GSM 1900 CH-Middle 1GHz~3GHz

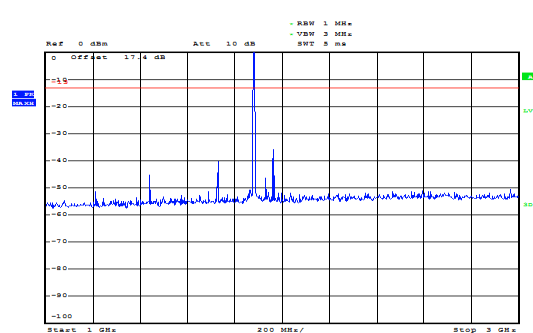

GSM 1900 CH-Low 3GHz~20GHz

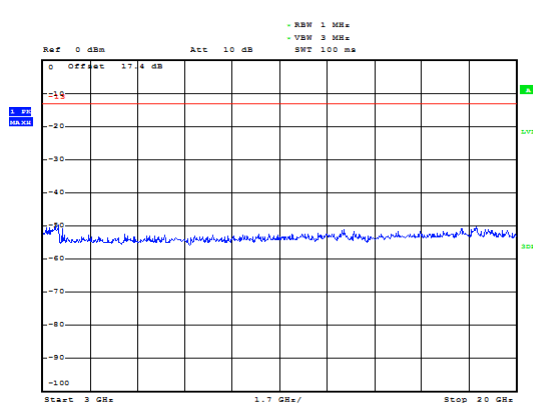


GSM 1900 CH-Middle 3GHz~20GHz

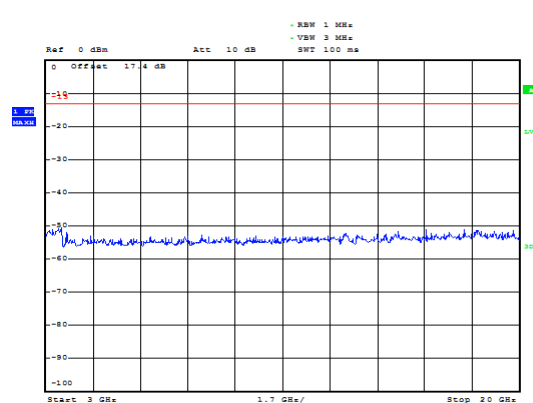





GSM 1900 CH-High 30MHz~1GHz

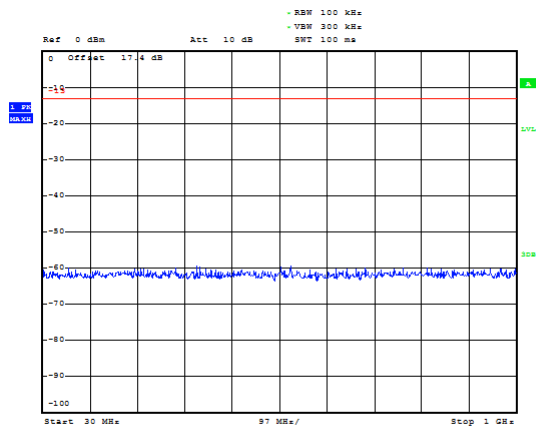


WCDMA Band II CH-Low 30MHz~1GHz

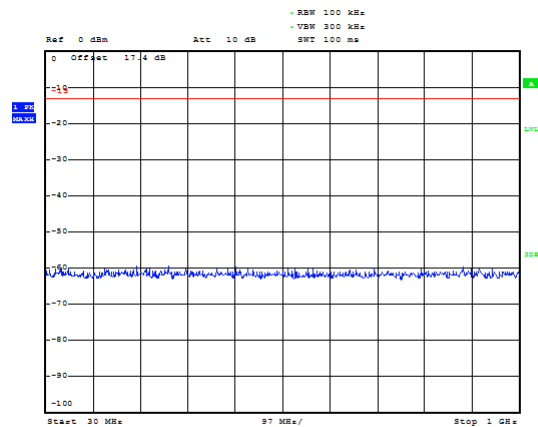


GSM 1900 CH-High 1GHz~3GHz

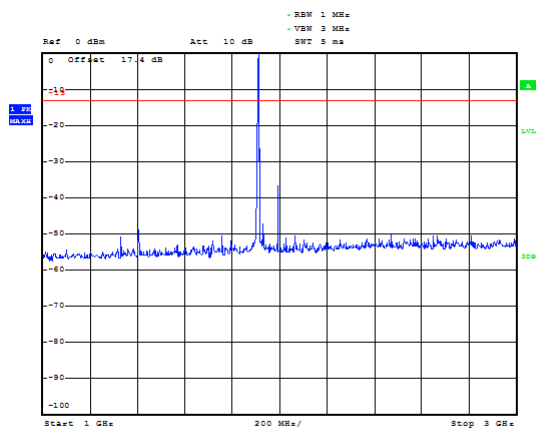


WCDMA BAND II CH-Low 1GHz~3GHz

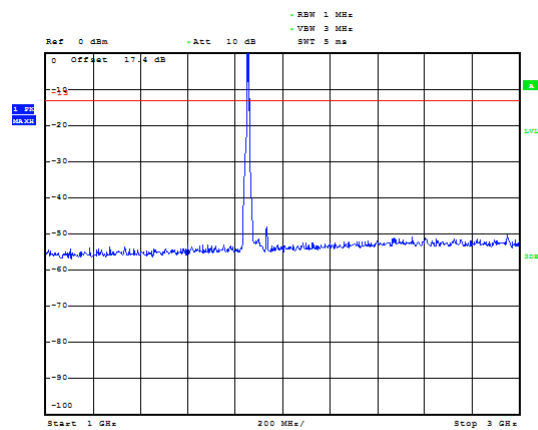

GSM 1900 CH-High 3GHz~20GHz

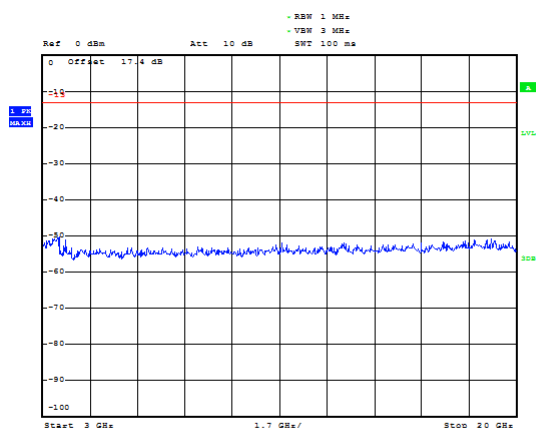


WCDMA BAND II CH-Low 3GHz~20GHz

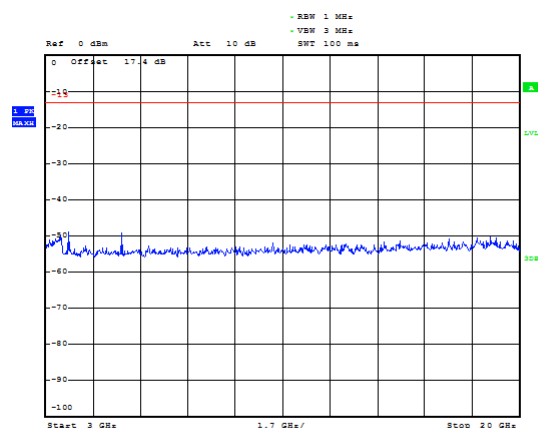





WCDMA Band II CH- Middle 30MHz~1GHz

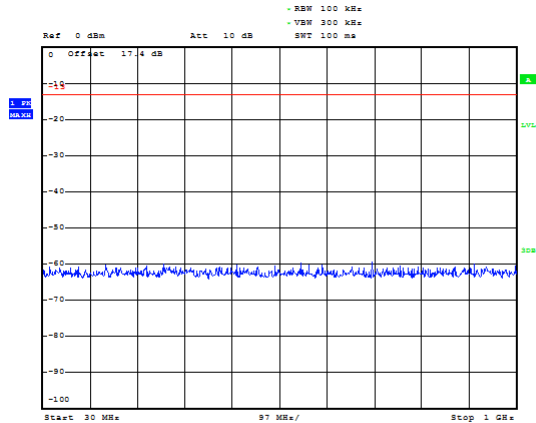


WCDMA Band II CH- High 30MHz~1GHz

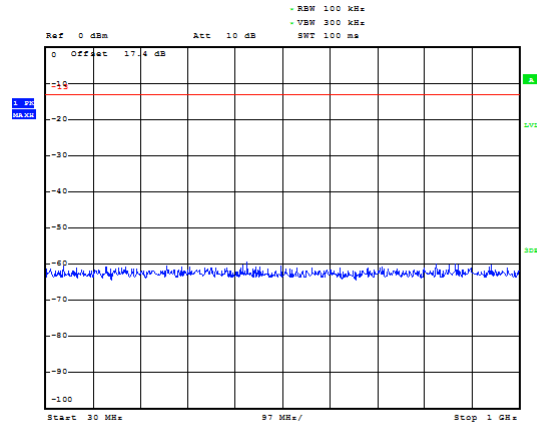


WCDMA BAND II CH-Middle 1GHz~3GHz

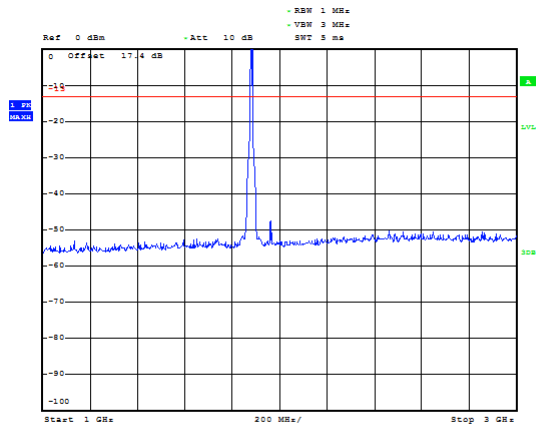


WCDMA BAND II CH-High 1GHz~3GHz

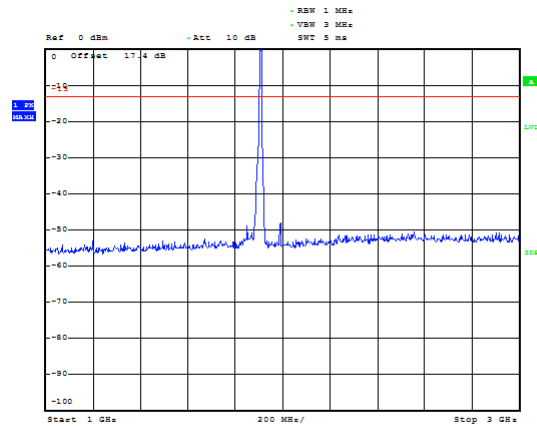

WCDMA BAND II CH-Middle 3GHz~20GHz

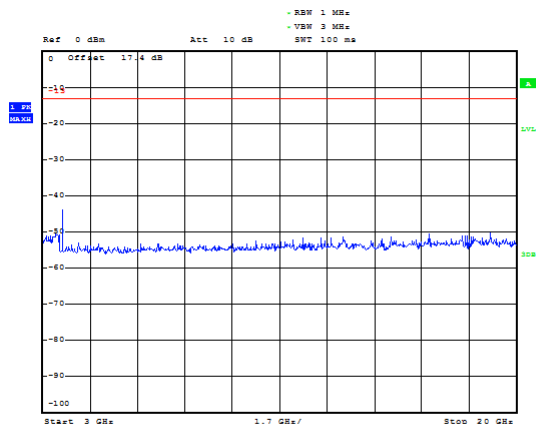

WCDMA BAND II CH-High 3GHz~20GHz

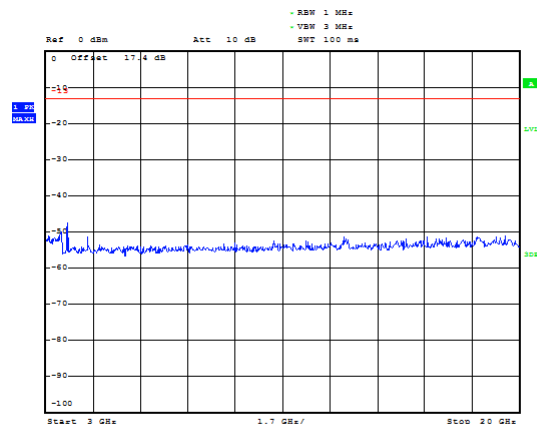

5.8.Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI/TIA-603-E (2016).
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~ 1GHz

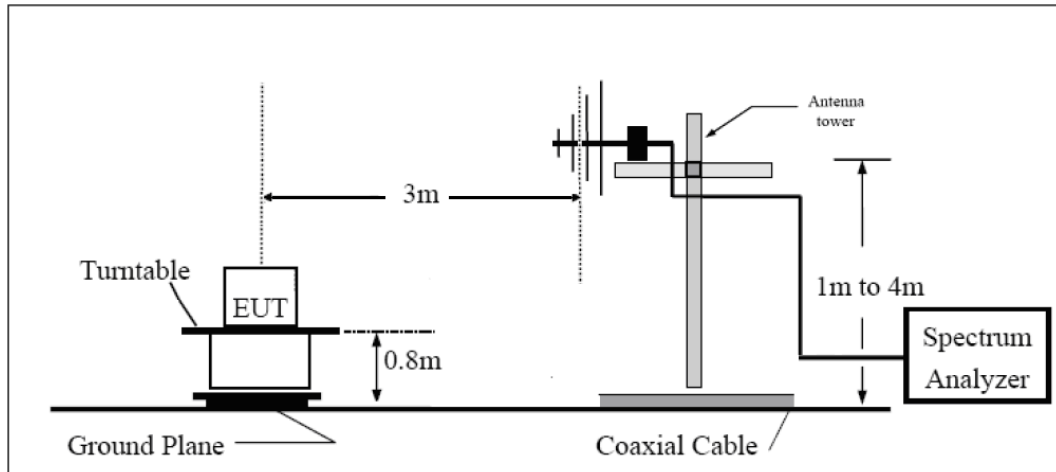

Above 1GHz

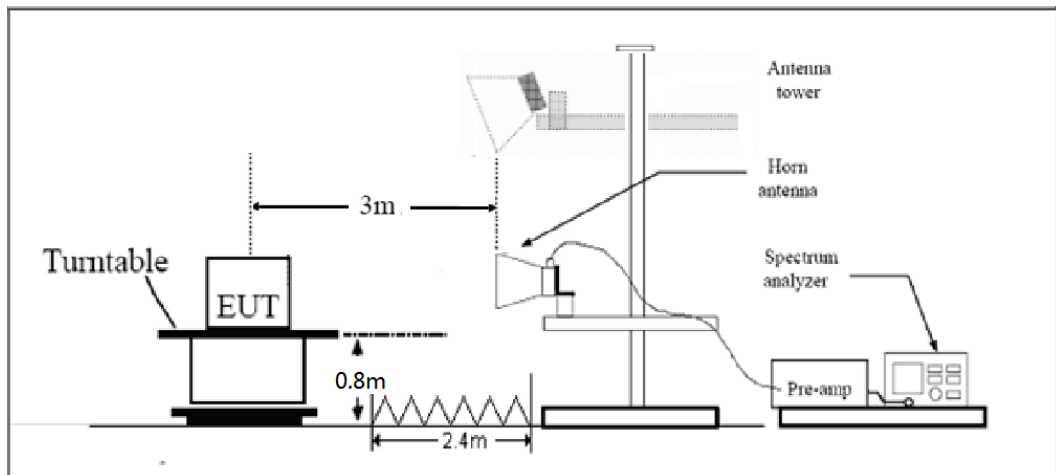

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 1900 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.4	-53.45	5.1	11.05	Horizontal	-47.5	-13.0	34.5	135
3	5550.6	-45.23	5.42	12.65	Horizontal	-38.0	-13.0	25.0	45
4	7400.8	-52.45	6.7	13.85	Horizontal	-45.3	-13.0	32.3	180
5	9251.0	-52.04	7.01	14.75	Horizontal	-44.3	-13.0	31.3	270
6	11101.2	-49.67	7.48	15.95	Horizontal	-41.2	-13.0	28.2	135
7	12951.4	-50.24	7.51	16.55	Horizontal	-41.2	-13.0	28.2	45
8	14801.6	-45.61	8.24	15.35	Horizontal	-38.5	-13.0	25.5	270
9	16651.8	-47.04	8.41	14.95	Horizontal	-40.5	-13.0	27.5	180
10	18502.0	-	-	-	-	-	-	-	-
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

GSM 1900 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-51.75	5.1	11.05	Horizontal	-45.8	-13.0	32.8	135
3	5640.0	-44.83	5.42	12.65	Horizontal	-37.6	-13.0	24.6	45
4	7520.0	-53.95	6.7	13.85	Horizontal	-46.8	-13.0	33.8	180
5	9400.0	-51.74	7.01	14.75	Horizontal	-44.0	-13.0	31.0	270
6	11280.0	-50.57	7.48	15.95	Horizontal	-42.1	-13.0	29.1	135
7	13160.0	-50.84	7.51	16.55	Horizontal	-41.8	-13.0	28.8	45
8	15040.0	-47.91	8.24	15.35	Horizontal	-40.8	-13.0	27.8	270
9	16920.0	-46.14	8.41	14.95	Horizontal	-39.6	-13.0	26.6	180
10	18800.0	-	-	-	-	-	-	-	-
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

GSM 1900 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3819.6	-49.65	5.1	11.05	Horizontal	-43.7	-13.0	30.7	135
3	5729.4	-41.73	5.42	12.65	Horizontal	-34.5	-13.0	21.5	45
4	7639.2	-54.45	6.7	13.85	Horizontal	-47.3	-13.0	34.3	180
5	9549.0	-53.74	7.01	14.75	Horizontal	-46.0	-13.0	33.0	270
6	11458.8	-49.57	7.48	15.95	Horizontal	-41.1	-13.0	28.1	135
7	13368.6	-49.54	7.51	16.55	Horizontal	-40.5	-13.0	27.5	45
8	15278.4	-48.31	8.24	15.35	Horizontal	-41.2	-13.0	28.2	180
9	17188.2	-46.94	8.41	14.95	Horizontal	-40.4	-13.0	27.4	225
10	19098.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3704.8	-49.25	5.1	11.05	Horizontal	-43.3	-13.0	30.3	180
3	5557.2	-56.33	5.42	12.65	Horizontal	-49.1	-13.0	36.1	270
4	7409.6	-53.05	6.7	13.85	Horizontal	-45.9	-13.0	32.9	135
5	9262.0	-51.24	7.01	14.75	Horizontal	-43.5	-13.0	30.5	45
6	11114.4	-49.57	7.48	15.95	Horizontal	-41.1	-13.0	28.1	270
7	12966.8	-49.44	7.51	16.55	Horizontal	-40.4	-13.0	27.4	180
8	14819.2	-45.91	8.24	15.35	Horizontal	-38.8	-13.0	25.8	270
9	16671.6	-46.64	8.41	14.95	Horizontal	-40.1	-13.0	27.1	135
10	18524.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-45.65	5.1	11.05	Horizontal	-39.7	-13.0	26.7	270
3	5640.0	-55.43	5.42	12.65	Horizontal	-48.2	-13.0	35.2	135
4	7520.0	-53.85	6.7	13.85	Horizontal	-46.7	-13.0	33.7	45
5	9400.0	-52.14	7.01	14.75	Horizontal	-44.4	-13.0	31.4	270
6	11280.0	-51.27	7.48	15.95	Horizontal	-42.8	-13.0	29.8	180
7	13160.0	-50.84	7.51	16.55	Horizontal	-41.8	-13.0	28.8	270
8	15040.0	-47.01	8.24	15.35	Horizontal	-39.9	-13.0	26.9	135
9	16920.0	-45.94	8.41	14.95	Horizontal	-39.4	-13.0	26.4	180
10	18800.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

WCDMA Band II CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3813.8	-47.75	5.1	11.05	Horizontal	-41.8	-13.0	28.8	135
3	5722.8	-55.43	5.42	12.65	Horizontal	-48.2	-13.0	35.2	45
4	7630.4	-55.05	6.7	13.85	Horizontal	-47.9	-13.0	34.9	270
5	9538.0	-51.04	7.01	14.75	Horizontal	-43.3	-13.0	30.3	180
6	11445.6	-50.57	7.48	15.95	Horizontal	-42.1	-13.0	29.1	270
7	13353.2	-51.04	7.51	16.55	Horizontal	-42.0	-13.0	29.0	135
8	15260.8	-49.31	8.24	15.35	Horizontal	-42.2	-13.0	29.2	225
9	17168.4	-46.24	8.41	14.95	Horizontal	-39.7	-13.0	26.7	90
10	19076.0	-	-	-	-	-	-	-	-

Note: 1. The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2018-05-13	2019-05-12
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Agilent	N9010A	MY47191109	2018-05-20	2019-05-19
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Signal generator	R&S	SMB 100A	102594	2018-05-13	2019-05-12
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2014-12-06	2019-12-05
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Horn Antenna	ETS-Lindgren	3160-09	00102644	2015-01-30	2020-01-29
RF Cable	Agilent	SMA 15cm	0001	/	/
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
Software	R&S	EMC32	V9.26.0	/	/
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-07	2019-05-06

*****END OF REPORT *****