

FCC PART 15C
Measurement and Test Report
For
Shenzhen Qiuyu Electronic Co., Ltd

FCC ID: 2AL64-CF1018F

FCC Rule(s)/Methods:	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10:2013
Product Description:	PhotoSpring View 10
Trademark	N/A
Model/Type reference.:	PSV-101
Report No.:	BSL24110502750010F-1
Date of receipt of test item:	Oct 24, 2024
Date of sampling:	Oct 25, 2024
Tested Date:	Oct 25, 2024 to Nov 25, 2024
Issued Date:	Nov 25, 2024
Tested By:	Lris Yao/ Engineer
Reviewed By:	Levi Xiao/ EMC Manager
Approved & Authorized By:	Salon Ouyang / PSQ Manager

Lris Yao

Levi Xiao

Salon ouyang

BSL Testing Co.,LTD.
1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People' s Republic of China
Tel: 400-882-9628 Fax: 86- 755-26508703

Table of Contents

	Page
1. VERSION	4
2. SUMMARY OF TEST RESULTS	5
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 RADIATED EMISSION LIMITS	16
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	17
4.2.4 TEST SETUP	17
4.2.5 EUT OPERATING CONDITIONS	18
4.2.6 TEST RESULTS	18
5.RADIATED BAND EMISSIONMEASUREMENT	27
5.1 TEST REQUIREMENT:	27
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM TEST STANDARD	27
5.4 TEST SETUP	28
5.5 EUT OPERATING CONDITIONS	28
5.6 TEST RESULT	29
6.POWER SPECTRAL DENSITY TEST	33
6.1 APPLIED PROCEDURES / LIMIT	33
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33

6.5 EUT OPERATION CONDITIONS	33
6.6 TEST RESULT	34
7. CHANNEL BANDWIDTH	34
7.1 APPLIED PROCEDURES / LIMIT	39
7.2 TEST PROCEDURE	39
7.3 DEVIATION FROM STANDARD	39
7.4 TEST SETUP	39
7.5 EUT OPERATION CONDITIONS	39
7.6 TEST RESULT	40
8. PEAK OUTPUT POWER TEST	45
8.1 APPLIED PROCEDURES/LIMIT	45
8.2 TEST PROCEDURE	45
8.3 DEVIATION FROM STANDARD	45
8.4 TEST SETUP	45
8.5 EUT OPERATION CONDITIONS	45
8.6 TEST RESULT	46
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	47
9.1 APPLICABLE STANDARD	47
9.2 TEST PROCEDURE	47
9.3 DEVIATION FROM STANDARD	47
9.4 TEST SETUP	47
9.5 EUT OPERATION CONDITIONS	47
9.6 TEST RESULTS	47
10. ANTENNA REQUIREMENT	64
11. TEST SETUP PHOTO	65
12. EUT CONSTRUCTIONAL DETAILS	65

1. VERSION

ReportNo.	Version	Description	Approved
BSL24110502750010F-1	Rev.01	Initial issue of report	Nov 25, 2024

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C KDB 558074 D01			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth&	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.247(d)	Conducted Spurious Emission	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

BSL TESTING CO., LTD

Add. : 1/F, Building B, Xinshidai GR Park, Shiyao Street, Bao'an District, Shenzhen, Shiyao Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

FCC Test Firm Registration Number: 562200

Designation Number: CN1338

IC Registered No.: 11093A

Designation Number: CN0019

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Applicant:	Shenzhen Qiuyu Electronic Co., Ltd
Address of applicant:	3F, E Building, Hongzhuyongqi Industrial Park, Lezhujiao village, xixiang town, Bao'an District ,Shenzhen, China
Manufacturer:	Shenzhen Qiuyu Electronic Co., Ltd
Address of manufacturer:	3F, E Building, Hongzhuyongqi Industrial Park, Lezhujiao village, xixiang town, Bao'an District ,Shenzhen, China
Product Name:	PhotoSpring View 10
Model No.:	PSV-101
Test Model:	PSV-101
Model Different.:	N/A
Serial No.:	N/A
HVIN/Hardware version:	V1.0
FVIN/Software version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(H20) Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	FPC antenna
Antenna gain:	2.11dBi
Adapter:	Manufacturer: SHENZHEN SMROX ELECTRONOC CP.,LTD Model: XSC-0502000 Input: AC100-240Vac, 50/60Hz Output: DC 5V, 2A
Power supply:	DC 5V from Adapter DC 3.7V from Battery

Operation Frequency each of channel							
Channel	Frequency	Chann el	Frequency	Chann el	Frequency	Chann el	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	/
Lowest channel	2412MHz	/
Middle channel	2437MHz	/
Highest channel	2462MHz	/

3.2 DESCRIPTION OF TEST MODES


Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	/
Data rate	1Mbps	6Mbps	6.5Mbps	/

Test Software	TROLiNIK
Power level setup	<13dBm

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	BSL252	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	BSL552	2024-10-27	2025-10-26
Coaxial Switch	ANRITSU CORP	MP59B	BSL225	2024-10-27	2025-10-26
ENV216 2-L-V-NETZNACH B.DE	ROHDE&SCHWARZ	ENV216	BSL226	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL227	N/A	N/A
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Thermo meter	KTJ	TA328	BSL233	2024-10-27	2025-10-26
Absorbing clamp	Elektronik-Feinmechanik	MDS21	BSL229	2024-10-27	2025-10-26
LISN	R&S	ENV216	308	2024-10-27	2025-10-26
LISN	R&S	ENV216	314	2024-10-27	2025-10-26

Radiation Test equipment					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)*6.4(H)	BSL250	2024-10-27	2025-10-26
Control Room	ZhongYu Electron	6.2(L)*2.5(W)*2.4(H)	BSL251	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESU26	BSL203	2024-10-27	2025-10-26
BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	BSL214	2024-10-27	2025-10-26
Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	BSL208	2024-10-27	2025-10-26
Horn Antenna	ETS-LINDGREN	3160	BSL217	2024-10-27	2025-10-26
EMI Test Software	AUDIX	E3	N/A	N/A	N/A
Coaxial Cable	BSL	N/A	BSL213	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL211	2024-10-27	2025-10-26
Coaxial cable	BSL	N/A	BSL210	2024-10-27	2025-10-26
Coaxial Cable	BSL	N/A	BSL212	2024-10-27	2025-10-26
Amplifier(100kHz-3 GHz)	HP	8347A	BSL204	2024-10-27	2025-10-26
Amplifier(2GHz-20 GHz)	HP	84722A	BSL206	2024-10-27	2025-10-26
Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	BSL218	2024-10-27	2025-10-26
Band filter	Amindeon	82346	BSL219	2024-10-27	2025-10-26
Power Meter	Anritsu	ML2495A	BSL540	2024-10-27	2025-10-26
Power Sensor	Anritsu	MA2411B	BSL541	2024-10-27	2025-10-26
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	BSL575	2024-10-27	2025-10-26
Splitter	Agilent	11636B	BSL237	2024-10-27	2025-10-26
Loop Antenna	ZHINAN	ZN30900A	BSL534	2024-10-27	2025-10-26
Breitband hornantenne	SCHWARZBECK	BBHA 9170	BSL579	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-02	BSL574	2024-10-27	2025-10-26
Amplifier	TDK	PA-02-03	BSL576	2024-10-27	2025-10-26
PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	BSL578	2024-10-27	2025-10-26

RF Conducted Test:					
Test Equipment	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
MXA Signal Analyzer	Agilent	N9020A	BSL566	2024-10-27	2025-10-26
EMI Test Receiver	R&S	ESCI 7	BSL552	2024-10-27	2025-10-26
Spectrum Analyzer	Agilent	E4440A	BSL533	2024-10-27	2025-10-26
MXG vector Signal Generator	Agilent	N5182A	BSL567	2024-10-27	2025-10-26
ESG Analog Signal Generator	Agilent	E4428C	BSL568	2024-10-27	2025-10-26
USB RF Power Sensor	DARE	RPR3006W	BSL569	2024-10-27	2025-10-26
RF Switch Box	Shongyi	RFSW3003328	BSL571	2024-10-27	2025-10-26
Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	BSL572	2024-10-27	2025-10-26

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

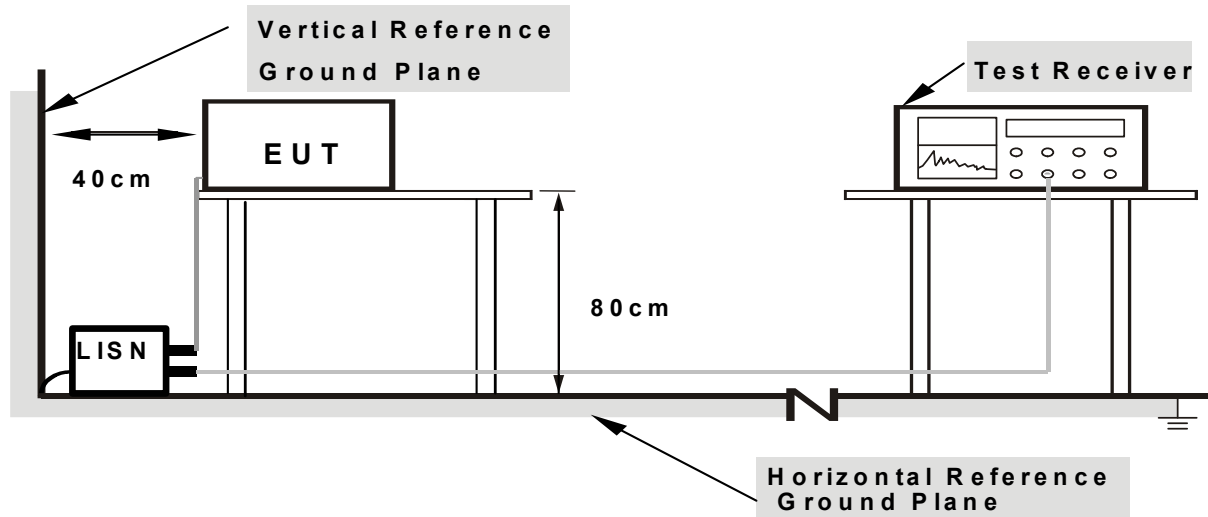

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

4.1.6 TEST RESULTS


PASS

Note : Worst case is 802.11b 2412MHz TX

Temperature :	23℃	Relative Humidity:	51%
Pressure :	101 kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test channel	802.11b 2412MHz TX (Worst case)

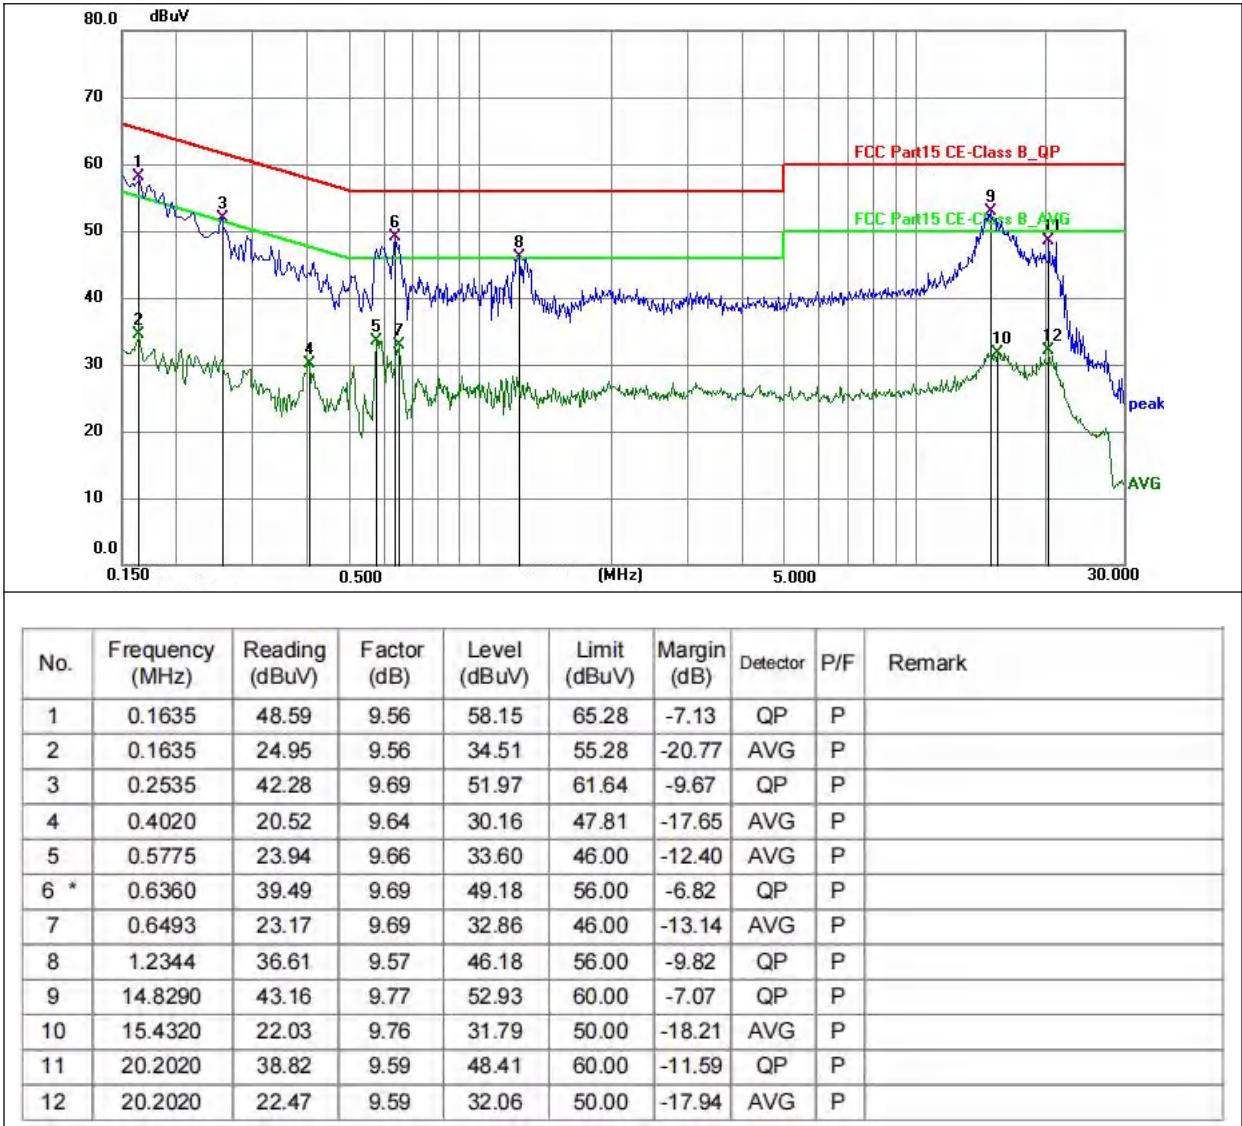

Temperature :	23℃	Relative Humidity:	51%
Pressure :	101 kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test channel	802.11b 2412MHz TX (Worst case)

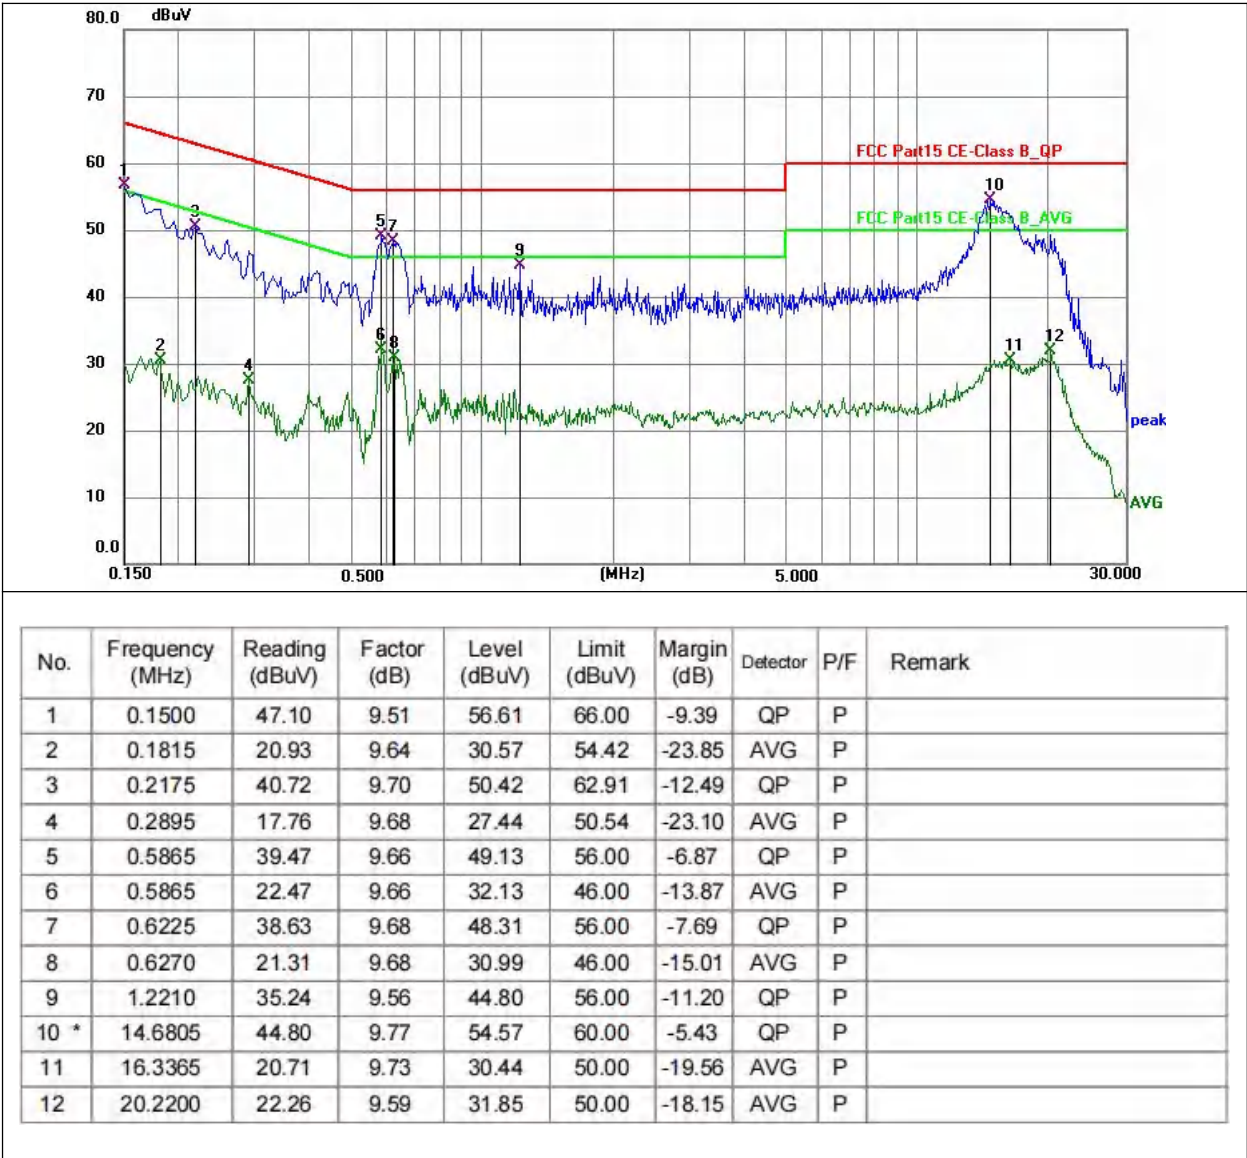

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

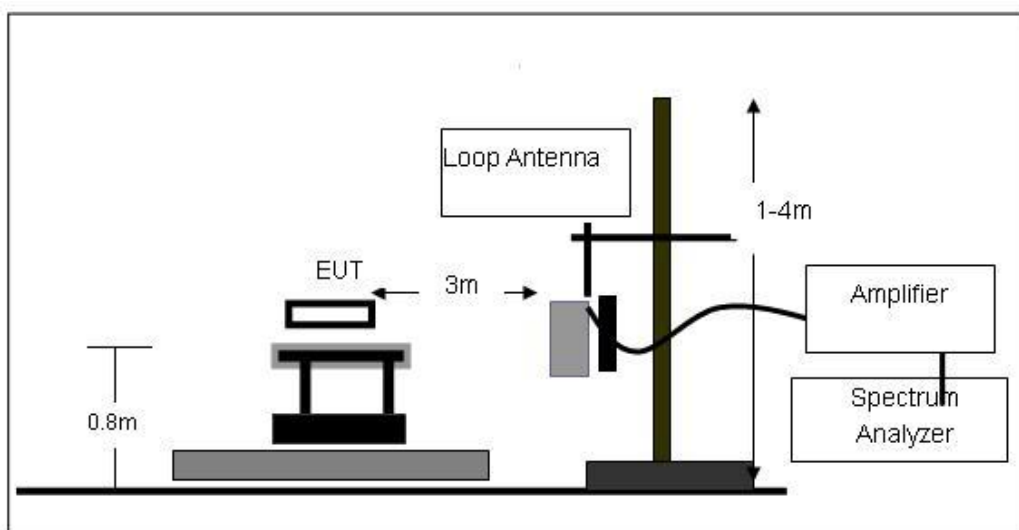

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

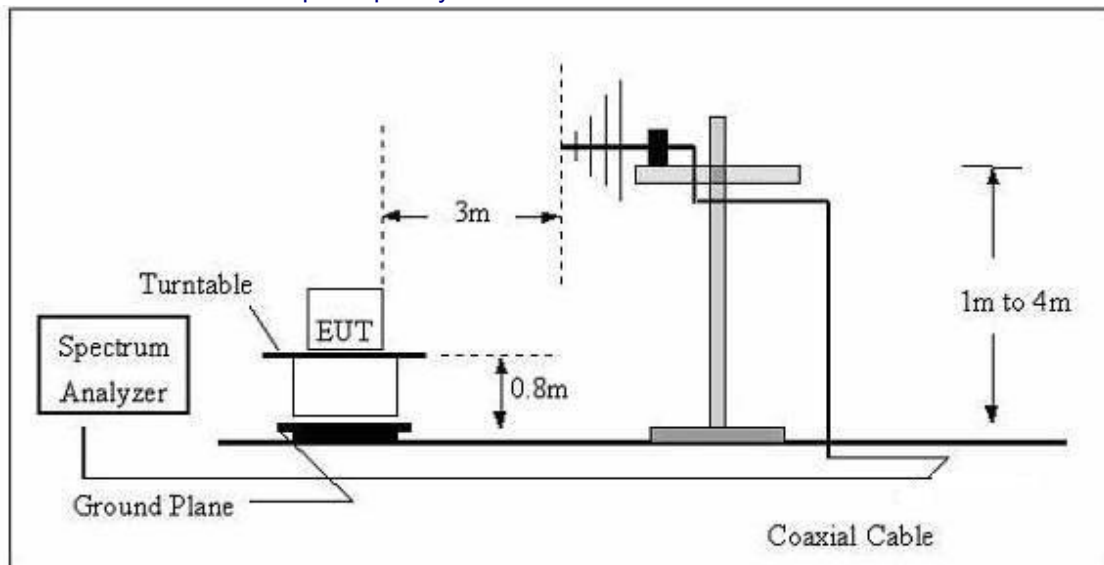

(C) Radiated Emission Test-Up Frequency Above 1GHz

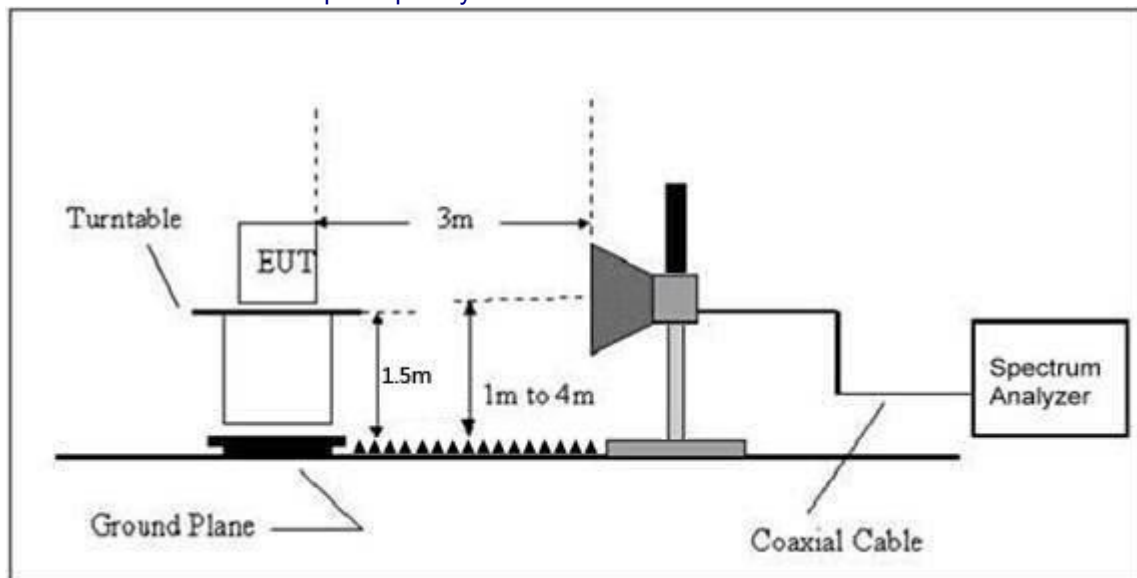

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.6 TEST RESULTS

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	23°C	Relative Humidity:	51%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b 2412MHz TX (Worst case)

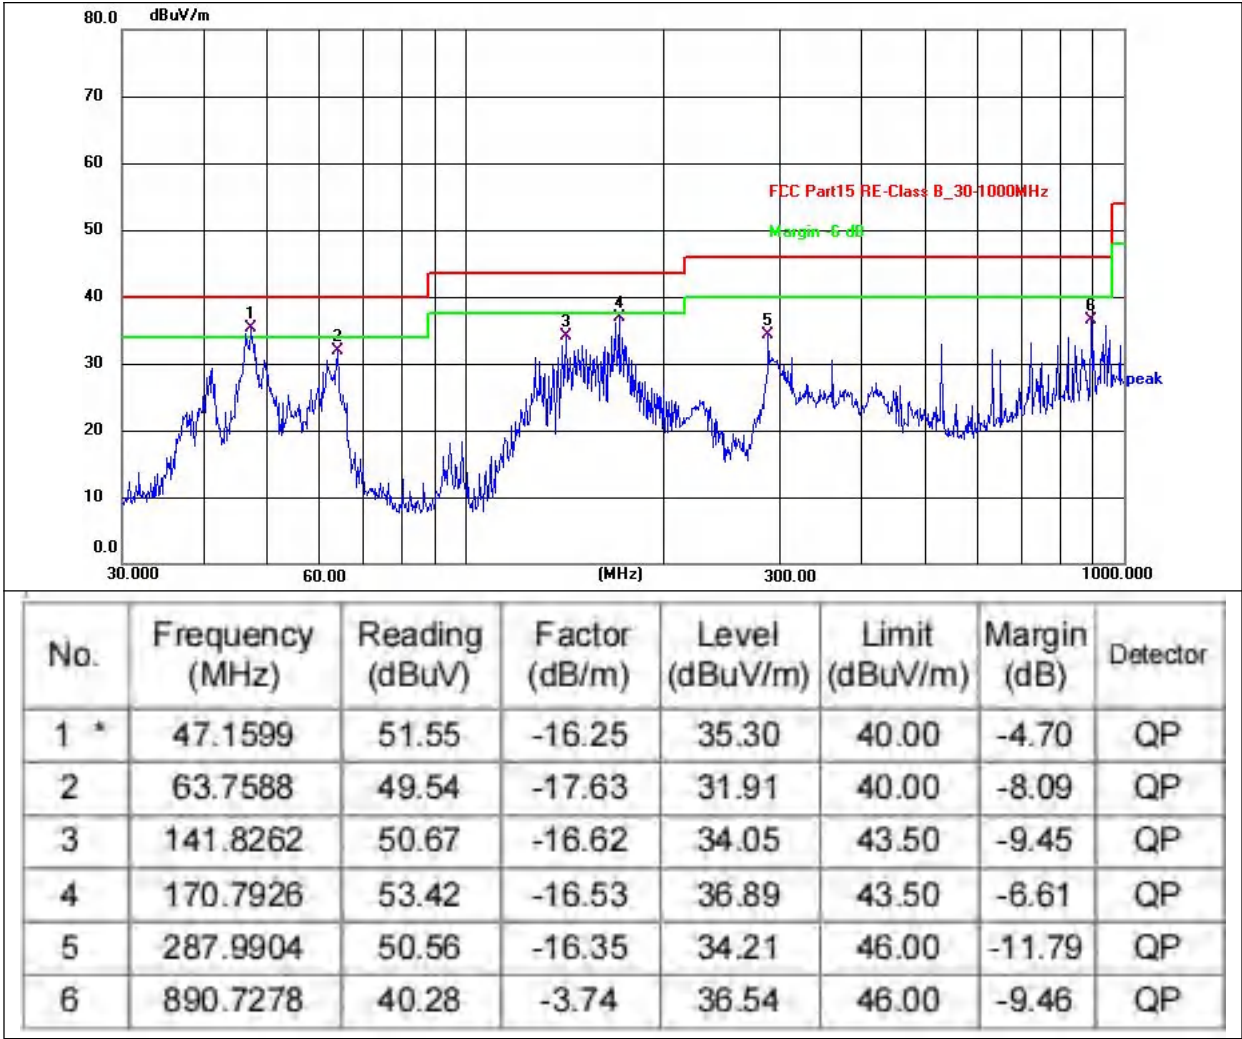

Temperature:	23°C	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode	802.11b 2412MHz TX (Worst case)

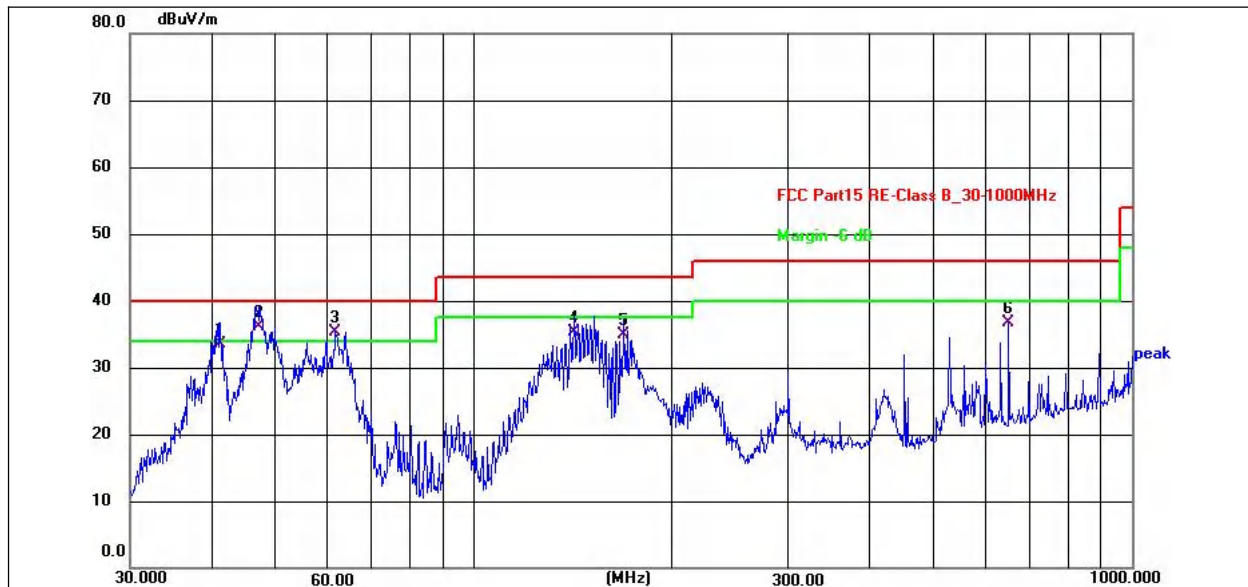

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.1320	49.26	-15.76	33.50	40.00	-6.50	QP
2 *	46.9948	52.43	-16.23	36.20	40.00	-3.80	QP
3 !	61.5618	52.69	-17.47	35.22	40.00	-4.78	QP
4	141.8262	52.02	-16.62	35.40	43.50	-8.10	QP
5	169.0054	51.36	-16.36	35.00	43.50	-8.50	QP
6	649.6597	44.54	-7.75	36.79	46.00	-9.21	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11b mode

1GHz~25GHz

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	51.82	30.55	5.77	24.66	51.70	74.00	-22.30	Pk
V	4824.00	43.53	30.55	5.77	24.66	43.41	54.00	-10.59	AV
V	7236.00	54.21	30.33	6.32	24.55	54.75	74.00	-19.25	Pk
V	7236.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
V	9648.00	51.42	30.85	7.45	24.69	52.71	74.00	-21.29	Pk
V	9648.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12060.00	51.64	31.02	8.99	25.57	55.18	74.00	-18.82	Pk
V	12060.00	43.42	31.02	8.99	25.57	46.96	54.00	-7.04	AV
H	4824.00	52.91	30.55	5.77	24.66	52.79	74.00	-21.21	Pk
H	4824.00	43.14	30.55	5.77	24.66	43.02	54.00	-10.98	AV
H	7236.00	54.85	30.33	6.32	24.55	55.39	74.00	-18.61	Pk
H	7236.00	43.84	30.33	6.32	24.55	44.38	54.00	-9.62	AV
H	9648.00	54.99	30.85	7.45	24.69	56.28	74.00	-17.72	Pk
H	9648.00	43.04	30.85	7.45	24.69	44.33	54.00	-9.67	AV
H	12060.00	51.31	31.02	8.99	25.57	54.85	74.00	-19.15	Pk
H	12060.00	43.75	31.02	8.99	25.57	47.29	54.00	-6.71	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.43	30.55	5.77	24.66	52.31	74.00	-21.69	Pk
V	4874.00	43.93	30.55	5.77	24.66	43.81	54.00	-10.19	AV
V	7311.00	53.15	30.33	6.32	24.55	53.69	74.00	-20.31	Pk
V	7311.00	43.02	30.33	6.32	24.55	43.56	54.00	-10.44	AV
V	9748.00	54.86	30.85	7.45	24.69	56.15	74.00	-17.85	Pk
V	9748.00	43.09	30.85	7.45	24.69	44.38	54.00	-9.62	AV
V	12185.00	53.28	31.02	8.99	25.57	56.82	74.00	-17.18	Pk
V	12185.00	43.27	31.02	8.99	25.57	46.81	54.00	-7.19	AV
H	4874.00	52.56	30.55	5.77	24.66	52.44	74.00	-21.56	Pk
H	4874.00	43.83	30.55	5.77	24.66	43.71	54.00	-10.29	AV
H	7311.00	51.68	30.33	6.32	24.55	52.22	74.00	-21.78	Pk
H	7311.00	43.78	30.33	6.32	24.55	44.32	54.00	-9.68	AV
H	9748.00	53.47	30.85	7.45	24.69	54.76	74.00	-19.24	Pk
H	9748.00	43.79	30.85	7.45	24.69	45.08	54.00	-8.92	AV
H	12185.00	54.21	31.02	8.99	25.57	57.75	74.00	-16.25	Pk
H	12185.00	43.39	31.02	8.99	25.57	46.93	54.00	-7.07	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	51.11	30.55	5.77	24.66	50.99	74.00	-23.01	Pk
V	4924.00	43.96	30.55	5.77	24.66	43.84	54.00	-10.16	AV
V	7386.00	54.11	30.33	6.32	24.55	54.65	74.00	-19.35	Pk
V	7386.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
V	9848.00	53.86	30.85	7.45	24.69	55.15	74.00	-18.85	Pk
V	9848.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
V	12310.00	51.82	31.02	8.99	25.57	55.36	74.00	-18.64	Pk
V	12310.00	43.82	31.02	8.99	25.57	47.36	54.00	-6.64	AV
H	4924.00	53.87	30.55	5.77	24.66	53.75	74.00	-20.25	Pk
H	4924.00	43.88	30.55	5.77	24.66	43.76	54.00	-10.24	AV
H	7386.00	54.14	30.33	6.32	24.55	54.68	74.00	-19.32	Pk
H	7386.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
H	9848.00	54.72	30.85	7.45	24.69	56.01	74.00	-17.99	Pk
H	9848.00	43.62	30.85	7.45	24.69	44.91	54.00	-9.09	AV
H	12310.00	50.08	31.02	8.99	25.57	53.62	74.00	-20.38	Pk
H	12310.00	43.36	31.02	8.99	25.57	46.90	54.00	-7.10	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4824.00	53.08	30.55	5.77	24.66	52.96	74.00	-21.04	Pk
V	4824.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
V	7236.00	54.43	30.33	6.32	24.55	54.97	74.00	-19.03	Pk
V	7236.00	43.98	30.33	6.32	24.55	44.52	54.00	-9.48	AV
V	9648.00	52.85	30.85	7.45	24.69	54.14	74.00	-19.86	Pk
V	9648.00	43.54	30.85	7.45	24.69	44.83	54.00	-9.17	AV
V	12060.00	54.68	31.02	8.99	25.57	58.22	74.00	-15.78	Pk
V	12060.00	43.92	31.02	8.99	25.57	47.46	54.00	-6.54	AV
H	4824.00	53.97	30.55	5.77	24.66	53.85	74.00	-20.15	Pk
H	4824.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
H	7236.00	54.41	30.33	6.32	24.55	54.95	74.00	-19.05	Pk
H	7236.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
H	9648.00	54.47	30.85	7.45	24.69	55.76	74.00	-18.24	Pk
H	9648.00	43.67	30.85	7.45	24.69	44.96	54.00	-9.04	AV
H	12060.00	53.41	31.02	8.99	25.57	56.95	74.00	-17.05	Pk
H	12060.00	43.96	31.02	8.99	25.57	47.50	54.00	-6.50	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amp lifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	54.34	30.55	5.77	24.66	54.22	74.00	-19.78	Pk
V	4874.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
V	7311.00	53.73	30.33	6.32	24.55	54.27	74.00	-19.73	Pk
V	7311.00	43.47	30.33	6.32	24.55	44.01	54.00	-9.99	AV
V	9748.00	51.27	30.85	7.45	24.69	52.56	74.00	-21.44	Pk
V	9748.00	43.29	30.85	7.45	24.69	44.58	54.00	-9.42	AV
V	12185.00	50.54	31.02	8.99	25.57	54.08	74.00	-19.92	Pk
V	12185.00	43.06	31.02	8.99	25.57	46.60	54.00	-7.40	AV
H	4874.00	50.64	30.55	5.77	24.66	50.52	74.00	-23.48	Pk
H	4874.00	43.84	30.55	5.77	24.66	43.72	54.00	-10.28	AV
H	7311.00	51.80	30.33	6.32	24.55	52.34	74.00	-21.66	Pk
H	7311.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
H	9748.00	53.32	30.85	7.45	24.69	54.61	74.00	-19.39	Pk
H	9748.00	43.87	30.85	7.45	24.69	45.16	54.00	-8.84	AV
H	12185.00	54.32	31.02	8.99	25.57	57.86	74.00	-16.14	Pk
H	12185.00	43.09	31.02	8.99	25.57	46.63	54.00	-7.37	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	50.33	30.55	5.77	24.66	50.21	74.00	-23.79	Pk
V	4924.00	43.35	30.55	5.77	24.66	43.23	54.00	-10.77	AV
V	7386.00	50.81	30.33	6.32	24.55	51.35	74.00	-22.65	Pk
V	7386.00	43.22	30.33	6.32	24.55	43.76	54.00	-10.24	AV
V	9848.00	54.63	30.85	7.45	24.69	55.92	74.00	-18.08	Pk
V	9848.00	43.78	30.85	7.45	24.69	45.07	54.00	-8.93	AV
V	12310.00	52.17	31.02	8.99	25.57	55.71	74.00	-18.29	Pk
V	12310.00	43.16	31.02	8.99	25.57	46.70	54.00	-7.30	AV
H	4924.00	52.28	30.55	5.77	24.66	52.16	74.00	-21.84	Pk
H	4924.00	43.50	30.55	5.77	24.66	43.38	54.00	-10.62	AV
H	7386.00	52.20	30.33	6.32	24.55	52.74	74.00	-21.26	Pk
H	7386.00	43.50	30.33	6.32	24.55	44.04	54.00	-9.96	AV
H	9848.00	51.23	30.85	7.45	24.69	52.52	74.00	-21.48	Pk
H	9848.00	43.79	30.85	7.45	24.69	45.08	54.00	-8.92	AV
H	12310.00	54.03	31.02	8.99	25.57	57.57	74.00	-16.43	Pk
H	12310.00	43.66	31.02	8.99	25.57	47.20	54.00	-6.80	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low Channel:2412MHz									
V	4924.00	50.18	30.55	5.77	24.66	50.06	74.00	-23.94	Pk
V	4924.00	43.58	30.55	5.77	24.66	43.46	54.00	-10.54	AV
V	7386.00	53.75	30.33	6.32	24.55	54.29	74.00	-19.71	Pk
V	7386.00	43.90	30.33	6.32	24.55	44.44	54.00	-9.56	AV
V	9848.00	51.16	30.85	7.45	24.69	52.45	74.00	-21.55	Pk
V	9848.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
V	12310.00	52.98	31.02	8.99	25.57	56.52	74.00	-17.48	Pk
V	12310.00	43.73	31.02	8.99	25.57	47.27	54.00	-6.73	AV
H	4924.00	50.12	30.55	5.77	24.66	50.00	74.00	-24.00	Pk
H	4924.00	43.60	30.55	5.77	24.66	43.48	54.00	-10.52	AV
H	7386.00	50.60	30.33	6.32	24.55	51.14	74.00	-22.86	Pk
H	7386.00	43.09	30.33	6.32	24.55	43.63	54.00	-10.37	AV
H	9848.00	51.21	30.85	7.45	24.69	52.50	74.00	-21.50	Pk
H	9848.00	43.88	30.85	7.45	24.69	45.17	54.00	-8.83	AV
H	12310.00	50.99	31.02	8.99	25.57	54.53	74.00	-19.47	Pk
H	12310.00	43.51	31.02	8.99	25.57	47.05	54.00	-6.95	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.02	30.55	5.77	24.66	50.90	74.00	-23.10	Pk
V	4874.00	43.97	30.55	5.77	24.66	43.85	54.00	-10.15	AV
V	7311.00	51.35	30.33	6.32	24.55	51.89	74.00	-22.11	Pk
V	7311.00	43.96	30.33	6.32	24.55	44.50	54.00	-9.50	AV
V	9748.00	52.66	30.85	7.45	24.69	53.95	74.00	-20.05	Pk
V	9748.00	43.18	30.85	7.45	24.69	44.47	54.00	-9.53	AV
V	12185.00	50.42	31.02	8.99	25.57	53.96	74.00	-20.04	Pk
V	12185.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV
H	4874.00	53.00	30.55	5.77	24.66	52.88	74.00	-21.12	Pk
H	4874.00	43.44	30.55	5.77	24.66	43.32	54.00	-10.68	AV
H	7311.00	52.68	30.33	6.32	24.55	53.22	74.00	-20.78	Pk
H	7311.00	43.17	30.33	6.32	24.55	43.71	54.00	-10.29	AV
H	9748.00	50.52	30.85	7.45	24.69	51.81	74.00	-22.19	Pk
H	9748.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
H	12185.00	53.32	31.02	8.99	25.57	56.86	74.00	-17.14	Pk
H	12185.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	50.72	30.55	5.77	24.66	50.60	74.00	-23.40	Pk
V	4924.00	43.83	30.55	5.77	24.66	43.71	54.00	-10.29	AV
V	7386.00	50.69	30.33	6.32	24.55	51.23	74.00	-22.77	Pk
V	7386.00	43.97	30.33	6.32	24.55	44.51	54.00	-9.49	AV
V	9848.00	51.97	30.85	7.45	24.69	53.26	74.00	-20.74	Pk
V	9848.00	43.24	30.85	7.45	24.69	44.53	54.00	-9.47	AV
V	12310.00	50.62	31.02	8.99	25.57	54.16	74.00	-19.84	Pk
V	12310.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV
H	4924.00	53.92	30.55	5.77	24.66	53.80	74.00	-20.20	Pk
H	4924.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
H	7386.00	51.47	30.33	6.32	24.55	52.01	74.00	-21.99	Pk
H	7386.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
H	9848.00	50.85	30.85	7.45	24.69	52.14	74.00	-21.86	Pk
H	9848.00	43.03	30.85	7.45	24.69	44.32	54.00	-9.68	AV
H	12310.00	52.47	31.02	8.99	25.57	56.01	74.00	-17.99	Pk
H	12310.00	43.47	31.02	8.99	25.57	47.01	54.00	-6.99	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5.RADIATED BAND EMISSIONMEASUREMENT**5.1 TEST REQUIREMENT:**

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Peak	1MHz	10Hz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

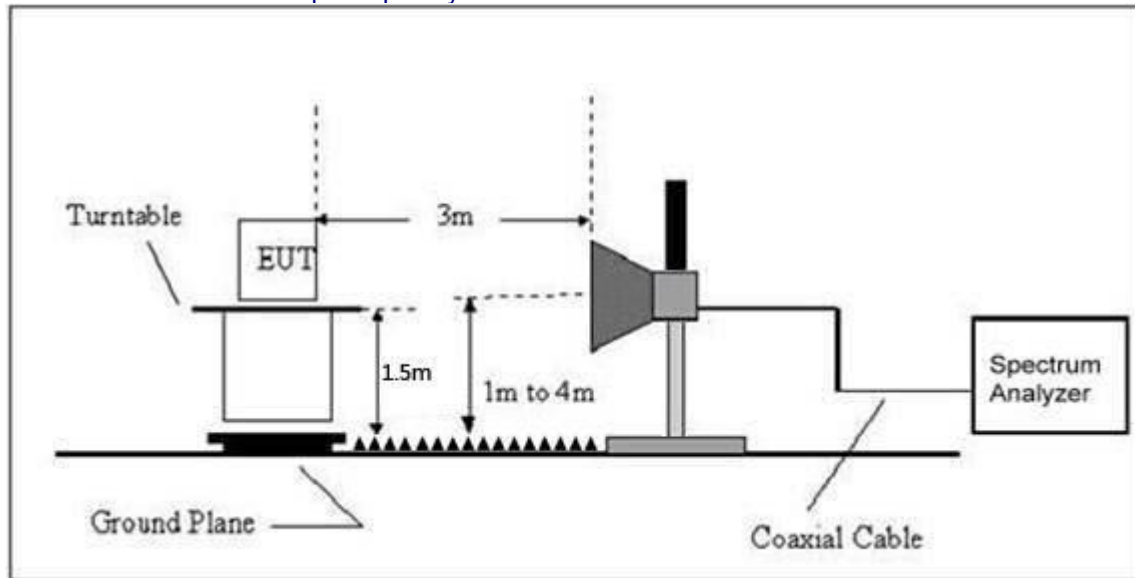


5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


5.6 TEST RESULT

All modes were tested (Worst case 802.11b)

Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/ 60Hz	Test channel	2412MHz (Worst case)

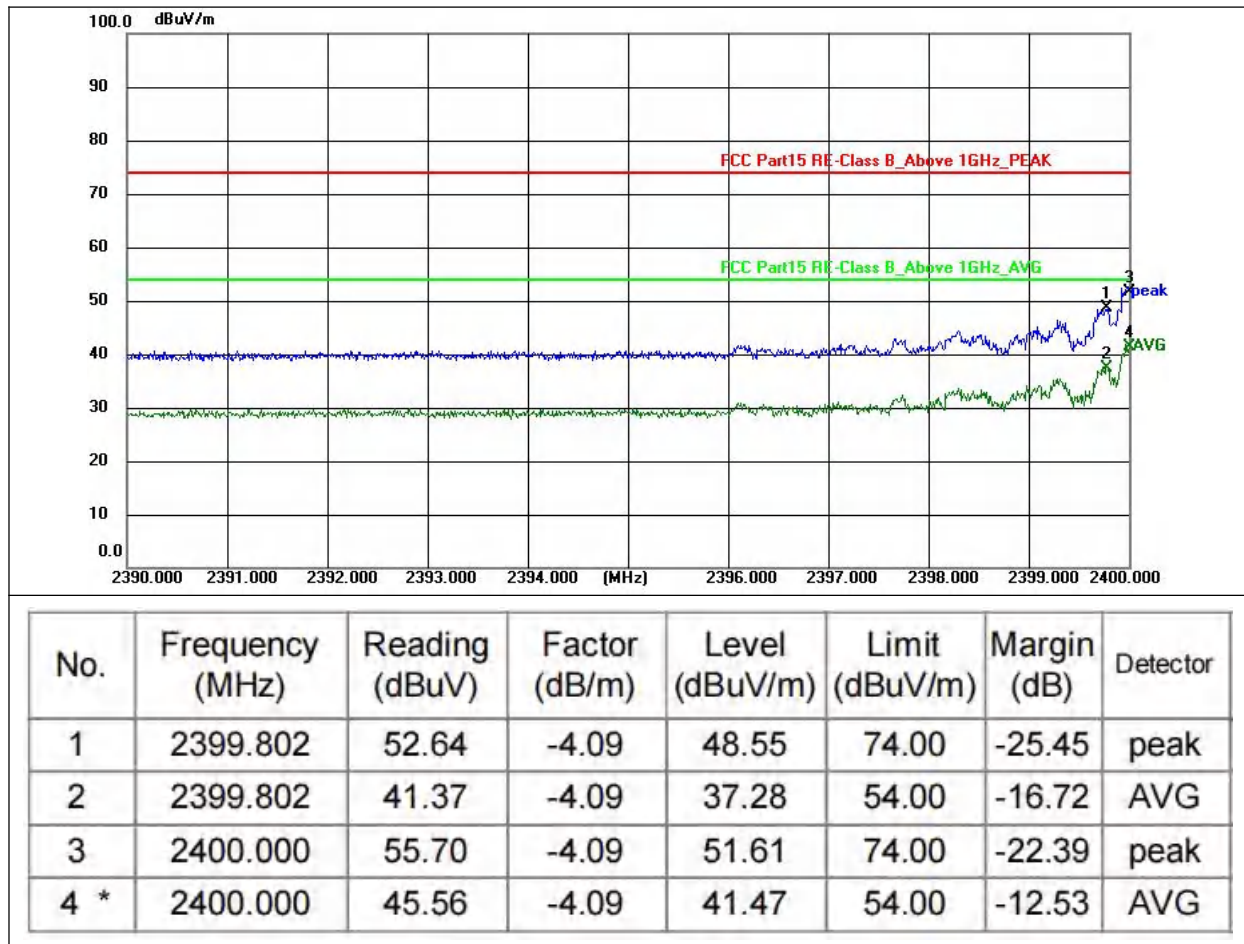


Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/ 60Hz	Test channel	2412MHz (Worst case)

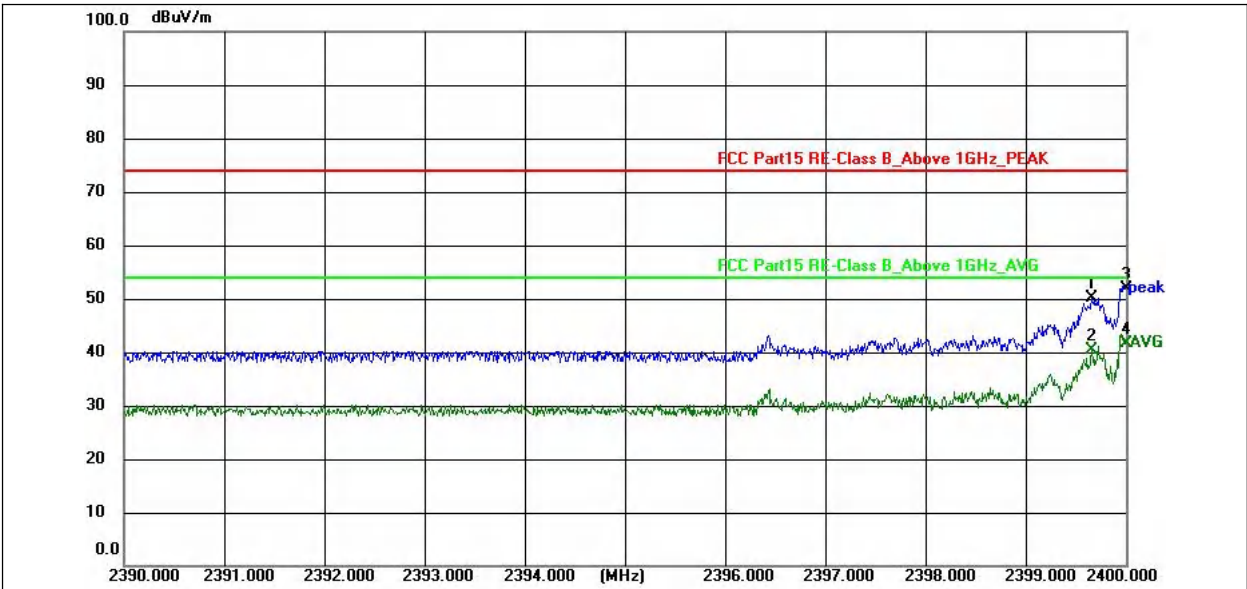


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2399.665	54.08	-3.93	50.15	74.00	-23.85	peak
2	2399.665	44.30	-3.93	40.37	54.00	-13.63	AVG
3	2400.000	55.78	-3.93	51.85	74.00	-22.15	peak
4 *	2400.000	45.58	-3.93	41.65	54.00	-12.35	AVG

Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/ 60Hz	Test channel	2462MHz (Worst case)

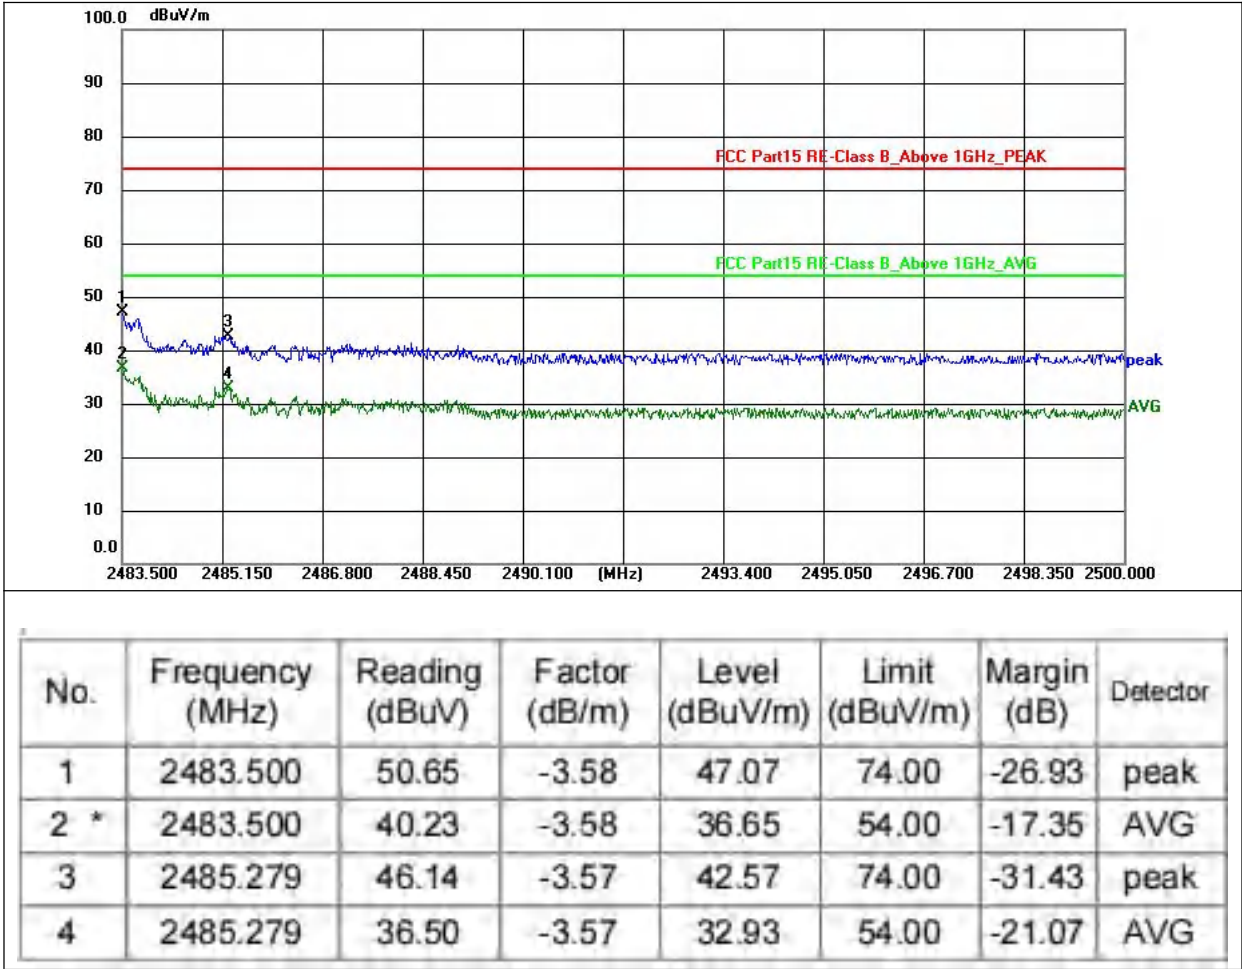

Temperature:	23℃	Relative Humidity:	51%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/ 60Hz	Test channel	2462MHz (Worst case)

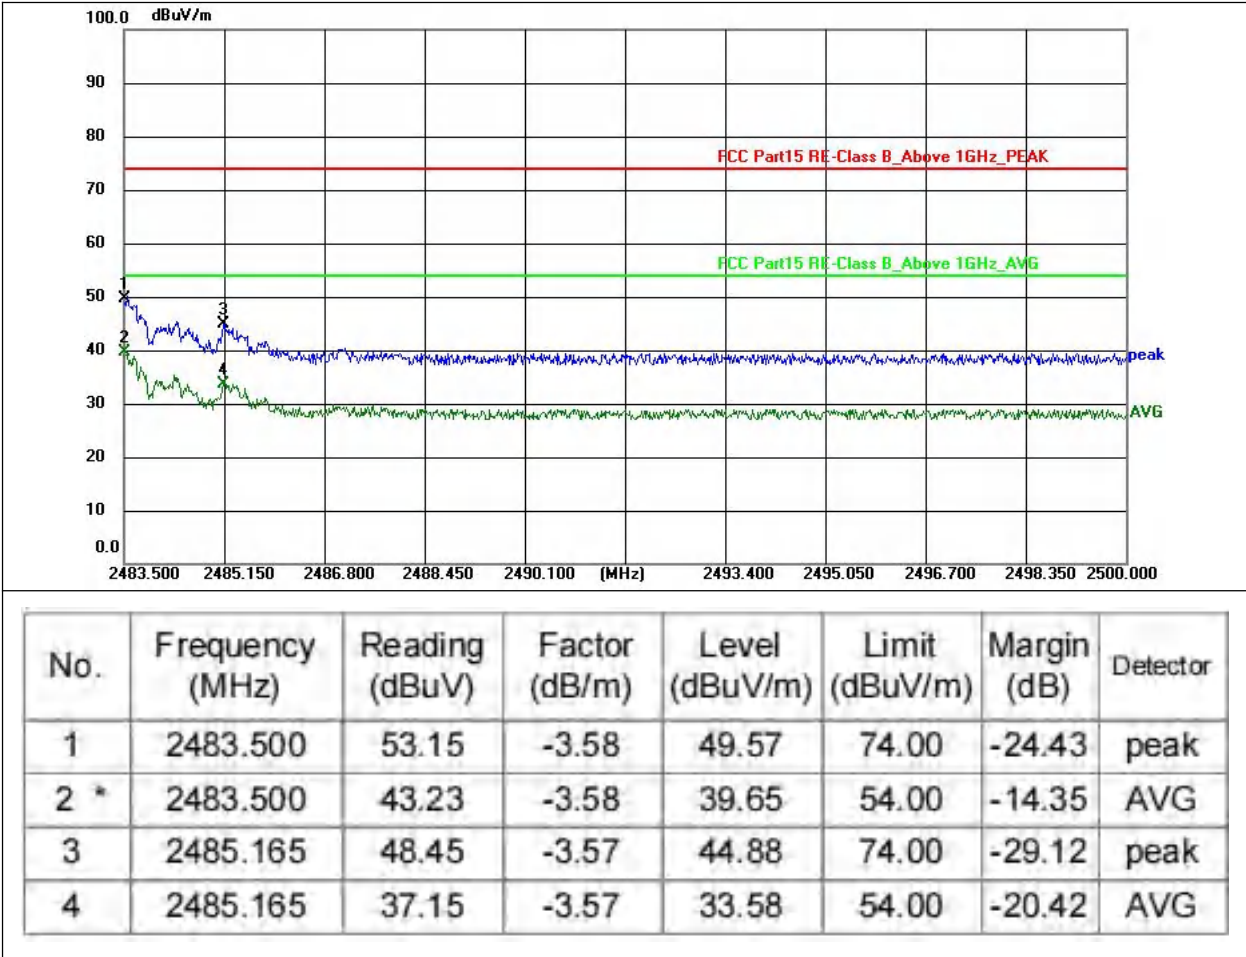

6.POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz(SISO)	2400-2483.5	PASS

6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD


No deviation.

6.4 TEST SETUP**6.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT


Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz) <=	Verdict
b	2412	-5.45	8	Pass
b	2437	-6.47	8	Pass
b	2462	-6.97	8	Pass
g	2412	-8.51	8	Pass
g	2437	-10	8	Pass
g	2462	-8.84	8	Pass
n20	2412	-8.26	8	Pass
n20	2437	-8.25	8	Pass
n20	2462	-8.36	8	Pass

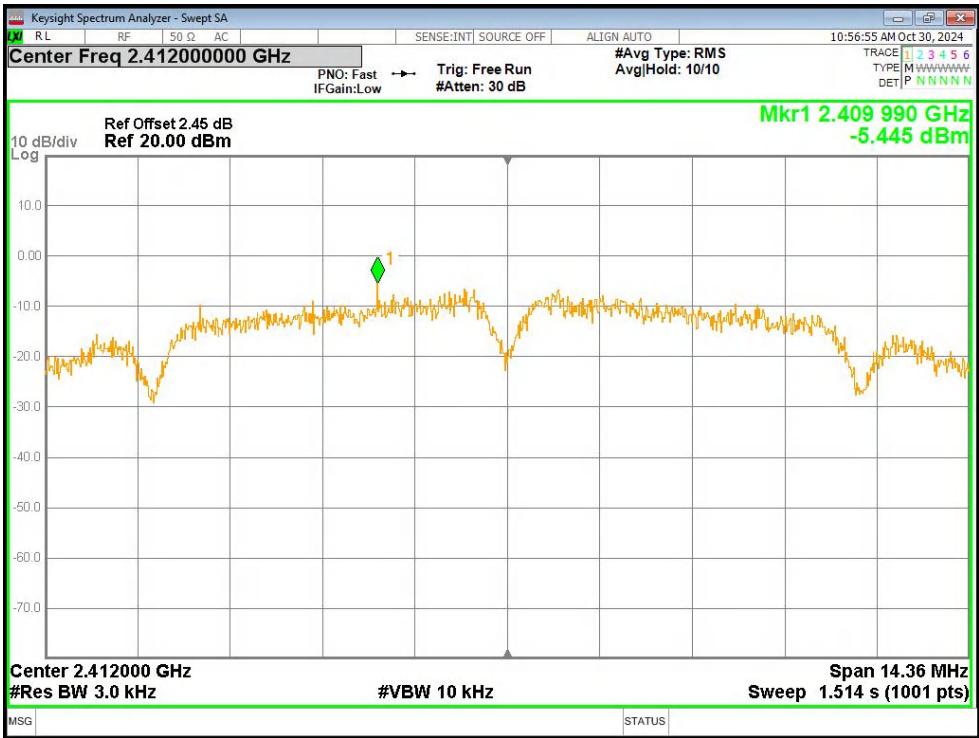


PSD NVNT b 2412MHz Ant1

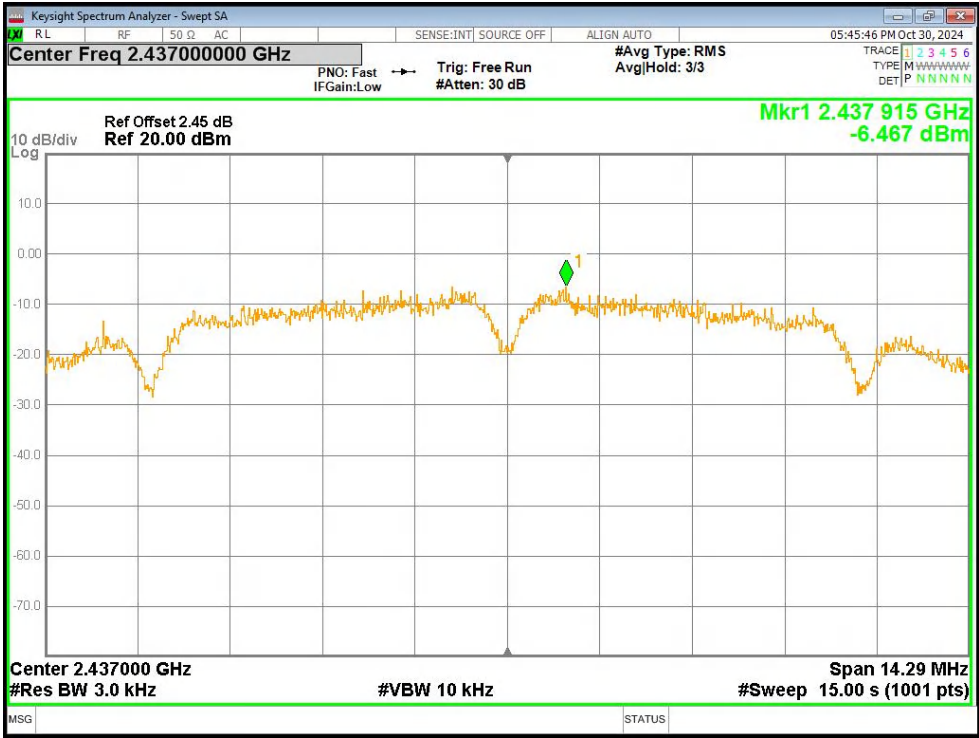


PSD NVNT b 2437MHz Ant1

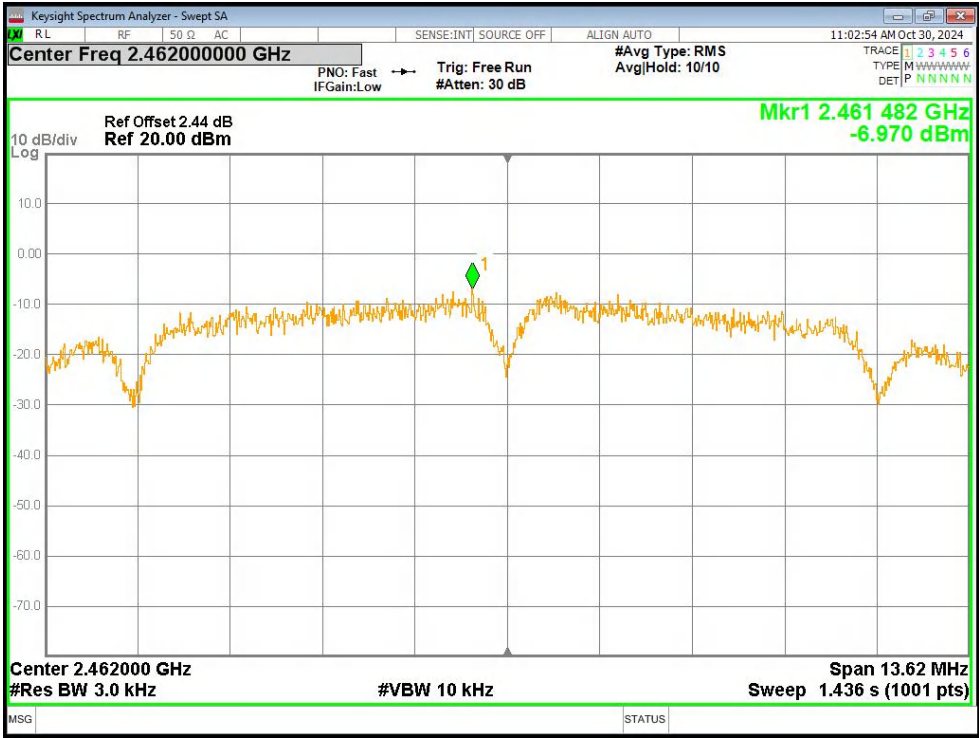


PSD NVNT b 2462MHz Ant1

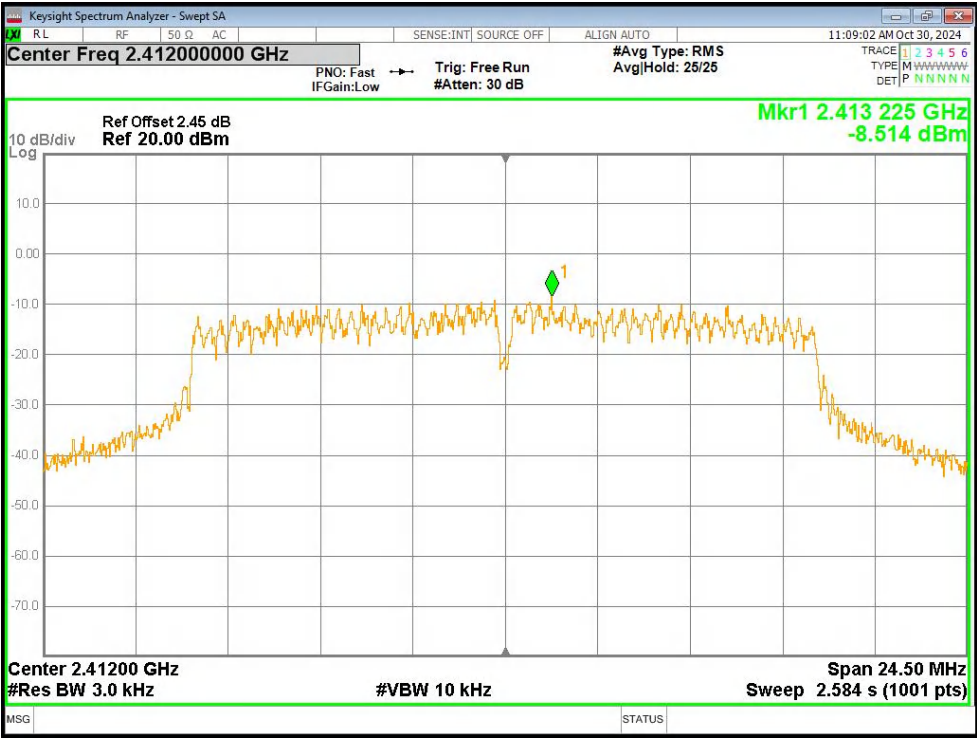


PSD NVNT g 2412MHz Ant1

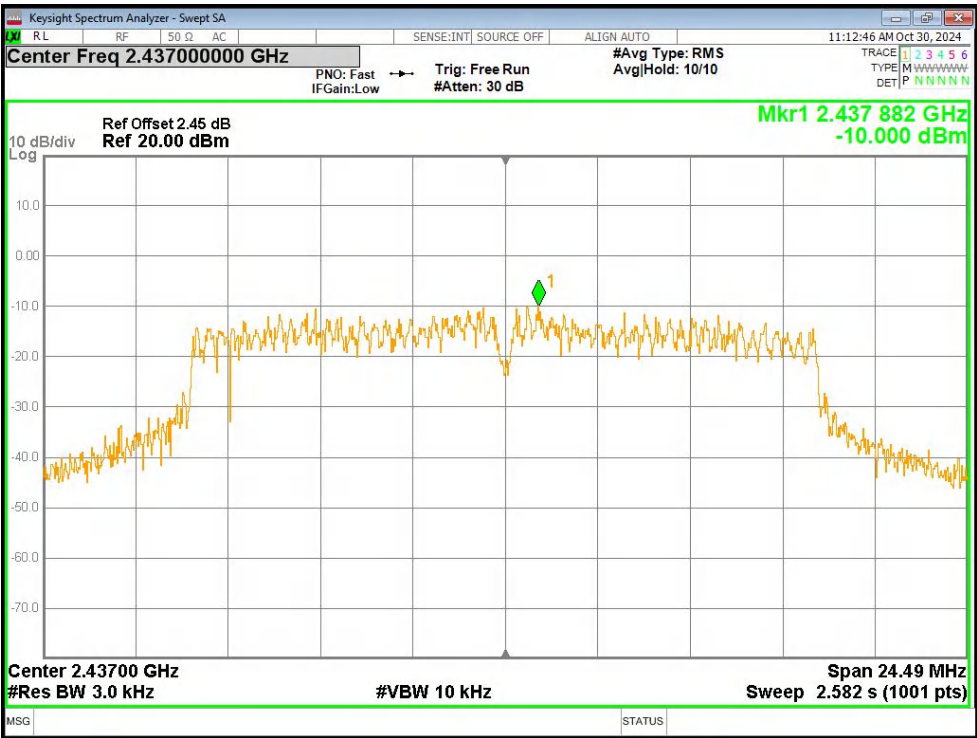


PSD NVNT g 2437MHz Ant1

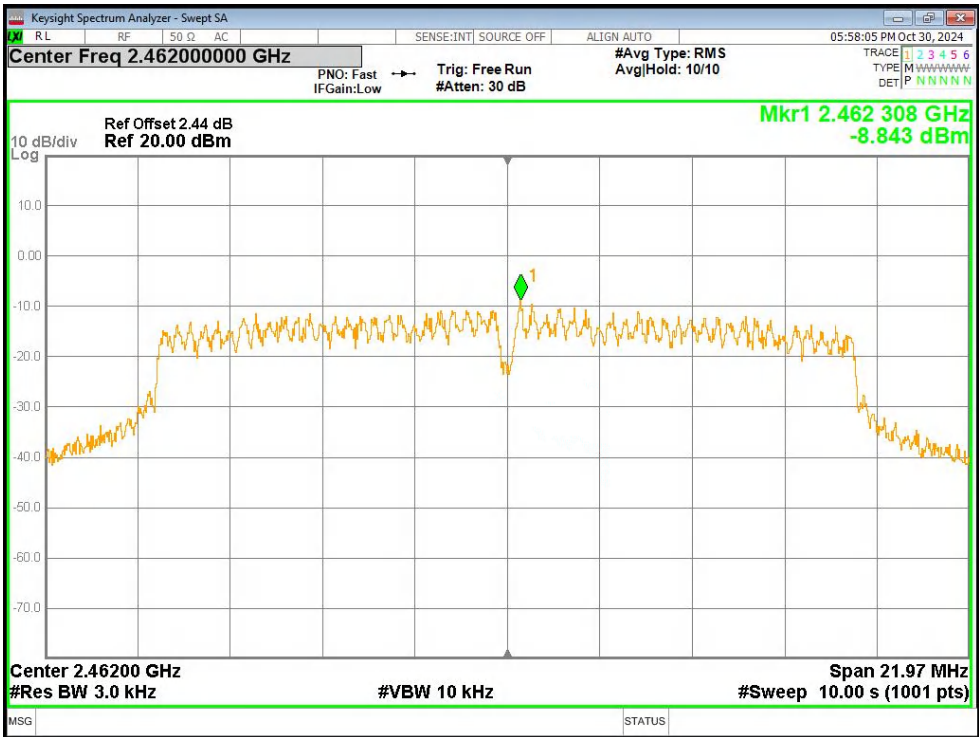


PSD NVNT g 2462MHz Ant1

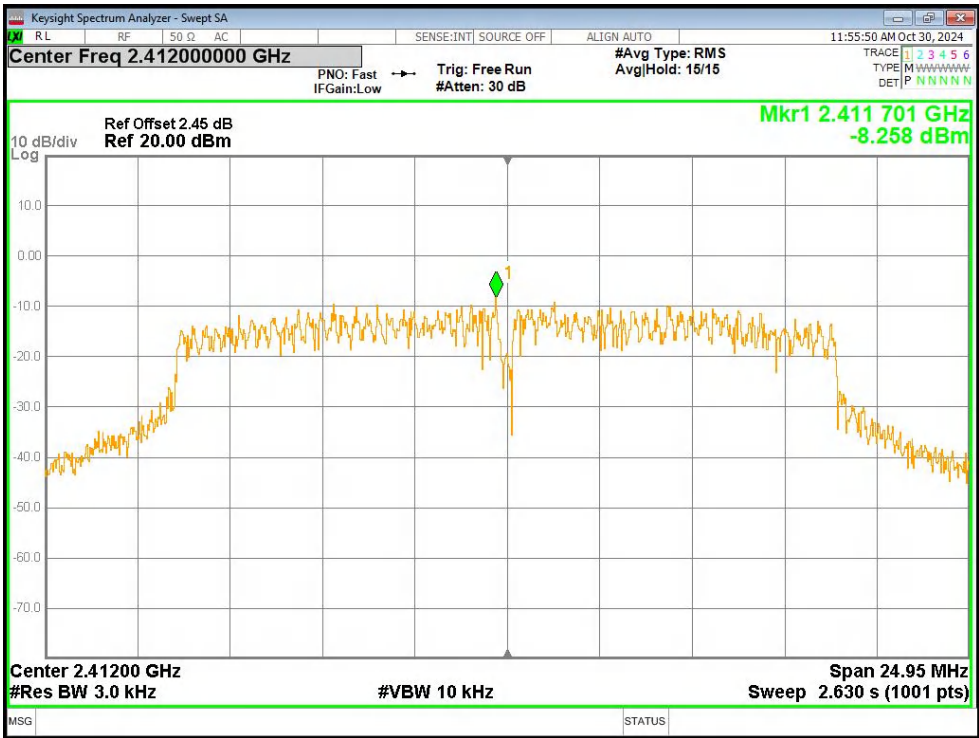

PSD NVNT n20 2412MHz Ant1

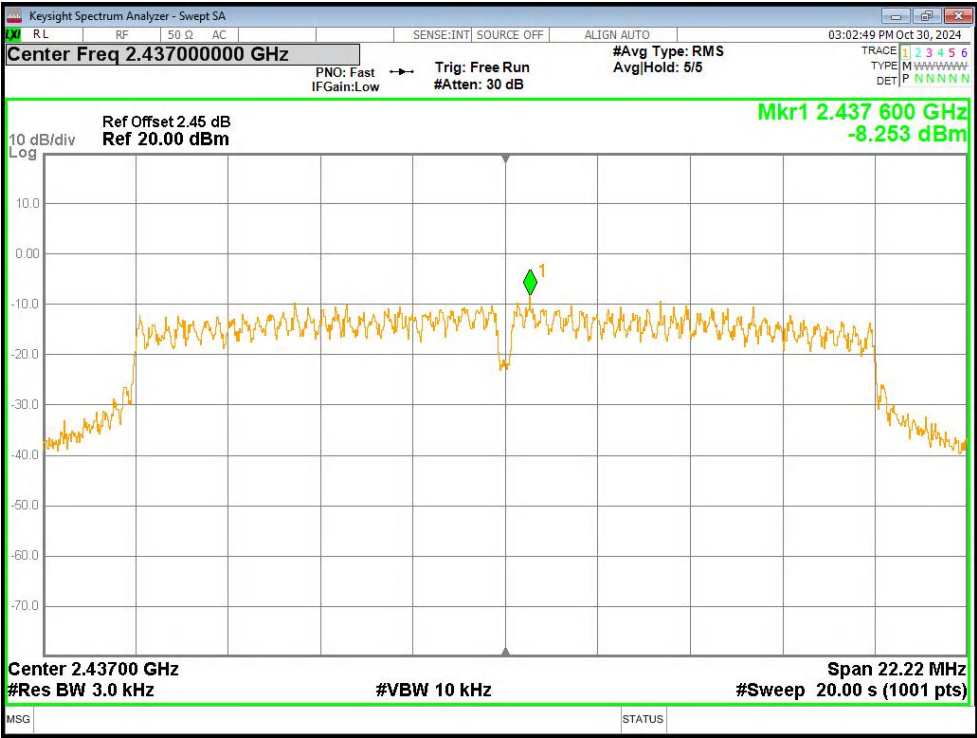

PSD NVNT n20 2437MHz Ant1

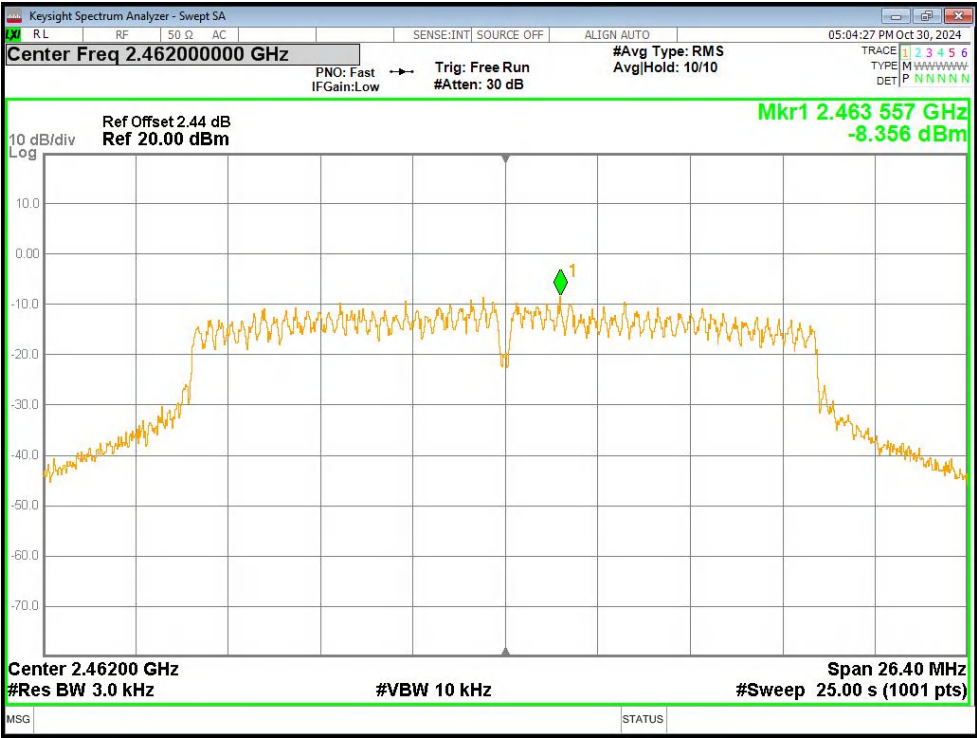

PSD NVNT n20 2462MHz Ant1

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT


Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	9.572	0.5	Pass
b	2437	9.527	0.5	Pass
b	2462	9.081	0.5	Pass
g	2412	16.336	0.5	Pass
g	2437	16.325	0.5	Pass
g	2462	14.647	0.5	Pass
n20	2412	16.631	0.5	Pass
n20	2437	14.814	0.5	Pass
n20	2462	17.597	0.5	Pass

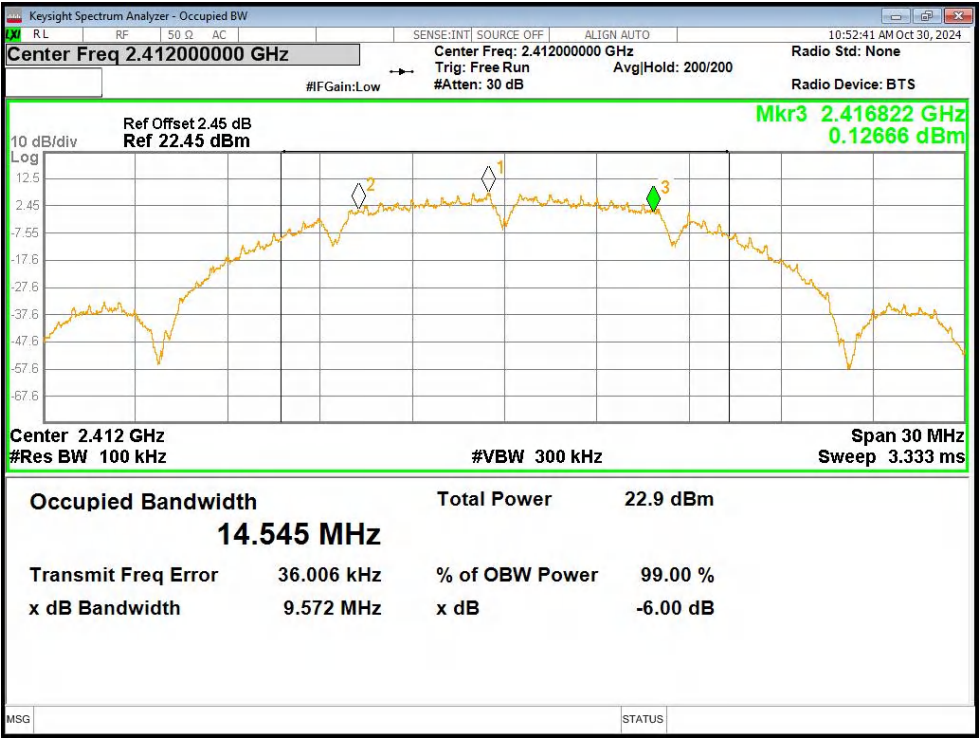


-6dB Bandwidth NVNT b 2412MHz Ant1

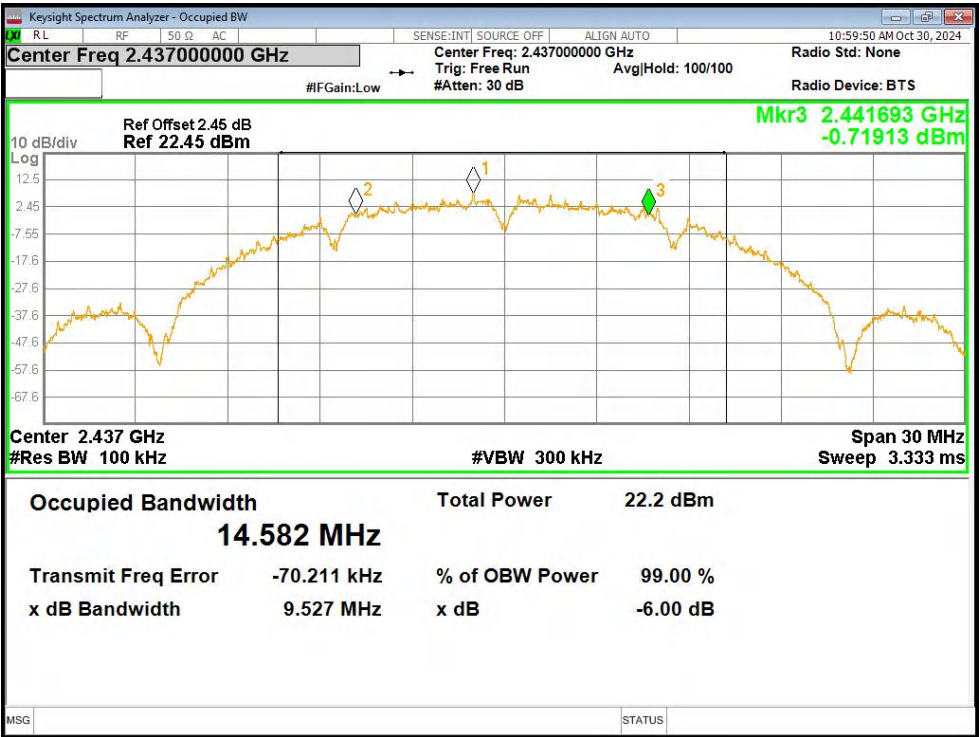


-6dB Bandwidth NVNT b 2437MHz Ant1

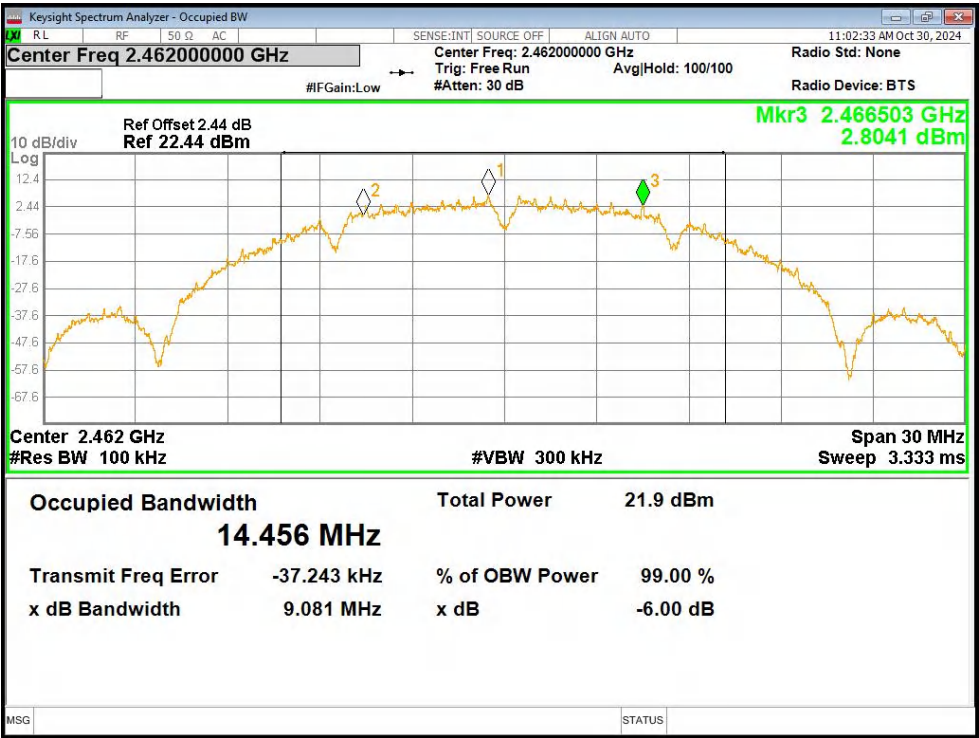


-6dB Bandwidth NVNT b 2462MHz Ant1

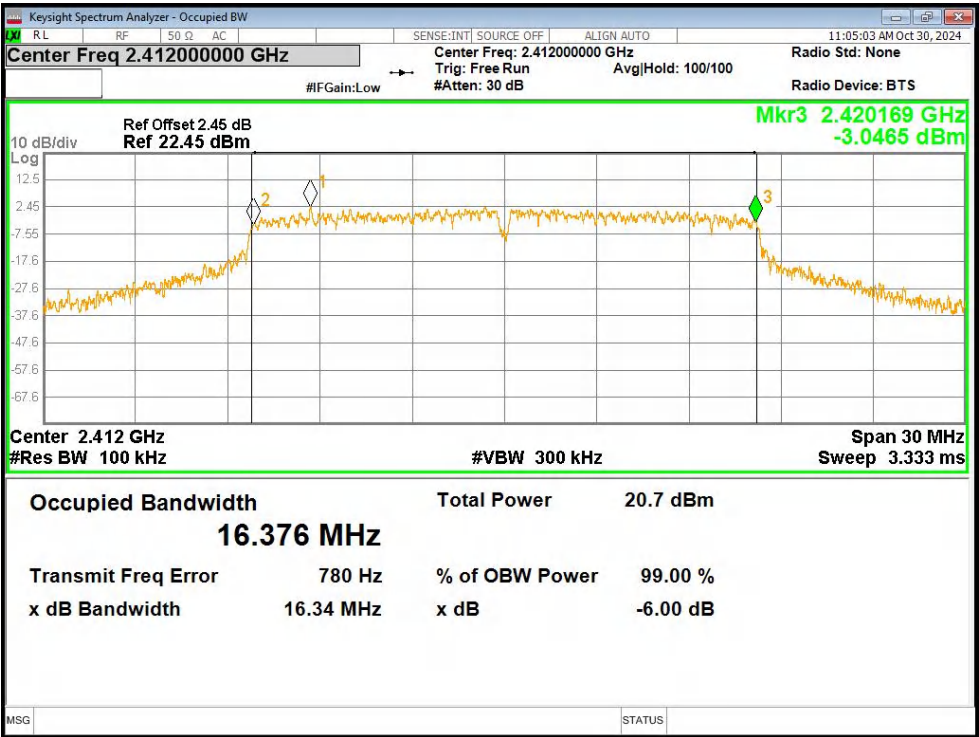


-6dB Bandwidth NVNT g 2412MHz Ant1

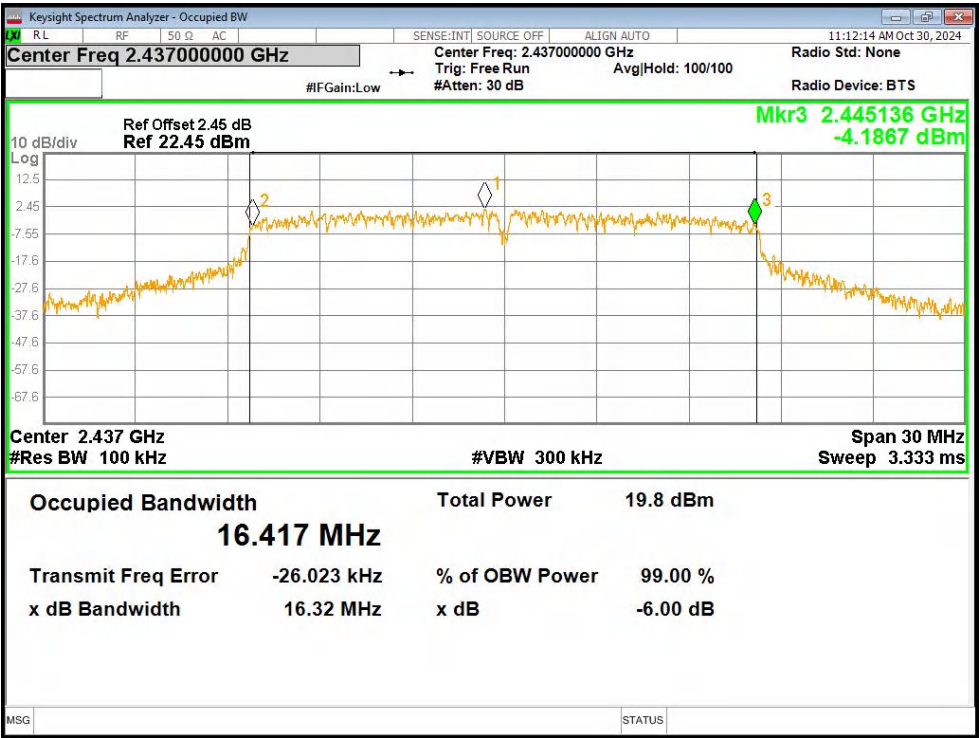


-6dB Bandwidth NVNT g 2437MHz Ant1

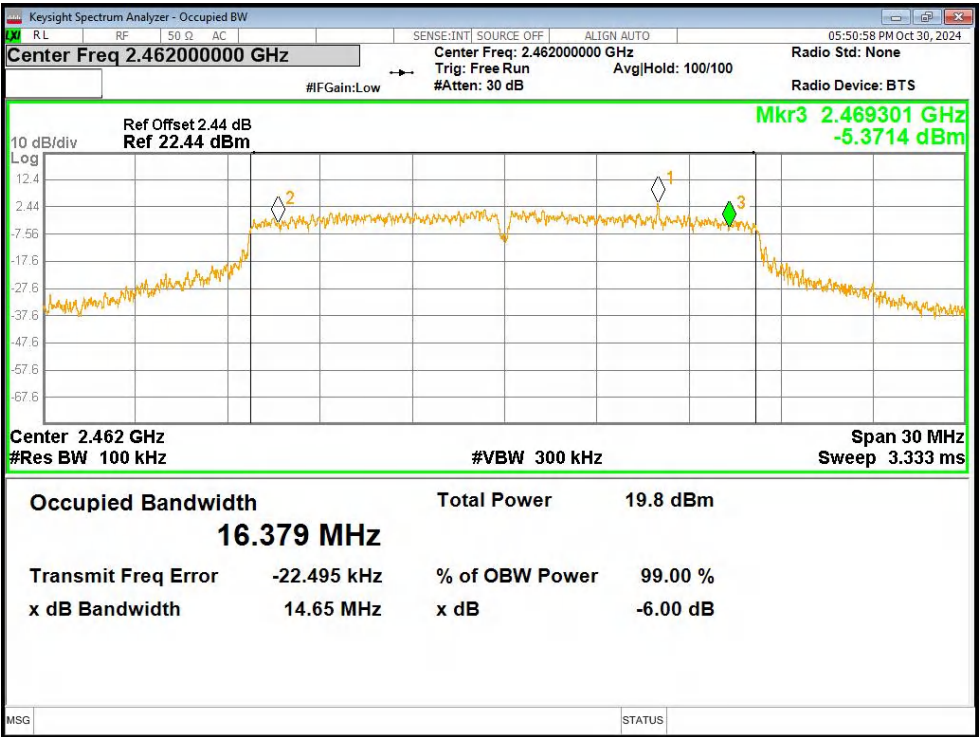


-6dB Bandwidth NVNT g 2462MHz Ant1

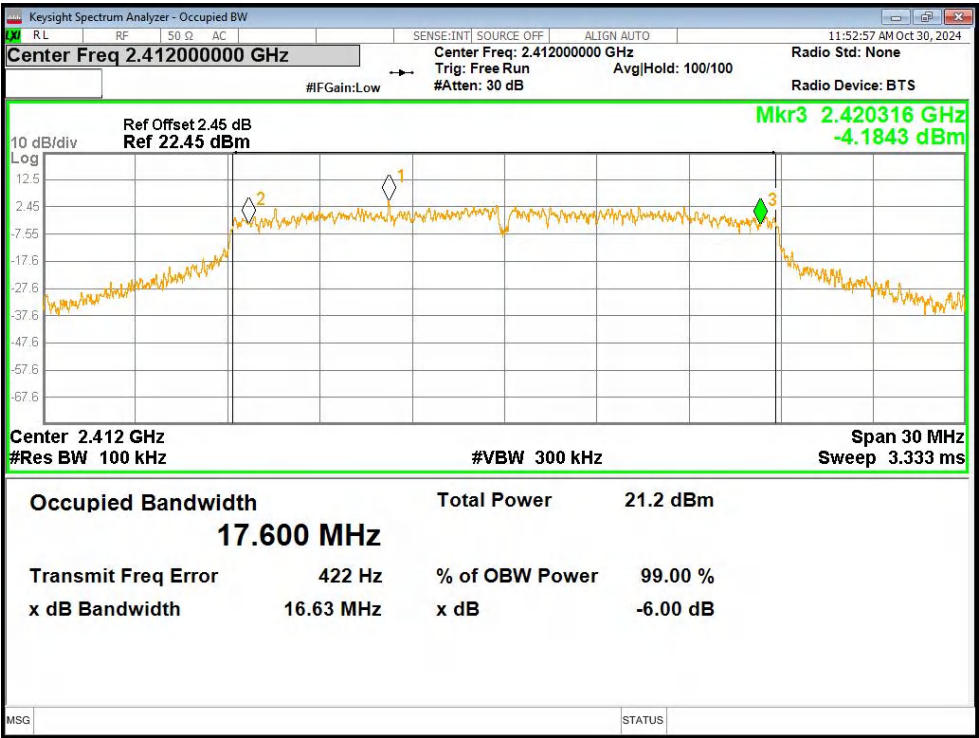

-6dB Bandwidth NVNT n20 2412MHz Ant1

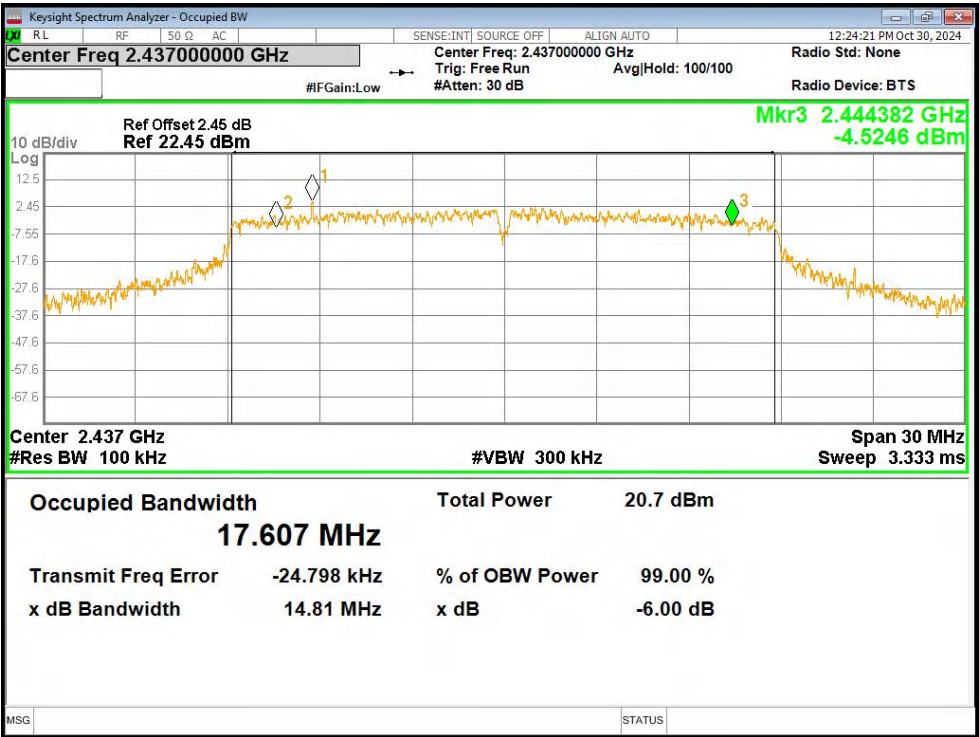

-6dB Bandwidth NVNT n20 2437MHz Ant1

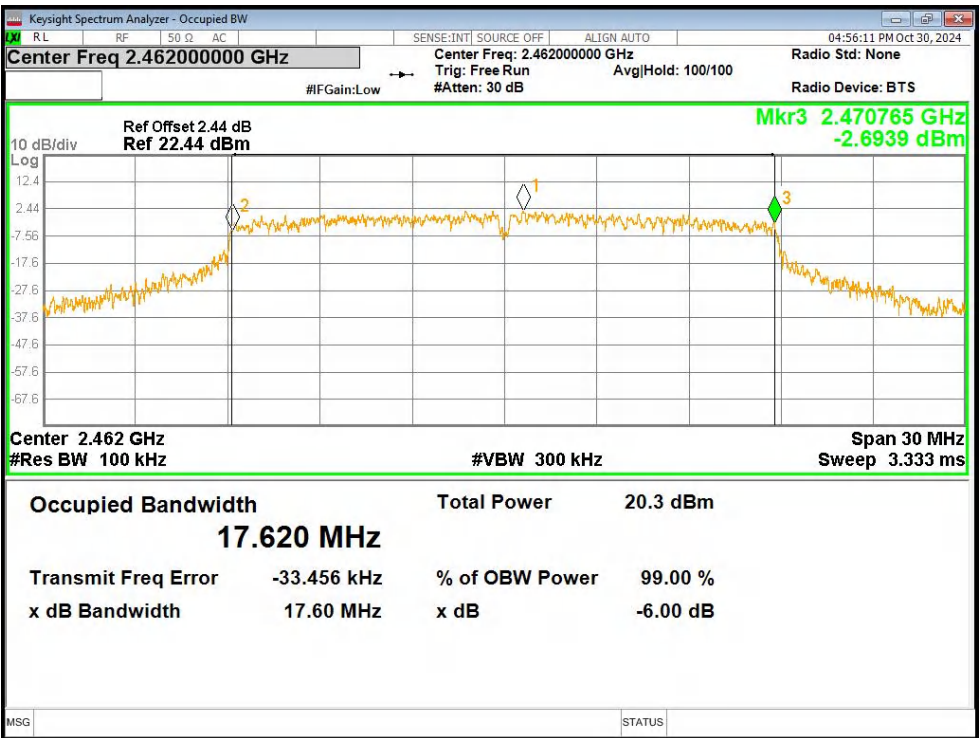

-6dB Bandwidth NVNT n20 2462MHz Ant1

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power(SISO)	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP**8.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	16.24	30	Pass
b	2437	15.76	30	Pass
b	2462	15.53	30	Pass
g	2412	11.23	30	Pass
g	2437	11.00	30	Pass
g	2462	9.56	30	Pass
n20	2412	10.63	30	Pass
n20	2437	10.85	30	Pass
n20	2462	10.16	30	Pass

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP




9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	-35.93	-20	Pass
b	2437	-37.90	-20	Pass
b	2462	-38.62	-20	Pass
g	2412	-45.75	-20	Pass
g	2437	-49.14	-20	Pass
g	2462	-49.27	-20	Pass
n20	2412	-51.27	-20	Pass
n20	2437	-49.22	-20	Pass
n20	2462	-48.72	-20	Pass

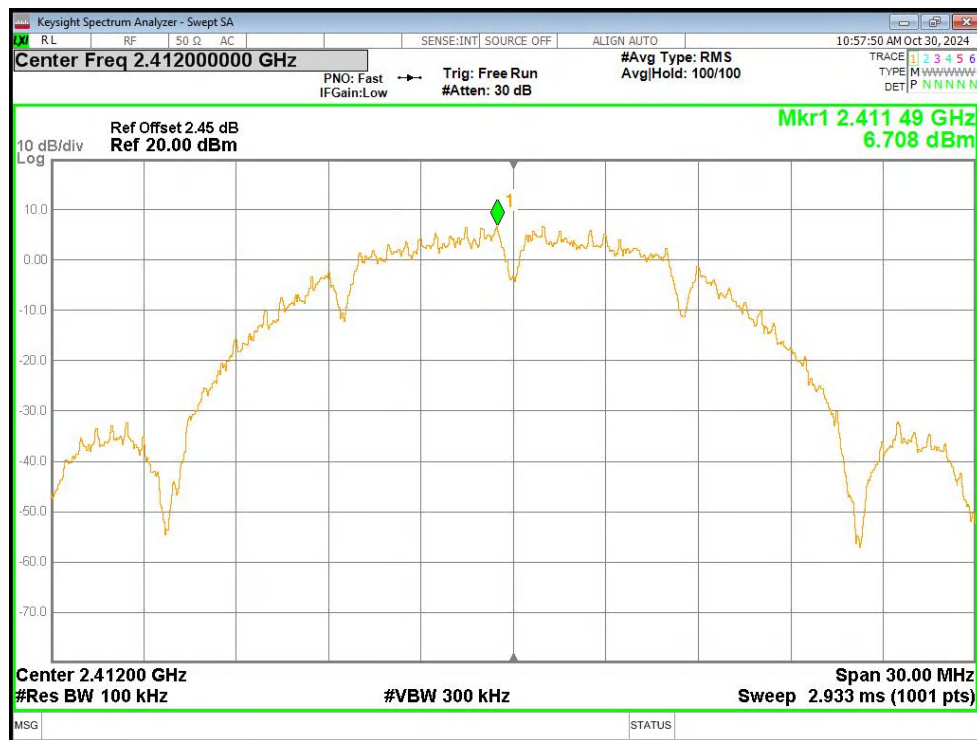


Tx. Spurious NVNT b 2412MHz Ant1 Ref

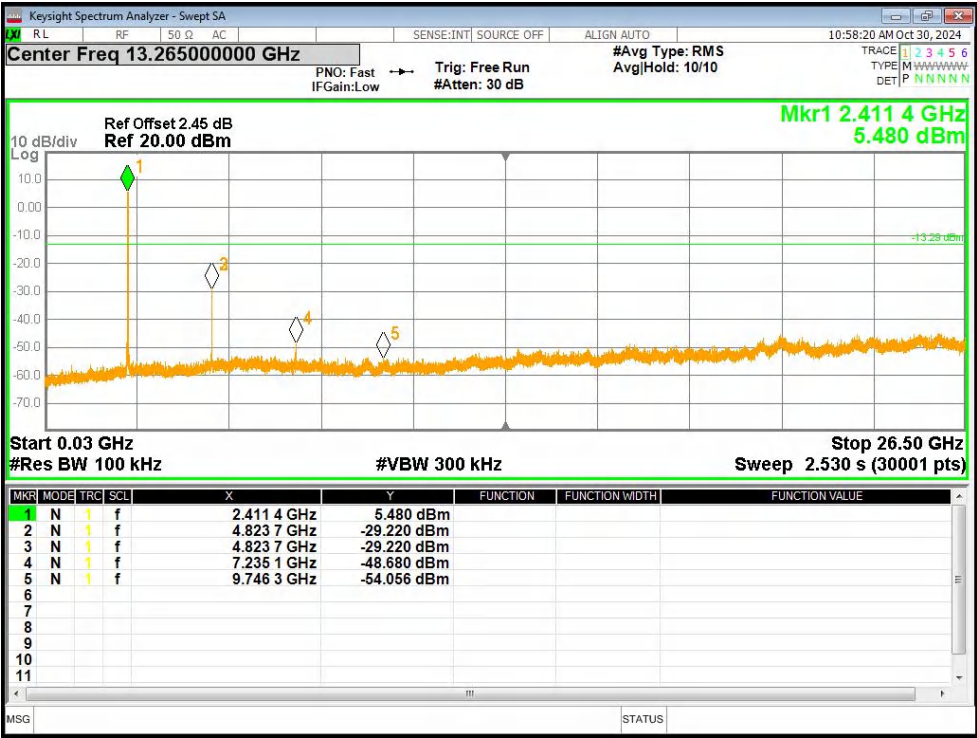


Tx. Spurious NVNT b 2412MHz Ant1 Emission

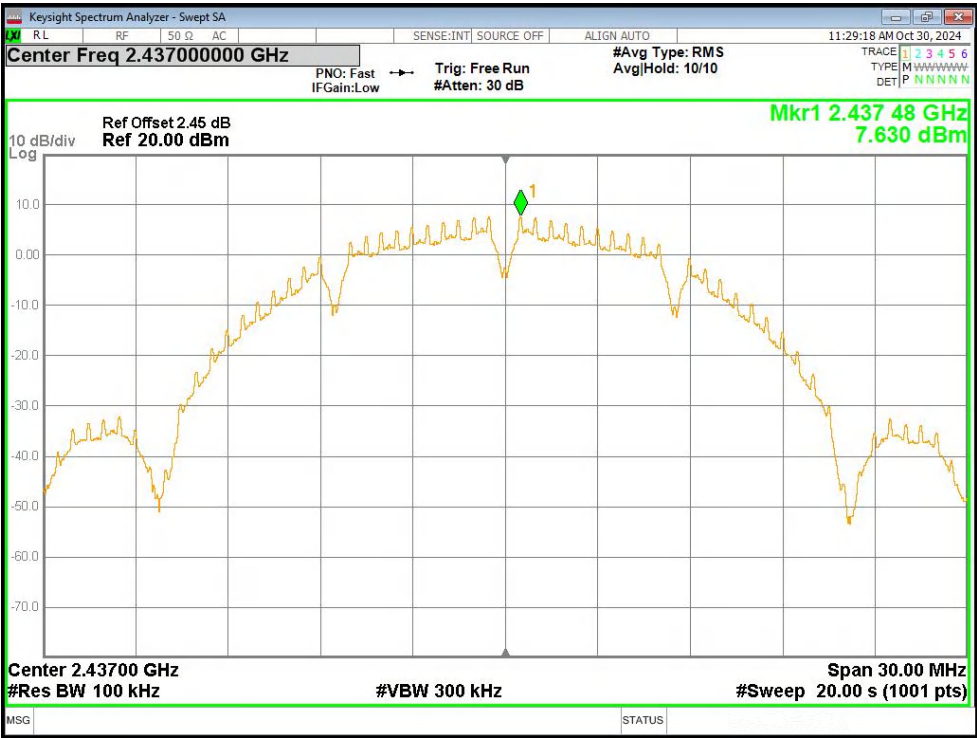


Tx. Spurious NVNT b 2437MHz Ant1 Ref

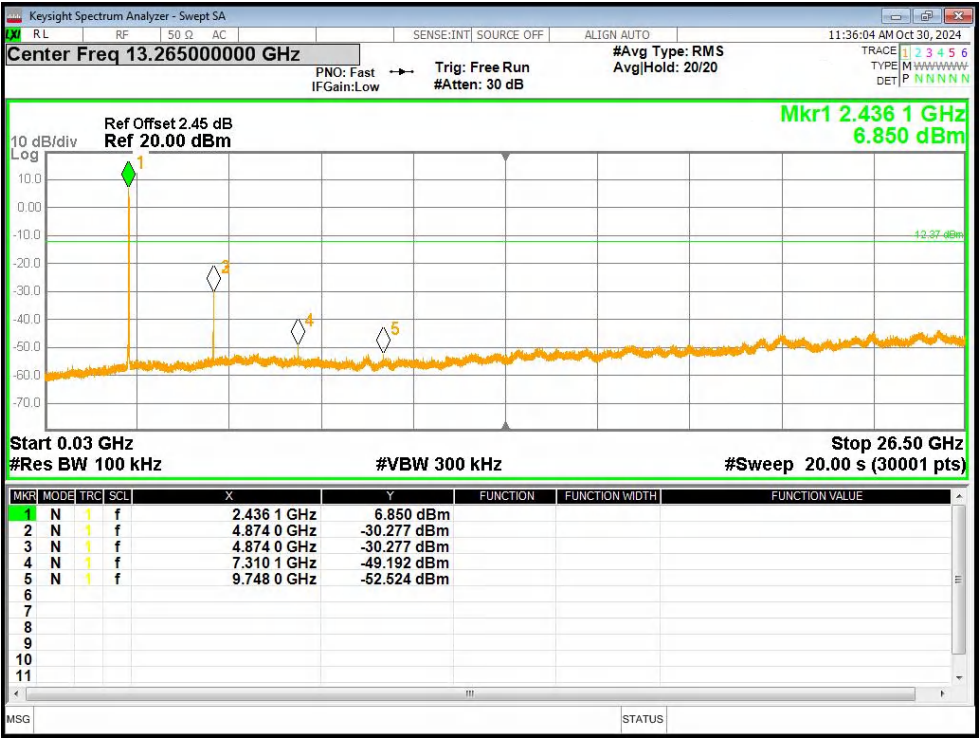


Tx. Spurious NVNT b 2437MHz Ant1 Emission

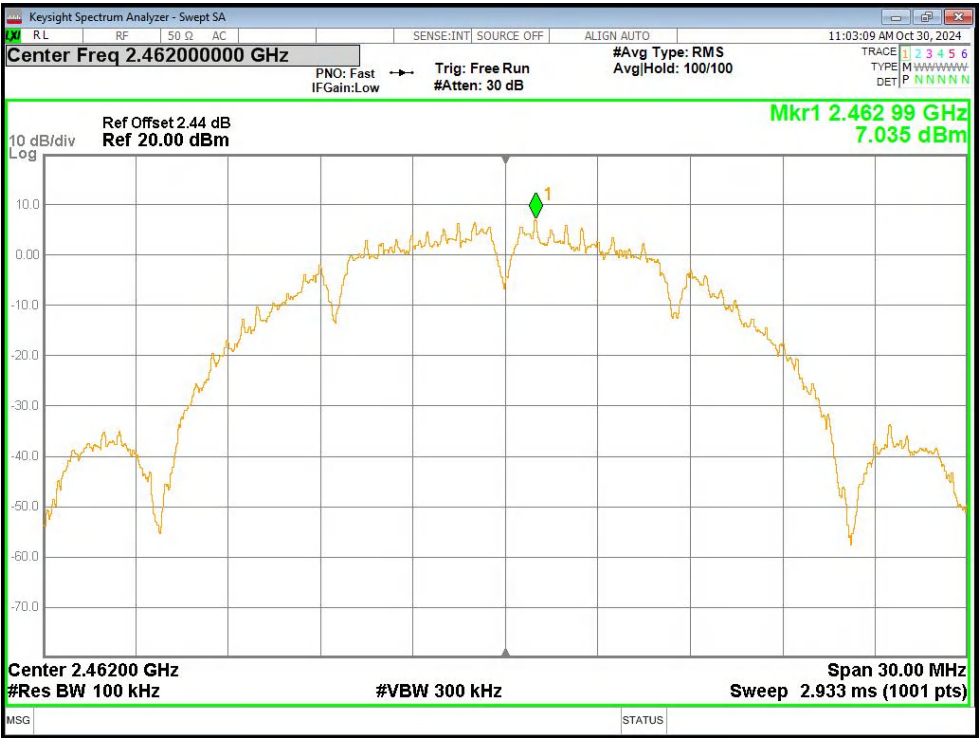


Tx. Spurious NVNT b 2462MHz Ant1 Ref

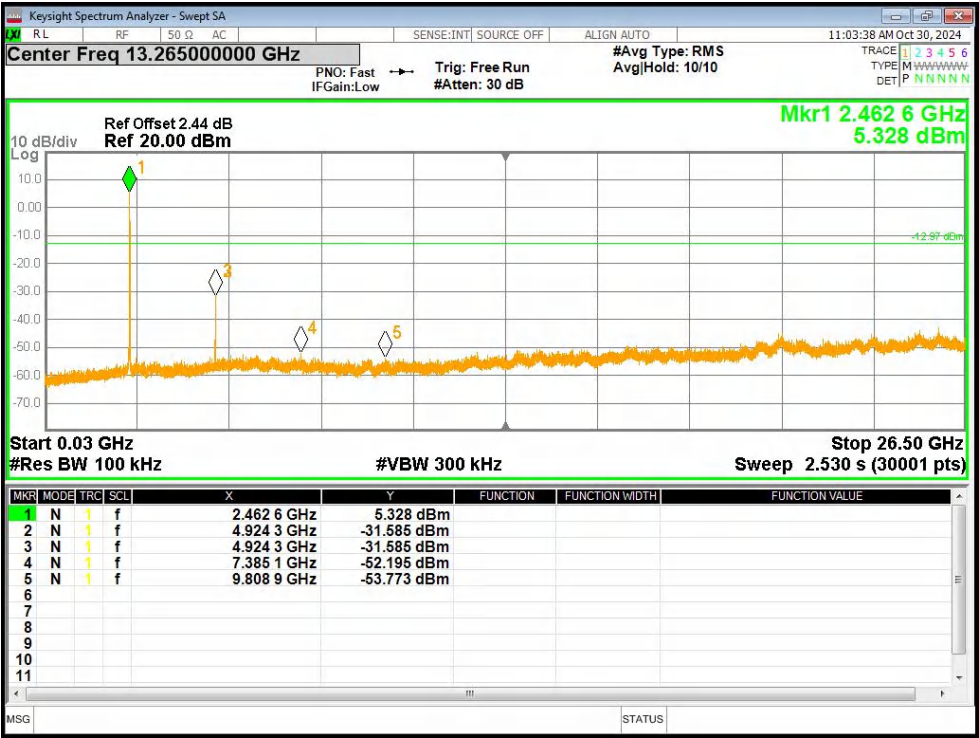


Tx. Spurious NVNT b 2462MHz Ant1 Emission

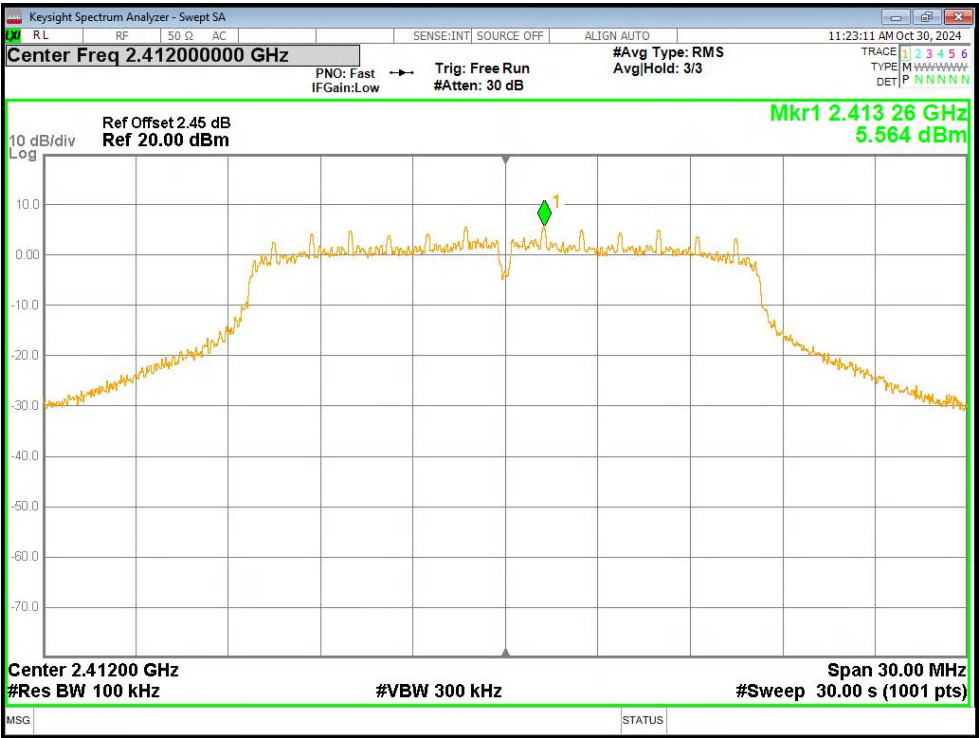


Tx. Spurious NVNT g 2412MHz Ant1 Ref

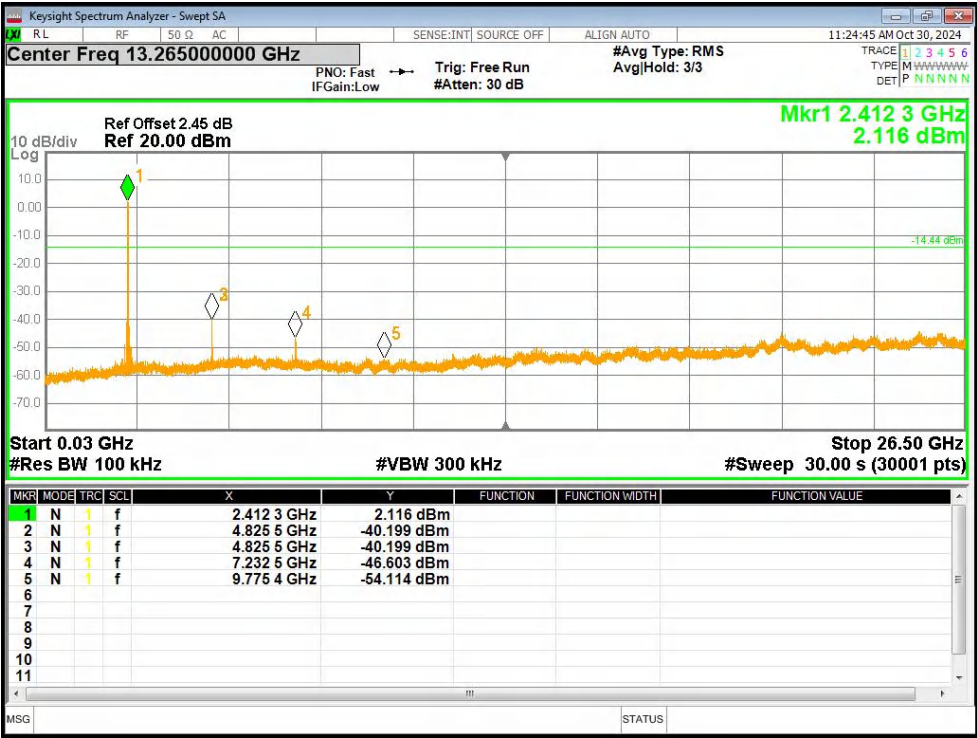


Tx. Spurious NVNT g 2412MHz Ant1 Emission

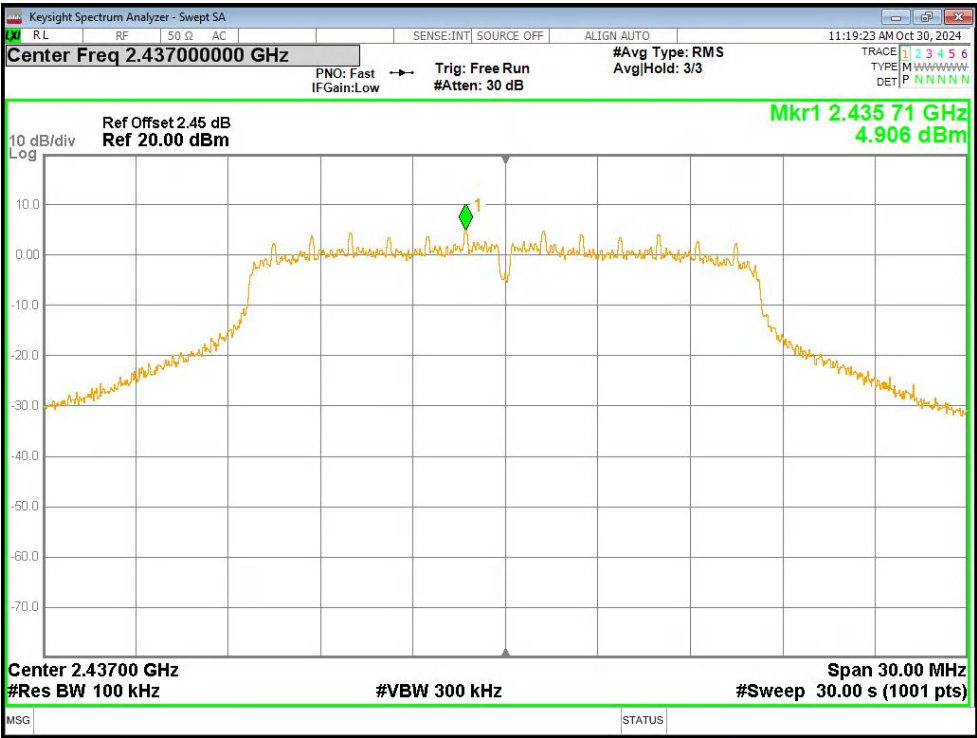


Tx. Spurious NVNT g 2437MHz Ant1 Ref

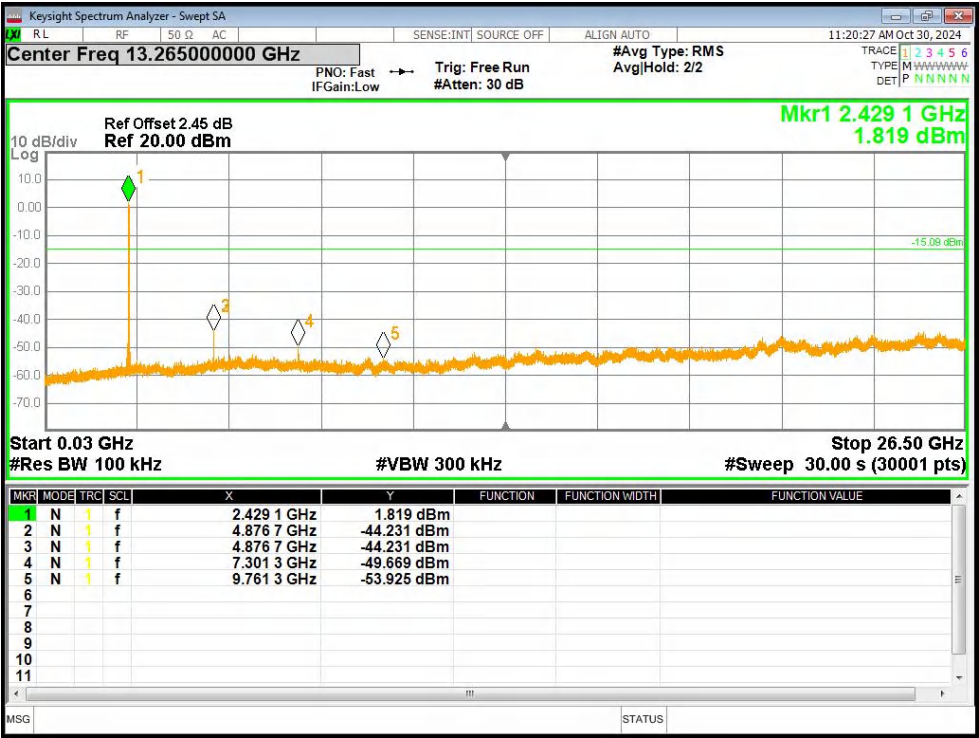


Tx. Spurious NVNT g 2437MHz Ant1 Emission

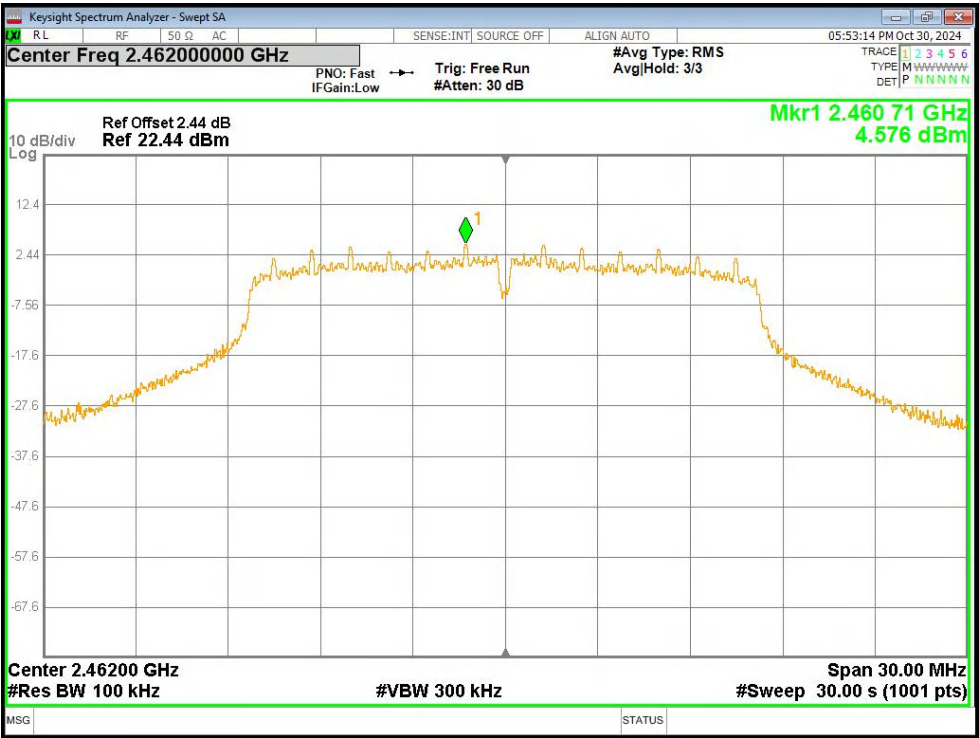


Tx. Spurious NVNT g 2462MHz Ant1 Ref

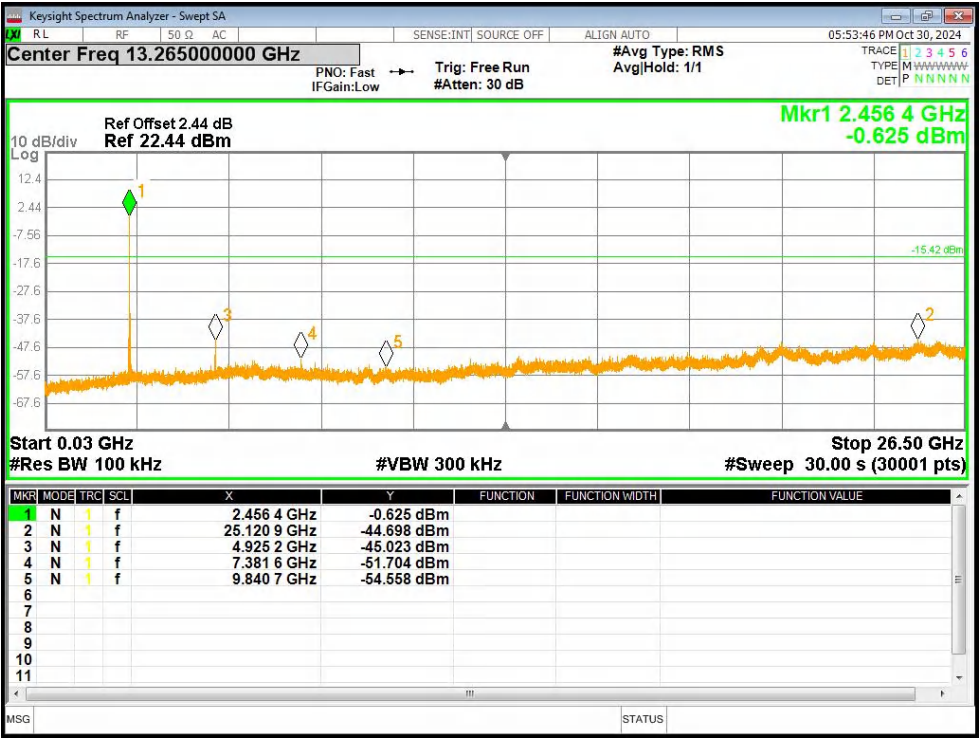


Tx. Spurious NVNT g 2462MHz Ant1 Emission

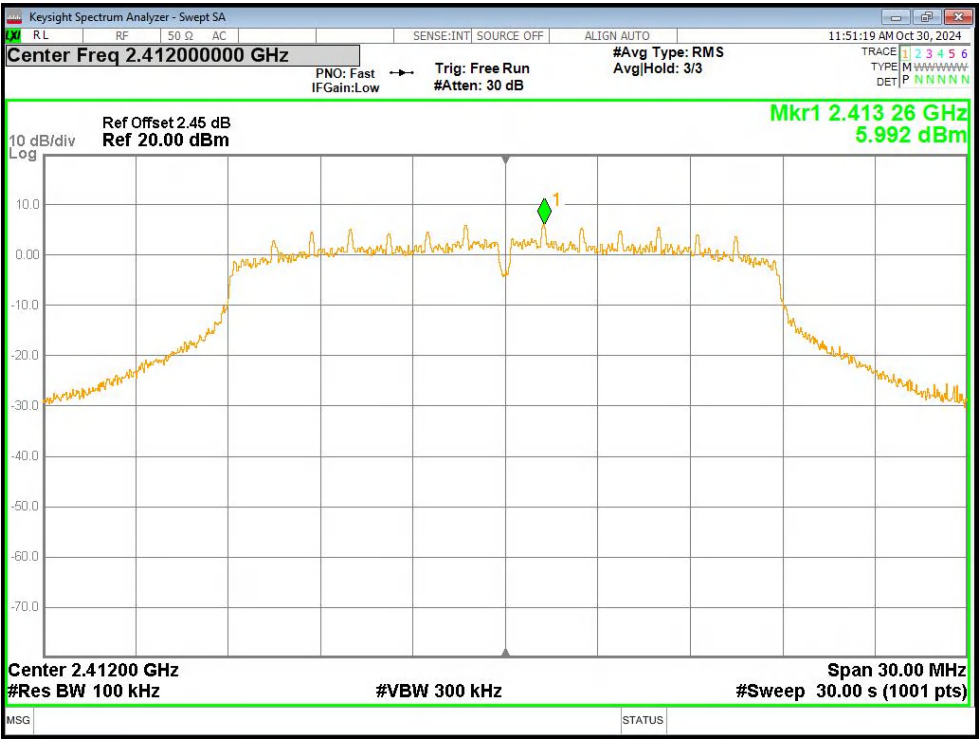


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

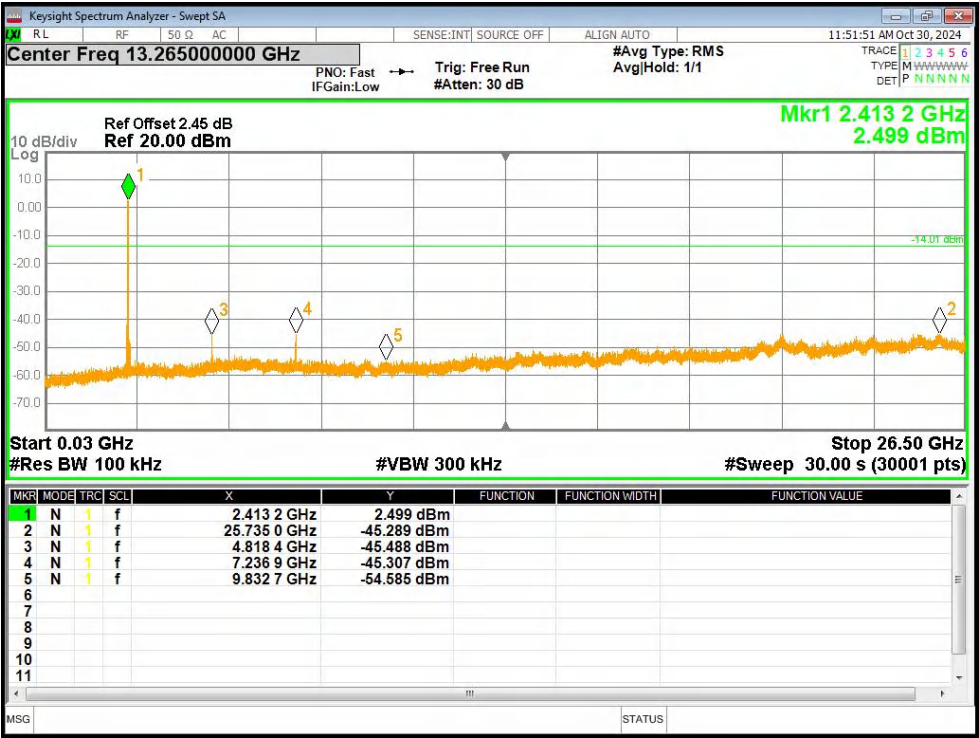


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

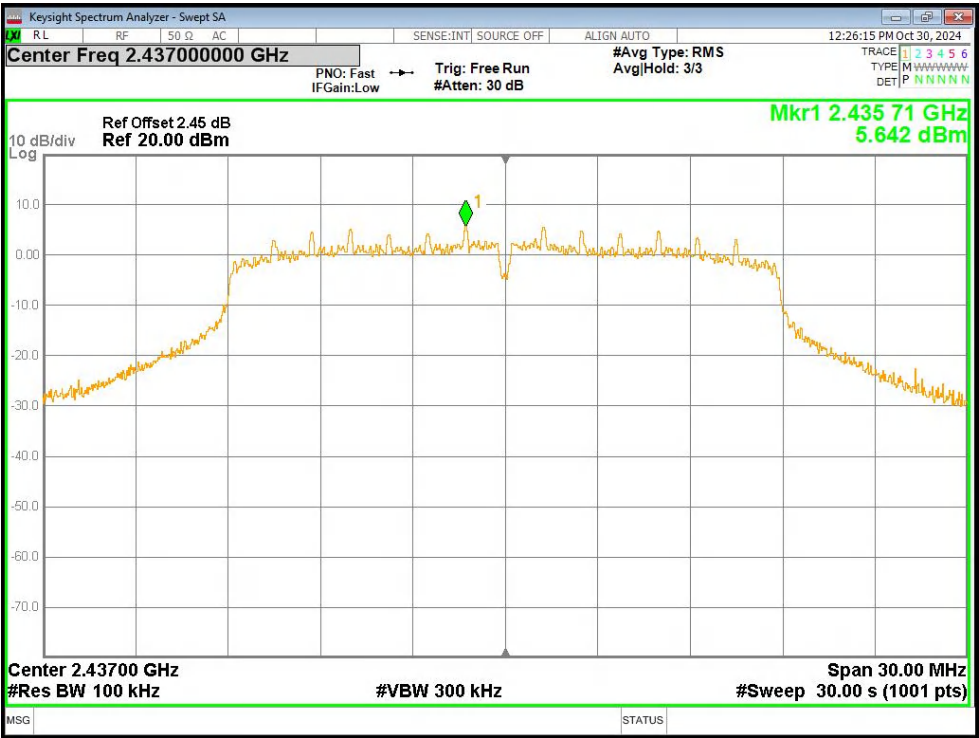


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

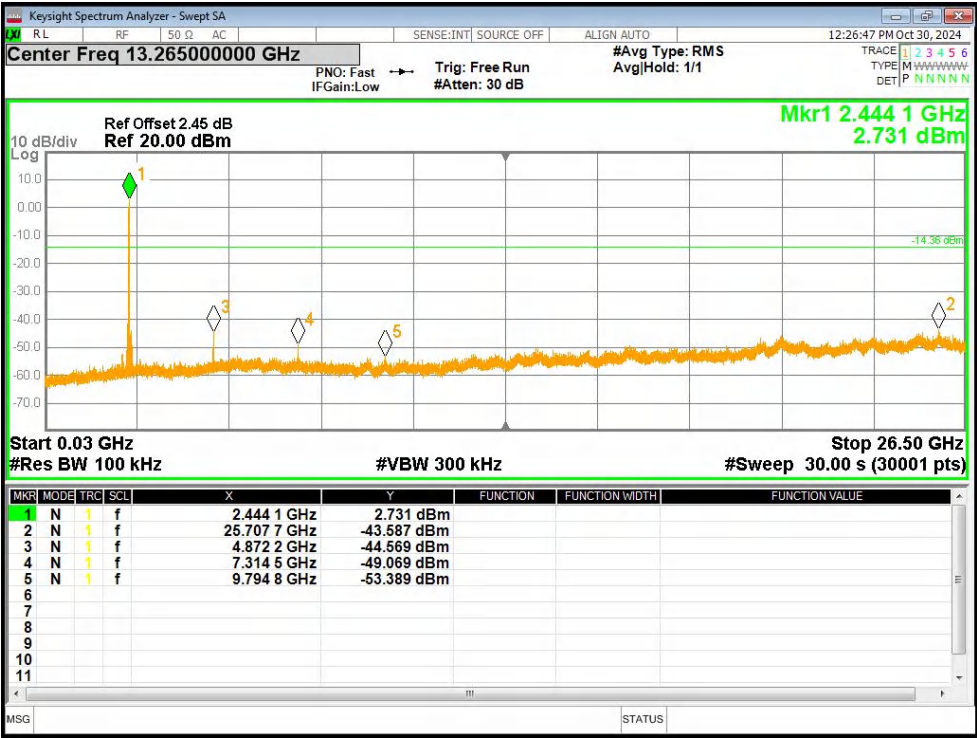

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

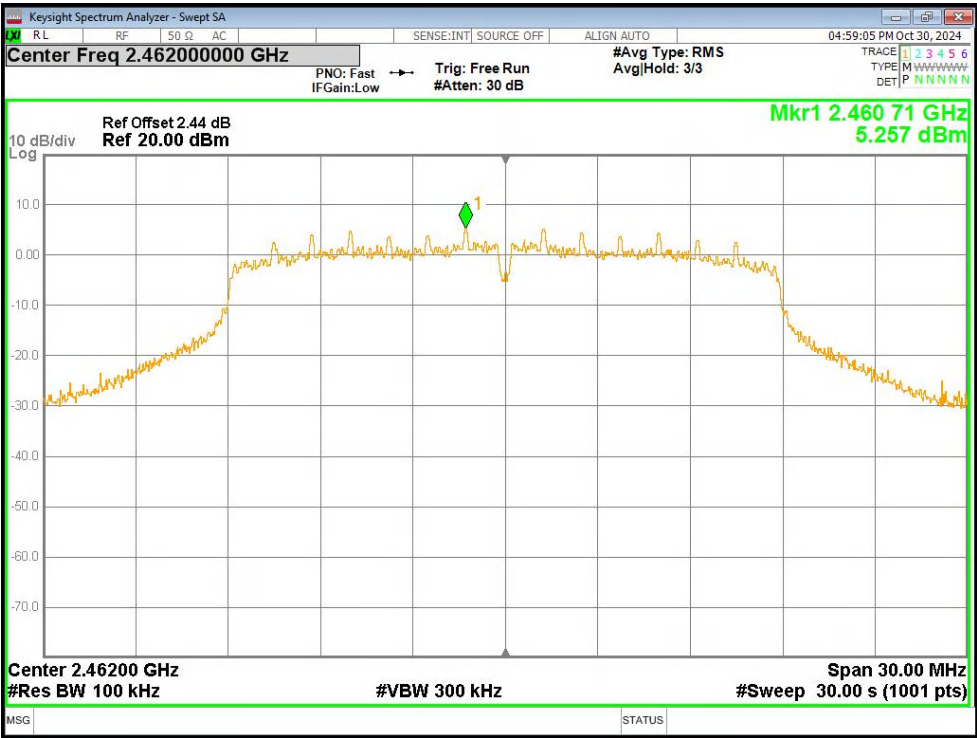


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

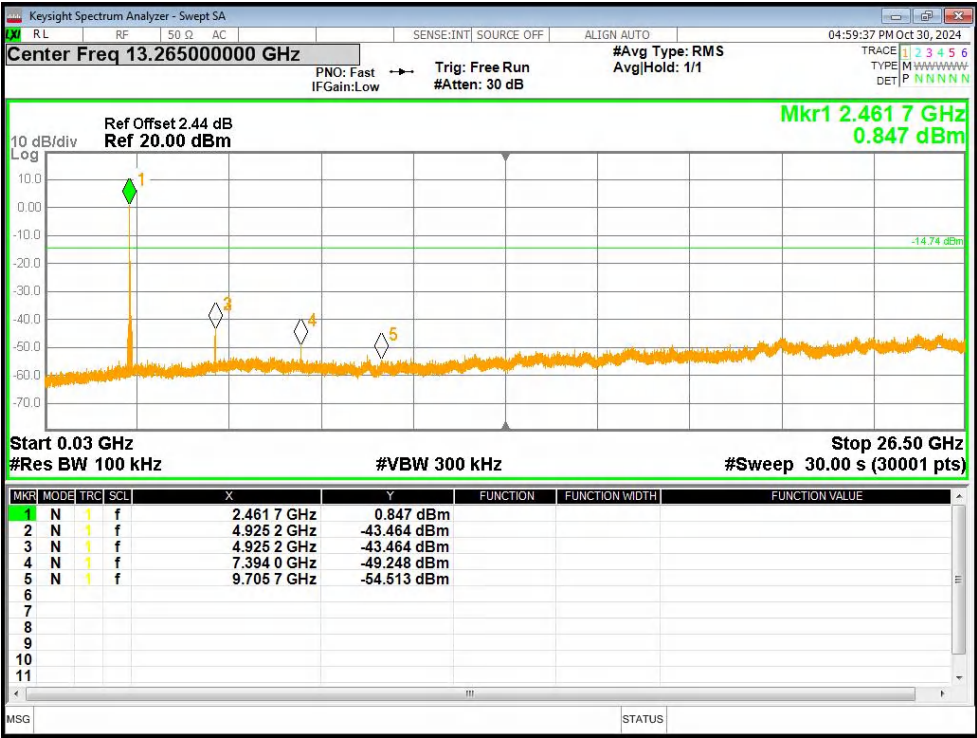


Tx. Spurious NVNT n20 2462MHz Ant1 Emission


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-40.00	-20	Pass
b	2462	Ant1	-56.61	-20	Pass
g	2412	Ant1	-38.55	-20	Pass
g	2462	Ant1	-48.06	-20	Pass
n20	2412	Ant1	-32.03	-20	Pass
n20	2462	Ant1	-38.08	-20	Pass

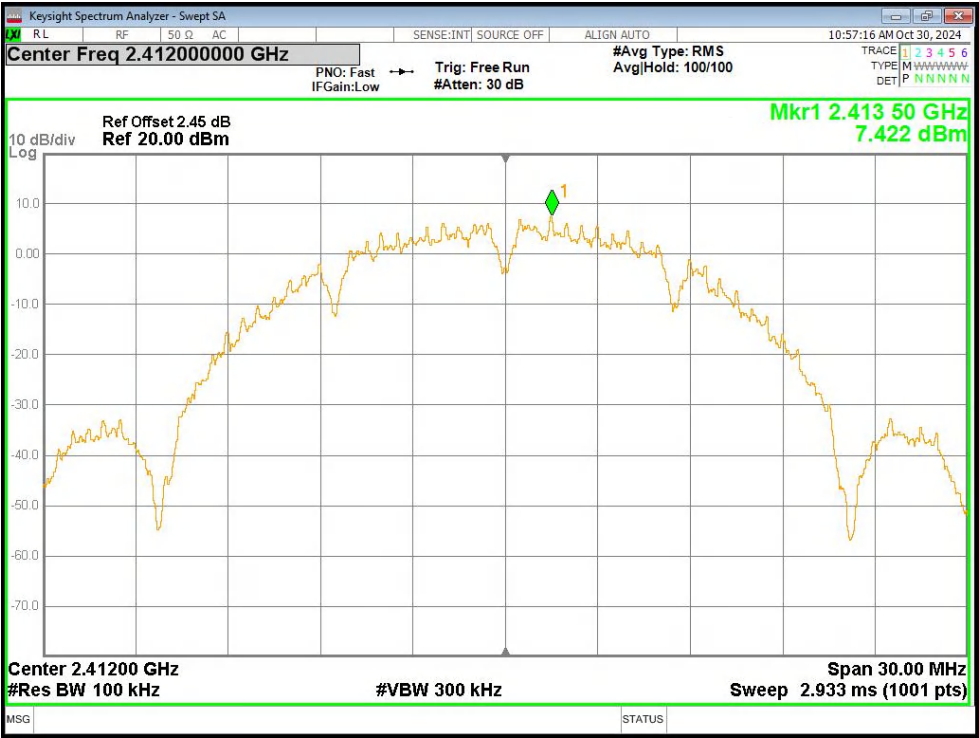


Band Edge NVNT b 2412MHz Ant1 Ref

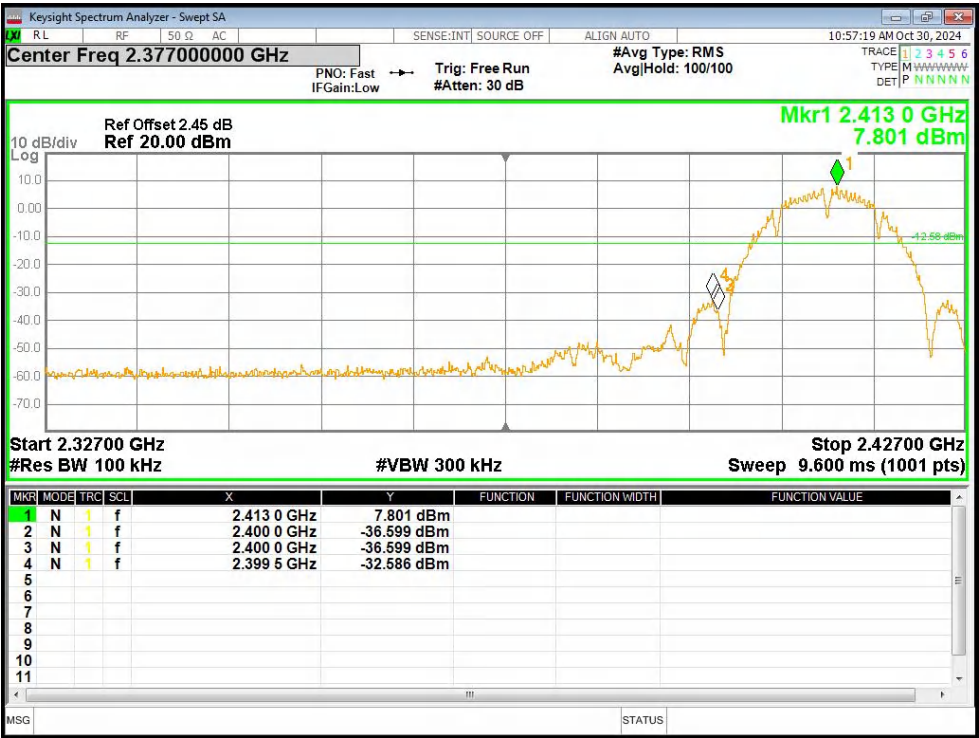


Band Edge NVNT b 2412MHz Ant1 Emission

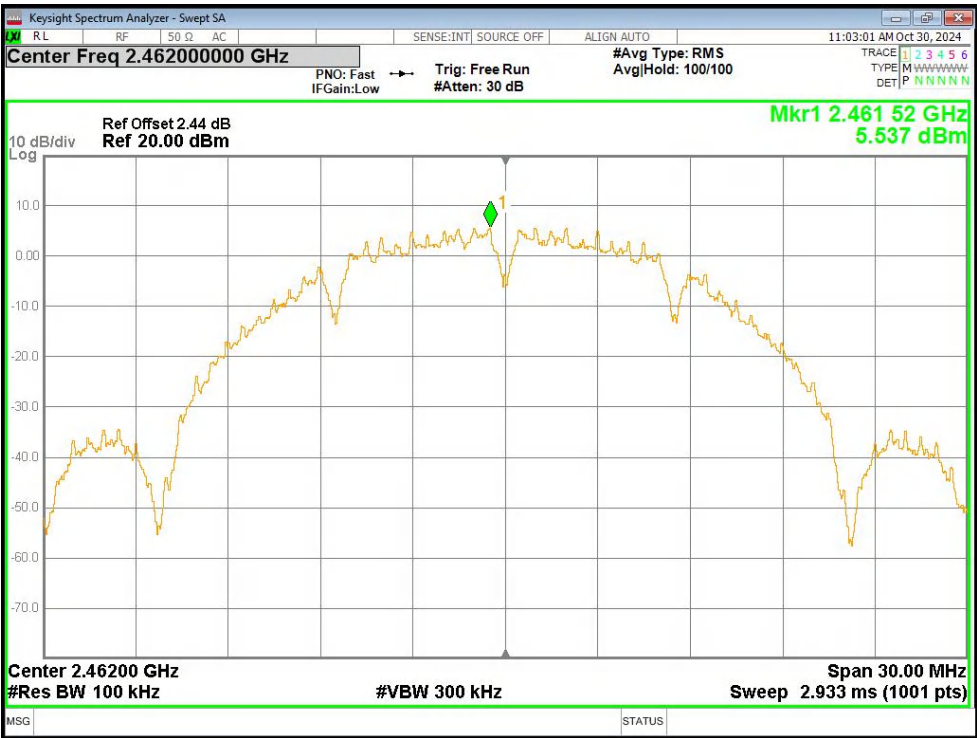


Band Edge NVNT b 2462MHz Ant1 Ref

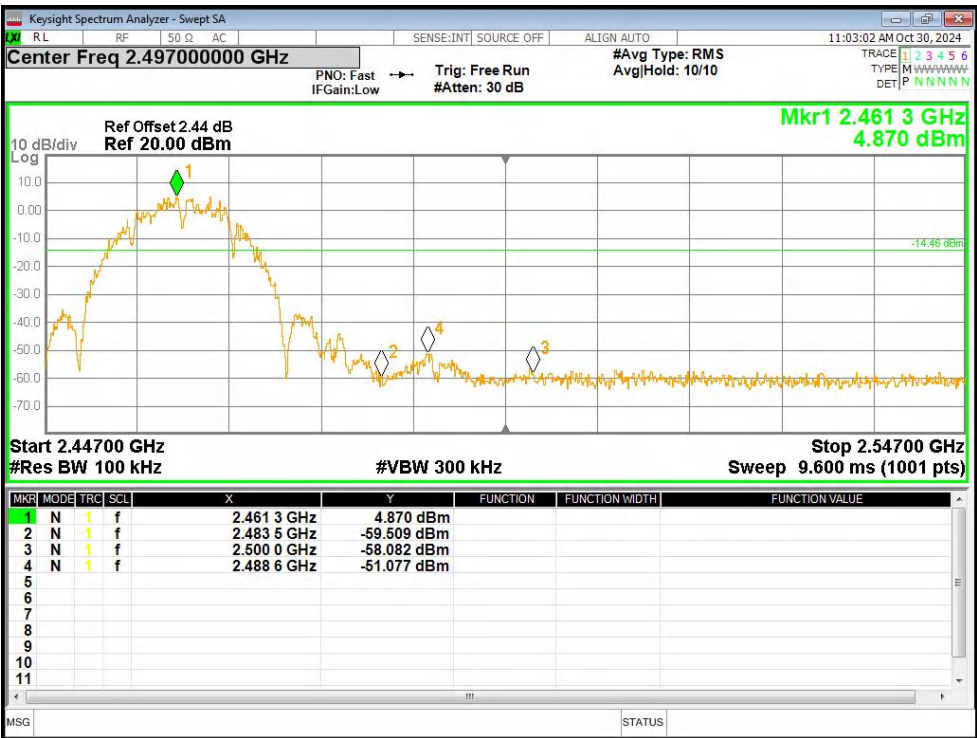


Band Edge NVNT b 2462MHz Ant1 Emission

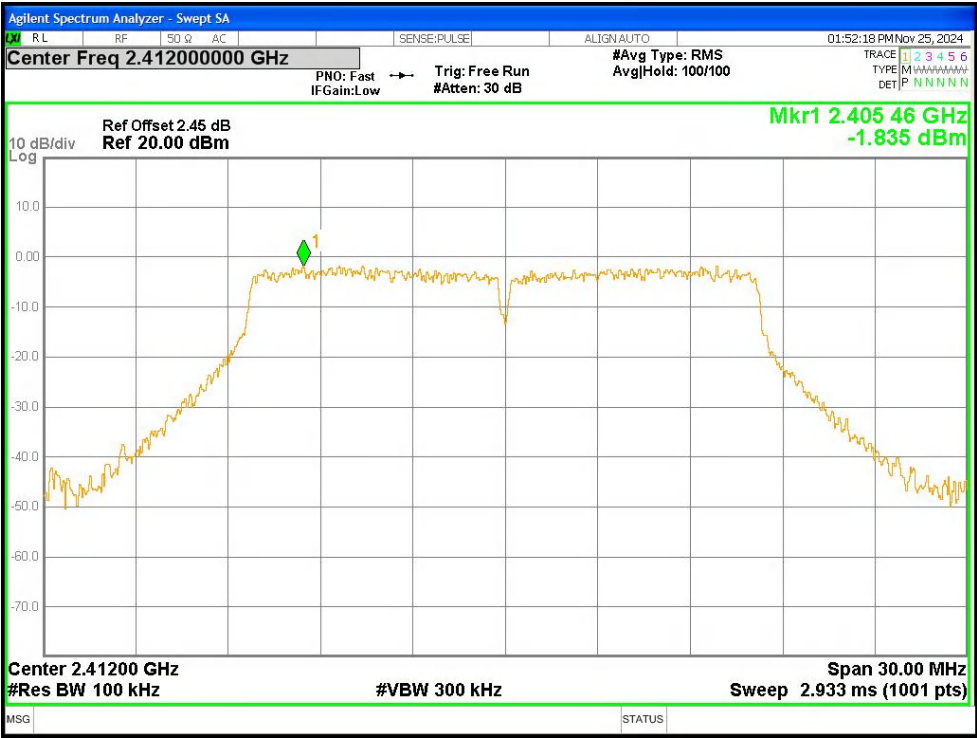


Band Edge NVNT g 2412MHz Ant1 Ref

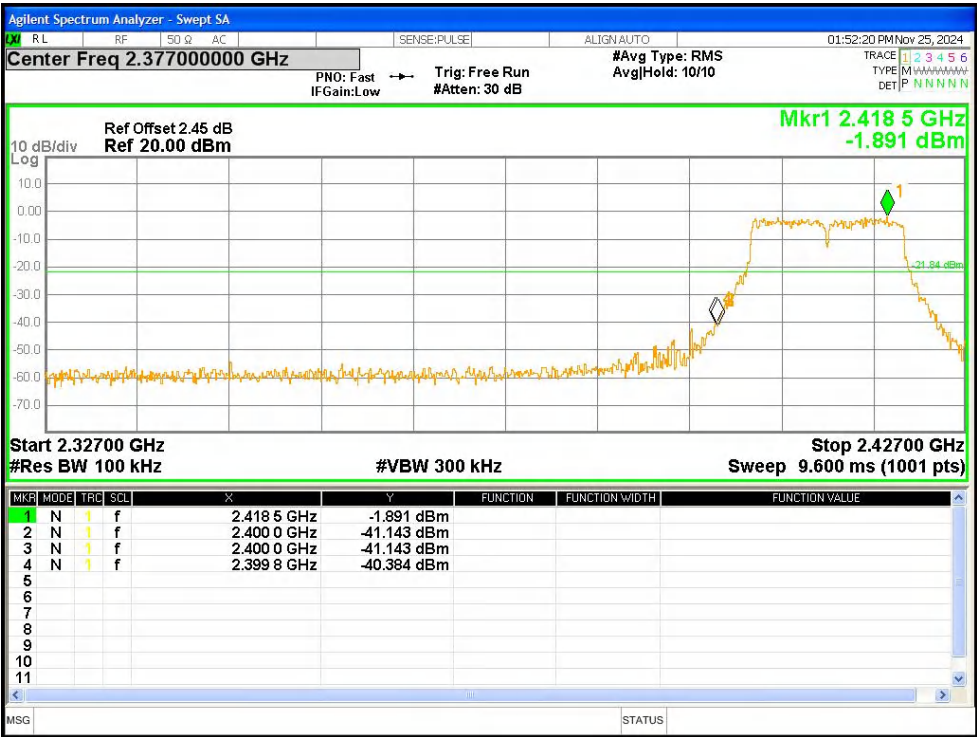


Band Edge NVNT g 2412MHz Ant1 Emission

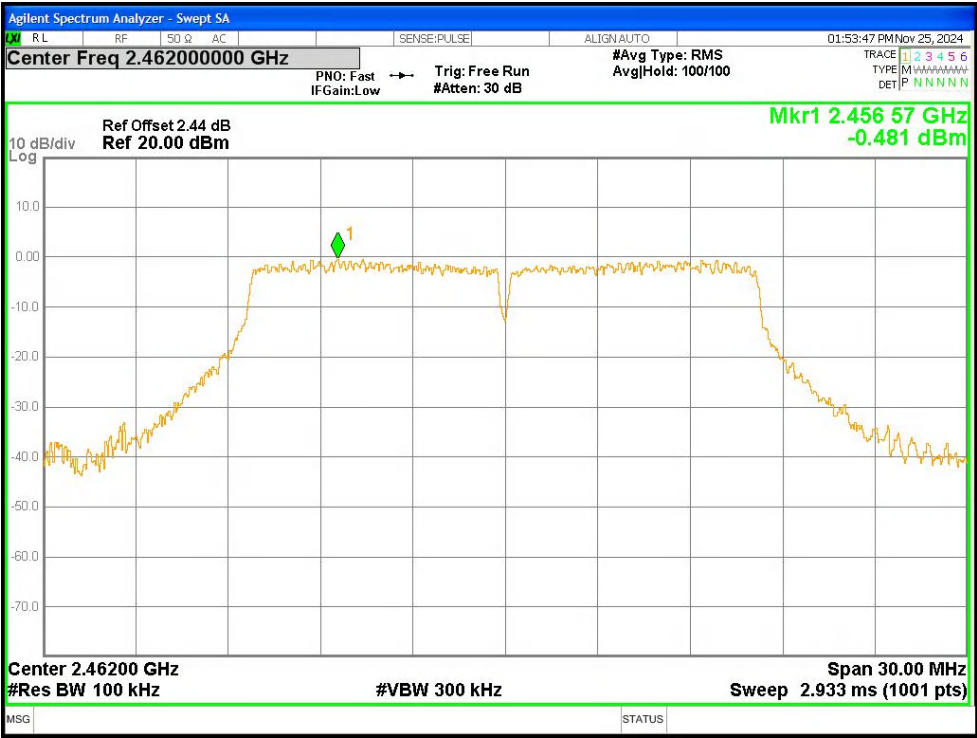


Band Edge NVNT g 2462MHz Ant1 Ref

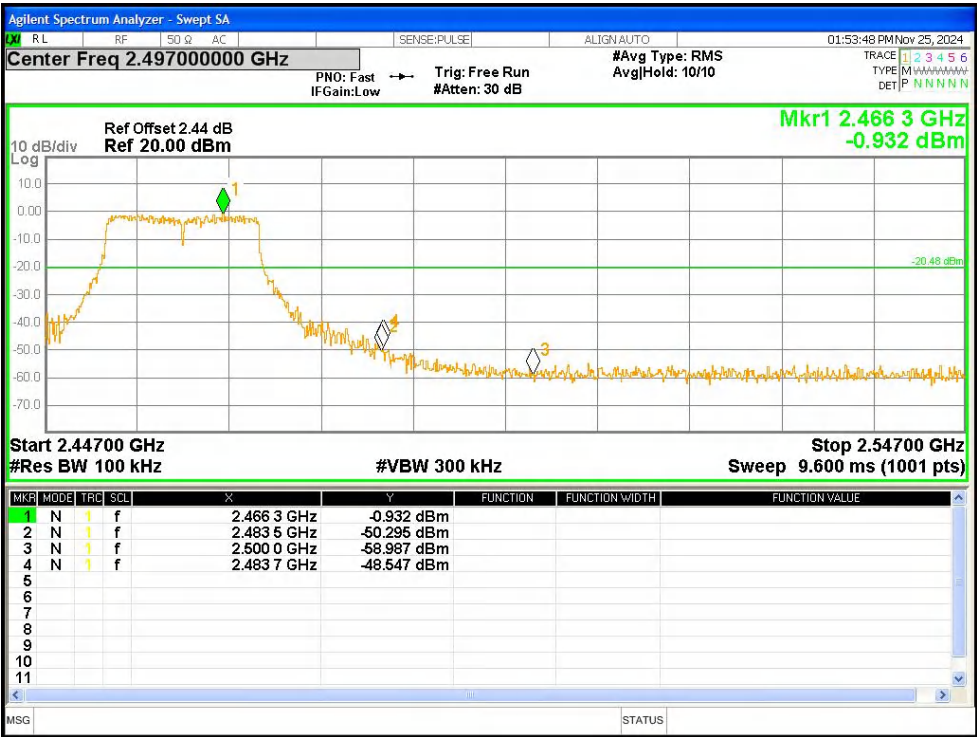


Band Edge NVNT g 2462MHz Ant1 Emission

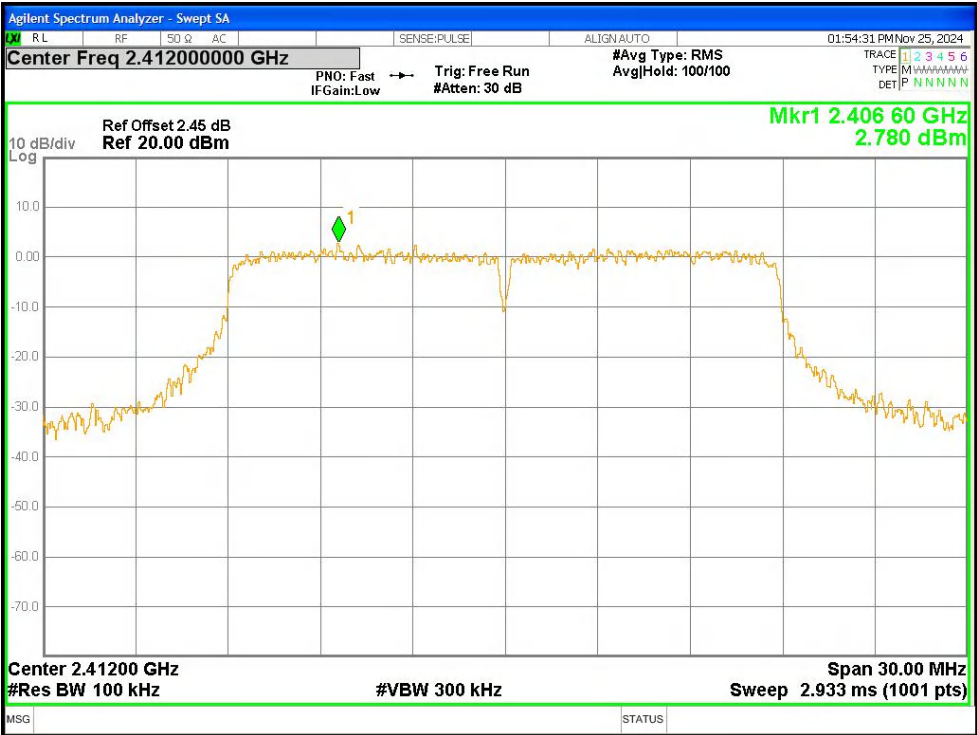


Band Edge NVNT n20 2412MHz Ant1 Ref

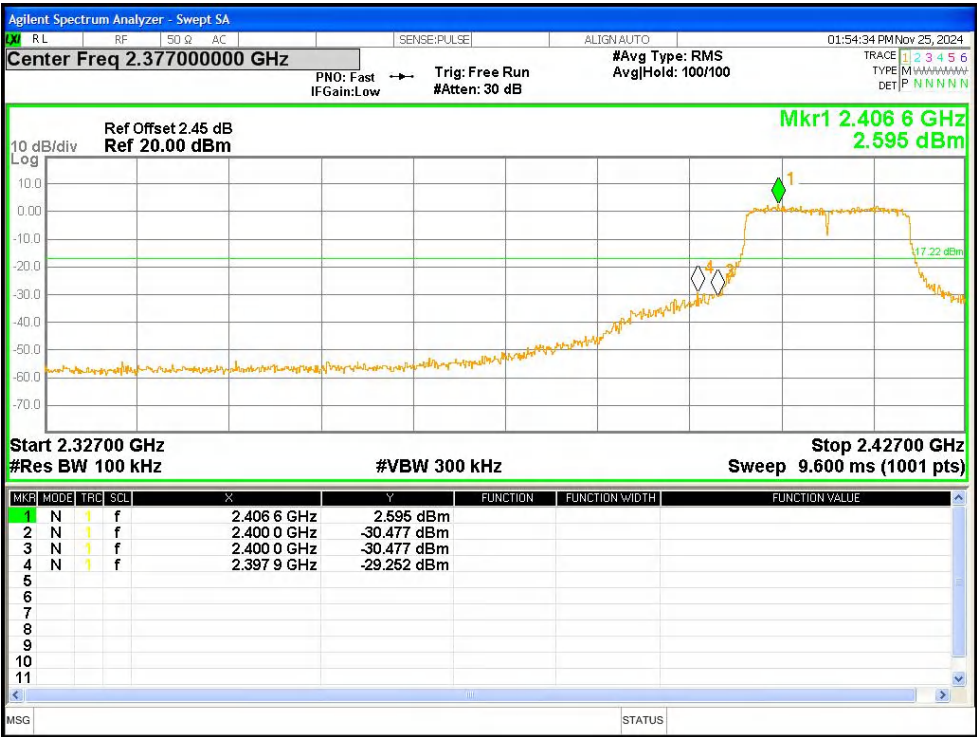

Band Edge NVNT n20 2412MHz Ant1 Emission

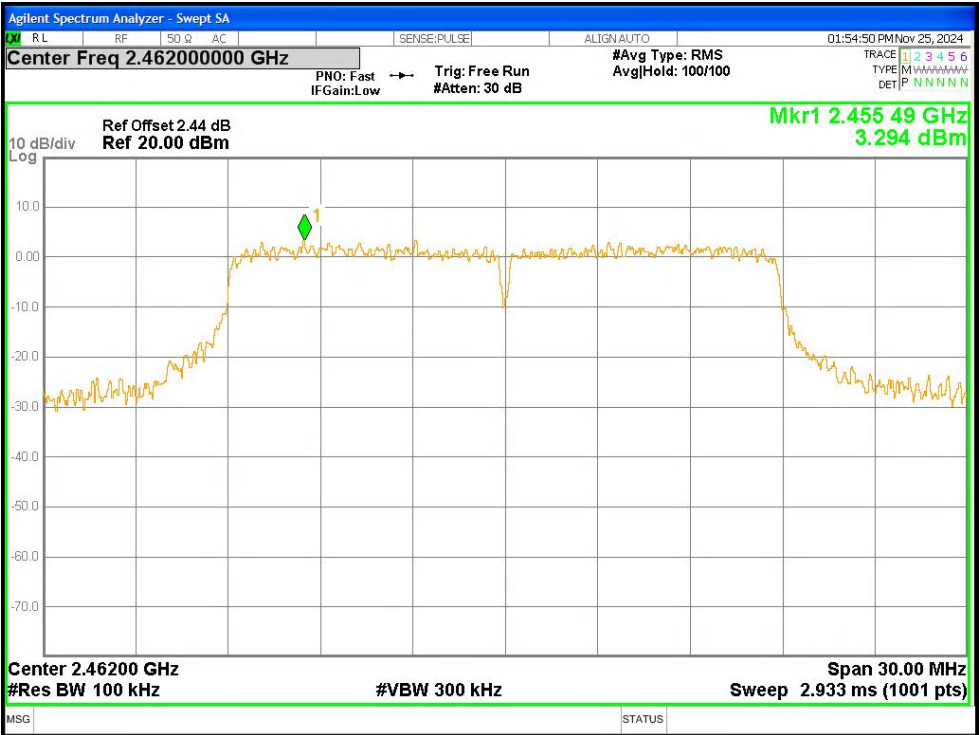

Band Edge NVNT n20 2462MHz Ant1 Ref

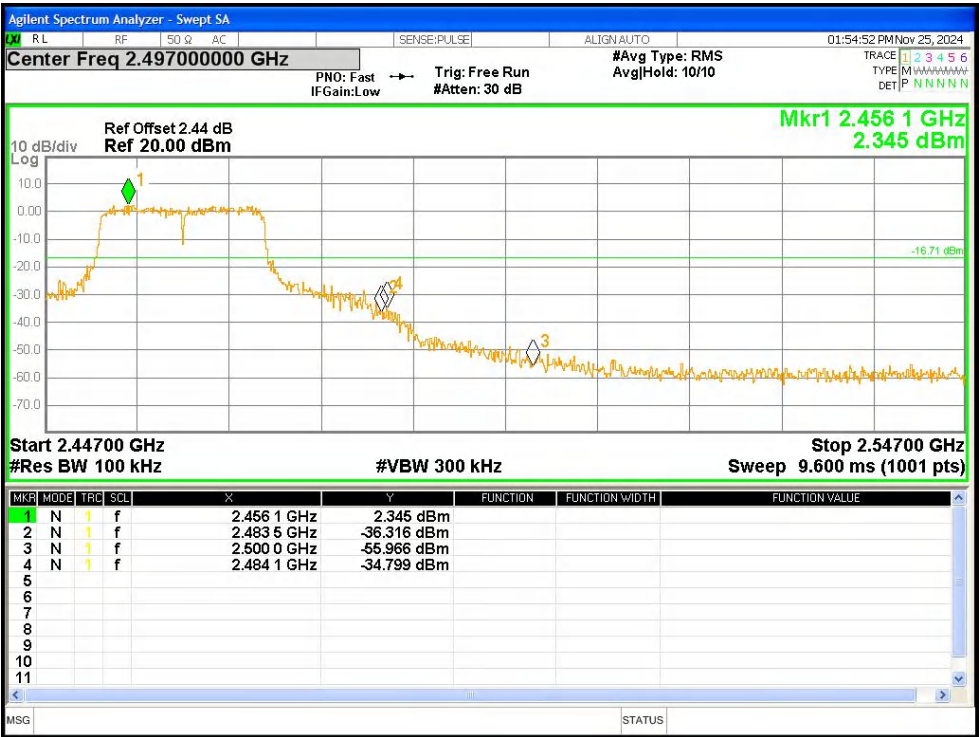

Band Edge NVNT n20 2462MHz Ant1 Emission

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The WIFI 2.4G antenna is FPC antenna, the best case gain for the antenna is 2.11dBi, reference to the appendix II for details	

11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******