

**Voxx Accessories Corp.**

Application  
For  
Certification

**FCC ID: VIXAWSBT4B**

**Bluetooth Speaker**

**Model: AWSBT4-B**  
**Additional model: BBB14**

**2.4GHz Transceiver**

**Report No.: 141223007SZN-001**

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-13]

Prepared and Checked by:

Approved by:

Sign on file

*Leo Lai*  
*Project Engineer*

---

*Andy Yan*  
*Senior Project Engineer*  
*Date: January 20, 2015*

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_TX\_b  
Report No.: 141223007SZN-001

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)

# INTERTEK TESTING SERVICES

---

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

# INTERTEK TESTING SERVICES

## MEASUREMENT/TECHNICAL REPORT

Voxx Accessories Corp.

Model: AWSBT4-B  
Additional model: BBB14

FCC ID: VIXAWSBT4B

This report concerns (check one:)      Original Grant X      Class II Change \_\_\_\_\_

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes \_\_\_\_\_      No X

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes \_\_\_\_\_      No X

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-13 Edition] provision.

Report prepared by:

Leo Lai  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6F, Block D, Huahan Building, Langshan Road,  
Nanshan District, Shenzhen, P. R. China  
Phone: (86 755) 8614 0661  
Fax: (86 755) 8601 6751

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 General Description</b>	2
1.1 Product Description	2
1.2 Related Submittal(s) Grants	2
1.3 Test Methodology	2
1.4 Test Facility	2
<b>2.0 System Test Configuration</b>	4
2.1 Justification	4
2.2 EUT Exercising Software	4
2.3 Special Accessories	4
2.4 Equipment Modification	4
2.5 Measurement Uncertainty	5
2.6 Support Equipment List and Description	5
<b>3.0 Emission Results</b>	7
3.1 Radiated Test Results	8
3.1.1 Field Strength Calculation	8
3.1.2 Radiated Emission Configuration Photograph	9
3.1.3 Radiated Emissions	9
3.1.4 Transmitter Spurious Emissions	12
3.2 Conducted Emission at Mains Terminals	16
3.2.1 Conducted Emissions Configuration Photograph	16
3.2.2 Conducted Emissions	16
<b>4.0 Equipment Photographs</b>	20
<b>5.0 Product Labelling</b>	22
<b>6.0 Technical Specifications</b>	24
<b>7.0 Instruction Manual</b>	26
<b>8.0 Miscellaneous Information</b>	28
8.1 Bandedge Plot	29
8.2 Discussion of Pulse Desensitization	31
8.3 Transmitter Duty Cycle Calculation	32
8.4 Emissions Test Procedures	33
<b>9.0 Test Equipment List</b>	36

## INTERTEK TESTING SERVICES

---

### List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf
Cover Letter	Certification Agreement	agreement.pdf

**EXHIBIT 1**

**GENERAL DESCRIPTION**

---

## INTERTEK TESTING SERVICES

---

### 1.0 General Description

#### 1.1 Product Description

The equipment under test (EUT) is Bluetooth Speaker with Bluetooth function operating in 2402-2480MHz. The EUT is powered by DC 12V from external adapter with DC 12.0V 1.0A Output or 8 AA batteries . The Bluetooth function will stop working with AUX IN operation. For more detail information pls. refer to the user manual.

The Model BBB14 is the same as the Model AWSBT4-B in hardware aspect. The difference in model number serves as marketing purpose only.

Antenna Type: Integral antenna

Bluetooth Version: 3.0

Modulation Type: GFSK,  $\pi/4$  -DQPSK and 8-DPSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is an application for certification of Bluetooth speaker, and there is no corresponding unit for certification.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

#### 1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

**EXHIBIT 2**  
**SYSTEM TEST CONFIGURATION**



---

## INTERTEK TESTING SERVICES

---

### 2.0 System Test Configuration

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The EUT was powered by external adapter with AC 120V/60Hz Input or powered by 8 x AA new batteries during the test, and only the worst case data was reported.

All packets DH1, DH3 & DH5 mode were tested in modulation type GFSK,  $\pi/4$  – DQPSK and 8-DPSK only the worst data was reported in this report.

This device includes two connection modes: Wireless (Bluetooth) connection and Wired connection; When audio input port is connected, the wireless mode will be disconnected. You can connect the device in one way every time.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.

The unit was placed in the center of the turntable when powered by batteries and the rear of unit shall be flushed with the rear of the table when it was powered by adapter.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

#### 2.3 Special Accessories

No special accessories used.

#### 2.4 Equipment Modification

Any modifications installed previous to testing by Voxx Accessories Corp. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Kejiyuan Branch.

## INTERTEK TESTING SERVICES

---

### 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
iPod	Apple	A1367
Adapter	JFEC	JF012WR-1200100UH

**EXHIBIT 3**  
**EMISSION RESULTS**

## INTERTEK TESTING SERVICES

---

### 3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

---

## INTERTEK TESTING SERVICES

---

### 3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where      FS = Field Strength in dB $\mu$ V/m  
              RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
              CF = Cable Attenuation Factor in dB  
              AF = Antenna Factor in dB  
              AG = Amplifier Gain in dB  
              PD = Pulse Desensitization in dB  
              AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V  
AF = 7.4 dB  
CF = 1.6 dB  
AG = 29.0 dB  
PD = 0 dB  
AV = -10 dB  
FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 dB $\mu$ V/m

Level in  $\mu$ V/m = Common Antilogarithm [(32 dB $\mu$ V/m)/20] = 39.8  $\mu$ V/m

## INTERTEK TESTING SERVICES

---

### 3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

### 3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission  
at  
204.307 MHz

Judgement: Passed by 3.3 dB

### **TEST PERSONNEL:**

*Sign on file*

Leo Lai, Project Engineer  
*Typed/Printed Name*


December 31, 2014  
*Date*

## INTERTEK TESTING SERVICES


Applicant: Voxx Accessories Corp.  
Model: AWSBT4-B  
Sample: 1/1  
Worst Case Operating Mode: BT Link

Date of Test: December 31, 2014

### Horizontal

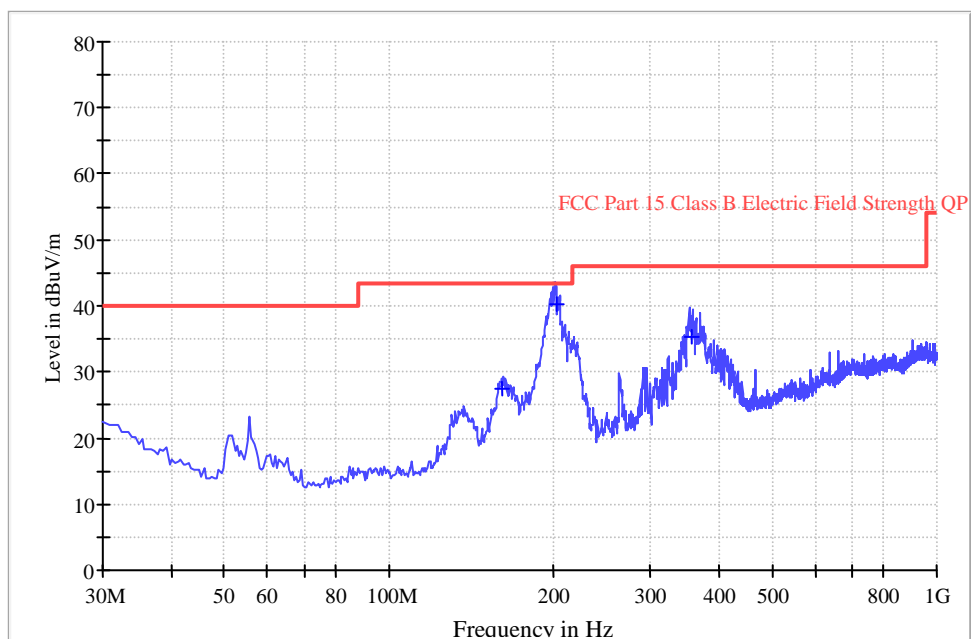

### Vertical

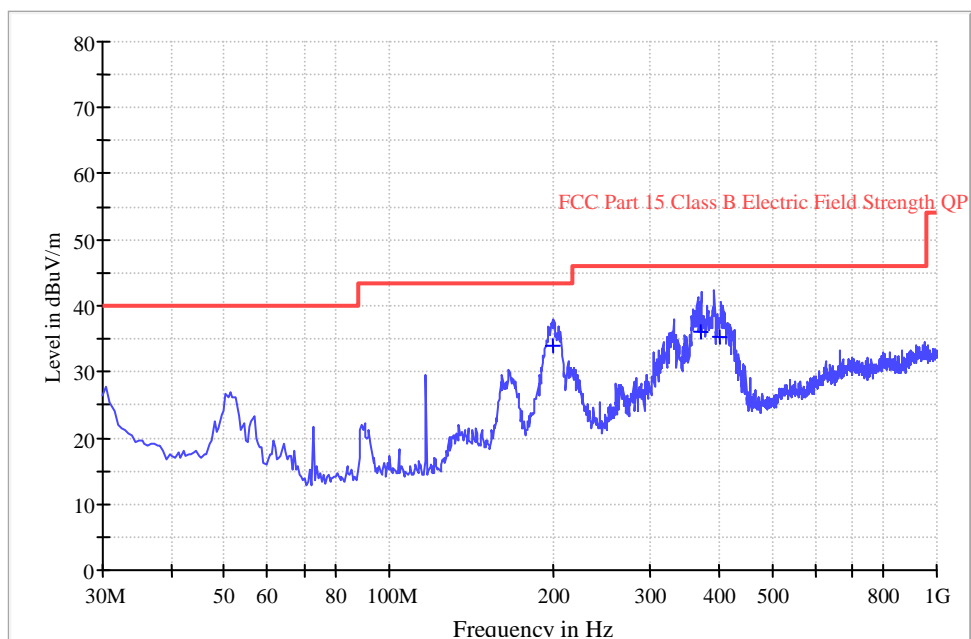

## INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: December 31, 2014

Model: AWSBT4-B

Sample: 1/1

Worst Case Operating Mode: BT Link (powered by adapter)

Table 1

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	163.590	41.8	20.0	5.6	27.4	43.5	-16.1
Horizontal	204.307	51.8	20.0	8.4	40.2	43.5	-3.3
Horizontal	356.902	43.2	20.0	11.7	34.9	46.0	-11.1
Vertical	199.784	35.8	20.0	18.3	34.1	43.5	-9.4
Vertical	363.890	40.7	20.0	15.7	36.4	46.0	-9.6
Vertical	400.104	50.1	20.0	5.4	35.5	46.0	-10.5

- NOTES:
1. Quasi-Peak detector is used except for others stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. All emissions are below the QP limit.



## INTERTEK TESTING SERVICES

---

### 3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission  
at  
7323 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 9.4 dB

#### **TEST PERSONNEL:**

*Sign on file*

Leo Lai, Project Engineer  
*Typed/Printed Name*

December 31, 2014  
*Date*

## INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: December 31, 2014

Model: AWSBT4-B

Sample: 1/1

Worst Case Operating Mode: Transmitting (powered by adapter)

Table 2

### Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2402.000	102.2	36.7	28.5	94.0	114.0	-20.0
Horizontal	4804.000	65.9	36.7	28.5	57.7	74.0	-16.3
Horizontal	7206.000	63.9	36.1	33.1	60.9	74.0	-13.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	2402.000	102.2	36.7	28.5	22.5	71.5	94.0	-22.5
Horizontal	4804.000	65.9	36.7	28.5	22.5	35.2	54.0	-18.8
Horizontal	7206.000	63.9	36.1	33.1	22.5	38.4	54.0	-15.6

- NOTES:
1. Peak detector is used except for others stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Lai

## INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: December 31, 2014

Model: AWSBT4-B

Sample: 1/1

Worst Case Operating Mode: Transmitting (powered by adapter)

Table 3

### Radiated Emissions

(2441MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2441.000	103.0	36.7	28.5	94.8	114.0	-19.2
Horizontal	4882.000	64.1	36.7	28.5	55.9	74.0	-18.1
Horizontal	7323.000	67.6	36.1	33.1	64.6	74.0	-9.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2441.000	103.0	36.7	28.5	22.5	72.3	94.0	-21.7
Horizontal	4882.000	64.1	36.7	28.5	22.5	33.4	54.0	-20.6
Horizontal	7323.000	67.6	36.1	33.1	22.5	42.1	54.0	-11.9

- NOTES:
1. Peak detector is used except for others stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Lai

## INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: December 31, 2014

Model: AWSBT4-B

Sample: 1/1

Worst Case Operating Mode: Transmitting (powered by adapter)

Table 4

### Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2480.000	102.5	36.7	28.6	94.4	114.0	-19.6
Horizontal	4960.000	64.5	36.7	28.6	56.4	74.0	-17.6
Horizontal	7440.000	65.1	36.1	33.4	62.4	74.0	-11.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2480.000	102.5	36.7	28.6	22.5	71.9	94.0	-22.1
Horizontal	4960.000	64.5	36.7	28.6	22.5	33.9	54.0	-20.1
Horizontal	7440.000	65.1	36.1	33.4	22.5	39.9	54.0	-14.1

- NOTES:
1. Peak detector is used except for others stated.
  2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Leo Lai

## INTERTEK TESTING SERVICES

---

### 3.2 Conducted Emission at Mains Terminal

#### 3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

#### 3.2.2 Conducted Emissions

Worst Case Conducted Configuration  
At

0.298 MHz

Judgement: Passed by 3.5 dB margin

#### **TEST PERSONNEL:**

*Sign on file*

Leo Lai, Project Engineer  
*Typed/Printed Name*

December 31, 2014  
*Date*

## INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: December 31, 2014


Model: AWSBT4-B

Sample: 1/1

Worst Case Operating Mode: BT Link (powered by adapter)

Phase: Live

### Conducted Emission Test - FCC

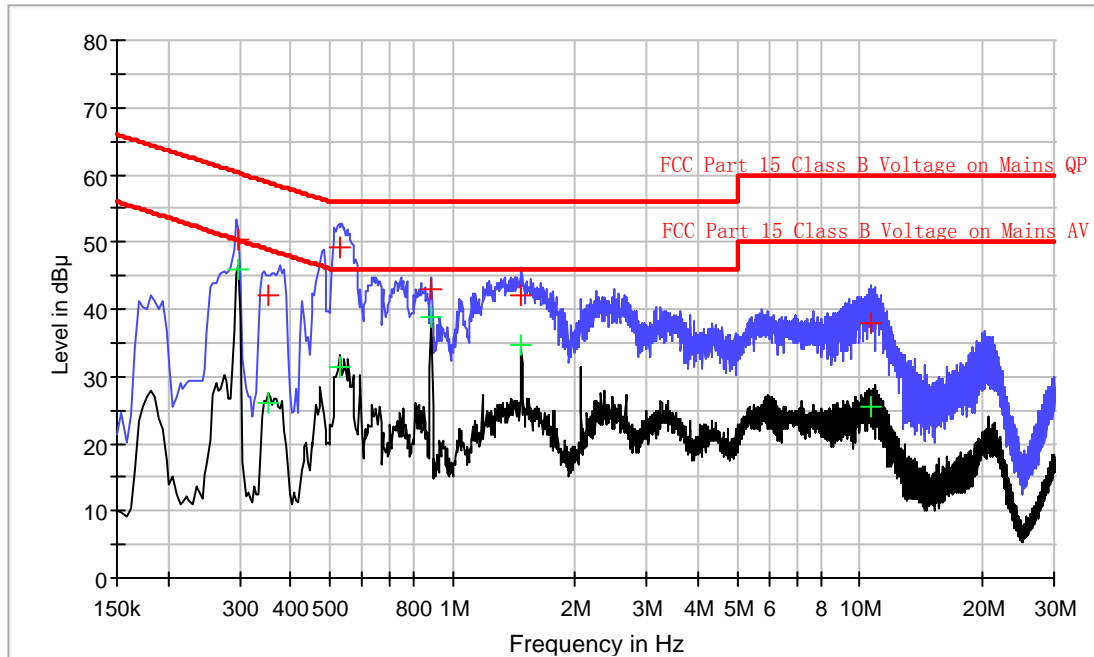

#### Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.298000	50.2	L1	9.8	10.1	60.3
0.354000	42.1	L1	9.8	16.8	58.9
0.530000	49.2	L1	9.8	6.8	56.0
0.886000	43.0	L1	9.9	13.0	56.0
1.478000	42.2	L1	9.9	13.8	56.0
10.614000	37.8	L1	10.1	22.2	60.0

#### Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.298000	46.8	L1	9.8	3.5	50.3
0.354000	26.1	L1	9.8	22.8	48.9
0.530000	31.5	L1	9.8	14.5	46.0
0.886000	38.7	L1	9.9	7.3	46.0
1.478000	34.8	L1	9.9	11.2	46.0
10.614000	25.4	L1	10.1	24.6	50.0

TRF No.: FCC 15C\_TX\_b

Report No.: 141223007SZN-001

FCC ID: VIXAWSBT4B

## INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: December 31, 2014


Model: AWSBT4-B

Sample: 1/1

Worst Case Operating Mode: BT Link (powered by adapter)

Phase: Neutral

### Conducted Emission Test - FCC

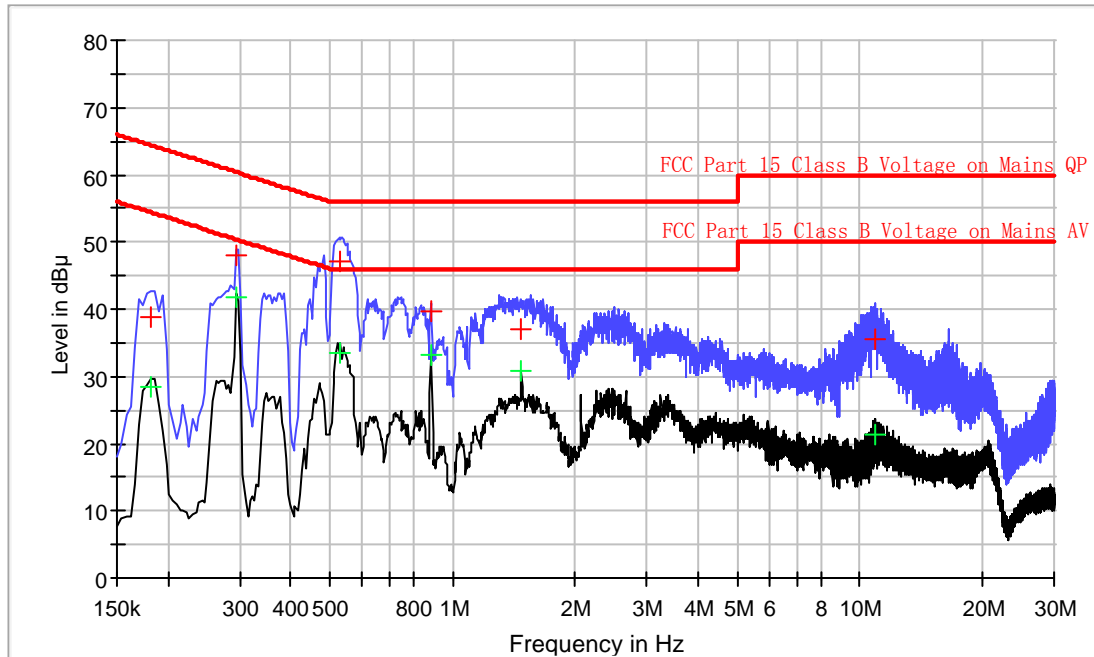

#### Result Table QP

Frequency (MHz)	QuasiPeak (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.182000	38.7	N	10.0	25.7	64.4
0.294000	48.1	N	10.1	12.3	60.4
0.530000	47.3	N	10.2	8.8	56.0
0.886000	39.8	N	10.2	16.2	56.0
1.478000	37.0	N	10.3	19.0	56.0
10.890000	35.5	N	10.4	24.5	60.0

#### Result Table AV

Frequency (MHz)	Average (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.182000	28.4	N	10.0	26.0	54.4
0.294000	41.8	N	10.1	8.6	50.4
0.530000	33.5	N	10.2	12.5	46.0
0.886000	33.3	N	10.2	12.7	46.0
1.478000	31.0	N	10.3	15.0	46.0
10.890000	21.2	N	10.4	28.8	50.0

TRF No.: FCC 15C\_TX\_b

Report No.: 141223007SZN-001

FCC ID: VIXAWSBT4B

**EXHIBIT 4**  
**EQUIPMENT PHOTOGRAPHS**



## INTERTEK TESTING SERVICES

---

### 4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

**EXHIBIT 5**  
**PRODUCT LABELLING**

### 5.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

**EXHIBIT 6**  
**TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**EXHIBIT 7**  
**INSTRUCTION MANUAL**

## INTERTEK TESTING SERVICES

---

### 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**EXHIBIT 8**  
**MISCELLANEOUS INFORMATION**



## INTERTEK TESTING SERVICES

---

### 8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

---

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

#### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

#### **(i) Lower channel 2402MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 94.0 \text{ dB}\mu\text{V/m} - 47.7 \text{ dB} \\ &= 46.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

#### **(ii) Upper channel 2480MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 94.4 \text{ dB}\mu\text{V/m} - 60.4 \text{ dB} \\ &= 34.0 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 54dB $\mu$ V/m (Average Limit).

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period ( $T_{\text{eff}}$ ) is approximately 625 $\mu$ s for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

## INTERTEK TESTING SERVICES

---

### 8.3 Transmitter Duty Cycle Calculation, FCC Rule 15.35(b, c)

Based on the Bluetooth Specification Version 2.1+EDR, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length

Channel hop rate = 800 hops/second (AFH Mode)

Adjusted channel hop rate for DH5 mode = 133.33 hops/second

Time per channel hop =  $1 / 133.33 \text{ hops/second} = 7.5 \text{ ms}$

Time to cycle through all channels =  $7.5 \times 20 \text{ channels} = 150 \text{ ms}$

Number of times transmitter hits on one channel =  $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$

Worst case dwell time = 7.5 ms

Duty cycle connection factor =  $20\log_{10}(7.5\text{ms} / 100\text{ms}) = -22.5 \text{ dB}$

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 - 2009.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.4 - 2009.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz is used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

**EXHIBIT9**  
**TEST EQUIPMENT LIST**



## INTERTEK TESTING SERVICES

### 9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	2-Sep-14	2-Sep-15
SZ185-01	EMI Receiver	R&S	ESCI	100547	10-Mar-14	10-Mar-15
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	3-Sep-14	3-Sep-15
SZ061-08	Horn Antenna	ETS	3115	00092346	19-Oct-14	19-Oct-15
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	29-Apr-14	29-Apr-15
EM031-03	EXA Spectrum Analyzer	R&S	FSV40	101506	09-Jun-14	09-Jun-15
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	10-Mar-14	10-Mar-15
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	19-Apr-14	19-Apr-15
SZ062-02	RF Cable	RADIAL	RG 213U	--	3-Jul-14	3-Jan-15
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	9-Oct-14	9-Apr-15
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	21-May-14	21-May-15
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	1-Nov-14	1-Nov-15
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	16-Jun-14	16-Jun-15
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	23-Aug-14	23-Aug-15
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-14	23-Aug-15