


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


|               |                     |                |           |
|---------------|---------------------|----------------|-----------|
| Temperature   | 23°C                | Humidity       | 61%       |
| Test Engineer | Mars Lin, Hank Yang | Configurations | 2.4G + 5G |

### Horizontal

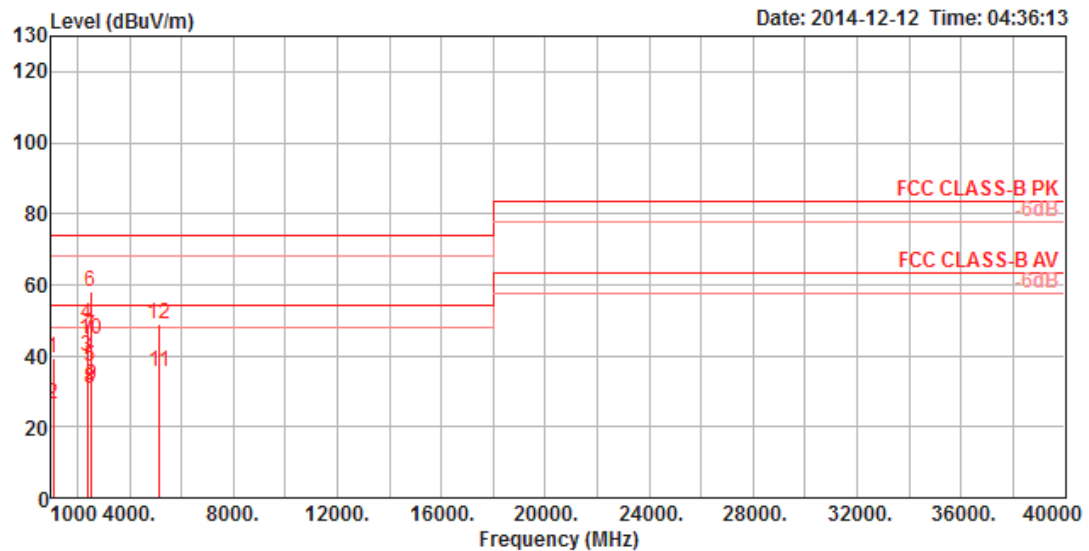

|    | Freq    | Level  | Limit | Over   | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos |                |
|----|---------|--------|-------|--------|-------|--------------|--------|--------|---------|-------|----------------|
|    | MHz     | dBuV/m | Line  | Limit  | Level | Loss         | Factor | Factor | Remark  | cm    | deg            |
|    |         |        |       | dB     | dBuV  | dB           | dB/m   | dB     |         |       | Pol/Phase      |
| 1  | 1062.90 | 39.56  | 74.00 | -34.44 | 49.36 | 2.88         | 24.45  | 37.13  | Peak    | 100   | 1 HORIZONTAL   |
| 2  | 1063.94 | 26.46  | 54.00 | -27.54 | 36.25 | 2.88         | 24.45  | 37.12  | Average | 100   | 1 HORIZONTAL   |
| 3  | 2381.07 | 40.01  | 54.00 | -13.99 | 43.16 | 4.43         | 27.06  | 34.64  | Average | 117   | 350 HORIZONTAL |
| 4  | 2383.58 | 49.06  | 74.00 | -24.94 | 52.21 | 4.43         | 27.06  | 34.64  | Peak    | 117   | 350 HORIZONTAL |
| 5  | 2496.92 | 36.86  | 54.00 | -17.14 | 39.50 | 4.53         | 27.40  | 34.57  | Average | 117   | 3 HORIZONTAL   |
| 6  | 2497.67 | 57.86  | 74.00 | -16.14 | 60.49 | 4.53         | 27.40  | 34.56  | Peak    | 117   | 3 HORIZONTAL   |
| 7  | 2511.56 | 45.44  | 74.00 | -28.56 | 48.01 | 4.55         | 27.44  | 34.56  | Peak    | 116   | 305 HORIZONTAL |
| 8  | 2514.87 | 30.78  | 54.00 | -23.22 | 33.34 | 4.55         | 27.44  | 34.55  | Average | 116   | 305 HORIZONTAL |
| 9  | 2538.36 | 31.72  | 54.00 | -22.28 | 34.20 | 4.58         | 27.48  | 34.54  | Average | 159   | 4 HORIZONTAL   |
| 10 | 2540.20 | 44.59  | 74.00 | -29.41 | 47.03 | 4.58         | 27.52  | 34.54  | Peak    | 159   | 4 HORIZONTAL   |
| 11 | 5172.92 | 35.43  | 54.00 | -18.57 | 30.21 | 6.66         | 31.53  | 32.97  | Average | 100   | 81 HORIZONTAL  |
| 12 | 5173.29 | 48.75  | 74.00 | -25.25 | 43.53 | 6.66         | 31.53  | 32.97  | Peak    | 100   | 81 HORIZONTAL  |

# Vertical

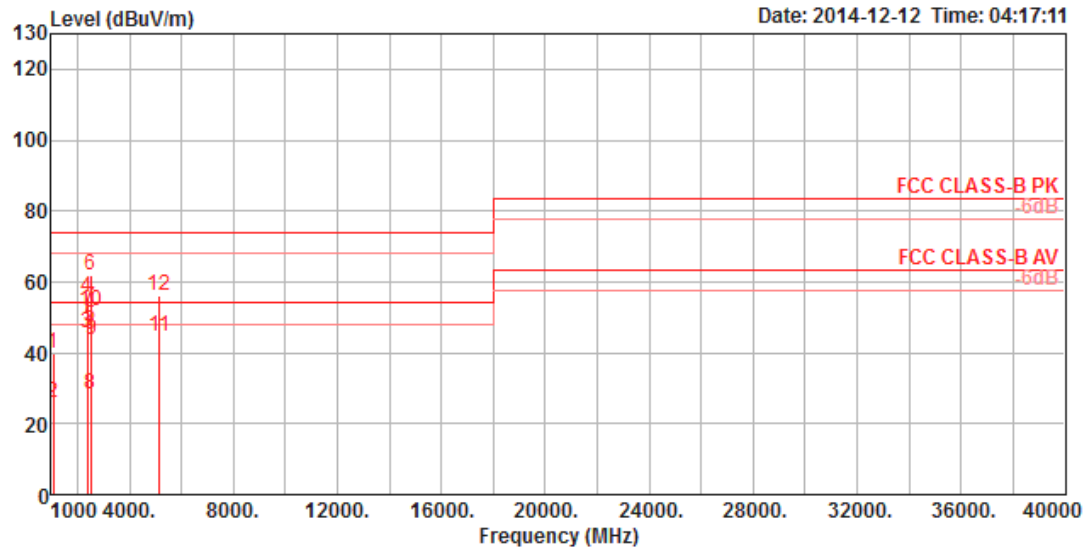

|    | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |        | A/Pos   | T/Pos | Pol/Phase    |
|----|---------|--------|--------|--------|-------|--------------|--------|--------|---------|-------|--------------|
|    | MHz     | dBuV/m | dBuV/m | Limit  | Level | Loss         | Factor | Factor | Remark  | cm    | deg          |
| 1  | 1062.67 | 39.87  | 74.00  | -34.13 | 49.67 | 2.87         | 24.46  | 37.13  | Peak    | 100   | 221 VERTICAL |
| 2  | 1063.94 | 25.99  | 54.00  | -28.01 | 35.76 | 2.88         | 24.47  | 37.12  | Average | 100   | 221 VERTICAL |
| 3  | 2380.83 | 45.56  | 54.00  | -8.44  | 48.68 | 4.43         | 27.09  | 34.64  | Average | 100   | 352 VERTICAL |
| 4  | 2383.61 | 55.69  | 74.00  | -18.31 | 58.80 | 4.43         | 27.10  | 34.64  | Peak    | 100   | 352 VERTICAL |
| 5  | 2498.37 | 47.40  | 54.00  | -6.60  | 50.02 | 4.54         | 27.40  | 34.56  | Average | 100   | 346 VERTICAL |
| 6  | 2498.67 | 62.01  | 74.00  | -11.99 | 64.63 | 4.54         | 27.40  | 34.56  | Peak    | 100   | 346 VERTICAL |
| 7  | 2514.95 | 52.68  | 74.00  | -21.32 | 55.24 | 4.55         | 27.44  | 34.55  | Peak    | 110   | 357 VERTICAL |
| 8  | 2515.48 | 28.43  | 54.00  | -25.57 | 30.99 | 4.55         | 27.44  | 34.55  | Average | 110   | 357 VERTICAL |
| 9  | 2539.82 | 43.76  | 54.00  | -10.24 | 46.22 | 4.58         | 27.50  | 34.54  | Average | 100   | 11 VERTICAL  |
| 10 | 2540.77 | 51.92  | 74.00  | -22.08 | 54.37 | 4.58         | 27.51  | 34.54  | Peak    | 100   | 11 VERTICAL  |
| 11 | 5172.74 | 44.38  | 54.00  | -9.62  | 39.15 | 6.66         | 31.54  | 32.97  | Average | 100   | 9 VERTICAL   |
| 12 | 5173.46 | 56.11  | 74.00  | -17.89 | 50.88 | 6.66         | 31.54  | 32.97  | Peak    | 100   | 9 VERTICAL   |