


Inverted F Antenna Specification

Summary


ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2400MHz	2480MHz	2400MHz	2400MHz	2480 MHz
	-1.26	-0.76	-0.59	-5.25	-2.46	-1.86
MAX. Gain	-0.59dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					
Manufacture	Shenzhen Jumingsheng Technology Co., Ltd.					
Address	Shenzhen Bao'an District Ring Road Liancheng SoundPhotoelectric Industrial Park Jupiter 708					

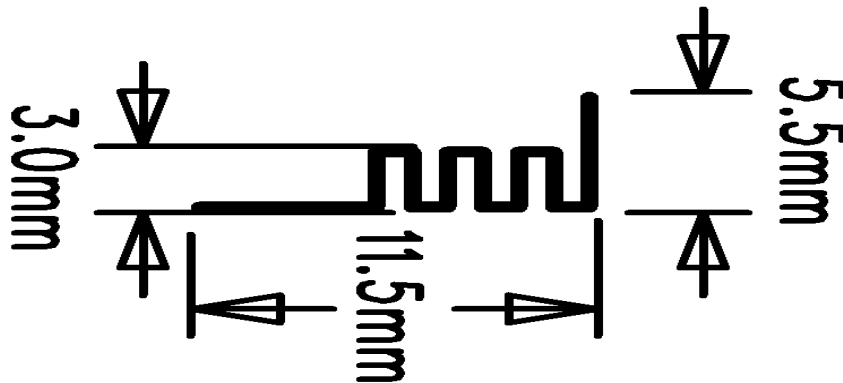

Horizontal: 2400 MHz 2450 MHz 2480 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

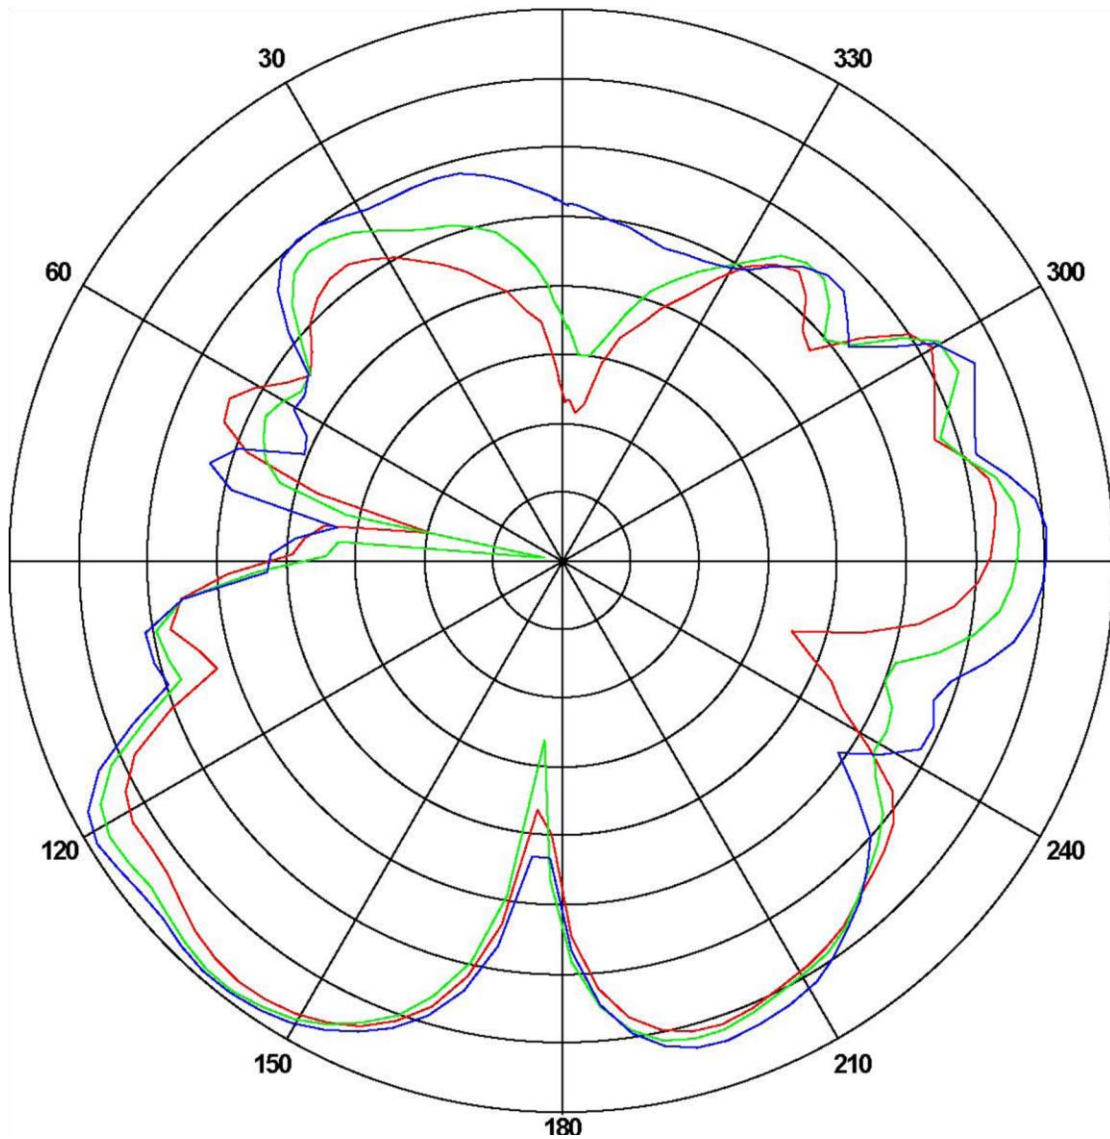


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.26	-30.08	-7.19
2450	-0.77	-36.56	-7.48
2480	-0.59	-22.03	-6.59

Vertical: 2400 MHz 2450 MHz 2480 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

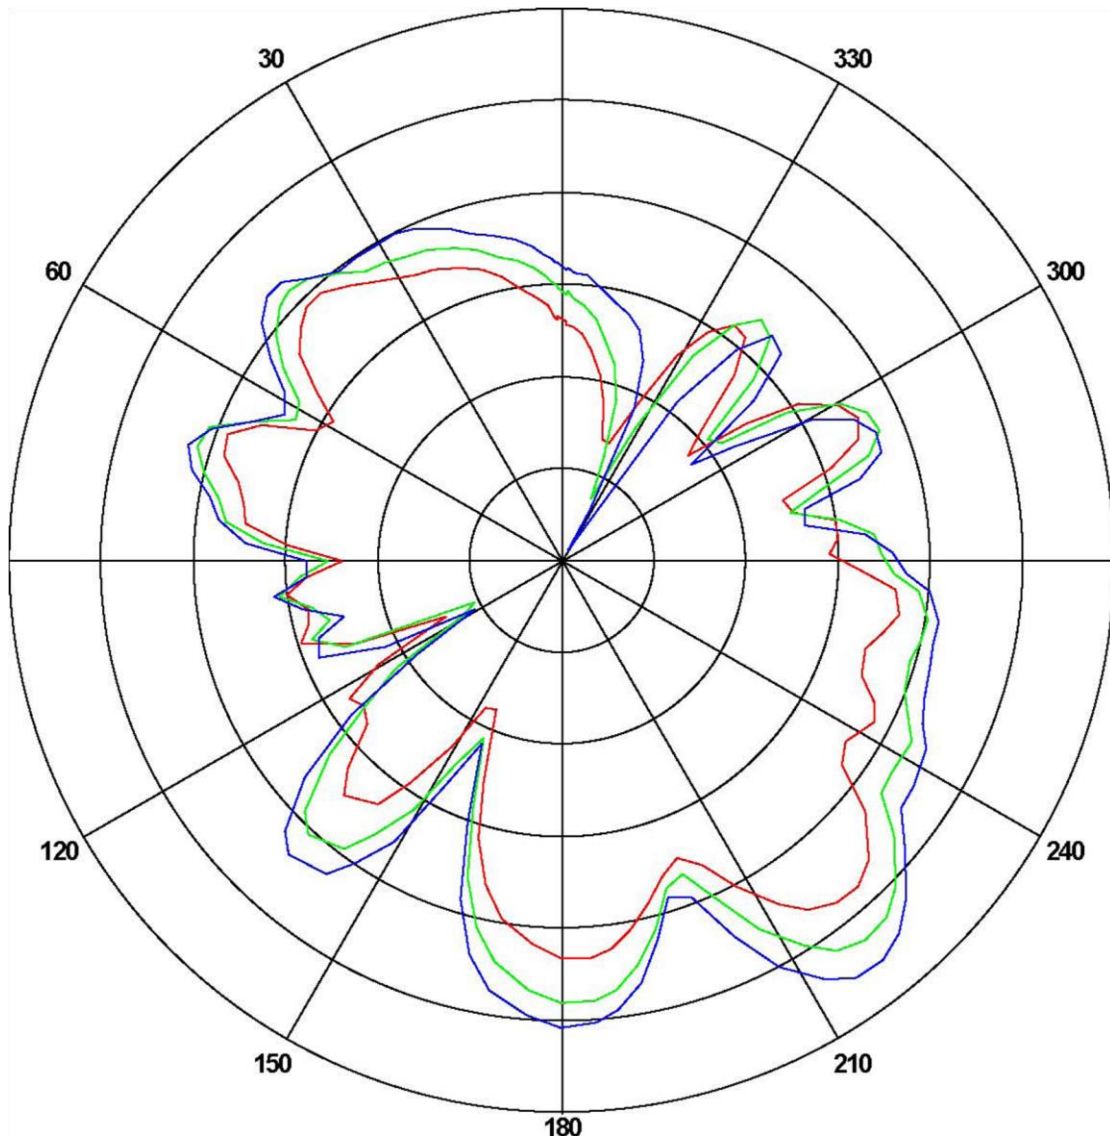

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-5.25	-22.14	-12.43
2450	-2.47	-24.58	-10.47
2480	-1.86	-29.52	-9.20