RF-CMDWS-UTC

Antenna info

Overview:

Antenna description:

• The antenna is shaped in a rectangular form and used in a monopole arrangement. Antenna is permanently attached to the unit. The antenna does not use reverse polarity connector.

Antenna Drawing:



Antenna design:

Frequency 319.508 MHz

Length 4.5 inches

Diameter 0.065 inches


Capacitance 8.114 pF

Inductance 17.719 nH

Quarter Wavelength 0.115 m

Antenna Length 65.10 %

Radiation Resistance 0.00 Ohms

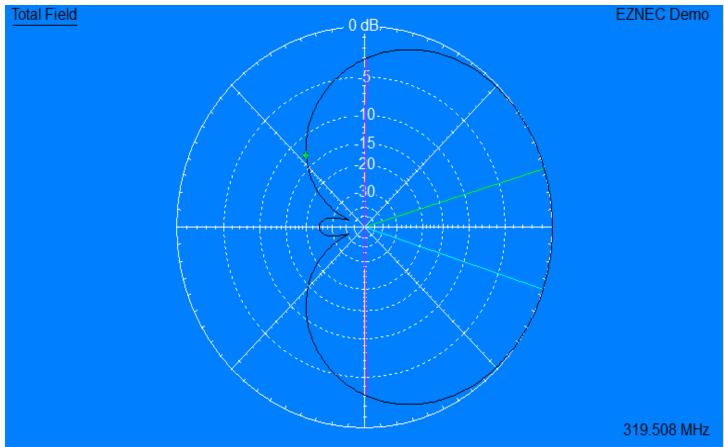

Azimuth Plot

Elevation Angle 0.0 deg. Outer Ring 3.59 dBi


Slice Max Gain 3.59 dBi @ Az Angle = 17.0 deg.

Front/Back 31.95 dB

Beamwidth 178.6 deg.; -3dB @ 270.7, 89.3 deg. Sidelobe Gain 3.59 dBi @ Az Angle = 342.0 deg.

Front/Sidelobe 0.0 dB

Cursor Az 131.0 deg. Gain -9.34 dBi -12.92 dBmax

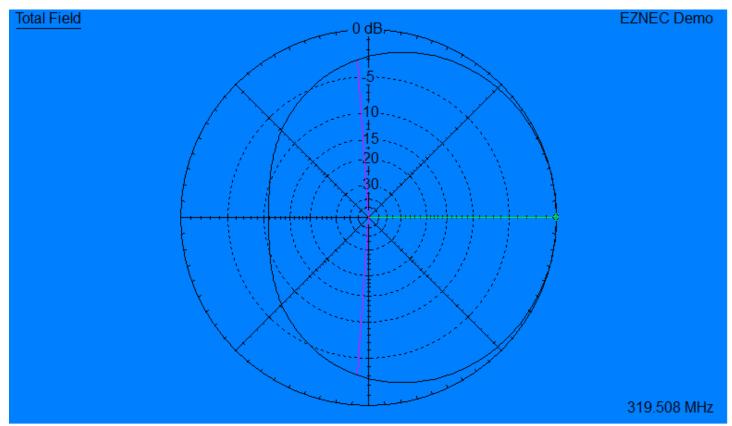

Azimuth Plot

Elevation Angle 53.0 deg. Outer Ring -4.7 dBref

Slice Max Gain -4.7 dBref @ Az Angle = 0.0 deg.

Front/Back 10.87 dB

Beamwidth 188.0 deg.; -3dB @ 266.0, 94.0 deg.
Sidelobe Gain <-100 dBi
Front/Sidelobe > 100 dB

Cursor Az 0.0 deg. -4.7 dBref Gain 0.0 dBmax