

FCC Test Report

Report No.: AGC01741240602FR02

FCC ID : 2AYT3-AC50P

APPLICATION PURPOSE Original Equipment

PRODUCT DESIGNATION: Portable Power Station

BRAND NAME : BLUETTI

MODEL NAME : AC50P

APPLICANT: SHENZHEN POWEROAK NEWENER CO., LTD

DATE OF ISSUE : Oct. 23, 2024

STANDARD(S) : FCC Part 15 Subpart C

REPORT VERSION: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 30

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 23, 2024	Valid	Initial Release




TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 TEST METHODOLOGY	7
2.4 SPECIAL ACCESSORIES	7
2.5 EQUIPMENT MODIFICATIONS	7
2.6 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	ε
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	9
3.5 LIST OF EQUIPMENTS USED	10
4. SYSTEM TEST CONFIGURATION	11
4.1 EUT CONFIGURATION	11
4.2 EUT EXERCISE	11
4.3 CONFIGURATION OF TESTED SYSTEM	11
4.4 EQUIPMENT USED IN TESTED SYSTEM	12
4.5 SUMMARY OF TEST RESULTS	12
5. DESCRIPTION OF TEST MODES	13
6. FIELD STRENGTH OF FUNDAMENTAL	14
6.1 PROVISIONS APPLICABLE	14
6.3 FIELD STRENGTH CALCULATION	16
6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	17
6.5 MEASUREMENT RESULTS:	18
7. 20 DB BANDWIDTH	24
7.1 PROVISIONS APPLICABLE	24
7.2 MEASUREMENT PROCEDURE	24
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	24
7.4 MEASUREMENT RESULTS	25
8. AC POWER LINE CONDUCTED EMISSION TEST	26
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	26
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	26
8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	licated Testing/Inspection



Page 4 of 30

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	27
8.5 MEASUREMENT RESULTS	27
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX R. PHOTOGRAPHS OF TEST FUT	30





1. GENERAL INFORMATION

Applicant	SHENZHEN POWEROAK NEWENER CO., LTD				
Address	F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China				
Manufacturer SHENZHEN POWEROAK NEWENER CO., LTD					
Address	F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China				
Factory	Huizhou PowerOak Innovation Co., Ltd				
Address	(No.1 Workshop) Longsheng 5th Road, Laoshe Village, Dayawan West Zone, Huizhou, Guangdong, China				
Product Designation	Portable Power Station				
Brand Name	BLUETTI				
Test Model	AC50P				
Series Model	N/A				
Declaration Difference	N/A				
Date of receipt of test item	Sep. 06, 2024				
Date of Test	Sep. 06, 2024 to Oct. 23, 2024				
Deviation from Standard	No any deviation from the test method				
Condition of Test Sample	Normal				
Test Result	Pass				
Test Report Form No	AGCER -FCC-WPT-V1				

The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jack Gui
(Project Engineer)

Calvin Liu
(Reviewer)

Approved By

Max Zhang
(Authorized Officer)

Oct. 23, 2024

Oct. 23, 2024



Page 6 of 30

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	19.0601.1142-01
Software Version	2171-01
Operation Frequency	110.5kHz-148kHz
Modulation Type	FSK
Field Strength of Fundamental	72.69dBuV/m@3m (Max)
Antenna Designation	Coil Antenna
Antenna Gain	0dBi
Input Rating	AC: 120V~50/60Hz, 9A DC/PV: 12V-28V=8.5A, 200W Max.
Output Rating	AC: 120V~50/60Hz, 700W Total USB-A: 5V=3A USB-C: 5/9/12/15/20V=3A; 20V=3.25A each port (With E-Marker chip built in) Cigarette Lighter Port: 12V=10A Wireless Charging: 5/7.5/10/15W AC & DC Output: 700W Total



Page 7 of 30

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AYT3-AC50P** filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.3 TEST METHODOLOGY

The tests were performed according to following standards:

No. Identity Document Title			
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations	
2	FCC 47 CFR Part 15	Radio Frequency Devices	
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices	

2.4 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.5 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.6 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will.



Page 8 of 30

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 30

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS				
Temperature range (℃)	15 - 35	-20 - 50				
Relative humidty range	20 % - 75 %	20 % - 75 %				
Pressure range (kPa)	86 - 106	86 - 106				
Power supply						

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

ltem	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



Page 10 of 30

3.5 LIST OF EQUIPMENTS USED

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• R	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2025-03-22	
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
	AGC-EM-A119	2.4GHz Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission								
Used	sed Equipment No. Test Equipment Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD)								
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		

• Tes	Test Software								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A				
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				



Report No.: AGC01741240602FR02 Page 11 of 30

4. SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:





Page 12 of 30

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Wireless charging load	N/A	Y&Z	Support 5W,7.5W,10W,15W	
2	AC POWER LINE				1.2m,unshiel ded

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1				-	

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Radiated Spurious Emission	Pass
3	§15.215(c)	20dB Bandwidth	Pass
4	§15.205(a)	Restricted Bands of Operation	Pass
5	§15.207	AC Power Line Conducted Emission	Pass



Page 13 of 30

5. DESCRIPTION OF TEST MODES

Summary table of Test Cases						
Test Item	Equipment type / Modulation					
Test Item	WPT_(TX:141.7kHz)/ FSK					
	Mode 1: AC input + EUT + Wireless load (15W)					
	Mode 2: AC input + EUT + Wireless load (10W)					
	Mode 3: AC input + EUT + Wireless load (7.5W)					
	Mode 4: AC input + EUT + Wireless load (5W)					
Radiated & Conducted	Mode 5: AC input + EUT + Wireless load (Null load)					
Test Cases	Mode 6: EUT + Wireless load (15W)					
	Mode 7: EUT + Wireless load (10W)					
	Mode 8: EUT + Wireless load (7.5W)					
	Mode 9: EUT + Wireless load (5W)					
	Mode 10: EUT + Wireless load (Null load)					
	Mode 1: AC input + EUT + Wireless load (15W)					
	Mode 2: AC input + EUT + Wireless load (10W)					
AC Conducted Emission	Mode 3: AC input + EUT + Wireless load (7.5W)					
	Mode 4: AC input + EUT + Wireless load (5W)					
	Mode 5: AC input + EUT + Wireless load (Null load)					

Note:

- 1. Only the result of the worst case (mode 1- full load) was recorded in the report, if no other cases
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- The EUT supports 15W, 10W, 7.5W, 5W "wireless output, and all modes have been tested at full load, half load and null load, only the worst mode is reflected in the report.



Page 14 of 30

6. FIELD STRENGTH OF FUNDAMENTAL

6.1 PROVISIONS APPLICABLE

Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	9KHz to 1GHz						
Test site:	Measurement Distar	nce: 3m					
	Frequency	Detector	RBW	VBW	Value		
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak		
Receiver setup:	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak		
ixeceiver setup.	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak		
	Abovo 1CUz	Peak	1MHz	3MHz	Peak		
	Above 1GHz	Peak	1MHz	10Hz	Average		
	_						

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 4CLI-	54.00	Average Value
Above 1GHz	74.00	Peak Value

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 15 of 30

6.2 MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC01741240602FR02 Page 16 of 30

6.3 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where $FS = Field Strength in dB\mu V/m$

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m AG = Amplifier Gain in dB AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF where FS = Field Strength in $dB\mu V/m$ RR = RA - AG - AV in $dB\mu V$ LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m.

This value in dBµV/m was converted to its corresponding level in µV/m.

 $RA = 52.0 dB\mu V/m$

AF = 7.4 dB/m $RR = 18.0 \text{ dB}\mu\text{V}$ CF = 1.6 dB LF = 9.0 dB

AG = 29.0 dBAV = 5.0 dB

FS = RR + LF

 $FS = 18 + 9 = 27 dB\mu V/m$

Level in μ V/m = Common Antilogarithm [(27 dB μ V/m)/20] = 22.4 μ V/m

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFH[dB(S/m)]$

Where,

H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

LC is the cable loss,

GPA is the gain of the preamplifier (if used), and

AFH is the magnetic antenna factor.

If the "electrical" antenna factor is used instead, the above equation becomes:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFE[dB(m-1)] - 51.5[dB\Omega]$

where AFE is the "electric" antenna factor, as provided by the antenna calibration laboratory.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

RADIATED EMISSION TEST SETUP 9KHz-30MHz

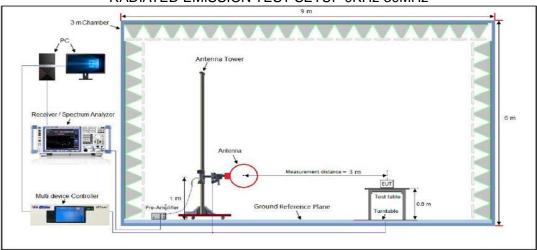

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

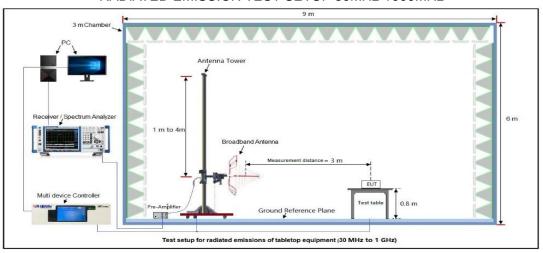

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.




6.5 MEASUREMENT RESULTS:

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz

	ELECTRICF	LLD ILOI I		QUEITO I INA	NITOL SKI IZ	. 150K112		
EUT	Portable Po	wer Station		Model Nam	е	AC50P		
Temperature	22.5° C			Relative Hu	midity	56.8%	56.8%	
Pressure	960hPa			Test Voltage	е	AC120	V, 60Hz	
Worst Mode	Mode 1			Antenna		Face		
72 12.0 0.009	yh X		(MHz)	Haliful			rgin:	
No. Mi	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
1	0.0097	7 15	43 77	50 92	127 66	-76 74	peak	

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.0097	7.15	43.77	50.92	127.66	-76.74	peak
2	0.0128	7.30	42.03	49.33	125.27	-75.94	peak
3	0.0323	6.19	35.36	41.55	117.27	-75.72	peak
4	0.0425	6.91	34.17	41.08	114.91	-73.83	peak
5	0.0747	5.12	32.57	37.69	110.04	-72.35	peak
6 *	0.1474	34.74	32.38	67.12	104.17	-37.05	peak

RESULT: PASS






ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz

EUT	E	Portable Po	wer Station		Model Na	me	AC50I	Р	
Temperature					Relative H		56.8%		
Pressure		960hPa			Test Volta	-		AC120V, 60Hz	
					ige				
	rst Mode Mode 1			Antenna Side					
72								.imit: — A argin: — 6	
, Nº		MANNAMANA	Many Mary Mary Mary		4	5			
12.0 0.009		MPYMUM MAN	Mayor Mayor Jan	(MHz)		who have the control of the control	Willy August How	^,,,,,,,,,,,,,,(,p,,),,(,p,,),,(,p,,),,(,p,,),(p,,,p,,),(p,,p,,),(p,,p,,),(p,,p,,),(p,,p,,p,,),(p,,p,,p,,),(p,,p,,p,,p,,p,,p,,p,,p,,p,,p,,p,,p,,p,	
12.0			Reading	(MHz)	Measure	9-			
12.0		Freq.	Reading Level	(MHz) Correct Factor	Measure ment	e- Limit	Over	0.150	
12.0 0.009 No.		Freq.	Reading Level dBuV	Correct Factor	Measure ment dBuV/m	- Limit	Over	0.150	
12.0 0.009 No.		Freq. MHz 0.0103	Reading Level dBuV 11.54	Correct Factor dB 43.44	Measure ment dBuV/m 54.98	Limit dBuV/m 127.14	Over dB -72.16	Detector peak	
12.0 0.009 No.		Freq.	Reading Level dBuV	Correct Factor	Measure ment dBuV/m	Limit dBuV/m 127.14	Over	Detector peak	
12.0 0.009 No.		Freq. MHz 0.0103	Reading Level dBuV 11.54	Correct Factor dB 43.44	Measure ment dBuV/m 54.98	Limit dBuV/m 127.14 123.84	Over dB -72.16	Detector peak peak	
12.0 0.009 No.		Freq. MHz 0.0103 0.0151	Reading Level dBuV 11.54 5.21	Correct Factor dB 43.44 40.74	Measure ment dBuV/m 54.98 45.95	Limit dBuV/m 127.14 123.84 119.84	Over dB -72.16	Detector peak peak peak	
12.0 0.009 No.		Freq. MHz 0.0103 0.0151 0.0240	Reading Level dBuV 11.54 5.21 3.32	Correct Factor dB 43.44 40.74 37.05	Measure ment dBuV/m 54.98 45.95 40.37	Limit dBuV/m 127.14 123.84 119.84 115.41	Over dB -72.16 -77.89 -79.47	Detector peak peak peak peak	

RESULT: PASS






ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz

	ELECTRIC FI	ELD IESI II						
EUT	Portable Pov	wer Station		Model Nar	me	AC50)P	
Temperature	22.5° C		Relative Humidity			56.8%	%	
Pressure	960hPa			Test Volta	ge	AC12	20V, 60Hz	
Worst Mode	Mode 1			Antenna		Face	Face	
142.0 dBuV/	m							
							Limit: — Margin: —	
82								
1		_						
*								
*								
W. W.	and	3 1000000000000000000000000000000000000	jdetroja da je salvani	y-white the wife of the wife o	W/What day to the fitter	5 X	A.I. M. d. II.	
22.0	and	in the second	felolarifyer Yorkey fraktorels	grandelders <mark>bert</mark> erbyrer gebra.	20 Thropay March works for	E White white was	Makken Maripel Marish kan	
	1. MAN M.		Addinifyer yn fei y byd andr	grandelders <mark>bert</mark> geborgeborg	5	E Whiterprisses	Aughter Applyment to a 20.000	
0.150	0.	Reading	(MHz) Correct	Measure-	5			
22.0	0.	5	(MHz)		5	Ж Мирини Over		
22.0	0.	Reading	(MHz) Correct	Measure-	5			
0.150	lk. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	30.000	
22.0 0.150 No. M	lk. Freq.	Reading Level	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over	30.000	
22.0 0.150 No. M	0. Ik. Freq. MHz 0.1507	Reading Level dBuV 36.52	Correct Factor dB 32.40	Measure- ment dBuV/m 68.92	Limit dBuV/m 103.98	Over dB -35.06	Detector peak	
22.0 0.150 No. M	0.1507 0.5493	Reading Level dBuV 36.52 9.42	Correct Factor dB 32.40 32.20	Measure- ment dBuV/m 68.92 41.62	Limit dBuV/m 103.98 72.81	Over dB -35.06 -31.19	Detector peak peak	
22.0 0.150 No. M	0.1507 0.5493 0.8483	Reading Level dBuV 36.52 9.42 8.26	Correct Factor dB 32.40 32.20 32.12	Measure- ment dBuV/m 68.92 41.62 40.38	Limit dBuV/m 103.98 72.81 69.03	Over dB -35.06 -31.19 -28.65	Detector peak peak peak	


RESULT: PASS





ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz

EUT	Portable Power Station	Model Name	AC50P
Temperature	22.5° C	Relative Humidity	56.8%
Pressure	960hPa	Test Voltage	AC120V, 60Hz
Worst Mode	Mode 1	Antenna	Side

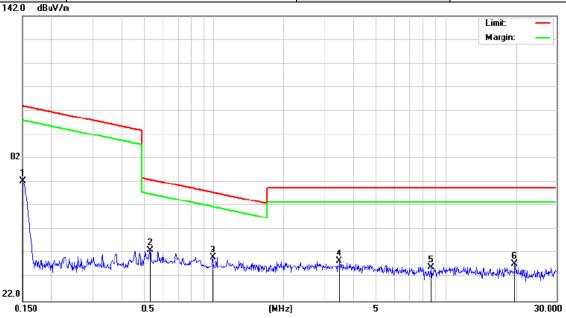


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	0.1500	40.30	32.39	72.69	104.02	-31.33	peak
2	0.5322	11.38	32.20	43.58	73.08	-29.50	peak
3 *	0.9890	8.51	32.01	40.52	67.70	-27.18	peak
4	3.4721	8.12	30.85	38.97	69.54	-30.57	peak
5	8.6371	7.29	29.02	36.31	69.54	-33.23	peak
6	19.7395	7.84	30.03	37.87	69.54	-31.67	peak

RESULT: PASS

NOTES:


- 1. Quasi-Peak detector is used for frequency below 30MHz.
- 2. Negative value in the margin column shows emission below limit.
- 3. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
- 4. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)
- 5. Loop antenna is used for the emission under 30MHz.






RADIATED EMISSION BELOW 1GHz

EUT	Portable Power Station	Model Name	AC50P		
Temperature	22.5° C	Relative Humidity	56.8%		
Pressure	960hPa	Test Voltage	AC120V, 60Hz		
Worst Mode	Mode 1	Antenna	Horizontal		
72.0 dBuV/m					

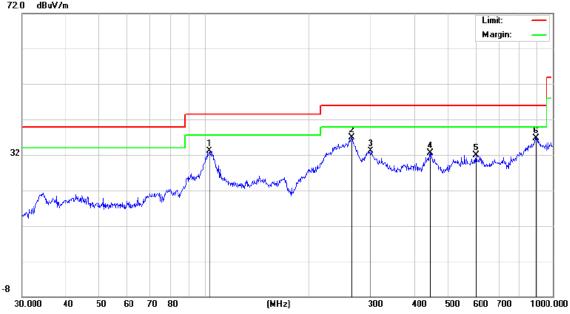

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	1	103.0800	16.78	16.23	33.01	43.50	-10.49	peak
2	* 2	264.7457	22.15	14.82	36.97	46.00	-9.03	peak
3	3	300.3672	16.56	16.50	33.06	46.00	-12.94	peak
4	4	144.8514	7.57	24.93	32.50	46.00	-13.50	peak
5	6	601.4265	6.78	25.11	31.89	46.00	-14.11	peak
6	8	393.8567	5.75	31.03	36.78	46.00	-9.22	peak


RESULT: PASS





RADIATED EMISSION BELOW 1GHz

10.55 150						
EUT	Portable Power Station	Model Name	AC50P			
Temperature	22.5° C	Relative Humidity	56.8%			
Pressure	960hPa	Test Voltage	AC120V, 60Hz			
Worst Mode	Mode 1	Antenna	Vertical			

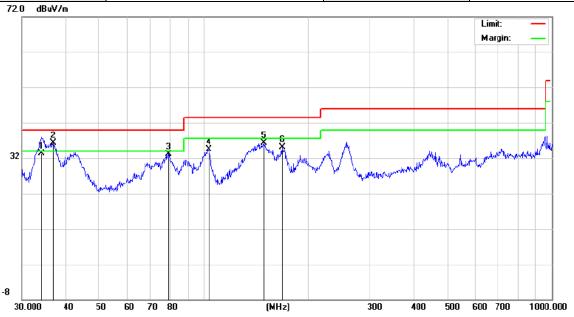

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		34.0363	18.45	14.93	33.38	40.00	-6.62	QP
2	*	36.8952	20.33	15.88	36.21	40.00	-3.79	peak
3		78.9651	16.25	16.91	33.16	40.00	-6.84	peak
4		103.0799	19.85	14.74	34.59	43.50	-8.91	peak
5		148.9625	18.01	18.20	36.21	43.50	-7.29	peak
6		167.8242	16.83	18.32	35.15	43.50	-8.35	peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

- 2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.
- 3. The "Factor" value can be calculated automatically by software of measurement system.





7. 20 dB BANDWIDTH

7.1 PROVISIONS APPLICABLE


N/A


7.2 MEASUREMENT PROCEDURE

Set the parameters of SPA as below:

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 300Hz and the video bandwidth of 1kHz were used.
- 4. Span: 3kHz, Sweep time: Auto
- 5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and Reported.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

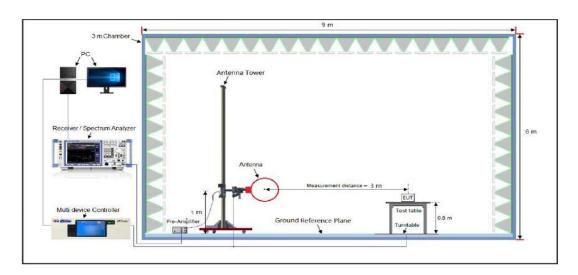






7.4 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth							
Test Mode	est Mode Test Channel 99% Occupied Bandwidth (Hz)		-20dB Bandwidth (Hz)	Limits (Hz)	Pass or Fail		
FSK	141.7	753	895	N/A	Pass		

Test Graphs of Occupied Bandwidth &-20dB Bandwidth

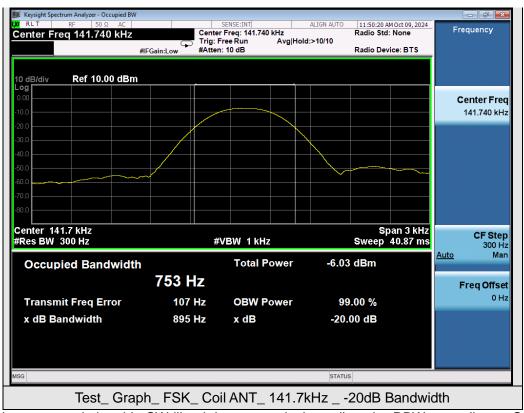

Note: Since the measured signal is CW-like, it is not practical to adjust the RBW according to C63.10, as the measured bandwidth will always follow the RBW, resulting in approximately twice the RBW.



8. AC POWER LINE CONDUCTED EMISSION TEST


8.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

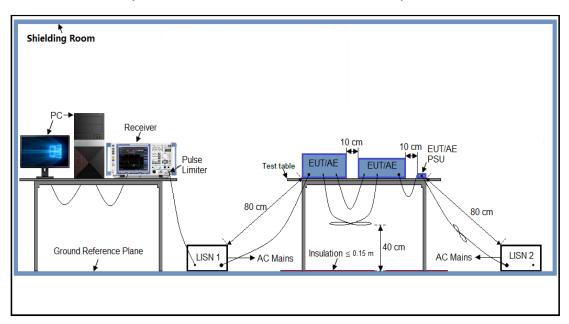



Report No.: AGC01741240602FR02 Page 27 of 30

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.

8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 5. The EUT received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


8.5 MEASUREMENT RESULTS



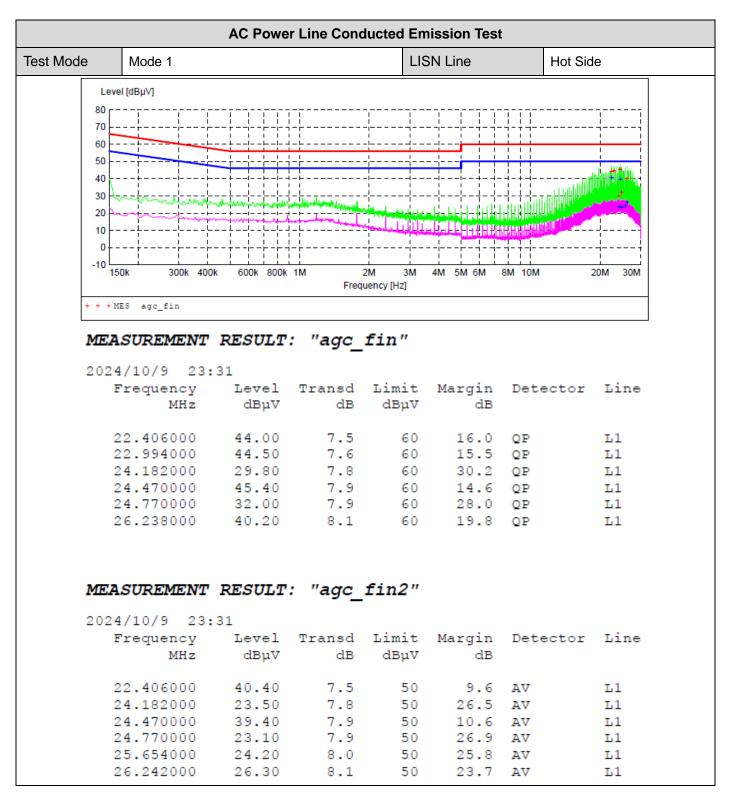

RESULT: Pass



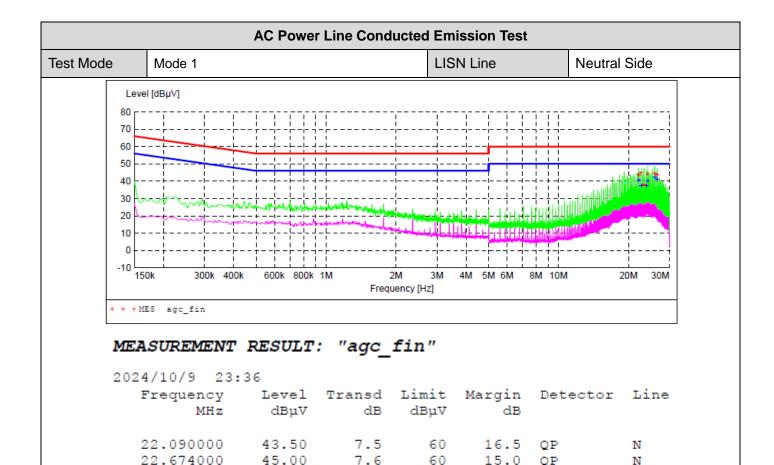

7.7

7.8

8.0

8.1

60

60

60

60

22.3

16.0

15.4

16.6

QP

QP

QΡ

OP

Ν

Ν

Ν

Ν

MEASUREMENT RESULT: "agc fin2"

37.70

44.00

44.60

43.40

2024/10/9 23:36

23.274000

24.150000

25.918000

26.506000

20	24/10/5 25.	30					
	Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
	22.090000	40.50	7.5	50	9.5	AV	N
	22.674000	37.50	7.6	50	12.5	AV	N
	23.862000	37.50	7.8	50	12.5	AV	N
	24.150000	40.10	7.8	50	9.9	AV	N
	25.918000	42.10	8.0	50	7.9	AV	N
	26.506000	40.70	8.1	50	9.3	AV	N

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 30 of 30

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC01741240602AP02

APPENDIX B: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC01741240602AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.