

# TEST REPORT

Applicant Name : Shenzhen Junge Yunchuang Technology Co., Ltd.  
Address : 1204, Unit 3, Building C, Fu Gui Yuan, Fu Gui Road, Fu Hua Community, Xixiang Street, Baoan District, Shenzhen, China  
Report Number : SZNS220214-04312E-RFB  
FCC ID: 2A3FP-PC006  
IC: 27915-PC006

## Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

## Sample Description

Product Type: Tablet  
Model No.: TB-JS100A  
Multiple Model(s) No.: S7,S8,S10,S31,TB-JS101A,JS10, JS31 (please attach the DOS showing the specific differences)  
Trade Mark: N/A  
Date Received: 2022/02/14  
Report Date: 2022/05/11

|              |       |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Black Ding*

Black Ding  
EMC Engineer

## Approved By:

*Robert Li*

Robert Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

|                                                                                                                     |           |
|---------------------------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                                     | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                                            | 4         |
| OBJECTIVE .....                                                                                                     | 4         |
| TEST METHODOLOGY .....                                                                                              | 4         |
| MEASUREMENT UNCERTAINTY .....                                                                                       | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                                               | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                                                             | 6         |
| EQUIPMENT MODIFICATIONS .....                                                                                       | 7         |
| EUT EXERCISE SOFTWARE .....                                                                                         | 7         |
| DUTY CYCLE .....                                                                                                    | 7         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                                            | 11        |
| EXTERNAL I/O CABLE.....                                                                                             | 11        |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                                   | 11        |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                                                | <b>13</b> |
| <b>TEST EQUIPMENT LIST .....</b>                                                                                    | <b>14</b> |
| <b>FCC §1.1307 &amp; §2.1093 - RF EXPOSURE.....</b>                                                                 | <b>16</b> |
| APPLICABLE STANDARD .....                                                                                           | 16        |
| TEST RESULT .....                                                                                                   | 16        |
| <b>RSS-102 – RF EXPOSURE.....</b>                                                                                   | <b>17</b> |
| APPLICABLE STANDARD .....                                                                                           | 17        |
| <b>§15.203 &amp; RSS-GEN §6.8 ANTENNA REQUIREMENT.....</b>                                                          | <b>18</b> |
| APPLICABLE STANDARD .....                                                                                           | 18        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                                                                | 19        |
| <b>§15.207 (A) &amp; RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS .....</b>                                             | <b>20</b> |
| APPLICABLE STANDARD .....                                                                                           | 20        |
| EUT SETUP.....                                                                                                      | 21        |
| EMI TEST RECEIVER SETUP.....                                                                                        | 21        |
| TEST PROCEDURE .....                                                                                                | 21        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                                                                         | 22        |
| TEST DATA .....                                                                                                     | 22        |
| <b>§15.205, §15.209, §15.247(D) &amp; RSS-GEN §8.10 &amp; RSS-247 §5.5 SPURIOUS EMISSIONS .....</b>                 | <b>25</b> |
| APPLICABLE STANDARD .....                                                                                           | 25        |
| EUT SETUP.....                                                                                                      | 25        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                                                   | 26        |
| TEST PROCEDURE .....                                                                                                | 27        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                                                      | 27        |
| TEST DATA .....                                                                                                     | 27        |
| <b>§15.247 (A)(2) &amp; RSS-GEN §6.7 RSS-247 §5.2 (A) 99% OCCUPIED BANDWIDTH &amp; 6 DB EMISSION BANDWIDTH.....</b> | <b>38</b> |
| APPLICABLE STANDARD .....                                                                                           | 38        |
| TEST PROCEDURE .....                                                                                                | 38        |
| TEST DATA .....                                                                                                     | 39        |

|                                                                                    |           |
|------------------------------------------------------------------------------------|-----------|
| <b>§15.247(B)(3) &amp; RSS-247 §5.4(D) MAXIMUM CONDUCTED OUTPUT POWER .....</b>    | <b>59</b> |
| APPLICABLE STANDARD .....                                                          | 59        |
| TEST PROCEDURE .....                                                               | 59        |
| TEST DATA .....                                                                    | 59        |
| <b>§15.247(D) &amp; RSS-247 §5.5 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b> | <b>61</b> |
| APPLICABLE STANDARD .....                                                          | 61        |
| TEST PROCEDURE .....                                                               | 61        |
| TEST DATA .....                                                                    | 61        |
| <b>§15.247(E) &amp; RSS-247 §5.2 (B) POWER SPECTRAL DENSITY .....</b>              | <b>68</b> |
| APPLICABLE STANDARD .....                                                          | 68        |
| TEST PROCEDURE .....                                                               | 68        |
| TEST DATA .....                                                                    | 68        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                                     |                                                                                                               |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------|
| HVIN                                | PC006                                                                                                         |
| FVIN                                | TB-JS100A _V1.0                                                                                               |
| Frequency Range                     | BLE 1M/2M: 2402-2480MHz<br>Wi-Fi: 2412-2462MHz                                                                |
| Maximum Conducted Peak Output Power | BLE: 3.68dBm<br>Wi-Fi: 21.32dBm(802.11b), 18.00dBm(802.11g)<br>18.11dBm(802.11n-HT20), 17.55dBm(802.11n-HT40) |
| Modulation Technique                | BLE: GFSK<br>Wi-Fi: DSSS, OFDM                                                                                |
| Antenna Specification*              | 2.0dBi (It is provided by the applicant)                                                                      |
| Voltage Range                       | DC 3.8V from battery or DC 5.0V from adapter                                                                  |
| Sample serial number                | SZNS220214-04312E-RF-S1 (Assigned by ATC)                                                                     |
| Sample/EUT Status                   | Good condition                                                                                                |
| Adapter Information                 | Model:FX2U-050200U<br>Input: AC 100-240V 50/60Hz 0.4A<br>Output: DC 5V 2A                                     |

### Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

| Parameter                          |                 | Uncertainty            |
|------------------------------------|-----------------|------------------------|
| Occupied Channel Bandwidth         |                 | 5%                     |
| RF Frequency                       |                 | $0.082 \times 10^{-7}$ |
| RF output power, conducted         |                 | 0.73dB                 |
| Unwanted Emission, conducted       |                 | 1.6dB                  |
| AC Power Lines Conducted Emissions |                 | 2.72dB                 |
| Emissions,<br>Radiated             | 9kHz - 30MHz    | 2.66dB                 |
|                                    | 30MHz - 1GHz    | 4.28dB                 |
|                                    | 1GHz - 18GHz    | 4.98dB                 |
|                                    | 18GHz - 26.5GHz | 5.06dB                 |
|                                    | 26.5GHz - 40GHz | 4.72dB                 |
| Temperature                        |                 | 1°C                    |
| Humidity                           |                 | 6%                     |
| Supply voltages                    |                 | 0.4%                   |

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel List

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2412            | 7       | 2442            |
| 2       | 2417            | 8       | 2447            |
| 3       | 2422            | 9       | 2452            |
| 4       | 2427            | 10      | 2457            |
| 5       | 2432            | 11      | 2462            |
| 6       | 2437            | /       | /               |

For 802.11b, 802.11g, 802.11n-HT20, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40, EUT was tested with Channel 3, 6 and 9.

Channel List

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | 21      | 2444            |
| 2       | 2406            | 22      | 2446            |
| 3       | 2408            | 23      | 2448            |
| 4       | 2410            | 24      | 2450            |
| 5       | 2412            | 25      | 2452            |
| 6       | 2414            | 26      | 2454            |
| 7       | 2416            | 27      | 2456            |
| 8       | 2418            | 28      | 2458            |
| 9       | 2420            | 29      | 2460            |
| 10      | 2422            | 30      | 2462            |
| 11      | 2424            | 31      | 2464            |
| 12      | 2426            | 32      | 2466            |
| 13      | 2428            | 33      | 2468            |
| 14      | 2430            | 34      | 2470            |
| 15      | 2432            | 35      | 2472            |
| 16      | 2434            | 36      | 2474            |
| 17      | 2436            | 37      | 2476            |
| 18      | 2438            | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

EUT was tested with Channel 0, 19 and 39.

## Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

“AW869A&AW869B APK ”\* exercise software was used.

The device was tested with the worst case was performed as below:


| Mode         | Data rate | Power Level |                |              |
|--------------|-----------|-------------|----------------|--------------|
|              |           | Low Channel | Middle Channel | High Channel |
| 802.11b      | 1Mbps     | D8          | D8             | D8           |
| 802.11g      | 6Mbps     | D0          | D0             | D0           |
| 802.11n-HT20 | MCS0      | D0          | D0             | D0           |
| 802.11n-HT40 | MCS0      | D0          | D0             | D0           |
| BLE 1M       | 1Mbps     | 7           | 7              | 7            |
| BLE 2M       | 2Mbps     | 7           | 7              | 7            |

## Duty cycle

| Mode         | Ton(ms) | Ton+Toff (ms) | Duty Cycle (%) | 1/T(kHz) |
|--------------|---------|---------------|----------------|----------|
| 802.11b      | 12.286  | 12.362        | 99.39          | 0.081    |
| 802.11g      | 2.054   | 2.109         | 97.39          | 0.487    |
| 802.11n-HT20 | 1.906   | 2.065         | 92.30          | 0.525    |
| 802.11n-HT40 | 0.939   | 1.139         | 82.44          | 1.065    |
| BLE 1M       | 2.174   | 2.522         | 86.20          | 0.460    |
| BLE 2M       | 1.217   | 1.232         | 99.8           | 0.822    |


Note: T is minimum transmission duration.

## 802.11b mode

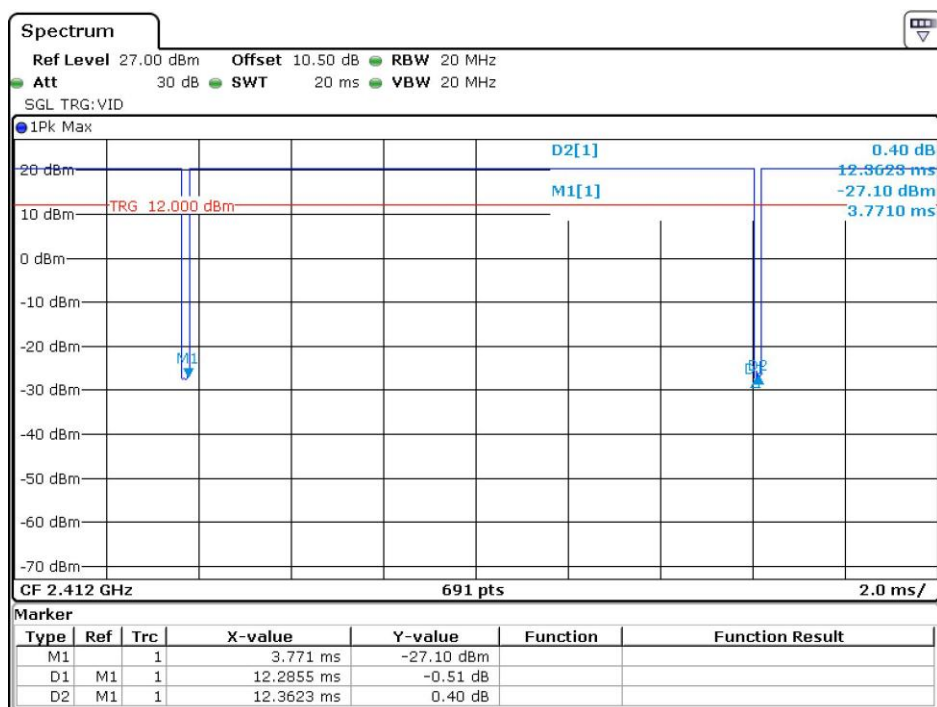

Date: 31.MAR.2022 17:35:41


## 802.11g mode

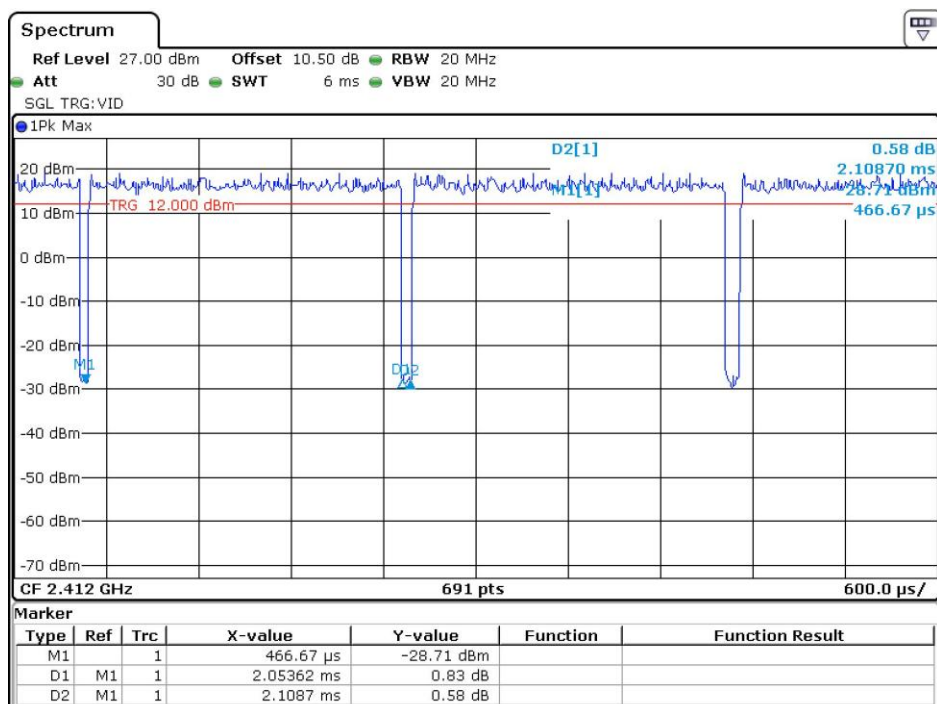

Date: 31.MAR.2022 17:34:07




## 802.11n20 mode

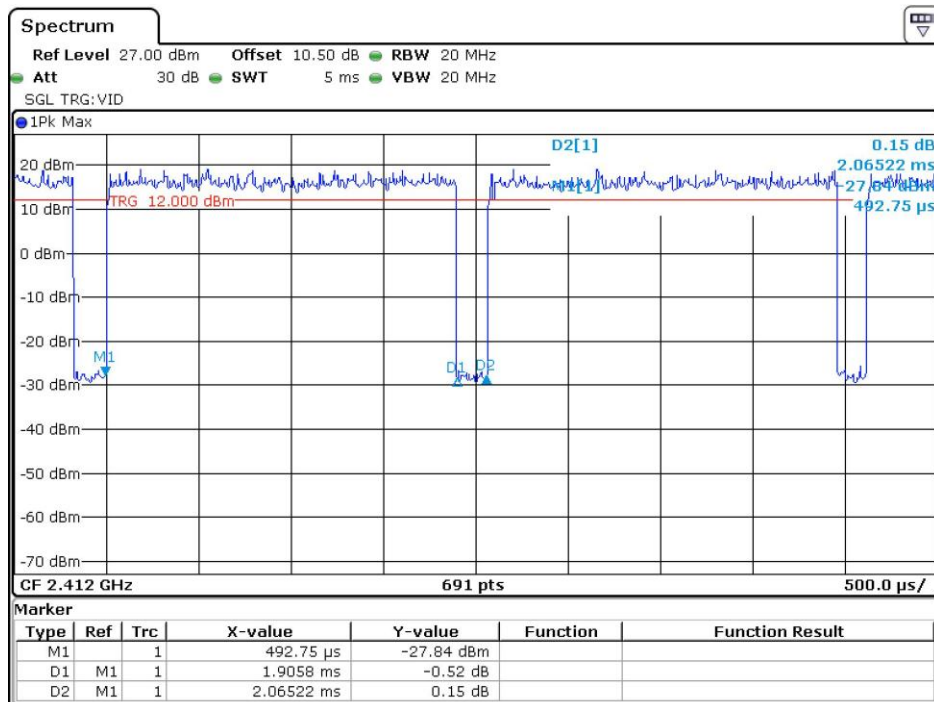


Date: 31.MAR.2022 17:33:29

## 802.11n40 mode

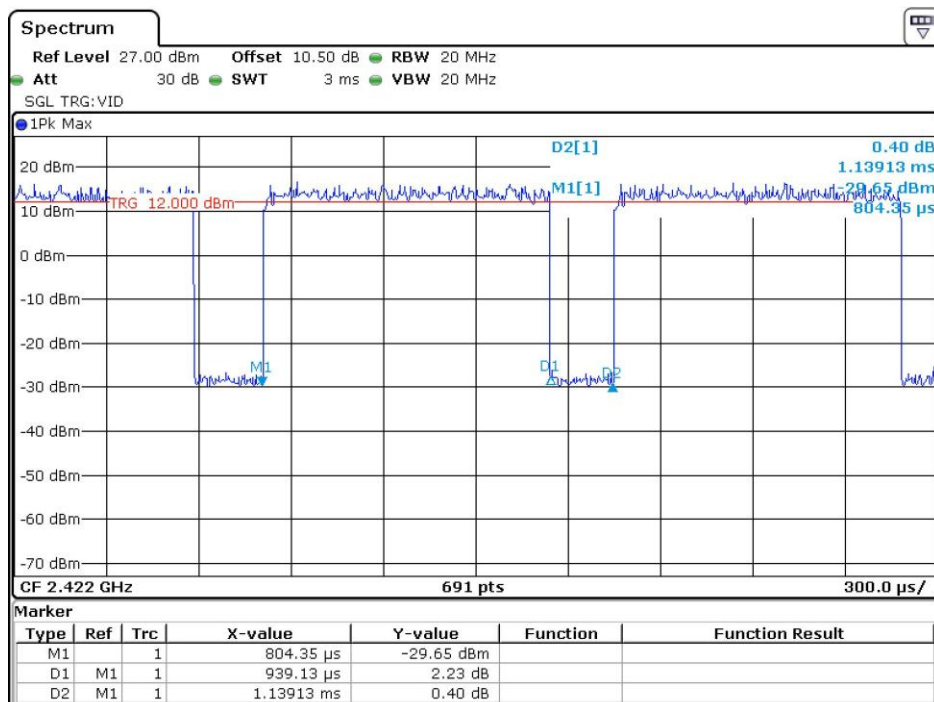


Date: 31.MAR.2022 17:36:31

## BLE mode--1M

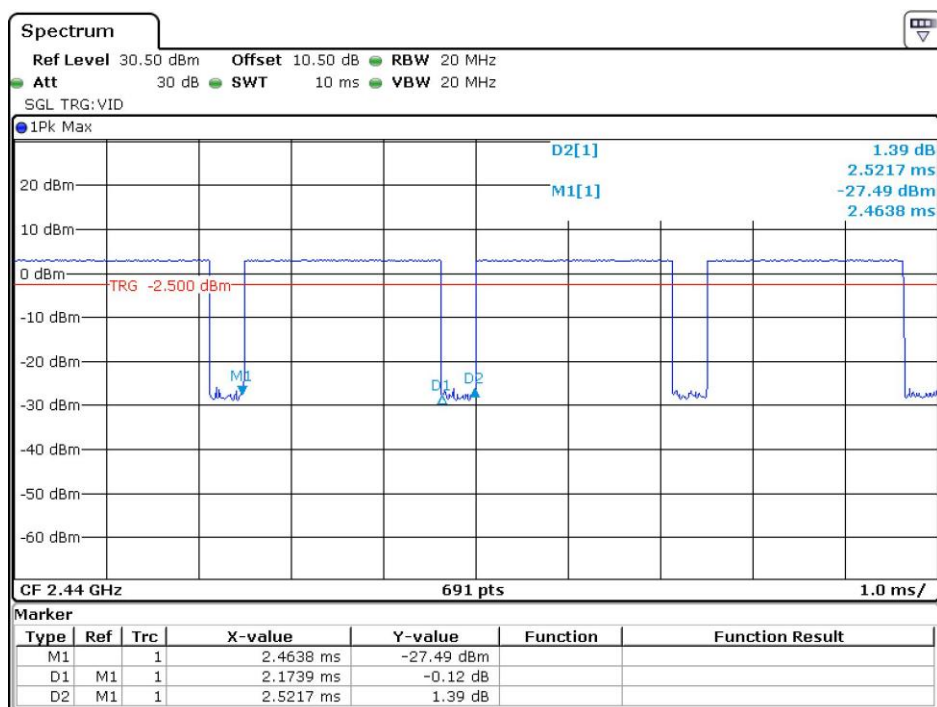

Date: 1.APR.2022 19:18:54

## BLE mode--2M

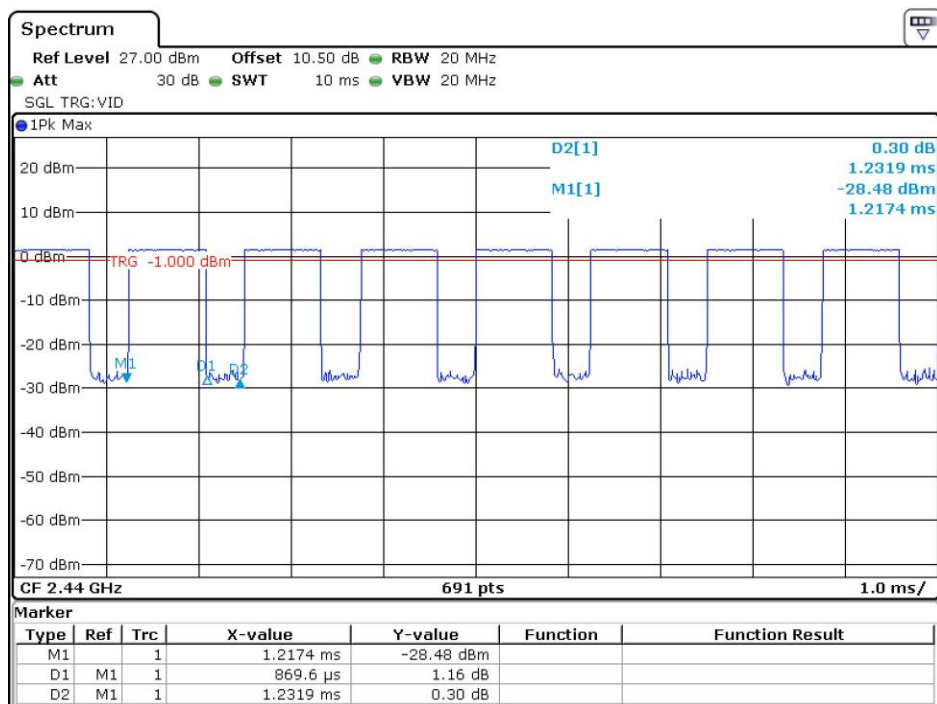

Date: 10.MAY.2022 14:13:10

## Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| /            | /           | /     | /             |

## External I/O Cable


| Cable Description              | Length (m) | From Port | To  |
|--------------------------------|------------|-----------|-----|
| Un-shield Detachable USB Cable | 1.0        | Adapter   | EUT |

## Block Diagram of Test Setup

### For Conducted Emission

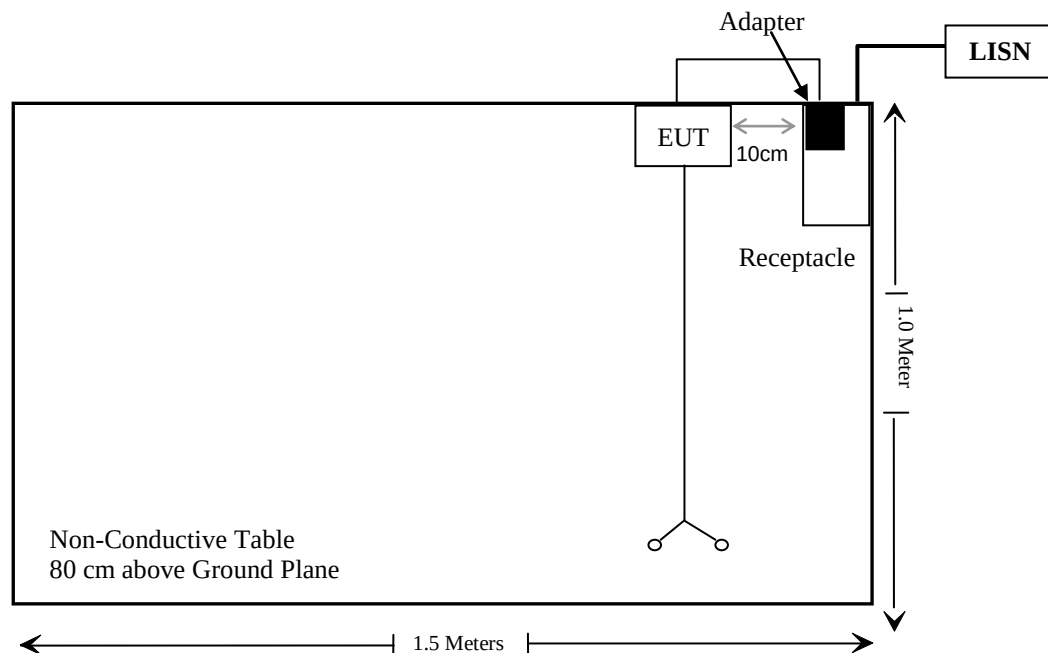

For Radiated Emissions:

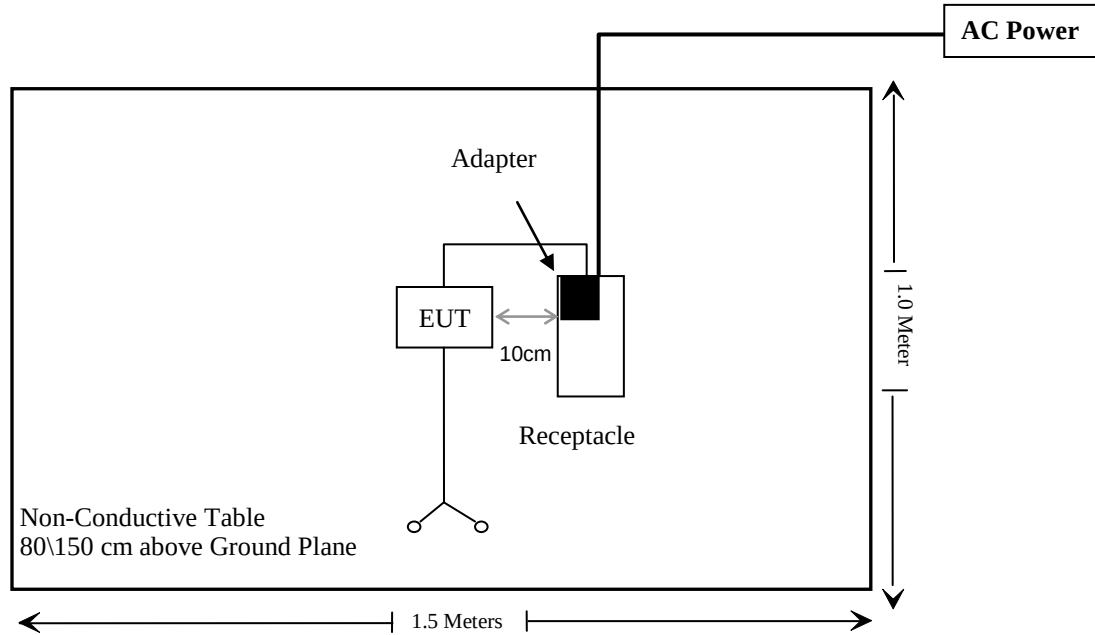

**SUMMARY OF TEST RESULTS**

| FCC Rules                    | RSS Rules                         | Description of Test                              | Result    |
|------------------------------|-----------------------------------|--------------------------------------------------|-----------|
| §15.247 (i), §2.1093         | RSS-102                           | RF EXPOSURE                                      | Compliant |
| §15.203                      | RSS-Gen §6.8                      | Antenna Requirement                              | Compliant |
| §15.207 (a)                  | RSS-Gen §8.8                      | AC Line Conducted Emissions                      | Compliant |
| §15.205, §15.209, §15.247(d) | RSS-GEN §8.10 & RSS-247 §5.5      | Spurious Emissions                               | Compliant |
| §15.247 (a)(2)               | RSS- Gen §6.7<br>RSS-247 §5.2 (a) | 99% Occupied Bandwidth & 6 dB Emission Bandwidth | Compliant |
| §15.247(b)(3)                | RSS-247 §5.4(d)                   | Maximum Conducted Output Power                   | Compliant |
| §15.247(d)                   | RSS-247 §5.5                      | 100 kHz Bandwidth of Frequency Band Edge         | Compliant |
| §15.247(e)                   | RSS-247 §5.2 (b)                  | Power Spectral Density                           | Compliant |

**TEST EQUIPMENT LIST**

| Manufacturer                                     | Description       | Model             | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------------------------|-------------------|-------------------|---------------|------------------|----------------------|
| Conducted Emissions Test                         |                   |                   |               |                  |                      |
| Rohde& Schwarz                                   | EMI Test Receiver | ESCI              | 100784        | 2021/12/13       | 2022/12/12           |
| Rohde & Schwarz                                  | L.I.S.N.          | ENV216            | 101314        | 2021/12/13       | 2022/12/12           |
| Anritsu Corp                                     | 50 Coaxial Switch | MP59B             | 6100237248    | 2021/12/13       | 2022/12/12           |
| Unknown                                          | RF Coaxial Cable  | No.17             | N0350         | 2021/12/14       | 2022/12/13           |
| Conducted Emission Test Software: e3 19821b (V9) |                   |                   |               |                  |                      |
| Radiated Emissions Test                          |                   |                   |               |                  |                      |
| Rohde& Schwarz                                   | Test Receiver     | ESR               | 102725        | 2021/12/13       | 2022/12/12           |
| Rohde&Schwarz                                    | Spectrum Analyzer | FSV40             | 101949        | 2021/12/13       | 2022/12/12           |
| SONOMA INSTRUMENT                                | Amplifier         | 310 N             | 186131        | 2021/11/09       | 2022/11/08           |
| A.H. Systems, inc.                               | Preamplifier      | PAM-0118P         | 135           | 2021/11/09       | 2022/11/08           |
| Quinstar                                         | Amplifier         | QLW-18405536-J0   | 15964001002   | 2021/11/11       | 2022/11/10           |
| Schwarzbeck                                      | Bilog Antenna     | VULB9163          | 9163-323      | 2021/07/06       | 2024/07/05           |
| Schwarzbeck                                      | Horn Antenna      | BBHA9120D         | 9120D-1067    | 2020/01/05       | 2023/01/04           |
| Schwarzbeck                                      | HORN ANTENNA      | BBHA9170          | 9170-359      | 2020/01/05       | 2023/01/04           |
| Radiated Emission Test Software: e3 19821b (V9)  |                   |                   |               |                  |                      |
| Unknown                                          | RF Coaxial Cable  | No.10             | N050          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.11             | N1000         | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.12             | N040          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.13             | N300          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.14             | N800          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.15             | N600          | 2021/12/14       | 2022/12/13           |
| Unknown                                          | RF Coaxial Cable  | No.16             | N650          | 2021/12/14       | 2022/12/13           |
| Wainwright                                       | High Pass Filter  | WHKX3.6/18 G-10SS | 5             | 2021/12/25       | 2022/12/24           |

| Manufacturer      | Description                  | Model             | Serial Number   | Calibration Date | Calibration Due Date |
|-------------------|------------------------------|-------------------|-----------------|------------------|----------------------|
| RF Conducted Test |                              |                   |                 |                  |                      |
| Rohde & Schwarz   | Spectrum Analyzer            | FSV-40            | 101948          | 2021/12/13       | 2022/12/12           |
| Rohde & Schwarz   | Open Switch and Control Unit | OSP120 + OSP-B157 | 101244 + 100866 | 2021/12/13       | 2022/12/12           |
| WEINSCHTEL        | 10dB Attenuator              | 5324              | AU 3842         | 2021/12/14       | 2022/12/13           |
| Unknown           | RF Cable                     | Unknown           | Unknown         | Each time        | /                    |

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC §1.1307 & §2.1093 - RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: SZNS220214-04312E-20



---

## **RSS-102 – RF EXPOSURE**

---

### **Applicable Standard**

According to RSS-102, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

**Result:** Compliance.

Please refer to SAR Report Number: SZNS220214-04312E-20

## § 15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISSED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

**Antenna Connector Construction**

The EUT has an internal antenna arrangement which was permanently attached and the antenna gain is 2.0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

| Type | Antenna Gain | Impedance |
|------|--------------|-----------|
| FPC  | 2.0dBi       | 50Ω       |

**Result: Compliant**

## § 15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC § 15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


| Table 4 - AC Power Lines Conducted Emission Limits |                              |                       |
|----------------------------------------------------|------------------------------|-----------------------|
| Frequency range<br>(MHz)                           | Conducted limit (dB $\mu$ V) |                       |
|                                                    | Quasi-Peak                   | Average               |
| 0.15 – 0.5                                         | 66 to 56 <sup>1</sup>        | 56 to 46 <sup>1</sup> |
| 0.5 – 5                                            | 56                           | 46                    |
| 5 – 30                                             | 60                           | 50                    |

**Note 1:** The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

## EUT Setup

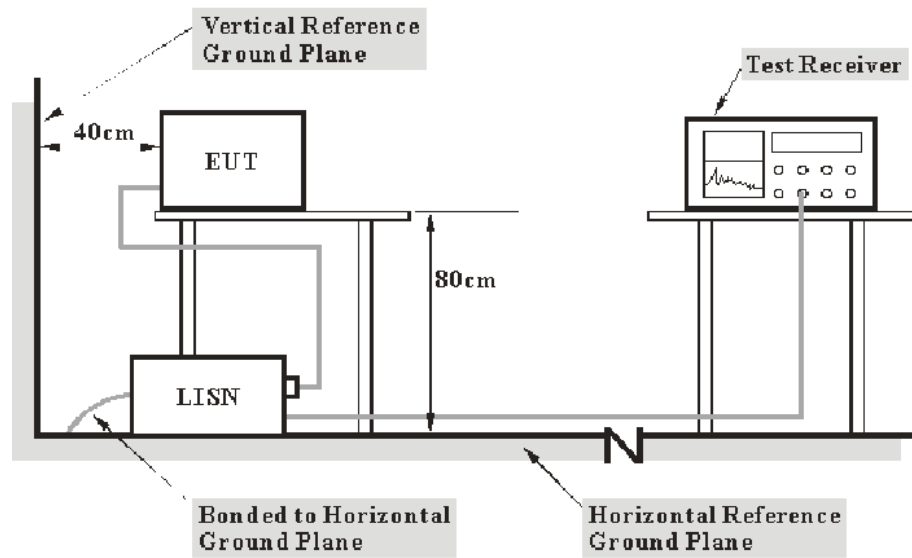

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


## Test Data

### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 49 %      |
| ATM Pressure:      | 101.0 kPa |


*The testing was performed by Caro Hu on 2022-04-18*

*EUT operation mode: Transmitting (worst case is 802.11b mode, low channel)*

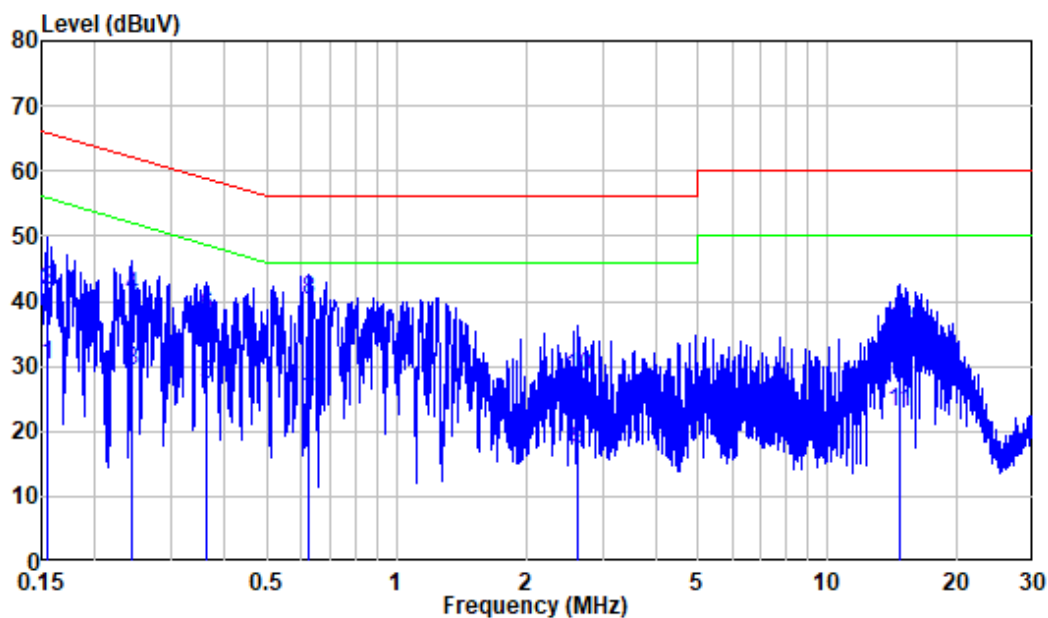**AC 120V/60 Hz, Line**

Site : Shielding Room  
 Condition: Line  
 Mode : 2.4G WiFi  
 Model : TB-JS100A  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|--------|--------|------------|-------|------------|------------|---------|
|    | MHz    | dB     | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.154  | 9.80   | 20.46      | 30.26 | 55.76      | -25.50     | Average |
| 2  | 0.154  | 9.80   | 31.74      | 41.54 | 65.76      | -24.22     | QP      |
| 3  | 0.242  | 9.80   | 19.37      | 29.17 | 52.02      | -22.85     | Average |
| 4  | 0.242  | 9.80   | 31.09      | 40.89 | 62.02      | -21.13     | QP      |
| 5  | 0.363  | 9.80   | 17.41      | 27.21 | 48.65      | -21.44     | Average |
| 6  | 0.363  | 9.80   | 27.81      | 37.61 | 58.65      | -21.04     | QP      |
| 7  | 0.628  | 9.81   | 14.63      | 24.44 | 46.00      | -21.56     | Average |
| 8  | 0.628  | 9.81   | 30.41      | 40.22 | 56.00      | -15.78     | QP      |
| 9  | 2.626  | 9.83   | 7.29       | 17.12 | 46.00      | -28.88     | Average |
| 10 | 2.626  | 9.83   | 18.64      | 28.47 | 56.00      | -27.53     | QP      |
| 11 | 14.623 | 9.95   | 12.99      | 22.94 | 50.00      | -27.06     | Average |
| 12 | 14.623 | 9.95   | 25.51      | 35.46 | 60.00      | -24.54     | QP      |

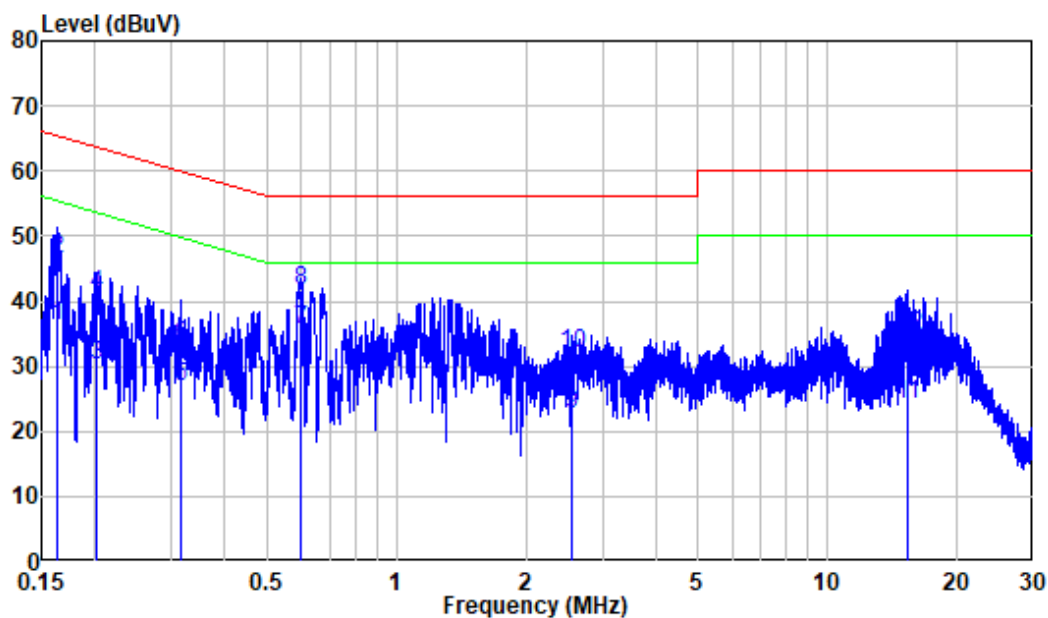**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
 Condition: Neutral  
 Mode : 2.4G WiFi  
 Model : TB-JS100A  
 Power : AC 120V 60Hz

|    | Freq   | Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|----|--------|--------|------------|-------|------------|------------|---------|
|    | MHz    | dB     | dBuV       | dBuV  | dBuV       | dB         |         |
| 1  | 0.164  | 9.80   | 26.55      | 36.35 | 55.27      | -18.92     | Average |
| 2  | 0.164  | 9.80   | 36.77      | 46.57 | 65.27      | -18.70     | QP      |
| 3  | 0.202  | 9.80   | 20.28      | 30.08 | 53.55      | -23.47     | Average |
| 4  | 0.202  | 9.80   | 31.15      | 40.95 | 63.55      | -22.60     | QP      |
| 5  | 0.317  | 9.80   | 16.97      | 26.77 | 49.78      | -23.01     | Average |
| 6  | 0.317  | 9.80   | 23.30      | 33.10 | 59.78      | -26.68     | QP      |
| 7  | 0.600  | 9.81   | 25.88      | 35.69 | 46.00      | -10.31     | Average |
| 8  | 0.600  | 9.81   | 31.89      | 41.70 | 56.00      | -14.30     | QP      |
| 9  | 2.562  | 9.83   | 12.75      | 22.58 | 46.00      | -23.42     | Average |
| 10 | 2.562  | 9.83   | 22.26      | 32.09 | 56.00      | -23.91     | QP      |
| 11 | 15.307 | 10.05  | 14.05      | 24.10 | 50.00      | -25.90     | Average |
| 12 | 15.307 | 10.05  | 24.67      | 34.72 | 60.00      | -25.28     | QP      |



## §15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5


Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply: (a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD). (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6. (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### EUT Setup

Below 1 GHz:

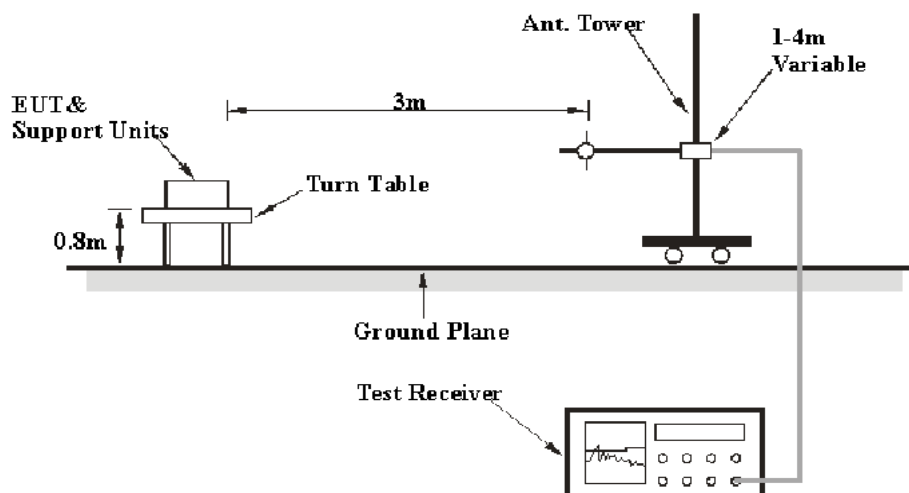

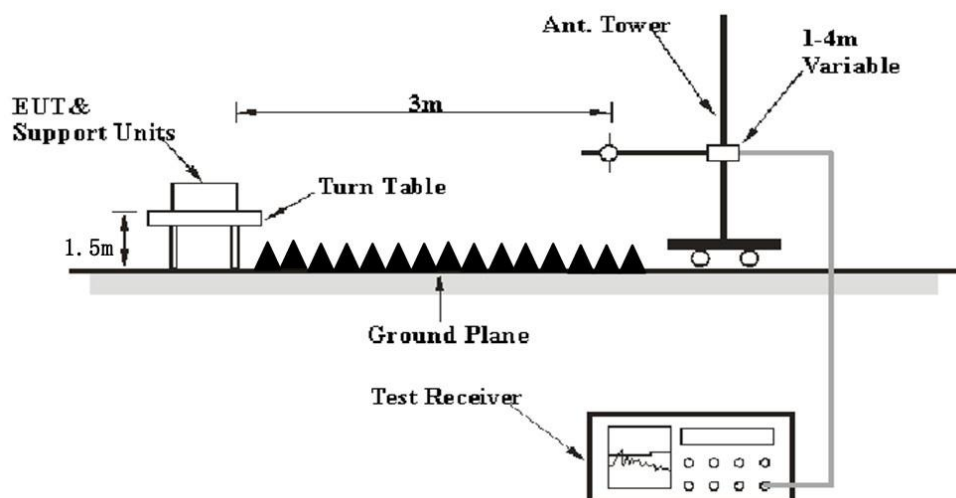**Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W               | IF B/W  | Measurement |
|-------------------|---------|-------------------------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz                 | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz                   | /       | PK          |
|                   | 1MHz    | 10 Hz <sup>Note 1</sup> | /       | Average     |
|                   | 1MHz    | > 1/T <sup>Note 2</sup> | /       | Average     |

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## Test Data

### Environmental Conditions


|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 25~25.1 °C |
| <b>Relative Humidity:</b> | 50~65 %    |
| <b>ATM Pressure:</b>      | 101.0 kPa  |

*The testing was performed by Nick Fang on 2022-04-16 for below 1GHz, Amy Cao on 2022-03-13 and Nick Fang on 2022-04-21 for above 1GHz.*

*EUT operation mode: Transmitting(Scan with X-AXIS, Y-AXIS, Z-AXIS, the worst case was X-AXIS recorded)*

30 MHz~1 GHz: (worst case is 802.11b mode, low channel)


Horizontal

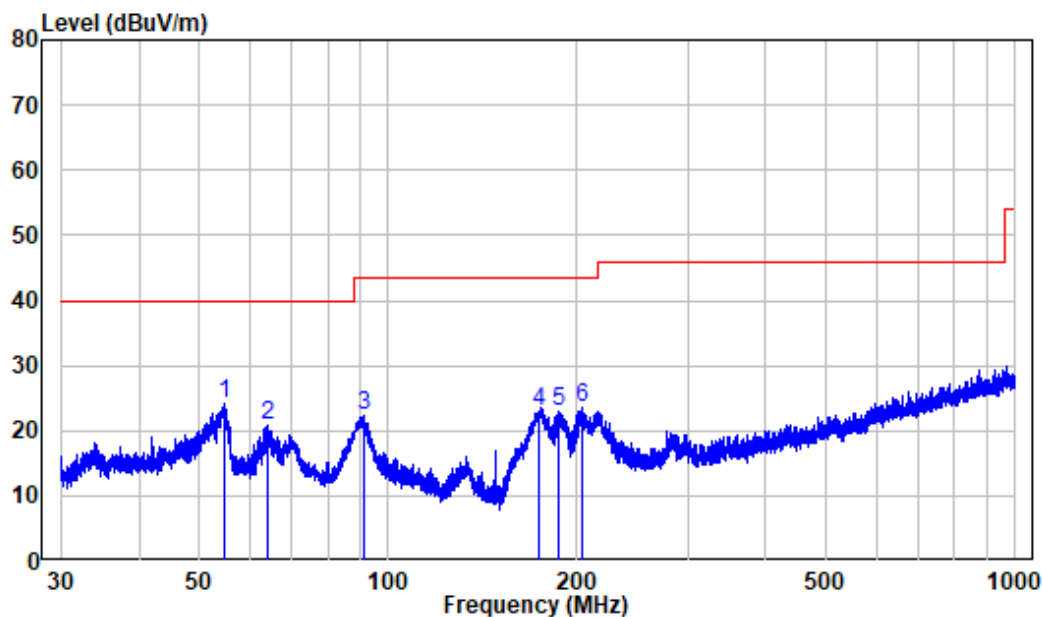

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : SZNS220214-04312E-RF  
Test Mode: 2.4G WIFI

|   | Freq    | Factor | Read Level | Level  | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
|   | MHz     | dB/m   | dBuV       | dBuV/m | dBuV/m     | dB         |        |
| 1 | 54.907  | -10.28 | 34.47      | 24.19  | 40.00      | -15.81     | Peak   |
| 2 | 64.095  | -12.18 | 32.91      | 20.73  | 40.00      | -19.27     | Peak   |
| 3 | 91.455  | -13.50 | 35.74      | 22.24  | 43.50      | -21.26     | Peak   |
| 4 | 173.433 | -13.24 | 36.21      | 22.97  | 43.50      | -20.53     | Peak   |
| 5 | 187.178 | -11.92 | 34.98      | 23.06  | 43.50      | -20.44     | Peak   |
| 6 | 203.255 | -11.68 | 35.34      | 23.66  | 43.50      | -19.84     | Peak   |

## Vertical

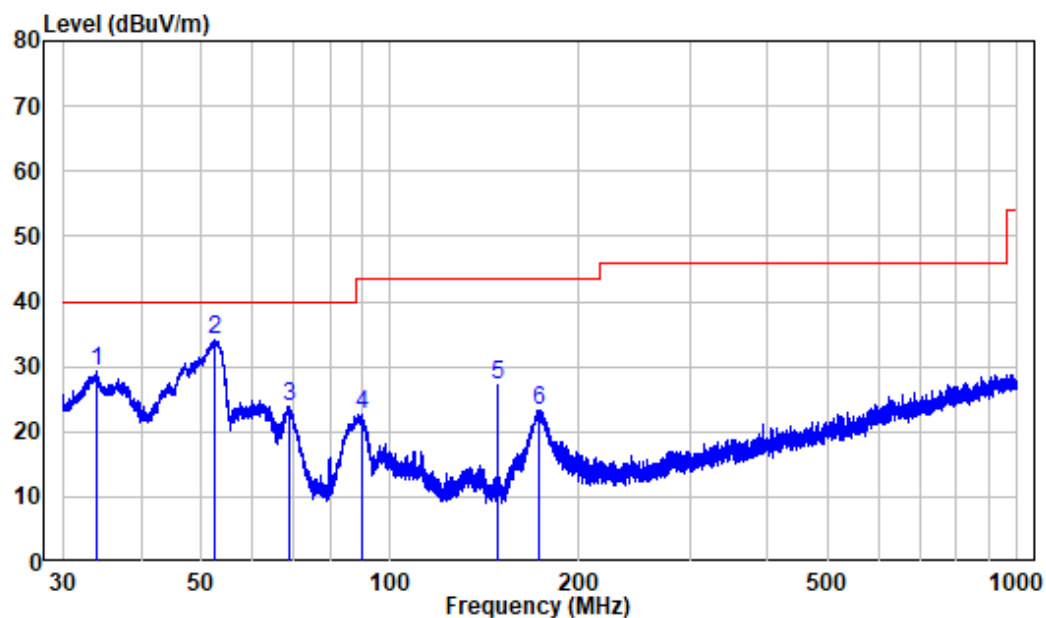

Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : SZNS220214-04312E-RF  
 Test Mode: 2.4G WIFI

|   | Freq    |        | Read  | Limit  | Over   | Remark      |
|---|---------|--------|-------|--------|--------|-------------|
|   | Factor  | Level  | Level | Line   | Limit  |             |
|   | MHz     | dB/m   | dBuV  | dBuV/m | dBuV/m | dB          |
| 1 | 33.932  | -11.86 | 41.09 | 29.23  | 40.00  | -10.77 Peak |
| 2 | 52.483  | -10.07 | 44.21 | 34.14  | 40.00  | -5.86 Peak  |
| 3 | 68.993  | -14.30 | 38.08 | 23.78  | 40.00  | -16.22 Peak |
| 4 | 89.905  | -14.04 | 36.81 | 22.77  | 43.50  | -20.73 Peak |
| 5 | 148.311 | -15.36 | 42.66 | 27.30  | 43.50  | -16.20 Peak |
| 6 | 172.146 | -13.37 | 36.69 | 23.32  | 43.50  | -20.18 Peak |

**1 GHz-25 GHz:****For Wi-Fi**

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| 802.11b Mode             |                   |            |                     |               |                |                               |                                    |                   |                |
| Low Channel (2412 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2310                     | 67.78             | PK         | 326                 | 2             | H              | -7.24                         | 60.54                              | 74                | -13.46         |
| 2310                     | 53.45             | Ave.       | 326                 | 2             | H              | -7.24                         | 46.21                              | 54                | -7.79          |
| 2390                     | 70.77             | PK         | 242                 | 1.7           | H              | -7.22                         | 63.55                              | 74                | -10.45         |
| 2390                     | 55.64             | Ave.       | 242                 | 1.7           | H              | -7.22                         | 48.42                              | 54                | -5.58          |
| 2310                     | 68.19             | PK         | 185                 | 1.6           | V              | -7.24                         | 60.95                              | 74                | -13.05         |
| 2310                     | 53.51             | Ave.       | 185                 | 1.6           | V              | -7.24                         | 46.27                              | 54                | -7.73          |
| 2390                     | 70.31             | PK         | 310                 | 2.2           | V              | -7.22                         | 63.09                              | 74                | -10.91         |
| 2390                     | 55.18             | Ave.       | 310                 | 2.2           | V              | -7.22                         | 47.96                              | 54                | -6.04          |
| 4824                     | 56.22             | PK         | 180                 | 1.1           | H              | -3.52                         | 52.7                               | 74                | -21.3          |
| 4824                     | 56.08             | PK         | 160                 | 2.1           | V              | -3.52                         | 52.56                              | 74                | -21.44         |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 4874                     | 57.33             | PK         | 193                 | 1.6           | H              | -3.42                         | 53.91                              | 74                | -20.09         |
| 4874                     | 56.48             | PK         | 265                 | 1.5           | V              | -3.42                         | 53.06                              | 74                | -20.94         |
| High Channel (2462 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2483.5                   | 69.94             | PK         | 31                  | 1.8           | H              | -7.2                          | 62.74                              | 74                | -11.26         |
| 2483.5                   | 56.91             | Ave.       | 31                  | 1.8           | H              | -7.2                          | 49.71                              | 54                | -4.29          |
| 2500                     | 68.83             | PK         | 342                 | 2.4           | H              | -7.18                         | 61.65                              | 74                | -12.35         |
| 2500                     | 54.54             | Ave.       | 342                 | 2.4           | H              | -7.18                         | 47.36                              | 54                | -6.64          |
| 2483.5                   | 69.88             | PK         | 130                 | 1.4           | V              | -7.2                          | 62.68                              | 74                | -11.32         |
| 2483.5                   | 56.44             | Ave.       | 130                 | 1.4           | V              | -7.2                          | 49.24                              | 54                | -4.76          |
| 2500                     | 68.48             | PK         | 310                 | 2.3           | V              | -7.18                         | 61.3                               | 74                | -12.7          |
| 2500                     | 54.61             | Ave.       | 310                 | 2.3           | V              | -7.18                         | 47.43                              | 54                | -6.57          |
| 4924                     | 57.16             | PK         | 101                 | 2             | H              | -3.16                         | 54                                 | 74                | -20            |
| 4924                     | 56.38             | PK         | 44                  | 2.3           | V              | -3.16                         | 53.22                              | 74                | -20.78         |

| Frequency<br>(MHz)        | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|---------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                           | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| 802.11g Mode              |                   |            |                     |               |                |                               |                                    |                   |                |
| Low Channel (2412 MHz)    |                   |            |                     |               |                |                               |                                    |                   |                |
| 2310                      | 68.4              | PK         | 291                 | 1.7           | H              | -7.24                         | 61.16                              | 74                | -12.84         |
| 2310                      | 54.09             | Ave.       | 291                 | 1.7           | H              | -7.24                         | 46.85                              | 54                | -7.15          |
| 2390                      | 75.04             | PK         | 286                 | 1.3           | H              | -7.22                         | 67.82                              | 74                | -6.18          |
| 2390                      | 57.88             | Ave.       | 286                 | 1.3           | H              | -7.22                         | 50.66                              | 54                | -3.34          |
| 2310                      | 67.9              | PK         | 198                 | 1.6           | V              | -7.24                         | 60.66                              | 74                | -13.34         |
| 2310                      | 54.28             | Ave.       | 198                 | 1.6           | V              | -7.24                         | 47.04                              | 54                | -6.96          |
| 2390                      | 73.2              | PK         | 314                 | 1.7           | V              | -7.22                         | 65.98                              | 74                | -8.02          |
| 2390                      | 56.83             | Ave.       | 314                 | 1.7           | V              | -7.22                         | 49.61                              | 54                | -4.39          |
| 4824                      | 54.5              | PK         | 105                 | 2.1           | H              | -3.52                         | 50.98                              | 74                | -23.02         |
| 4824                      | 54.34             | PK         | 37                  | 1.5           | V              | -3.52                         | 50.82                              | 74                | -23.18         |
| Middle Channel (2437 MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 4874                      | 54.79             | PK         | 234                 | 2.2           | H              | -3.42                         | 51.37                              | 74                | -22.63         |
| 4874                      | 54.79             | PK         | 163                 | 2.4           | V              | -3.42                         | 51.37                              | 74                | -22.63         |
| High Channel (2462 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2483.5                    | 77.49             | PK         | 295                 | 2.2           | H              | -7.2                          | 70.29                              | 74                | -3.71          |
| 2483.5                    | 57.68             | Ave.       | 295                 | 2.2           | H              | -7.2                          | 50.48                              | 54                | -3.52          |
| 2500                      | 68.58             | PK         | 154                 | 1.3           | H              | -7.18                         | 61.4                               | 74                | -12.6          |
| 2500                      | 55.57             | Ave.       | 154                 | 1.3           | H              | -7.18                         | 48.39                              | 54                | -5.61          |
| 2483.5                    | 76.4              | PK         | 324                 | 1.2           | V              | -7.2                          | 69.2                               | 74                | -4.8           |
| 2483.5                    | 57.58             | Ave.       | 324                 | 1.2           | V              | -7.2                          | 50.38                              | 54                | -3.62          |
| 2500                      | 68.45             | PK         | 269                 | 1.1           | V              | -7.18                         | 61.27                              | 74                | -12.73         |
| 2500                      | 55.52             | Ave.       | 269                 | 1.1           | V              | -7.18                         | 48.34                              | 54                | -5.66          |
| 4924                      | 54.47             | PK         | 255                 | 1.4           | H              | -3.16                         | 51.31                              | 74                | -22.69         |
| 4924                      | 54.45             | PK         | 172                 | 2.2           | V              | -3.16                         | 51.29                              | 74                | -22.71         |

| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| 802.11n20 Mode           |                   |            |                     |               |                |                               |                                    |                   |                |
| Low Channel (2412 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2310                     | 68.22             | PK         | 200                 | 1             | H              | -7.24                         | 60.98                              | 74                | -13.02         |
| 2310                     | 54.24             | Ave.       | 200                 | 1             | H              | -7.24                         | 47                                 | 54                | -7             |
| 2390                     | 75.13             | PK         | 358                 | 2.5           | H              | -7.22                         | 67.91                              | 74                | -6.09          |
| 2390                     | 58.73             | Ave.       | 358                 | 2.5           | H              | -7.22                         | 51.51                              | 54                | -2.49          |
| 2310                     | 68.42             | PK         | 232                 | 1.5           | V              | -7.24                         | 61.18                              | 74                | -12.82         |
| 2310                     | 54.17             | Ave.       | 232                 | 1.5           | V              | -7.24                         | 46.93                              | 54                | -7.07          |
| 2390                     | 74.23             | PK         | 91                  | 2             | V              | -7.22                         | 67.01                              | 74                | -6.99          |
| 2390                     | 57.87             | Ave.       | 91                  | 2             | V              | -7.22                         | 50.65                              | 54                | -3.35          |
| 4824                     | 54.51             | PK         | 304                 | 1.2           | H              | -3.52                         | 50.99                              | 74                | -23.01         |
| 4824                     | 54.4              | PK         | 104                 | 1.5           | V              | -3.52                         | 50.88                              | 74                | -23.12         |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 4874                     | 54.75             | PK         | 163                 | 2.2           | H              | -3.42                         | 51.33                              | 74                | -22.67         |
| 4874                     | 54.88             | PK         | 188                 | 2             | V              | -3.42                         | 51.46                              | 74                | -22.54         |
| High Channel (2462 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2483.5                   | 75.42             | PK         | 359                 | 2             | H              | -7.2                          | 68.22                              | 74                | -5.78          |
| 2483.5                   | 56.49             | Ave.       | 359                 | 2             | H              | -7.2                          | 49.29                              | 54                | -4.71          |
| 2500                     | 68.69             | PK         | 113                 | 1.5           | H              | -7.18                         | 61.51                              | 74                | -12.49         |
| 2500                     | 55.45             | Ave.       | 113                 | 1.5           | H              | -7.18                         | 48.27                              | 54                | -5.73          |
| 2483.5                   | 74.97             | PK         | 110                 | 2.1           | V              | -7.2                          | 67.77                              | 74                | -6.23          |
| 2483.5                   | 56.38             | Ave.       | 110                 | 2.1           | V              | -7.2                          | 49.18                              | 54                | -4.82          |
| 2500                     | 68.31             | PK         | 46                  | 2.2           | V              | -7.18                         | 61.13                              | 74                | -12.87         |
| 2500                     | 55.43             | Ave.       | 46                  | 2.2           | V              | -7.18                         | 48.25                              | 54                | -5.75          |
| 4924                     | 54.46             | PK         | 280                 | 1.6           | H              | -3.16                         | 51.3                               | 74                | -22.7          |
| 4924                     | 54.52             | PK         | 239                 | 1.3           | V              | -3.16                         | 51.36                              | 74                | -22.64         |



| Frequency<br>(MHz)       | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| 802.11n40 Mode           |                   |            |                     |               |                |                               |                                    |                   |                |
| Low Channel (2422 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2310                     | 68.6              | PK         | 34                  | 1.8           | H              | -7.24                         | 61.36                              | 74                | -12.64         |
| 2310                     | 54.24             | Ave.       | 34                  | 1.8           | H              | -7.24                         | 47                                 | 54                | -7             |
| 2390                     | 75.47             | PK         | 184                 | 1.8           | H              | -7.22                         | 68.25                              | 74                | -5.75          |
| 2390                     | 59.18             | Ave.       | 184                 | 1.8           | H              | -7.22                         | 51.96                              | 54                | -2.04          |
| 2310                     | 68.01             | PK         | 267                 | 1.6           | V              | -7.24                         | 60.77                              | 74                | -13.23         |
| 2310                     | 54.12             | Ave.       | 267                 | 1.6           | V              | -7.24                         | 46.88                              | 54                | -7.12          |
| 2390                     | 74.18             | PK         | 78                  | 1             | V              | -7.22                         | 66.96                              | 74                | -7.04          |
| 2390                     | 58.72             | Ave.       | 78                  | 1             | V              | -7.22                         | 51.5                               | 54                | -2.5           |
| 4844                     | 54.48             | PK         | 161                 | 1.6           | H              | -3.54                         | 50.94                              | 74                | -23.06         |
| 4844                     | 54.36             | PK         | 152                 | 2.5           | V              | -3.54                         | 50.82                              | 74                | -23.18         |
| Middle Channel (2437MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 4874                     | 54.78             | PK         | 275                 | 2.3           | H              | -3.42                         | 51.36                              | 74                | -22.64         |
| 4874                     | 54.95             | PK         | 151                 | 1.3           | V              | -3.42                         | 51.53                              | 74                | -22.47         |
| High Channel (2452 MHz)  |                   |            |                     |               |                |                               |                                    |                   |                |
| 2483.5                   | 71.85             | PK         | 327                 | 2.3           | H              | -7.2                          | 64.65                              | 74                | -9.35          |
| 2483.5                   | 57.64             | Ave.       | 327                 | 2.3           | H              | -7.2                          | 50.44                              | 54                | -3.56          |
| 2500                     | 68.44             | PK         | 310                 | 1.2           | H              | -7.18                         | 61.26                              | 74                | -12.74         |
| 2500                     | 55.55             | Ave.       | 310                 | 1.2           | H              | -7.18                         | 48.37                              | 54                | -5.63          |
| 2483.5                   | 71.23             | PK         | 96                  | 2             | V              | -7.2                          | 64.03                              | 74                | -9.97          |
| 2483.5                   | 57.61             | Ave.       | 96                  | 2             | V              | -7.2                          | 50.41                              | 54                | -3.59          |
| 2500                     | 69.18             | PK         | 223                 | 1.7           | V              | -7.18                         | 62                                 | 74                | -12            |
| 2500                     | 55.44             | Ave.       | 223                 | 1.7           | V              | -7.18                         | 48.26                              | 54                | -5.74          |
| 4904                     | 54.78             | PK         | 25                  | 1.5           | H              | -3.26                         | 51.52                              | 74                | -22.48         |
| 4904                     | 54.8              | PK         | 65                  | 1             | V              | -3.26                         | 51.54                              | 74                | -22.46         |

**BLE:**

| Frequency<br>(MHz)        | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|---------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                           | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| Low Channel (2402 MHz)    |                   |            |                     |               |                |                               |                                    |                   |                |
| 2310                      | 67.74             | PK         | 172                 | 2.1           | H              | -7.24                         | 60.5                               | 74                | -13.5          |
| 2310                      | 54.29             | Ave.       | 172                 | 2.1           | H              | -7.24                         | 47.05                              | 54                | -6.95          |
| 2390                      | 68.91             | PK         | 193                 | 1.7           | H              | -7.22                         | 61.69                              | 74                | -12.31         |
| 2390                      | 53.86             | Ave.       | 193                 | 1.7           | H              | -7.22                         | 46.64                              | 54                | -7.36          |
| 2310                      | 68.28             | PK         | 288                 | 2.2           | V              | -7.24                         | 61.04                              | 74                | -12.96         |
| 2310                      | 55.04             | Ave.       | 288                 | 2.2           | V              | -7.24                         | 47.8                               | 54                | -6.2           |
| 2390                      | 69.73             | PK         | 335                 | 1.5           | V              | -7.22                         | 62.51                              | 74                | -11.49         |
| 2390                      | 54.9              | Ave.       | 335                 | 1.5           | V              | -7.22                         | 47.68                              | 54                | -6.32          |
| 4804                      | 53.55             | PK         | 296                 | 1.9           | H              | -3.51                         | 50.04                              | 74                | -23.96         |
| 4804                      | 54.1              | PK         | 324                 | 1.9           | V              | -3.51                         | 50.59                              | 74                | -23.41         |
| Middle Channel (2440 MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 4880                      | 53.93             | PK         | 133                 | 1.4           | H              | -3.38                         | 50.55                              | 74                | -23.45         |
| 4880                      | 53.91             | PK         | 248                 | 1.2           | V              | -3.38                         | 50.53                              | 74                | -23.47         |
| High Channel (2480 MHz)   |                   |            |                     |               |                |                               |                                    |                   |                |
| 2483.5                    | 71.53             | PK         | 188                 | 1.4           | H              | -7.2                          | 64.33                              | 74                | -9.67          |
| 2483.5                    | 56.02             | Ave.       | 188                 | 1.4           | H              | -7.2                          | 48.82                              | 54                | -5.18          |
| 2500                      | 70.54             | PK         | 111                 | 1.3           | H              | -7.18                         | 63.36                              | 74                | -10.64         |
| 2500                      | 56.52             | Ave.       | 111                 | 1.3           | H              | -7.18                         | 49.34                              | 54                | -4.66          |
| 2483.5                    | 67.85             | PK         | 87                  | 2.4           | V              | -7.2                          | 60.65                              | 74                | -13.35         |
| 2483.5                    | 54.87             | Ave.       | 87                  | 2.4           | V              | -7.2                          | 47.67                              | 54                | -6.33          |
| 2500                      | 68.84             | PK         | 312                 | 2.1           | V              | -7.18                         | 61.66                              | 74                | -12.34         |
| 2500                      | 55.4              | Ave.       | 312                 | 2.1           | V              | -7.18                         | 48.22                              | 54                | -5.78          |
| 4960                      | 53.39             | PK         | 17                  | 2.2           | H              | -3.01                         | 50.38                              | 74                | -23.62         |
| 4960                      | 52.88             | PK         | 149                 | 1.6           | V              | -3.01                         | 49.87                              | 74                | -24.13         |

| Frequency<br>(MHz)            | Receiver          |            | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB/m) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|-------------------------------|-------------------|------------|---------------------|---------------|----------------|-------------------------------|------------------------------------|-------------------|----------------|
|                               | Reading<br>(dBμV) | PK/QP/Ave. |                     | Height<br>(m) | Polar<br>(H/V) |                               |                                    |                   |                |
| BLE 2M Low Channel (2402 MHz) |                   |            |                     |               |                |                               |                                    |                   |                |
| 2310                          | 67.65             | PK         | 69                  | 1.7           | H              | -7.24                         | 60.41                              | 74                | -13.59         |
| 2310                          | 54.64             | Ave.       | 69                  | 1.7           | H              | -7.24                         | 47.4                               | 54                | -6.6           |
| 2390                          | 68.44             | PK         | 232                 | 1.9           | H              | -7.22                         | 61.22                              | 74                | -12.78         |
| 2390                          | 54.16             | Ave.       | 232                 | 1.9           | H              | -7.22                         | 46.94                              | 54                | -7.06          |
| 2310                          | 67.57             | PK         | 300                 | 1.2           | V              | -7.24                         | 60.33                              | 74                | -13.67         |
| 2310                          | 54.41             | Ave.       | 300                 | 1.2           | V              | -7.24                         | 47.17                              | 54                | -6.83          |
| 2390                          | 68.07             | PK         | 335                 | 1.8           | V              | -7.22                         | 60.85                              | 74                | -13.15         |
| 2390                          | 54.25             | Ave.       | 335                 | 1.8           | V              | -7.22                         | 47.03                              | 54                | -6.97          |
| 4804                          | 53.85             | PK         | 139                 | 1.6           | H              | -3.51                         | 50.34                              | 74                | -23.66         |
| 4804                          | 53.75             | PK         | 299                 | 1.2           | V              | -3.51                         | 50.24                              | 74                | -23.76         |
| Middle Channel (2440 MHz)     |                   |            |                     |               |                |                               |                                    |                   |                |
| 4880                          | 53.46             | PK         | 286                 | 2.1           | H              | -3.38                         | 50.08                              | 74                | -23.92         |
| 4880                          | 53.77             | PK         | 355                 | 2.2           | V              | -3.38                         | 50.39                              | 74                | -23.61         |
| High Channel (2480 MHz)       |                   |            |                     |               |                |                               |                                    |                   |                |
| 2483.5                        | 71.42             | PK         | 335                 | 1.3           | H              | -7.2                          | 64.22                              | 74                | -9.78          |
| 2483.5                        | 57.71             | Ave.       | 335                 | 1.3           | H              | -7.2                          | 50.51                              | 54                | -3.49          |
| 2500                          | 69.44             | PK         | 312                 | 1.1           | H              | -7.18                         | 62.26                              | 74                | -11.74         |
| 2500                          | 57.12             | Ave.       | 312                 | 1.1           | H              | -7.18                         | 49.94                              | 54                | -4.06          |
| 2483.5                        | 70.69             | PK         | 140                 | 1.5           | V              | -7.2                          | 63.49                              | 74                | -10.51         |
| 2483.5                        | 56.72             | Ave.       | 140                 | 1.5           | V              | -7.2                          | 49.52                              | 54                | -4.48          |
| 2500                          | 68.55             | PK         | 267                 | 1.6           | V              | -7.18                         | 61.37                              | 74                | -12.63         |
| 2500                          | 55.83             | Ave.       | 267                 | 1.6           | V              | -7.18                         | 48.65                              | 54                | -5.35          |
| 4960                          | 53.56             | PK         | 234                 | 2.4           | H              | -3.01                         | 50.55                              | 74                | -23.45         |
| 4960                          | 53.87             | PK         | 347                 | 1.3           | V              | -3.01                         | 50.86                              | 74                | -23.14         |

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is 20dB to the limit or in the noise floor level was not recorded.

When the test result of peak was less than the limit of average, just peak value were recorded.


1-18 GHz:

## Pre-scan for 802.11b High Channel

## Horizontal

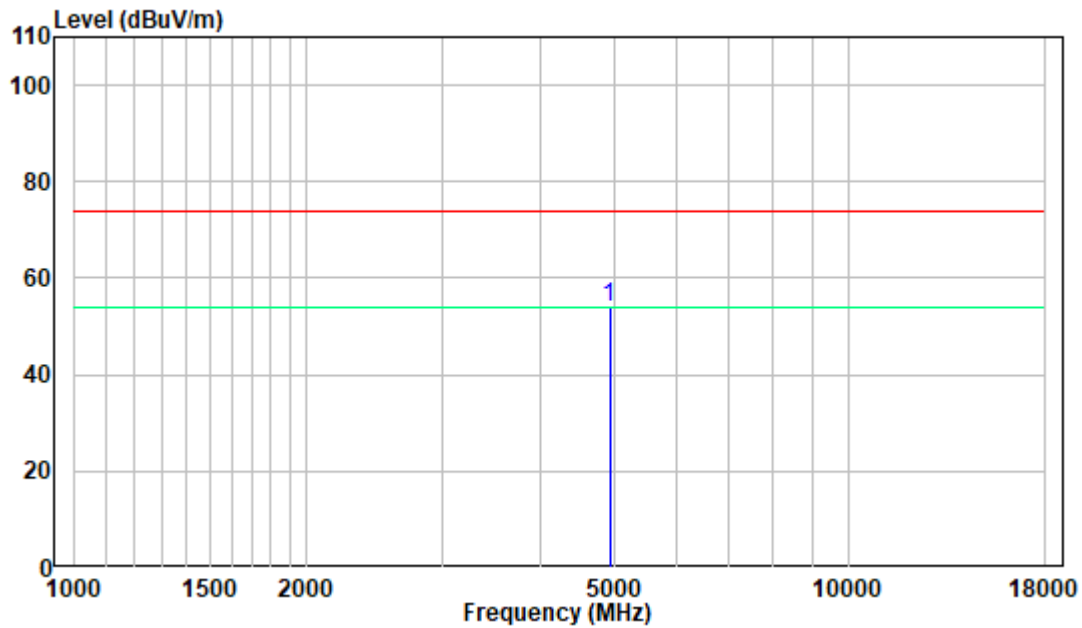


## Vertical

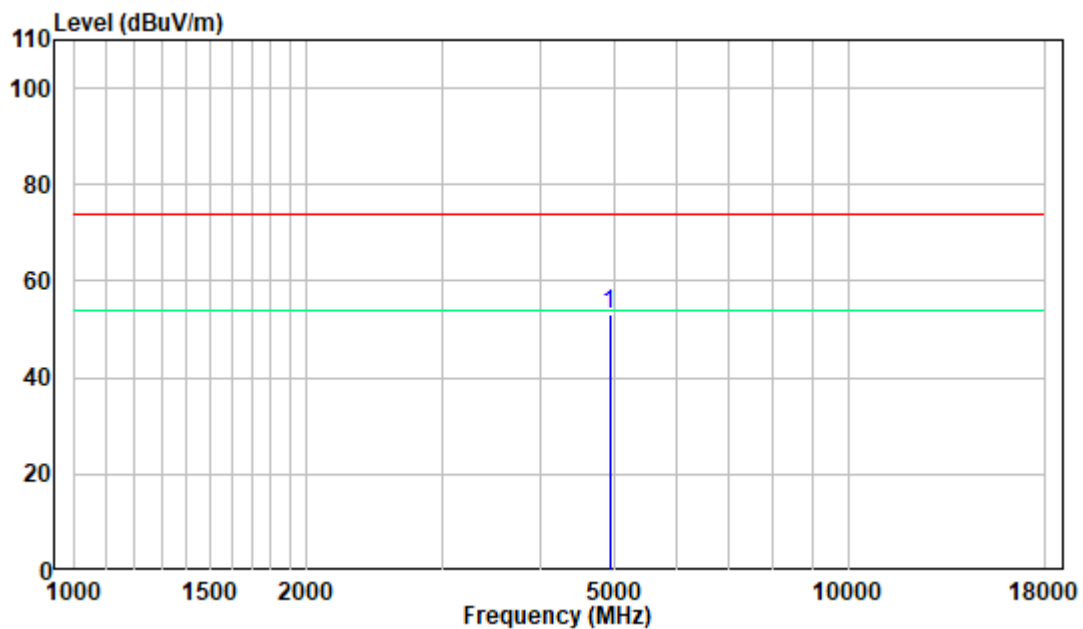


18 -25GHz:

Pre-scan for 802.11b High Channel

Horizontal

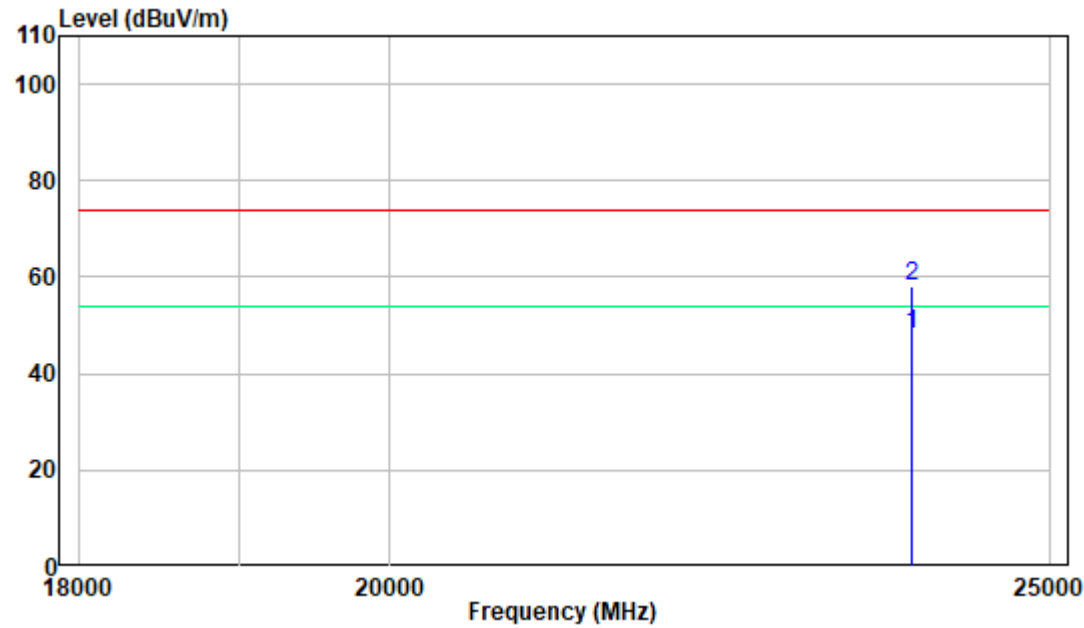

Vertical

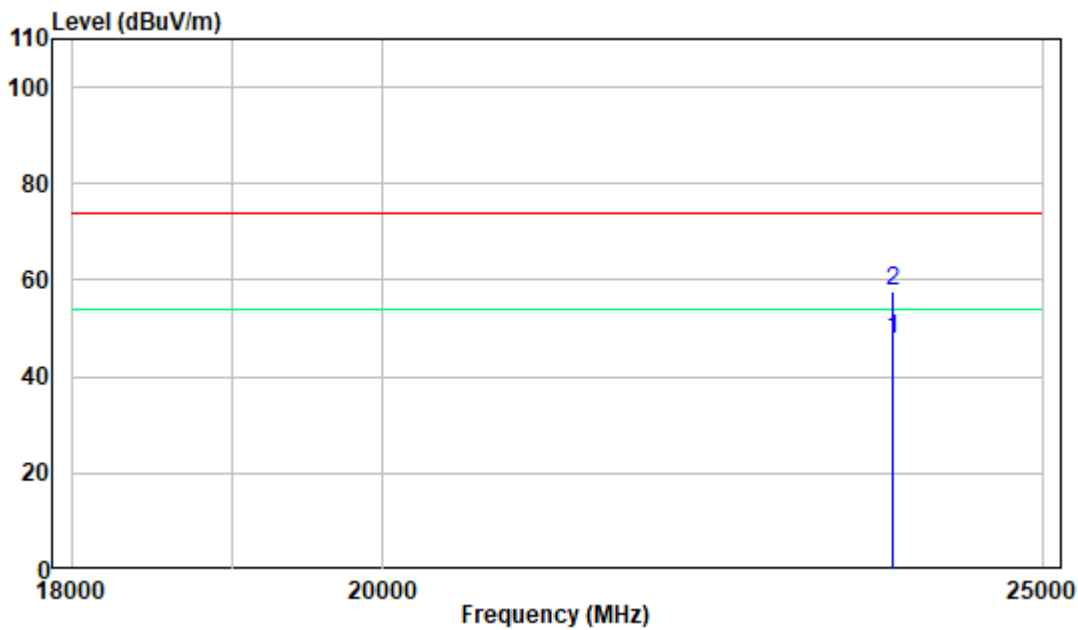

---

## **§15.247 (a)(2) & RSS-Gen §6.7 RSS-247 § 5.2 (a) 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH**

---

### **Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “6 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

### **Test Procedure**


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

The following conditions shall be observed for measuring the occupied bandwidth and 6 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 6 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 6 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



## Test Data

### Environmental Conditions

|                    |                 |
|--------------------|-----------------|
| Temperature:       | 26~27°C         |
| Relative Humidity: | 43~56 %         |
| ATM Pressure:      | 101.3 ~101.5kPa |

*The testing was performed by Key Pei from 2022-03-31 to 2022-05-10.*


*EUT operation mode: Transmitting*

**Test Result:** Pass.


Please refer to the following table and plots.

| Channel           | Frequency (MHz) | 6 dB Emission Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | 6dB Emission Bandwidth Limit (kHz) |
|-------------------|-----------------|-------------------------------|------------------------------|------------------------------------|
| 802.11b mode      |                 |                               |                              |                                    |
| Low               | 2412            | 8.162                         | 12.590                       | ≥500                               |
| Middle            | 2437            | 8.162                         | 12.460                       | ≥500                               |
| High              | 2462            | 8.162                         | 12.417                       | ≥500                               |
| 802.11g mode      |                 |                               |                              |                                    |
| Low               | 2412            | 16.368                        | 17.583                       | ≥500                               |
| Middle            | 2437            | 16.368                        | 17.583                       | ≥500                               |
| High              | 2462            | 16.368                        | 17.410                       | ≥500                               |
| 802.11n-HT20 mode |                 |                               |                              |                                    |
| Low               | 2412            | 17.670                        | 18.842                       | ≥500                               |
| Middle            | 2437            | 17.670                        | 18.669                       | ≥500                               |
| High              | 2462            | 17.583                        | 18.755                       | ≥500                               |
| 802.11n-HT40 mode |                 |                               |                              |                                    |
| Low               | 2422            | 36.470                        | 37.511                       | ≥500                               |
| Middle            | 2437            | 36.470                        | 38.090                       | ≥500                               |
| High              | 2452            | 36.470                        | 38.437                       | ≥500                               |
| BLE 1MHz          |                 |                               |                              |                                    |
| Low               | 2402            | 0.660                         | 1.055                        | ≥500                               |
| Middle            | 2440            | 0.669                         | 1.055                        | ≥500                               |
| High              | 2480            | 0.664                         | 1.059                        | ≥500                               |
| BLE 2MHz          |                 |                               |                              |                                    |
| Low               | 2402            | 1.172                         | 2.014                        | ≥500                               |
| Middle            | 2440            | 1.155                         | 2.006                        | ≥500                               |
| High              | 2480            | 1.181                         | 2.014                        | ≥500                               |

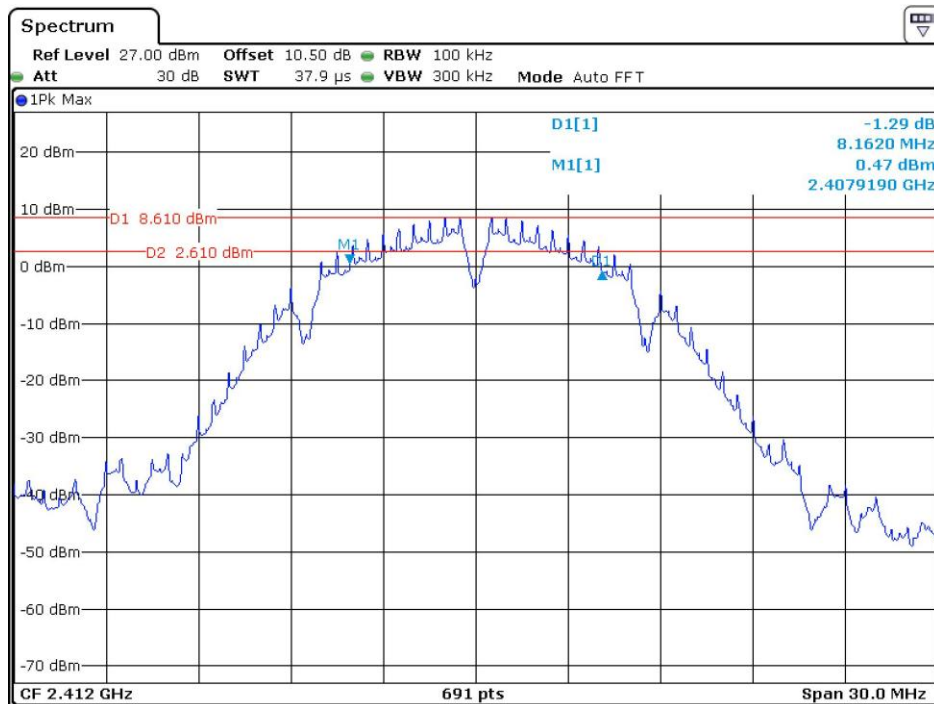


**6dB Bandwidth:****802.11b Low Channel**

Date: 31.MAR.2022 16:59:34

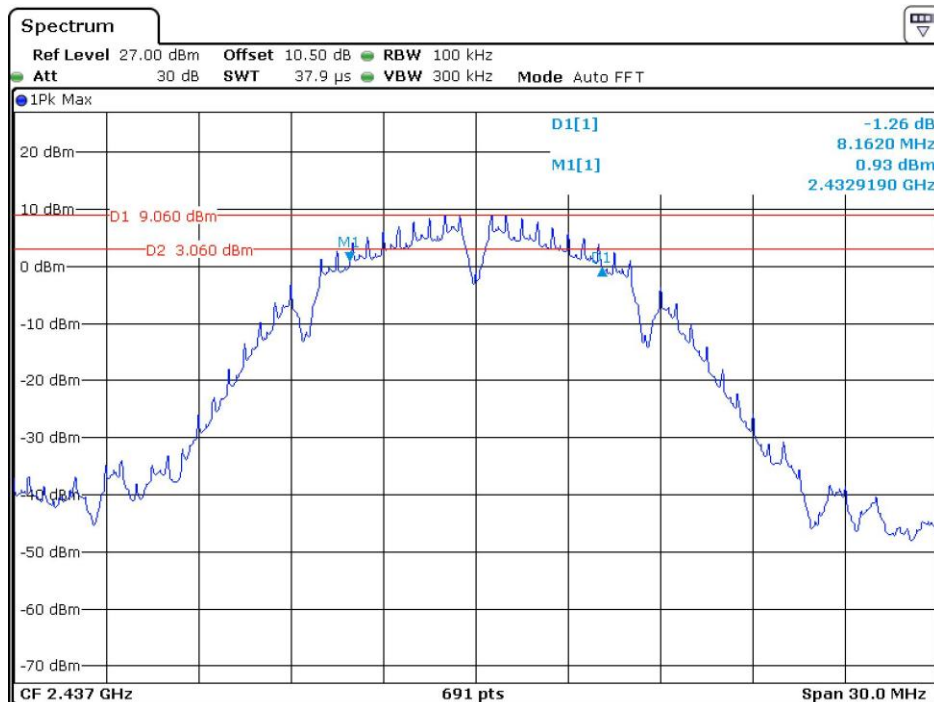**802.11b Middle Channel**


Date: 31.MAR.2022 16:58:16

## 802.11b High Channel

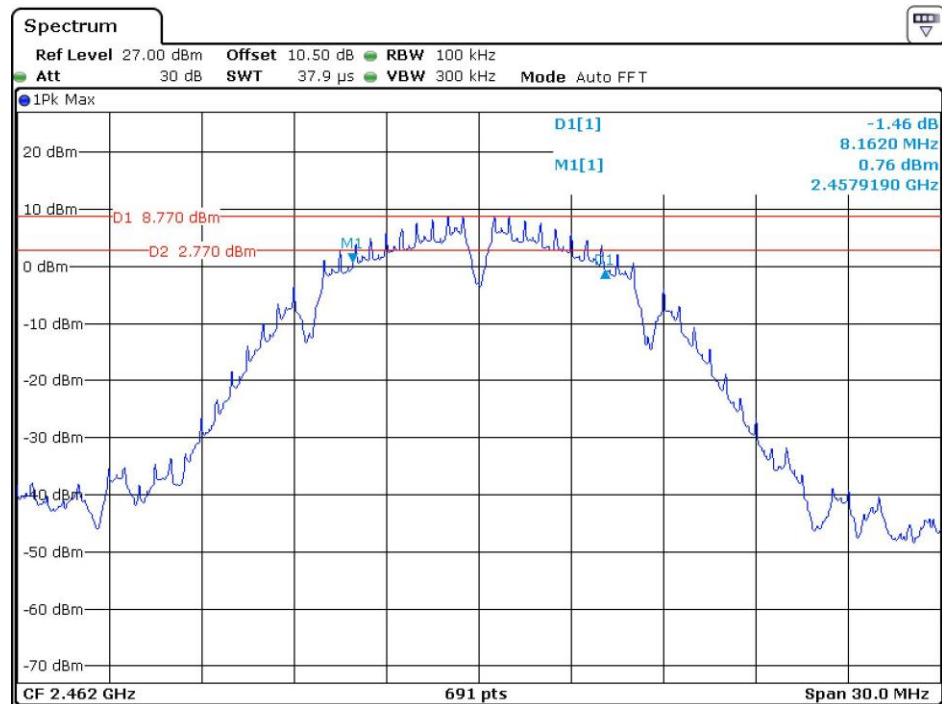


Date: 31.MAR.2022 16:58:50

## 802.11g Low Channel

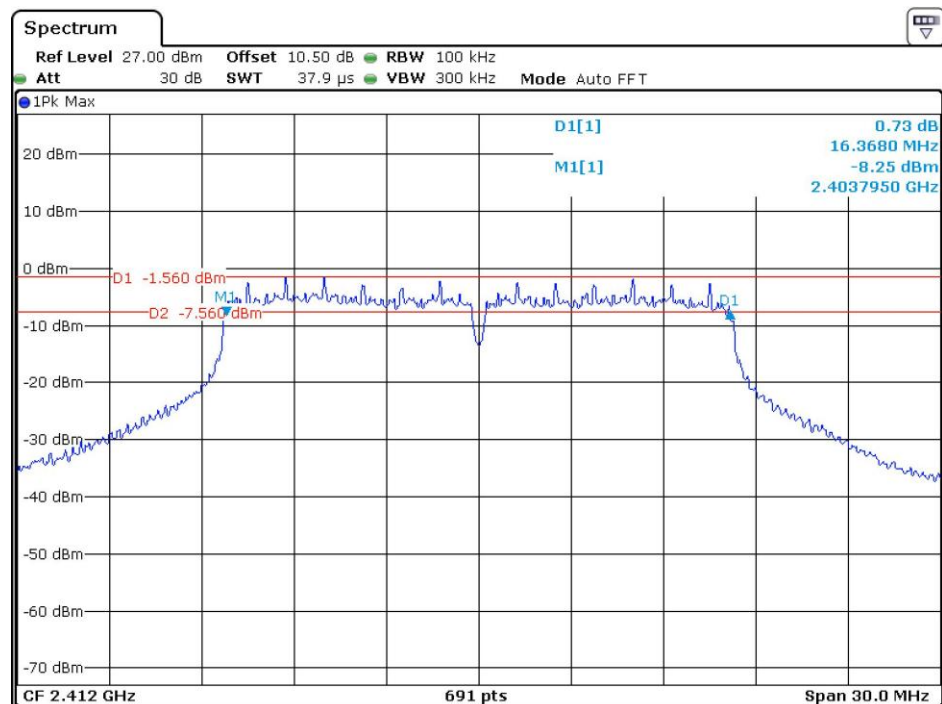


Date: 31.MAR.2022 17:00:32

## 802.11g Middle Channel

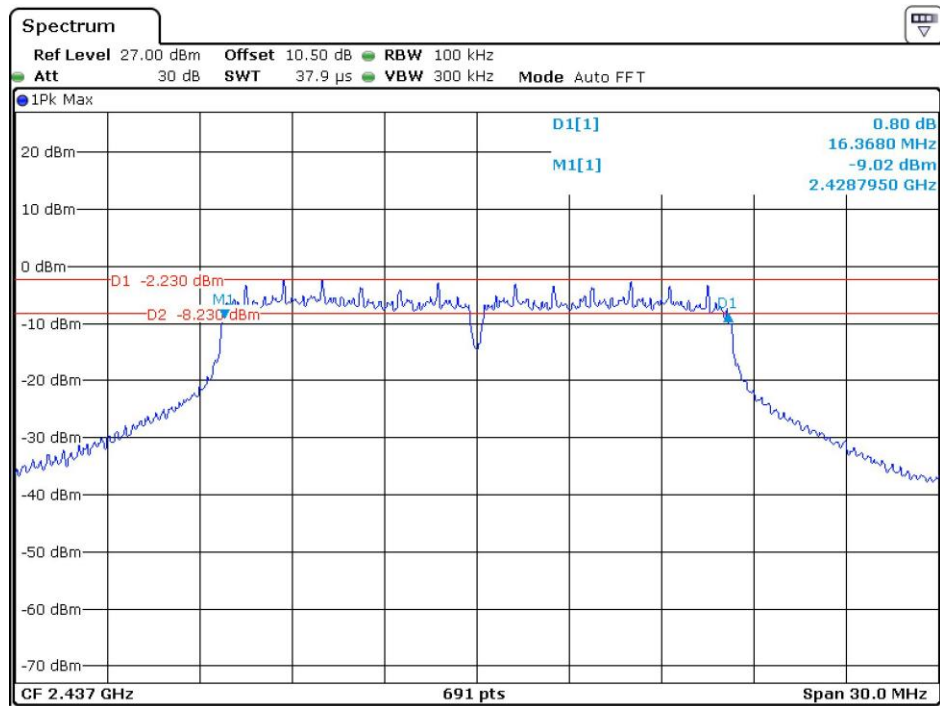


Date: 31.MAR.2022 17:02:02

## 802.11g High Channel

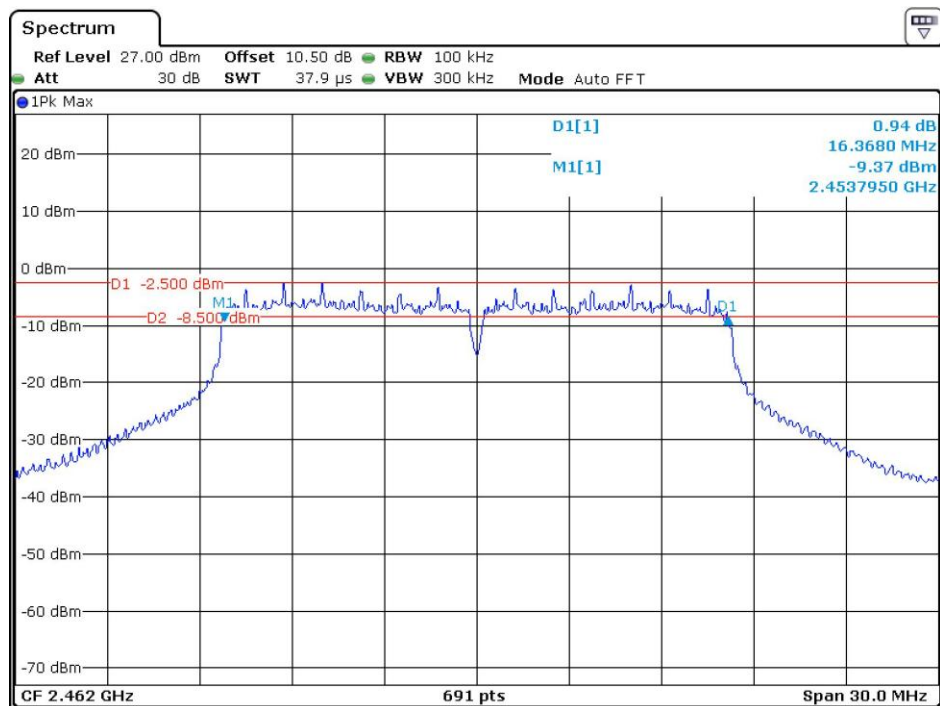


Date: 31.MAR.2022 17:03:07

## 802.11n-HT20 Low Channel

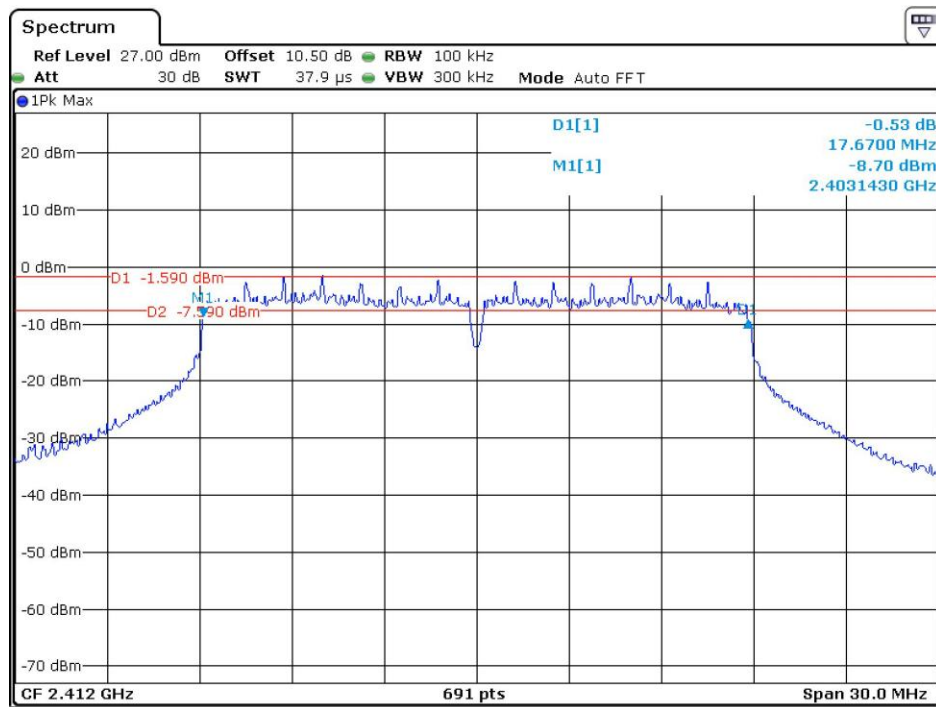

Date: 31.MAR.2022 17:07:27

## 802.11n-HT20 Middle Channel

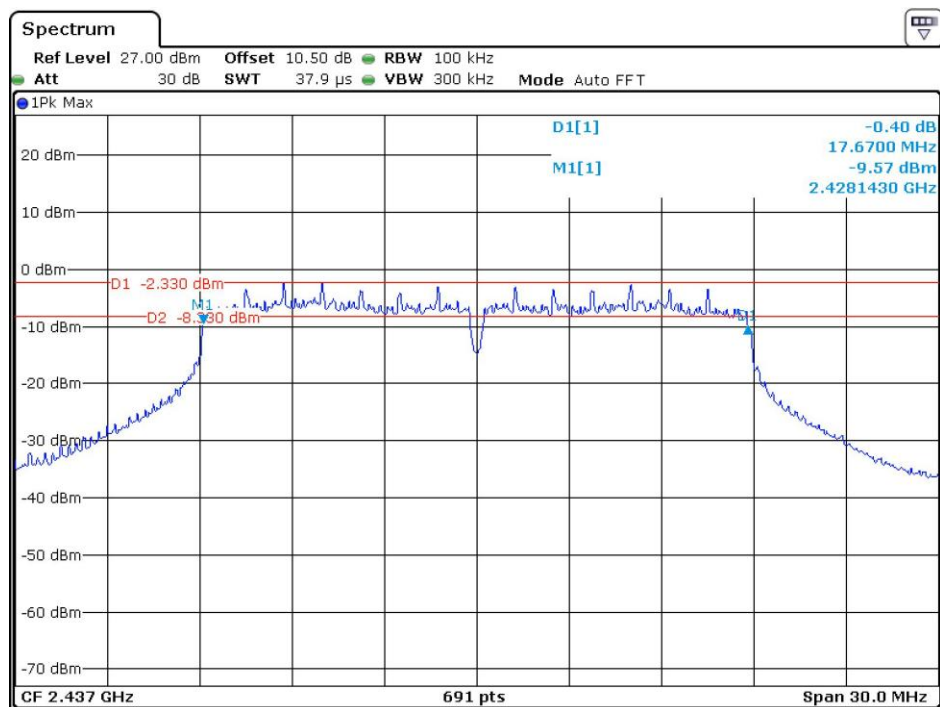

Date: 31.MAR.2022 17:06:38

**Spectrum**

Ref Level 27.00 dBm Offset 10.50 dB RBW 100 kHz  
Att 30 dB SWT 37.9  $\mu$ s VBW 300 kHz Mode Auto FFT

1Pk Max

20 dBm  
10 dBm  
0 dBm  
-10 dBm  
-20 dBm  
-30 dBm  
-40 dBm  
-50 dBm  
-60 dBm  
-70 dBm

D1[1] 0.64 dB  
M1[1] 17.5830 MHz  
-8.26 dBm  
2.4531870 GHz

D1 -2.460 dBm  
-8.46 dBm  
D2 -8.300 dBm

CF 2.462 GHz 691 pts Span 30.0 MHz

**Spectrum**

Ref Level 27.00 dBm Offset 10.50 dB RBW 100 kHz  
 Att 30 dB SWT 94.8  $\mu$ s VBW 300 kHz Mode Auto FFT

1Ppk Max

20 dBm  
10 dBm  
0 dBm  
-10 dBm  
-20 dBm  
-30 dBm  
-40 dBm  
-50 dBm  
-60 dBm  
-70 dBm


D1[1] 1.28 dB  
 M1[1] 36.470 MHz  
 -12.23 dBm  
 2.403710 GHz

D1 -5.120 dBm  
 D2 -11.120 dBm

CF 2.422 GHz 691 pts Span 80.0 MHz


FCC&amp;RSS- BLE&amp;2.4G Wi-Fi

## 802.11n-HT40 Middle Channel

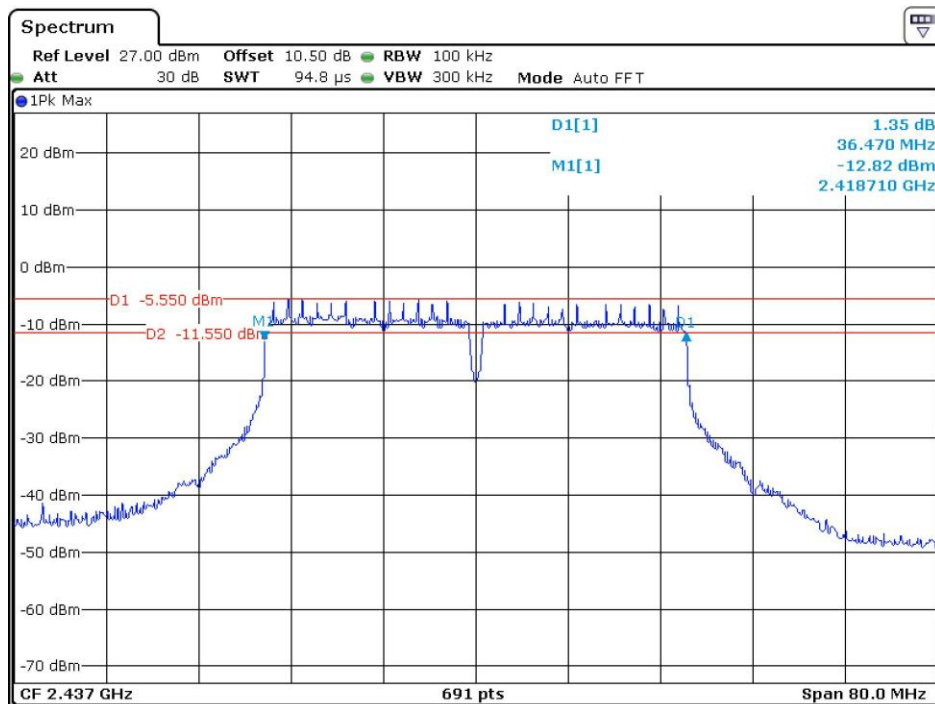


Date: 31.MAR.2022 17:09:04

## 802.11n-HT40 High Channel

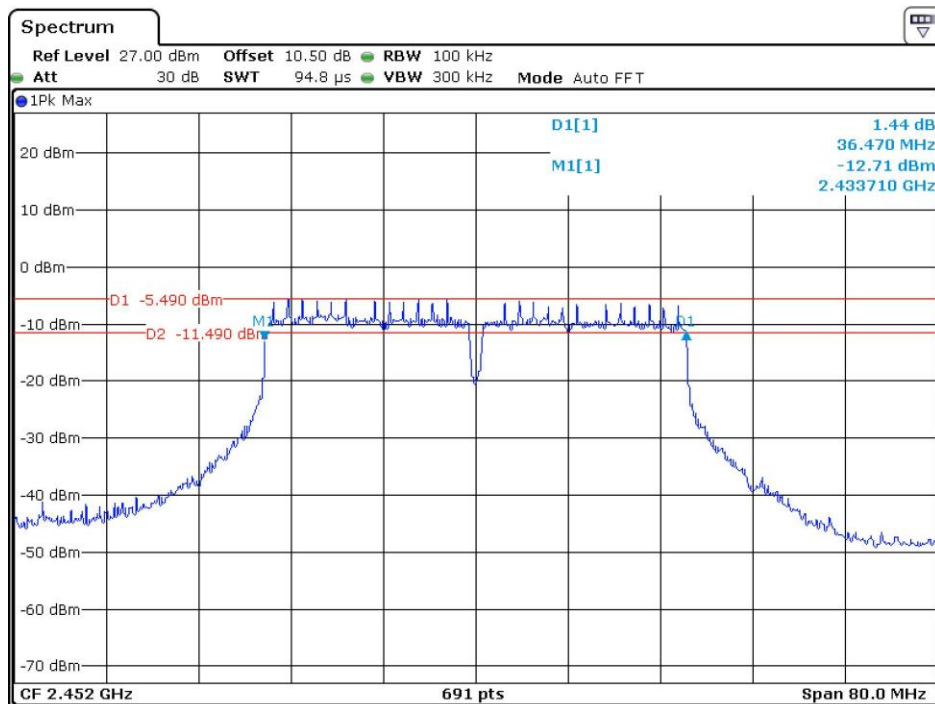


Date: 31.MAR.2022 17:09:48

## BLE\_1M Low Channel

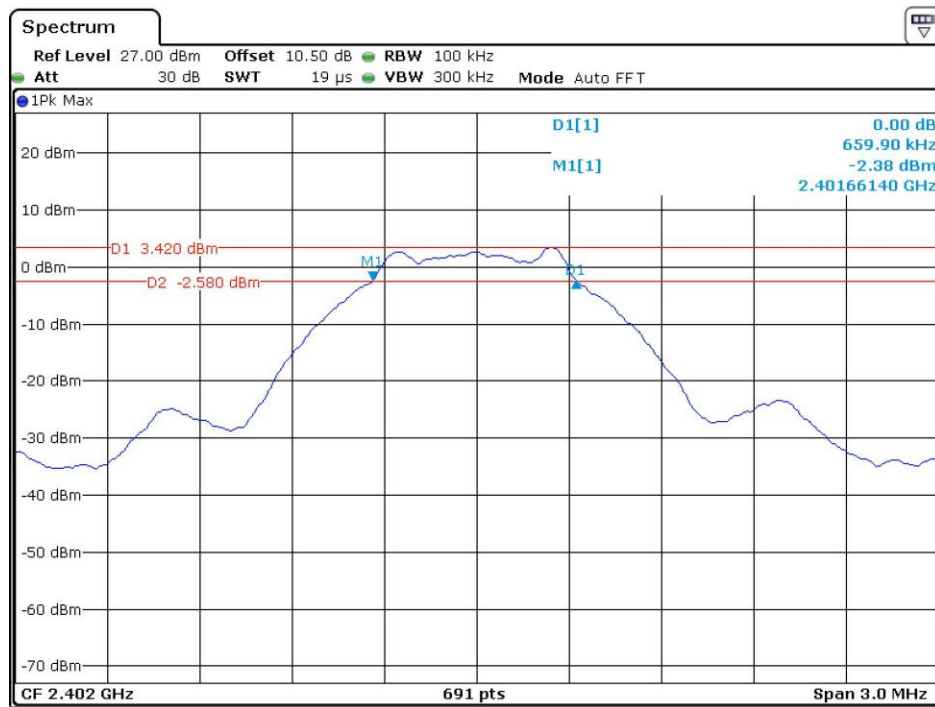


Date: 1.APR.2022 11:47:37

## BLE\_1M Middle Channel

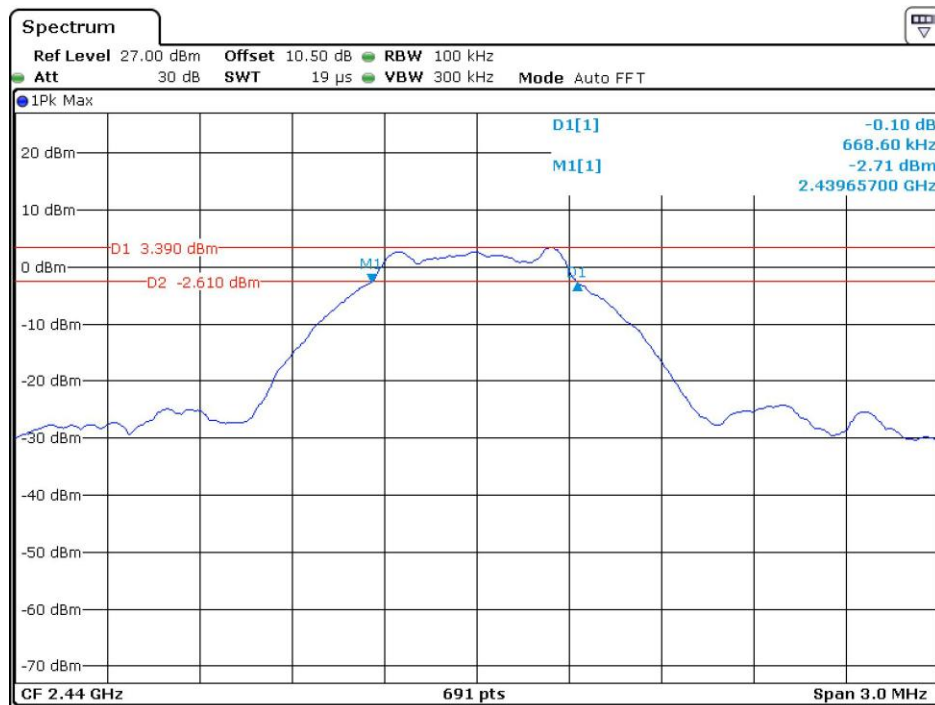


Date: 1.APR.2022 11:49:12

## BLE\_1M High Channel

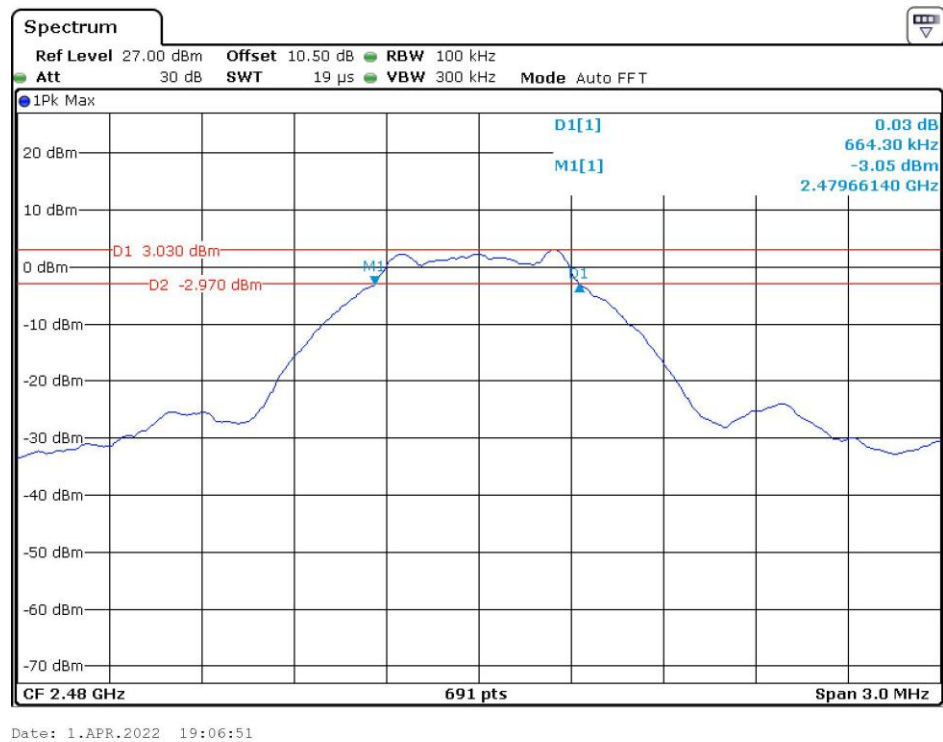


## BLE\_2M Low Channel

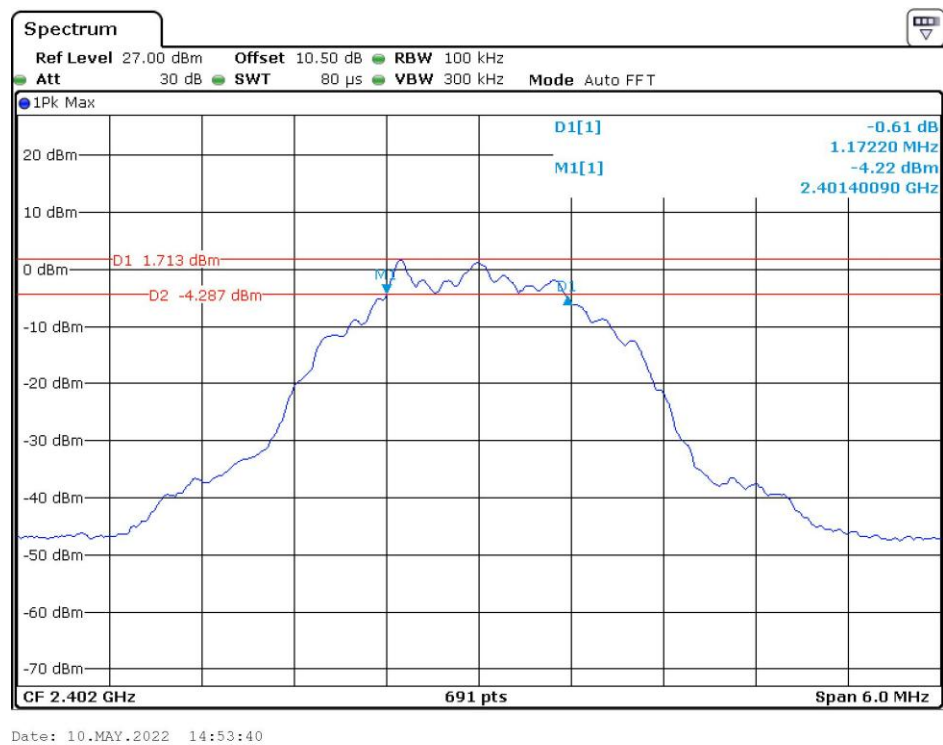




## BLE\_2M Middle Channel

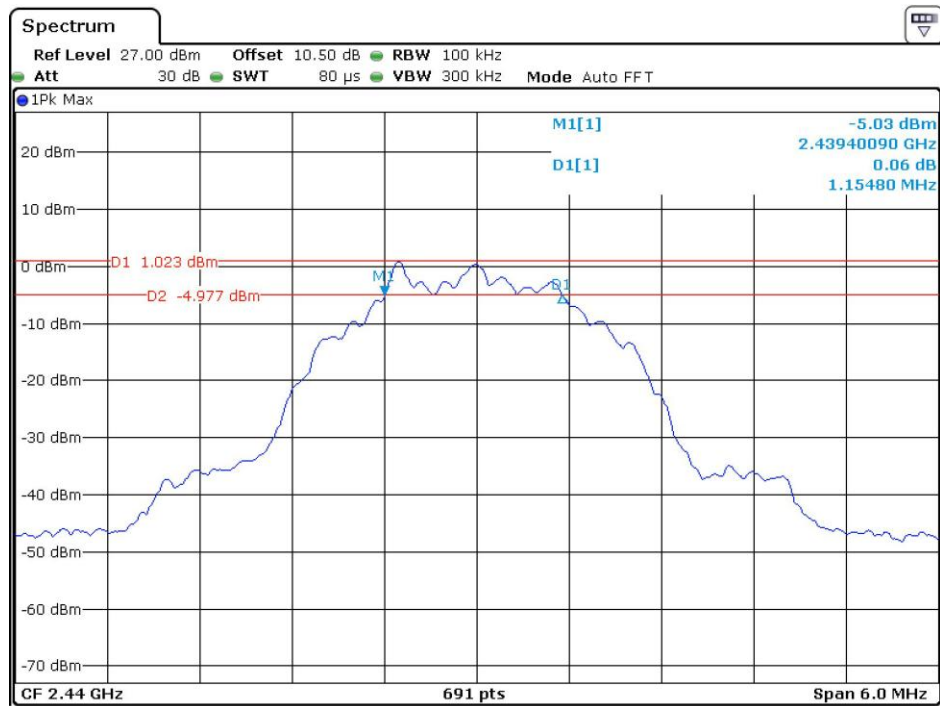


Date: 10.MAY.2022 14:56:01


## BLE\_2M High Channel

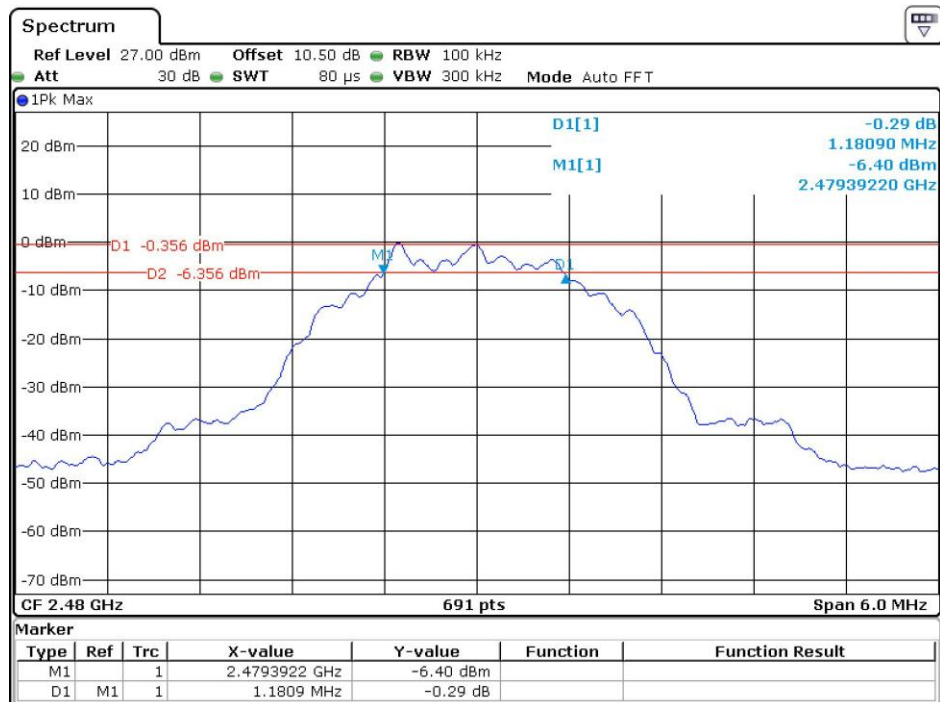

Date: 10.MAY.2022 14:48:37

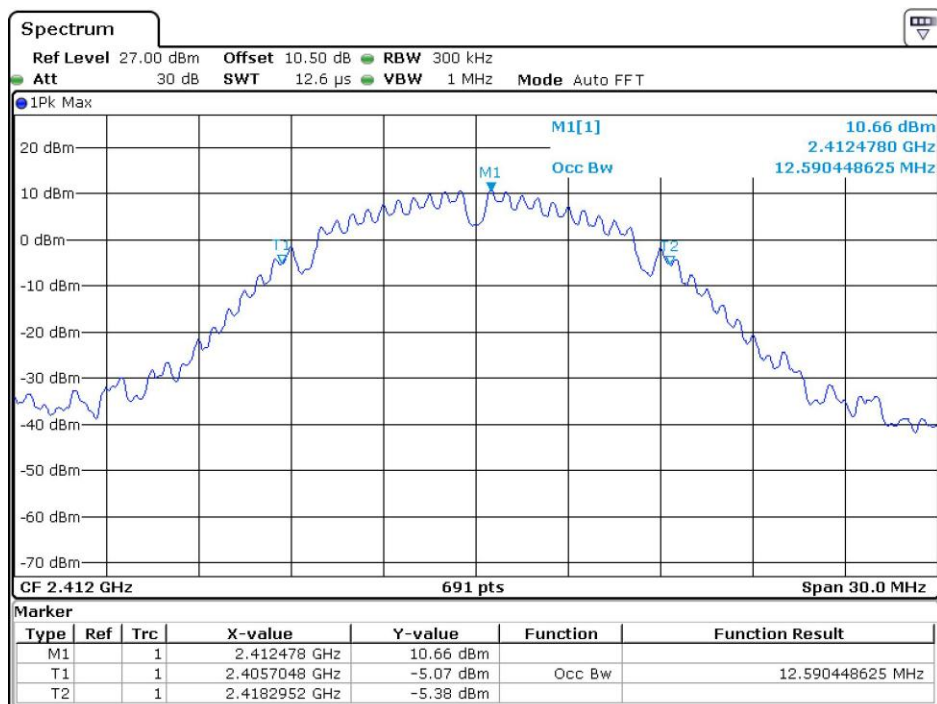
**99% Occupied bandwidth:****802.11b Low Channel**

Date: 31.MAR.2022 17:16:14

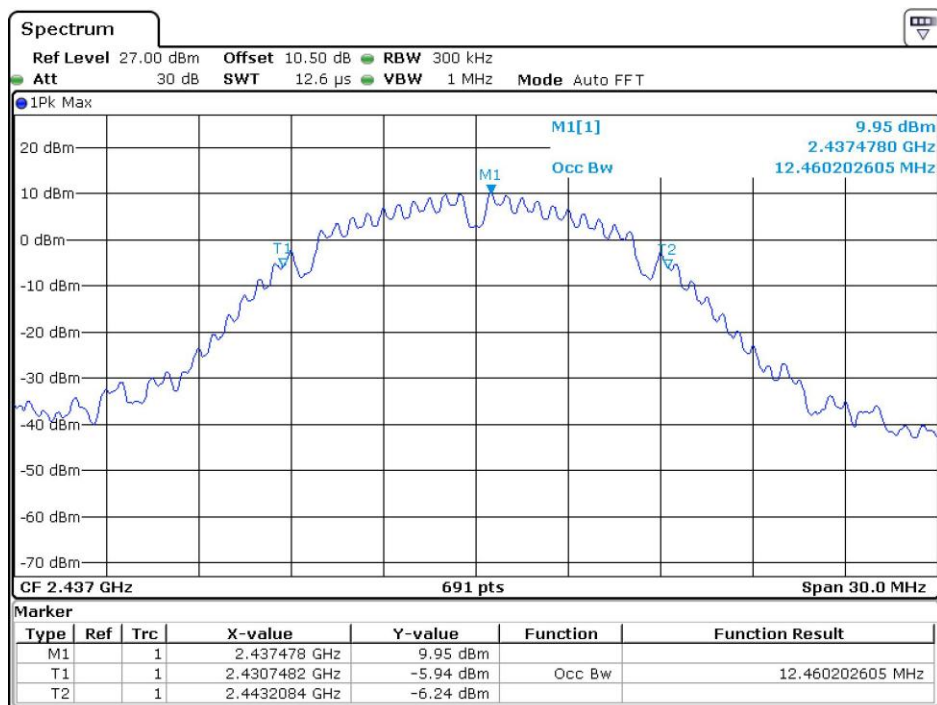**802.11b Middle Channel**


Date: 31.MAR.2022 17:16:25

## 802.11b High Channel

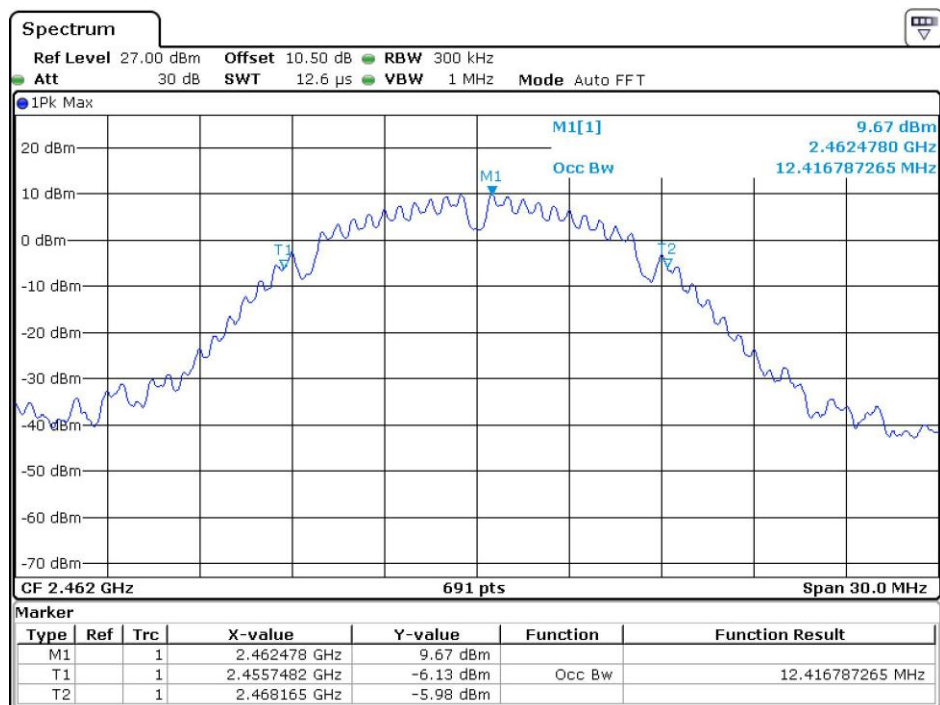


Date: 31.MAR.2022 17:16:38

## 802.11g Low Channel

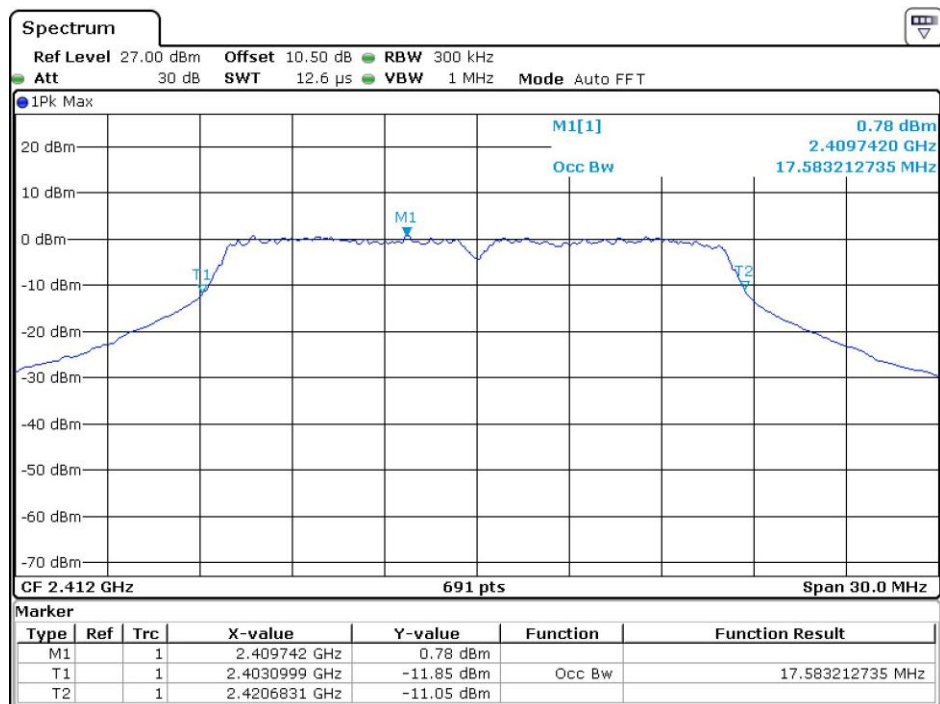


Date: 31.MAR.2022 17:15:51

## 802.11g Middle Channel

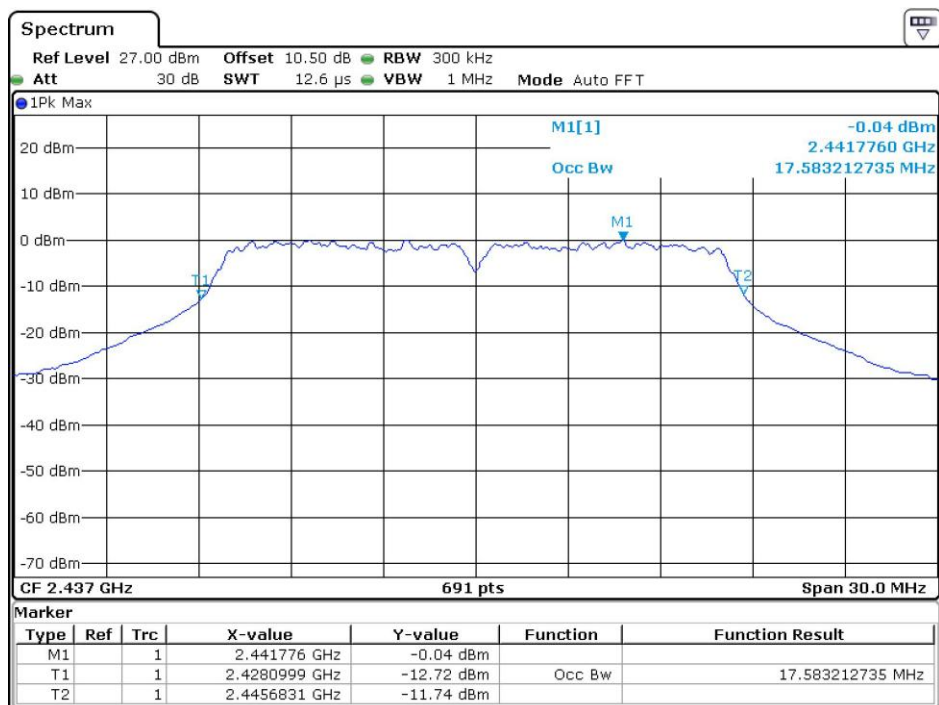


Date: 31.MAR.2022 17:15:32

## 802.11g High Channel

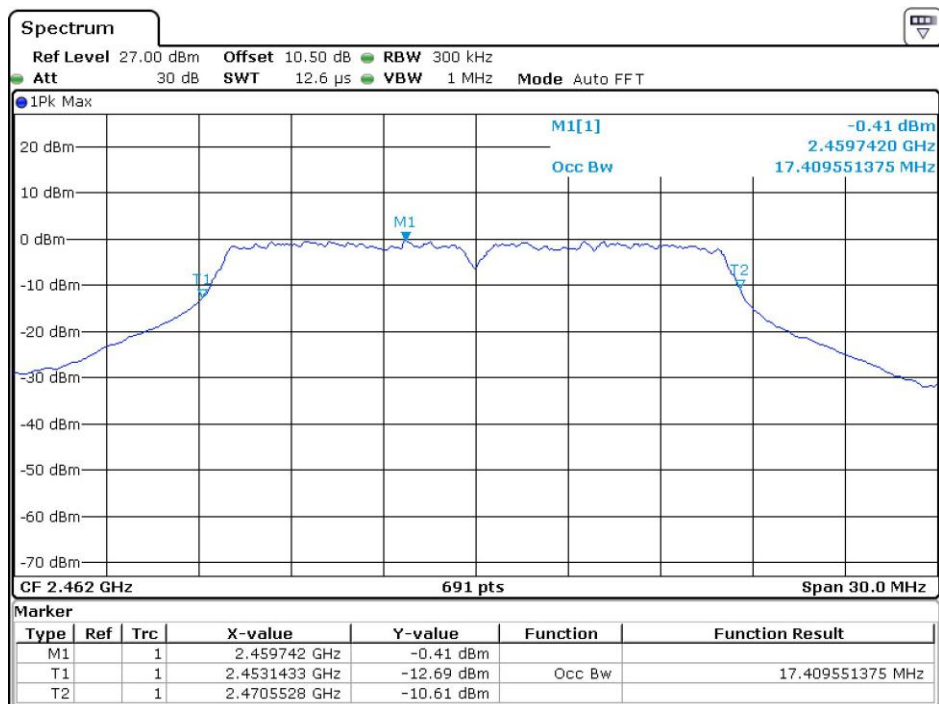


Date: 31.MAR.2022 17:15:19

## 802.11n-HT20 Low Channel

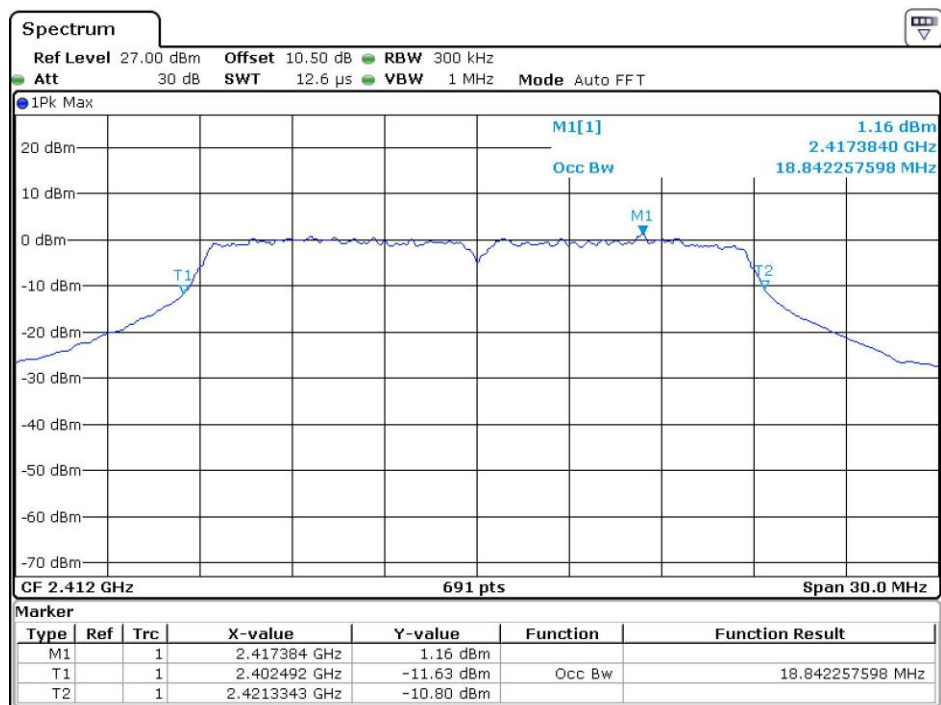


Date: 31.MAR.2022 17:14:08

## 802.11n-HT20 Middle Channel

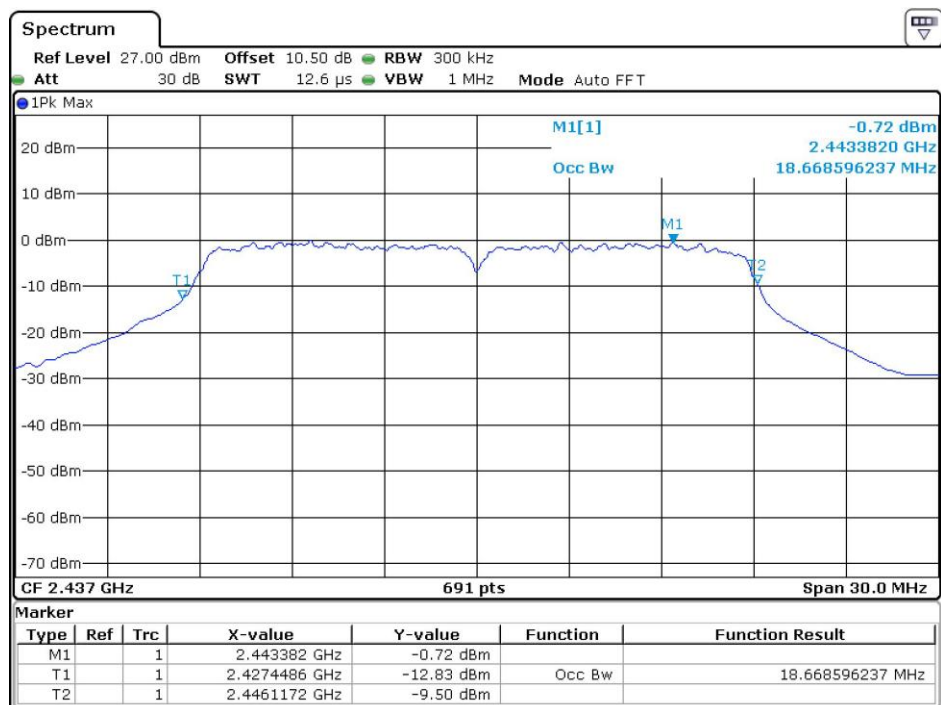


Date: 31.MAR.2022 17:14:34

## 802.11n-HT20 High Channel

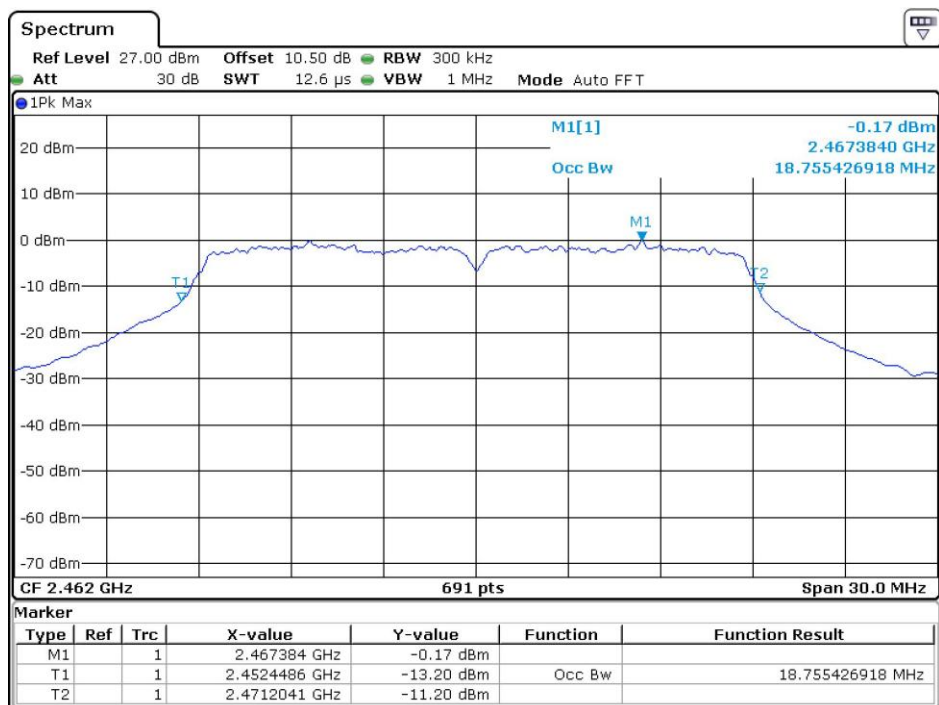


Date: 31.MAR.2022 17:14:49

## 802.11n-HT40 Low Channel

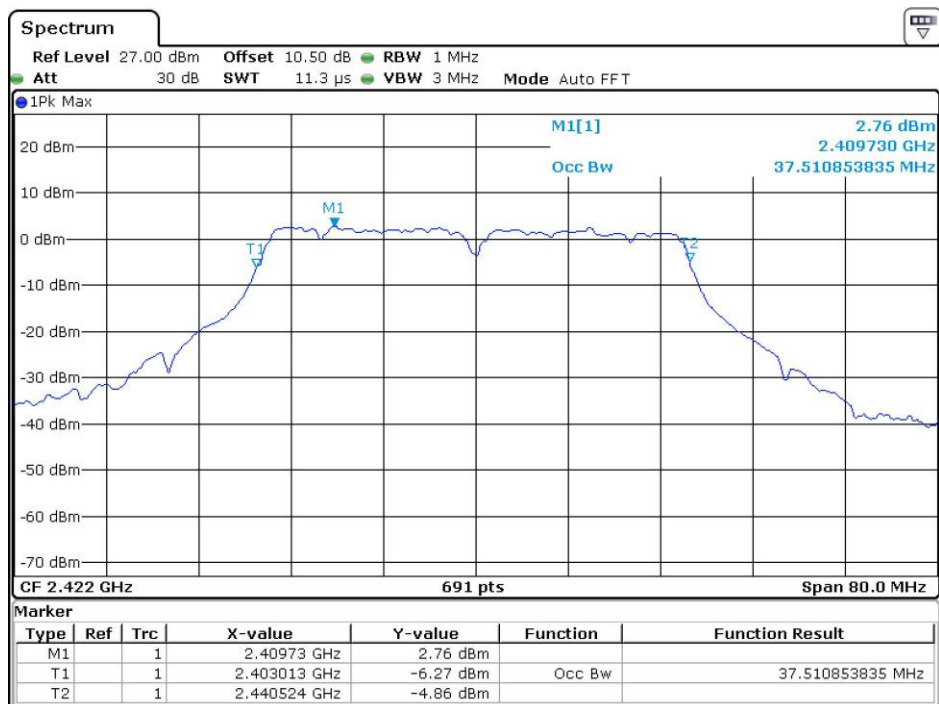


Date: 31.MAR.2022 17:13:23

## 802.11n-HT40 Middle Channel

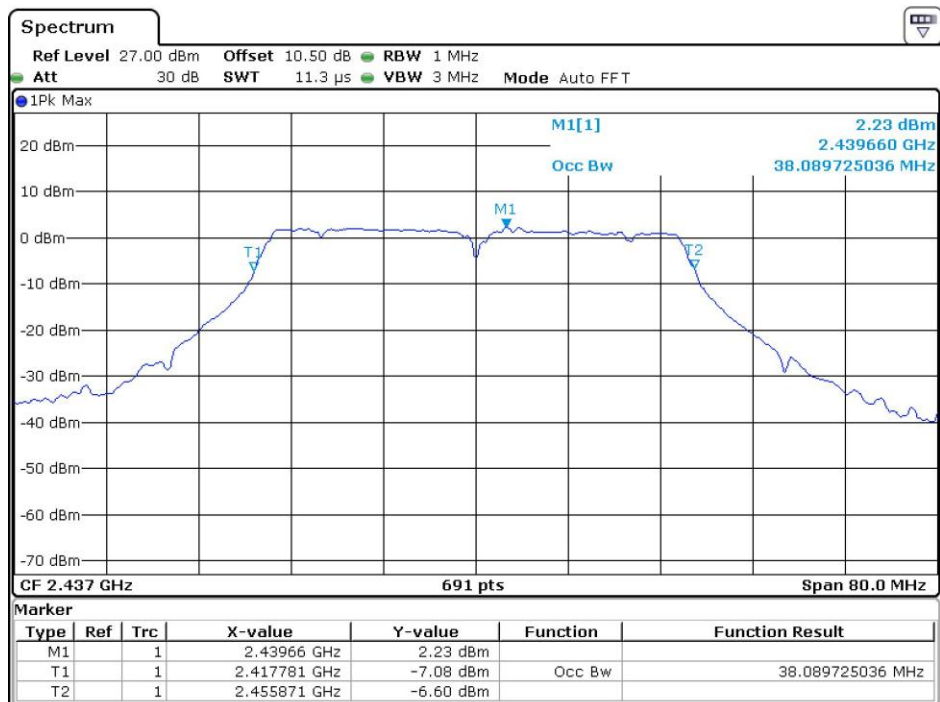

Date: 31.MAR.2022 17:12:57


## 802.11n-HT40 High Channel

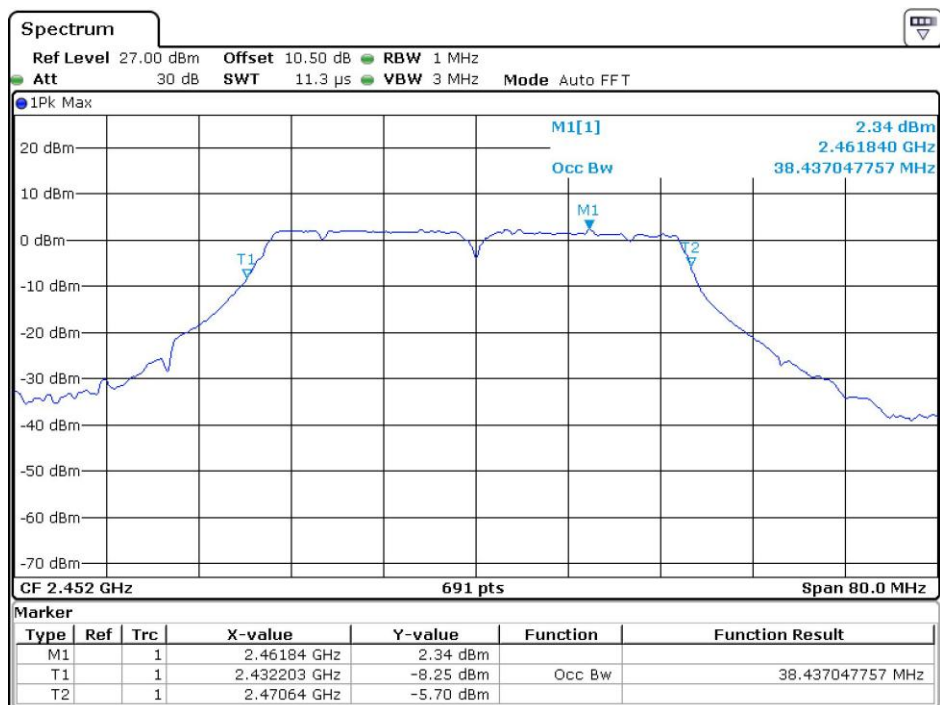

Date: 31.MAR.2022 17:11:45




## BLE\_1M Low Channel

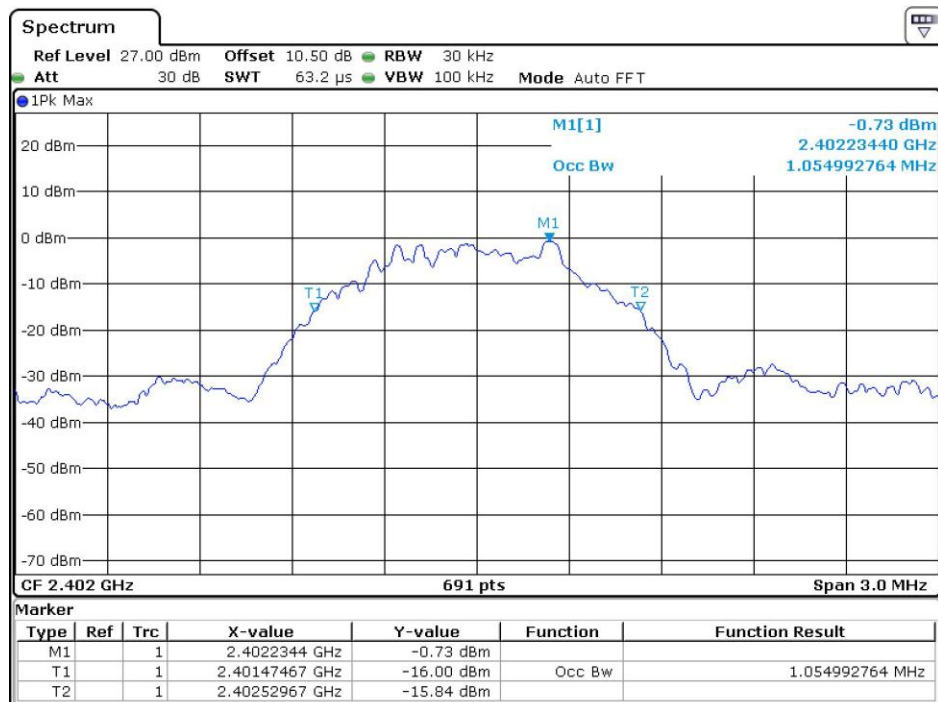

Date: 1.APR.2022 11:46:36


## BLE\_1M Middle Channel

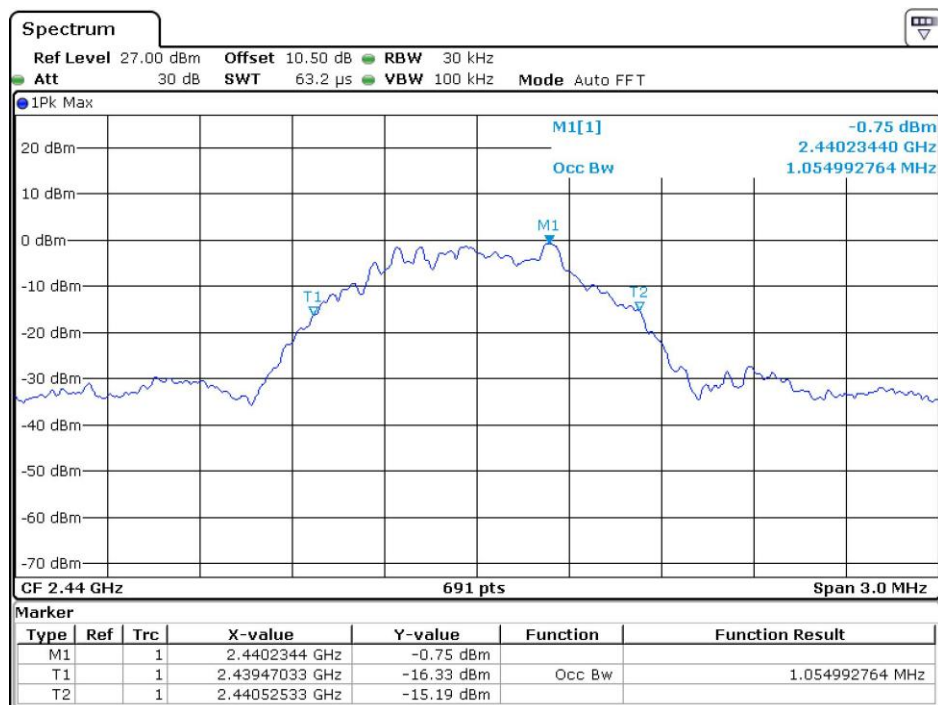

Date: 1.APR.2022 11:45:21




## BLE\_1M High Channel

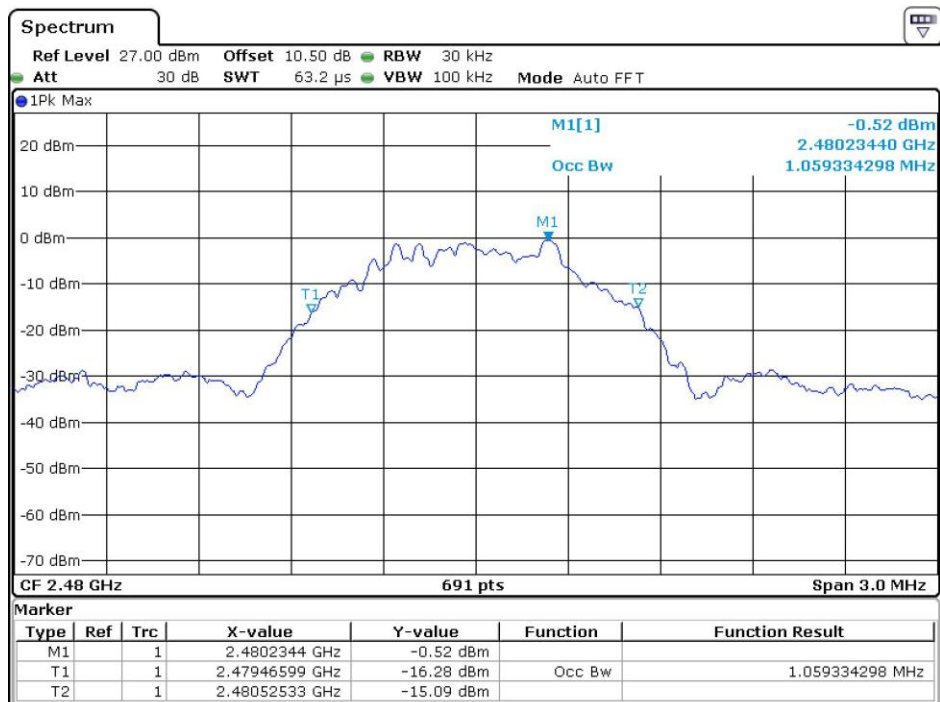


Date: 1.APR.2022 11:44:43

## BLE\_2M Low Channel

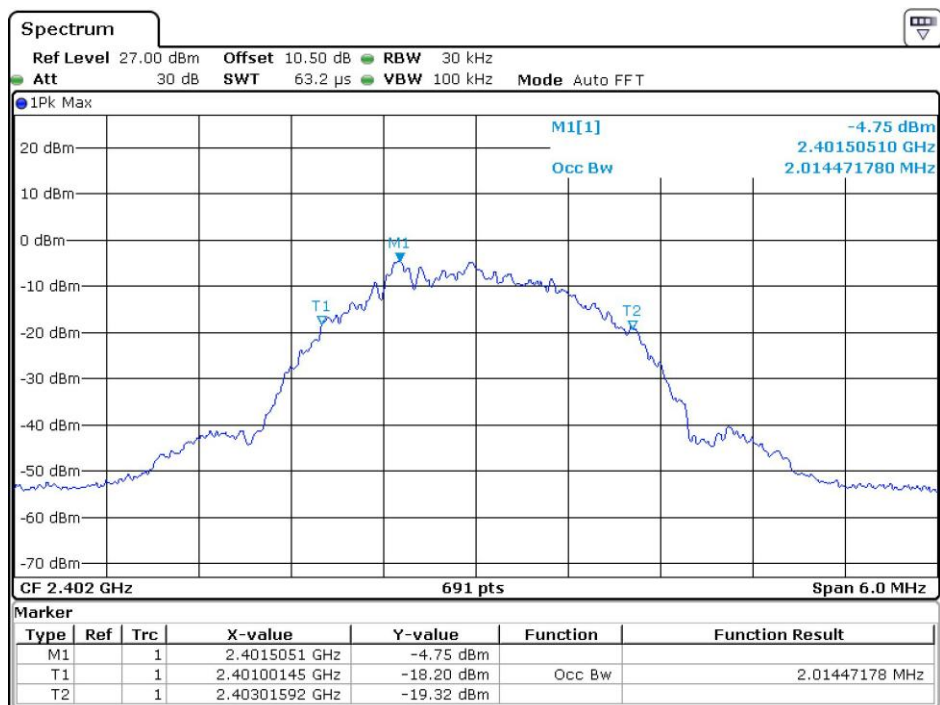


Date: 10.MAY.2022 14:04:08

## BLE\_2M Middle Channel

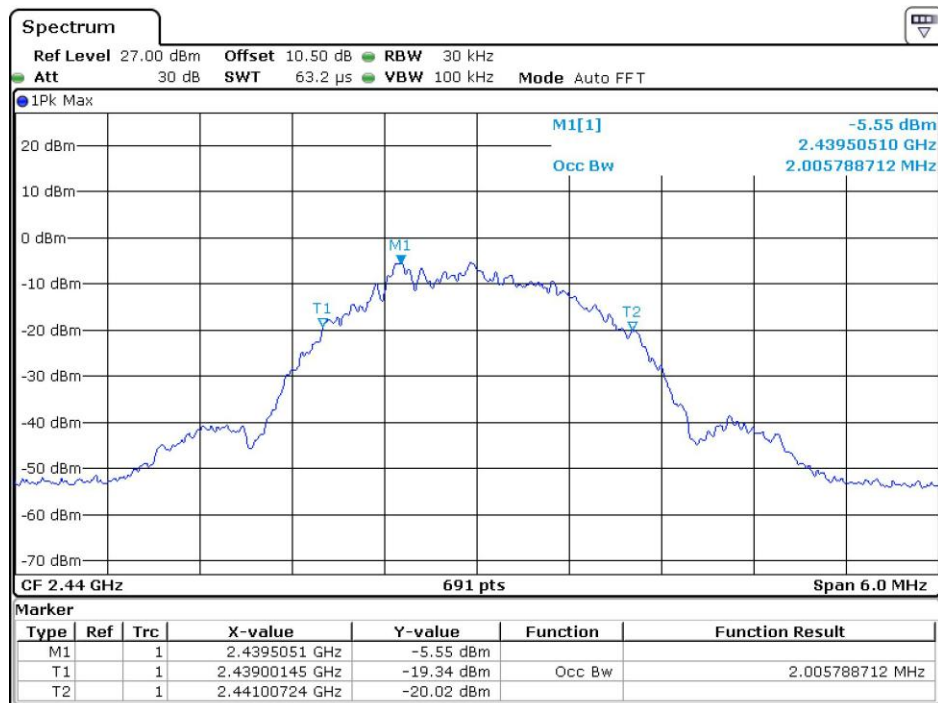

Date: 10.MAY.2022 14:05:39

## BLE\_2M High Channel

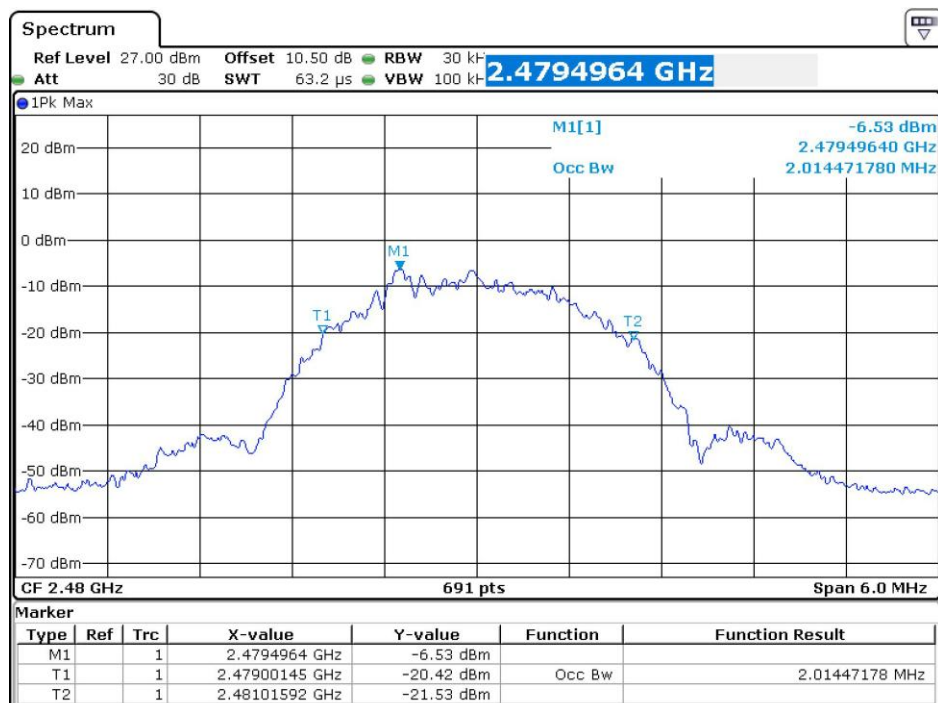

Date: 10.MAY.2022 13:57:39