



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247 TEST REPORT

For

Acer Incorporated

8F, 88, Sec 1, Hsin Tai Wu Rd, Hsichih, Taipei Hsien, Taiwan

FCC ID:HLZAV10A

Report Type: Original Report	Product Name: DLP Projector
Report Number: RDG200918011-00B	
Report Date: 2020-10-19	
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
SUPPORT CABLE LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34

TEST DATA	34
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	47
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST EQUIPMENT LIST AND DETAILS.....	57
TEST DATA	57
FCC §15.247(d) - BAND EDGES TESTING	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		DLP Projector
EUT Model:		AV10a
Multiple Models:		BWV2003, B102a
Operation Frequency:		2402-2480MHz
Maximum Peak Output Power (Conducted):		3.93 dBm
Antenna Gain^Δ :		2.0 dBi
Modulation Type:		GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:		DC 7.4V from battery or DC 12V from adapter
Adapter Information	Model:	P120D300G
	Input:	100-240Vac 50/60Hz 1.2A
	Output:	12.0V-3.0A 36.0W
Serial Number:		RDG200918011 - RF-S1
EUT Received Date:		2020.09.20
EUT Received Status:		Good

Note: The series product models BWV2003, B102a and AV10a are electrically identical, only for marketing purpose. AV10a was fully tested.

Components Information:

Component	Company	Model
AC adapter	Dongguan Guang shuElectricalTechnology Co.,Ltd	P120D3000G
POWER Cord	Hong Shan ChuanIndustry (Shenzhen) Co.,Ltd	H03VVH2-F
Lithium-ion Battery	Shenzhen Hengxun Energy Technology Co.,Ltd.	606085-2S

Objective

This report is prepared on behalf of **Acer Incorporated** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID:HLZAV10A

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

The device have two Radio, Radio 1 supports Bluetooth GFSK, $\pi/4$ -DQPSK and BLE only, Radio 2 Supports Bluetooth GFSK, $\pi/4$ -DQPSK, 8DPSK modes, BLE and 802.11b/g/n.

EUT Exercise Software

For Radio 1, The software 'FCC.exe' was used during test, which was provided by manufacturer. The maximum power level was configured by the software as below table^Δ :

Mode	Channel	Frequency (MHz)	Power Level Setting
GFSK	Low	2402	10
	Middle	2441	10
	High	2480	10
$\pi/4$ -DQPSK	Low	2402	10
	Middle	2441	10
	High	2480	10

For Radio 2, The software 'IPOP' was used during test, which was provided by manufacturer. The maximum power level was configured by the software as below table^Δ :


Mode	Channel	Frequency (MHz)	Power Level Setting
GFSK	Low	2402	Default
	Middle	2441	Default
	High	2480	Default
$\pi/4$ -DQPSK	Low	2402	Default
	Middle	2441	Default
	High	2480	Default
8DPSK	Low	2402	Default
	Middle	2441	Default
	High	2480	Default

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	HDD	L100	CNORH656658907BL05DC
Kinston	SD Card	4G	4G-1
Huawei	Earphone	Unknown	E001

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	Yes	No	1.8	Adapter	EUT
HDMI Cable	Yes	Yes	0.8	Laptop	EUT
USB Cable	Yes	No	0.8	EUT	HDD
Earphone Cable	No	No	1.2	EUT	Earphone

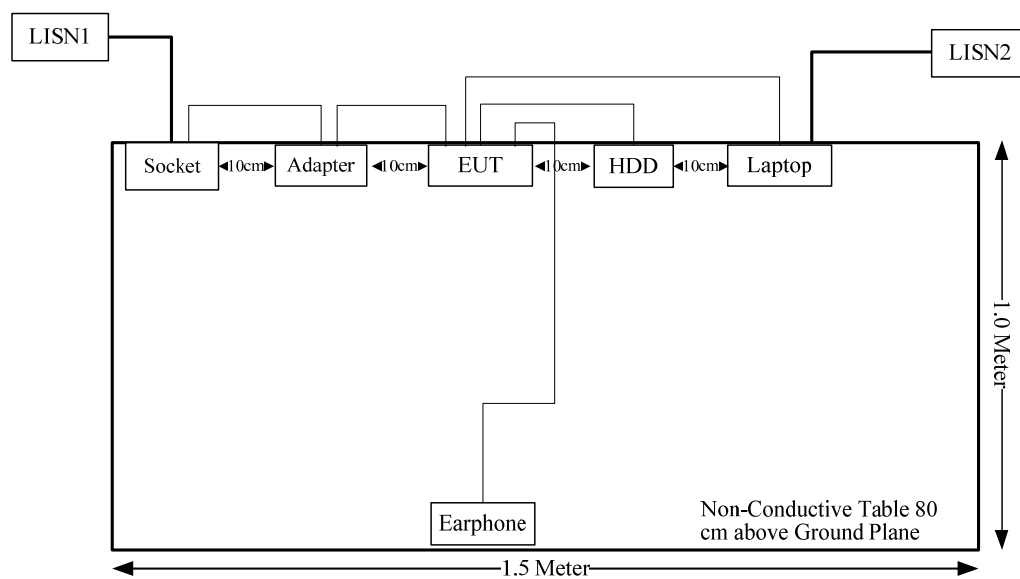Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC line conducted emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Radio	Operation Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
			(dBi)	(numeric)	(dBm)	(mW)			
1	BDR/EDR	2402-2480	2	1.58	-2	0.63	20.00	0.0002	1.0
	BLE	2402-2480	2	1.58	7	5.01	20.00	0.002	1.0
2	BDR/EDR	2402-2480	2	1.58	4	2.51	20.00	0.001	1.0
	BLE	2402-2480	2	1.58	-3	0.50	20.00	0.0002	1.0
	802.11b/g/n	2412-2462	2	1.58	26	398.11	20.00	0.126	1.0

Radio 1 and Radio 2 can transmit simultaneously, different mode in one radio can't transmit simultaneously :

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= S_{Radio\ 0} / S_{limit-Radio\ 0} + S_{Radio\ 1} / S_{limit-Radio\ 1}$$

$$= 0.002/1 + 0.126/1$$

$$= 0.128$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has two internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Usage	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
Radio 1	FPC	50	2dBi/2.4~2.5GHz
Radio 2	FPC	50	2dBi/2.4~2.5GHz


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

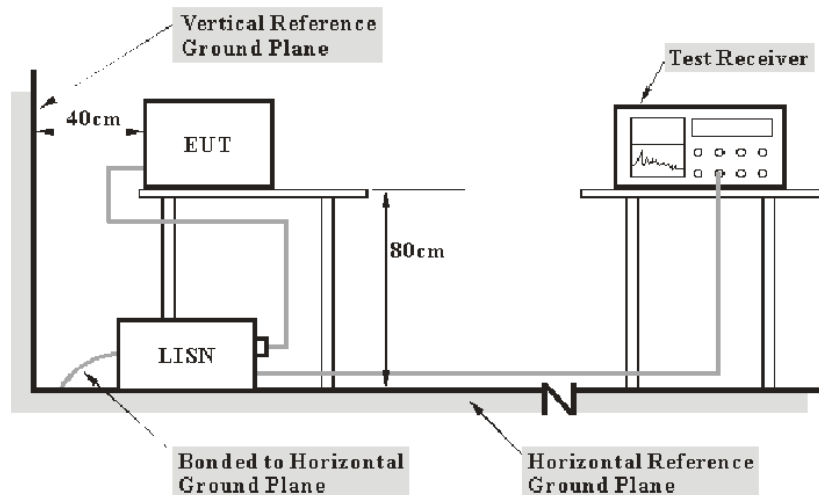

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A


*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.1°C
Relative Humidity:	54%
ATM Pressure:	100.8kPa
Tester:	Leo Long
Test Date:	2020-09-25

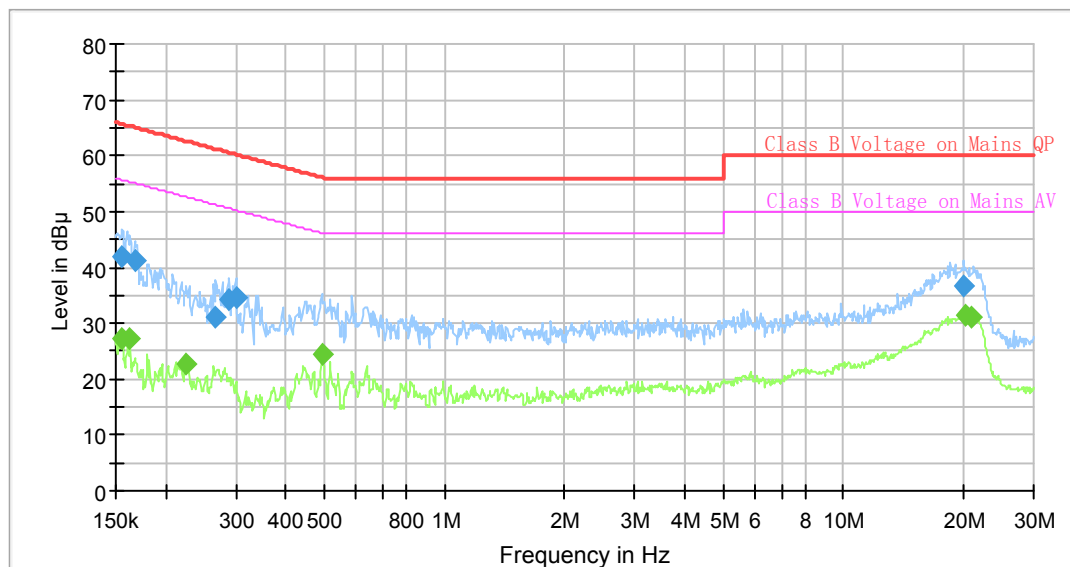Test Result: Compliance**Test Mode:** Transmitting
AC120V, 60 Hz, Line:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.155329	---	27.31	55.71	28.40	9.000	L1	9.6
0.155329	41.96	---	65.71	23.75	9.000	L1	9.6
0.162461	---	27.38	55.34	28.96	9.000	L1	9.6
0.167396	41.23	---	65.09	23.86	9.000	L1	9.6
0.225792	---	22.55	52.60	30.05	9.000	L1	9.6
0.267519	31.13	---	61.19	30.06	9.000	L1	9.6
0.288300	34.14	---	60.57	26.43	9.000	L1	9.6
0.300036	34.61	---	60.24	25.63	9.000	L1	9.6
0.496531	---	24.49	46.06	21.57	9.000	L1	9.6
19.998519	36.58	---	60.00	23.42	9.000	L1	10.0
20.199004	---	31.52	50.00	18.48	9.000	L1	10.0
21.021246	---	31.12	50.00	18.88	9.000	L1	10.0

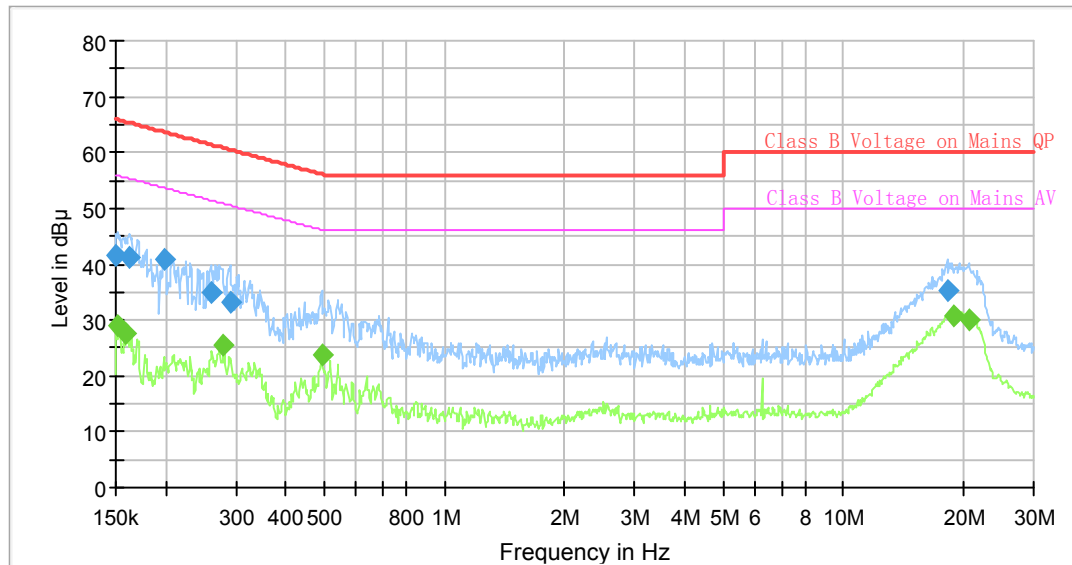AC120V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.150750	41.44	---	65.96	24.52	9.000	N	9.6
0.152261	---	28.91	55.88	26.97	9.000	N	9.6
0.159252	---	27.68	55.50	25.82	9.000	N	9.6
0.162461	41.39	---	65.34	23.95	9.000	N	9.6
0.199323	40.82	---	63.64	22.82	9.000	N	9.6
0.260930	35.01	---	61.40	26.39	9.000	N	9.6
0.278409	---	25.33	50.86	25.53	9.000	N	9.6
0.289742	33.12	---	60.53	17.41	9.000	N	9.6
0.491602	---	23.71	46.14	22.43	9.000	N	9.6
18.190418	35.34	---	60.00	24.66	9.000	N	9.9
18.930896	---	30.62	50.00	19.38	9.000	N	9.9
20.709055	---	30.05	50.00	19.95	9.000	N	9.9


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

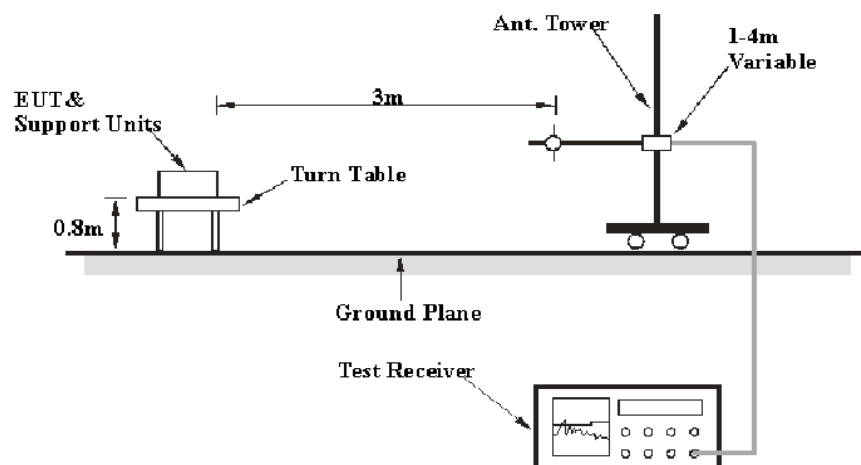

Above 1GHz:

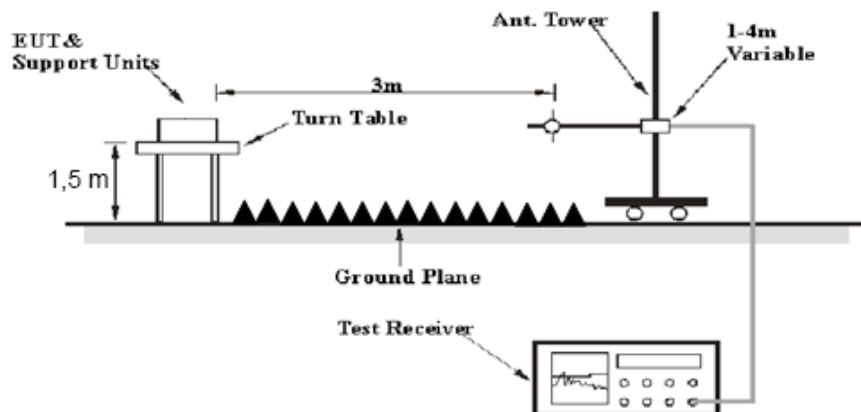

The radiated emission Below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2020-06-27	2021-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2020-06-27	2021-06-27
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2020-06-16	2021-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2020-06-16	2021-06-16


*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	27.2°C	28.0°C
Relative Humidity:	36%	39%
ATM Pressure:	100.5kPa	100.6kPa
Tester:	Joker Chen	Joker Chen
Test Date:	2020-09-23	2020-09-27

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots:

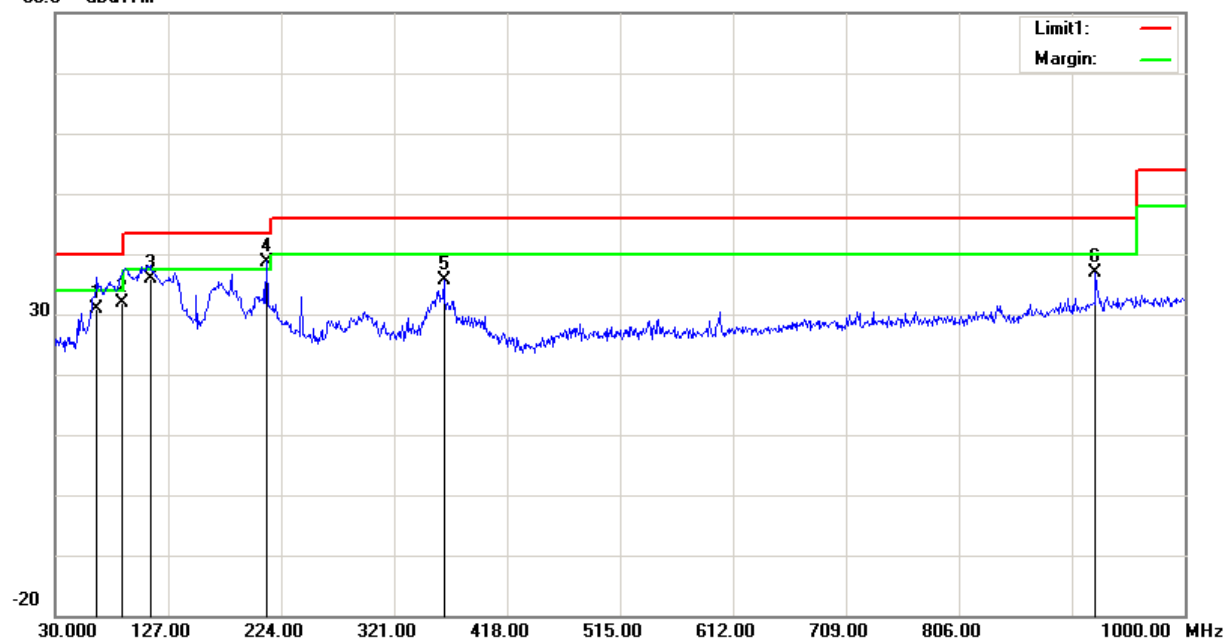1) 30MHz-1GHz (Radio 1, GFSK high channel was the worst)**Horizontal:**80.0 dB μ V/m

No.	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	65.8900	47.43	QP	-16.43	31.00	40.00	9.00
2	87.2300	47.20	QP	-15.20	32.00	40.00	8.00
3	111.4800	48.83	QP	-12.83	36.00	43.50	7.50
4	211.3900	49.71	QP	-11.11	38.60	43.50	4.90
5	363.6800	41.83	peak	-6.09	35.74	46.00	10.26
6	923.3700	32.84	peak	4.00	36.84	46.00	9.16

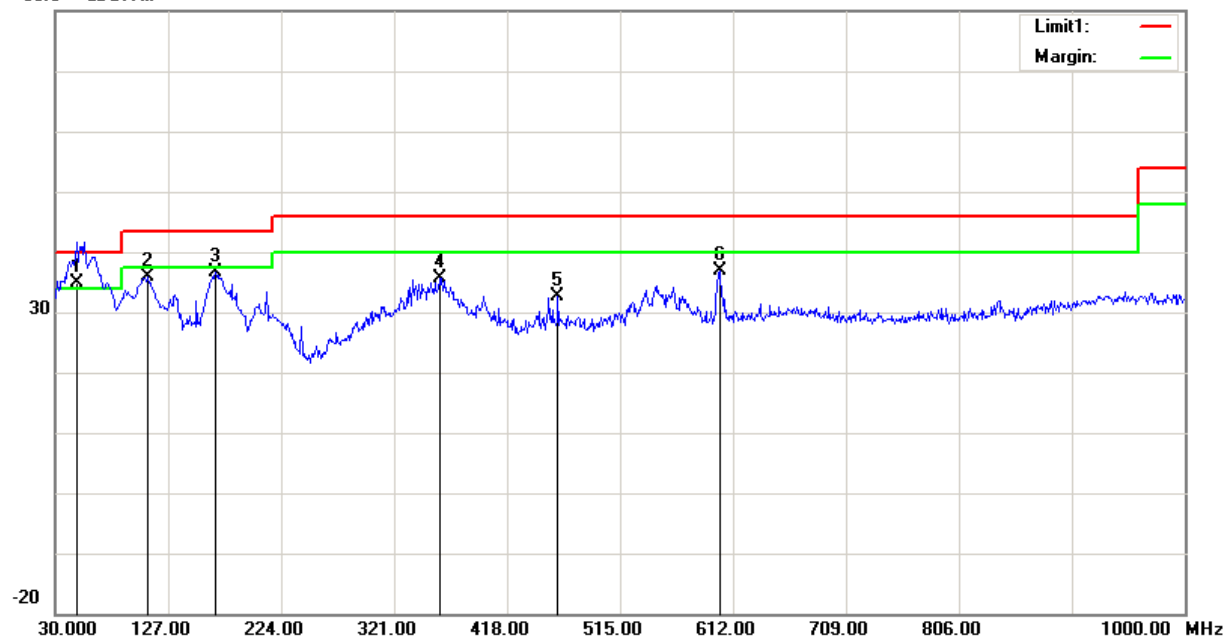Vertical:80.0 dB μ V/m

No.	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	48.4300	50.12	QP	-15.12	35.00	40.00	5.00
2	109.5400	48.65	peak	-12.89	35.76	43.50	7.74
3	167.7400	46.02	peak	-9.44	36.58	43.50	6.92
4	359.8000	41.49	peak	-5.95	35.54	46.00	10.46
5	461.6500	36.51	peak	-3.99	32.52	46.00	13.48
6	600.3600	38.38	peak	-1.39	36.99	46.00	9.01

2)1GHz-25GHz:**Radio 1:***BDR Mode (GFSK) was the worst*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	25.81	PK	V	24.80	2.50	0.00	53.11	74.00	20.89
2390.00	14.01	AV	V	24.80	2.50	0.00	41.31	54.00	12.69
4804.00	37.45	PK	V	29.71	3.59	27.36	43.39	74.00	30.61
4804.00	25.36	AV	V	29.71	3.59	27.36	31.30	54.00	22.70
7206.00	44.12	PK	V	33.93	4.68	27.19	55.54	74.00	18.46
7206.00	32.11	AV	V	33.93	4.68	27.19	43.53	54.00	10.47
Middle Channel: 2441 MHz									
4882.00	36.57	PK	V	29.86	3.58	27.56	42.45	74.00	31.55
4882.00	24.41	AV	V	29.86	3.58	27.56	30.29	54.00	23.71
7323.00	45.14	PK	V	34.12	4.64	27.26	56.64	74.00	17.36
7323.00	33.96	AV	V	34.12	4.64	27.26	45.46	54.00	8.54
High Channel: 2480 MHz									
2483.50	26.48	PK	V	24.97	2.53	0.00	53.98	74.00	20.02
2483.50	14.22	AV	V	24.97	2.53	0.00	41.72	54.00	12.28
4960.00	35.41	PK	V	30.02	3.59	27.37	41.65	74.00	32.35
4960.00	23.67	AV	V	30.02	3.59	27.37	29.91	54.00	24.09
7440.00	40.38	PK	V	34.30	4.61	27.22	52.07	74.00	21.93
7440.00	28.11	AV	V	34.30	4.61	27.22	39.80	54.00	14.20




Radio 2:*BDR Mode (GFSK) was the worst*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2390.00	26.51	PK	V	24.80	2.50	0.00	53.81	74.00	20.19
2390.00	14.14	AV	V	24.80	2.50	0.00	41.44	54.00	12.56
4804.00	37.24	PK	V	29.71	3.59	27.36	43.18	74.00	30.82
4804.00	24.58	AV	V	29.71	3.59	27.36	30.52	54.00	23.48
7206.00	36.64	PK	V	33.93	4.68	27.19	48.06	74.00	25.94
7206.00	24.37	AV	V	33.93	4.68	27.19	35.79	54.00	18.21
Middle Channel: 2441 MHz									
4882.00	37.08	PK	V	29.86	3.58	27.56	42.96	74.00	31.04
4882.00	24.15	AV	V	29.86	3.58	27.56	30.03	54.00	23.97
7323.00	36.58	PK	V	34.12	4.64	27.26	48.08	74.00	25.92
7323.00	24.19	AV	V	34.12	4.64	27.26	35.69	54.00	18.31
High Channel: 2480 MHz									
2483.50	29.32	PK	V	24.97	2.53	0.00	56.82	74.00	17.18
2483.50	14.39	AV	V	24.97	2.53	0.00	41.89	54.00	12.11
4960.00	36.79	PK	V	30.02	3.59	27.37	43.03	74.00	30.97
4960.00	23.88	AV	V	30.02	3.59	27.37	30.12	54.00	23.88
7440.00	36.68	PK	V	34.30	4.61	27.22	48.37	74.00	25.63
7440.00	23.42	AV	V	34.30	4.61	27.22	35.11	54.00	18.89

Worst plots (Radio 1 Middle channel was the worst)




Horizontal:

Fundamental
Test with Band
Rejection Filter

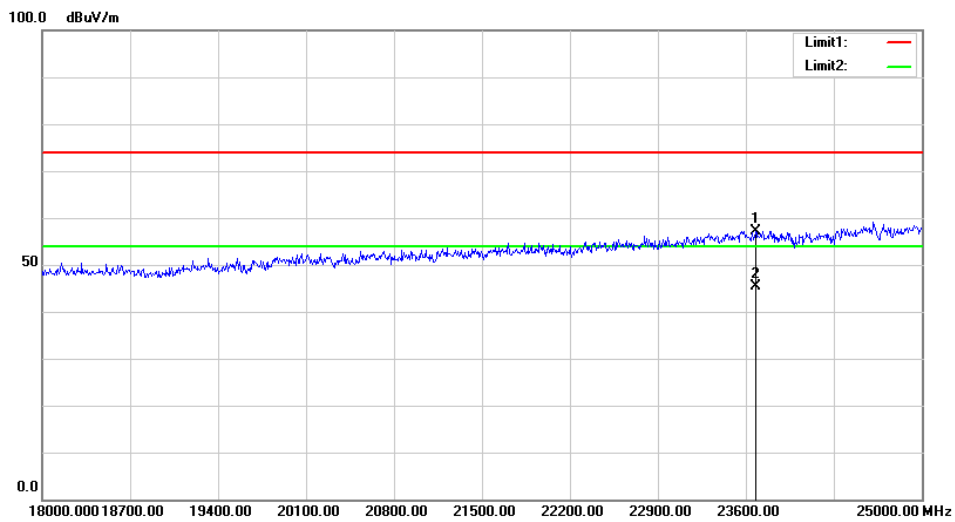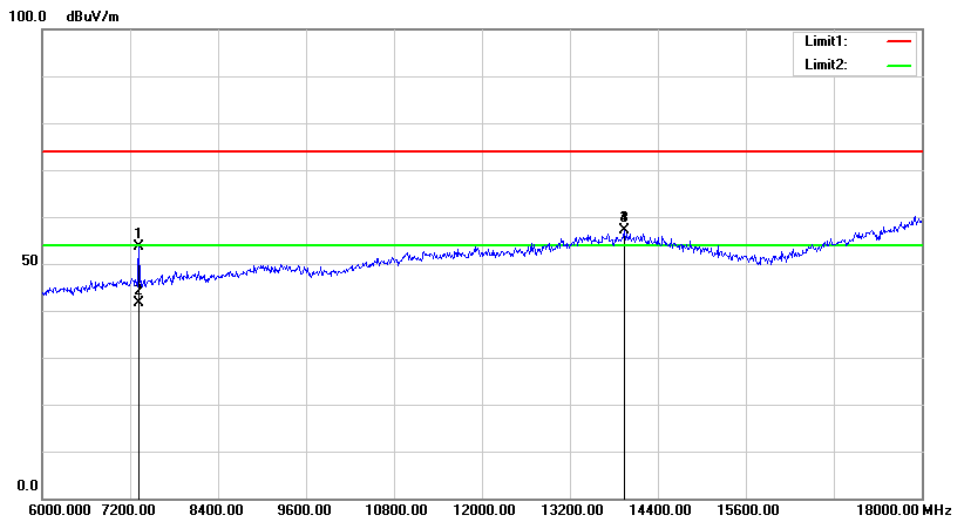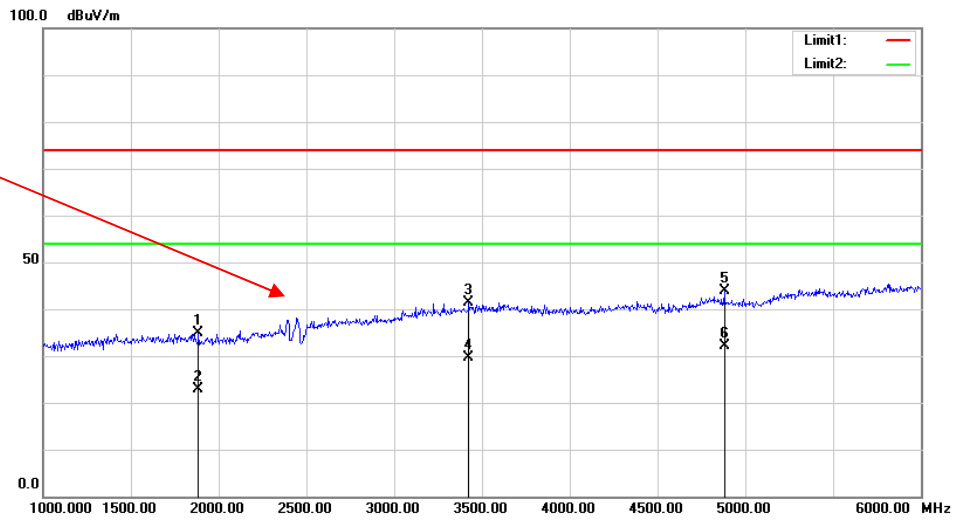

Vertical

Fundamental
Test with Band
Rejection Filter

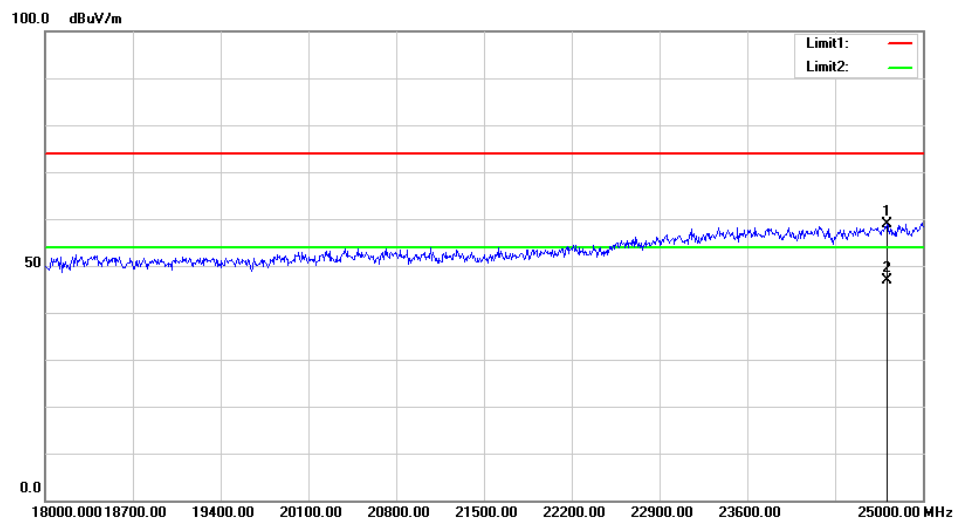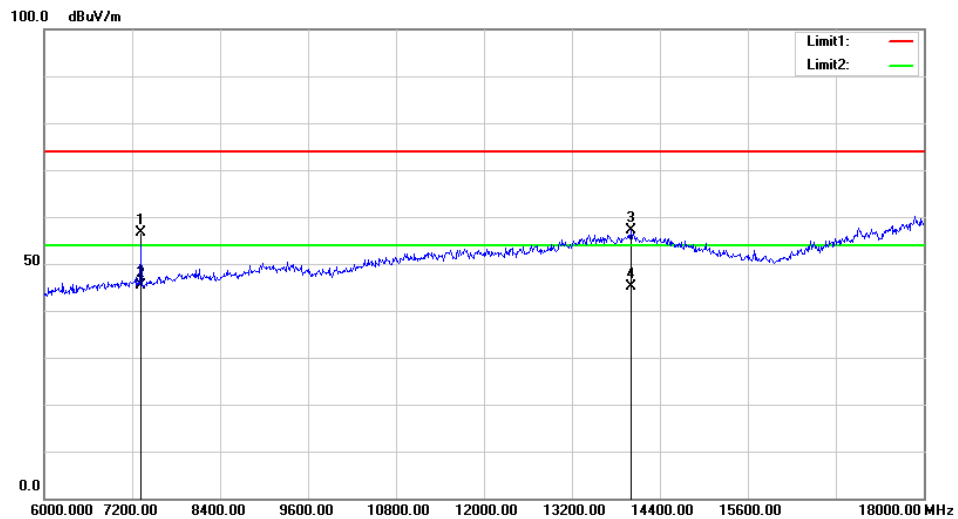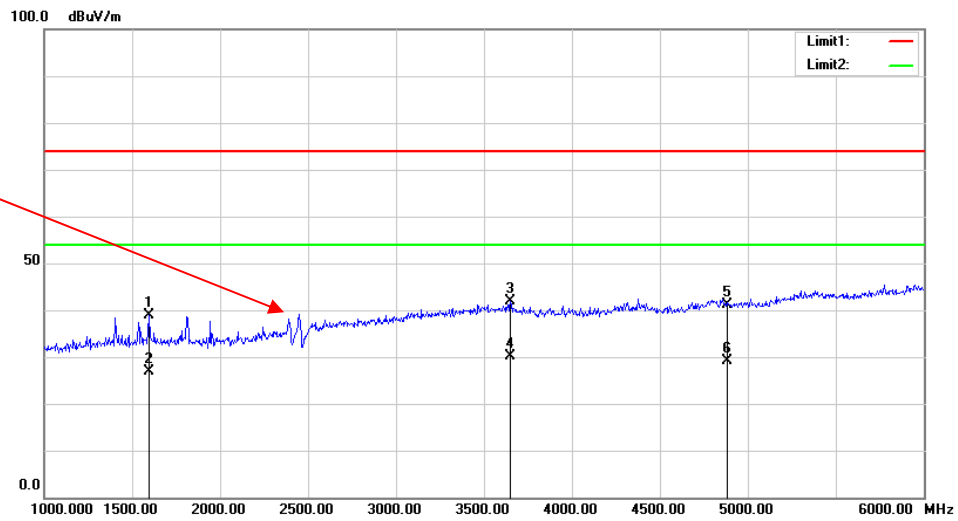

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	26.2-26.6 °C
Relative Humidity:	51-54 %
ATM Pressure:	100.5-100.8Pa
Tester:	Billy Li
Test Date:	2020.09.28-2020.09.29

Test Result: Compliance. Please refer to following tables and plots

Test Mode: Transmitting

Radio 1:

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
<i>BDR (GFSK)</i>	Low	2402	0.996	0.59
	Middle	2441	1.002	0.59
	High	2480	1.002	0.59
EDR ($\pi/4$ -DQPSK)	Low	2402	1.002	0.86
	Middle	2441	1.002	0.86
	High	2480	1.002	0.86


Radio 2:

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
<i>BDR (GFSK)</i>	Low	2402	0.990	0.64
	Middle	2441	1.002	0.62
	High	2480	0.996	0.6
EDR ($\pi/4$ -DQPSK)	Low	2402	0.990	0.83
	Middle	2441	1.014	0.83
	High	2480	1.002	0.83
EDR (8DPSK)	Low	2402	1.002	0.86
	Middle	2441	0.990	0.85
	High	2480	1.002	0.86

Note: Limit = $(2/3) \times 20\text{dB bandwidth}$


Radio 1:
BDR Mode (GFSK):

Low Channel

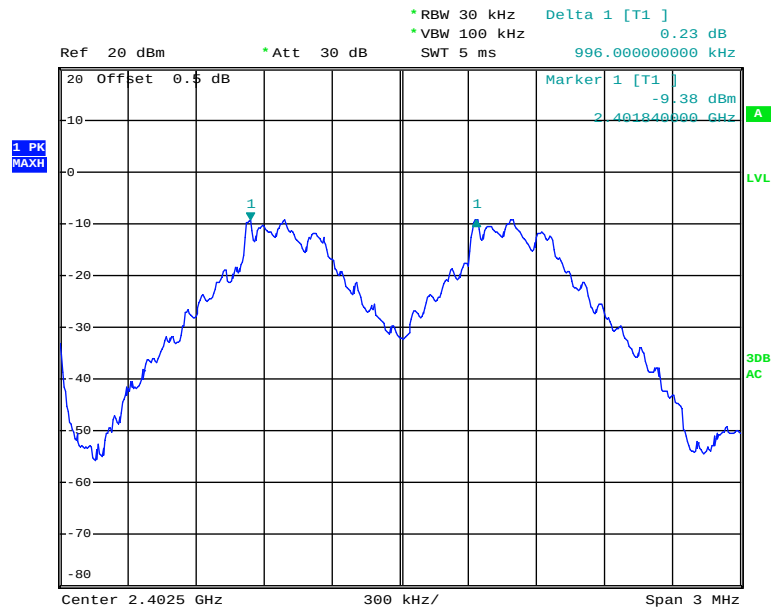


Date: 29.SEP.2020 14:33:23

Middle Channel

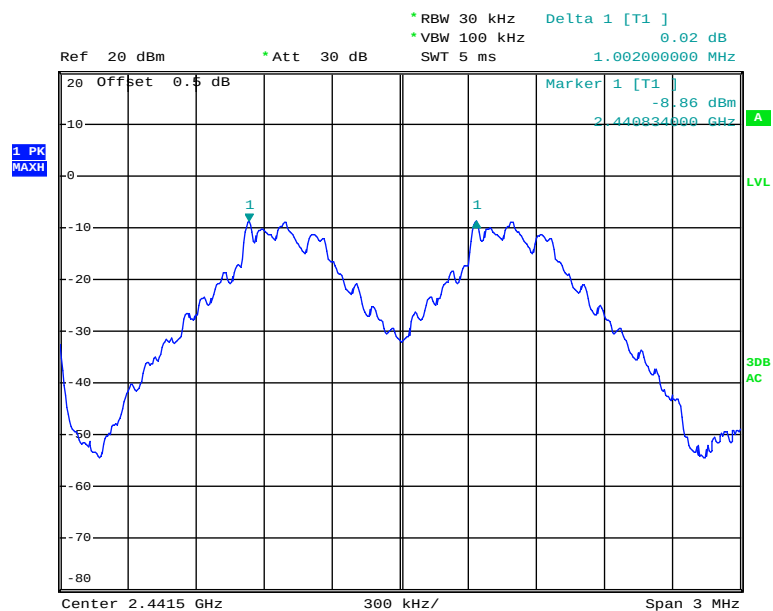

Date: 29.SEP.2020 14:34:03


High Channel

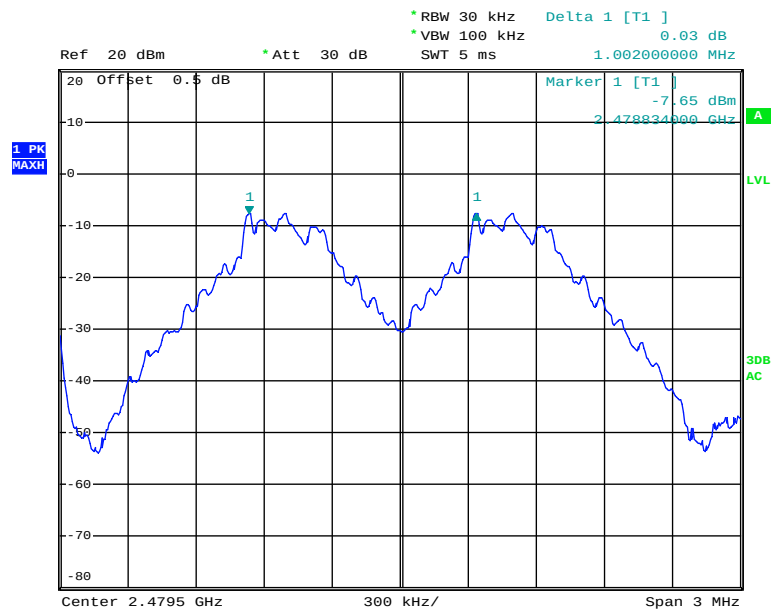


Date: 29.SEP.2020 14:51:55

EDR Mode ($\pi/4$ -DQPSK):


Low Channel

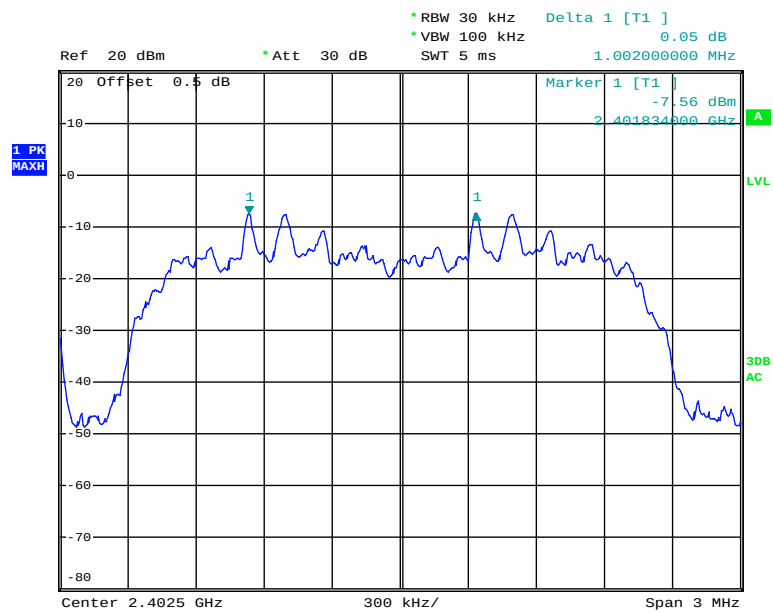

Date: 29.SEP.2020 14:53:01

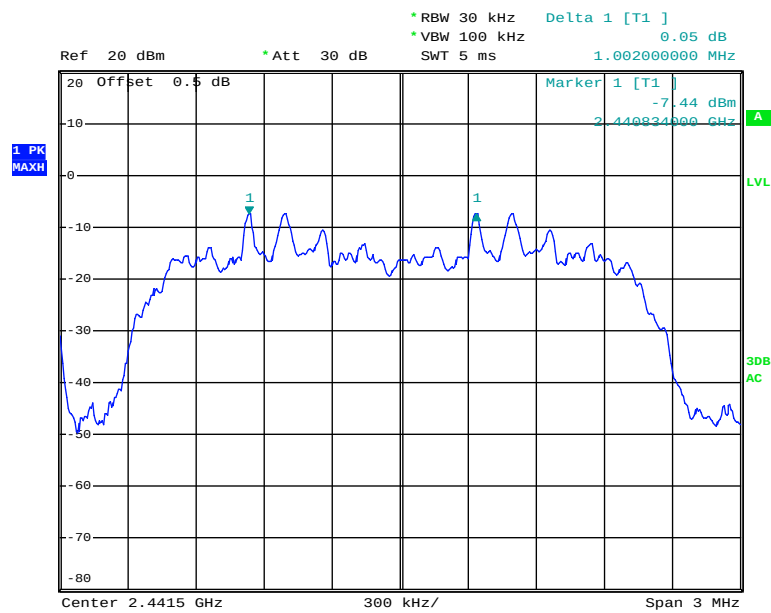Middle Channel


Date: 29.SEP.2020 14:53:45

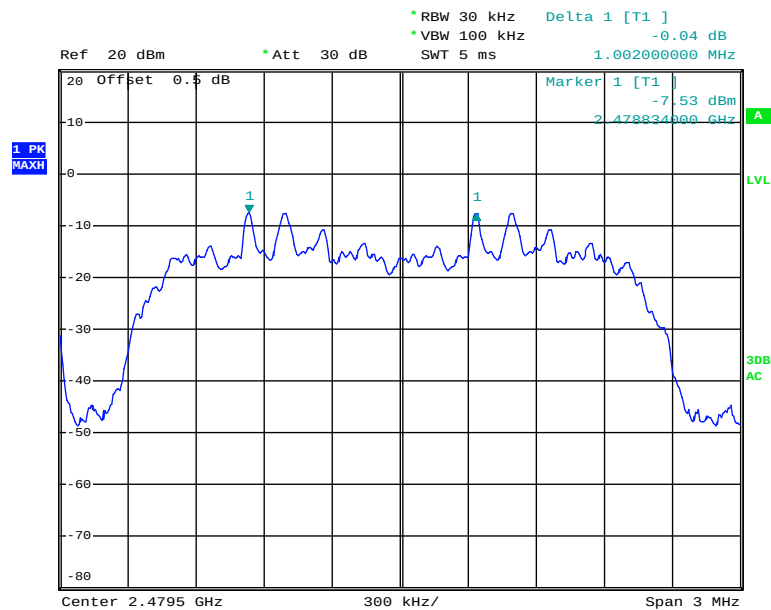High Channel

Date: 29.SEP.2020 14:54:44


Radio 2:
BDR Mode (GFSK):

Low Channel

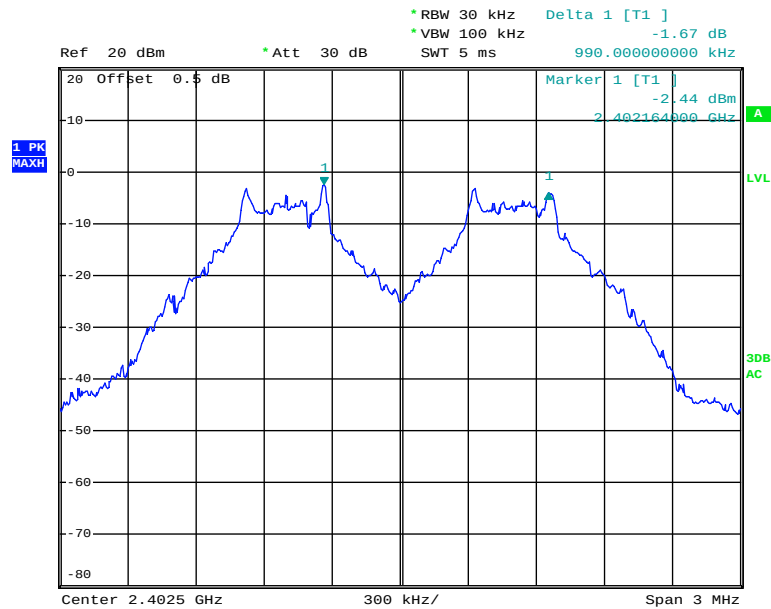


Date: 28.SEP.2020 13:40:11

Middle Channel

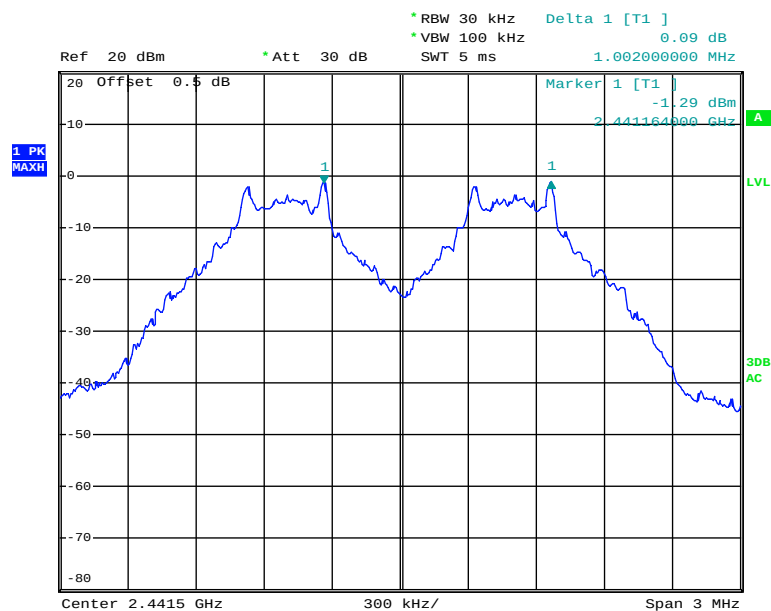

Date: 28.SEP.2020 13:38:52


High Channel

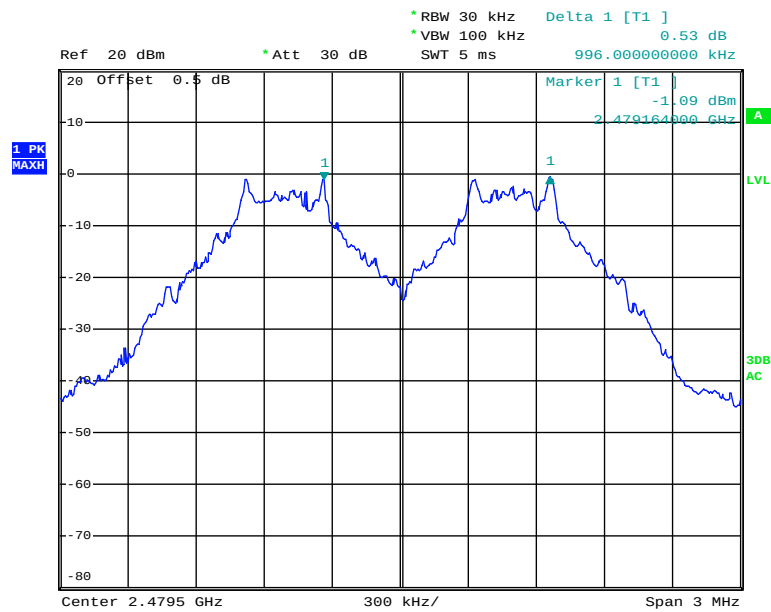

Date: 28.SEP.2020 13:37:11


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

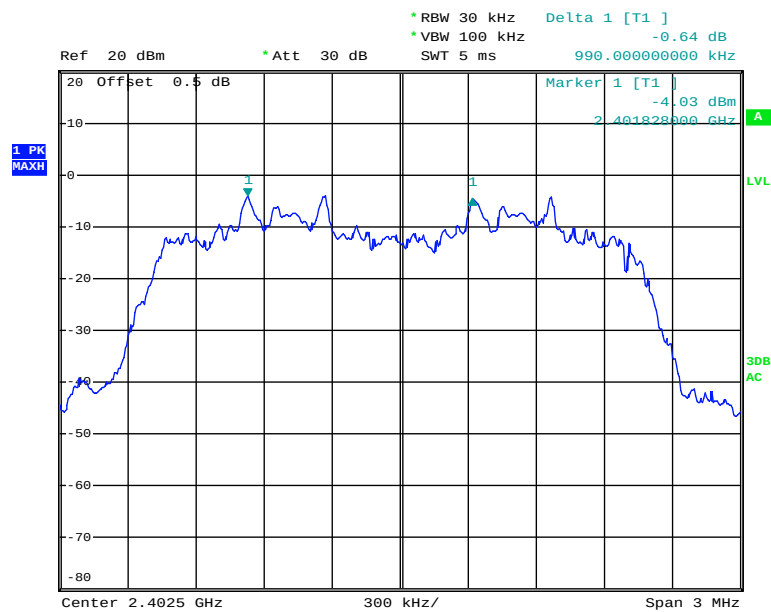


Date: 28.SEP.2020 13:34:07

Middle Channel

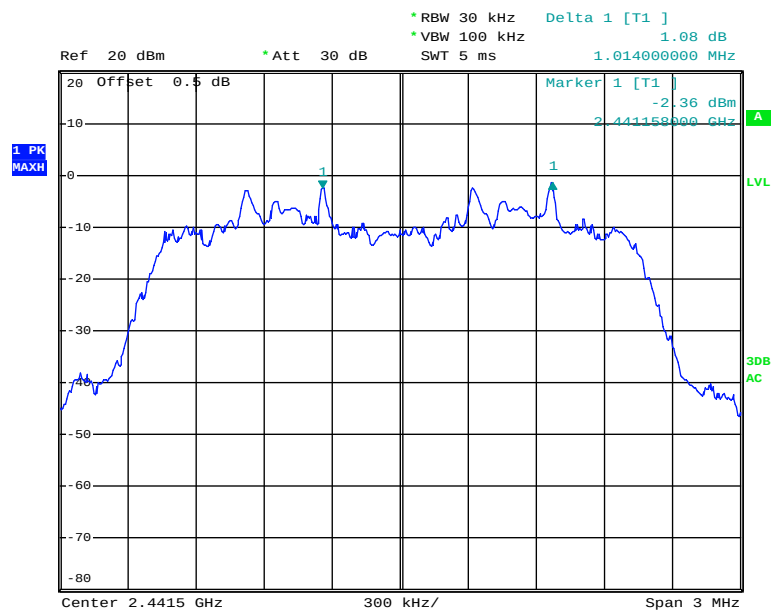


Date: 28.SEP.2020 13:35:05


High Channel

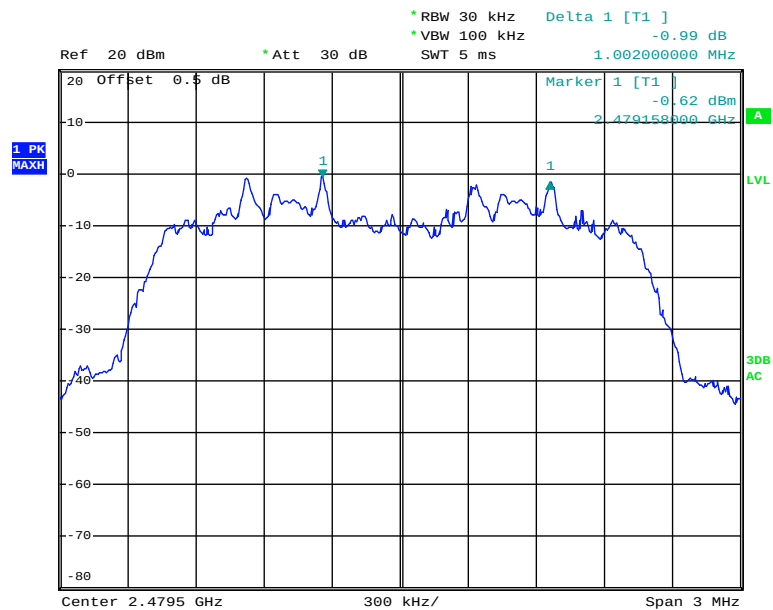

Date: 28.SEP.2020 13:36:10

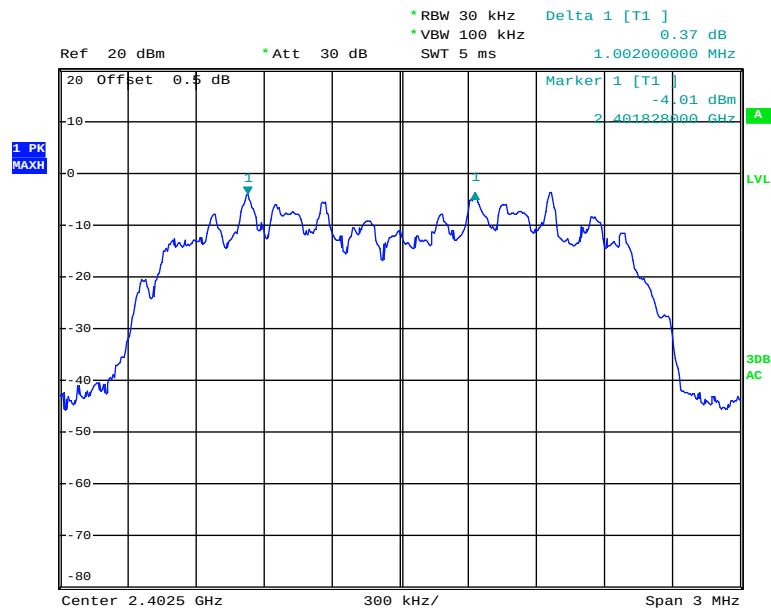
*EDR Mode (8DPSK):***Low Channel**

Date: 28.SEP.2020 13:32:32

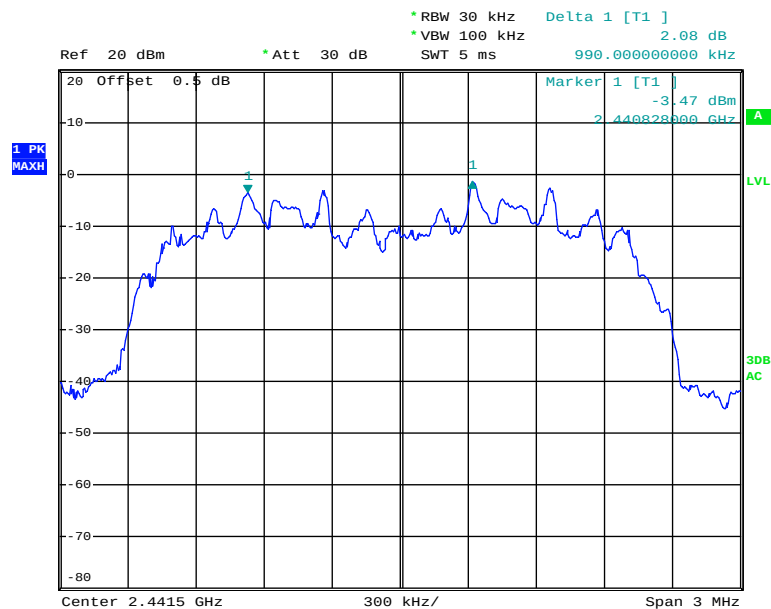Middle Channel

Date: 28.SEP.2020 13:31:36

High Channel

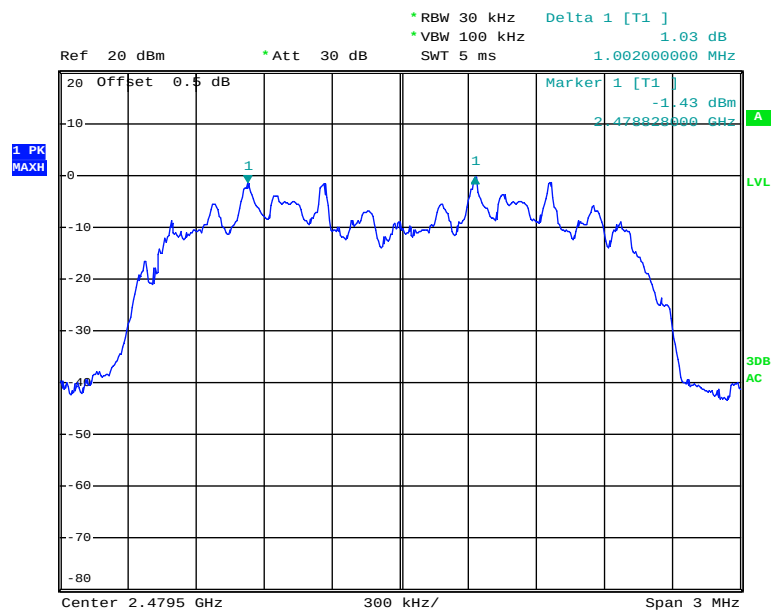

Date: 28.SEP.2020 13:30:39

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.2-26.6 °C
Relative Humidity:	51-54 %
ATM Pressure:	100.5-100.8Pa
Tester:	Billy Li
Test Date:	2020.09.28-2020.09.29

Test Result: Compliance. Please refer to following tables and plots

Test Mode: Transmitting

Radio 1:


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.888
	Middle	2441	0.884
	High	2480	0.884
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.284
	Middle	2441	1.284
	High	2480	1.284

Radio 2:

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.964
	Middle	2441	0.932
	High	2480	0.896
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.240
	Middle	2441	1.244
	High	2480	1.240
EDR Mode (8DPSK)	Low	2402	1.284
	Middle	2441	1.280
	High	2480	1.284


Radio 1:

BDR Mode (GFSK):

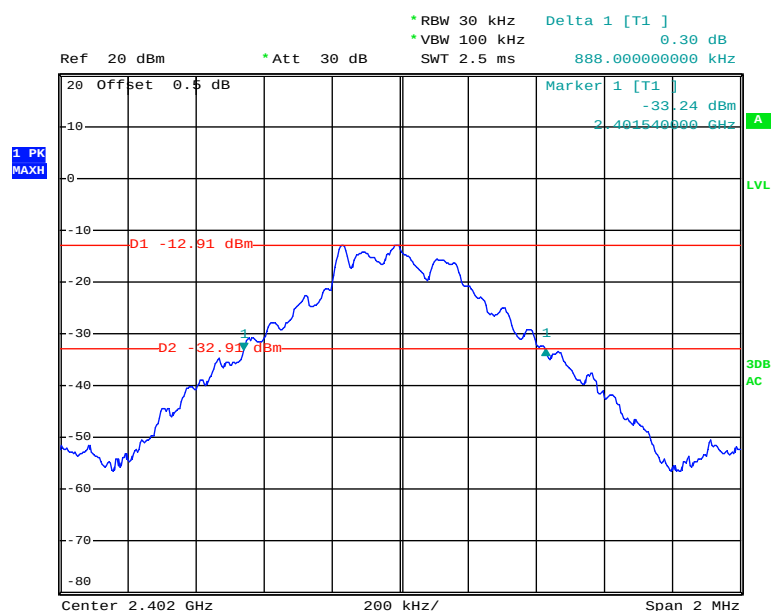Low Channel


Date: 29.SEP.2020 13:42:56

Middle Channel

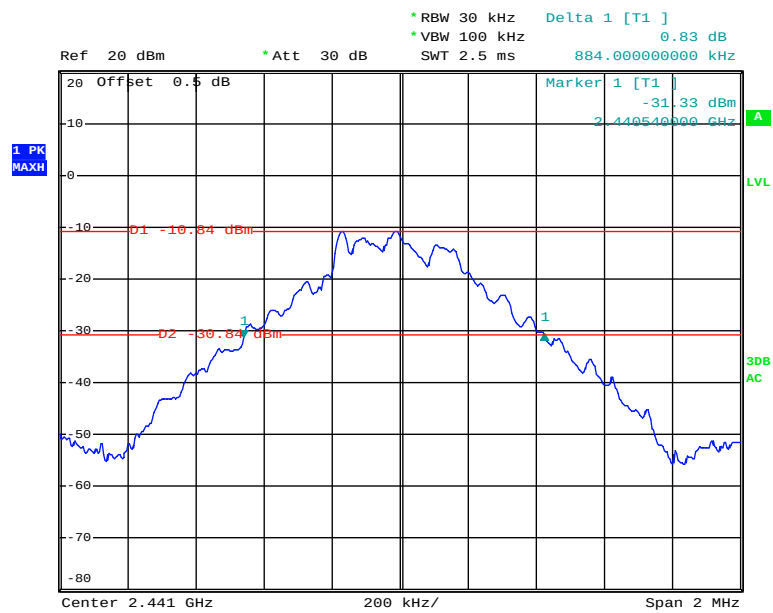

Date: 29.SEP.2020 13:44:23


High Channel

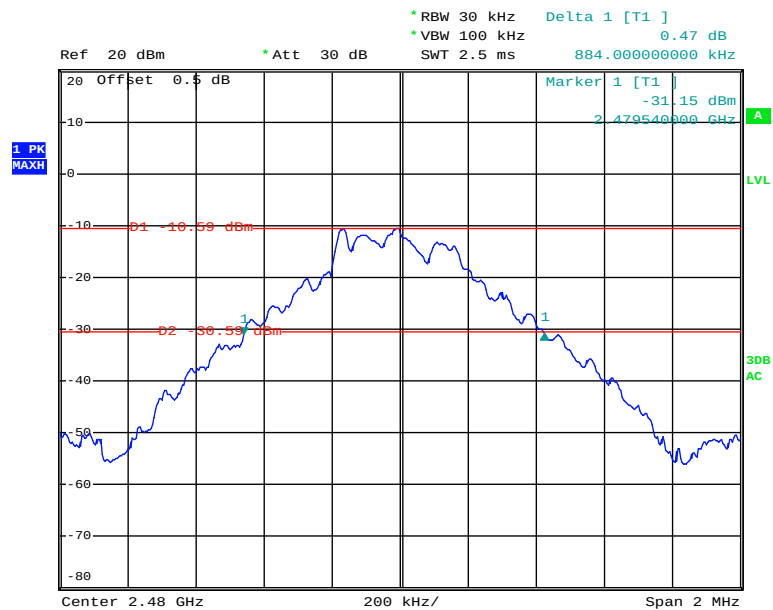

Date: 29.SEP.2020 13:45:17


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

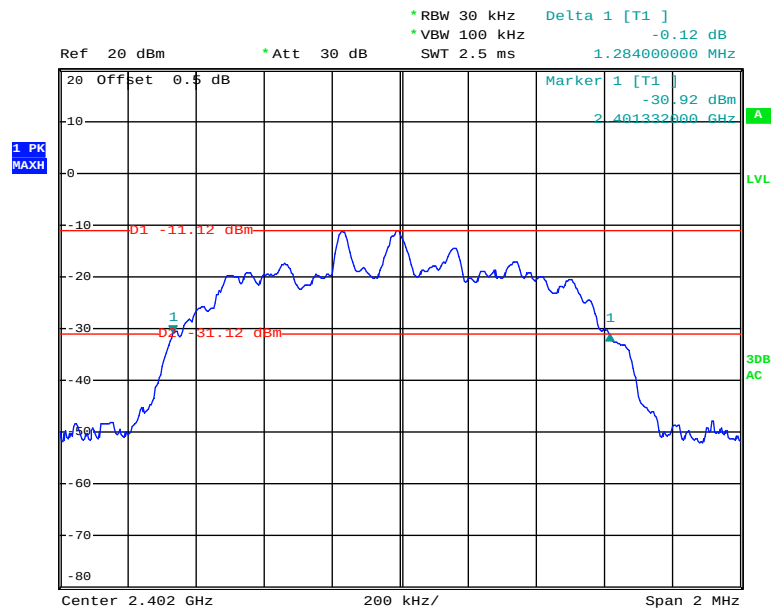


Date: 29.SEP.2020 13:46:37

Middle Channel

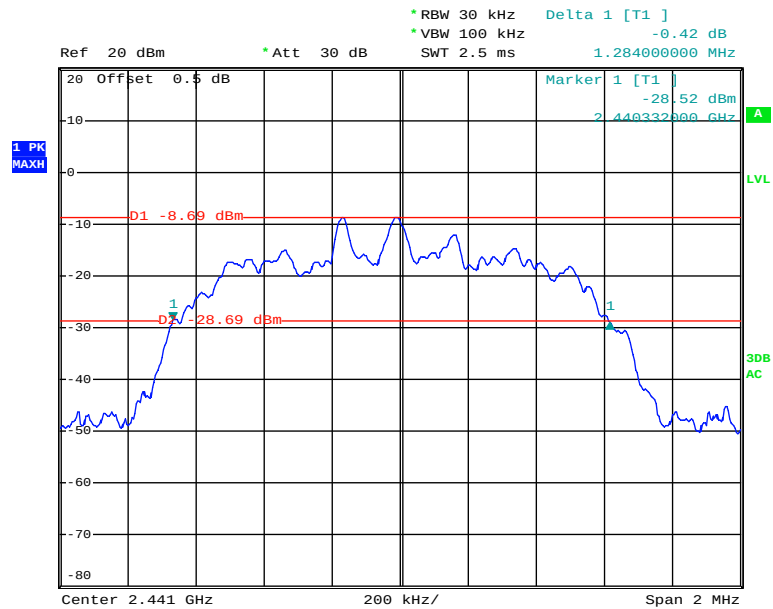

Date: 29.SEP.2020 14:08:15


High Channel

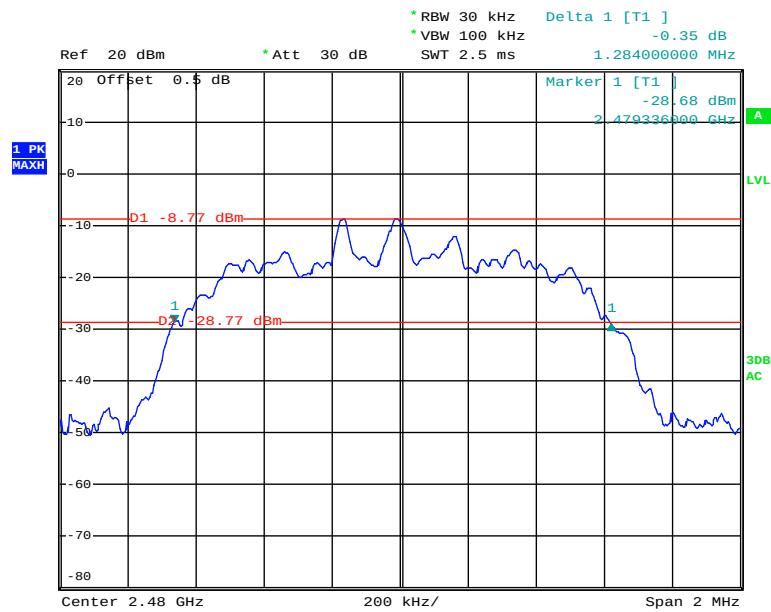


Date: 29.SEP.2020 14:09:49

Radio 2: BDR Mode (GFSK):


Low Channel

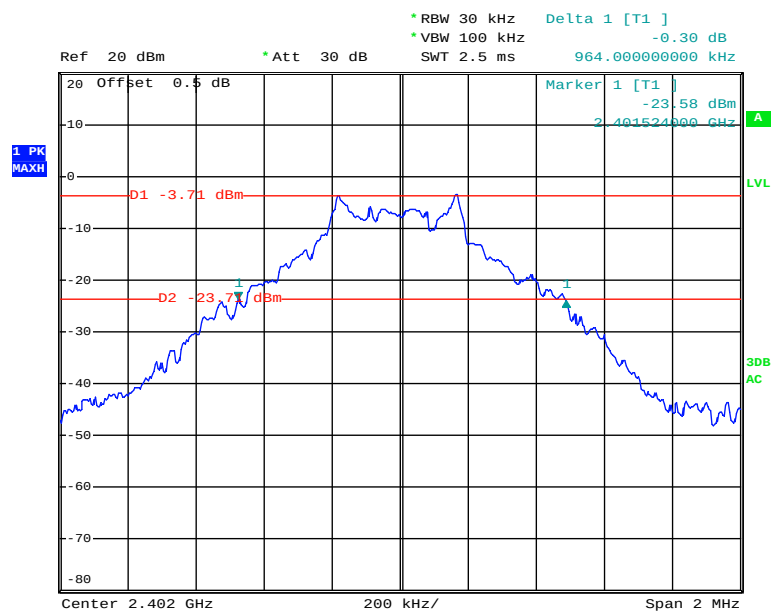


Date: 28.SEP.2020 13:17:28

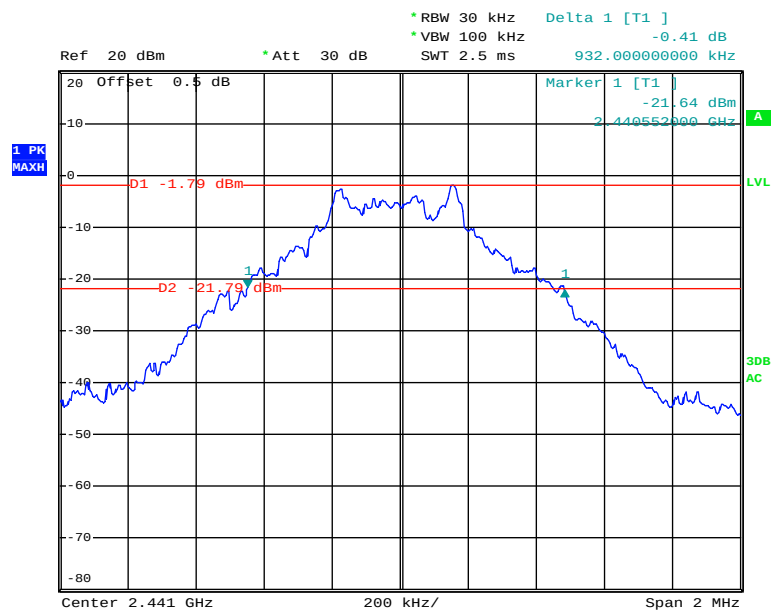Middle Channel


Date: 28.SEP.2020 13:19:11

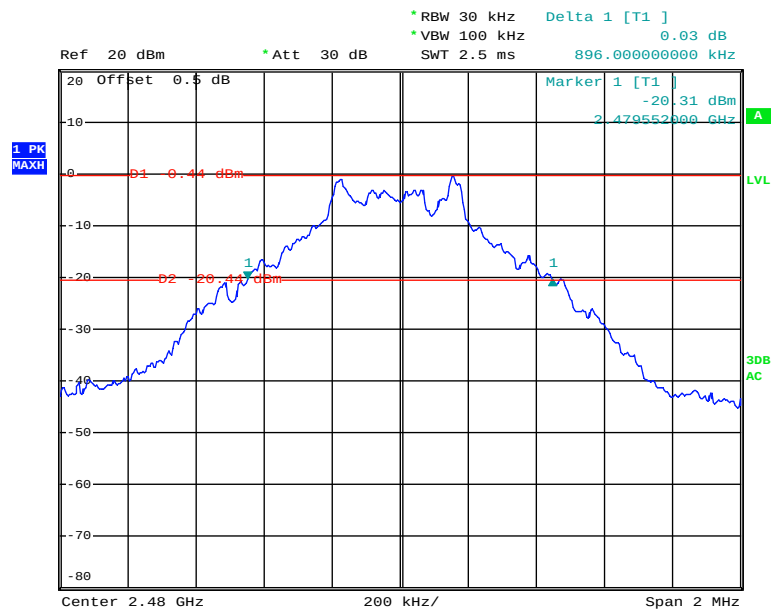High Channel


Date: 28.SEP.2020 13:20:16

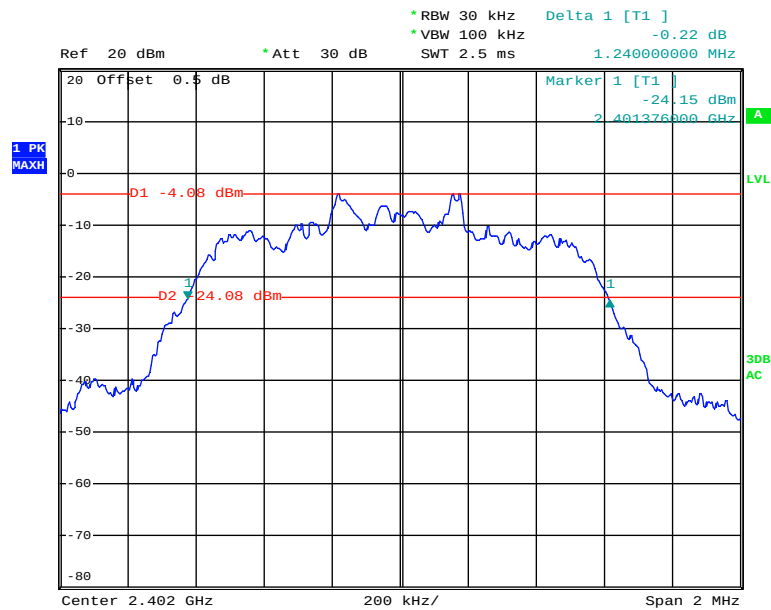*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**


Date: 28.SEP.2020 13:22:43

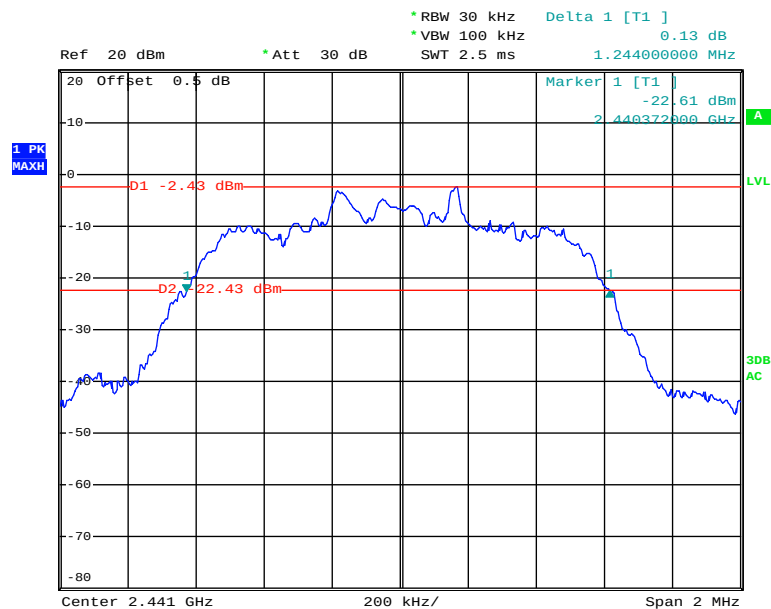Middle Channel

Date: 28.SEP.2020 13:24:02

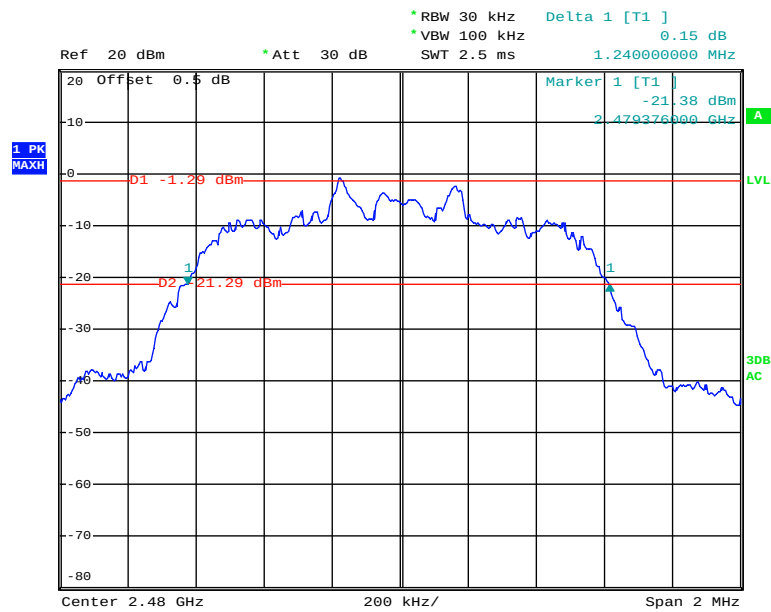
High Channel

Date: 28.SEP.2020 13:21:26

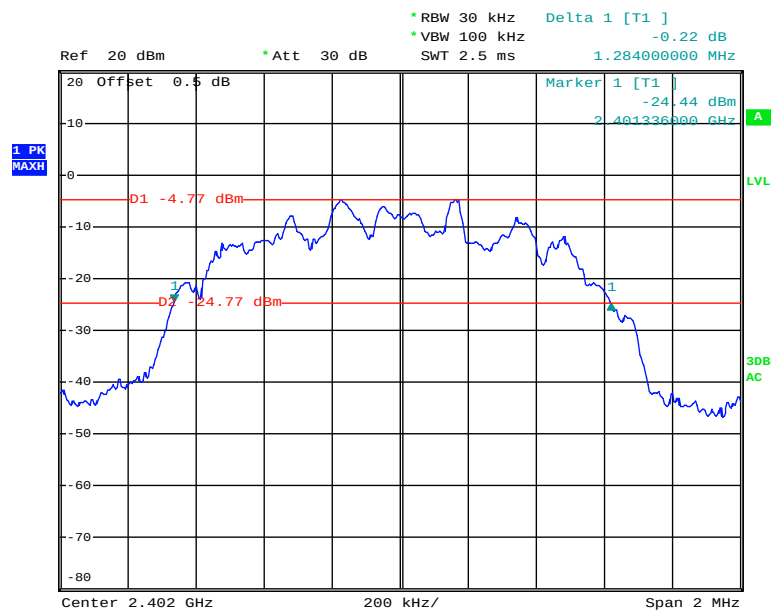*EDR Mode (8DPSK):***Low Channel**


Date: 28.SEP.2020 13:25:24

Middle Channel

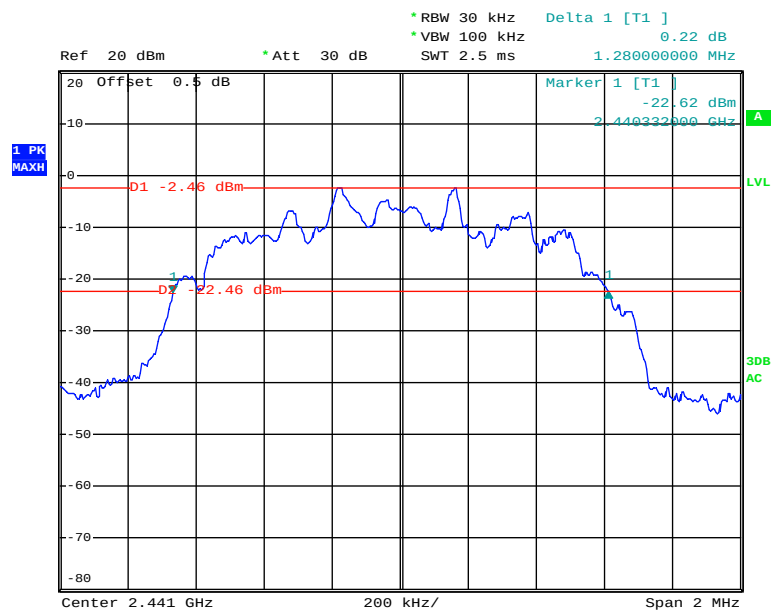

Date: 28.SEP.2020 13:26:49

High Channel

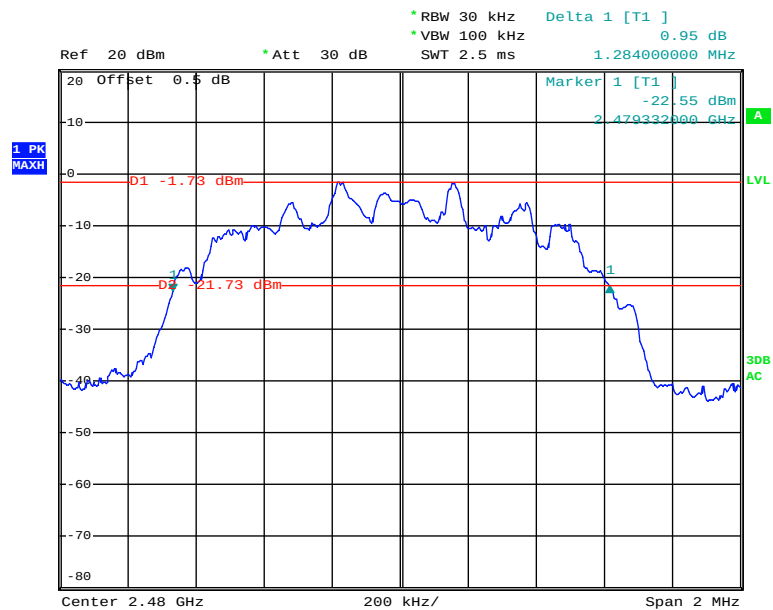

Date: 28.SEP.2020 13:27:46

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.2-26.6 °C
Relative Humidity:	51-54 %
ATM Pressure:	100.5-100.8Pa
Tester:	Billy Li
Test Date:	2020.09.28-2020.09.29

Test Result: Compliance. Please refer to following tables and plots

Test Mode: Transmitting


Radio 1:

Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15


Radio 2:

Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

Radio 1:

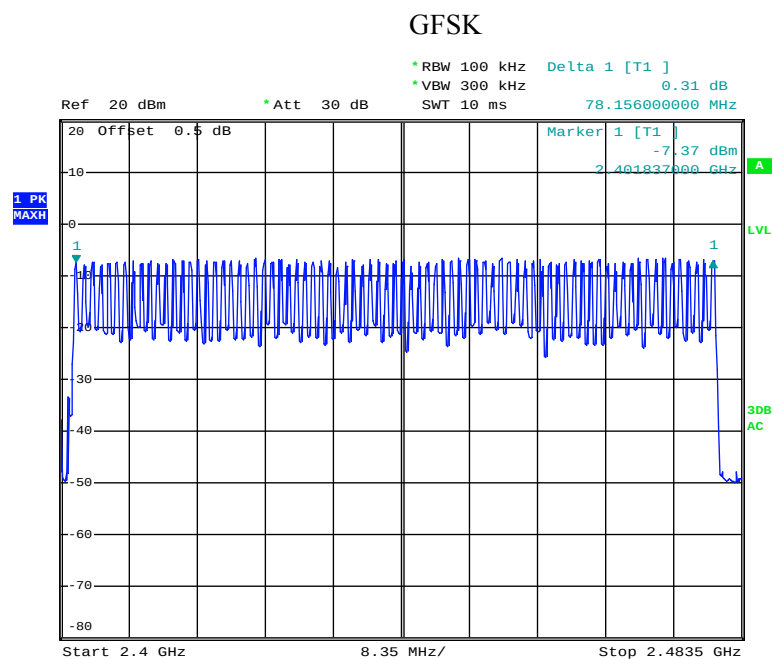


Date: 29.SEP.2020 14:28:41

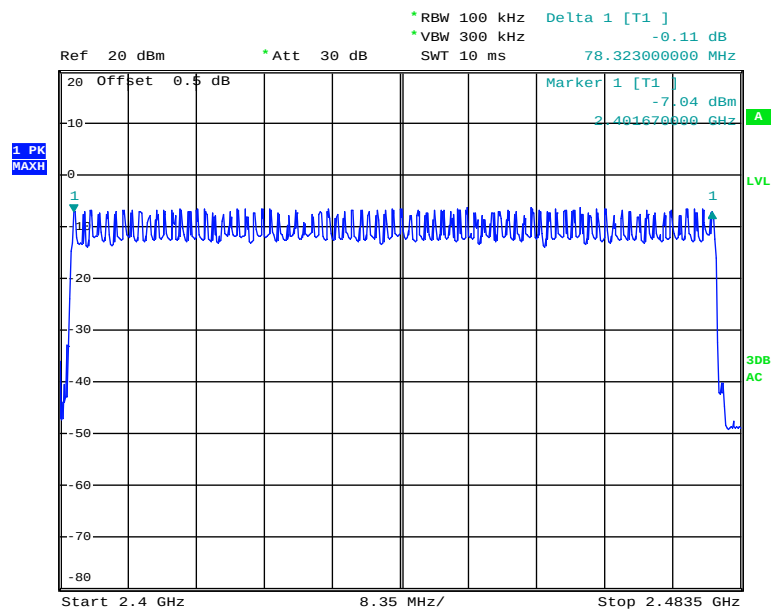$\pi/4$ -DQPSK


Date: 29.SEP.2020 14:32:24

Radio 2:

GFSK

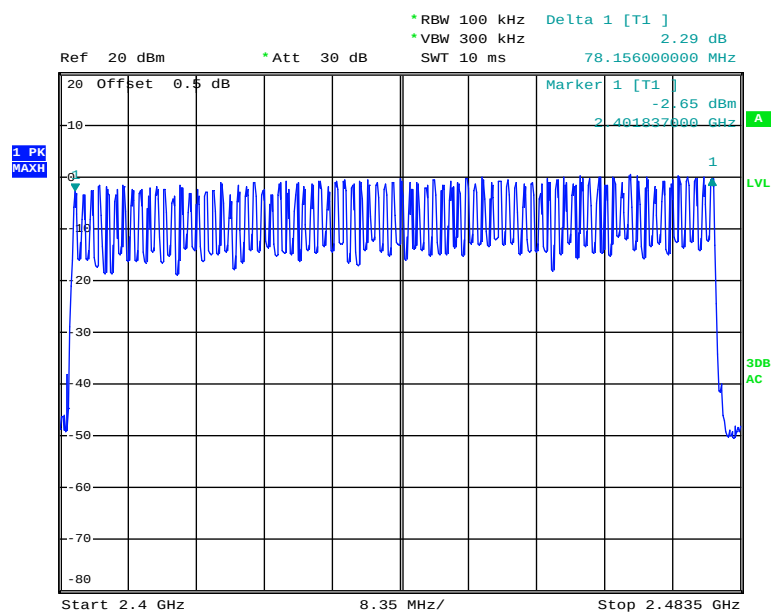


Date: 28.SEP.2020 13:43:45

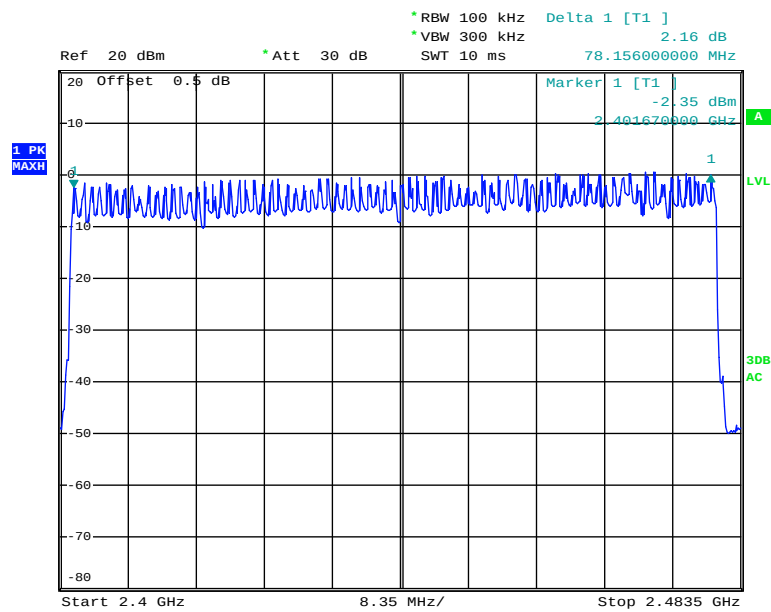$\pi/4$ -DQPSK

Date: 28.SEP.2020 14:06:04

8DPSK

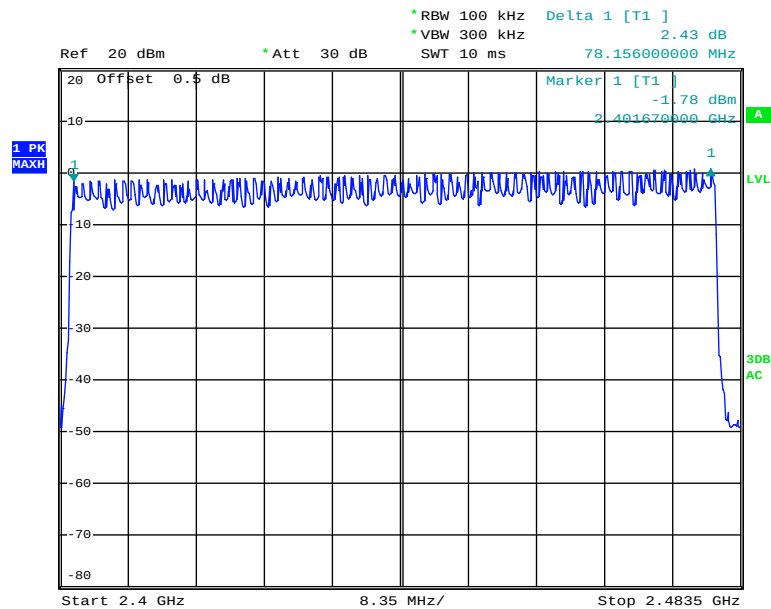

Date: 28.SEP.2020 14:01:44

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.2-26.6 °C
Relative Humidity:	51-54 %
ATM Pressure:	100.5-100.8Pa
Tester:	Billy Li
Test Date:	2020.09.28-2020.09.29

Test Result: Compliance. Please refer to following tables and plots

Test Mode: Transmitting

Radio 1:

Mode	Packet type	Channel	Frequency (MHz)	Puse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.450	0.144	0.4
	DH3	Middle	2441	1.716	0.275	
	DH5	Middle	2441	2.972	0.317	
$\pi/4$ -DQPSK	2DH1	Middle	2441	0.452	0.145	
	2DH3	Middle	2441	1.742	0.279	
	2DH5	Middle	2441	2.974	0.317	
Note: DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s						


Radio 2:

Mode	Packet type	Channel	Frequency (MHz)	Puse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.418	0.134	0.4
	DH3	Middle	2441	1.706	0.273	
	DH5	Middle	2441	2.938	0.313	
$\pi/4$ -DQPSK	2DH1	Middle	2441	0.434	0.139	
	2DH3	Middle	2441	1.711	0.274	
	2DH5	Middle	2441	2.975	0.317	
8DPSK	3DH1	Middle	2441	0.425	0.136	
	3DH3	Middle	2441	1.694	0.271	
	3DH5	Middle	2441	2.952	0.315	
Note: DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s						

Radio 1:


BDR Mode (GFSK):

DH1: Middle Channel

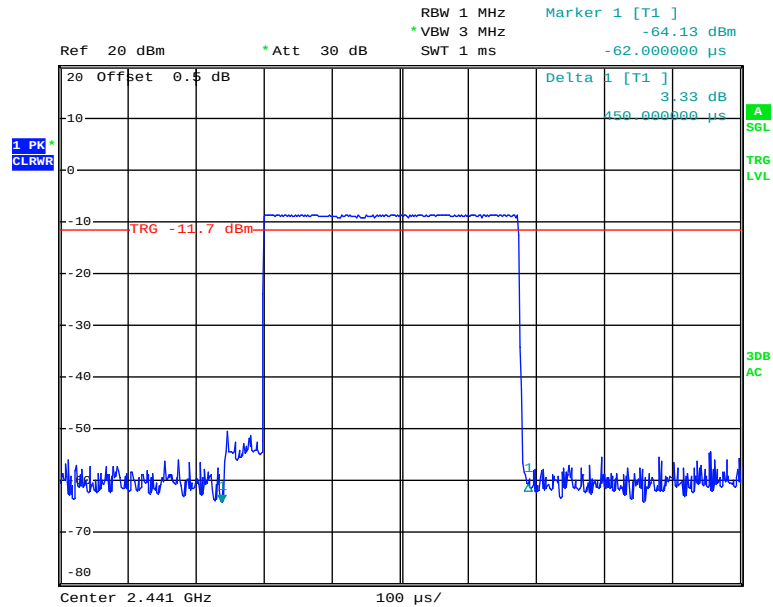


Date: 29.SEP.2020 14:58:52


DH3: Middle Channel

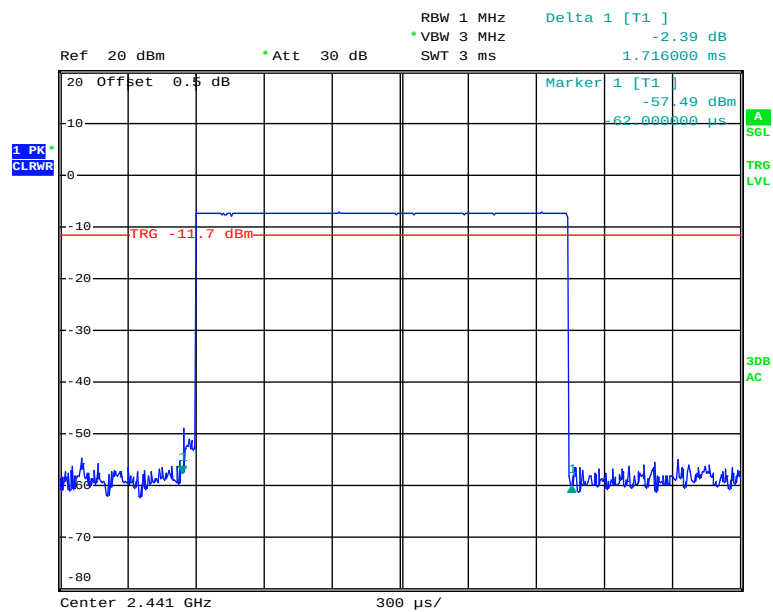

Date: 29.SEP.2020 15:00:16

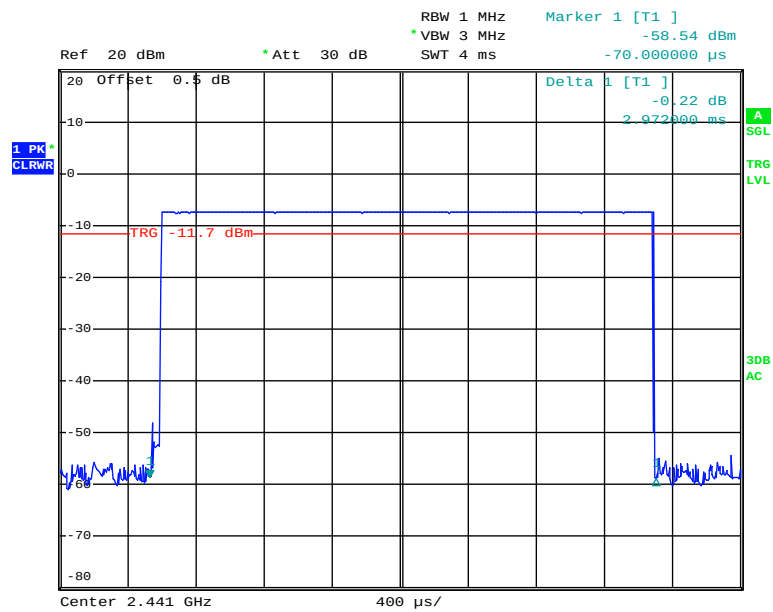
DH5: Middle Channel

Date: 29.SEP.2020 15:00:57

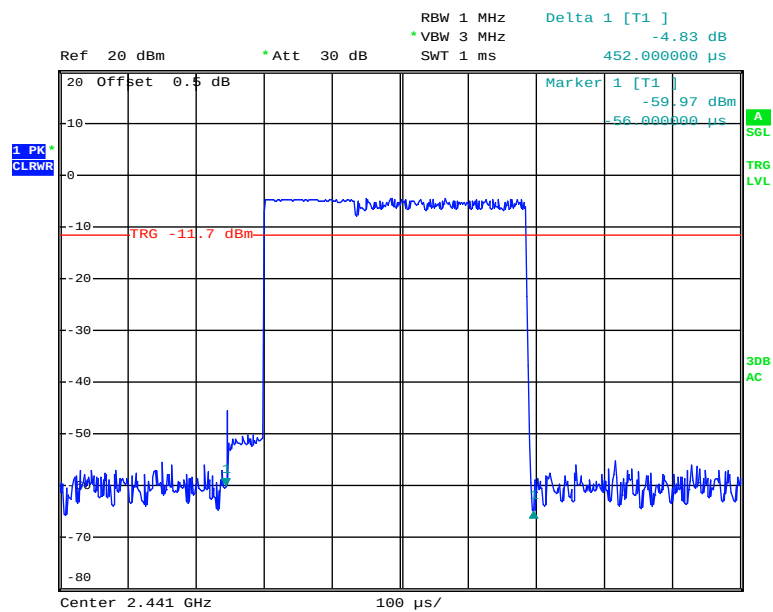*EDR Mode ($\pi/4$ -DQPSK):***2DH1: Middle Channel**


Date: 29.SEP.2020 15:02:09

2DH3: Middle Channel

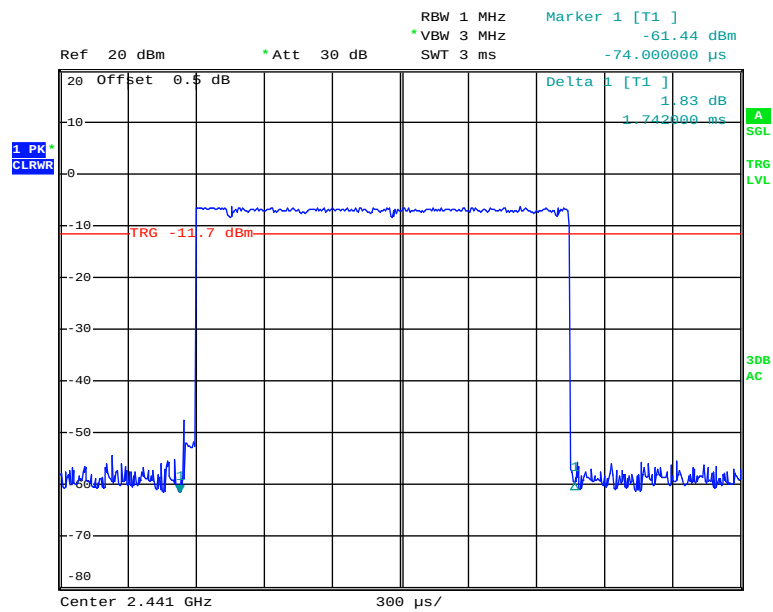


Date: 29.SEP.2020 15:54:34


2DH5: Middle Channel

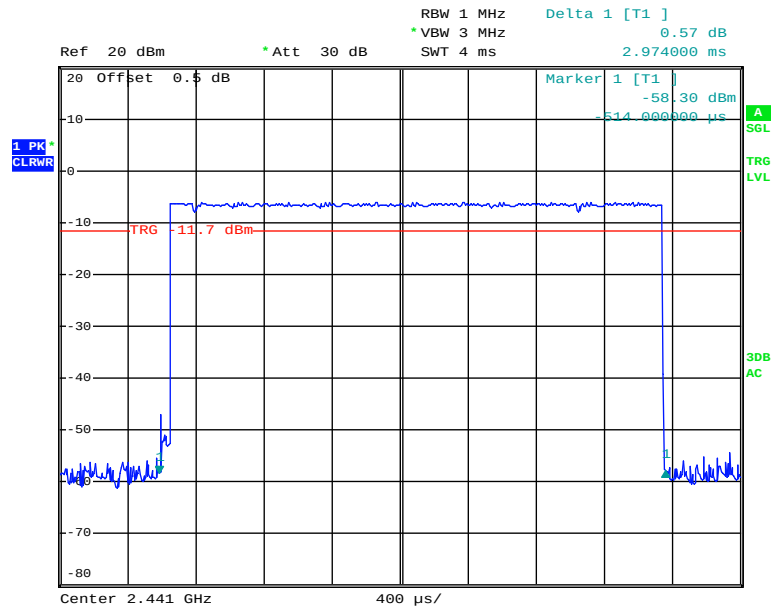


Date: 29.SEP.2020 15:56:51

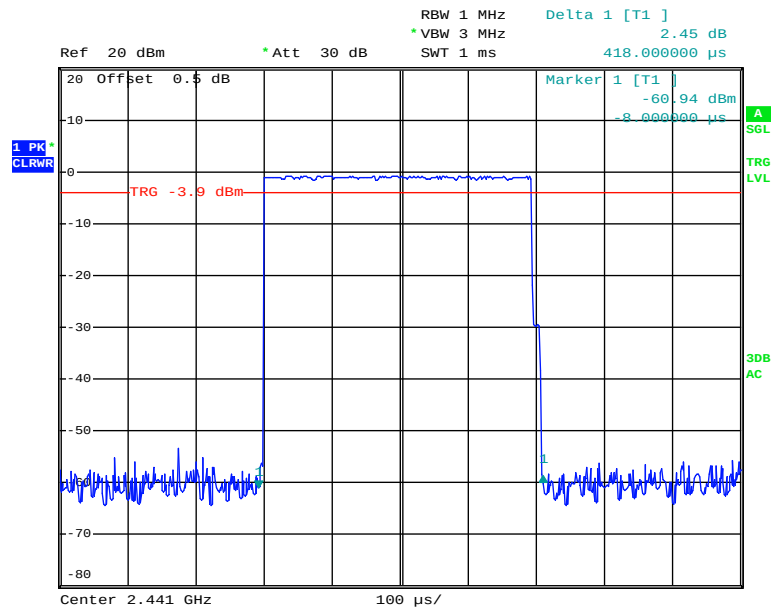Radio 2:*BDR Mode (GFSK):***DH1: Middle Channel**


Date: 28.SEP.2020 14:10:05

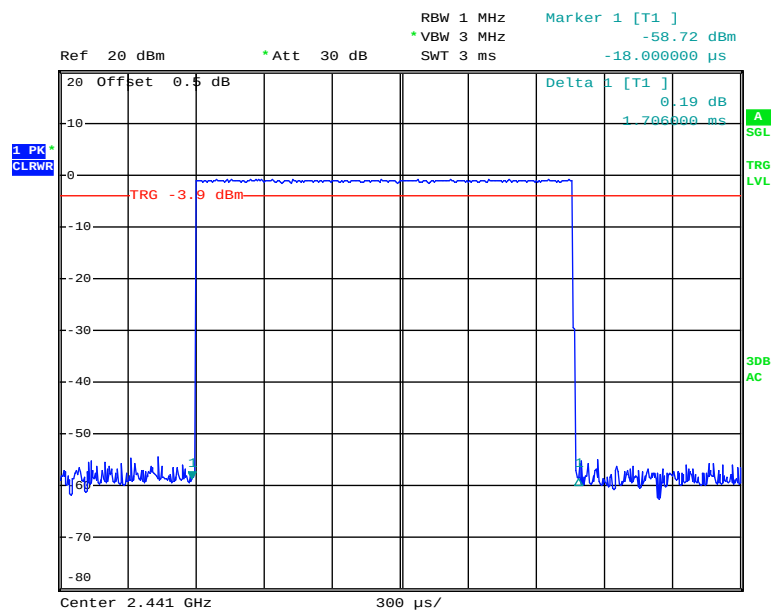DH3: Middle Channel

Date: 28.SEP.2020 14:11:49

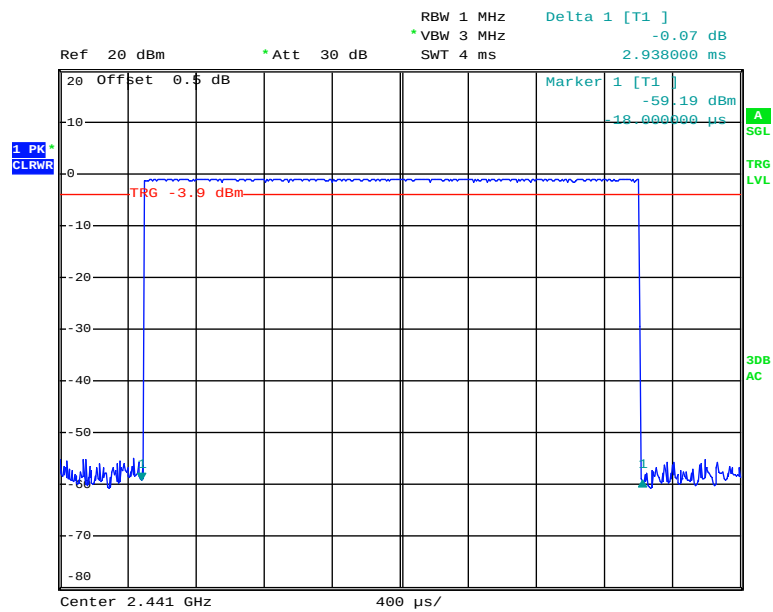
DH5: Middle Channel

Date: 28.SEP.2020 14:14:10

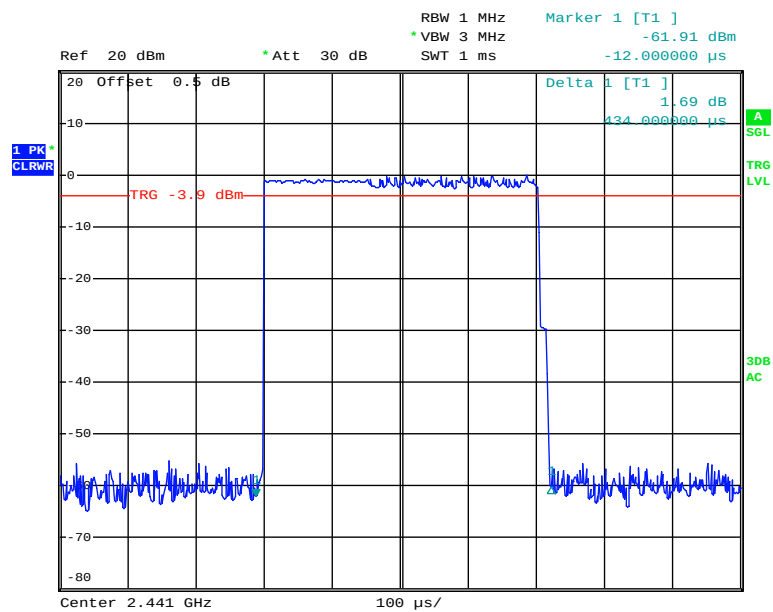*EDR Mode ($\pi/4$ -DQPSK):***2DH1: Middle Channel**


Date: 28.SEP.2020 14:15:11

2DH3: Middle Channel

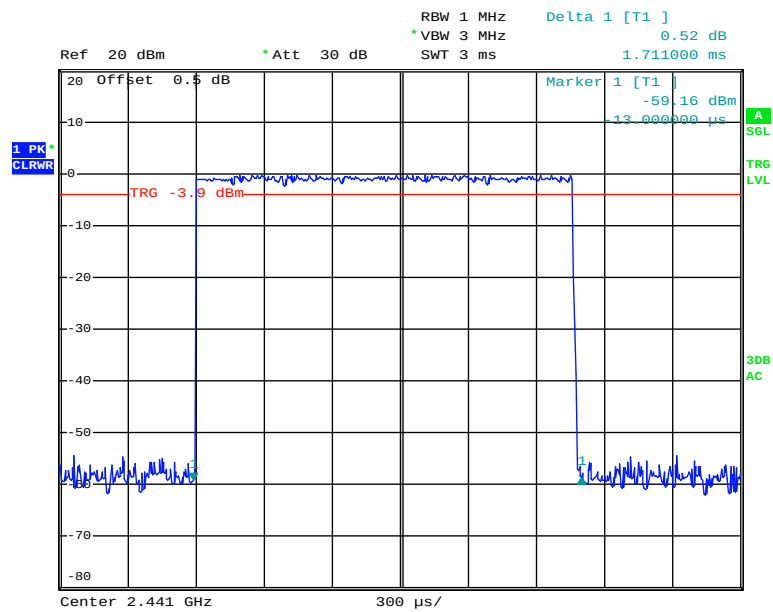


Date: 28.SEP.2020 14:17:34


2DH5: Middle Channel

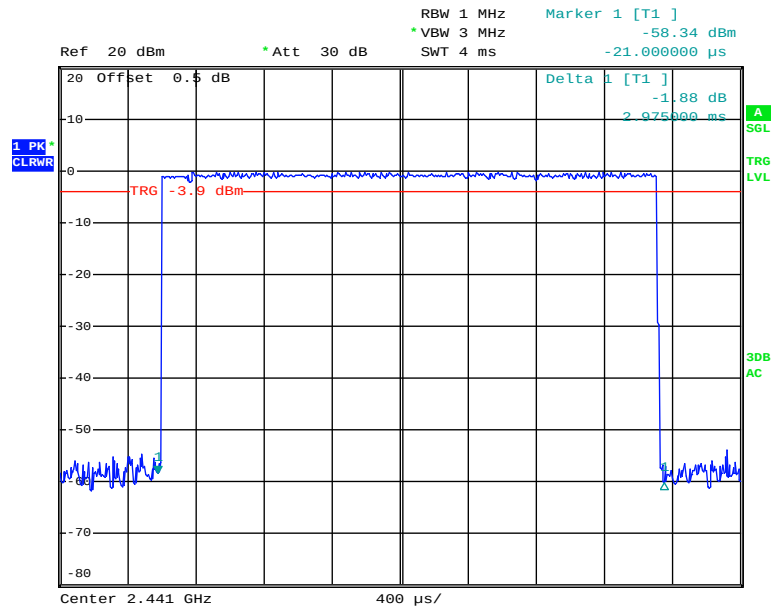

Date: 28.SEP.2020 14:18:24

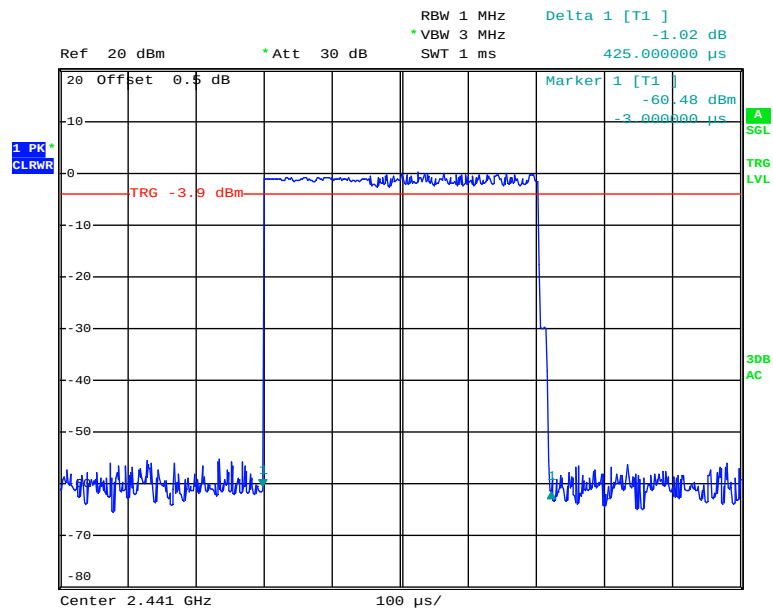
*EDR Mode (8DPSK):***3DH1: Middle Channel**

Date: 28.SEP.2020 14:20:00

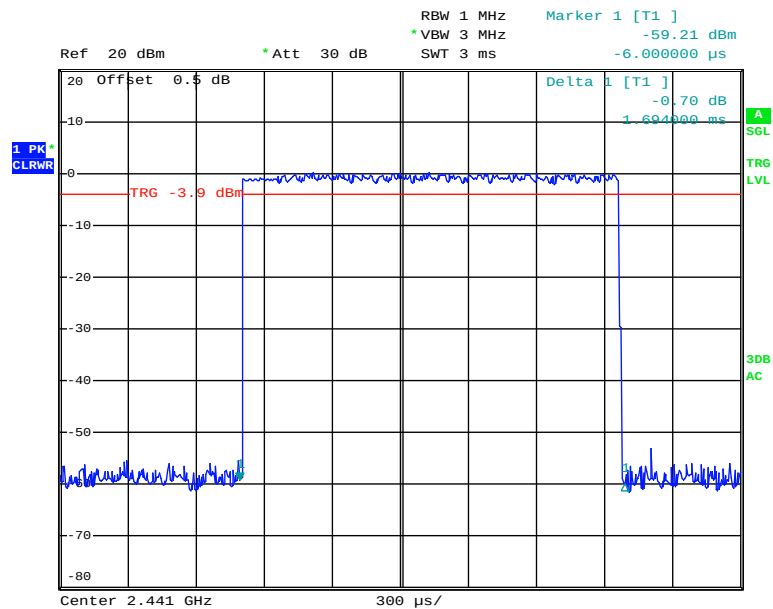3DH3: Middle Channel

Date: 28.SEP.2020 14:21:17

3DH5: Middle Channel

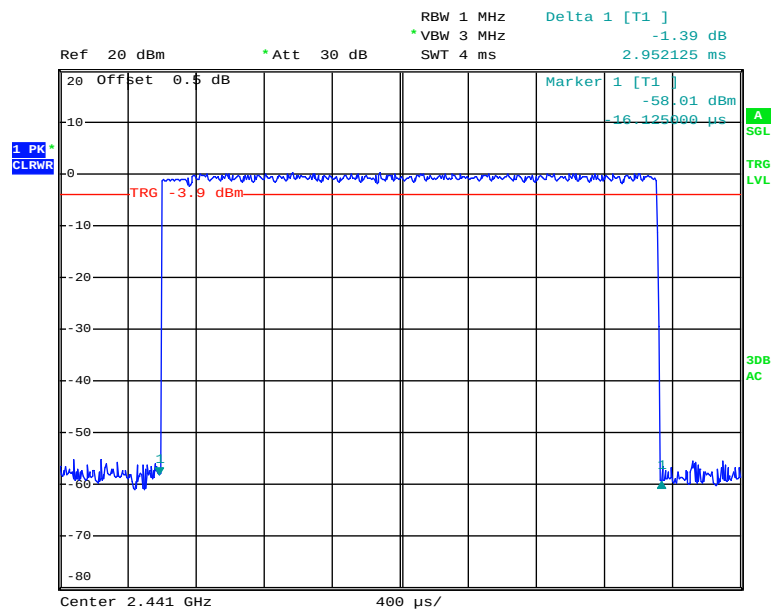

Date: 28.SEP.2020 14:22:06

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.2-26.6 °C
Relative Humidity:	51-54 %
ATM Pressure:	100.5-100.8Pa
Tester:	Billy Li
Test Date:	2020.09.28-2020.09.29

Test Result: Compliance.

*Test Mode: Transmitting***Radio 1:**

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	-2.97	21
	2441	-2.71	21
	2480	-2.56	21
EDR Mode ($\pi/4$ -DQPSK)	2402	-2.96	21
	2441	-2.68	21
	2480	-2.56	21

Radio 2:

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	3.93	21
	2441	3.82	21
	2480	3.48	21
EDR Mode ($\pi/4$ -DQPSK)	2402	3.84	21
	2441	3.81	21
	2480	3.52	21
EDR Mode (8DPSK)	2402	3.85	21
	2441	3.81	21
	2480	3.51	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/04	Each time	N/A


*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26.2-26.6 °C
Relative Humidity:	51-54 %
ATM Pressure:	100.5-100.8Pa
Tester:	Billy Li
Test Date:	2020.09.28-2020.09.29

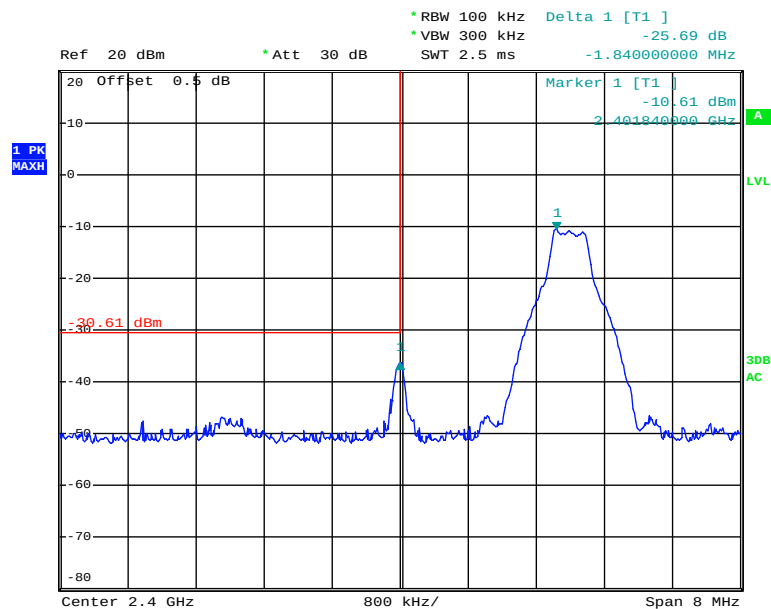Test Result: Compliance*Radio 1:**Single Channel:**BDR Mode (GFSK):***Band Edge, Left Side**


Date: 29.SEP.2020 13:43:30

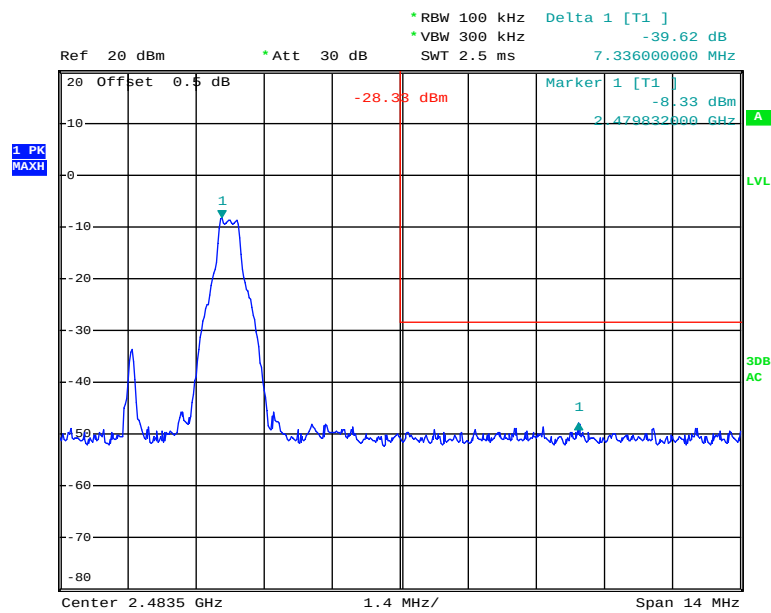Band Edge, Right Side

Date: 29.SEP.2020 13:45:46

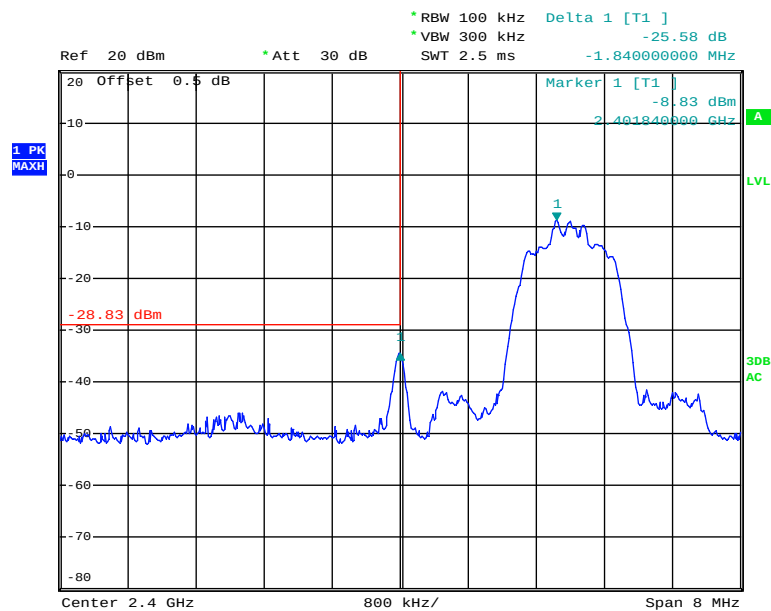
*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**

Date: 29.SEP.2020 13:47:14

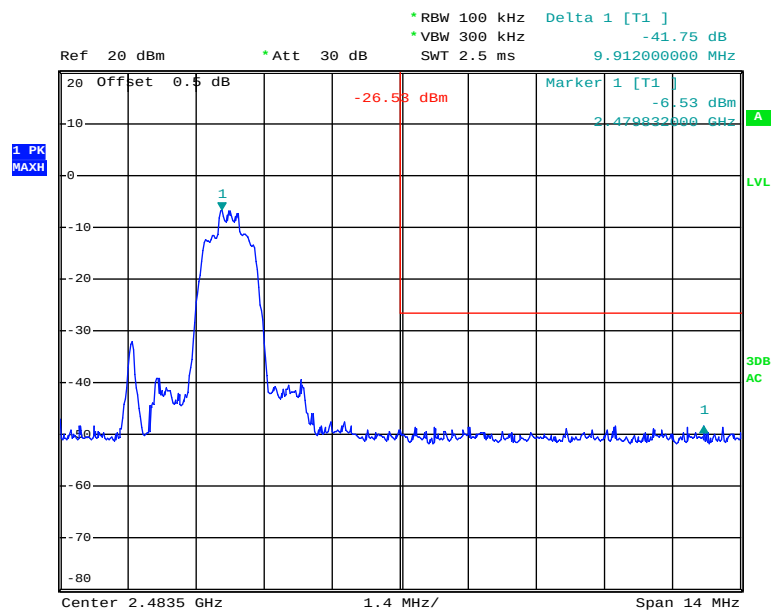
Band Edge, Right Side

Date: 29.SEP.2020 14:10:22


Hopping Mode
BDR Mode (GFSK):

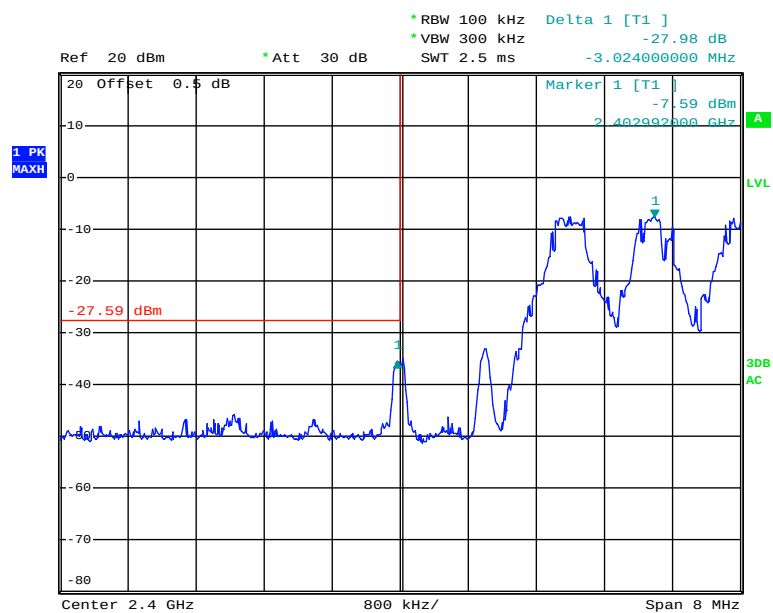Band Edge, Left Side

Date: 29.SEP.2020 14:19:01

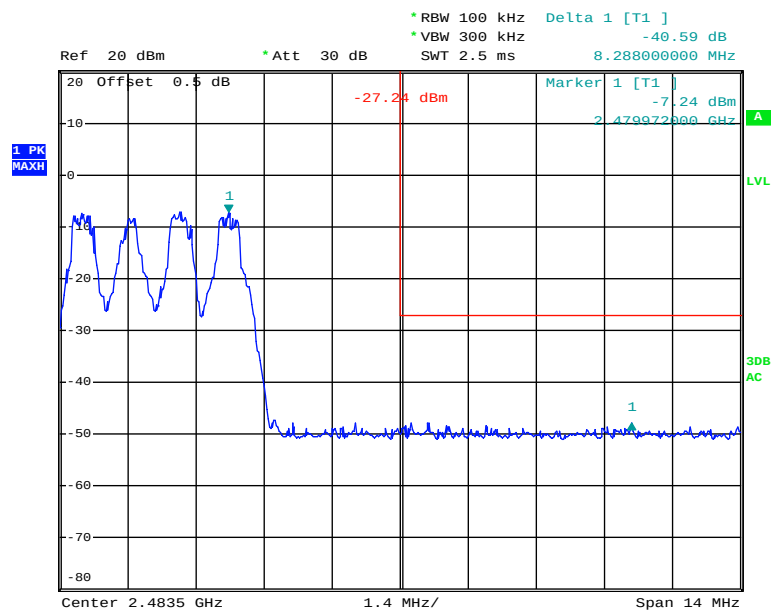
Band Edge, Right Side

Date: 29.SEP.2020 14:19:52

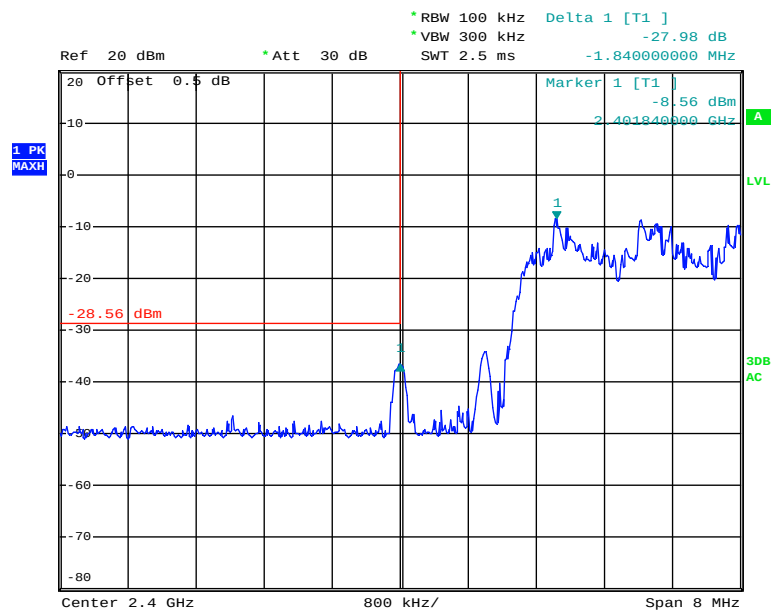*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**

Date: 29.SEP.2020 14:17:07


Band Edge, Right Side

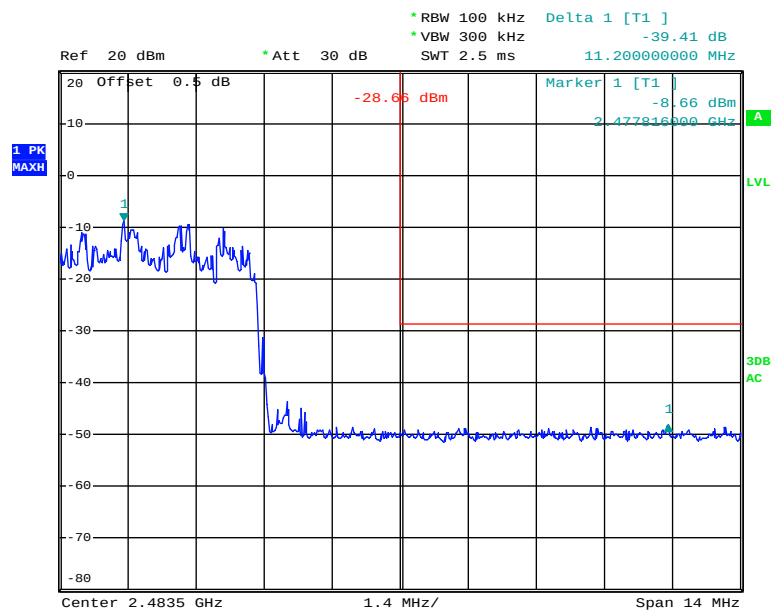


Date: 29.SEP.2020 14:15:31

Radio 2:
Single Mode:
BDR Mode (GFSK):


Band Edge, Left Side

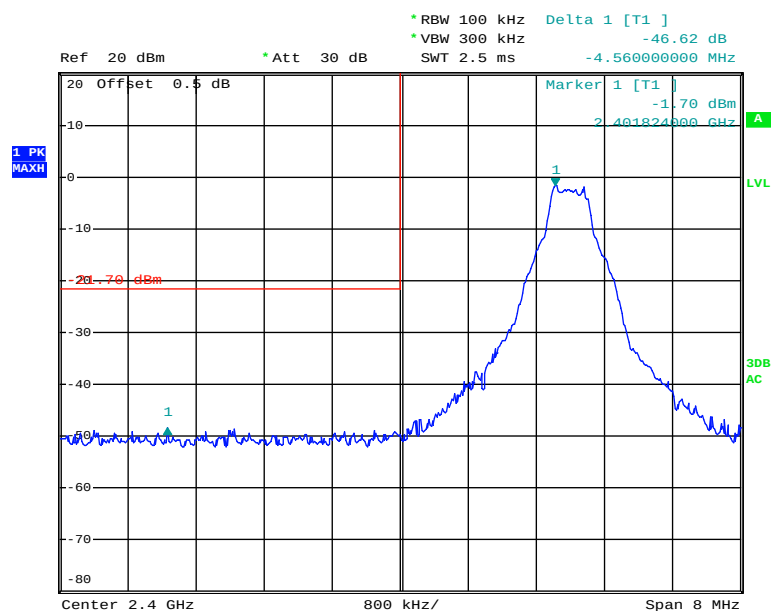

Date: 28.SEP.2020 13:18:01

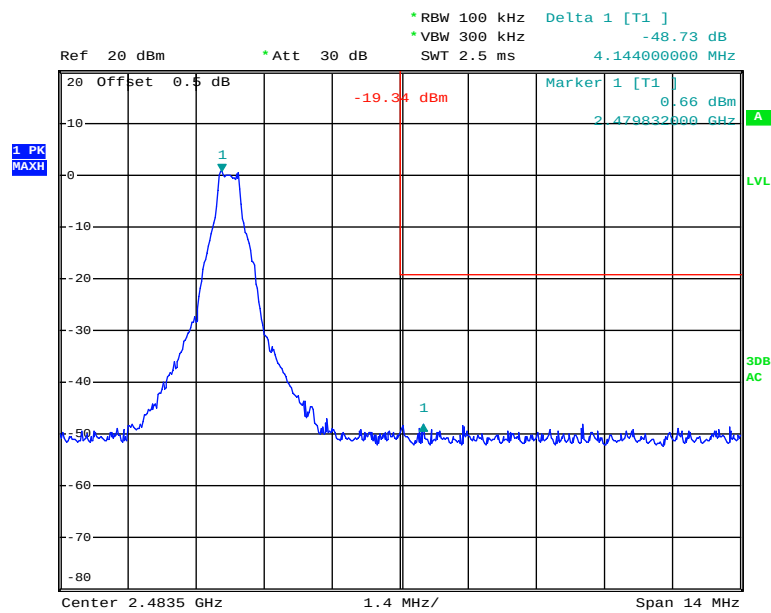
Band Edge, Right Side

Date: 28.SEP.2020 13:20:49

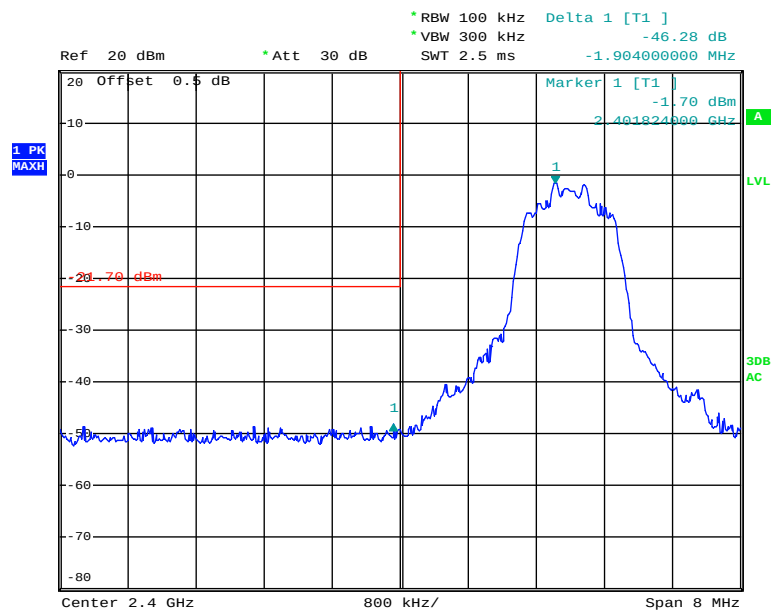*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**

Date: 28.SEP.2020 13:23:20


Band Edge, Right Side

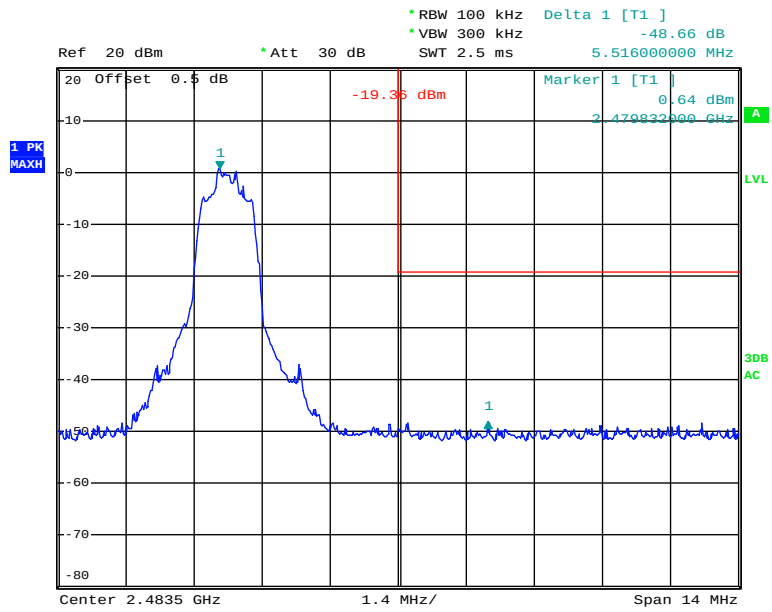

Date: 28.SEP.2020 13:22:03


EDR Mode (8DPSK):

Band Edge, Left Side

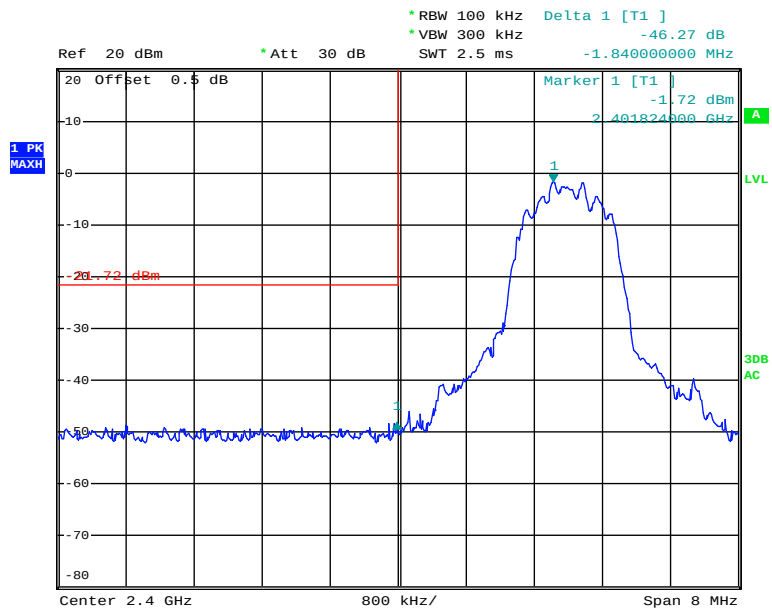

Date: 28.SEP.2020 13:26:05


Band Edge, Right Side

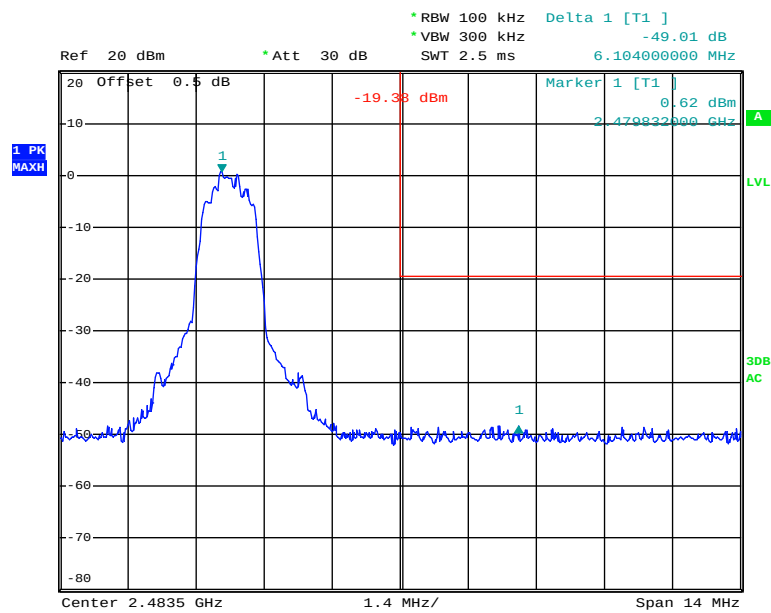

Date: 28.SEP.2020 13:28:19


Hopping Mode:
BDR Mode (GFSK):

Band Edge, Left Side

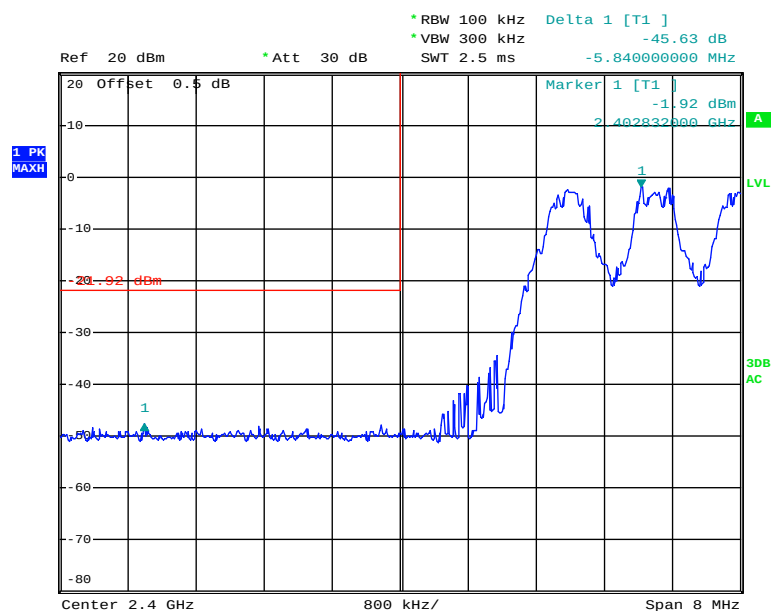

Date: 28.SEP.2020 13:42:32


Band Edge, Right Side

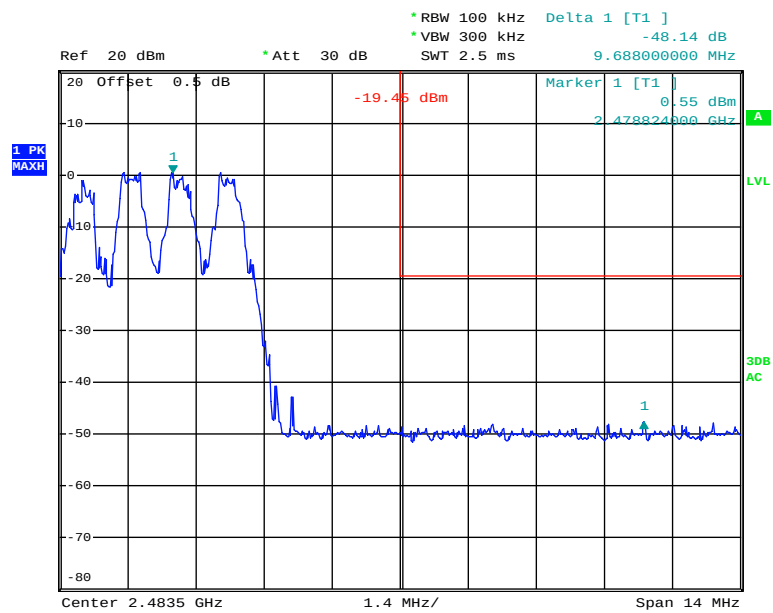


Date: 28.SEP.2020 13:51:04

EDR Mode ($\pi/4$ -DQPSK):


Band Edge, Left Side

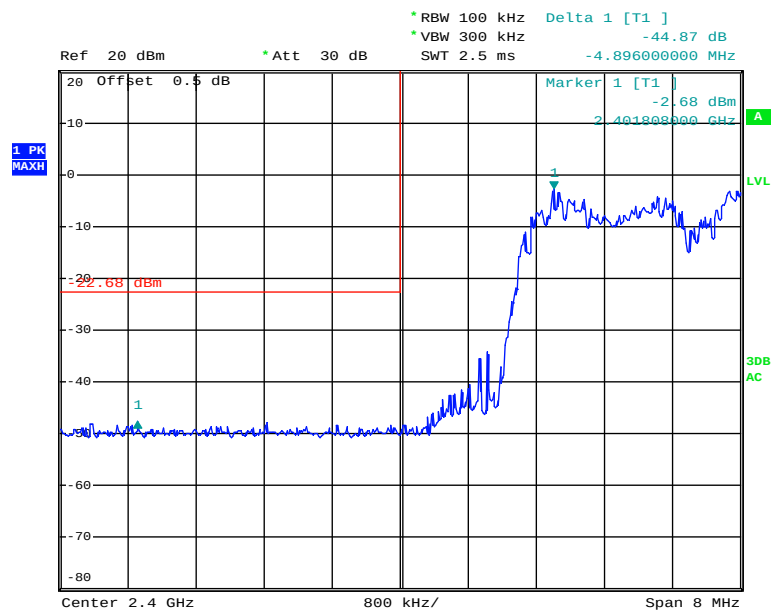

Date: 28.SEP.2020 13:53:35

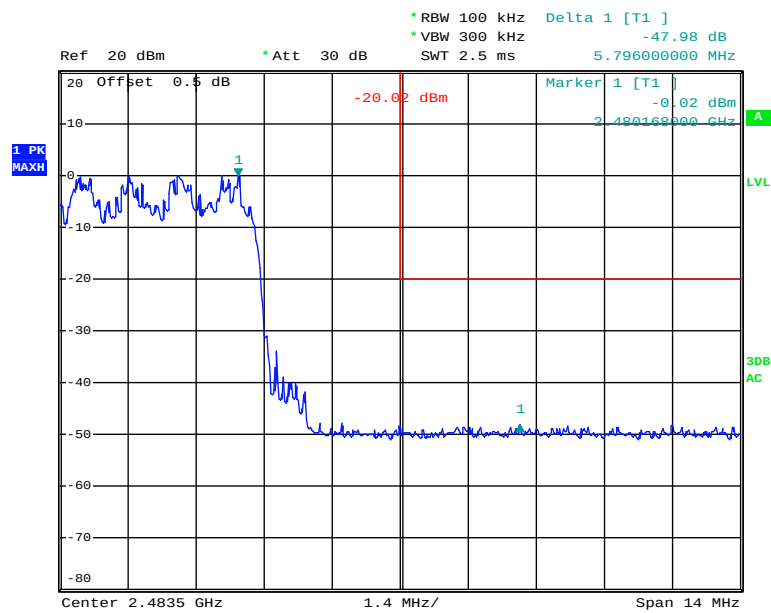
Band Edge, Right Side

Date: 28.SEP.2020 13:54:33

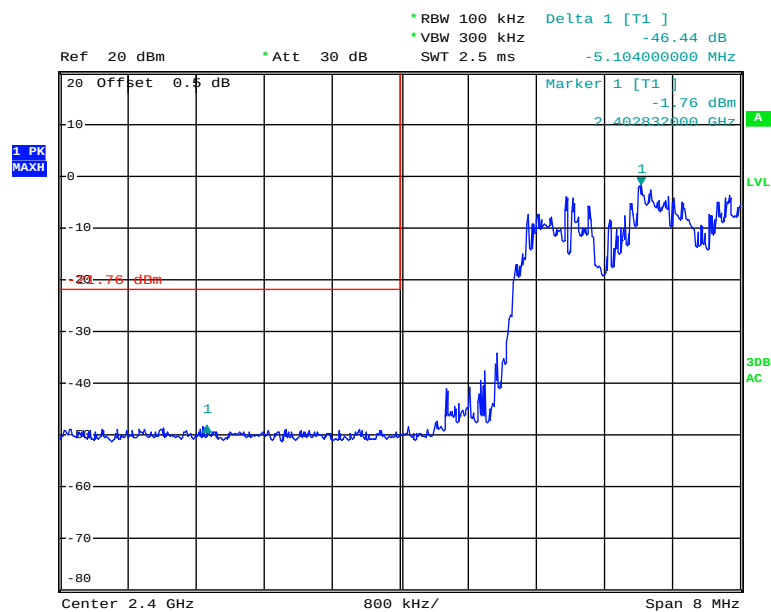*EDR Mode (8DPSK):***Band Edge, Left Side**

Date: 28.SEP.2020 13:56:22

Band Edge, Right Side

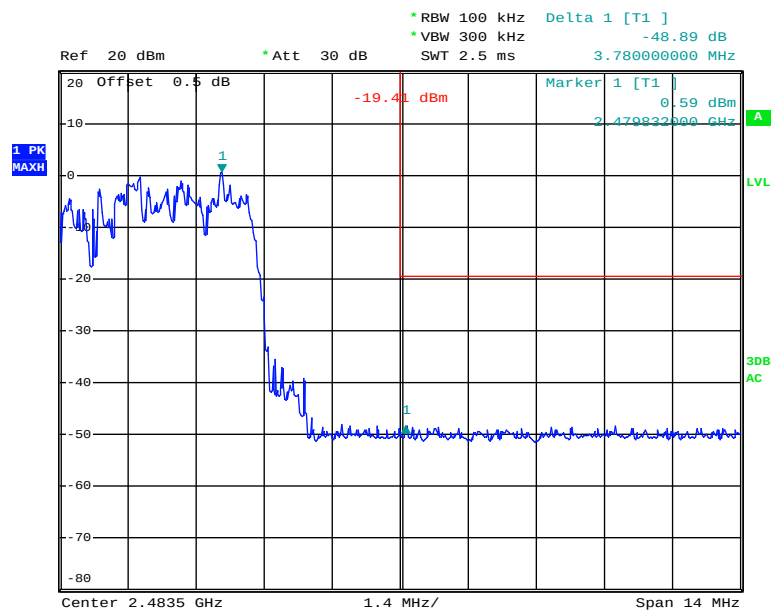

Date: 28.SEP.2020 13:55:31

**** END OF REPORT ****