

TEST REPORT

Applicant Name: VTech Telecommunications Ltd
Address: 23/F Tai Ping Ind Center Block 1 57 Ting Kok Rd Tai Po NT, Hong Kong
Report Number: SZ1240220-08465E-RF-00B
FCC ID: EW780-2142-00

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: DECT 6.0 cordless phone
Model No.: BL102-2
Multiple Model(s) No.: BL102, BL102-3, BL102-4, BL102-5, BL102-XY
Trade Mark: AT&T
Date Received: 2024/03/12
Issue Date: 2024/04/23

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

April Zhang

April Zhang
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	6
MEASUREMENT UNCERTAINTY	7
TEST FACILITY	7
SYSTEM TEST CONFIGURATION	8
DESCRIPTION OF TEST CONFIGURATION	8
EUT EXERCISE SOFTWARE	8
SPECIAL ACCESSORIES	8
EQUIPMENT MODIFICATIONS	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC §1.1307(B) & §2.1091 – RF EXPOSURE EVALUATION.....	13
APPLICABLE STANDARD	13
RESULT	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
FACTOR & OVER LIMIT CALCULATION.....	17
TEST DATA	17
FCC §15.205, §15.209 & §15.247(D) - RADIATED EMISSIONS.....	30
APPLICABLE STANDARD	30
EUT SETUP	30
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	31
TEST PROCEDURE	31
FACTOR & OVER LIMIT/MARGIN CALCULATION	32
TEST DATA	32
FCC §15.247(A) (1) - CHANNEL SEPARATION TEST	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56

FCC §15.247(A) (1) - 20 DB EMISSION BANDWIDTH.....	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST DATA	62
FCC §15.247(A) (1) (III) - QUANTITY OF HOPPING CHANNEL TEST.....	67
APPLICABLE STANDARD	67
TEST PROCEDURE	67
TEST DATA	67
FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	69
APPLICABLE STANDARD	69
TEST PROCEDURE	69
TEST DATA	70
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	74
APPLICABLE STANDARD	74
TEST PROCEDURE	74
TEST DATA	74
FCC §15.247(D) § 5.5 - BAND EDGES TESTING.....	79
APPLICABLE STANDARD	79
TEST PROCEDURE	79
TEST DATA	80
EUT PHOTOGRAPHS.....	87
TEST SETUP PHOTOGRAPHS	88

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ1240220-08465E-RF-00B	Original Report	2024/04/23

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	DECT 6.0 cordless phone
Tested Model	BL102-2
Multiple Model(s)	BL102, BL102-3, BL102-4, BL102-5, BL102-XY
Frequency Range	Bluetooth: 2402-2480MHz
Transmit Peak Power	6.58dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification [#]	-1.0dBi (provided by the applicant)
Voltage Range	DC 6V from adapter
Sample serial number	2HSY-1 for AC Conducted Emissions and Radiated Emission Test 2HSY-6 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter 1 Model: A318-060040W-US1 Input: AC 100-120V, 50-60Hz, 0.15A Output: DC 6.0V, 0.4A Adapter 2 Model: VT05UUS06040 Input: AC 100-120V, 60Hz, 0.15A Output: DC 6.0V, 0.4A Adapter 3 Model: VT04UUS06040 Input: AC 100-120V, 60Hz, 0.15A Output: DC 6.0V, 0.4A Adapter 4 Model: E004-1A060040VU Input: AC 100-120V, 50/60Hz, 0.1A Output: DC 6.0V, 0.4A Adapter 5 Model: DSA-3PFM-05 BUS 060040 Input: AC 100-120V, 50/60Hz, 0.15A Output: DC 6.0V, 0.4A, 2.4W Adapter 6 Model: GQ06-060040-ZU Input: AC 100-120V, 50/60Hz, 0.15A Output: DC 6.0V, 0.4A
Note: The Multiple models are electrically identical with the test model except for Color, Model number, Package type and the number of Handset and Charger. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.207, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.94dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
2	2404	42	2444
...	...	...	...
...	...	...	...
36	2438	75	2477
37	2439	76	2478
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

For the AC line conducted emission and Radiated spurious emission below 1GHz, Maximum output power mode: $\pi/4$ -DQPSK mode High channel was used for test. For the Radiated spurious emission above 1GHz, maximum output power mode: $\pi/4$ -DQPSK was used for test.

EUT Exercise Software

“Unitool 4v91”[#] exercise software was used and the power level is Default [#]. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-detachable DC Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission

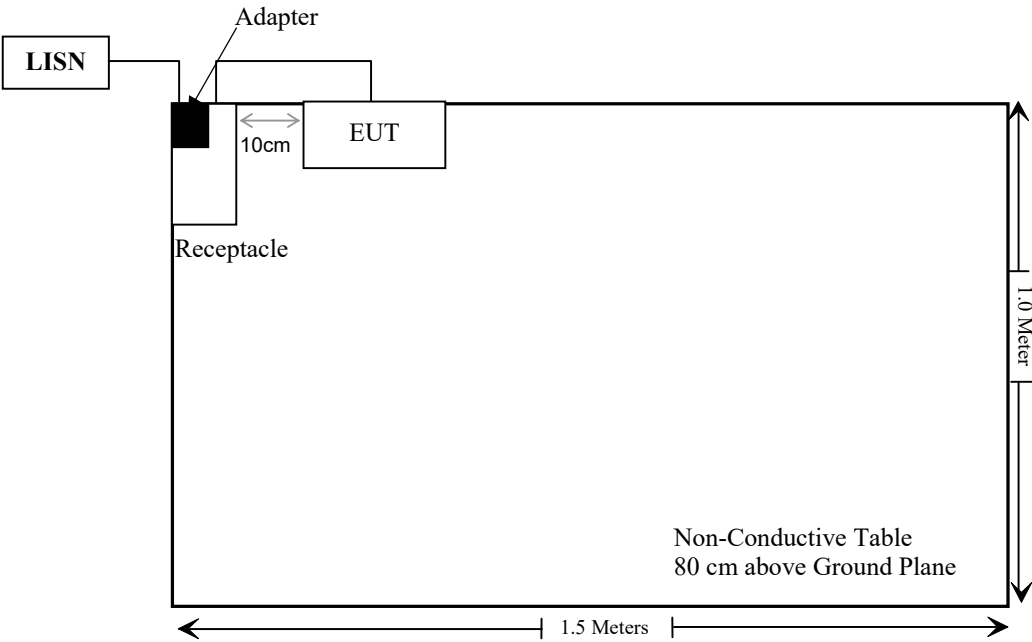

For Radiated Emissions:

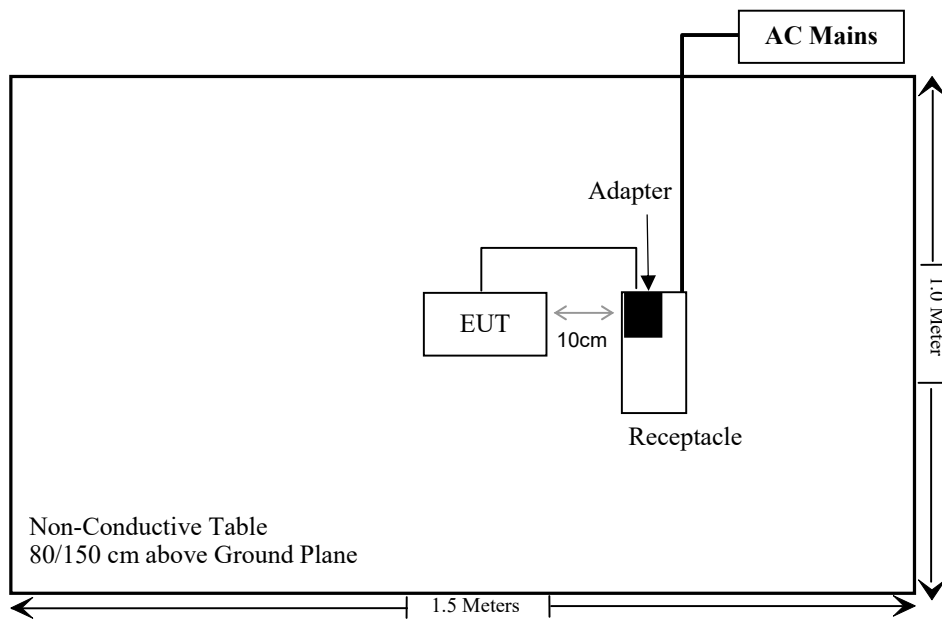

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
§1.1310 & §2.1091	RF Exposure Evaluation	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Emissions	Compliant
FCC §15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.247(a)(1)	Channel Separation Test	Compliant
FCC §15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
FCC §15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
FCC §15.247(b)(1)	Peak Output Power Measurement	Compliant
FCC §15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
ETS	Passive Loop Antenna	6512	29604	2023/07/07	2024/07/06
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2023/04/18	2024/04/17
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2024/07/25
A.H.System	Horn Antenna	SAS-200/571	135	2021/07/14	2024/07/13
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
SNSD	2.4G Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2023/08/03	2024/08/02
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/03	2024/08/02
Electro-Mechanics Co	Horn Antenna	3116	2026	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
RF Conducted Test					
R&S	SPECTRUM ANALYZER	FSU26	200120	2024/01/08	2025/01/07
Unknown	10dB Attenuator	Unknown	F-03-EM122	2023/07/04	2024/07/03
Micro-Tronics	RF Cable	8082176	W6102	2023/07/04	2024/07/03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1091 – RF EXPOSURE EVALUATION

Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

f = frequency in MHz;

R = minimum separation distance from the body of a nearby person (appropriate units, e.g., m);

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power [#]	Antenna Gain [#]		ERP		Evaluation Distance (m)	MPE-Based Exemption Threshold (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
DECT	1921.536- 1928.448	20.6	1.0	-1.15	19.45	88.10	0.2	768
Bluetooth	2402-2480	7.0	-1.0	-3.15	3.85	2.43	0.2	768

Note 1: The tune-up power and antenna gain was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The DECT function can transmit at the same time with the Bluetooth function.

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{DECT}/limit + ERP_{BT}/limit = 88.10/768 + 2.43/768 = 0.12 < 1.0$

Result: Compliant

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain[#] is -1dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

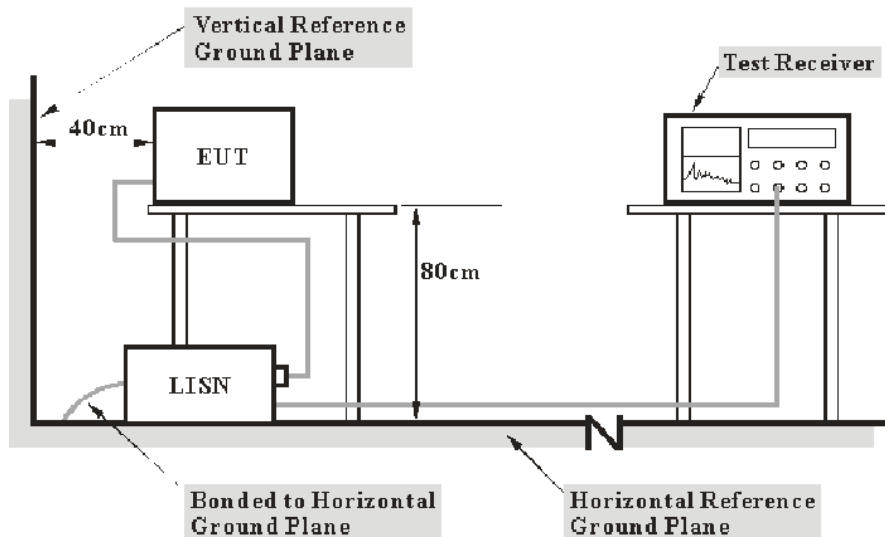

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	66 %
ATM Pressure:	101kPa

The testing was performed by Macy Shi on 2024-04-05.

EUT operation mode: Transmitting

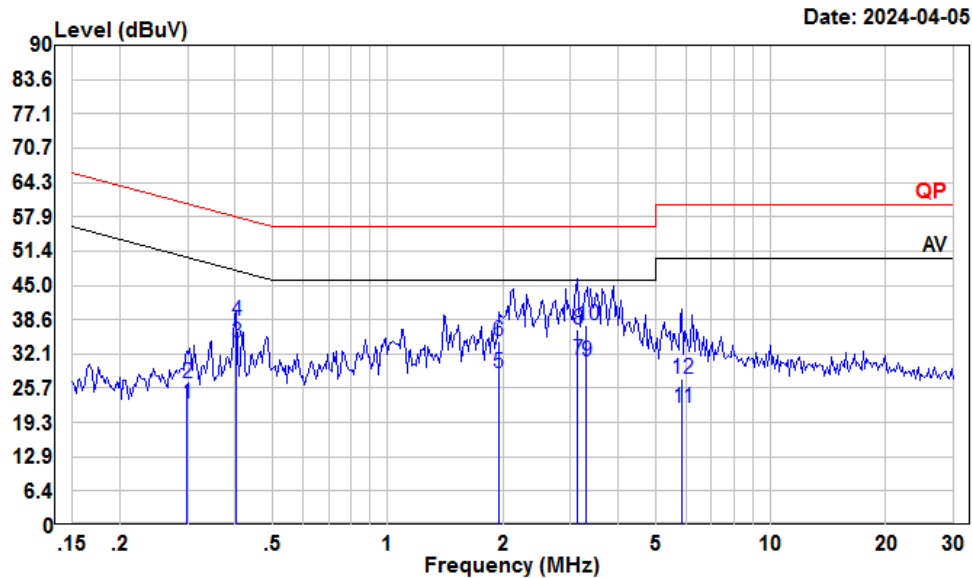*For Adapter A318-060040W-US1***AC 120V/60 Hz, Line**

Condition: Line


Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.30	2.01	22.80	10.67	10.12	50.28	-27.48	Average
2	0.30	5.84	26.63	10.67	10.12	60.28	-33.65	QP
3	0.40	13.46	34.25	10.57	10.22	47.81	-13.56	Average
4	0.40	17.50	38.29	10.57	10.22	57.81	-19.52	QP
5	1.95	7.86	28.63	10.59	10.18	46.00	-17.37	Average
6	1.95	13.66	34.43	10.59	10.18	56.00	-21.57	QP
7	3.14	10.25	30.92	10.40	10.27	46.00	-15.08	Average
8	3.14	16.16	36.83	10.40	10.27	56.00	-19.17	QP
9	3.31	10.20	30.85	10.38	10.27	46.00	-15.15	Average
10	3.31	16.90	37.55	10.38	10.27	56.00	-18.45	QP
11	5.87	1.37	22.03	10.44	10.22	50.00	-27.97	Average
12	5.87	6.89	27.55	10.44	10.22	60.00	-32.45	QP

AC 120V/60 Hz, Neutral

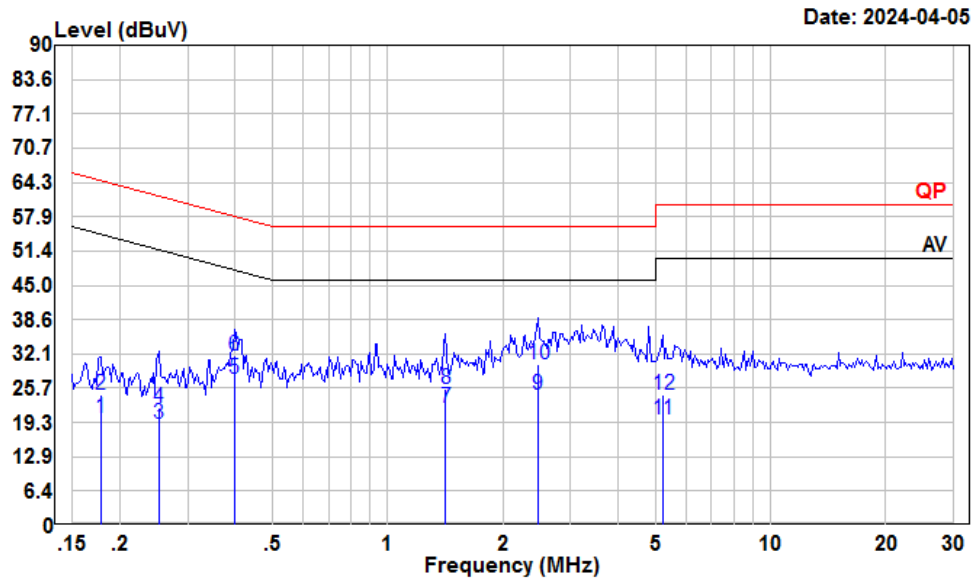


Condition: Neutral

Project : SZ1240220-08465E-RF

Tester : Macy shi

: BT

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.18	-0.37	20.24	10.48	10.13	54.59	-34.35	Average
2	0.18	3.78	24.39	10.48	10.13	64.59	-40.20	QP
3	0.25	-1.65	19.04	10.48	10.21	51.69	-32.65	Average
4	0.25	1.42	22.11	10.48	10.21	61.69	-39.58	QP
5	0.40	6.70	27.54	10.62	10.22	47.90	-20.36	Average
6	0.40	10.85	31.69	10.62	10.22	57.90	-26.21	QP
7	1.42	1.31	22.02	10.65	10.06	46.00	-23.98	Average
8	1.42	4.88	25.59	10.65	10.06	56.00	-30.41	QP
9	2.46	3.99	24.60	10.40	10.21	46.00	-21.40	Average
10	2.46	9.45	30.06	10.40	10.21	56.00	-25.94	QP
11	5.22	-0.96	19.80	10.54	10.22	50.00	-30.20	Average
12	5.22	3.61	24.37	10.54	10.22	60.00	-35.63	QP

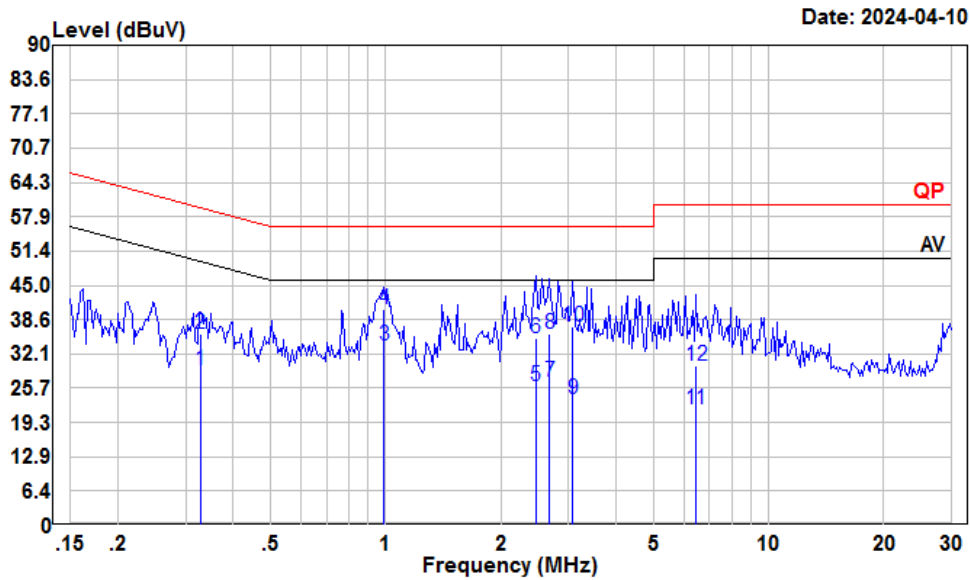*For Adapter VT05UUS06040***AC 120V/60 Hz, Line**

Condition: Line


Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.33	8.19	28.97	10.64	10.14	49.49	-20.52	Average
2	0.33	15.16	35.94	10.64	10.14	59.49	-23.55	QP
3	0.99	13.14	33.75	10.40	10.21	46.00	-12.25	Average
4	0.99	20.04	40.65	10.40	10.21	56.00	-15.35	QP
5	2.46	5.33	26.05	10.51	10.21	46.00	-19.95	Average
6	2.46	14.45	35.17	10.51	10.21	56.00	-20.83	QP
7	2.68	6.30	27.00	10.47	10.23	46.00	-19.00	Average
8	2.68	15.11	35.81	10.47	10.23	56.00	-20.19	QP
9	3.07	2.90	23.58	10.41	10.27	46.00	-22.42	Average
10	3.07	16.60	37.28	10.41	10.27	56.00	-18.72	QP
11	6.45	1.06	21.75	10.47	10.22	50.00	-28.25	Average
12	6.45	9.32	30.01	10.47	10.22	60.00	-29.99	QP

AC 120V/60 Hz, Neutral

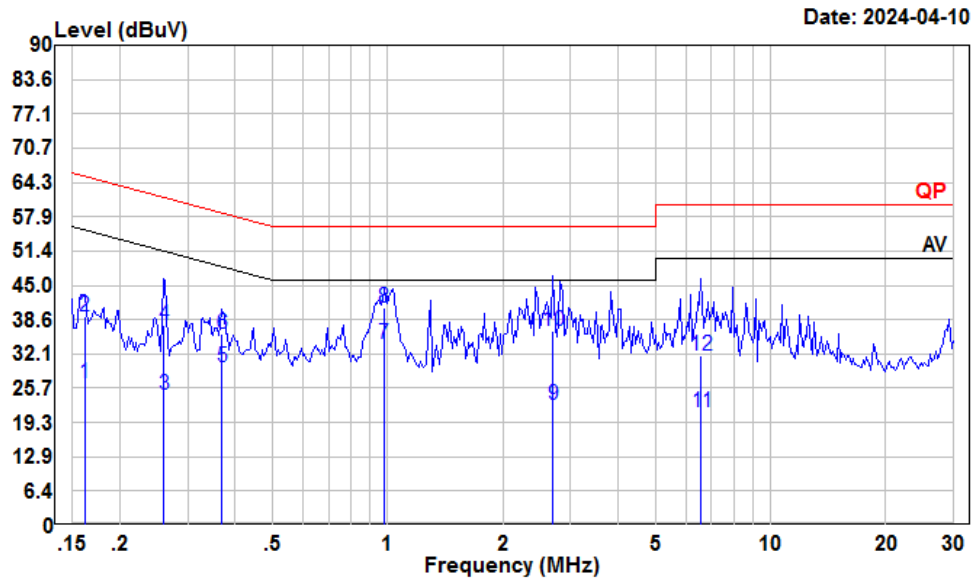

Condition: Neutral

Project : SZ1240220-08465E-RF


Tester : Macy shi

Note : BT

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	6.00	26.70	10.55	10.15	55.38	-28.68	Average
2	0.16	18.39	39.09	10.55	10.15	65.38	-26.29	QP
3	0.26	3.91	24.59	10.49	10.19	51.42	-26.83	Average
4	0.26	16.78	37.46	10.49	10.19	61.42	-23.96	QP
5	0.37	8.93	29.71	10.60	10.18	48.52	-18.81	Average
6	0.37	14.99	35.77	10.60	10.18	58.52	-22.75	QP
7	0.98	12.84	33.93	10.89	10.20	46.00	-12.07	Average
8	0.98	19.65	40.74	10.89	10.20	56.00	-15.26	QP
9	2.71	2.02	22.65	10.40	10.23	46.00	-23.35	Average
10	2.71	15.73	36.36	10.40	10.23	56.00	-19.64	QP
11	6.59	0.38	21.27	10.67	10.22	50.00	-28.73	Average
12	6.59	10.80	31.69	10.67	10.22	60.00	-28.31	QP

For Adapter VT04UUS06040


AC 120V/60 Hz, Line

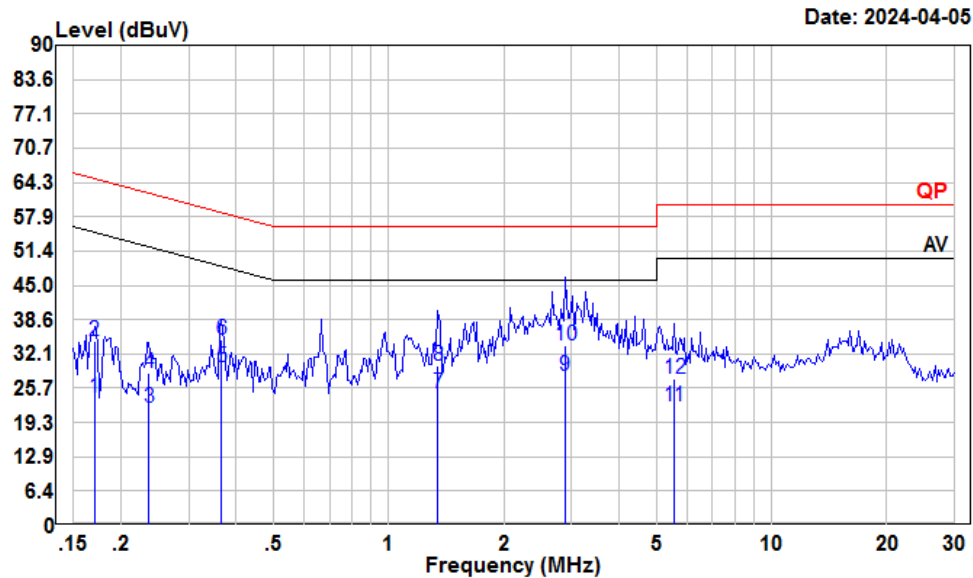

Condition: Line
Project : SZ1240220-08465E-RF
Tester : Macy shi
Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	3.20	23.95	10.60	10.15	54.94	-30.99	Average
2	0.17	13.73	34.48	10.60	10.15	64.94	-30.46	QP
3	0.24	1.22	22.02	10.62	10.18	52.22	-30.20	Average
4	0.24	7.75	28.55	10.62	10.18	62.22	-33.67	QP
5	0.37	8.91	29.76	10.67	10.18	48.61	-18.85	Average
6	0.37	13.91	34.76	10.67	10.18	58.61	-23.85	QP
7	1.35	3.94	24.73	10.74	10.05	46.00	-21.27	Average
8	1.35	9.10	29.89	10.74	10.05	56.00	-26.11	QP
9	2.88	6.97	27.92	10.69	10.26	46.00	-18.08	Average
10	2.88	12.69	33.64	10.69	10.26	56.00	-22.36	QP
11	5.56	1.35	22.29	10.72	10.22	50.00	-27.71	Average
12	5.56	6.58	27.52	10.72	10.22	60.00	-32.48	QP

AC 120V/60 Hz, Neutral

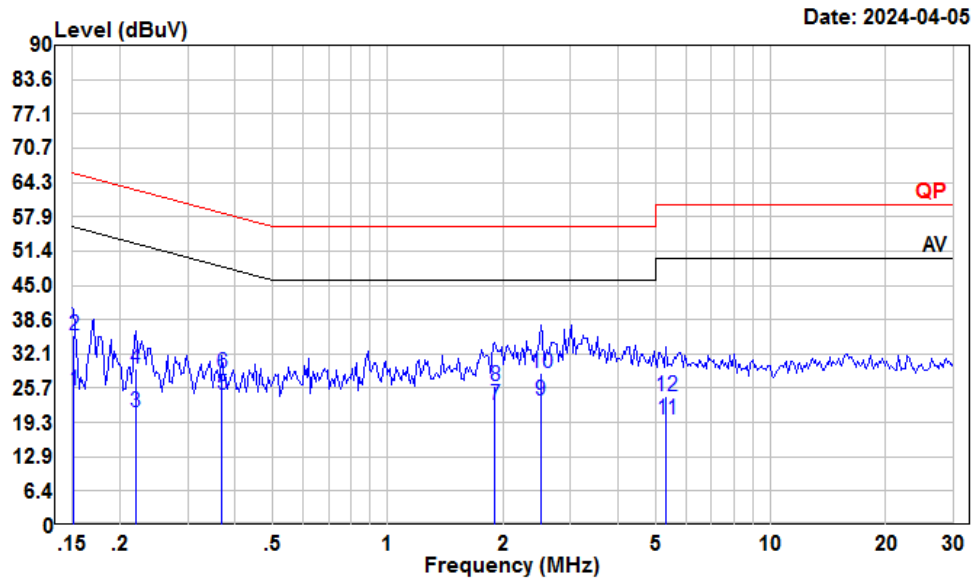


Condition: Neutral

Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	4.53	25.27	10.59	10.15	55.91	-30.64	Average
2	0.15	14.95	35.69	10.59	10.15	65.91	-30.22	QP
3	0.22	0.66	21.23	10.43	10.14	52.83	-31.60	Average
4	0.22	8.81	29.38	10.43	10.14	62.83	-33.45	QP
5	0.37	3.80	24.58	10.60	10.18	48.52	-23.94	Average
6	0.37	7.91	28.69	10.60	10.18	58.52	-29.83	QP
7	1.91	2.10	22.70	10.43	10.17	46.00	-23.30	Average
8	1.91	5.42	26.02	10.43	10.17	56.00	-29.98	QP
9	2.51	2.92	23.53	10.40	10.21	46.00	-22.47	Average
10	2.51	7.87	28.48	10.40	10.21	56.00	-27.52	QP
11	5.33	-0.88	19.89	10.55	10.22	50.00	-30.11	Average
12	5.33	3.49	24.26	10.55	10.22	60.00	-35.74	QP

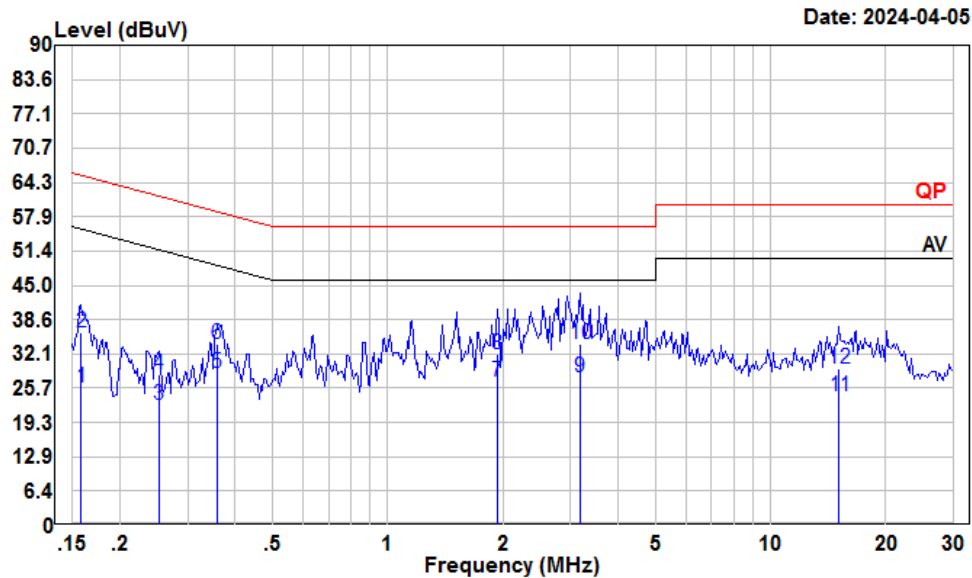*For Adapter E004-1A060040VU***AC 120V/60 Hz, Line**

Condition: Line


Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.16	4.78	25.81	10.88	10.15	55.56	-29.75	Average
2	0.16	15.12	36.15	10.88	10.15	65.56	-29.41	QP
3	0.25	1.66	22.59	10.72	10.21	51.69	-29.10	Average
4	0.25	7.36	28.29	10.72	10.21	61.69	-33.40	QP
5	0.36	7.86	28.64	10.61	10.17	48.78	-20.14	Average
6	0.36	13.17	33.95	10.61	10.17	58.78	-24.83	QP
7	1.93	6.18	26.94	10.59	10.17	46.00	-19.06	Average
8	1.93	11.26	32.02	10.59	10.17	56.00	-23.98	QP
9	3.17	7.19	27.86	10.40	10.27	46.00	-18.14	Average
10	3.17	13.28	33.95	10.40	10.27	56.00	-22.05	QP
11	15.07	3.59	24.29	10.60	10.10	50.00	-25.71	Average
12	15.07	8.79	29.49	10.60	10.10	60.00	-30.51	QP

AC 120V/60 Hz, Neutral

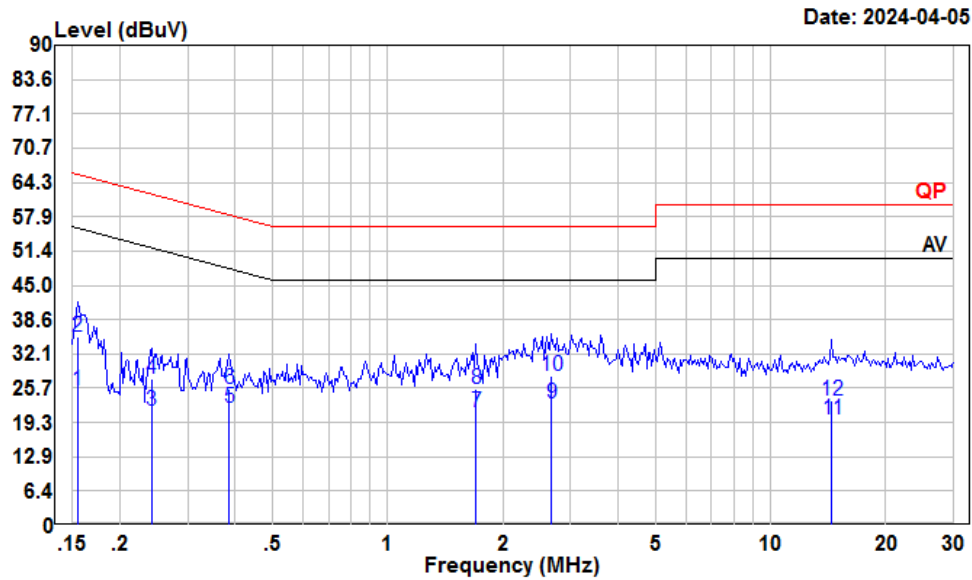


Condition: Neutral

Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	4.64	25.37	10.58	10.15	55.74	-30.37	Average
2	0.15	14.54	35.27	10.58	10.15	65.74	-30.47	QP
3	0.24	0.78	21.43	10.46	10.19	52.04	-30.61	Average
4	0.24	6.90	27.55	10.46	10.19	62.04	-34.49	QP
5	0.39	1.13	21.94	10.61	10.20	48.17	-26.23	Average
6	0.39	4.85	25.66	10.61	10.20	58.17	-32.51	QP
7	1.70	0.56	21.19	10.52	10.11	46.00	-24.81	Average
8	1.70	4.93	25.56	10.52	10.11	56.00	-30.44	QP
9	2.68	2.21	22.84	10.40	10.23	46.00	-23.16	Average
10	2.68	7.33	27.96	10.40	10.23	56.00	-28.04	QP
11	14.44	-1.14	19.78	10.80	10.12	50.00	-30.22	Average
12	14.44	2.43	23.35	10.80	10.12	60.00	-36.65	QP

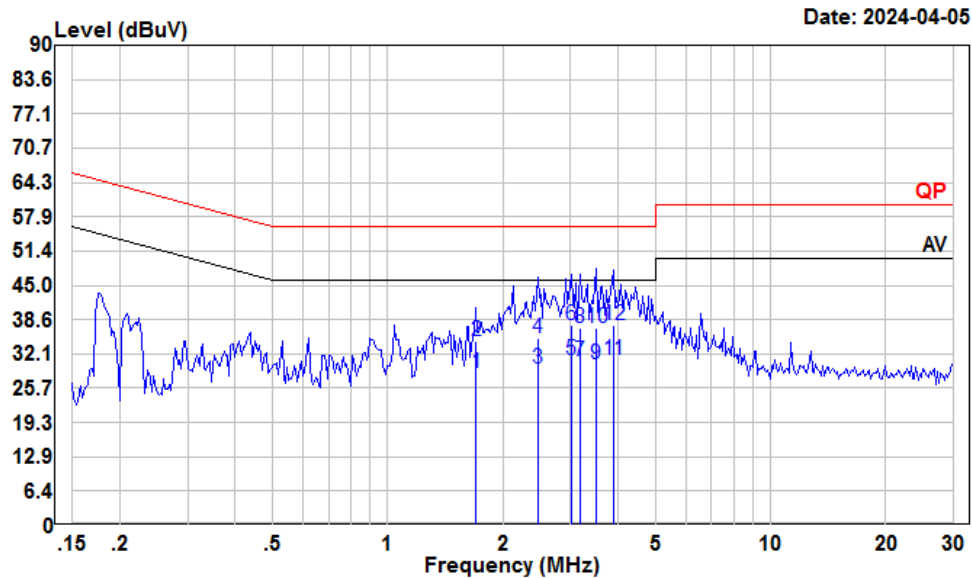*For Adapter DSA-3PFM-05 BUS 060040***AC 120V/60 Hz, Line**

Condition: Line


Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	1.70	7.85	28.51	10.55	10.11	46.00	-17.49	Average
2	1.70	13.75	34.41	10.55	10.11	56.00	-21.59	QP
3	2.46	8.70	29.42	10.51	10.21	46.00	-16.58	Average
4	2.46	14.40	35.12	10.51	10.21	56.00	-20.88	QP
5	3.01	10.20	30.89	10.42	10.27	46.00	-15.11	Average
6	3.01	16.90	37.59	10.42	10.27	56.00	-18.41	QP
7	3.17	10.10	30.77	10.40	10.27	46.00	-15.23	Average
8	3.17	16.40	37.07	10.40	10.27	56.00	-18.93	QP
9	3.49	9.69	30.32	10.36	10.27	46.00	-15.68	Average
10	3.49	16.43	37.06	10.36	10.27	56.00	-18.94	QP
11	3.88	10.40	30.97	10.31	10.26	46.00	-15.03	Average
12	3.88	17.00	37.57	10.31	10.26	56.00	-18.43	QP

AC 120V/60 Hz, Neutral

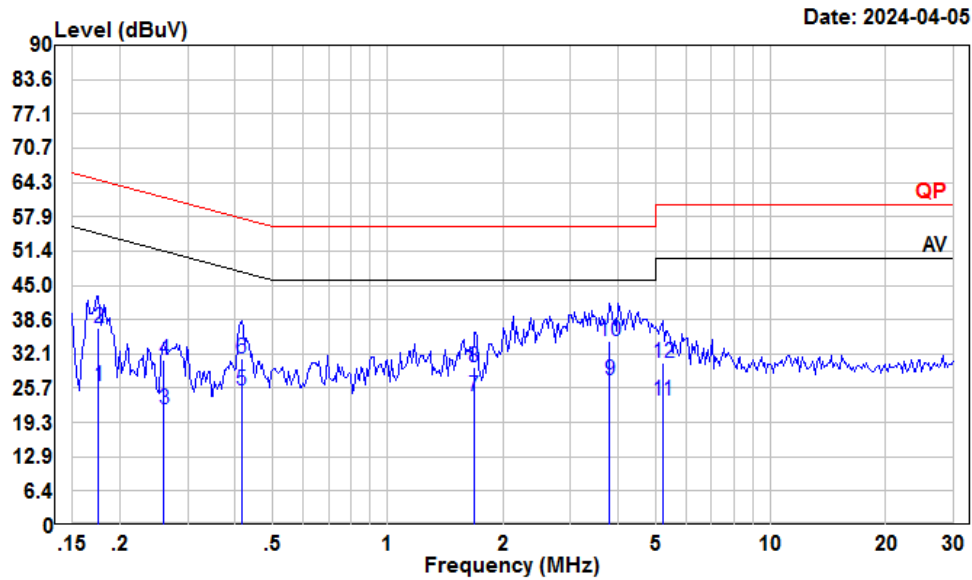


Condition: Neutral

Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.18	5.51	26.14	10.49	10.14	54.68	-28.54	Average
2	0.18	16.41	37.04	10.49	10.14	64.68	-27.64	QP
3	0.26	1.09	21.77	10.49	10.19	51.42	-29.65	Average
4	0.26	10.34	31.02	10.49	10.19	61.42	-30.40	QP
5	0.41	4.34	25.19	10.64	10.21	47.55	-22.36	Average
6	0.41	10.46	31.31	10.64	10.21	57.55	-26.24	QP
7	1.68	3.55	24.19	10.53	10.11	46.00	-21.81	Average
8	1.68	9.12	29.76	10.53	10.11	56.00	-26.24	QP
9	3.80	6.41	27.07	10.40	10.26	46.00	-18.93	Average
10	3.80	14.01	34.67	10.40	10.26	56.00	-21.33	QP
11	5.22	2.73	23.49	10.54	10.22	50.00	-26.51	Average
12	5.22	9.83	30.59	10.54	10.22	60.00	-29.41	QP

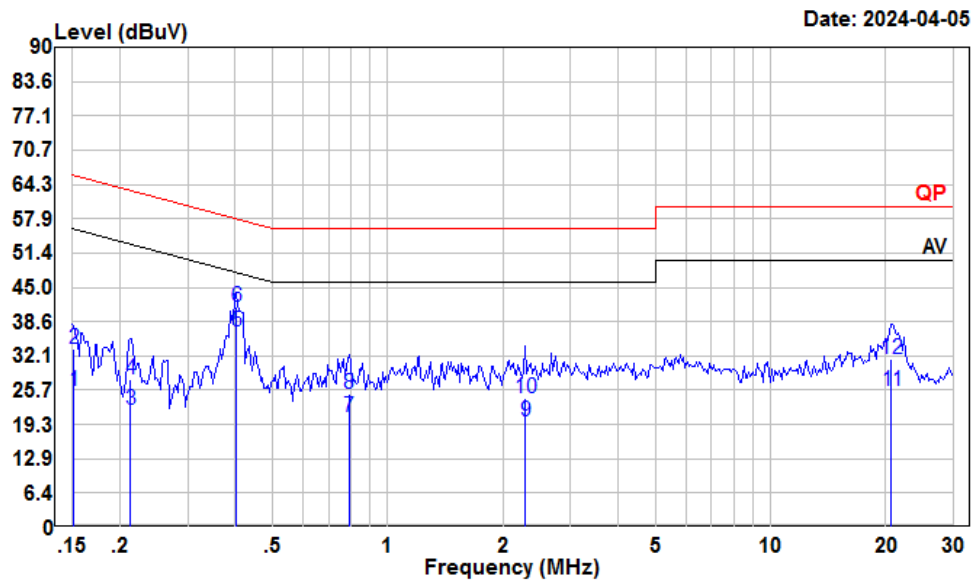*For Adapter GQ06-060040-ZU***AC 120V/60 Hz, Line**

Condition: Line


Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.15	4.60	25.65	10.90	10.15	55.91	-30.26	Average
2	0.15	12.37	33.42	10.90	10.15	65.91	-32.49	QP
3	0.21	1.12	22.02	10.78	10.12	53.10	-31.08	Average
4	0.21	6.94	27.84	10.78	10.12	63.10	-35.26	QP
5	0.40	15.99	36.78	10.57	10.22	47.81	-11.03	Average
6	0.40	20.49	41.28	10.57	10.22	57.81	-16.53	QP
7	0.79	0.05	20.69	10.47	10.17	46.00	-25.31	Average
8	0.79	4.28	24.92	10.47	10.17	56.00	-31.08	QP
9	2.29	-0.80	19.94	10.54	10.20	46.00	-26.06	Average
10	2.29	3.44	24.18	10.54	10.20	56.00	-31.82	QP
11	20.70	4.61	25.61	10.87	10.13	50.00	-24.39	Average
12	20.70	10.52	31.52	10.87	10.13	60.00	-28.48	QP

AC 120V/60 Hz, Neutral

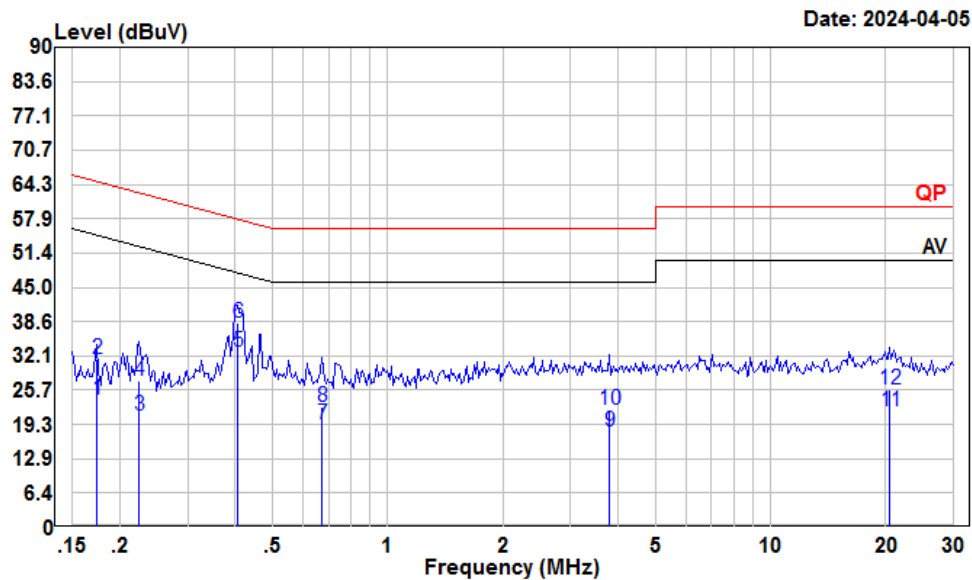

Condition: Neutral

Project : SZ1240220-08465E-RF

Tester : Macy shi

Note : BT

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.17	3.21	23.85	10.50	10.14	54.77	-30.92	Average
2	0.17	10.93	31.57	10.50	10.14	64.77	-33.20	QP
3	0.22	0.30	20.89	10.44	10.15	52.66	-31.77	Average
4	0.22	6.76	27.35	10.44	10.15	62.66	-35.31	QP
5	0.41	11.94	32.79	10.63	10.22	47.73	-14.94	Average
6	0.41	17.58	38.43	10.63	10.22	57.73	-19.30	QP
7	0.68	-1.63	19.28	10.70	10.21	46.00	-26.72	Average
8	0.68	1.56	22.47	10.70	10.21	56.00	-33.53	QP
9	3.80	-2.59	18.07	10.40	10.26	46.00	-27.93	Average
10	3.80	1.37	22.03	10.40	10.26	56.00	-33.97	QP
11	20.49	1.08	21.89	10.69	10.12	50.00	-28.11	Average
12	20.49	5.02	25.83	10.69	10.12	60.00	-34.17	QP


FCC §15.205, §15.209 & §15.247(d) - RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)


EUT Setup

9 kHz-30MHz:

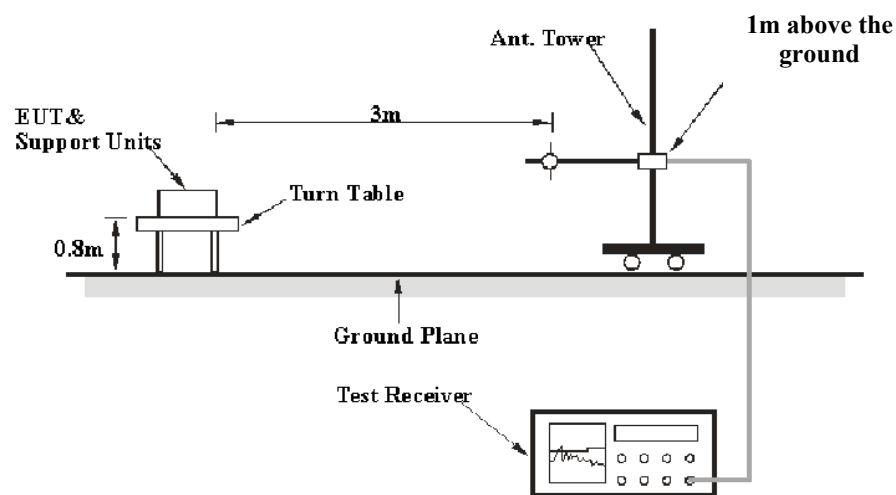

30MHz-1GHz:

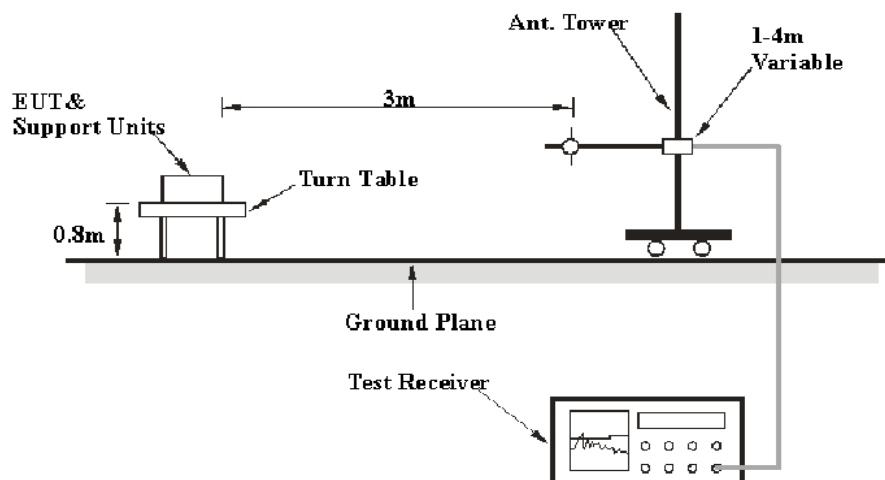

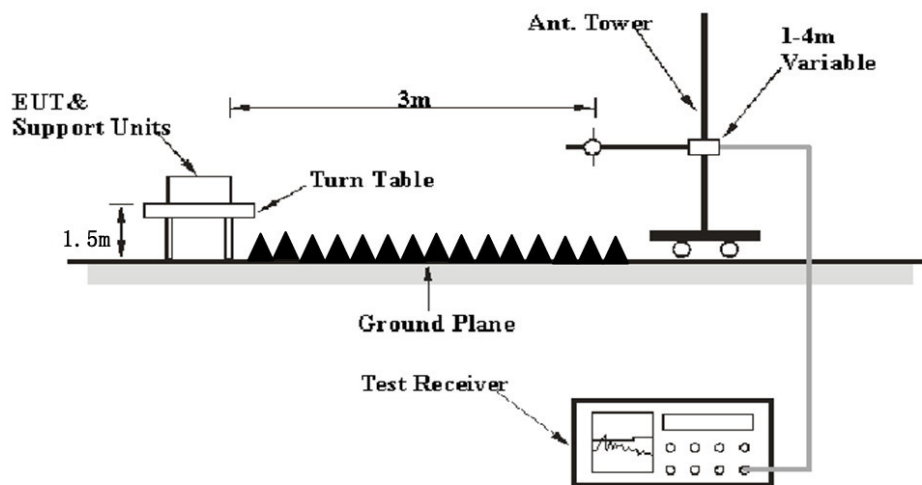Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	1MHz	3 MHz	/	PK

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

For the average spurious emission above 1GHz, it was calculated by the below formula:

Average= Peak Measurement + Duty Cycle Corrected Factor

Note: the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22~25.6°C
Relative Humidity:	50~54%
ATM Pressure:	101 kPa


The testing was performed by Anson Su on 2024-03-16 for below 1GHz and Dylan Yang on 2024-04-10 for above 1GHz.

Test mode: Transmitting

Note: For the spurious radiated emission below 30MHz, the emissions are 20dB below the limit which were not recorded.

For Adapter A318-060040W-US1
30MHz-1GHz:


Horizontal

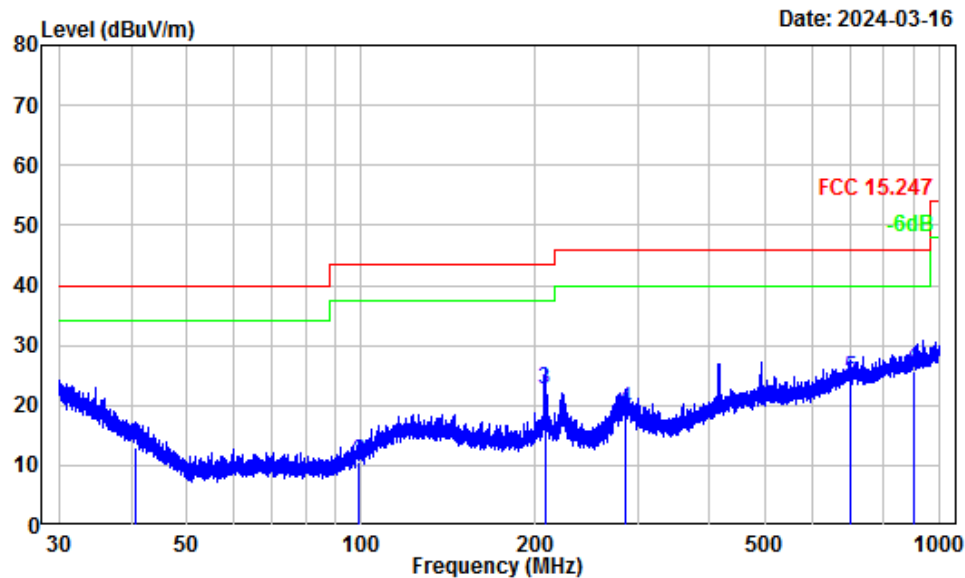

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	40.68	-10.83	23.91	13.08	40.00	-26.92	QP
2	98.96	-14.02	24.71	10.69	43.50	-32.81	QP
3	207.49	-11.15	33.85	22.70	43.50	-20.80	QP
4	285.98	-10.49	29.94	19.45	46.00	-26.55	QP
5	699.92	-1.51	25.99	24.48	46.00	-21.52	QP
6	899.75	1.01	24.69	25.70	46.00	-20.30	QP

Vertical

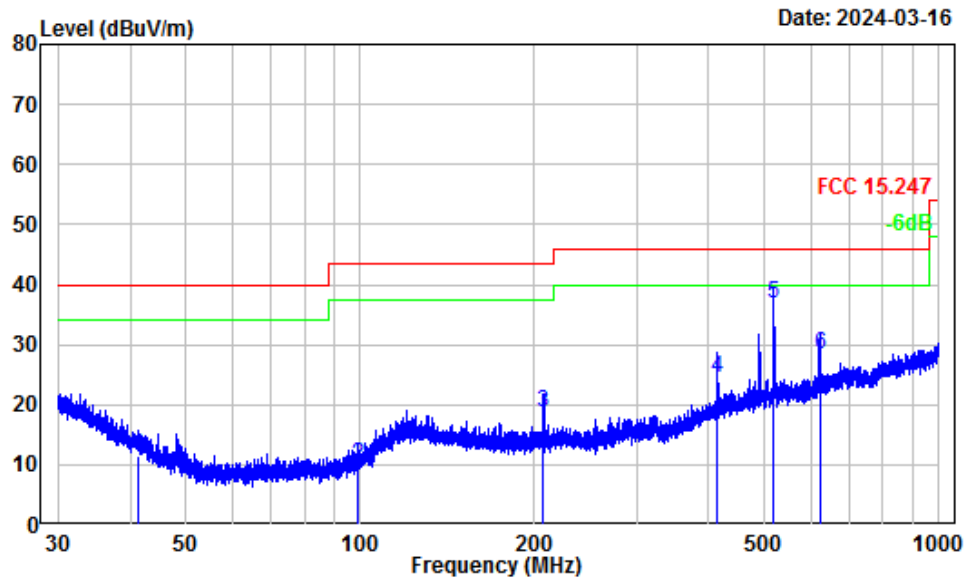


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	41.26	-12.60	24.19	11.59	40.00	-28.41 QP
2	98.75	-15.50	25.33	9.83	43.50	-33.67 QP
3	207.40	-12.23	30.88	18.65	43.50	-24.85 QP
4	414.72	-7.14	31.60	24.46	46.00	-21.54 QP
5	518.38	-5.11	41.95	36.84	46.00	-9.16 QP
6	622.34	-3.74	32.20	28.46	46.00	-17.54 QP

For Adapter VT05UUS06040
30MHz-1GHz:


Horizontal

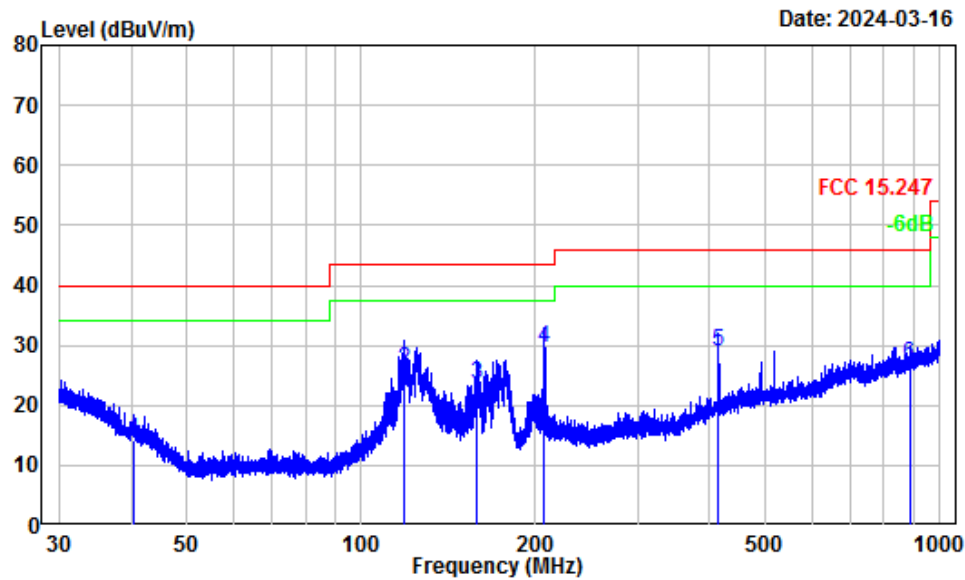

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq		Read		Limit	Over	Remark
	MHz	Factor	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.49	-10.70	24.95	14.25	40.00	-25.75	QP
2	118.81	-10.44	36.30	25.86	43.50	-17.64	QP
3	158.81	-11.81	35.29	23.48	43.50	-20.02	QP
4	207.30	-11.15	40.78	29.63	43.50	-13.87	QP
5	414.72	-6.85	35.87	29.02	46.00	-16.98	QP
6	886.06	0.78	26.18	26.96	46.00	-19.04	QP

Vertical

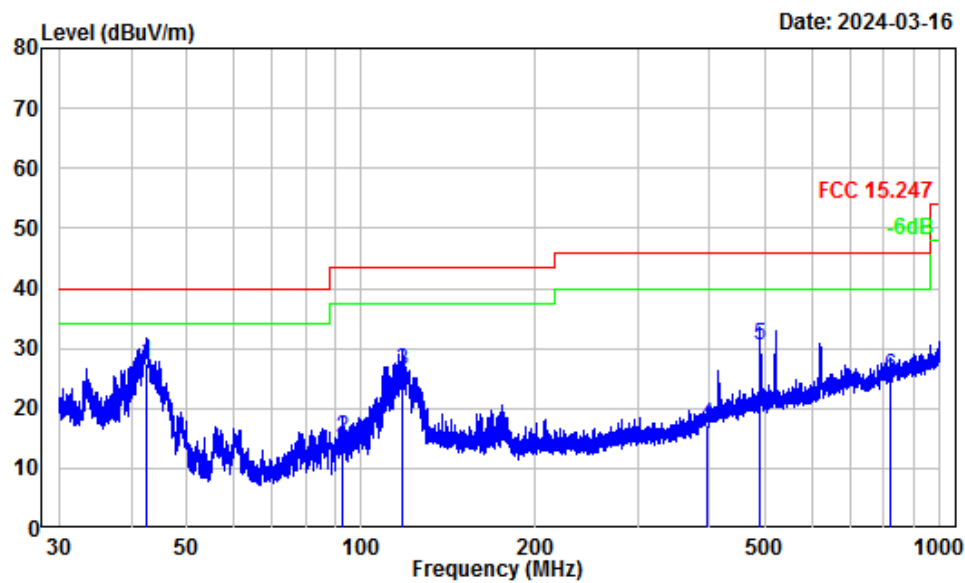


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.54	-13.33	40.88	27.55	40.00	-12.45	QP
2	92.58	-16.81	31.95	15.14	43.50	-28.36	QP
3	117.77	-11.10	37.47	26.37	43.50	-17.13	QP
4	395.55	-7.79	24.92	17.13	46.00	-28.87	QP
5	489.24	-5.44	35.94	30.50	46.00	-15.50	QP
6	822.43	-0.41	25.75	25.34	46.00	-20.66	QP

For Adapter VT04UUS06040
30MHz-1GHz:


Horizontal

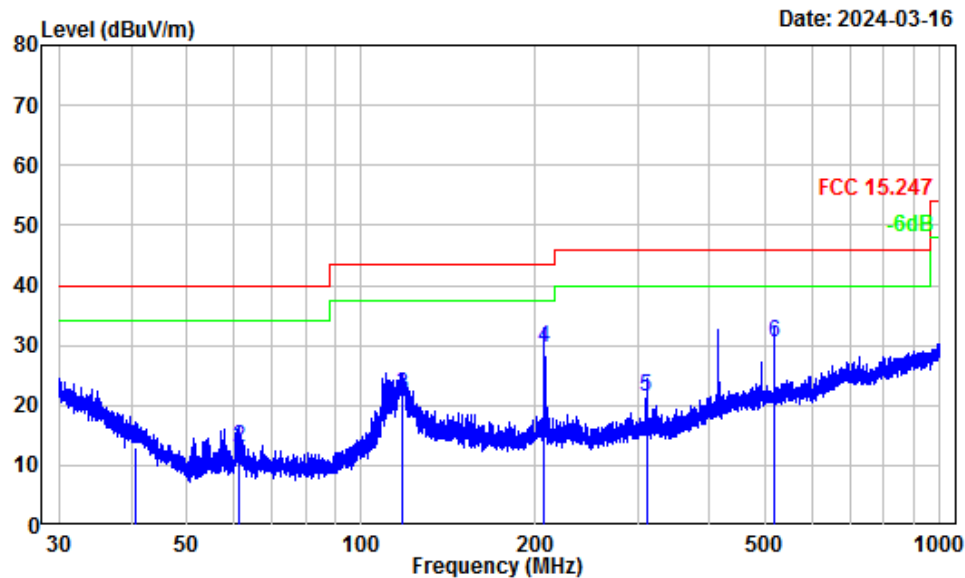

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.59	-10.76	23.87	13.11	40.00	-26.89	QP
2	61.53	-16.45	29.43	12.98	40.00	-27.02	QP
3	117.67	-10.53	32.20	21.67	43.50	-21.83	QP
4	207.30	-11.15	40.85	29.70	43.50	-13.80	QP
5	310.95	-9.94	31.44	21.50	46.00	-24.50	QP
6	518.61	-4.87	35.28	30.41	46.00	-15.59	QP

Vertical

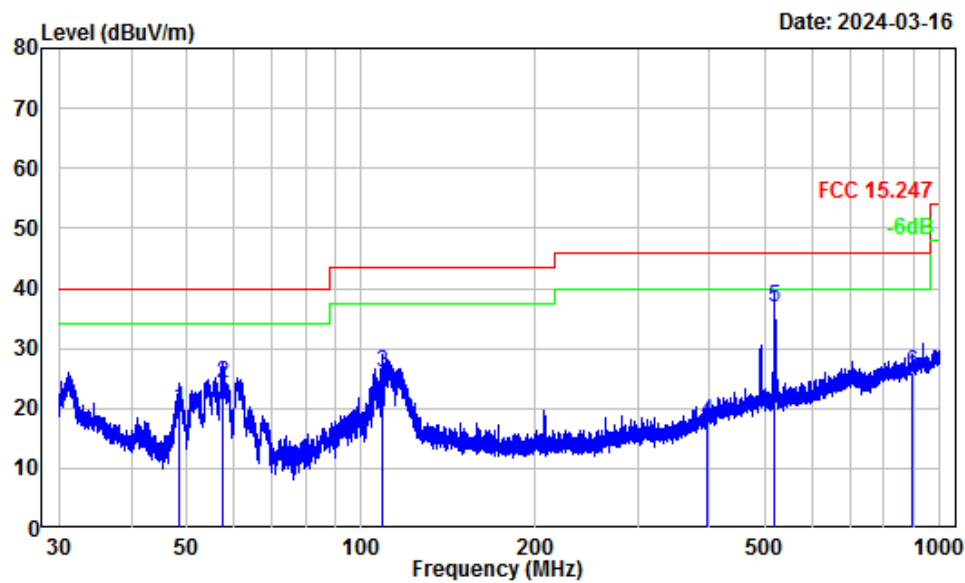


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	48.33	-16.56	36.60	20.04	40.00	-19.96	QP
2	57.42	-17.56	41.73	24.17	40.00	-15.83	QP
3	108.89	-12.66	38.48	25.82	43.50	-17.68	QP
4	395.37	-7.80	25.57	17.77	46.00	-28.23	QP
5	518.38	-5.11	41.93	36.82	46.00	-9.18	QP
6	895.43	0.54	25.49	26.03	46.00	-19.97	QP

For Adapter E004-LA060040VU
30MHz-1GHz:


Horizontal

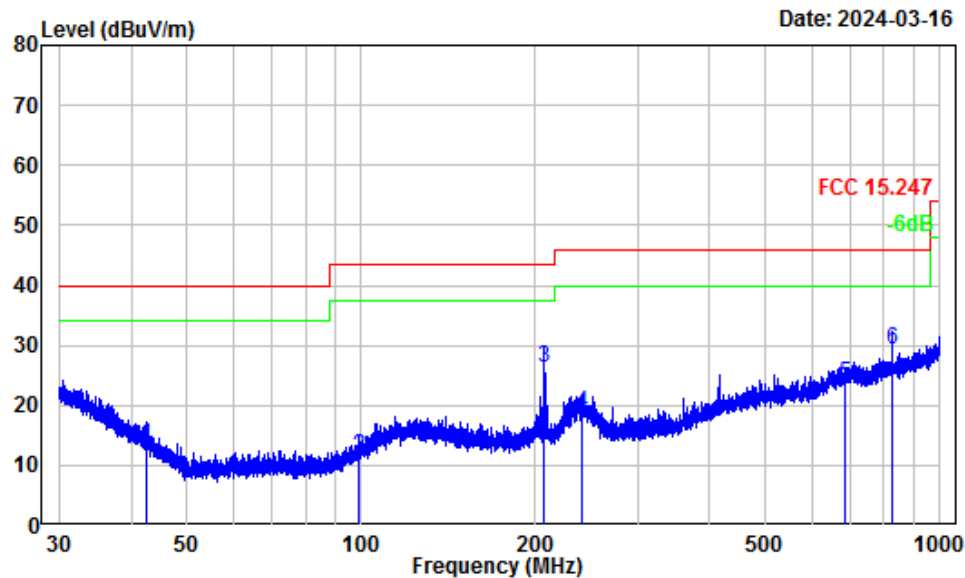

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	Limit	
1	42.51	-11.99	25.23	13.24	40.00	-26.76	QP
2	99.22	-13.95	25.53	11.58	43.50	-31.92	QP
3	207.21	-11.14	37.49	26.35	43.50	-17.15	QP
4	241.25	-11.71	30.49	18.78	46.00	-27.22	QP
5	686.55	-1.77	25.26	23.49	46.00	-22.51	QP
6	829.31	-0.12	29.29	29.17	46.00	-16.83	QP

Vertical

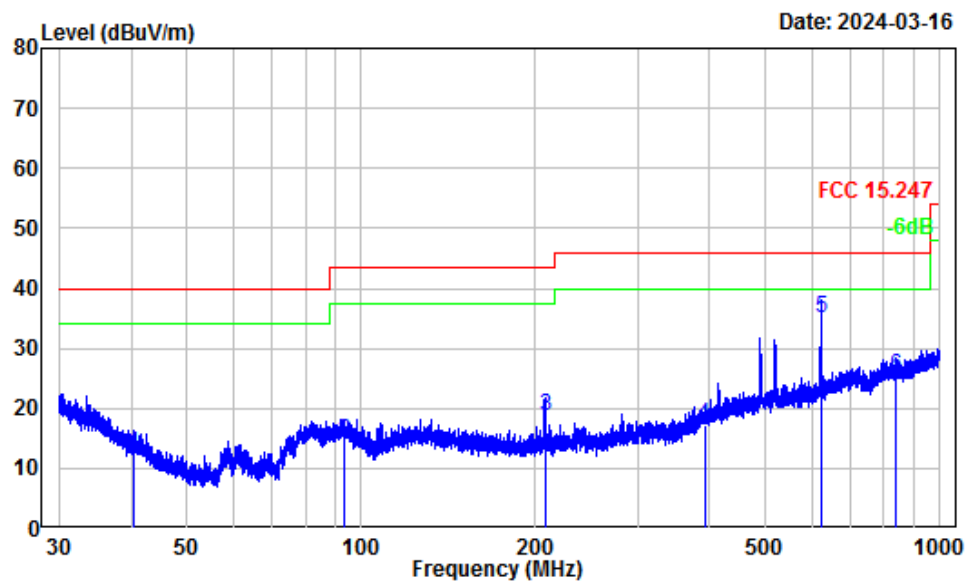


Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.47	-12.15	24.52	12.37	40.00	-27.63	QP
2	93.73	-16.56	31.13	14.57	43.50	-28.93	QP
3	207.58	-12.23	30.93	18.70	43.50	-24.80	QP
4	391.75	-7.99	25.16	17.17	46.00	-28.83	QP
5	622.07	-3.74	38.83	35.09	46.00	-10.91	QP
6	840.29	-0.22	25.54	25.32	46.00	-20.68	QP

For Adapter DSA-3PFM-05 BUS 060040
30MHz-1GHz:


Horizontal

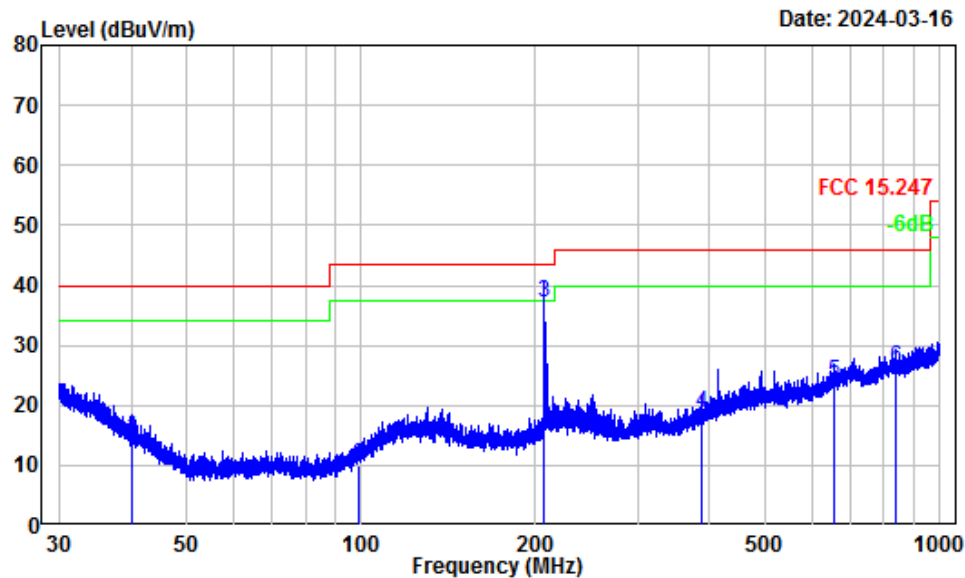

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq		Read		Limit	Over	Remark
	MHz	Factor	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.21	-10.52	25.01	14.49	40.00	-25.51	QP
2	99.09	-13.98	23.87	9.89	43.50	-33.61	QP
3	207.40	-11.15	48.39	37.24	43.50	-6.26	QP
4	388.16	-7.95	26.70	18.75	46.00	-27.25	QP
5	656.24	-2.33	26.22	23.89	46.00	-22.11	QP
6	841.76	0.07	26.27	26.34	46.00	-19.66	QP

Vertical

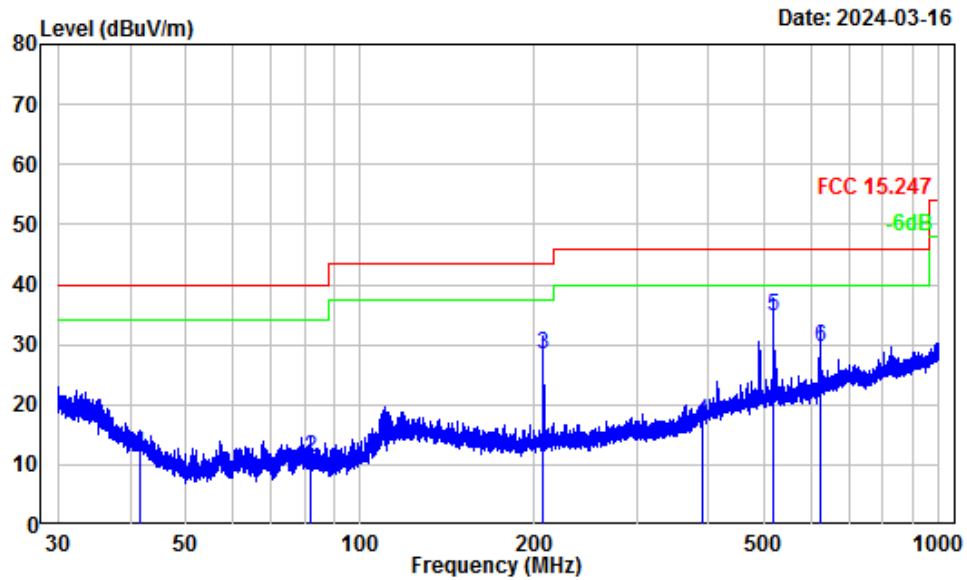


Site : Chamber A
 Condition : 3m Vertical
 Project Number: SZ1240220-08465E-RF
 Note : BT
 Tester : Anson Su

	Freq Factor		Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.57	-12.78	24.52	11.74	40.00	-28.26	QP
2	81.93	-17.25	28.33	11.08	40.00	-28.92	QP
3	207.40	-12.23	40.51	28.28	43.50	-15.22	QP
4	391.24	-8.02	25.27	17.25	46.00	-28.75	QP
5	518.38	-5.11	39.93	34.82	46.00	-11.18	QP
6	622.34	-3.74	33.30	29.56	46.00	-16.44	QP

For Adapter GQ06-060040-ZU
30MHz-1GHz:


Horizontal

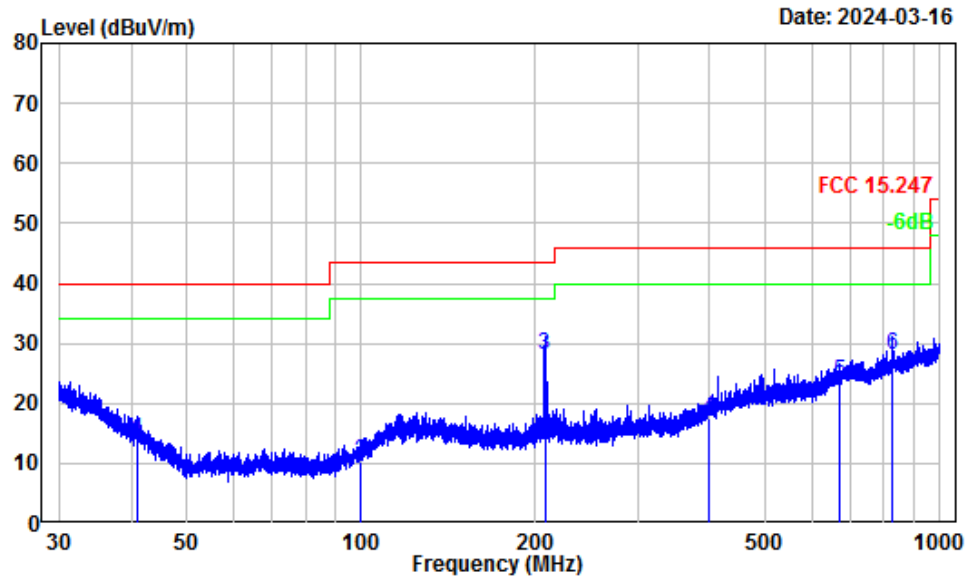

Site : Chamber A
Condition : 3m Horizontal
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	Line	Limit	
1	40.92	-10.98	24.72	13.74	40.00	-26.26	QP
2	99.48	-13.88	24.18	10.30	43.50	-33.20	QP
3	207.49	-11.15	39.08	27.93	43.50	-15.57	QP
4	397.98	-7.46	25.10	17.64	46.00	-28.36	QP
5	669.61	-2.08	25.77	23.69	46.00	-22.31	QP
6	829.67	-0.11	28.08	27.97	46.00	-18.03	QP

Vertical

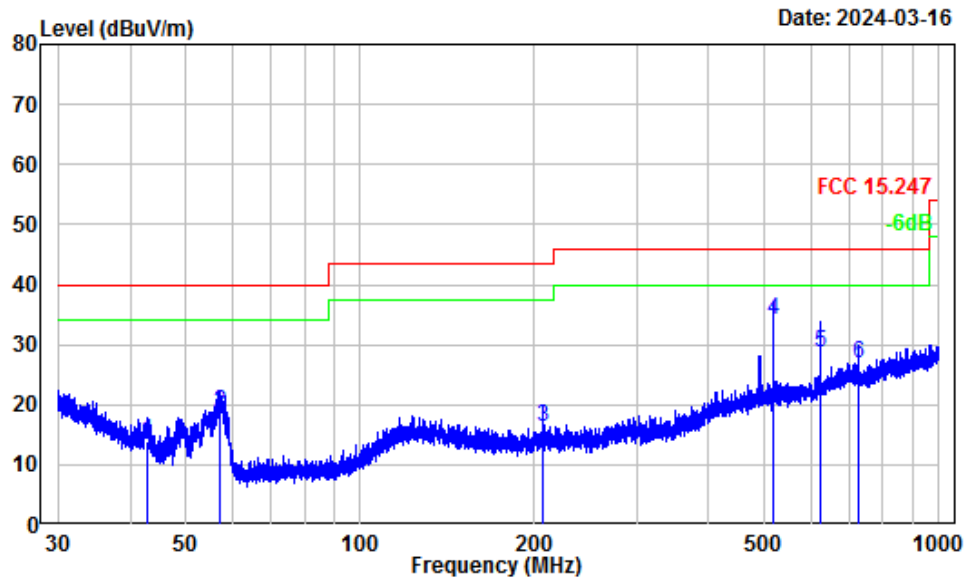

Site : Chamber A
Condition : 3m Vertical
Project Number: SZ1240220-08465E-RF
Note : BT
Tester : Anson Su

	Freq Factor		Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	42.73	-13.44	27.32	13.88	40.00	-26.12 QP
2	57.12	-17.55	36.33	18.78	40.00	-21.22 QP
3	207.40	-12.23	28.62	16.39	43.50	-27.11 QP
4	518.61	-5.11	39.32	34.21	46.00	-11.79 QP
5	622.34	-3.74	32.30	28.56	46.00	-17.44 QP
6	725.85	-2.04	28.87	26.83	46.00	-19.17 QP

Above 1GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
Low Channel 2402MHz							
2373.39	54.21	PK	H	-3.17	51.04	74	-22.96
2368.87	54.01	PK	V	-3.17	50.84	74	-23.16
4804.00	46.18	PK	H	1.69	47.87	74	-26.13
4804.00	46.28	PK	V	1.69	47.97	74	-26.03
Middle Channel 2441MHz							
4882.00	46.58	PK	H	1.79	48.37	74	-25.63
4882.00	46.69	PK	V	1.79	48.48	74	-25.52
High Channel 2480MHz							
2485.08	54.32	PK	H	-3.17	51.15	74	-22.85
2483.79	56.02	PK	V	-3.17	52.85	74	-21.15
4960.00	47.17	PK	H	2.68	49.85	74	-24.15
4960.00	47.73	PK	V	2.68	50.41	74	-23.59

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247		
					Limit (dBμV/m)	Margin (dB)	Comment
Low Channel 2402MHz							
2373.39	51.04	H	-24.73	26.31	54	-27.69	Bandedge
2368.87	50.84	V	-24.73	26.11	54	-27.89	Bandedge
4804.00	47.87	H	-24.73	23.14	54	-30.86	Harmonic
4804.00	47.97	V	-24.73	23.24	54	-30.76	Harmonic
Middle Channel 2441MHz							
4882.00	48.37	H	-24.73	23.64	54	-30.36	Harmonic
4882.00	48.48	V	-24.73	23.75	54	-30.25	Harmonic
High Channel 2480MHz							
2485.08	51.15	H	-24.73	26.42	54	-27.58	Bandedge
2483.79	52.85	V	-24.73	28.12	54	-25.88	Bandedge
4960.00	49.85	H	-24.73	25.12	54	-28.88	Harmonic
4960.00	50.41	V	-24.73	25.68	54	-28.32	Harmonic

Note:

Absolute Level = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit



Average level= Peak level+ Duty Cycle Corrected Factor

All other spurious emission are noise floor which was not recorded.


Duty cycle = Ton/100ms = 2.90*2/100=0.058


Duty Cycle Corrected Factor = 20lg (Duty cycle) = 20lg0.058 = -24.73


Duty cycle

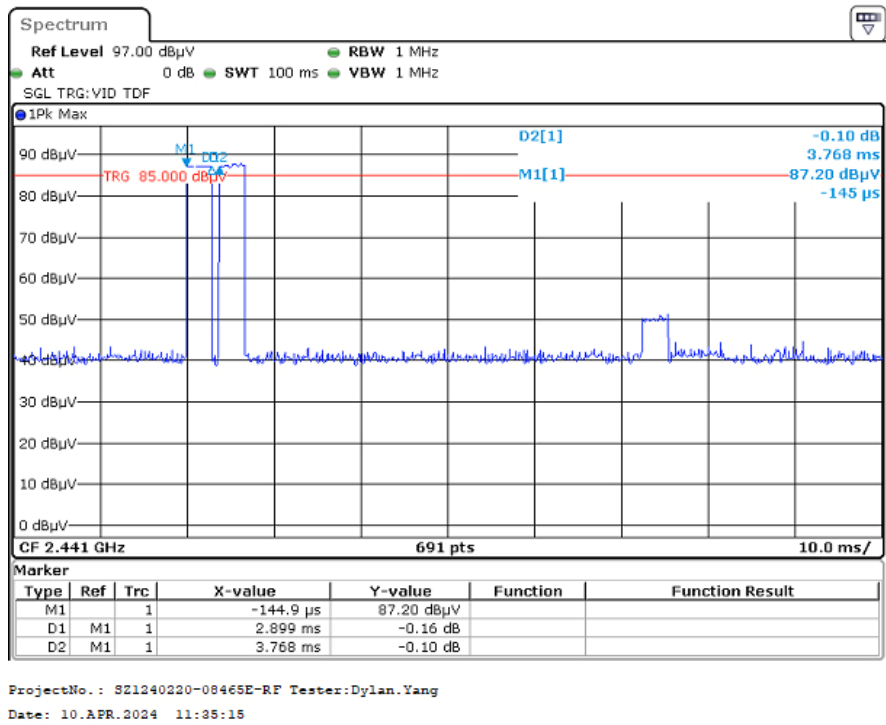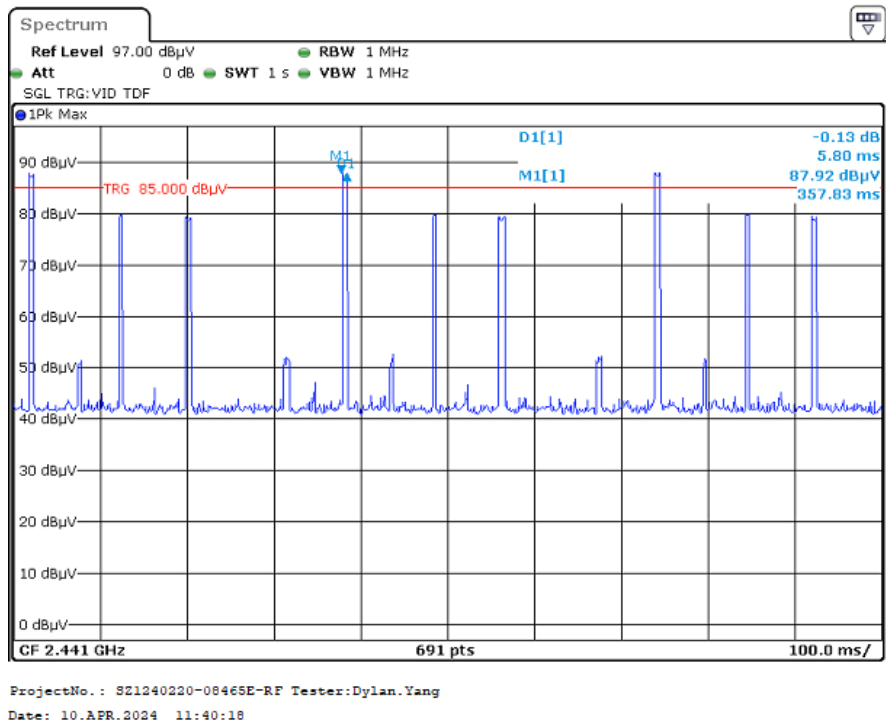



Test plots:

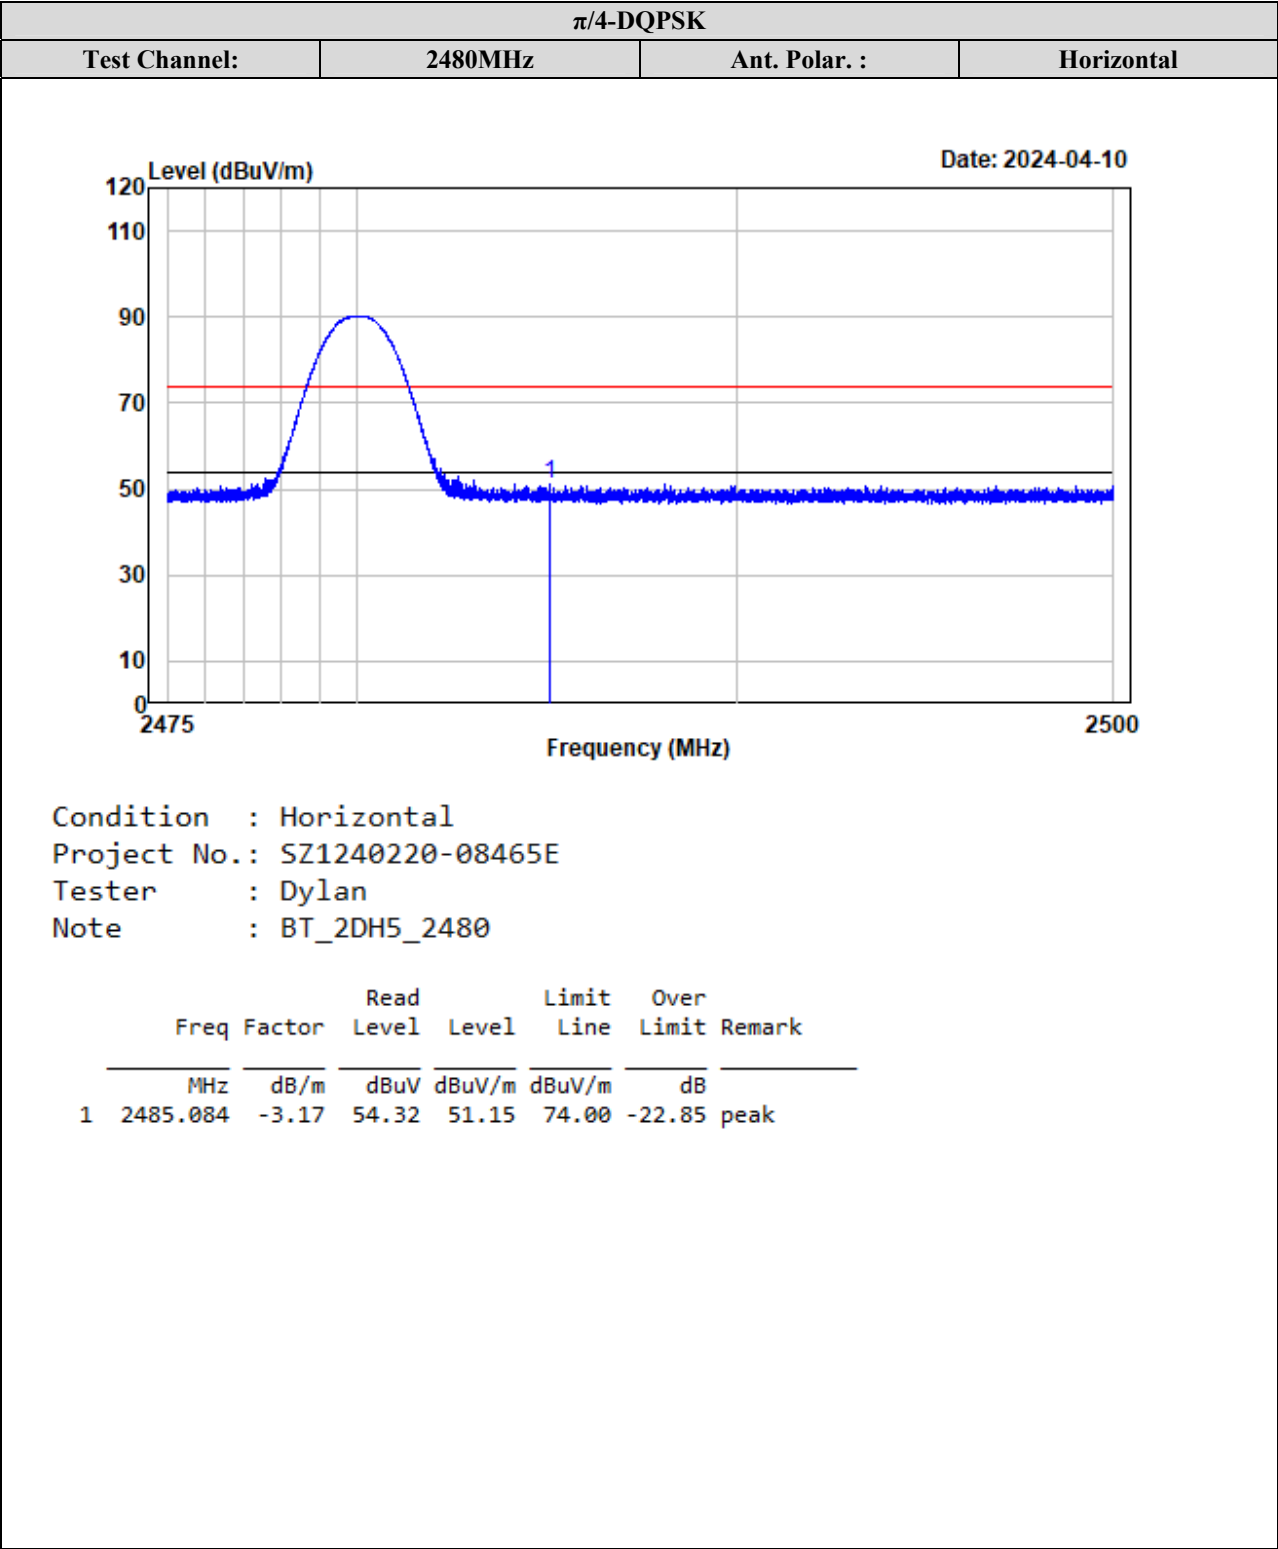


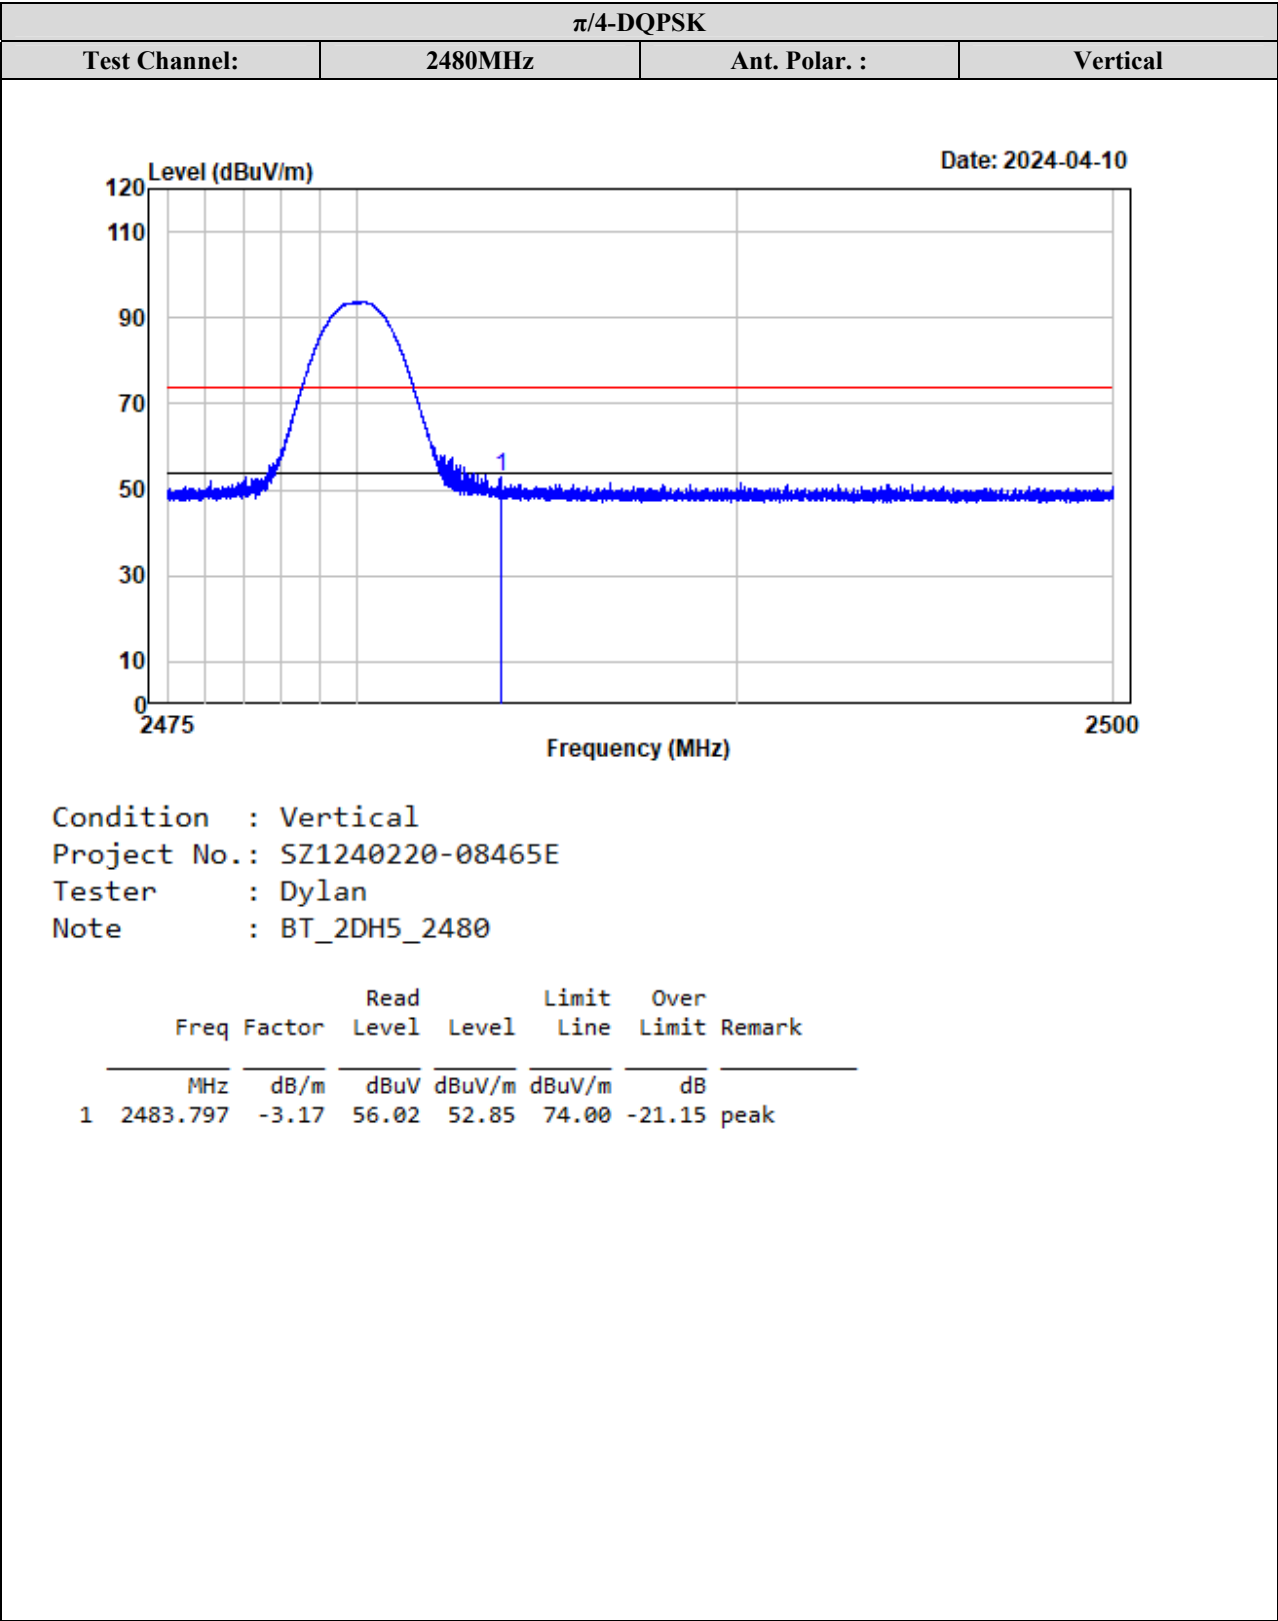


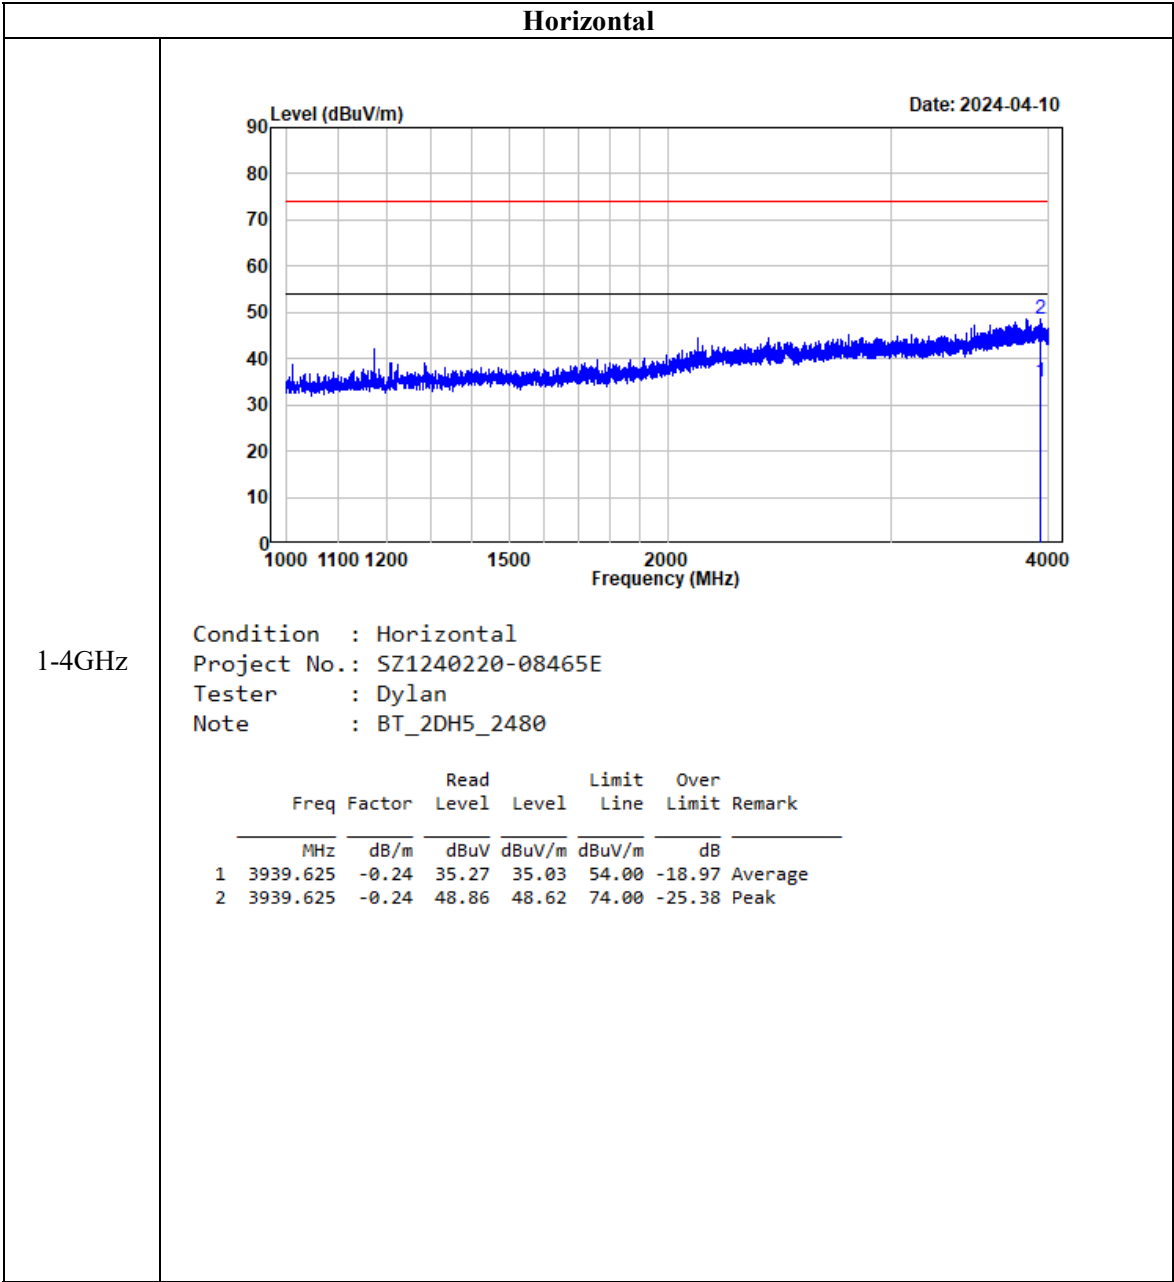


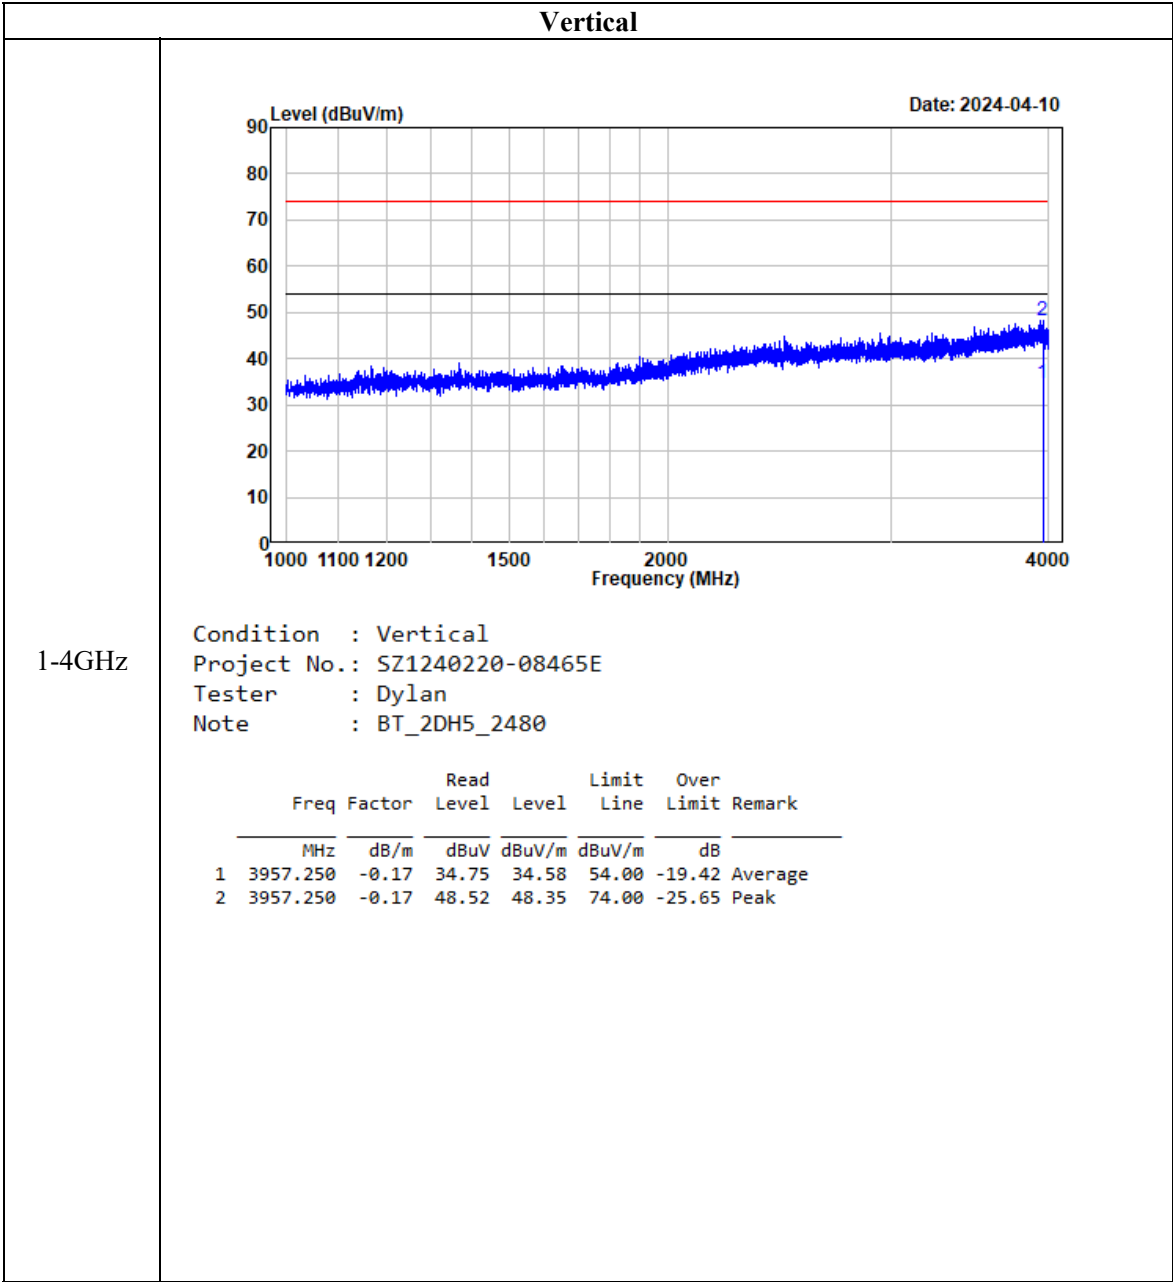

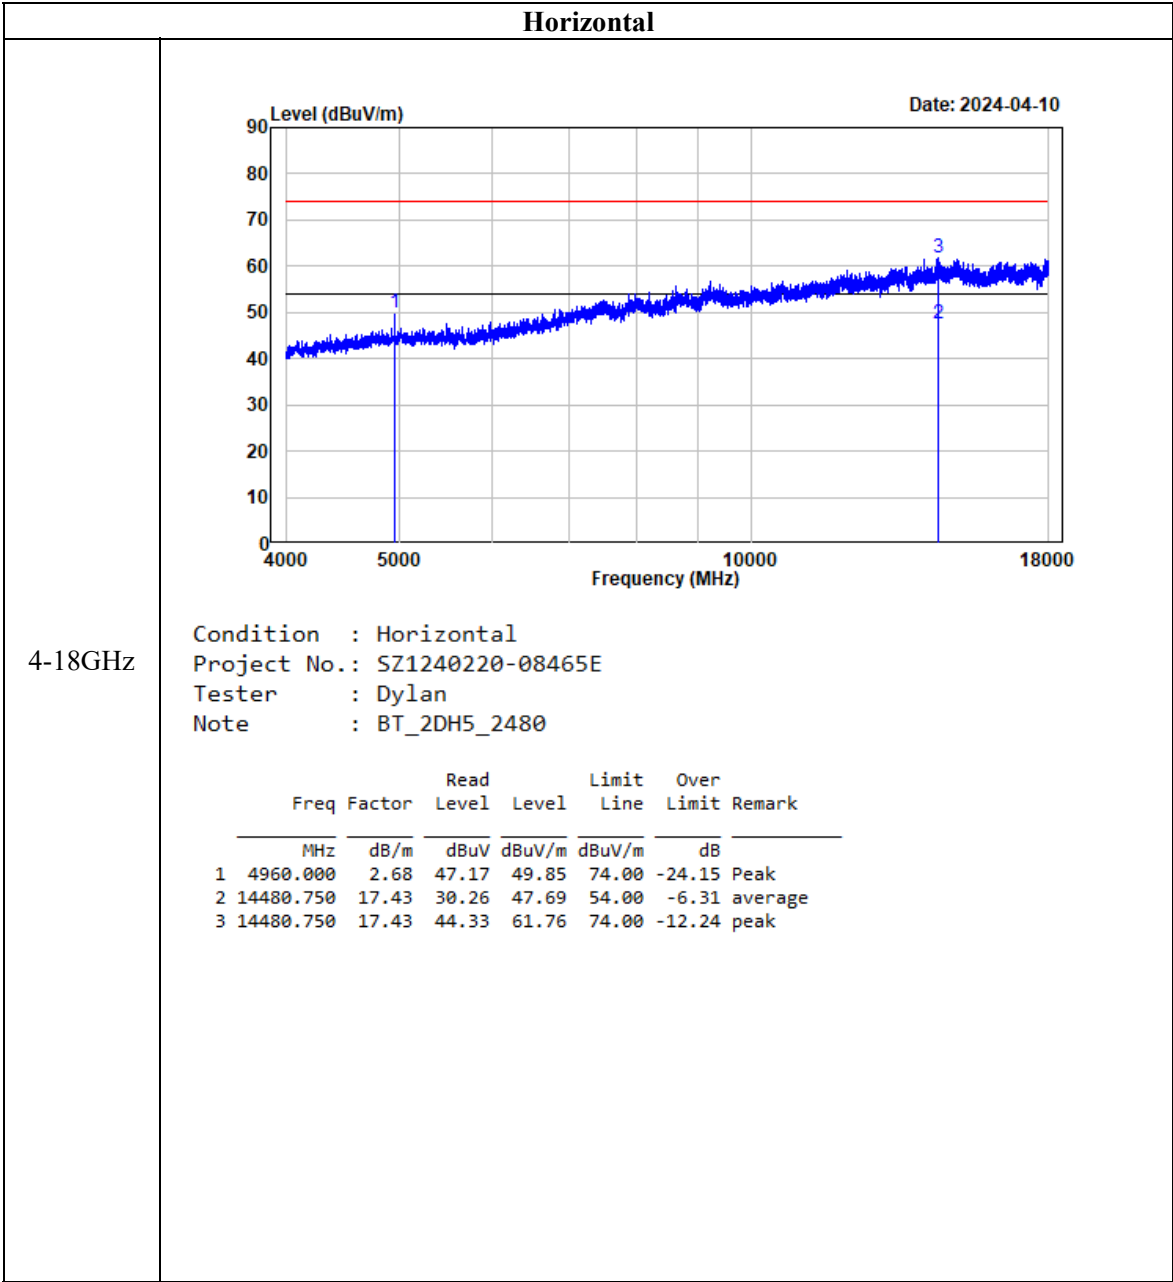

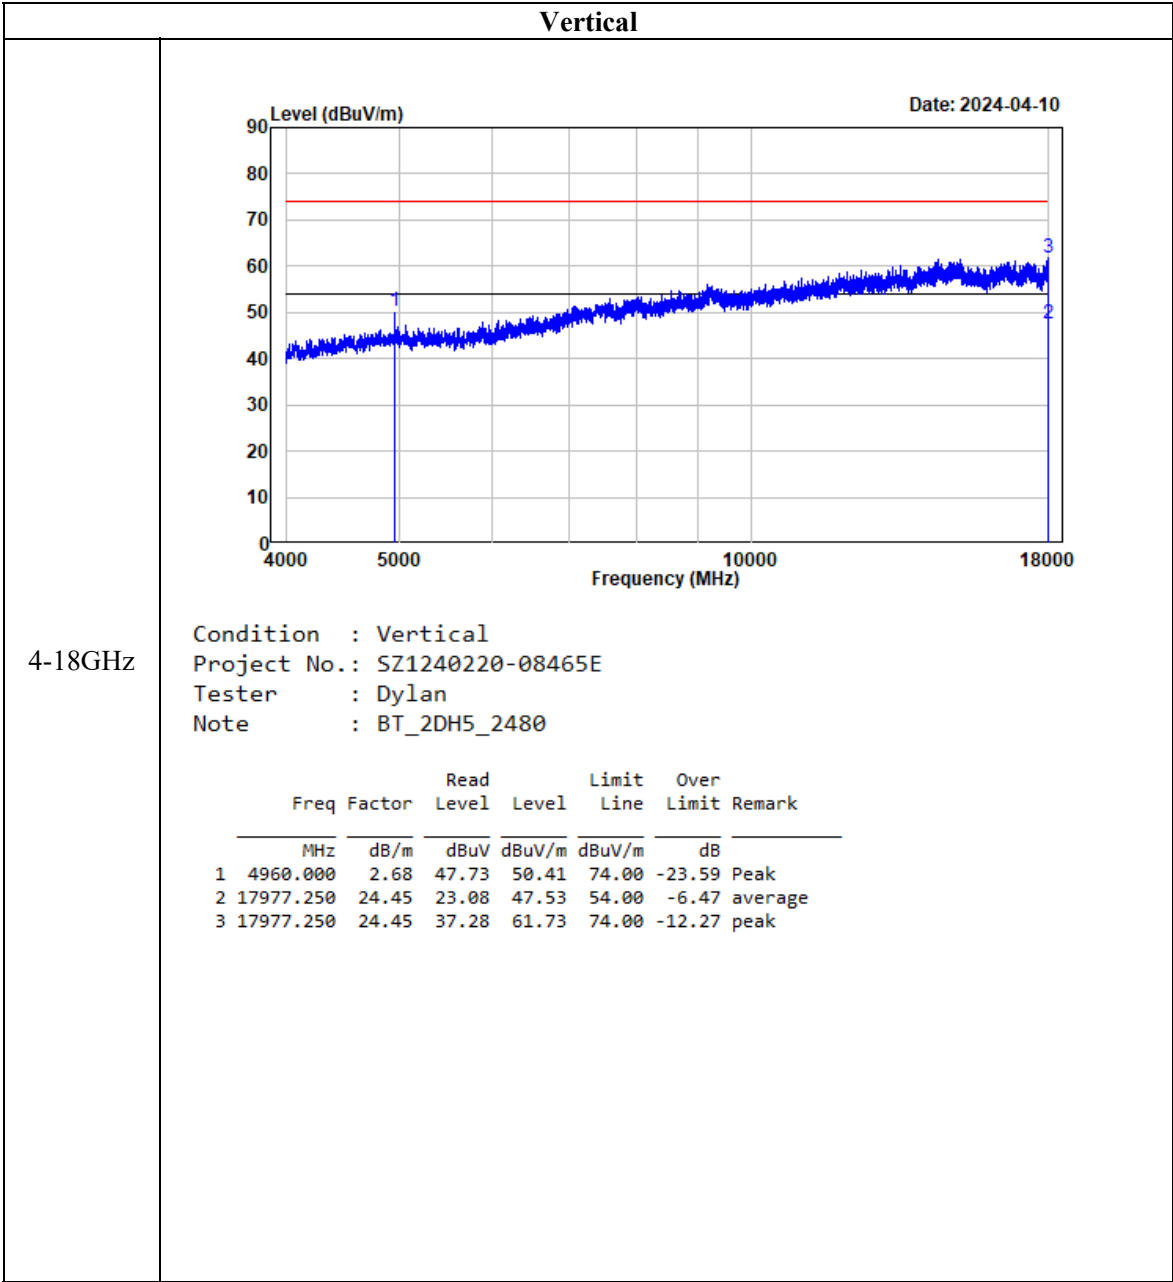

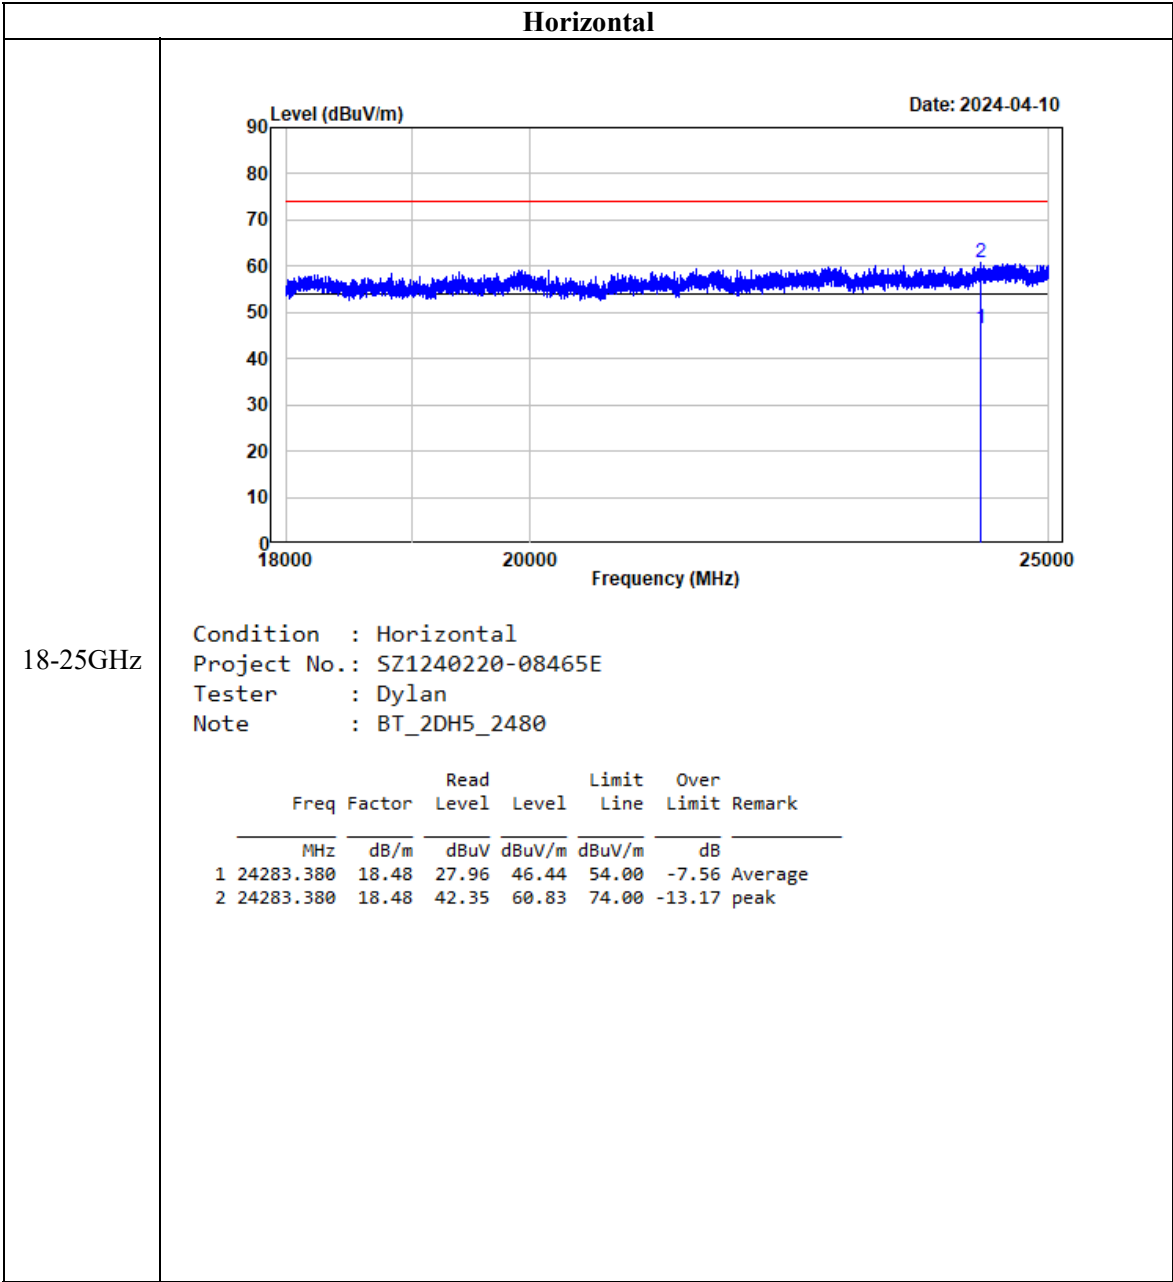

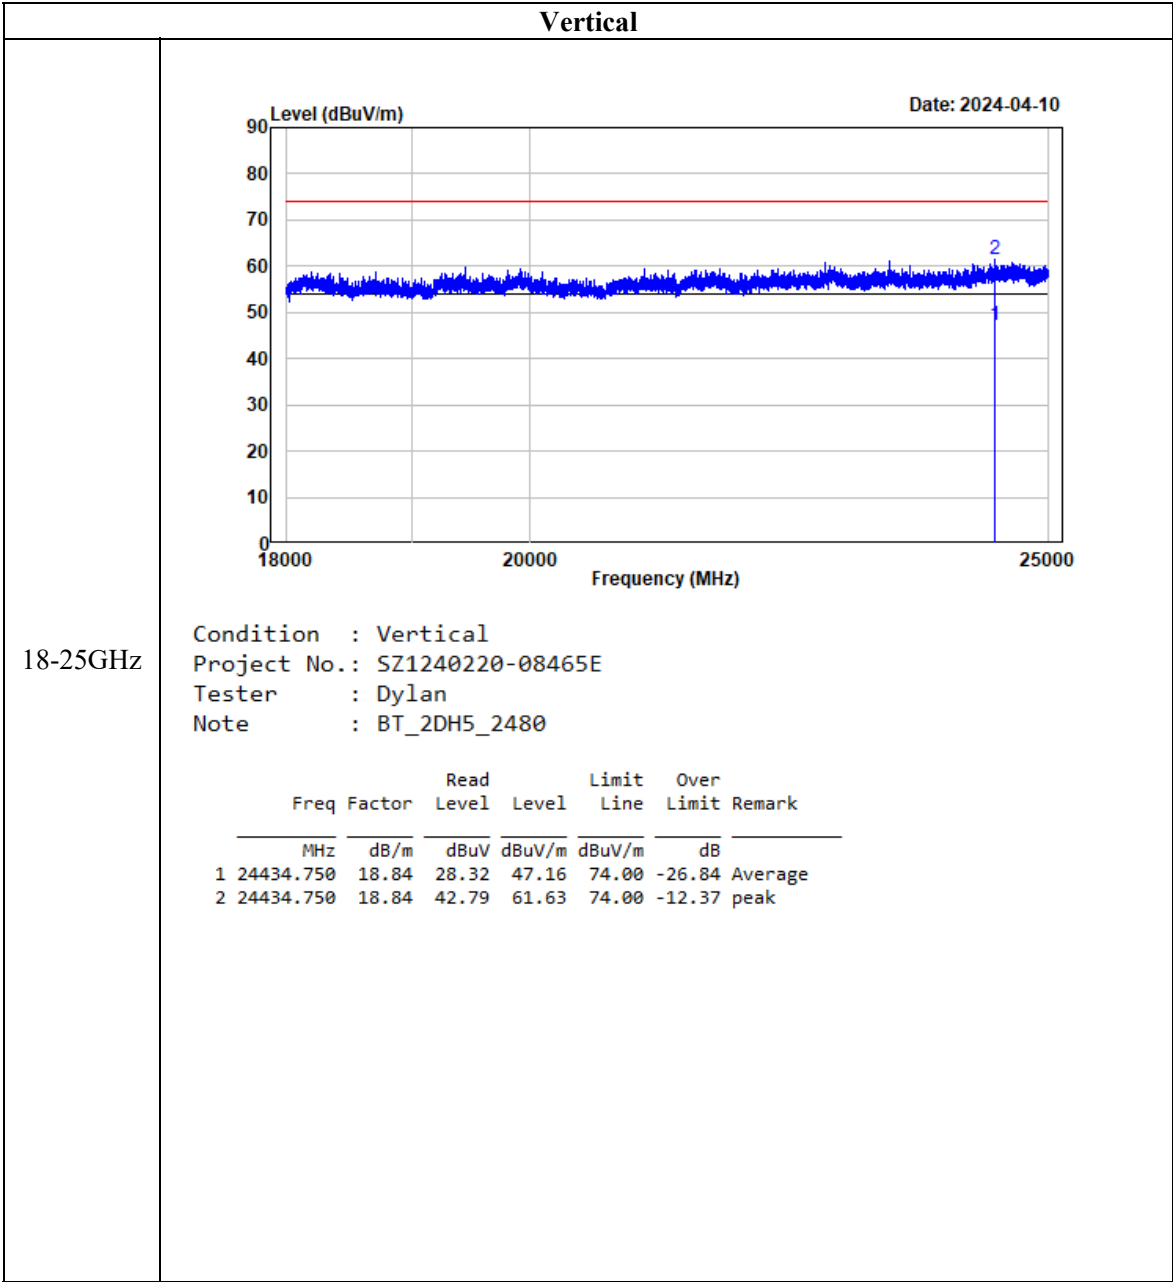

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST


Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

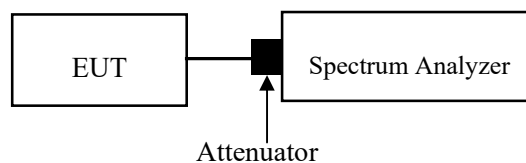

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2024-04-03.

EUT operation mode: Transmitting

Test Result: Compliant.

Test Modes	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
BDR Mode (GFSK)	2402	0.996	0.634
	2441	0.999	0.634
	2480	1.005	0.632
EDR Mode ($\pi/4$ -DQPSK)	2402	1.002	0.860
	2441	1.002	0.858
	2480	1.002	0.860
EDR Mode (8DPSK)	2402	1.005	0.864
	2441	0.999	0.864
	2480	1.002	0.860

Note: the limit = $(2/3) * 20\text{dB}$ bandwidth

FCC §15.247(a) (1) - 20 dB EMISSION BANDWIDTH

Applicable Standard


Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW/ 20dB bandwidth and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.

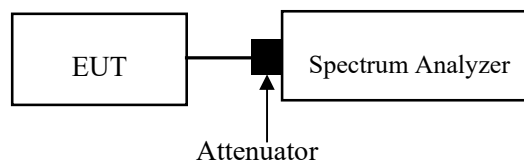

Test Data**Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	101 kPa




The testing was performed by Cheeb Huang on 2024-04-03.

EUT operation mode: Transmitting

Test Result: Compliant.

Test Modes	Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Lowest	2402	0.951
	Middle	2441	0.951
	Highest	2480	0.948
EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.290
	Middle	2441	1.287
	Highest	2480	1.290
EDR Mode (8DPSK)	Lowest	2402	1.296
	Middle	2441	1.296
	Highest	2480	1.290

20 dB Bandwidth

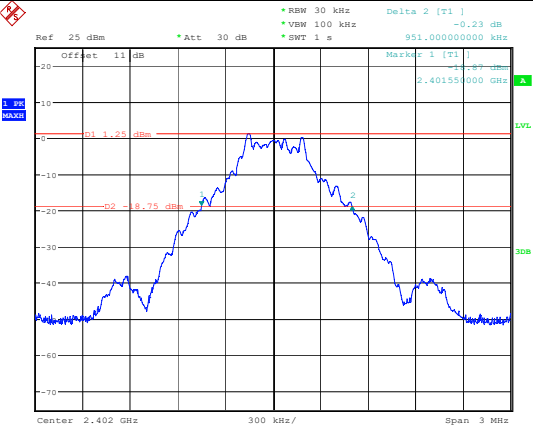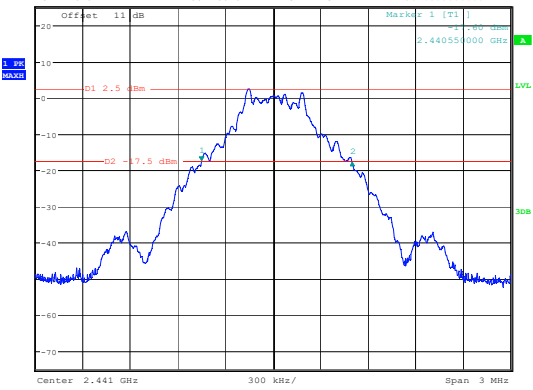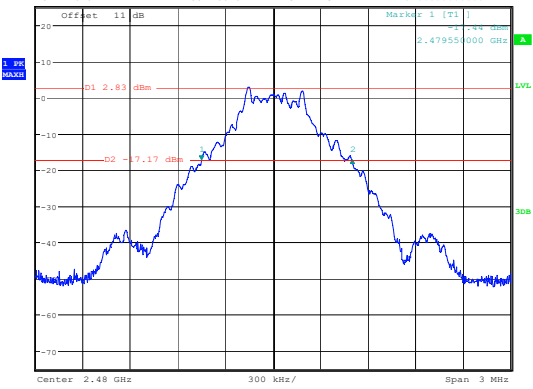Low Channel	BDR Mode (GFSK)  ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Ruang Date: 3.APR.2024 16:31:11
Middle Channel	 ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Ruang Date: 3.APR.2024 16:39:56
High Channel	 ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Ruang Date: 3.APR.2024 16:51:06

Low Channel



Ref 25 dBm Att 30 dB Delta 2 [T1] 0.45 dB
1.296000000 MHz

Offset 11 dB

Marker 1 [T1]
2.4409 dBm
2.44036000 GHz

D1 -0.5 dBm
D2 -18.35 dBm

Center 2.441 GHz Span 3 MHz

3.98 MHz
3dB

ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Huang
Date: 3.APR.2024 16:49:39

[illegible]

ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Huang
Date: 3.APR.2024 16:54:03


FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

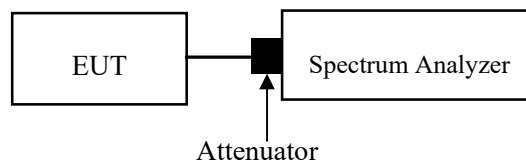**Test Data****Environmental Conditions**


Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2024-04-03.

EUT operation mode: Transmitting

Test Result: Compliant.

Test Modes	Frequency Range (MHz)	Number of Hopping Channel	Limits
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

GFSK

Ref 25 dBm Att 30 dB SMT 10 ms Delta 2 [T1] 1.19 dB 78.07250000 MHz

Offset 11 dB Marker 1 [T1] 2.40183000 GHz

1.99 VdB

Start 2.4 GHz 8.35 MHz/ Stop 2.4835 GHz

ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Huang
Date: 3.APR.2024 17:18:26

Ref 25 dBm Att 30 dB BW 100 kHz VMW 300 kHz SWT 10 ms Delta 2 [F1] 0.94 dB 78.450391026 MHz

Marker 1 [F1] 2.401791109 GHz

Marker 2 [F2] 2.4835 GHz

Start 2.4 GHz Stop 2.4835 GHz

ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Huang
Date: 3.APR.2024 17:59:44

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

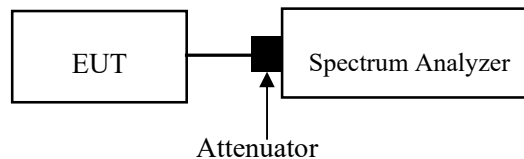

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2024-04-03

EUT operation mode: Transmitting

Test Result: Compliant.

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.394	0.126	0.400
	DH3	2441	1.650	0.264	0.400
	DH5	2441	2.915	0.311	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.391	0.125	0.400
	2DH3	2441	1.647	0.264	0.400
	2DH5	2441	2.910	0.310	0.400
EDR Mode (8DPSK)	3DH1	2441	0.390	0.125	0.400
	3DH3	2441	1.641	0.263	0.400
	3DH5	2441	2.910	0.310	0.400

Note:

DH1/2DH1/3DH1:Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s

DH3/2DH3/3DH3:Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s

DH5/2DH5/3DH5:Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s

Version 1.0 (2023/10/07)

Version 1.0 (2023/10/07)

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT


Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

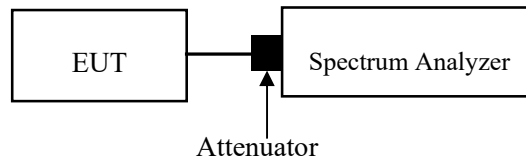

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2024-04-03.

EUT operation mode: Transmitting

Test Result: Compliant.

Test Modes	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
BDR Mode (GFSK)	2402	2.95	21
	2441	4.22	21
	2480	4.48	21
EDR Mode ($\pi/4$ -DQPSK)	2402	5.14	21
	2441	6.29	21
	2480	6.58	21
EDR Mode (8DPSK)	2402	2.65	21
	2441	4.03	21
	2480	4.56	21

FCC §15.247(d) § 5.5 - BAND EDGES TESTING


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

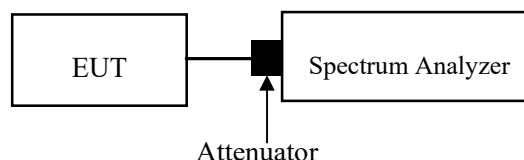

Test Data**Environmental Conditions**


Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	101 kPa

The testing was performed by Cheeb Huang on 2024-04-03.

EUT operation mode: Transmitting

Test Result: Compliant.

**BDR Mode
(GFSK),
Left Side**




**BDR Mode
(GFSK),
Right Side**




Band Edge, Single Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

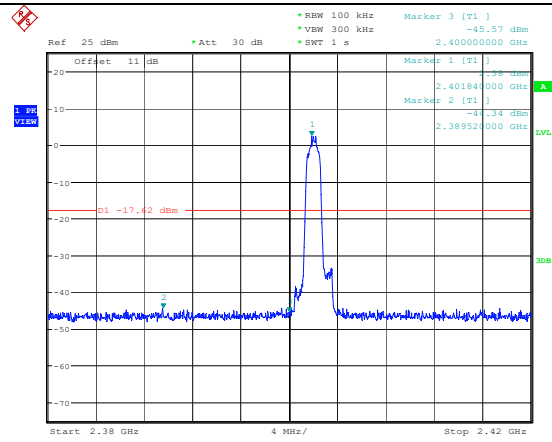


ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Huang
Date: 3.APR.2024 16:34:37


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

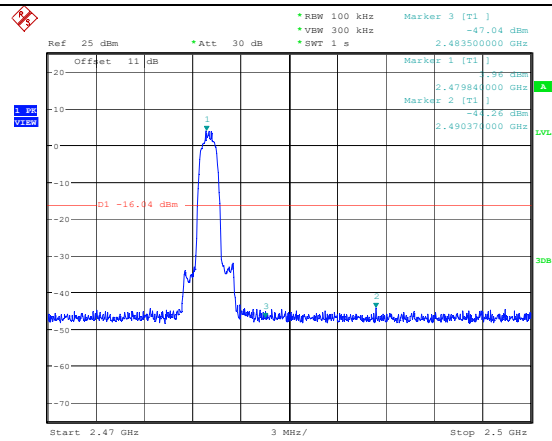


ProjectNo.:SZ1240220-08465E-RF Tester:Cheeb Huang
Date: 3.APR.2024 16:52:44

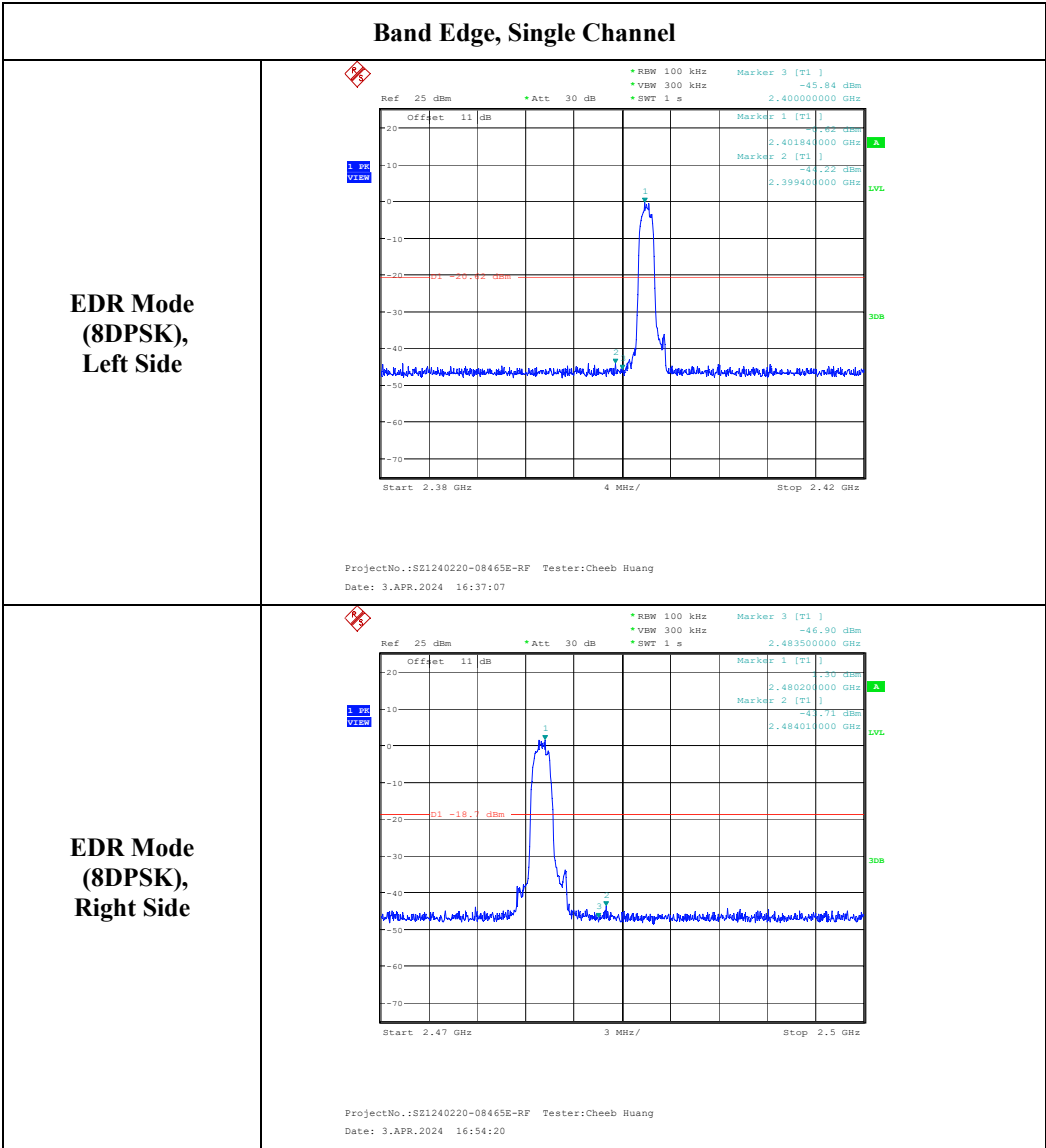

EDR Mode (8DPSK), Left Side



**EDR Mode
(8DPSK),
Right Side**



EUT PHOTOGRAPHS

Please refer to the attachment SZ1240220-08465E-RF External photo and SZ1240220-08465E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment SZ1240220-08465E-RF-00B Test Setup photo.

******* END OF REPORT *******