



REPORT No.: SZ20070414W05

TEST REPORT

APPLICANT : Realme Chongqing Mobile
Telecommunications Corp., Ltd.

PRODUCT NAME : Mobile Phone

MODEL NAME : RMX2170

BRAND NAME : realme

FCC ID : 2AUYFRMX2170

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2020-07-31

TEST DATE : 2020-08-04 to 2020-08-26

ISSUE DATE : 2020-08-27

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. The Channel Number and Frequency	5
1.4. Test Standards and Results	6
1.5. Environmental Conditions	7
2. 47 CFR Part 15C Requirements	8
2.1. Antenna Requirement	8
2.2. Hopping Mechanism	8
2.3. Number of Hopping Frequency	9
2.4. Duty Cycle of Test Signal	12
2.5. Maximum Peak Conducted Output Power	13
2.6. Maximum Average Conducted Output Power	20
2.7. 20dB Bandwidth	22
2.8. Carried Frequency Separation	29
2.9. Time of Occupancy (Dwell time)	32
2.10. Conducted Spurious Emissions	39
2.11. Conducted Emission	52
2.12. Restricted Frequency Bands	56
2.13. Radiated Emission	66
Annex A Test Uncertainty	79
Annex B Testing Laboratory Information	80

Change History		
Version	Date	Reason for change
1.0	2020-08-27	First edition



1. Technical Information

Note: Provide by applicant.

1.1.Applicant and Manufacturer Information

Applicant:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Applicant Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China
Manufacturer:	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer Address:	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

1.2.Equipment Under Test (EUT) Description

Product Name:	Mobile Phone	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	11	
Software Version:	realme UI V1.0	
Equipment Type:	Bluetooth classic	
Bluetooth Version:	5.0	
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))	
Operating Frequency Range:	2402MHz–2480MHz	
Antenna Type:	FPC Antenna	
Antenna Gain:	-3.0dBi	
Accessory Information:	Battery 1	
	Brand Name:	realme
	Model No.:	BLP799
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	2200mAh
	Rated Voltage:	7.74V
	Charge Limit:	8.90V
	Manufacturer:	SUNWODA Electronic Co., Ltd.



Accessory Information:	Battery 2	
	Brand Name:	realme
	Model No.:	BLP799
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	2200mAh
	Rated Voltage:	7.74V
	Charge Limit:	8.90V
	Manufacturer:	Dongguan NVT Technology Co.,Ltd.
	AC Adapter	
	Brand Name:	realme
	Model No.:	VCA7JAUH
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=2A, 10V=6.5A
	Rated Input:	100-240V~50/60Hz, 1.8A
	Manufacturer:	Huizhou Golden Lake Industrial Co., Ltd.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3.The Channel Number and Frequency

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.



1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Aug 26, 2020	Lu Qiang	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Aug 25, 2020	Lu Qiang	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Aug 25, 2020	Lu Qiang	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Aug 25, 2020	Lu Qiang	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Aug 25, 2020	Lu Qiang	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Aug 26, 2020	Lu Qiang	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Aug 25, 2020	Lu Qiang	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Aug 26, 2020	Lu Qiang	PASS	No deviation
11	15.207	Conducted Emission	Aug 04, 2020	Huang Zhiye	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	Aug 16, 2020	Gao Jianrou	PASS	No deviation
13	15.209, 15.247(d)	Radiated Emission	Aug 15, 2020	Gao Jianrou	PASS	No deviation



Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB558074 D01 v05r02.

Note 2: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The Ref offset 1.5dB means the cable loss is 1.5dB.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.5.Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15C Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a FPC antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

2.2. Hopping Mechanism

2.2.1. Requirement

According to FCC §15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC §15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

2.2.2. Result: Compliant

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".


2.3. Number of Hopping Frequency

2.3.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.3.2. Test Description

Test Setup:

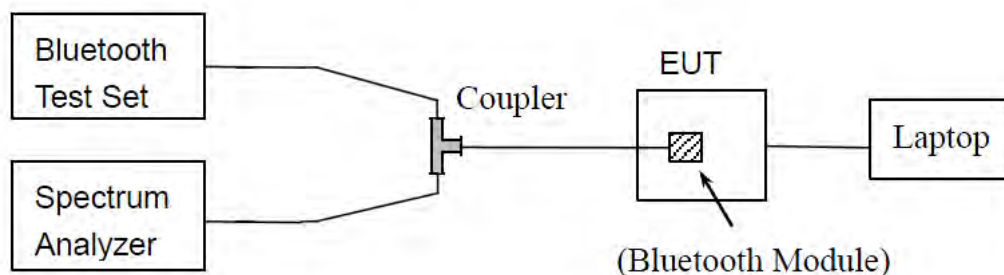

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.3.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	PASS
π/4-DQPSK	2400 - 2483.5	79	15	PASS
8-DPSK	2400 - 2483.5	79	15	PASS

Agilent Spectrum Analyzer - Swept SA

Marker 2 Δ 78.90750000 MHz

Ref Offset 1.5 dB
Ref 20.00 dBm

10 dB/div
Log

Δ Mkr2 78.907 5 MHz
-1.492 dB

Start 2.40000 GHz
#Res BW 300 kHz

Stop 2.48350 GHz
Sweep 1.133 ms (1001 pts)

Marker 1
Marker 3
Marker 4
Marker 5
Marker 6
More
1 of 2

The screenshot displays a spectrum analyzer interface. At the top, the title bar reads 'Agilent Spectrum Analyzer - Swept SA'. Below it, a status bar shows 'Marker 2 Δ 78.90750000 MHz'. The main display area shows a frequency spectrum with a yellow trace. A marker is placed at 78.9075 MHz, with a value of -1.492 dB. The y-axis is labeled '10 dB/div Log' and ranges from -70.0 to 10.0. The x-axis is labeled 'Start 2.40000 GHz' and 'Stop 2.48350 GHz'. The sweep rate is 'Sweep 1.133 ms (1001 pts)'. On the right side, there is a vertical list of markers: Marker 1, Marker 3, Marker 4, Marker 5, Marker 6, and More (1 of 2).

(GFSK)



($\pi/4$ -DQPSK)



(8-DPSK)

2.4.Duty Cycle of Test Signal


2.4.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.4.2.Test Description

Test Setup:

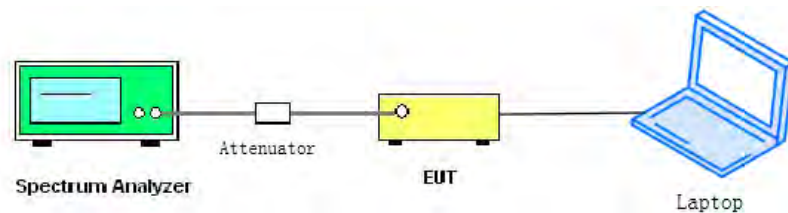

ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.

2.4.3.Test Result

Test Mode	Duty Cycle (%) (D)	Duty Factor ($10 \cdot \lg[1/D]$)
GFSK	77.33	1.12
$\pi/4$ -DQPSK	77.33	1.12
8-DPSK	76.80	1.15


2.5.Maximum Peak Conducted Output Power

2.5.1.Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.5.2.Test Description

Test Setup:

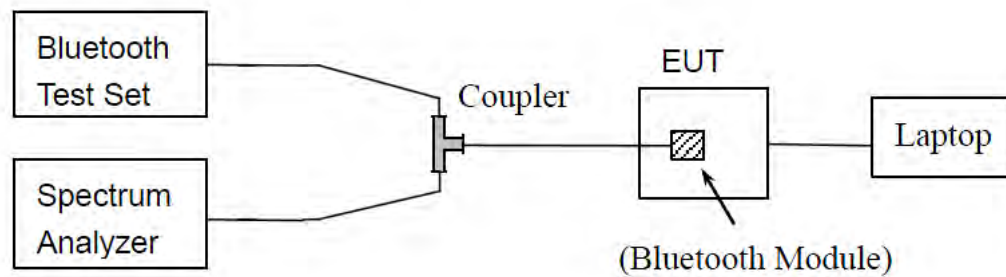

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.




2.5.3.Test Result

GFSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	12.13	0.016	20.96	0.125	PASS
39	2441	11.33	0.014			PASS
78	2480	10.94	0.012			PASS

B.Test Plot:

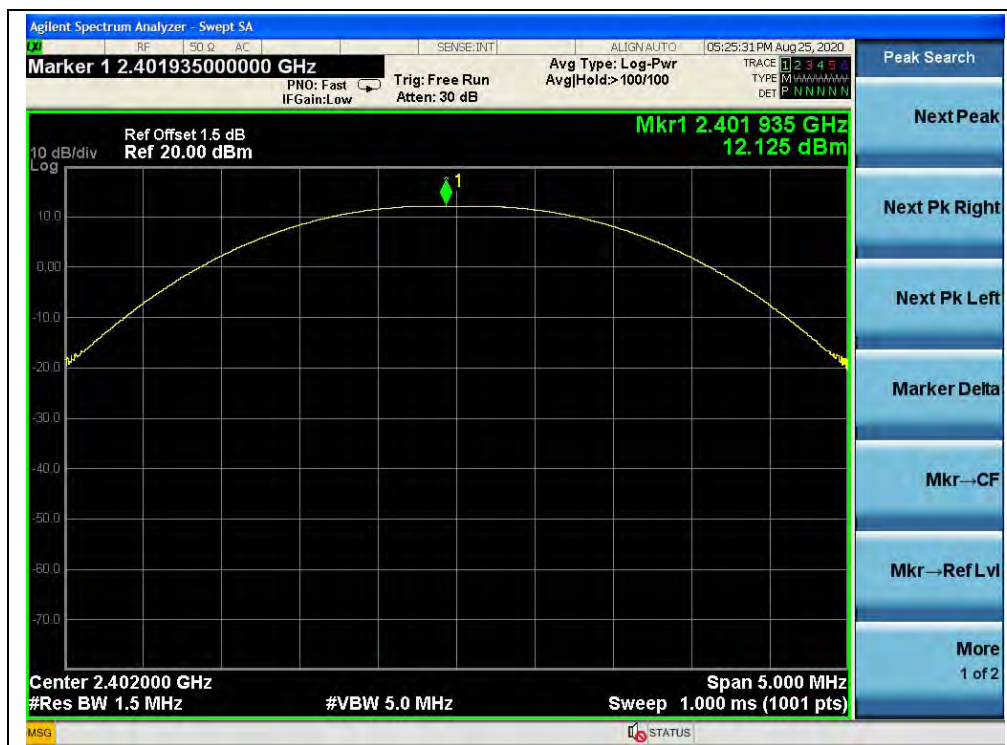

(Channel 0, GFSK)



(Channel 39, GFSK)



(Channel 78, GFSK)


 $\pi/4$ -DQPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	11.62	0.015	20.96	0.125	PASS
39	2441	10.55	0.011			PASS
78	2480	10.43	0.011			PASS

B.Test Plot:

(Channel 0, $\pi/4$ -DQPSK)

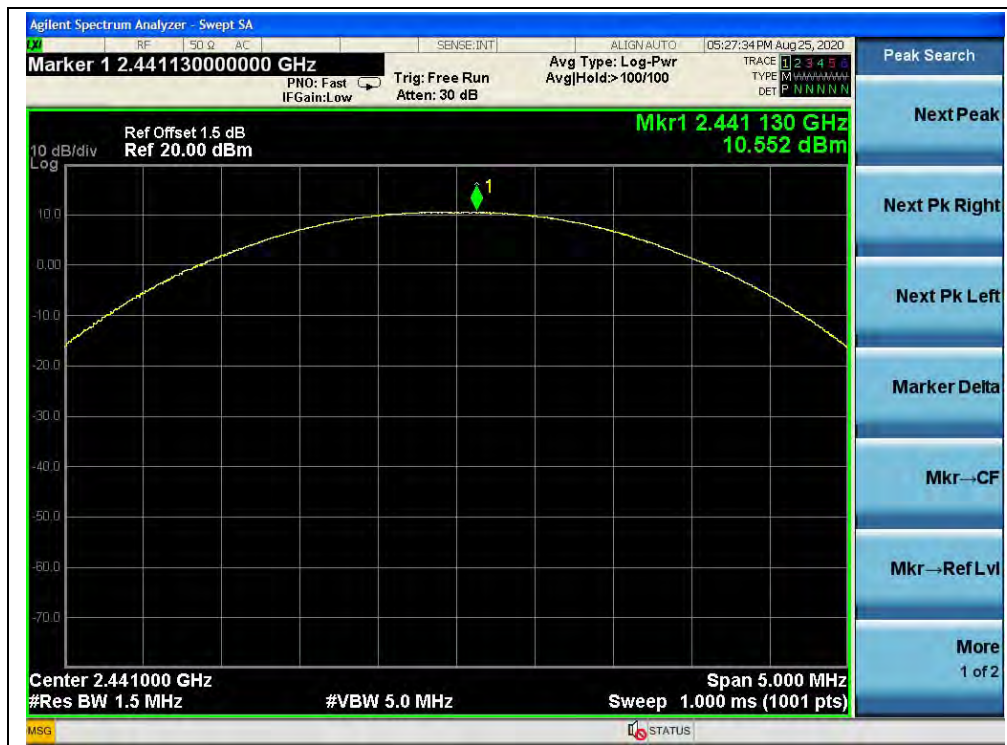
(Channel 39, $\pi/4$ -DQPSK)

(Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	11.80	0.015	20.96	0.125	PASS
39	2441	10.80	0.012			PASS
78	2480	10.65	0.012			PASS

B.Test Plot:

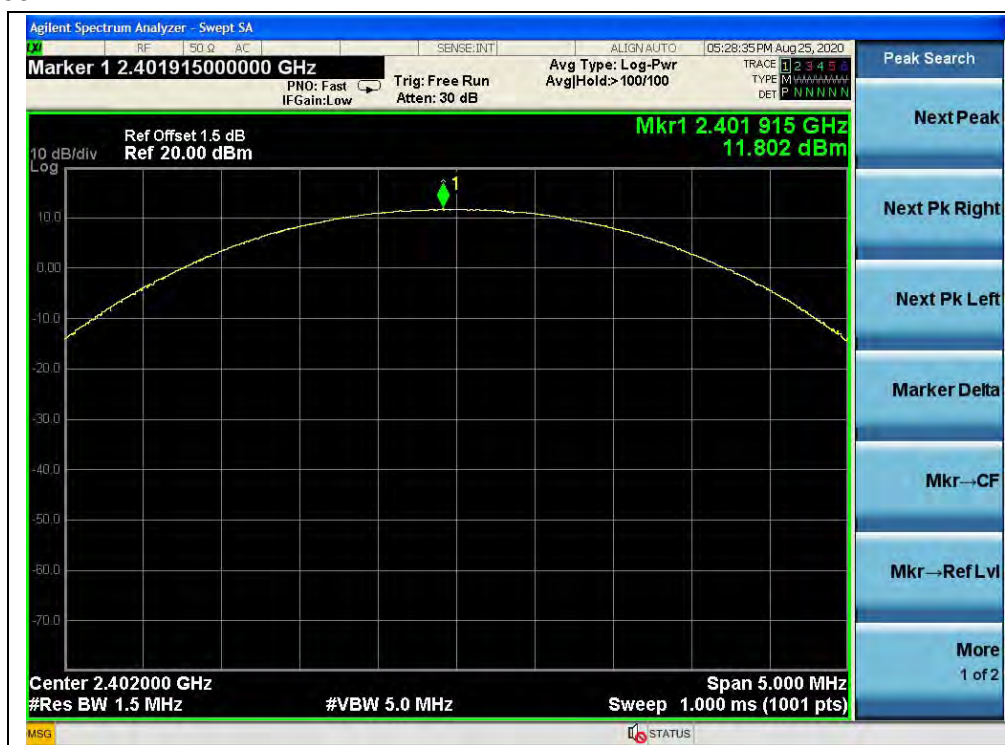

(Channel 0, 8-DPSK)



(Channel 39, 8-DPSK)



(Channel 39, 8-DPSK)

2.6. Maximum Average Conducted Output Power


2.6.1. Requirement

According to FCC §15.247(b), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum average output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.6.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

Test Setup:

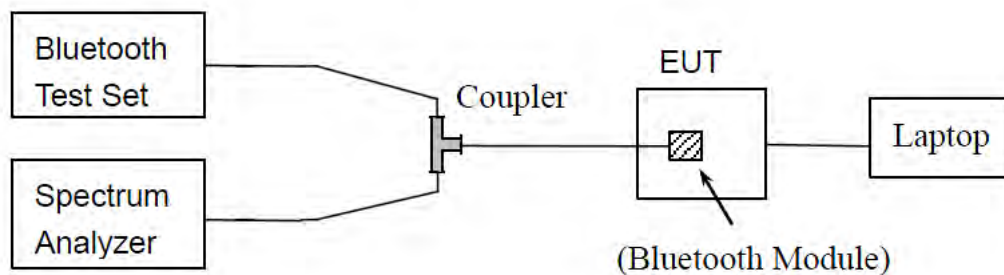

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

**2.6.3.Test Result****GFSK Mode**

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
0	2402	10.63	1.12	11.75	0.015	20.96	0.125	PASS
39	2441	9.86		10.98	0.013			PASS
78	2480	9.41		10.53	0.011			PASS

 $\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
			Duty Factor	Duty factor Calculated				
		dBm		dBm	W	dBm	W	
0	2402	7.95	1.12	9.07	0.008	20.96	0.125	PASS
39	2441	6.67		7.79	0.006			PASS
78	2480	6.97		8.09	0.006			PASS

8-DPSK Mode

Channel	Frequency (MHz)	Measured	Average Power			Limit		Verdict
		Duty Factor	Duty factor Calculated					
			dBm	dBm	W	dBm	W	
0	2402	8.14	1.15	9.29	0.008	20.96	0.125	PASS
39	2441	6.81		7.96	0.006			PASS
78	2480	6.94		8.09	0.006			PASS


2.7.20dB Bandwidth

2.7.1.Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.7.2.Test Description

Test Setup:

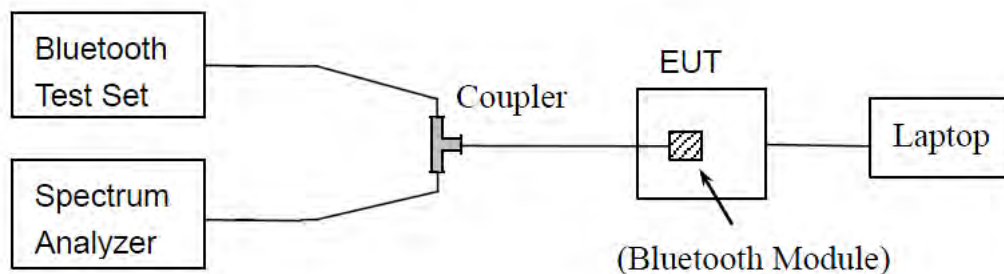

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.7.3.Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold



2.7.4. Test Result

GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	0.944	PASS
39	2441	0.947	PASS
78	2480	0.948	PASS

B. Test Plot:



(Channel 0, GFSK)



(Channel 39, GFSK)



(Channel 78, GFSK)

 $\pi/4$ -DQPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.306	PASS
39	2441	1.284	PASS
78	2480	1.303	PASS

B.Test Plot:

(Channel 0, $\pi/4$ -DQPSK)

(Channel 39, $\pi/4$ -DQPSK)(Channel 78, $\pi/4$ -DQPSK)

**8-DPSK Mode****A.Test Verdict:**

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Result
0	2402	1.302	PASS
39	2441	1.300	PASS
78	2480	1.302	PASS

B.Test Plot:

(Channel 0, 8-DPSK)



(Channel 39, 8-DPSK)



(Channel 78, 8-DPSK)


2.8.Carried Frequency Separation

2.8.1.Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.8.2.Test Description

Test Setup:

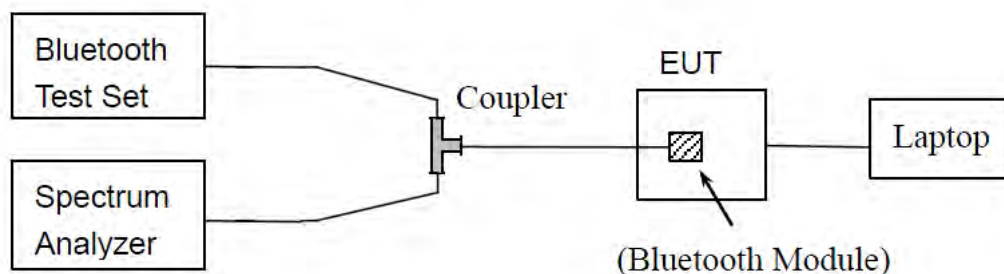

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.8.3.Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.8.4. Test Result

A. Test Verdict:

Test Mode	Measured Channel Numbers	Carried Frequency Separation (MHz)	20dBband width (MHz)	Min. Limit	Verdict
GFSK	39 and 40	1.083	0.948	two-thirds of the 20dBbandwidth	PASS
$\pi/4$ -DQPSK	39 and 40	1.002	1.306		PASS
8-DPSK	39 and 40	1.038	1.302		PASS

B. Test Plot:



(GFSK)



($\pi/4$ -DQPSK)



(8-DPSK)


2.9.Time of Occupancy (Dwell time)

2.9.1.Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.9.2.Test Description

Test Setup:

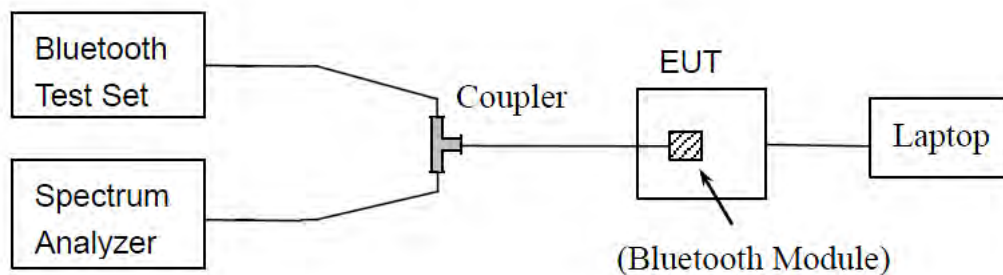

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.9.3.Test Procedure

Option 1:

DH1: Dwell time equal to Pulse time (ms) * (1600 / 2 / 79) * 31.6 Millisecond
 DH3: Dwell time equal to Pulse time (ms) * (1600 / 4 / 79) * 31.6 Millisecond
 DH5: Dwell time equal to Pulse Time (ms) * (1600 / 6 / 79) * 31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) * (800 / 2 / 20) * (0.4 * 20) Millisecond
 DH3: Dwell time equal to Pulse time (ms) * (800 / 4 / 20) * (0.4 * 20) Millisecond
 DH5: Dwell time equal to Pulse Time (ms) * (800 / 6 / 20) * (0.4 * 20) Millisecond.



GFSK Mode

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.37	118.40	59.20	0.4	PASS
DH3	1.64	262.40	131.20		PASS
DH5	2.88	307.20	153.60		PASS

Agilent Spectrum Analyzer - Swept SA

Marker 2 Δ 370.000 μ s

PNO: Fast $\rightarrow$ Trig: Free Run
IF Gain: Low Atten: 34 dB

Avg Type: Log-Pwr

TRACE 1 2 3 4 5 6
TYPE W W W W W W W W
DET P N N N N N N

Ref Offset 1.5 dB
Ref 25.00 dBm

Δ Mkr2 370.0 μ s
0.21 dB

10 dB/div
Log

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 3.0 MHz

Span 0 Hz
Sweep 10.00 ms (1001 pts)

Marker

Select Marker 2

Normal

Delta

Fixed


Off

Properties


More 1 of 2

MSG STATUS

(DH1, GFSK)

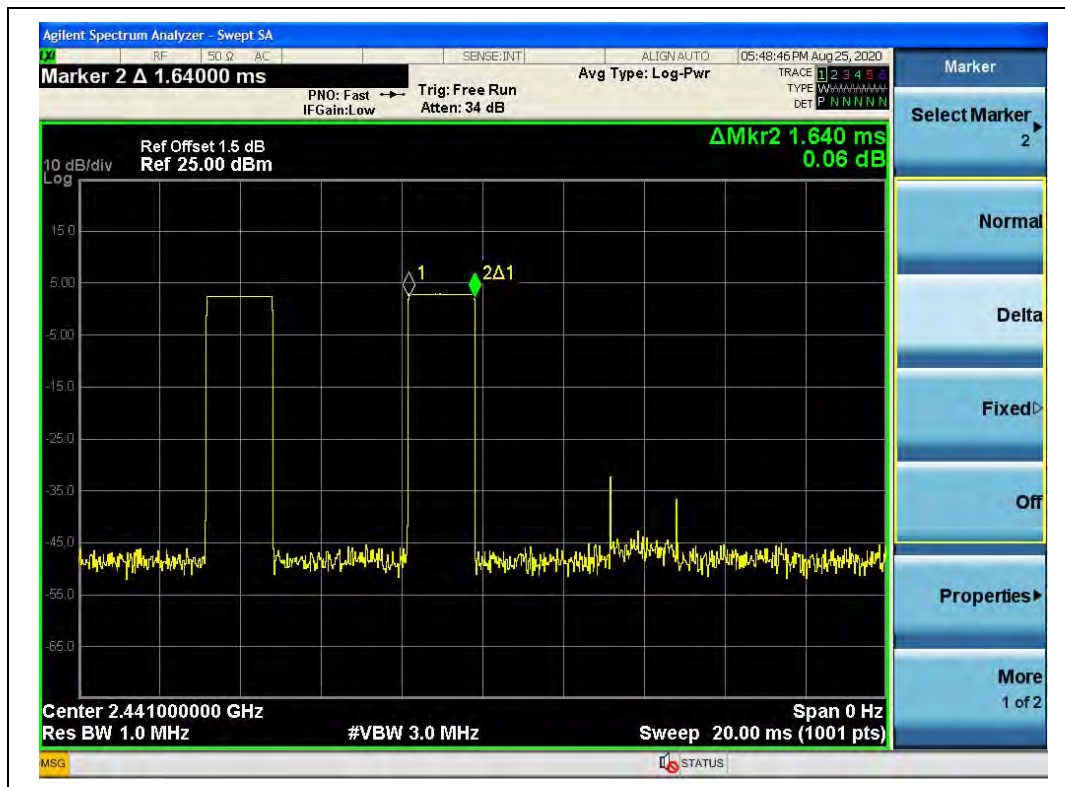

(DH3, GFSK)

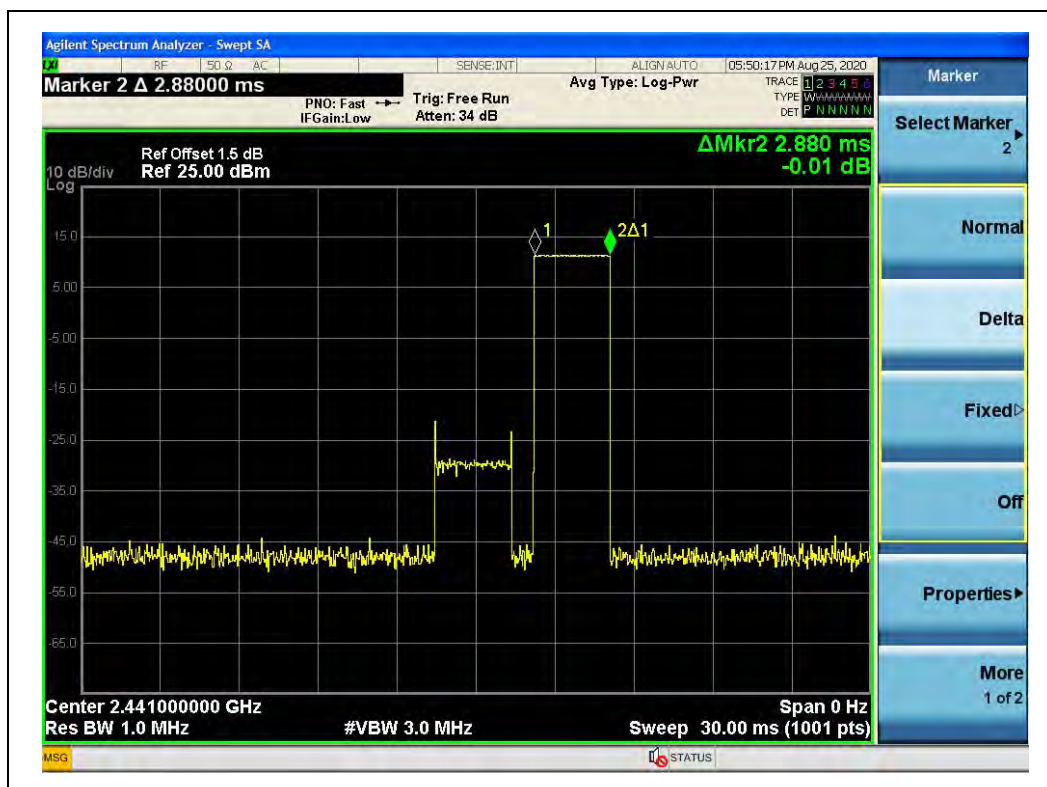

(DH5, GFSK)



A.Test Verdict:

DH Packet	Pulse Width (ms)	Dwell Time (ms)		Limit (sec)	Verdict
		Normal Mode	AFH Mode		
DH1	0.38	121.60	60.80	0.4	PASS
DH3	1.50	240.00	120.00		PASS
DH5	2.88	307.20	153.60		PASS

Agilent Spectrum Analyzer - Swept SA

RF 50 Ω AC SENSE:INT ALIGN AUTO 05:51:35 PM Aug 25, 2020

Marker 2 Δ 380.000 μs Avg Type: Log-Pwr

Trace 1 2 3 4 5
TYPE W W W W W
DET P N N N N

PNO: Fast → Trig: Free Run
IF Gain: Low Atten: 34 dB

Ref Offset 1.5 dB
Ref 25.00 dBm

ΔMkr2 380.0 μs
0.94 dB

10 dB/div
Log


1 2Δ1

Center 2.441000000 GHz Span 0 Hz
Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (1001 pts)


MSG STATUS

Marker
Select Marker 2
Normal
Delta
Fixed
Off
Properties
More 1 of 2


(DH1, $\pi/4$ -DQPSK)

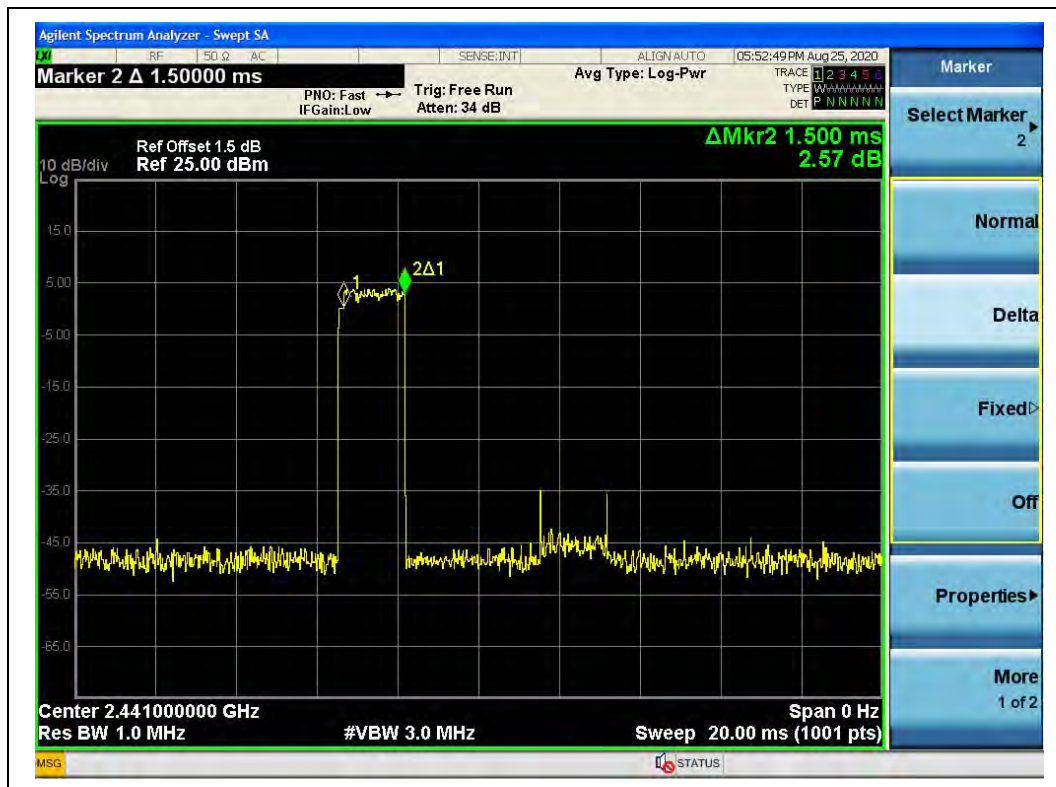
(DH3, $\pi/4$ -DQPSK)

(DH5, $\pi/4$ -DQPSK)

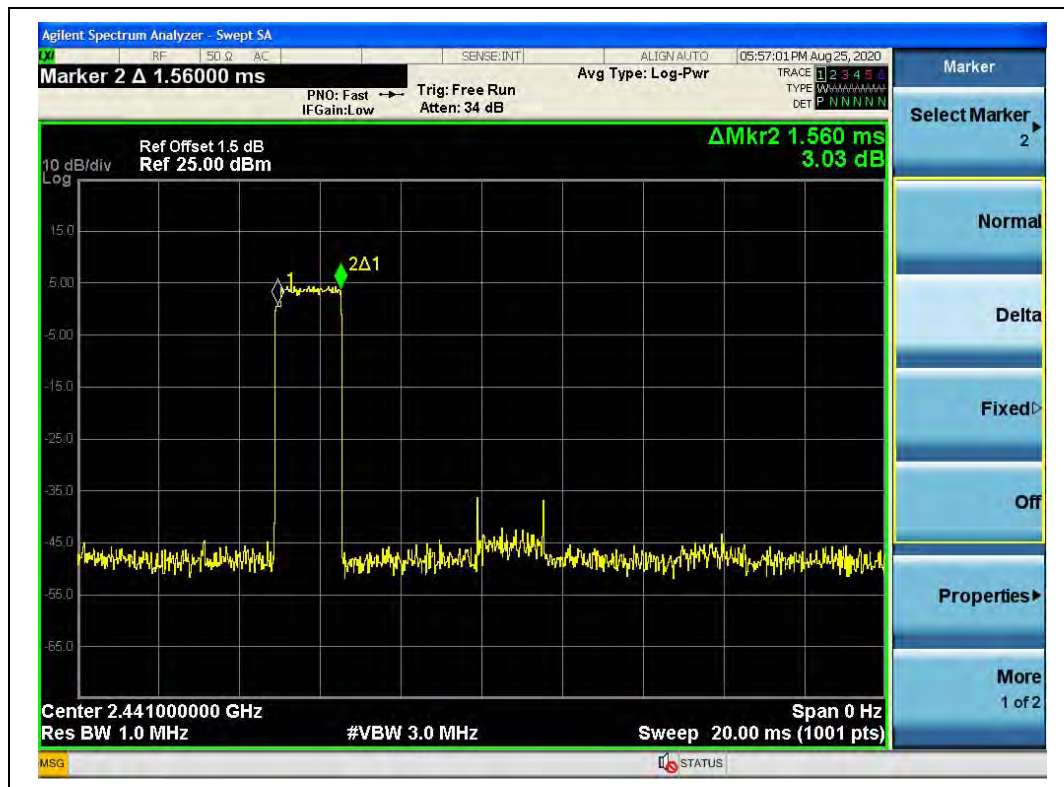

(DH3, 8-DPSK)

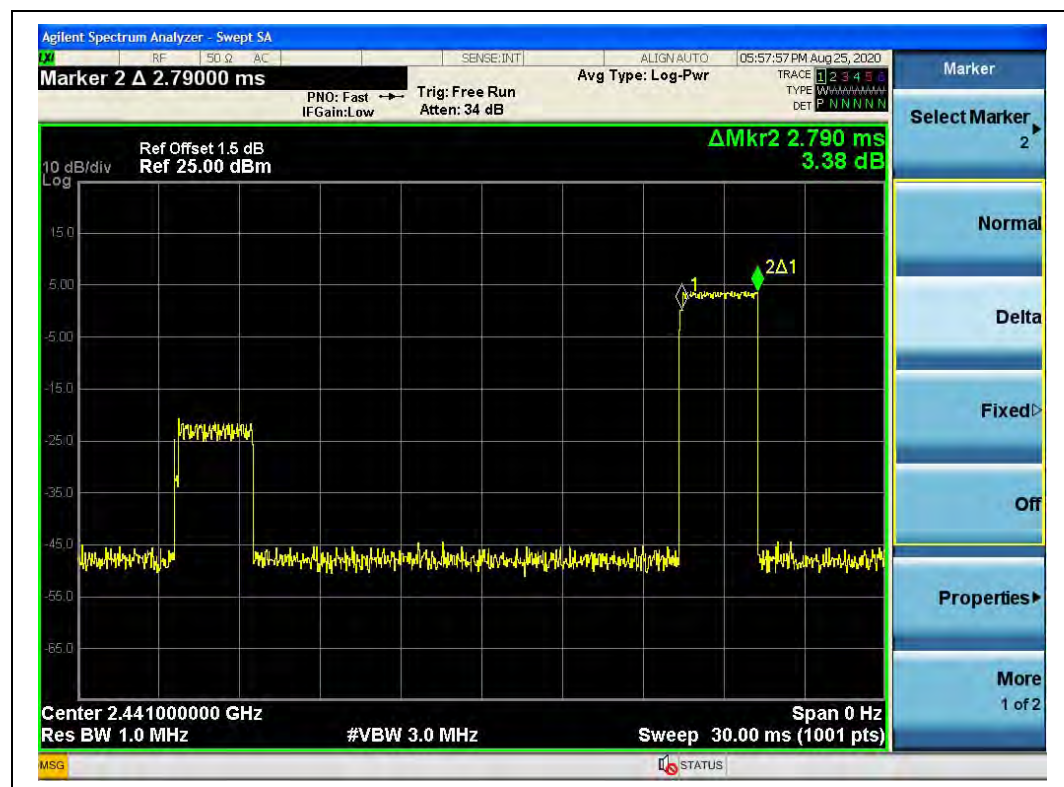

(DH5, 8-DPSK)


2.10. Conducted Spurious Emissions

2.10.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.10.2. Test Description

Test Setup:

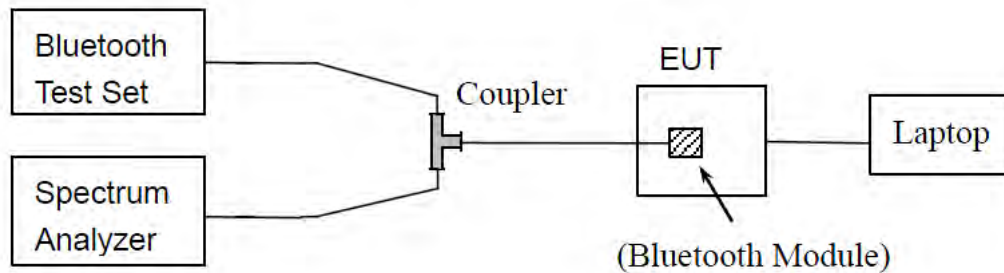

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Test Set through the coupler; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.




2.10.4. Test Result

GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-52.06	10.89	-9.11	PASS
39	2441	-52.05	10.73	-9.27	PASS
78	2480	-48.76	10.44	-9.56	PASS

B. Test Plot:

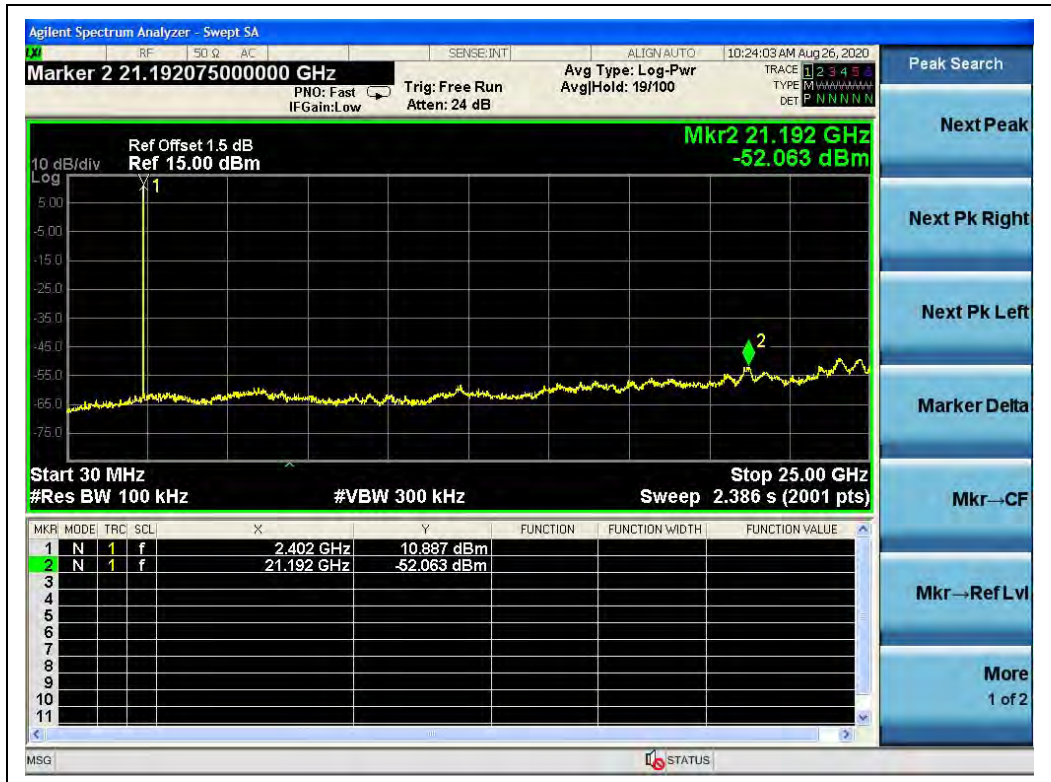


(30MHz to 25GHz, Channel 0, GFSK)

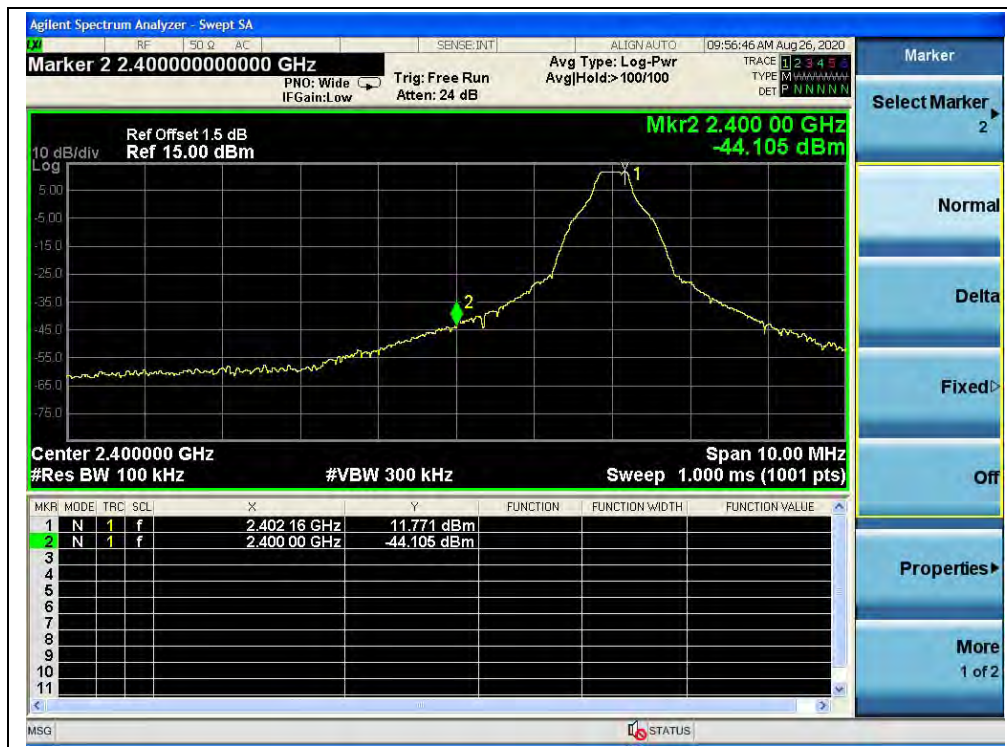

(Band edge, Channel 0, GFSK)



(Band edge with hopping on, Channel 0, GFSK)

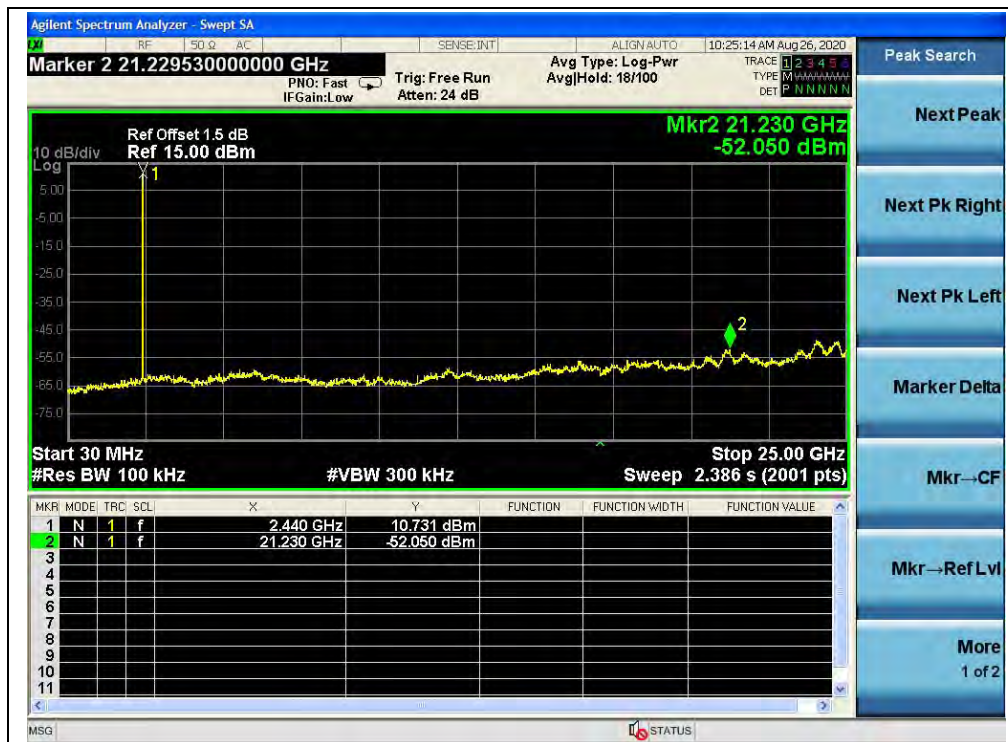

(30MHz to 25GHz, Channel 39, GFSK)



(30MHz to 25GHz, Channel 78, GFSK)



(Band edge, Channel 78, GFSK)



(Band edge with hopping on, Channel 78, GFSK)



$\pi/4$ -DQPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-48.56	7.05	-12.95	PASS
39	2441	-48.57	7.89	-12.11	PASS
78	2480	-48.33	6.64	-13.36	PASS

B.Test Plot:



(30MHz to 25GHz, Channel 0, $\pi/4$ -DQPSK)


(Band edge, Channel 0, $\pi/4$ -DQPSK)

(Band edge with hopping on, Channel 0, $\pi/4$ -DQPSK)


(30MHz to 25GHz, Channel 39, $\pi/4$ -DQPSK)

(30MHz to 25GHz, Channel 78, $\pi/4$ -DQPSK)


(Band edge, Channel 78, $\pi/4$ -DQPSK)

(Band edge with hopping on, Channel 78, $\pi/4$ -DQPSK)



8-DPSK Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
0	2402	-48.85	6.90	-13.10	PASS
39	2441	-47.56	7.54	-12.46	PASS
78	2480	-51.49	6.46	-13.54	PASS

B.Test Plot:




(30MHz to 25GHz, Channel 0, 8-DPSK)




(Band edge, Channel 0, 8-DPSK)



(Band edge with hopping on, Channel 0, 8-DPSK)

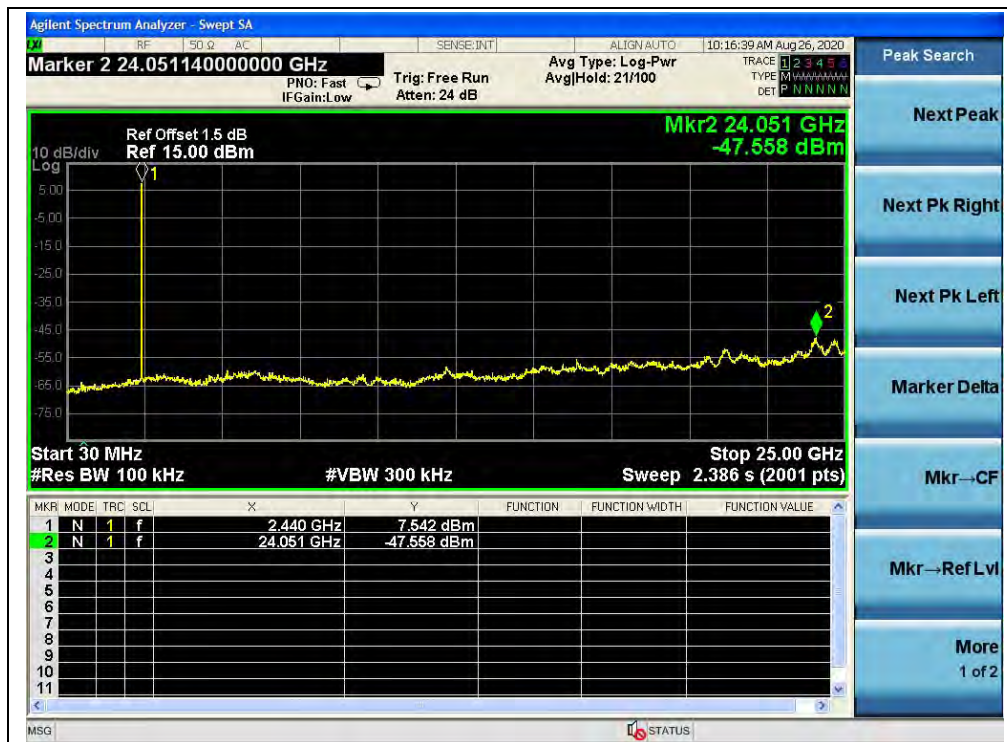

(30MHz to 25GHz, Channel 39, 8-DPSK)

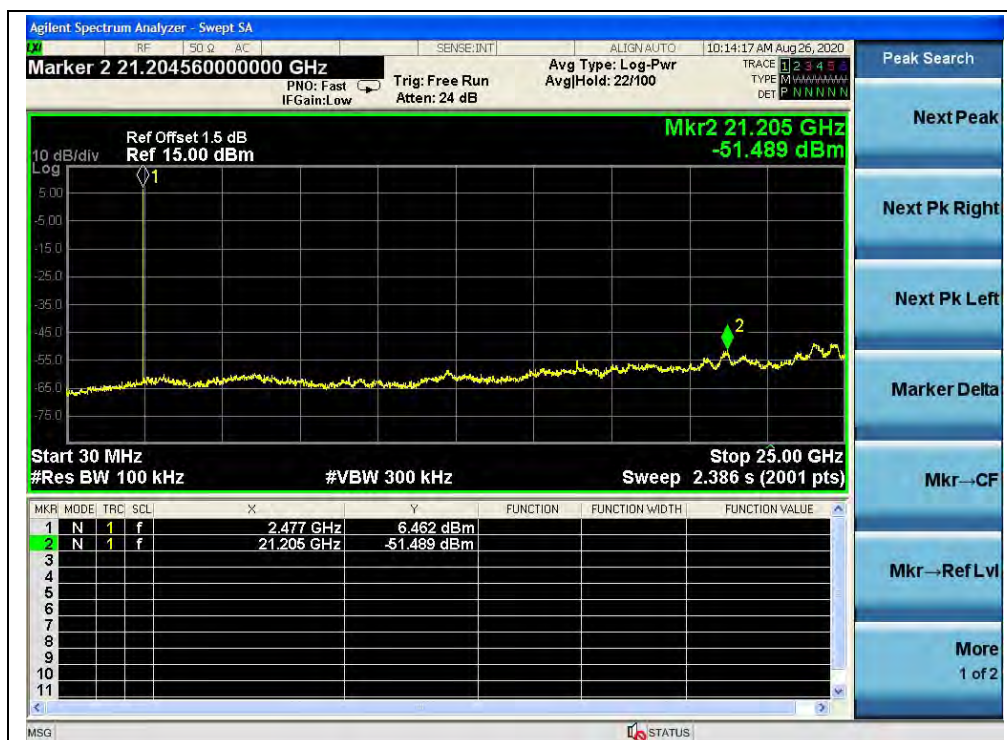

(30MHz to 25GHz, Channel 78, 8-DPSK)



(Band edge, Channel 78, 8-DPSK)



(Band edge with hopping on, Channel 78, 8-DPSK)

2.11. Conducted Emission

2.11.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.11.2. Test Description

Test Setup:

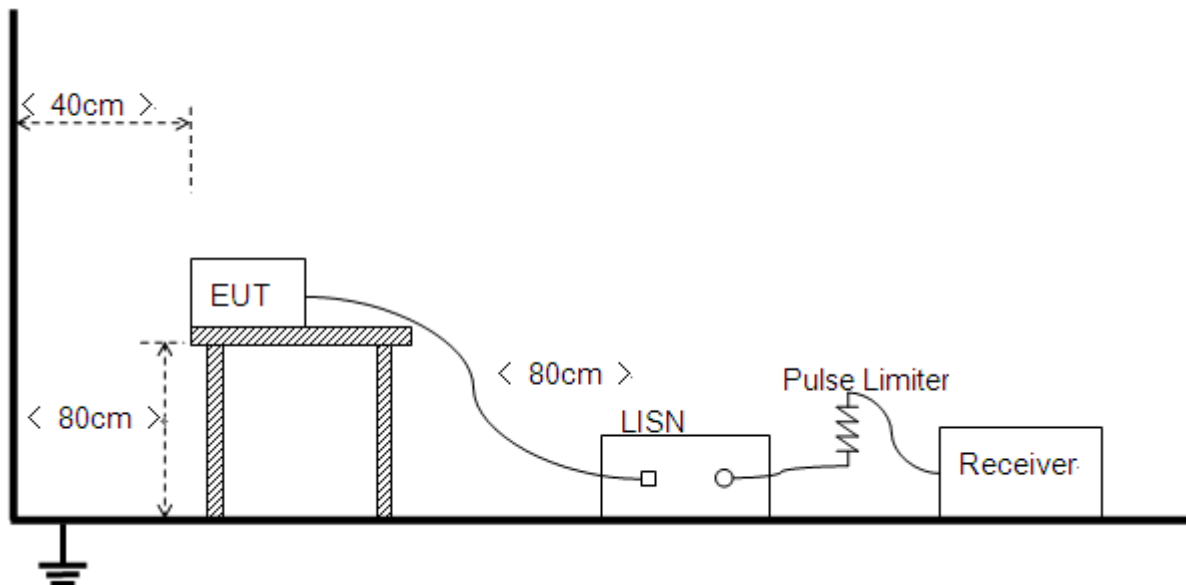

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.11.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+adapter+earphone+BT TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

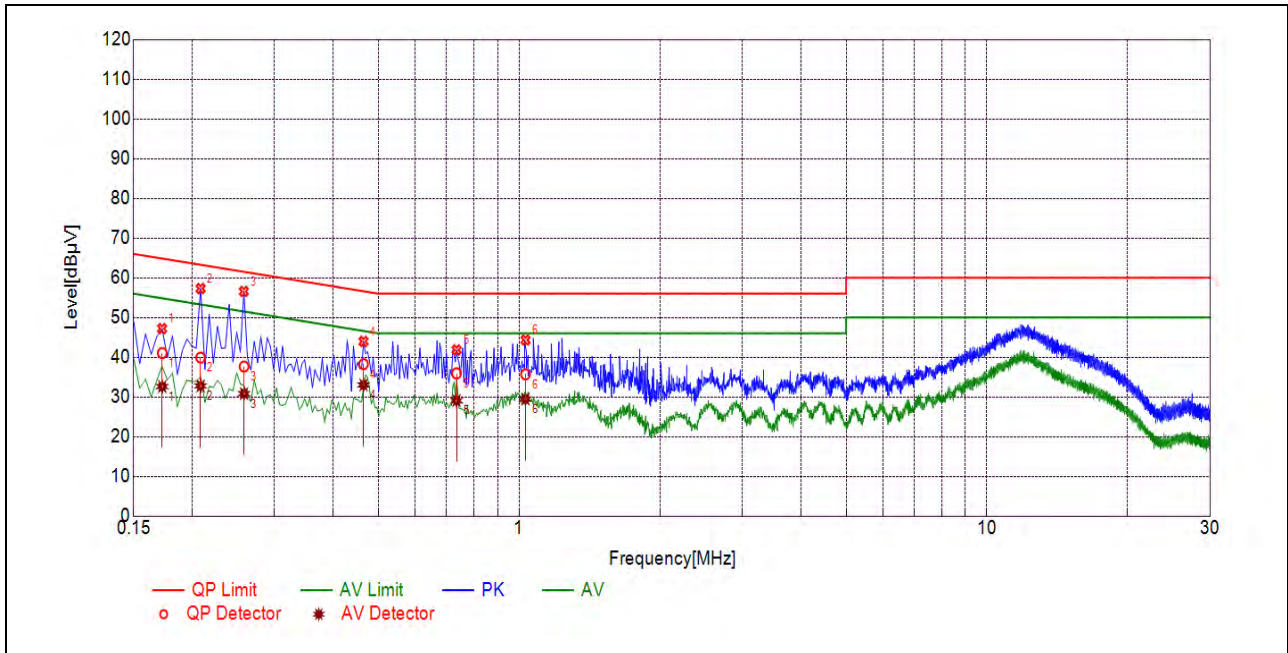

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1726	41.05	32.62	64.84	54.84	Line	PASS
2	0.2085	39.90	32.76	63.27	53.27		PASS
3	0.2582	37.65	30.83	61.49	51.49		PASS
4	0.4649	38.25	33.01	56.61	46.61		PASS
5	0.7348	35.92	29.08	56.00	46.00		PASS
6	1.0318	35.67	29.47	56.00	46.00		PASS

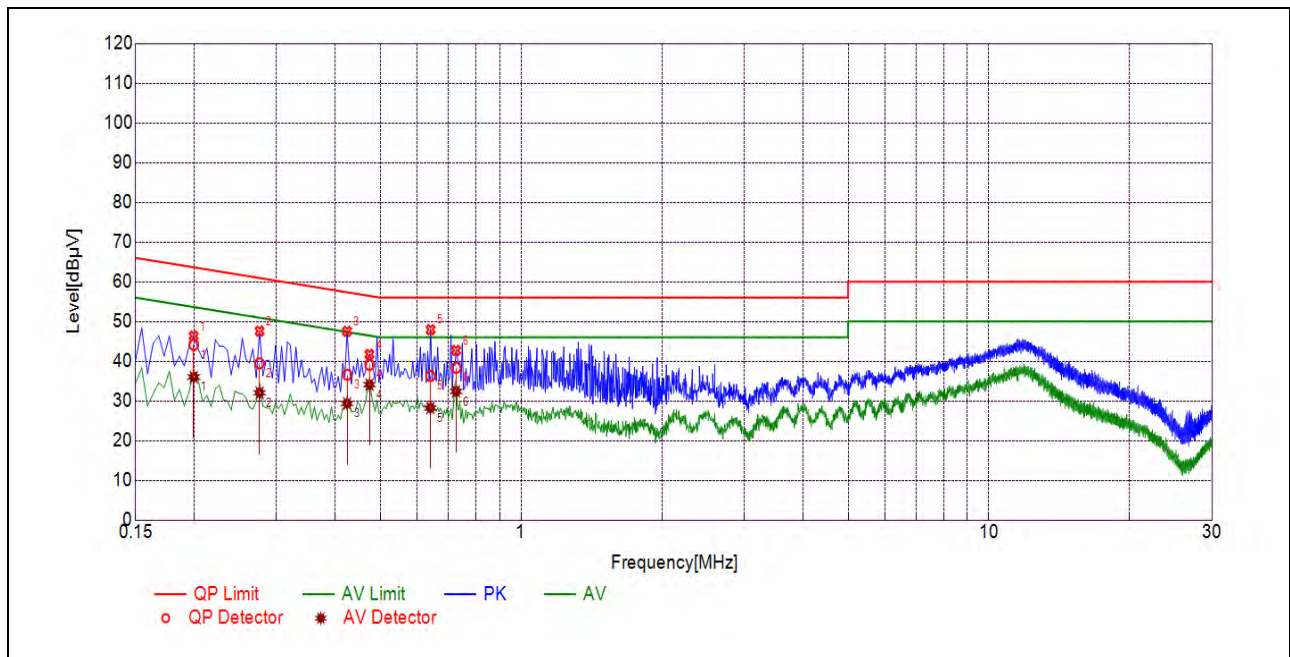

(N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1996	44.13	36.01	63.63	53.63	Neutral	PASS
2	0.2760	39.46	32.05	60.94	50.94		PASS
3	0.4248	36.58	29.37	57.35	47.35		PASS
4	0.4742	39.11	34.11	56.44	46.44		PASS
5	0.6399	36.26	28.23	56.00	46.00		PASS
6	0.7262	38.35	32.40	56.00	46.00		PASS


2.12.Restricted Frequency Bands

2.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.12.2.Test Description

Test Setup:

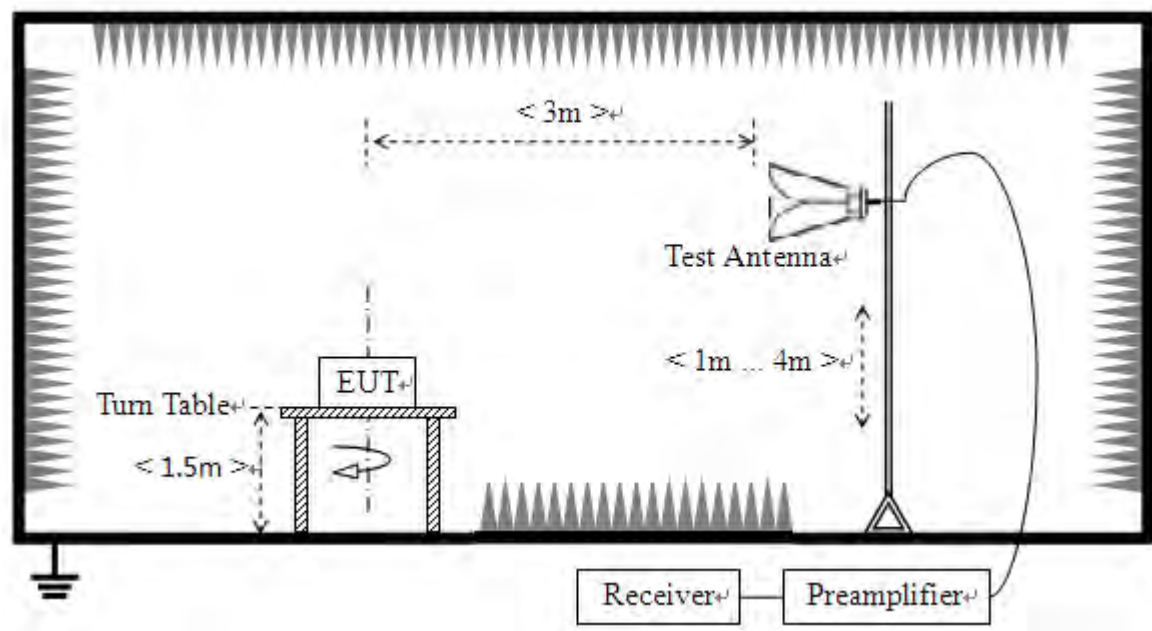

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.12.3.Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.12.4.Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


GFSK Mode

A.Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2387.26	PK	47.51	-29.67	32.56	50.40	74	PASS
0	2385.49	AV	43.73	-29.67	32.56	46.62	54	PASS
78	2483.50	PK	46.31	-29.67	32.56	49.20	74	PASS
78	2485.78	AV	44.67	-29.67	32.56	47.56	54	PASS




B.Test Plot:

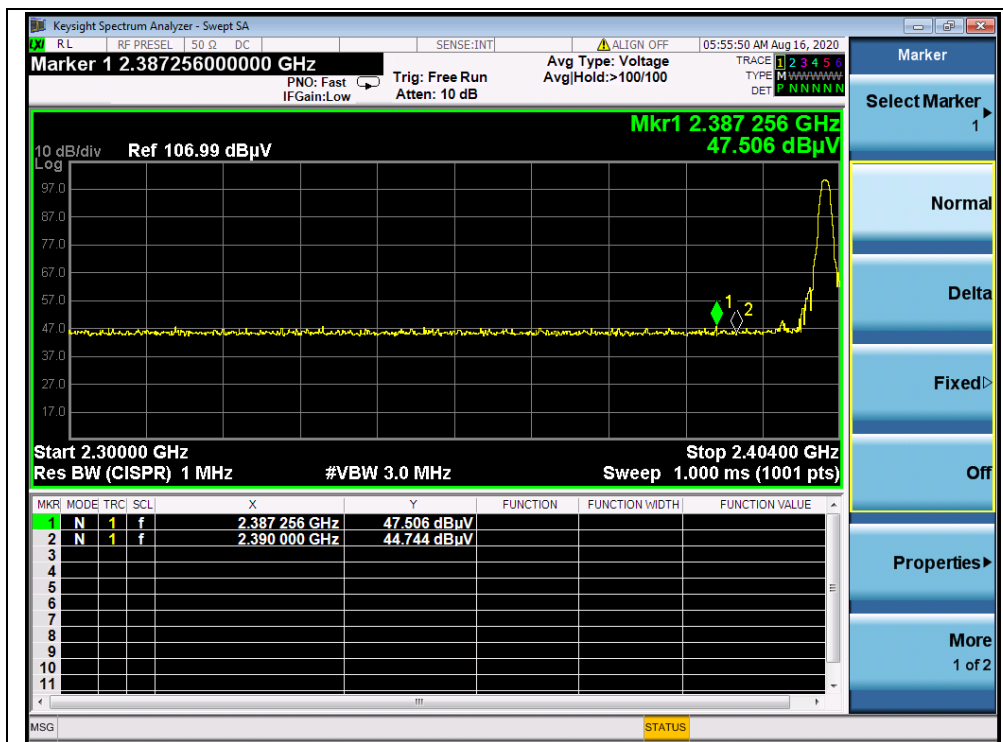


(PEAK, Channel 0, GFSK)

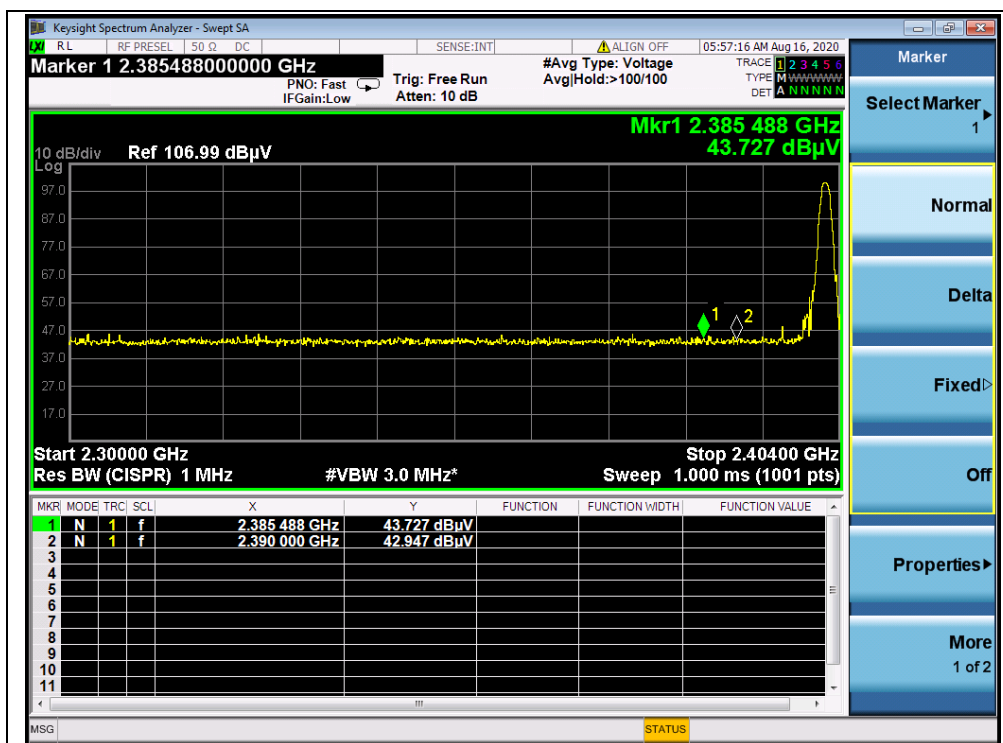

(AVERAGE, Channel 0, GFSK)

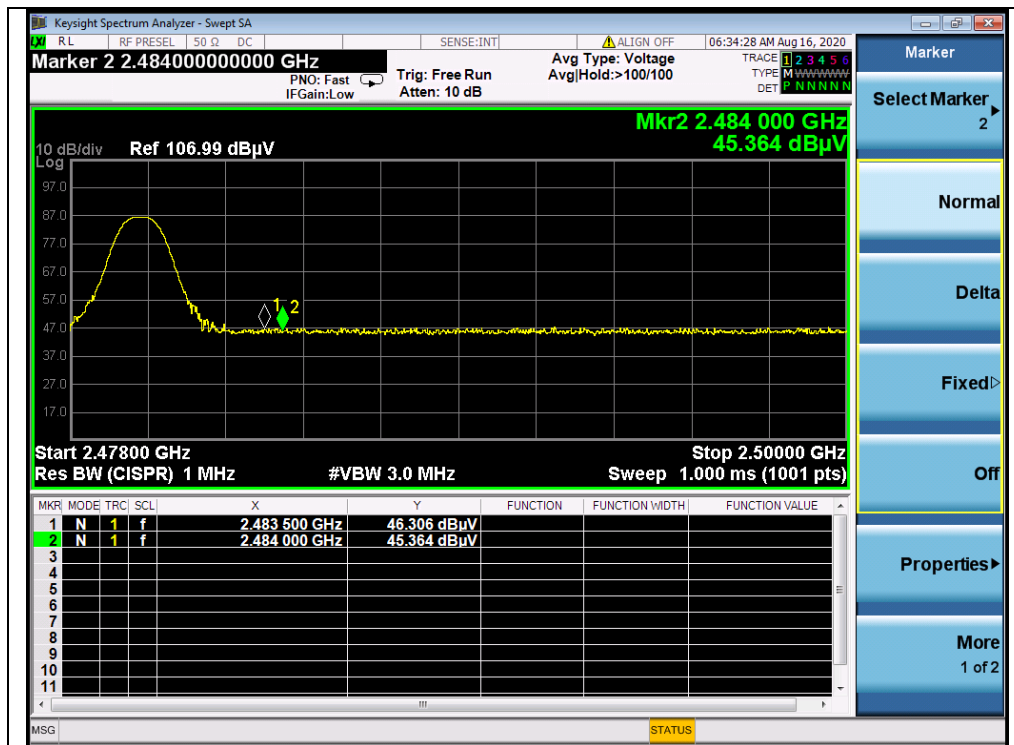

(PEAK, Channel 78, GFSK)

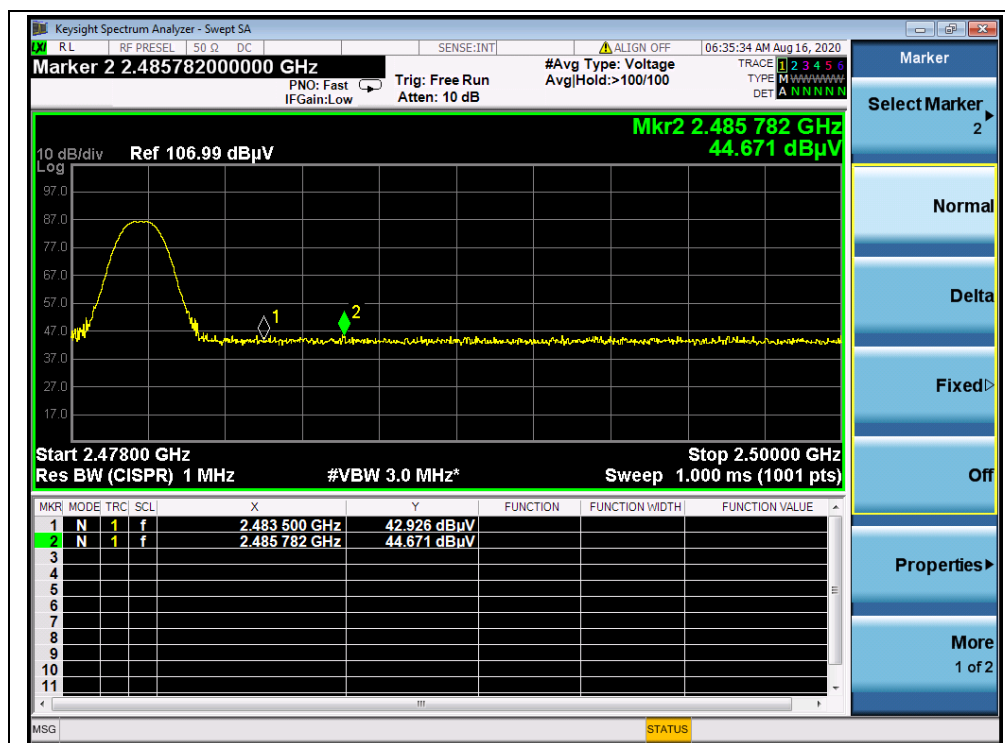

(AVERAGE, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode



A.Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2390.00	PK	46.00	-29.67	32.56	48.89	74	PASS
0	2386.01	AV	45.02	-29.67	32.56	47.91	54	PASS
78	2485.56	PK	47.64	-29.67	32.56	50.53	74	PASS
78	2485.54	AV	44.06	-29.67	32.56	46.95	54	PASS

B.Test Plot:

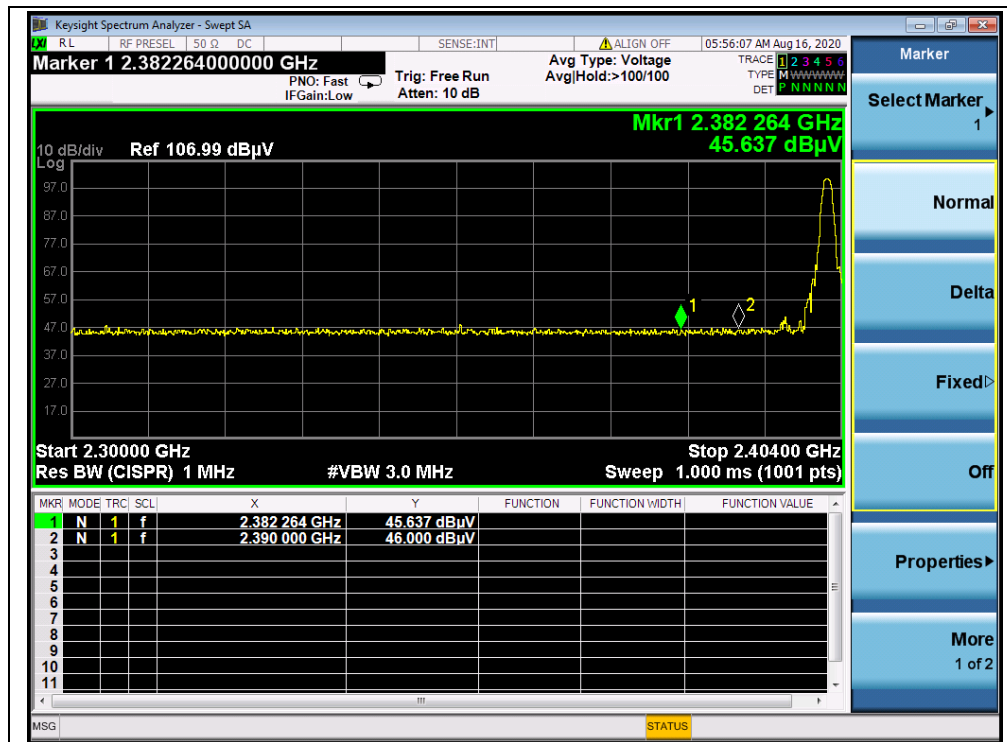

(PEAK, Channel 0, $\pi/4$ -DQPSK)

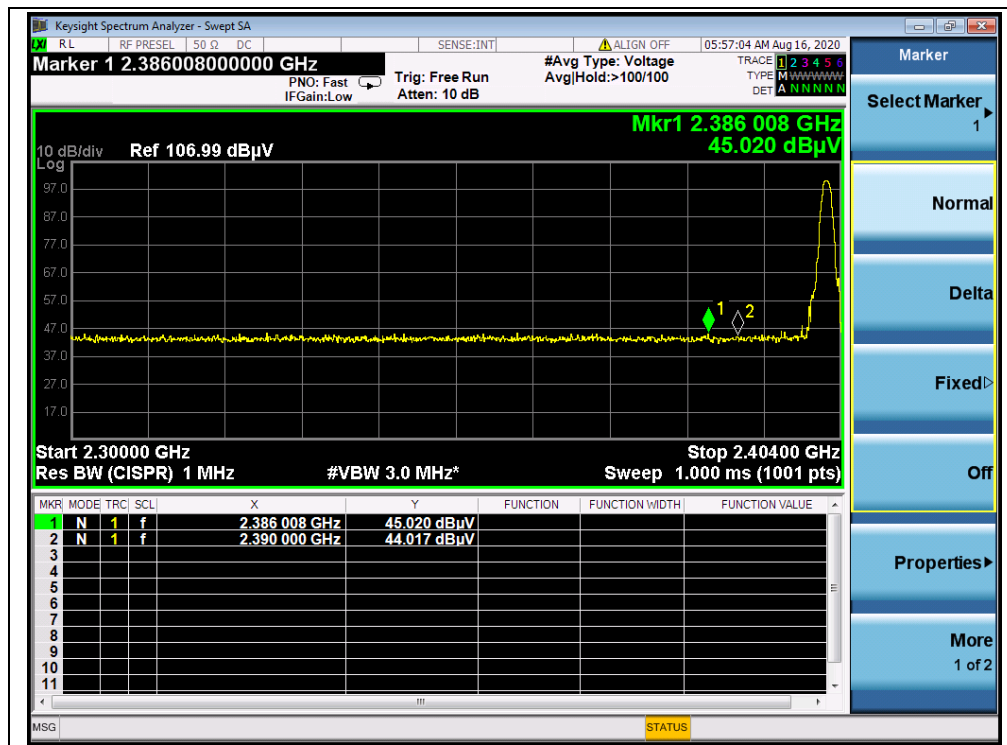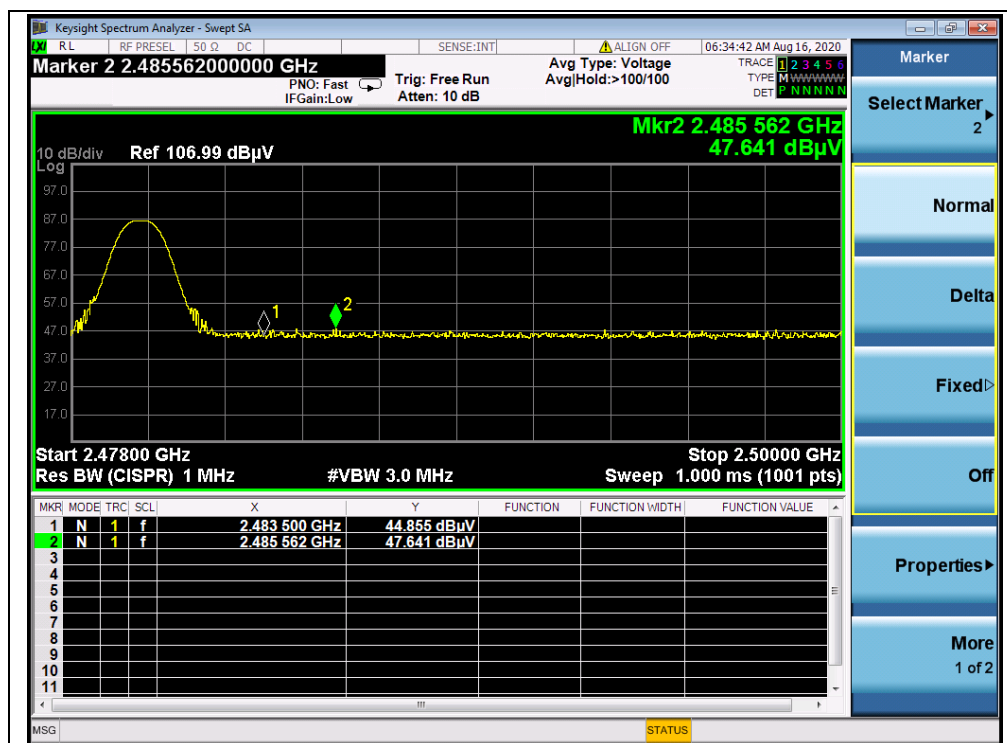
(AVERAGE, Channel 0, $\pi/4$ -DQPSK)

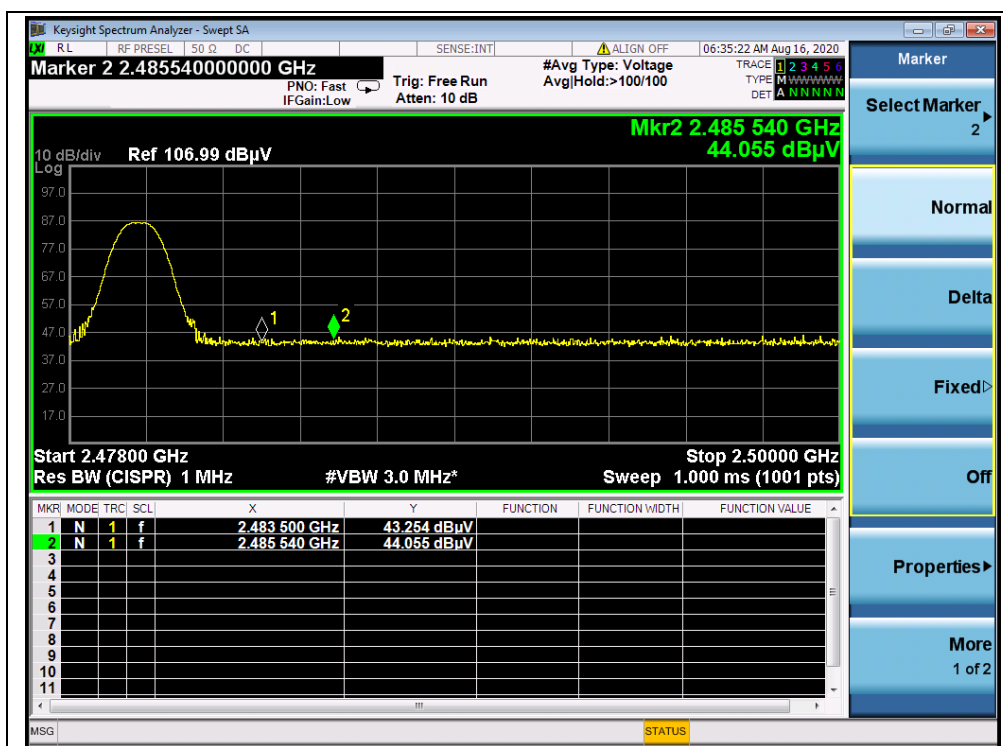(PEAK, Channel 78, $\pi/4$ -DQPSK)



(AVERAGE, Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode


A.Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2380.81	PK	46.37	-29.67	32.56	49.26	74	PASS
0	2380.70	AV	44.96	-29.67	32.56	47.85	54	PASS
78	2484.42	PK	46.39	-29.67	32.56	49.28	74	PASS
78	2484.44	AV	44.58	-29.67	32.56	47.47	54	PASS


B.Test Plot:

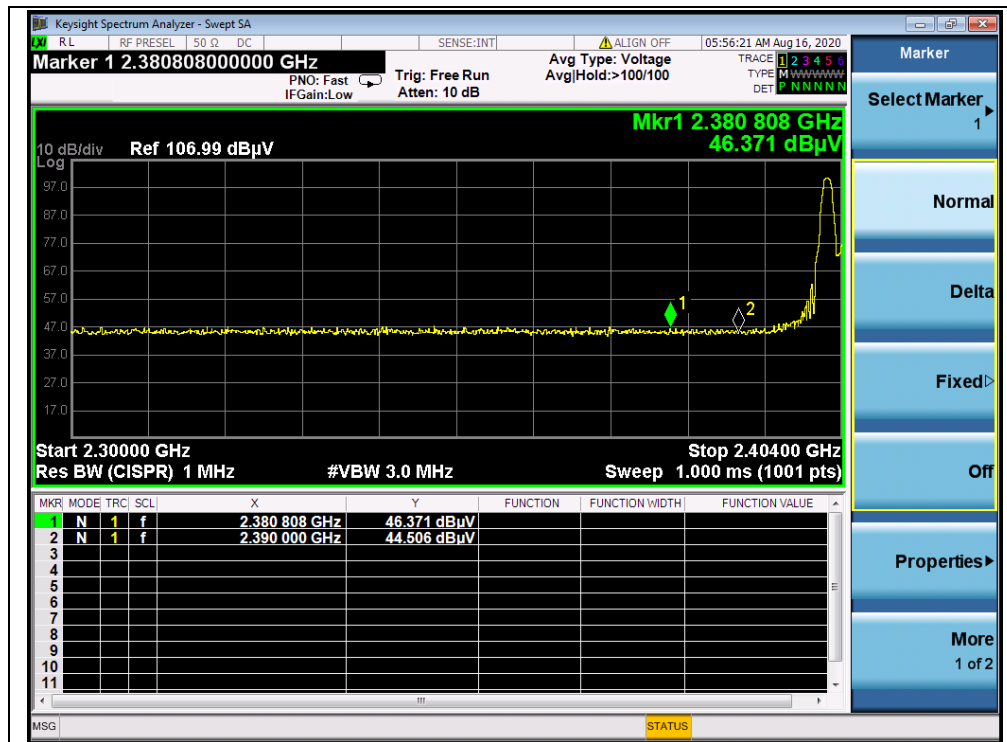


(PEAK, Channel 0, 8-DPSK)

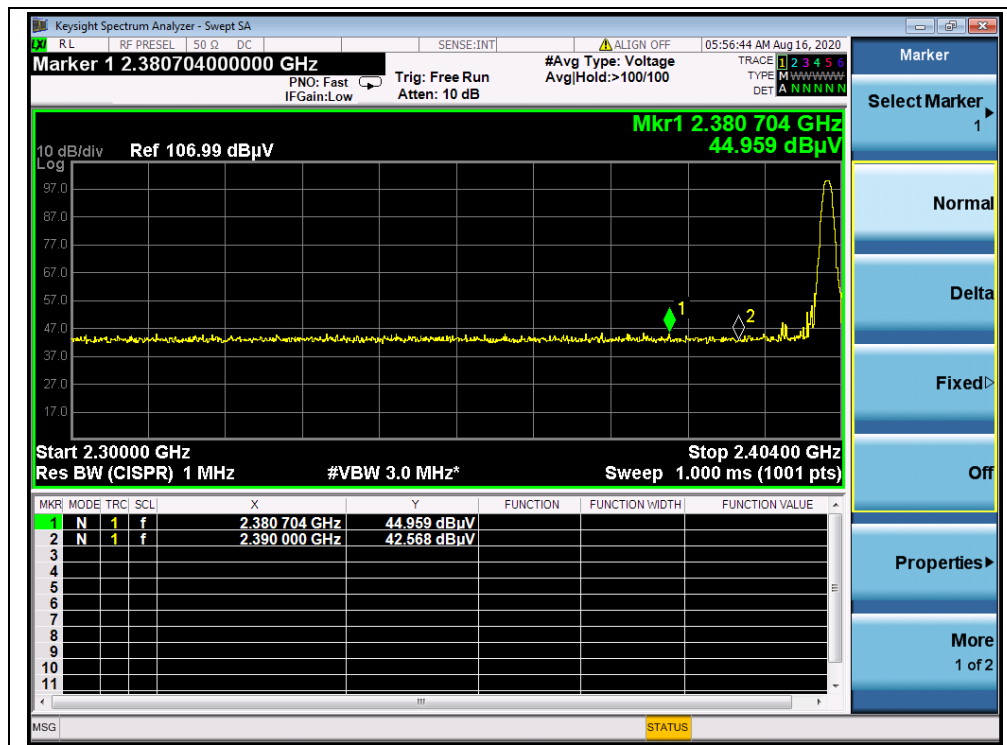

(AVERAGE, Channel 0, 8-DPSK)

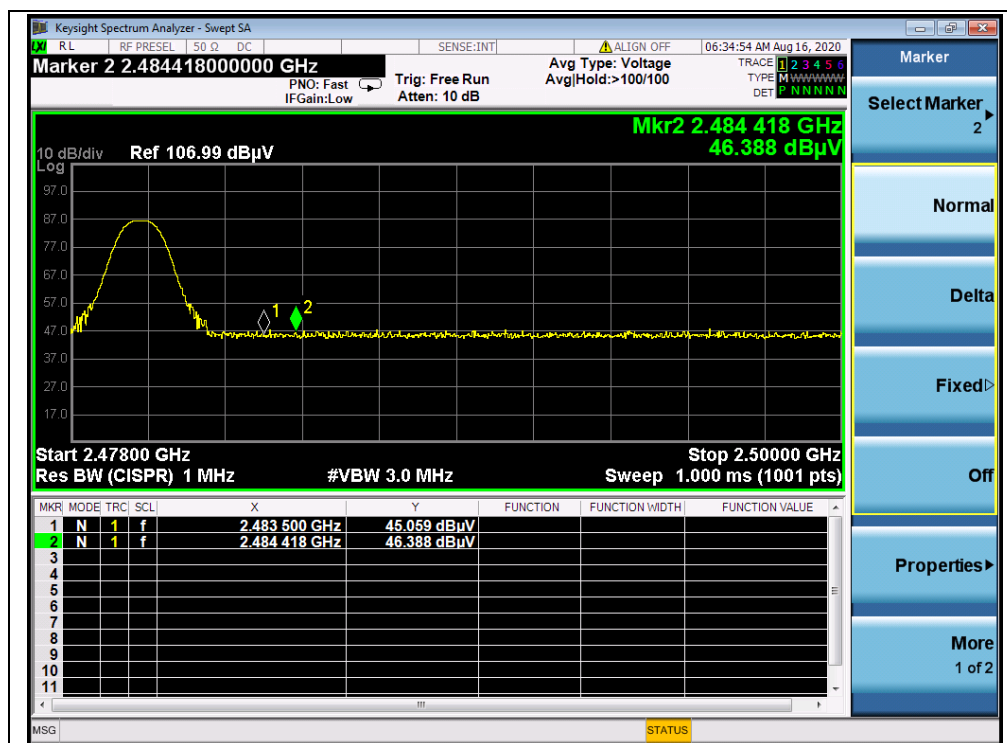

(PEAK, Channel 78, 8-DPSK)

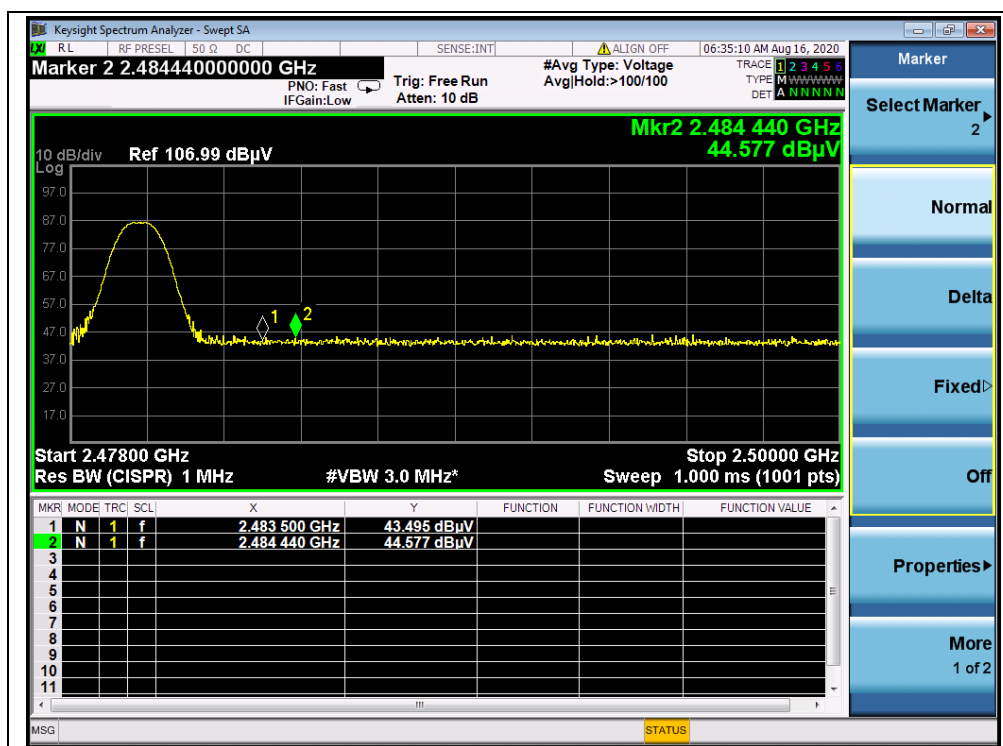

(AVERAGE, Channel 78, 8-DPSK)

2.13.Radiated Emission

2.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.13.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

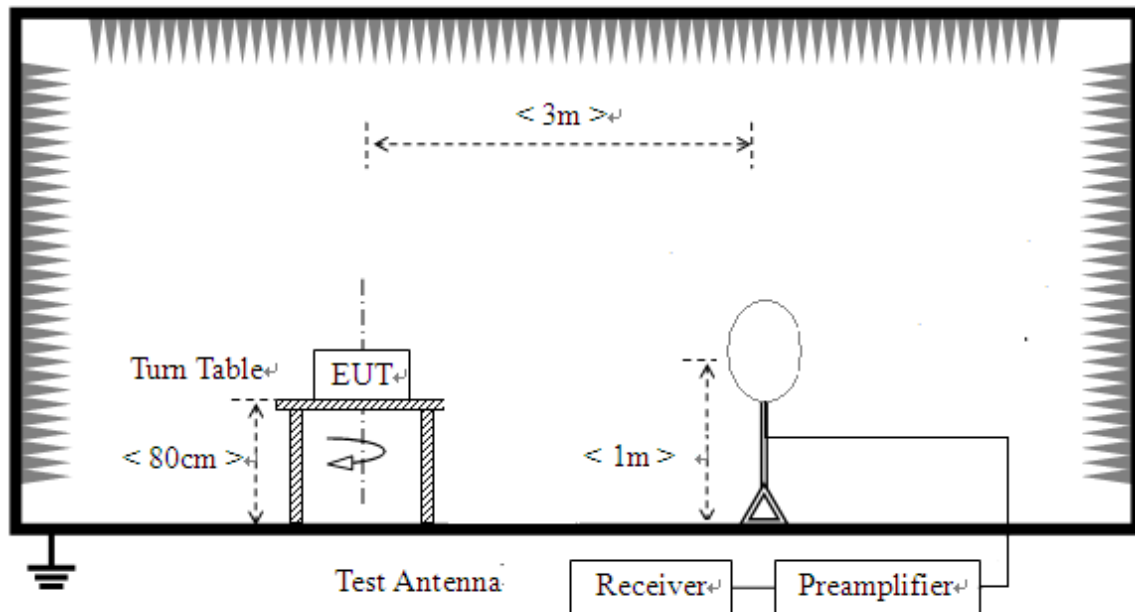

- 2) For radiated emissions from 30MHz to 1GHz

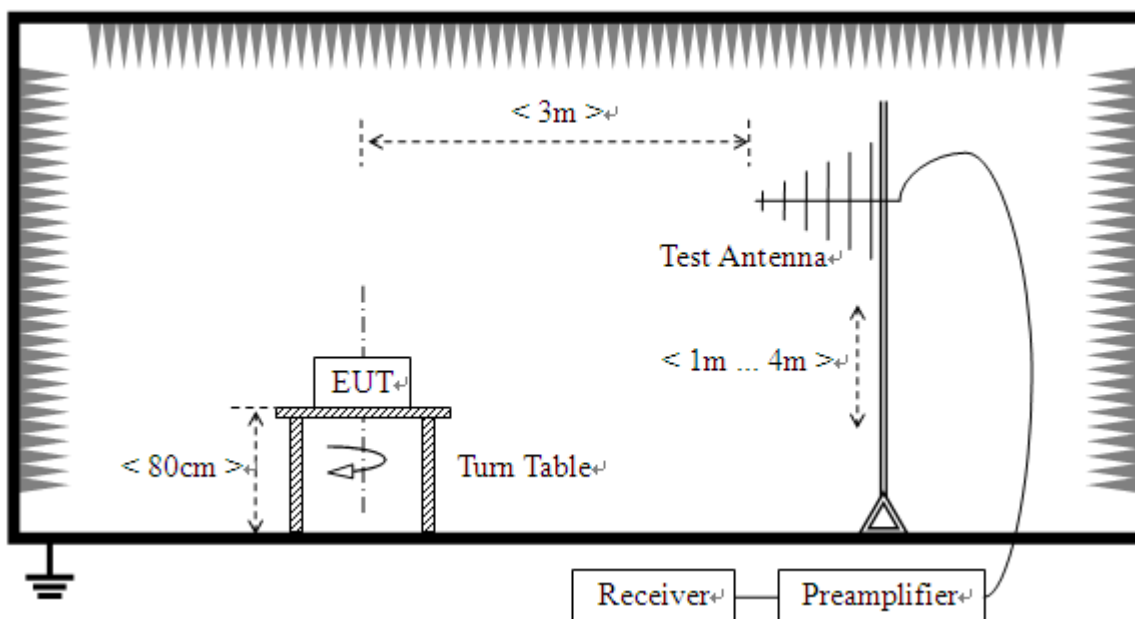

3) For radiated emissions above 1GHz

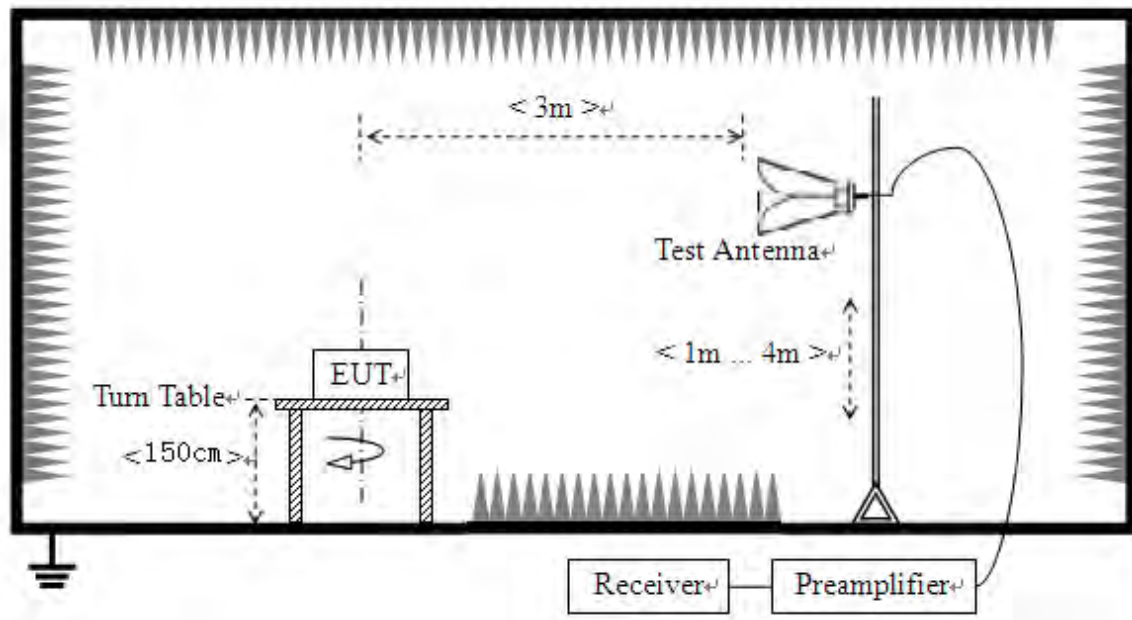

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be



higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

2.13.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.13.4. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**GFSK Mode**

Plots for Channel 0

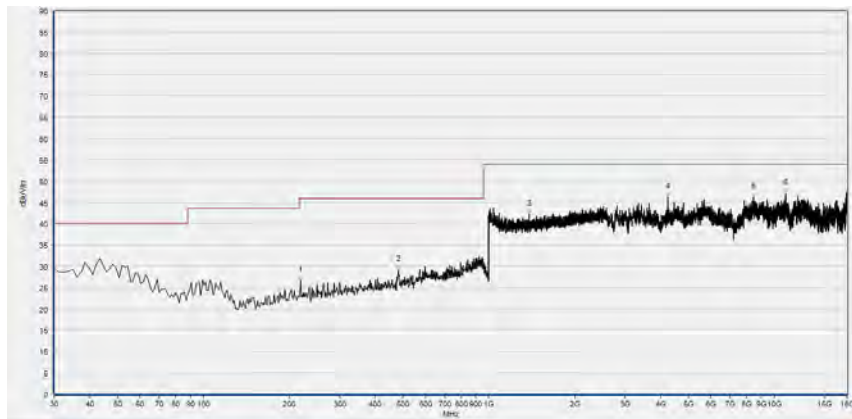

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	26.69	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
481.615	29.20	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1383.513	42.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4241.098	46.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8478.269	46.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10970.722	47.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

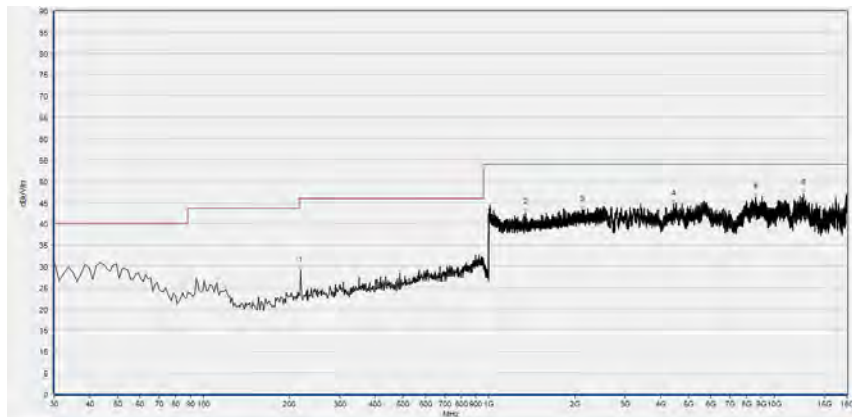


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	28.95	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1344.458	42.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2123.009	43.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4434.334	44.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8584.688	46.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12648.227	47.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

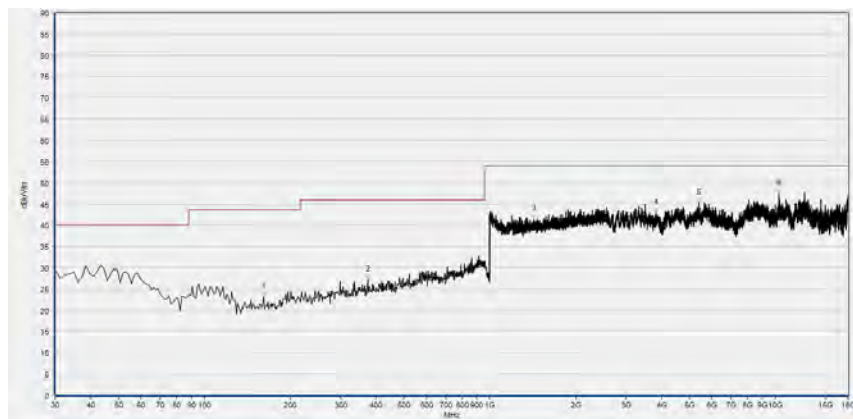

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
161.114	23.15	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
373.567	27.21	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1428.972	41.46	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3829.424	42.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5392.108	45.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10307.001	47.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

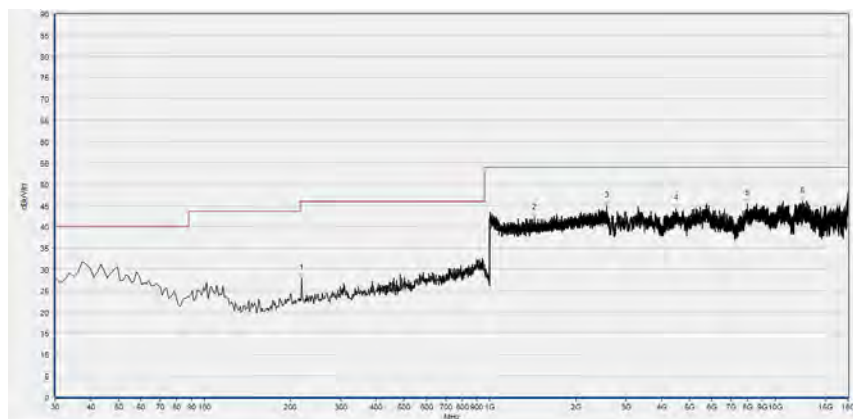

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	27.88	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1430.892	42.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2562.225	44.84	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4498.745	44.20	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7993.781	45.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12466.194	45.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 78

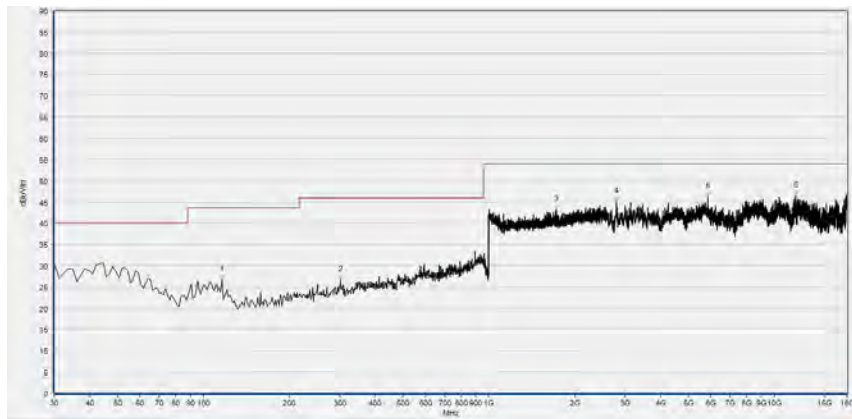

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
116.195	26.57	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
301.940	26.59	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1726.691	43.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2796.036	45.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5851.391	46.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11855.683	46.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

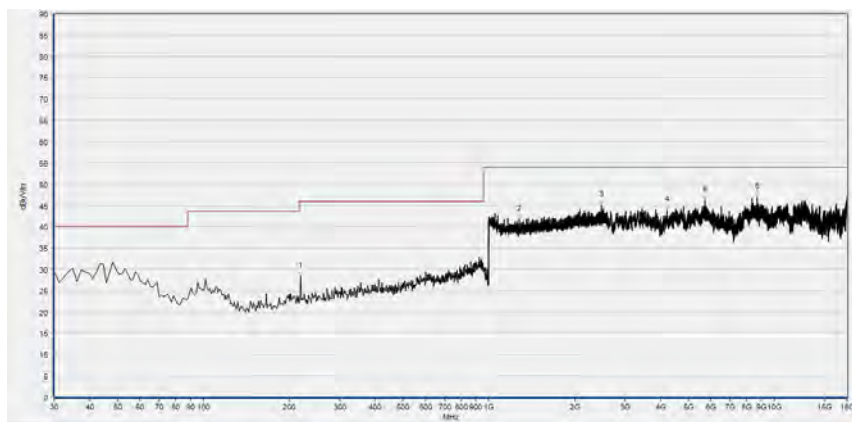


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	28.38	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1279.152	41.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2479.632	45.16	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4215.894	43.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5719.767	46.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8688.307	46.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


 **$\pi/4$ -DQPSK Mode**

Plots for Channel 0

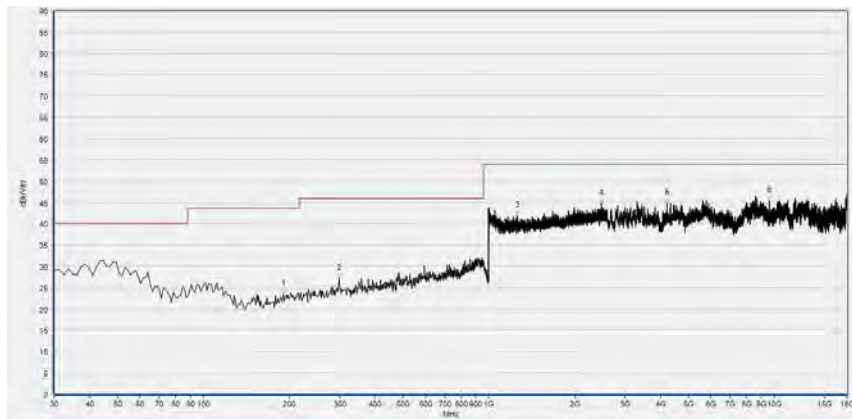

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
190.250	23.54	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
298.298	27.07	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1254.822	41.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2486.034	44.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4201.891	44.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9629.278	45.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

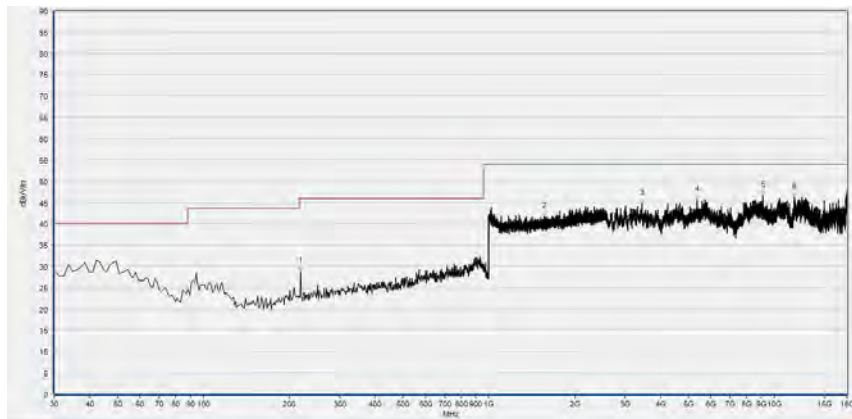


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	28.80	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1567.267	41.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3437.352	44.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5366.903	45.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9136.388	46.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11746.463	46.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

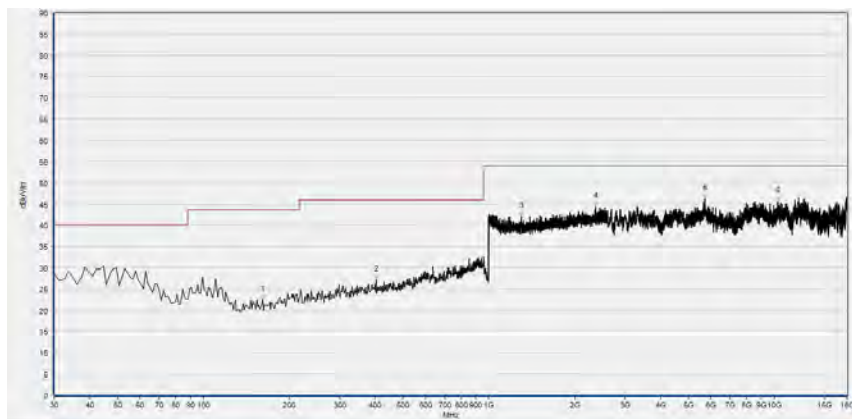

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
161.114	22.47	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
402.703	27.14	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1301.561	42.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2363.745	44.42	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5725.368	46.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10281.797	45.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

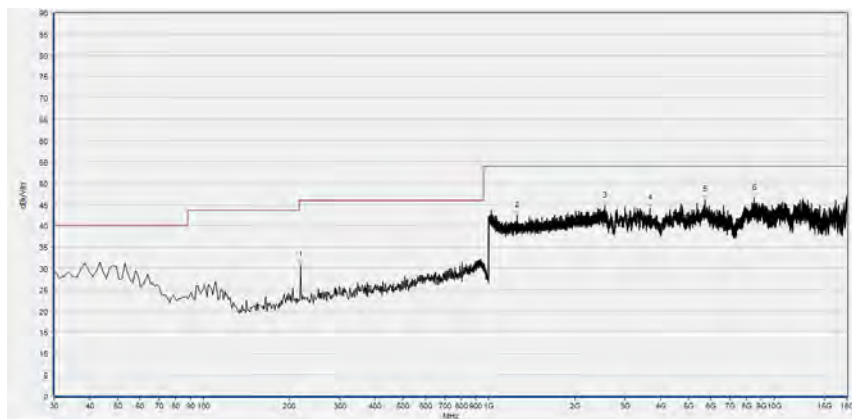


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	30.60	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1254.182	42.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2547.499	44.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3666.994	44.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5728.169	46.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8514.675	46.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 78

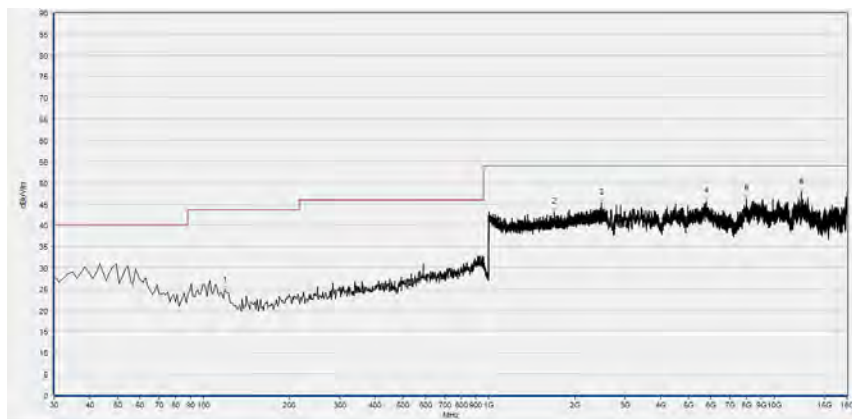

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
118.623	24.58	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1697.239	43.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2479.632	45.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5786.979	45.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7968.576	46.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12438.189	47.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

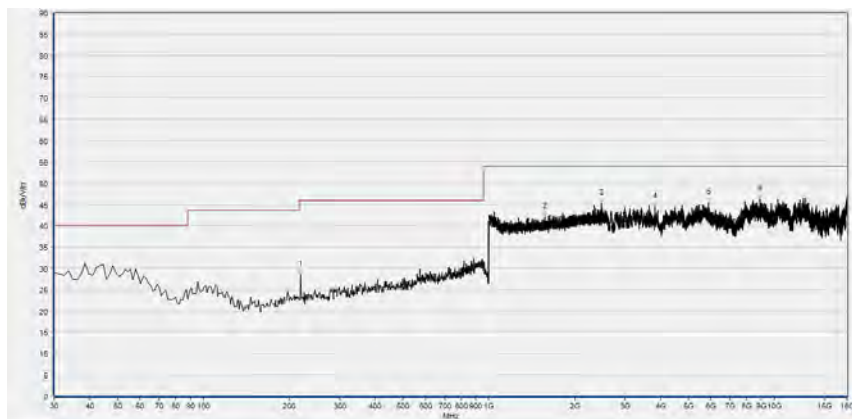


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	28.53	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1570.468	42.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2479.632	45.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3826.623	44.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5876.596	45.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8895.545	46.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




8-DPSK Mode

Plots for Channel 0

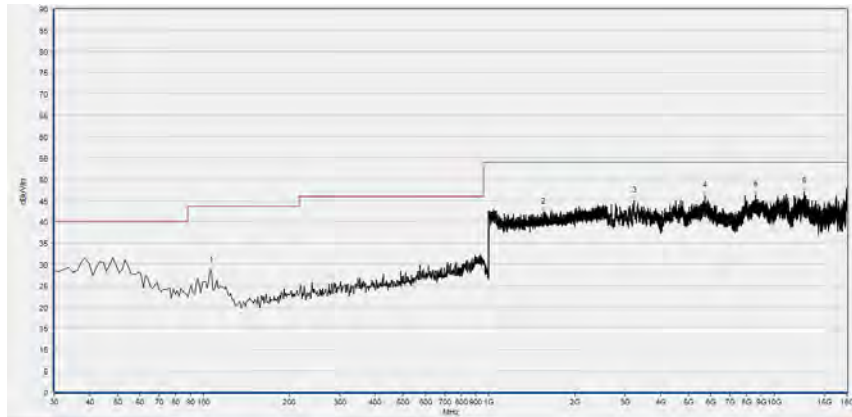

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.483	28.46	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1550.620	42.27	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3232.915	44.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5716.967	46.06	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8623.895	46.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12737.843	47.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

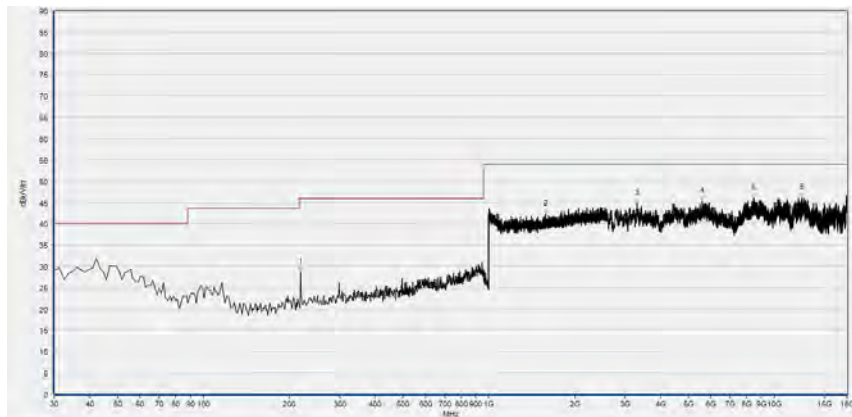


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	28.66	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1578.792	42.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3311.329	44.72	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5585.343	45.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8461.466	45.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12539.007	46.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 39

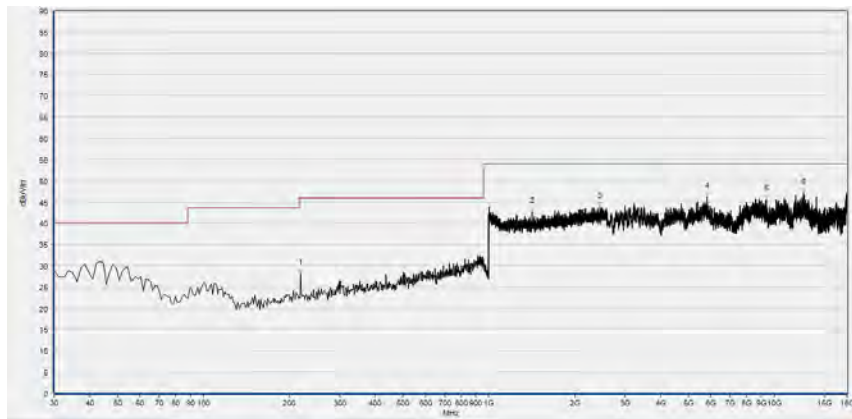

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	28.18	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1416.807	42.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2446.979	43.96	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5809.384	46.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9385.634	45.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12651.027	47.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

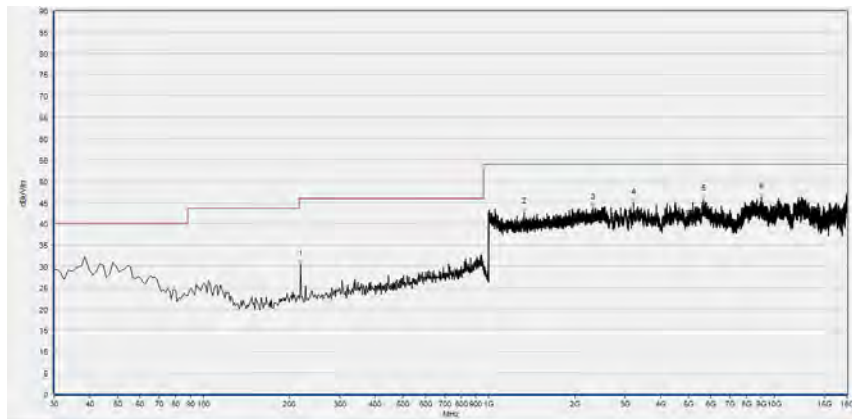


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	30.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1333.573	42.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2319.568	43.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3210.511	44.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5663.757	45.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9007.565	46.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 78

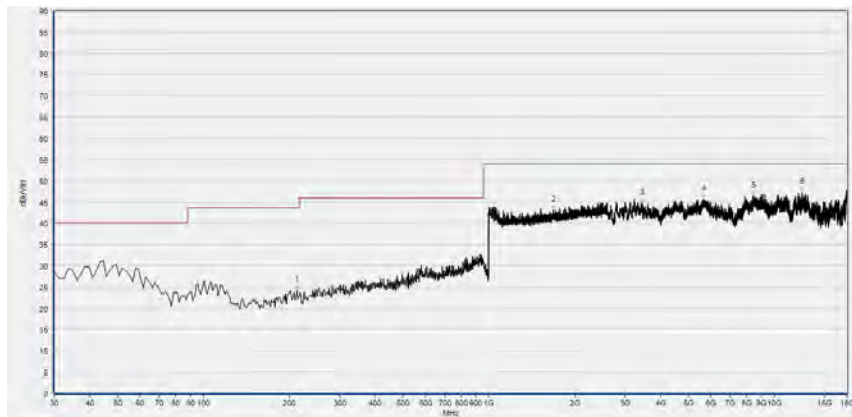

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
213.317	24.15	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1682.513	43.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3434.552	44.76	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5649.755	45.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8439.062	46.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12536.207	47.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

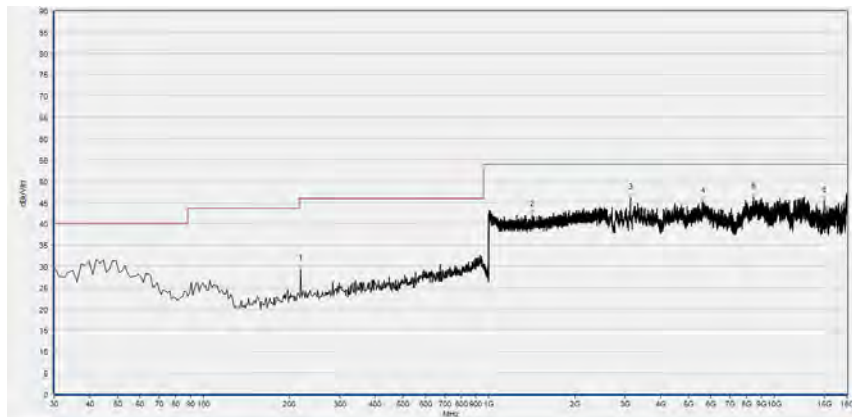

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
219.387	29.27	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1420.648	42.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3132.097	46.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5618.949	45.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8475.468	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15003.455	45.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Number of Hopping Frequency	±5%
Peak Output Power	±2.22dB
20dB Bandwidth	±5%
Carrier Frequency Separation	±5%
Time of Occupancy (Dwell time)	±5%
Conducted Spurious Emission	±2.77dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. MorlabLaboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Bluetooth Base Station	6K00006210	MT8852B	Anritsu	2020.04.01	2021.03.31
Directional coupler	17041703	DTO-5-30	ShangHaiHuaxiang	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————