

TEST REPORT

Product : RGB Speaker PAR38 Lamp
Trade mark : N/A
Model/Type reference : LED+14DPAR38M/WWRGBSPK
LED+14DPAR38M/DLRGBSPK
Serial Number : N/A
Report Number : EED32N81004702
FCC ID : PUU-LEDX14DPAR38M
Date of Issue : Dec. 02, 2021
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Savant Technologies LLC dba GE Lighting, a Savant company
1975 Noble Road Cleveland Ohio United States 44112

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

mark.chen.

Reviewed by:

Aaron Ma

Mark Chen

Aaron Ma

Approved by:

David Wang

Date:

Dec. 02, 2021

David Wang



Check No.: 2011121021

1 Content

1 CONTENT	2
2 VERSION	3
3 TEST SUMMARY	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST CONFIGURATION	7
4.5 TEST ENVIRONMENT	7
4.6 DESCRIPTION OF SUPPORT UNITS	8
4.7 TEST LOCATION	8
4.8 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
5 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA	11
6.1 ANTENNA REQUIREMENT	11
6.2 AC POWER LINE CONDUCTED EMISSION	12
6.3 MAXIMUM CONDUCTED OUTPUT POWER	16
6.4 DTS BANDWIDTH	17
6.5 MAXIMUM POWER SPECTRAL DENSITY	18
6.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION	19
6.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	20
7 APPENDIX A	31
PHOTOGRAPHS OF TEST SETUP	32
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	34

2 Version

Version No.	Date	Description
00	Dec. 02, 2021	Original

3 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model/Type reference:LED+14DPA38M/WWRGBSPK,LED+14DPA38M/DLRGBSPK

Only the model LED+14DPA38M/WWRGBSPK was tested,the difference between each model is only for the model name is different, the color temperature is different, the rest circuit principle, the internal structure, the PCB Layout and the safety key parts are the same, does not affect the EMC and RF test.

4 General Information

4.1 Client Information

Applicant:	Savant Technologies LLC dba GE Lighting, a Savant company
Address of Applicant:	1975 Noble Road Cleveland Ohio United States 44112
Manufacturer:	Savant Technologies LLC dba GE Lighting, a Savant company
Address of Manufacturer:	1975 Noble Road Cleveland Ohio United States 44112
Factory:	Shenzhen H&T Intelligent Lighting Co., Ltd
Address of Factory:	H&T Industrial Park, NO.18 Bao Shan Road, Tian Liao Community, Guangming New District, Shenzhen, Guangdong, China. P.R.C 518106

4.2 General Description of EUT

Product Name:	RGB Speaker PAR38 Lamp
Model No.(EUT):	LED+14DPAR38M/WWRGBSPK
Trade mark:	N/A
EUT Supports Radios application:	5731MHz to 5795MHz
Power Supply:	120V 60Hz 130mA
Test Voltage:	120V 60Hz 130mA
Sample Received Date:	Oct. 15, 2021
Sample tested Date:	Oct. 15, 2021 to Nov. 05, 2021

4.3 Product Specification subjective to this standard

Operation Frequency:	5731MHz to 5795MHz
Modulation Type:	GFSK
Number of Channel:	33
Test Power Grade:	Default
Software Version:	N/A
Antenna Type and Gain:	Type: FPC Antenna Gain: 3.91dBi

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	5731MHz	10	5751MHz	20	5771MHz	30	5791MHz
1	5733MHz	11	5753MHz	21	5773MHz	31	5793MHz
2	5735MHz	12	5755MHz	22	5775MHz	32	5795MHz
3	5737MHz	13	5757MHz	23	5777MHz		
4	5739MHz	14	5759MHz	24	5779MHz		
5	5741MHz	15	5761MHz	25	5781MHz		
6	5743MHz	16	5763MHz	26	5783MHz		
7	5745MHz	17	5765MHz	27	5785MHz		
8	5747MHz	18	5767MHz	28	5787MHz		
9	5749MHz	19	5769MHz	29	5789MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	5731MHz
The middle channel (CH18)	5767MHz
The highest channel (CH32)	5795MHz

4.4 Test Configuration

EUT Test Software Settings:				
Software:		N/A		
EUT Power Grade:		Class2 (Power level is built-in set parameters and cannot be changed and selected)		
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.				
Test Mode	Modulation	Rate	Channel	Frequency(MHz)
Mode a	GFSK	1Mbps	CH0	5731
Mode b	GFSK	1Mbps	CH18	5767
Mode c	GFSK	1Mbps	CH32	5795

4.5 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

4.6 Description of Support Units

The EUT has been tested with associated equipment below.

4.7 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

4.8 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-15-2021	04-14-2022
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-04-2021	03-03-2022
Barometer	changchun	DYM3	1188	---	---

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-28-2020	12-27-2021
Signal Generator	Keysight	N5182B	MY53051549	12-28-2020	12-27-2021
Spectrum Analyzer	R&S	FSV40	101200	08-26-2021	08-25-2022
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-24-2021	06-23-2022
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	---	---
High-pass filter	MICRO- TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	12-28-2020	12-27-2021
Power unit	R&S	OSP120	101374	12-28-2020	12-27-2021
RF control unit	JS Tonscend	JS0806-2	158060006	12-28-2020	12-27-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2021	05-15-2022
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-15-2021	04-14-2024
Receiver	R&S	ESCI7	100938-003	10-14-2021	10-13-2022
Multi device Controller	maturu	NCD/070/10711 112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-24-2021	06-23-2022
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-04-2021	03-03-2022
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-04-2021	03-03-2022
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-04-2021	03-03-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-15-2021	04-14-2024
Horn Antenna	ETS-LINDGREN	3117	00057407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	05-20-2021	05-19-2022
Preamplifier	EMCI	EMC001330	980563	04-15-2021	04-14-2022
Preamplifier	JS Tonscend	980380	EMC051845 SE	12-31-2020	12-30-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-16-2021	04-15-2022
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2021	01-08-2024
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
The antenna is FPC Antenna. The best case gain of the antenna is 3.91dBi.	

6.2 AC Power Line Conducted Emission

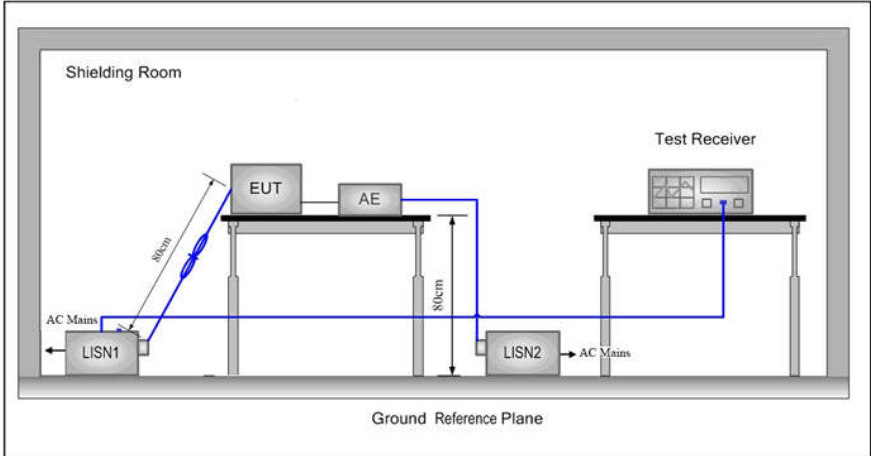
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of 		

	equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Test Results:	Pass

Measurement Data

Neutral line:

100.0 dBuV

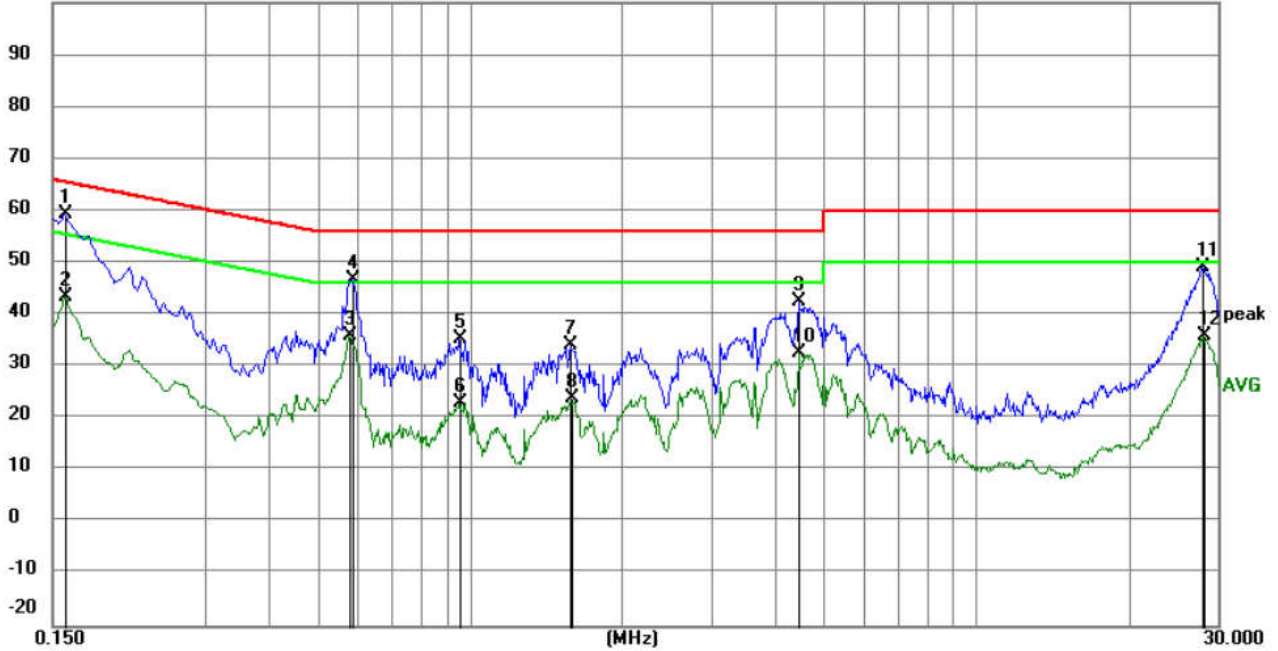


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1590	49.34	9.87	59.21	65.52	-6.31	peak	
2		0.1590	33.59	9.87	43.46	55.52	-12.06	AVG	
3		0.5775	25.90	10.04	35.94	46.00	-10.06	AVG	
4		0.5865	36.79	10.05	46.84	56.00	-9.16	peak	
5		0.9555	25.37	9.84	35.21	56.00	-20.79	peak	
6		0.9555	13.17	9.84	23.01	46.00	-22.99	AVG	
7		1.5809	24.25	9.81	34.06	56.00	-21.94	peak	
8		1.5900	14.24	9.81	24.05	46.00	-21.95	AVG	
9		4.4699	32.78	9.78	42.56	56.00	-13.44	peak	
10		4.4699	22.87	9.78	32.65	46.00	-13.35	AVG	
11		27.9915	39.09	10.02	49.11	60.00	-10.89	peak	
12		28.0995	25.94	10.02	35.96	50.00	-14.04	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Live line:

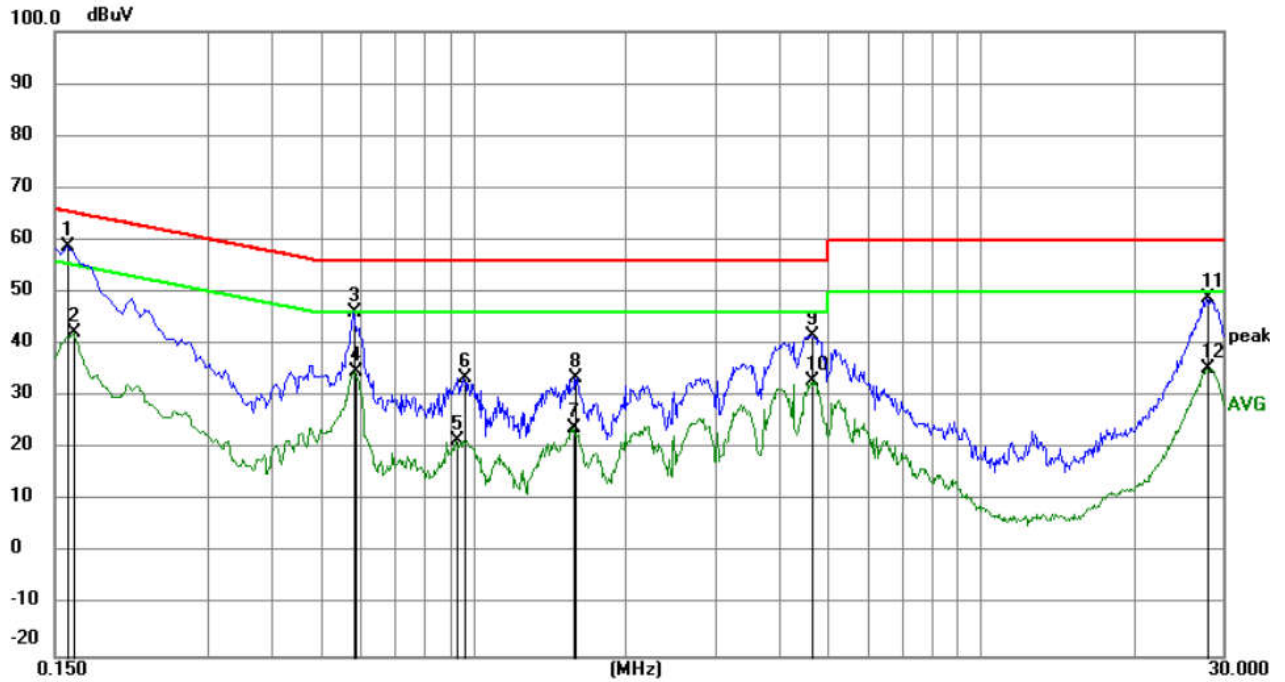


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1590	48.97	9.87	58.84	65.52	-6.68	peak	
2		0.1635	32.33	9.87	42.20	55.28	-13.08	AVG	
3		0.5820	36.11	10.05	46.16	56.00	-9.84	peak	
4		0.5865	24.66	10.05	34.71	46.00	-11.29	AVG	
5		0.9240	11.73	9.85	21.58	46.00	-24.42	AVG	
6		0.9600	23.72	9.84	33.56	56.00	-22.44	peak	
7		1.5765	14.13	9.81	23.94	46.00	-22.06	AVG	
8		1.5900	23.64	9.81	33.45	56.00	-22.55	peak	
9		4.6455	31.77	9.78	41.55	56.00	-14.45	peak	
10		4.6590	23.21	9.78	32.99	46.00	-13.01	AVG	
11		27.9870	38.93	10.02	48.95	60.00	-11.05	peak	
12		27.9870	25.36	10.02	35.38	50.00	-14.62	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


6.3 Maximum Conducted Output Power

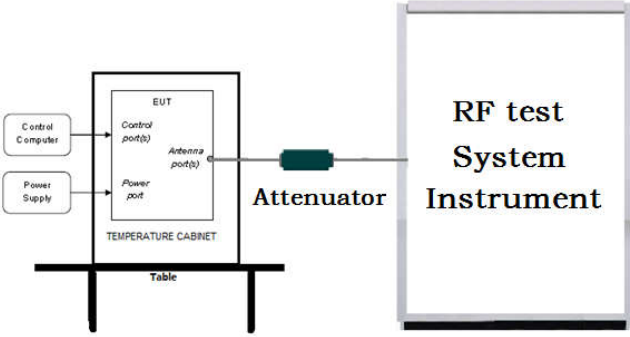Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ul style="list-style-type: none"> a) Set the RBW \geq DTS bandwidth. b) Set VBW $\geq 3 \times$ RBW. c) Set span $\geq 3 \times$ RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.
Limit:	30dBm
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix C


6.4 DTS Bandwidth

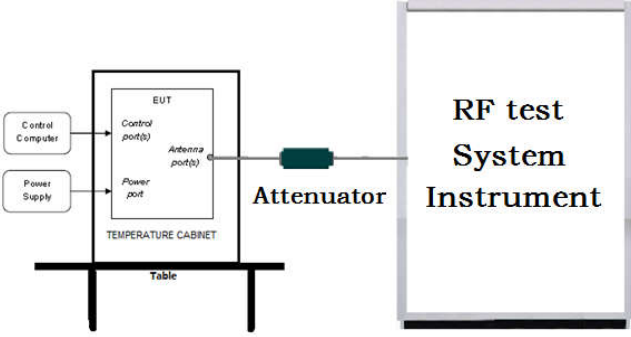Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<p>a) Set RBW = 100 kHz.</p> <p>b) Set the VBW $\geq [3 \times \text{RBW}]$.</p> <p>c) Detector = peak.</p> <p>d) Trace mode = max hold.</p> <p>e) Sweep = auto couple.</p> <p>f) Allow the trace to stabilize.</p> <p>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p>
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

6.5 Maximum Power Spectral Density



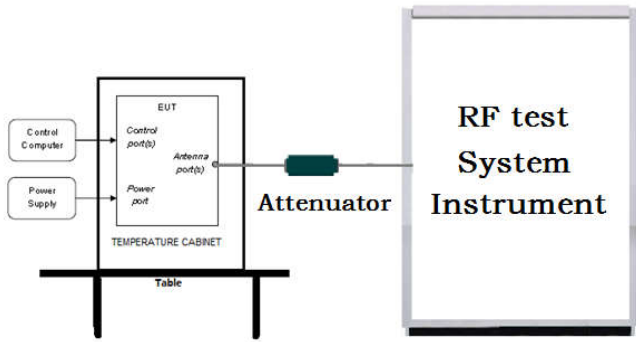
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<p>a) Set analyzer center frequency to DTS channel center frequency.</p> <p>b) Set the span to 1.5 times the DTS bandwidth.</p> <p>c) Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$.</p> <p>d) Set the VBW $> [3 \times \text{RBW}]$.</p> <p>e) Detector = peak.</p> <p>f) Sweep time = auto couple.</p> <p>g) Trace mode = max hold.</p> <p>h) Allow trace to fully stabilize.</p> <p>i) Use the peak marker function to determine the maximum amplitude level within the RBW.</p> <p>j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.</p>
Limit:	$\leq 8.00 \text{ dBm/3kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix D

6.6 Band Edge measurements and Conducted Spurious Emission

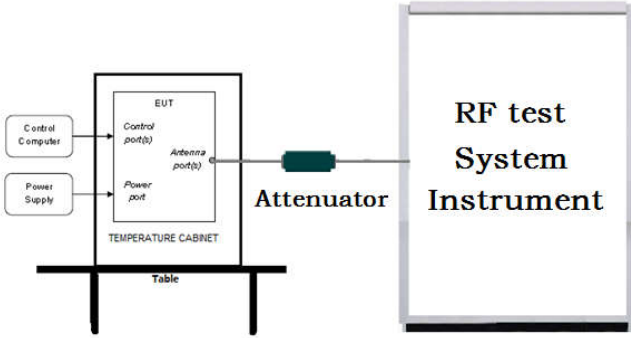Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Procedure:	<ul style="list-style-type: none"> a) Set RBW =100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix E and F

6.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

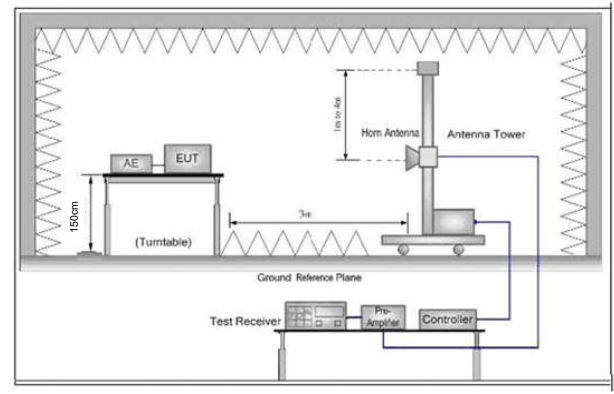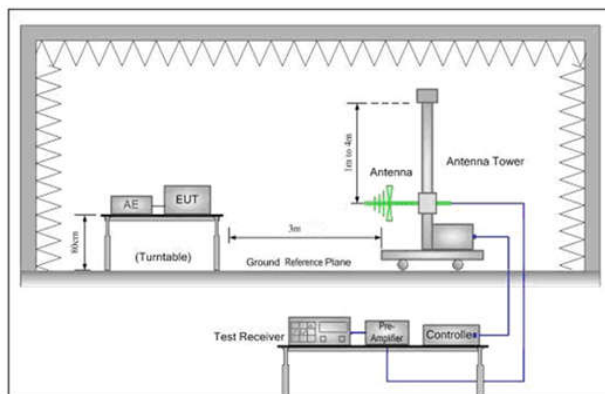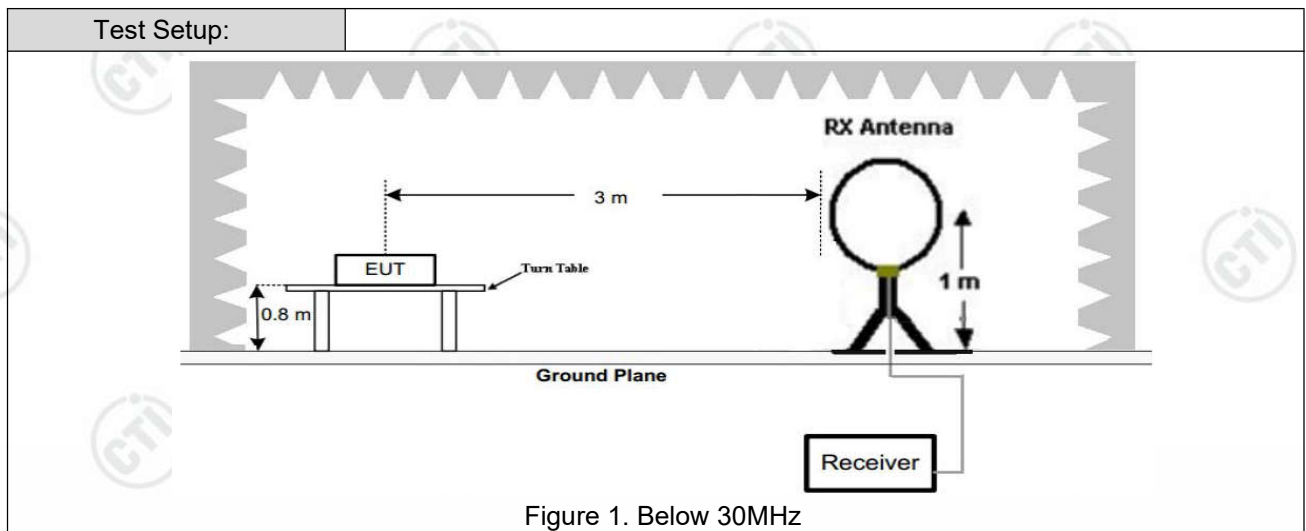

Test Procedure:


- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	<p>measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Refer to clause 5.3
Test Results:	Pass

Radiated Spurious Emission below 1GHz:


During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case highest channel of 5.8G was recorded in the report.

Test Graph

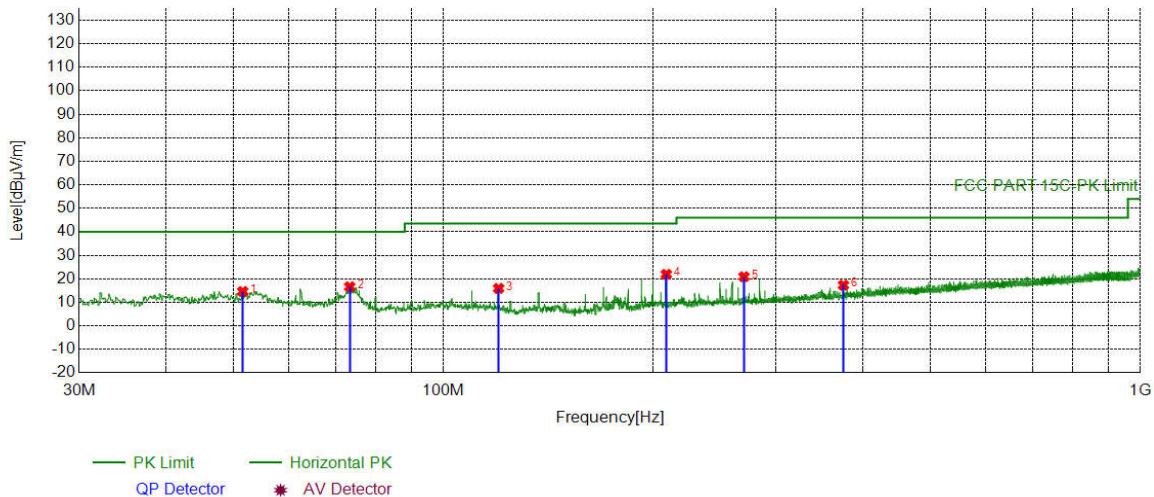

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	51.5362	-17.38	32.00	14.62	40.00	25.38	PASS	Horizontal	PK
2	73.3633	-21.39	38.03	16.64	40.00	23.36	PASS	Horizontal	PK
3	120.0250	-20.08	36.01	15.93	43.50	27.57	PASS	Horizontal	PK
4	208.8859	-17.63	39.56	21.93	43.50	21.57	PASS	Horizontal	PK
5	270.0020	-16.15	37.05	20.90	46.00	25.10	PASS	Horizontal	PK
6	375.0635	-13.45	30.75	17.30	46.00	28.70	PASS	Horizontal	PK

Test Graph

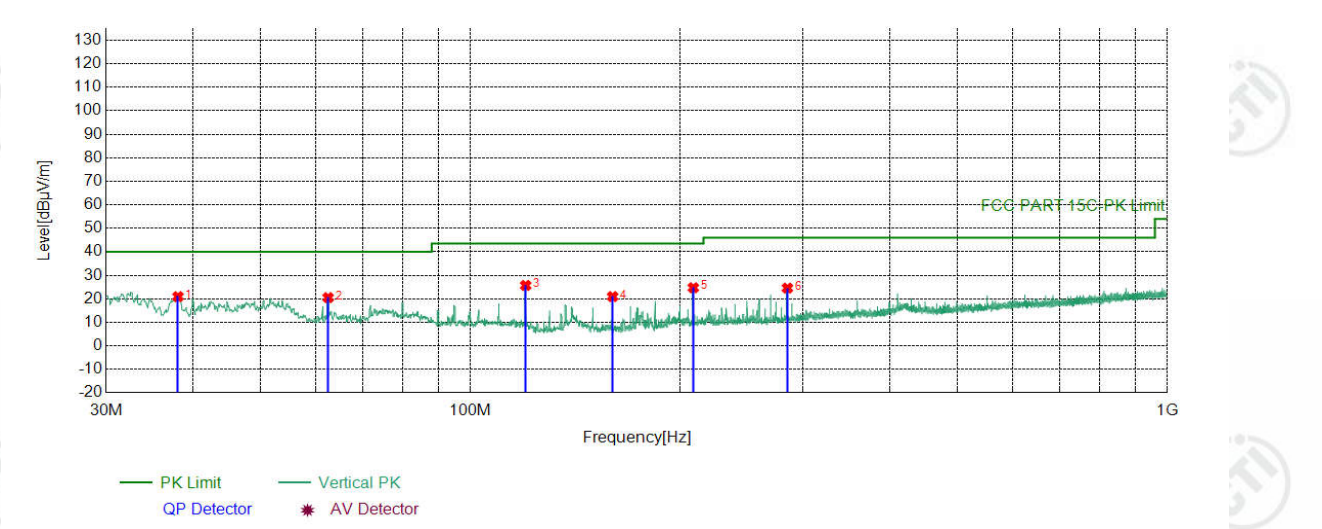

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	38.0518	-18.64	39.58	20.94	40.00	19.06	PASS	Vertical	PK
2	62.4983	-19.07	39.58	20.51	40.00	19.49	PASS	Vertical	PK
3	120.0250	-20.08	45.77	25.69	43.50	17.81	PASS	Vertical	PK
4	159.9930	-21.15	42.10	20.95	43.50	22.55	PASS	Vertical	PK
5	208.8859	-17.63	42.35	24.72	43.50	18.78	PASS	Vertical	PK
6	285.0385	-15.83	40.39	24.56	46.00	21.44	PASS	Vertical	PK

Radiated Spurious Emission above 1GHz:

Mode:			5.8G transmitting			Channel:		5731 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1331.1331	1.70	42.95	44.65	68.20	23.55	Pass	H	PK
2	2298.6799	4.61	41.82	46.43	68.20	21.77	Pass	H	PK
3	3496.6997	8.36	39.77	48.13	68.20	20.07	Pass	H	PK
4	8373.0915	-10.76	53.87	43.11	68.20	25.09	Pass	H	PK
5	11460.6640	-5.97	57.24	51.27	68.20	16.93	Pass	H	PK
6	14386.4591	0.49	49.61	50.10	68.20	18.10	Pass	H	PK
7	1577.0077	2.52	41.75	44.27	68.20	23.93	Pass	V	PK
8	2100.6601	5.62	41.66	47.28	68.20	20.92	Pass	V	PK
9	3338.8339	8.25	40.22	48.47	68.20	19.73	Pass	V	PK
10	8968.0645	-8.68	52.60	43.92	68.20	24.28	Pass	V	PK
11	11462.9642	-5.96	55.43	49.47	68.20	18.73	Pass	V	PK
12	14397.9599	0.62	49.88	50.50	68.20	17.70	Pass	V	PK

Mode:			5.8G transmitting			Channel:		5767 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1421.8922	1.84	43.03	44.87	68.20	23.33	Pass	H	PK
2	2297.0297	4.60	41.83	46.43	68.20	21.77	Pass	H	PK
3	3858.6359	9.56	39.54	49.10	68.20	19.10	Pass	H	PK
4	9154.3770	-8.15	53.01	44.86	68.20	23.34	Pass	H	PK
5	11532.7355	-6.02	56.51	50.49	68.20	17.71	Pass	H	PK
6	14205.5137	-0.82	50.91	50.09	68.20	18.11	Pass	H	PK
7	1317.3817	1.67	43.06	44.73	68.20	23.47	Pass	V	PK
8	2538.5039	5.54	42.19	47.73	68.20	20.47	Pass	V	PK
9	3807.4807	9.39	40.13	49.52	68.20	18.68	Pass	V	PK
10	8378.4586	-10.74	54.17	43.43	68.20	24.77	Pass	V	PK
11	11532.7355	-6.02	56.14	50.12	68.20	18.08	Pass	V	PK
12	17299.2199	3.85	51.69	55.54	68.20	12.66	Pass	V	PK
13	17299.9867	3.85	41.96	45.81	54.00	8.19	Pass	V	AV

Mode:			5.8G transmitting			Channel:		5795 MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1539.6040	2.23	42.11	44.34	68.20	23.86	Pass	H	PK
2	2066.0066	5.44	41.61	47.05	68.20	21.15	Pass	H	PK
3	3311.3311	8.30	40.48	48.78	68.20	19.42	Pass	H	PK
4	8884.4923	-9.25	52.93	43.68	68.20	24.52	Pass	H	PK
5	11588.7059	-6.40	61.42	55.02	68.20	13.18	Pass	H	PK
6	11589.4726	-6.41	55.65	49.24	54.00	4.76	Pass	H	AV
7	15903.7936	0.12	51.34	51.46	68.20	16.74	Pass	H	PK
8	1542.9043	2.25	42.15	44.40	68.20	23.80	Pass	V	PK
9	2421.8922	4.99	41.52	46.51	68.20	21.69	Pass	V	PK
10	3802.5303	9.38	39.51	48.89	68.20	19.31	Pass	V	PK
11	9129.8420	-8.38	54.21	45.83	68.20	22.37	Pass	V	PK
12	12468.8979	-4.19	53.65	49.46	68.20	18.74	Pass	V	PK
13	15899.9600	0.13	51.20	51.33	68.20	16.87	Pass	V	PK

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


$$\text{Final Test Level} = \text{Receiver Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:

Mode:		Channel:	5731
Remark:			


Test Graph

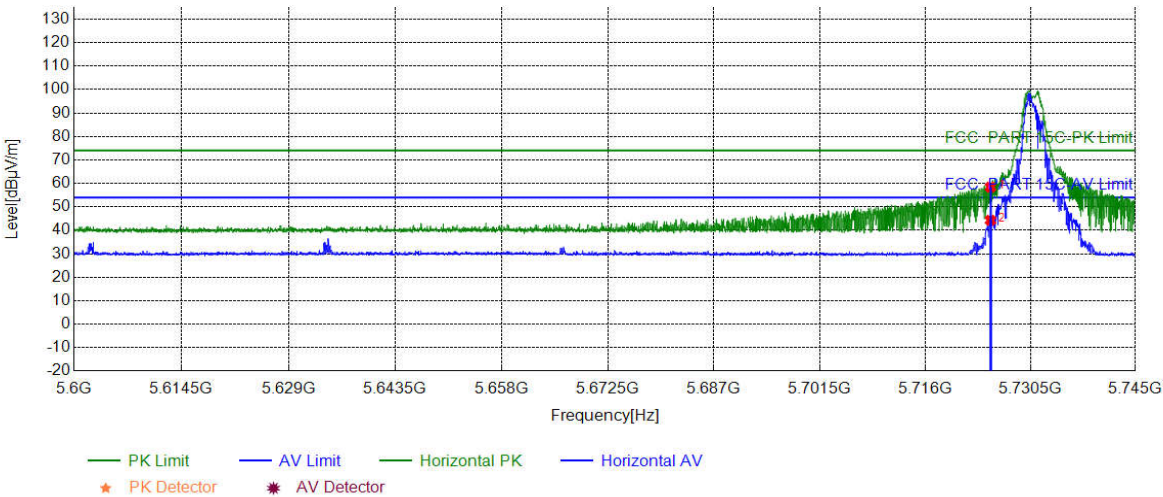

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5725.0000	-13.83	72.25	58.42	74.00	15.58	PASS	Horizontal	PK
2	5725.0000	-13.83	58.11	44.28	54.00	9.72	PASS	Horizontal	AV

Mode:		Channel:	5731
Remark:			


Test Graph

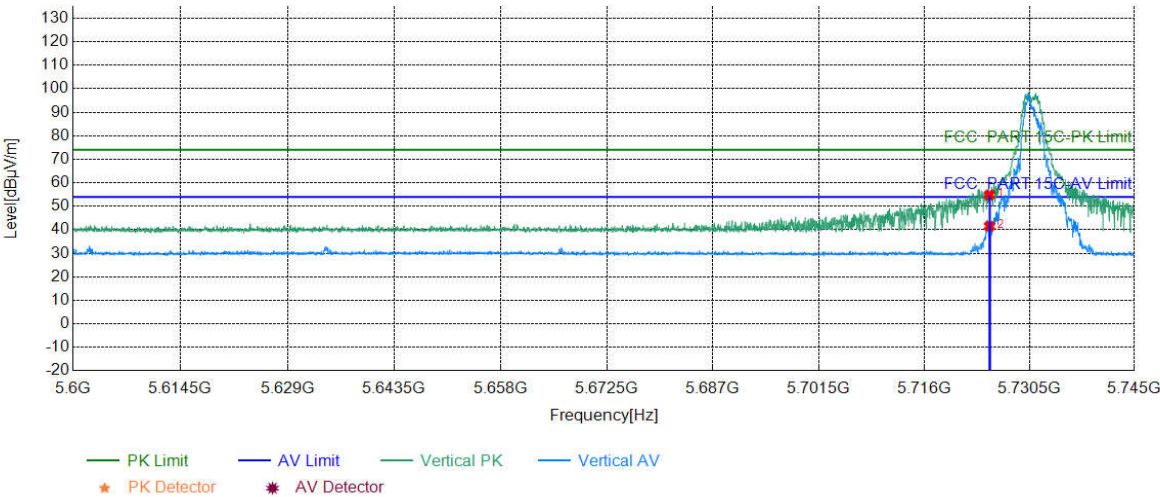

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5725.0000	-13.83	68.66	54.83	74.00	19.17	PASS	Vertical	PK
2	5725.0000	-13.83	55.34	41.51	54.00	12.49	PASS	Vertical	AV

Mode:		Channel:	5795
Remark:			


Test Graph

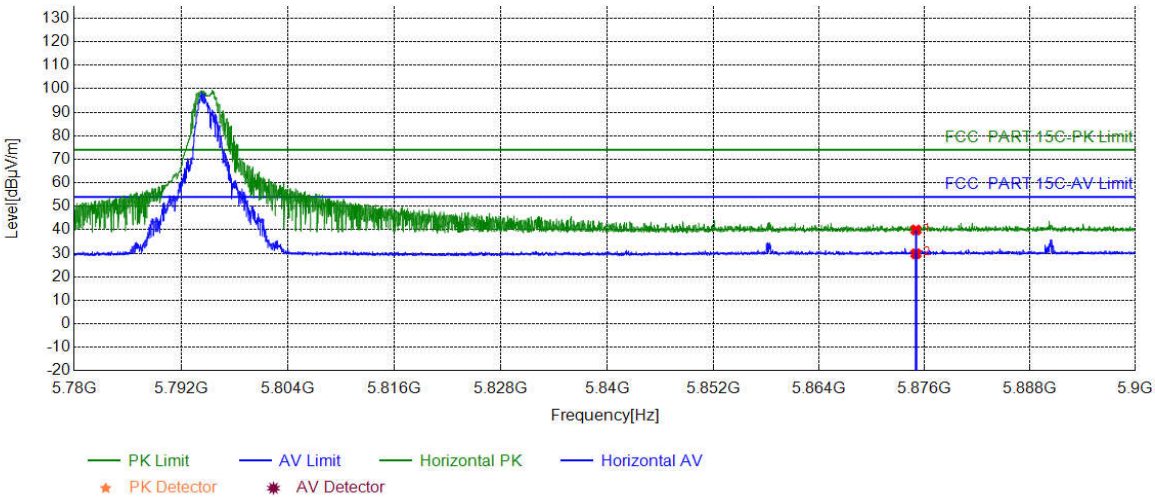

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5875.0000	-13.60	53.52	39.92	74.00	34.08	PASS	Horizontal	PK
2	5875.0000	-13.60	43.41	29.81	54.00	24.19	PASS	Horizontal	AV

Mode:		Channel:	5795
Remark:			

Test Graph

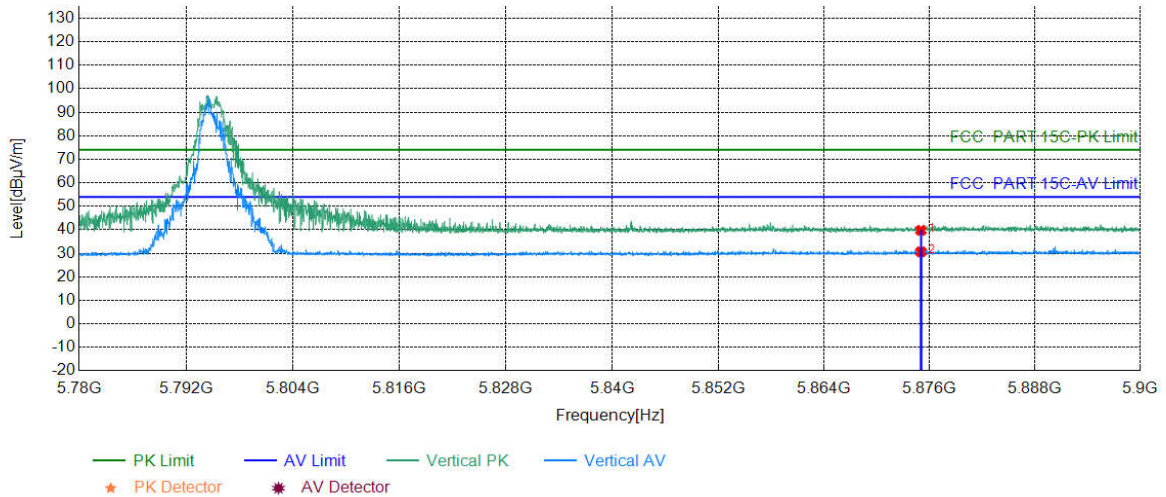

Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	5875.0000	-13.60	53.37	39.77	74.00	34.23	PASS	Vertical	PK
2	5875.0000	-13.60	44.24	30.64	54.00	23.36	PASS	Vertical	AV

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Factor – Preamplifier Factor

7 Appendix A

Refer to Appendix: 5.8G of EED32N81004702.