



CCL ELECTRONICS LTD

**WI-FI weather station with  
5-In-1 professional sensor  
Model: C6089A  
User Manual**



TABLE OF CONTENTS

PRECAUTIONS . . . . . 1

INTRODUCTION . . . . . 1

OVERVIEW . . . . . 2

    CONSOLE . . . . . 2

    LCD DISPLAY . . . . . 2

    WIRELESS 5-IN-1 SENSOR . . . . . 3

INSTALLATION AND SETUP . . . . . 4

    INSTALL WIRELESS 5-IN-1 SENSOR . . . . . 4

    POWER UP CONSOLE . . . . . 5

    SYNCHRONIZING ADDITIONAL WIRELESS SENSOR(S) (OPTIONAL) . . . . . 6

    POINTING THE WIRELESS 5-IN-1 SENSOR TO SOUTH . . . . . 6

CREATE WEATHER SERVER ACCOUNT & SETUP WI-FI CONNECTION . . . . . 6

    CREATE WEATHER UNDERGROUND ACCOUNT . . . . . 6

    CREATE WEATHERCLOUD ACCOUNT . . . . . 8

    SETUP WI-FI CONNECTION . . . . . 10

    SETUP THE WEATHER SERVER CONNECTION . . . . . 11

    ADVANCE SETTING IN WEB INTERFACE . . . . . 12

    VIEW YOUR WEATHER DATA IN WUNDERGROUND . . . . . 13

    VIEW YOUR WEATHER DATA IN WEATHERCLOUD . . . . . 13

    FIRMWARE UPDATE . . . . . 13

OTHER SETTING & FUNCTIONS OF THE CONSOLE . . . . . 14

    MANUAL CLOCK SETTING . . . . . 14

    SETTING ALARM TIME . . . . . 14

    ACTIVATING ALARM AND TEMPERATURE PRE-ALARM FUNCTION . . . . . 15

    MOON PHASE . . . . . 15

    TEMPERATURE / HUMIDITY FUNCTION . . . . . 16

    TREND INDICATOR . . . . . 16

    WIND . . . . . 16

    WEATHER INDEX . . . . . 18

    WEATHER FORECAST . . . . . 19

    BAROMETRIC PRESSURE . . . . . 19

    RAIN . . . . . 19

    MAX / MIN DATA RECORD . . . . . 20

    PAST 24 HOURS HISTORY DATA . . . . . 20

    WEATHER ALERT SETTING . . . . . 20

    BACK LIGHT . . . . . 21

    DISPLAY CONTRAST . . . . . 21

MAINTENANCE . . . . . 21

    BATTERY REPLACEMENT . . . . . 21

    WIRELESS 5-IN-1 SENSOR MAINTENANCE . . . . . 22


    TROUBLESHOOT . . . . . 22


SPECIFICATION . . . . . 23

    CONSOLE . . . . . 23

    WIRELESS 5-IN-1 SENSOR . . . . . 25

ABOUT THIS USER'S MANUAL

 This symbol represents a warning. To ensure safe use, always adhere to the instructions described in this documentation.

 This symbol is followed by a user's tip.



## PRECAUTIONS

---



- Keep and reading the "User manual" is highly recommended. The manufacturer and supplier cannot accept any responsibility for any incorrect readings, export data lost and any consequences that occur should an inaccurate reading take place.
- This product is designed for use in the home only as indication of weather conditions. This product is not to be used for medical purposes or for public information
- Do not subject the unit to excessive force, shock, dust, temperature or humidity.
- Do not cover the ventilation holes with any items such as newspapers, curtains etc.
- Do not immerse the unit in water. If you spill liquid over it, dry it immediately with a soft, lint-free cloth.
- Do not clean the unit with abrasive or corrosive materials.
- Do not tamper with the unit's internal components. This invalidates the warranty.
- Placement of this product on certain types of wood may result in damage to its finishing for which manufacturer will not be responsible. Consult the furniture manufacturer's care instructions for information.
- Only use fresh batteries. Do not mix new and old batteries.
- Only use attachments / accessories specified by the manufacturer.
- Images shown in this manual may differ from the actual display.
- When disposing of this product, ensure it is collected separately for special treatment.
- Dispose of used batteries according to the instructions.
- CAUTION! Risk of explosion if battery is replaced by an incorrect type.
- Battery cannot be subjected to high or low extreme temperatures, low air pressure at high altitude during use, storage or transportation, if not, it may result in an explosion or the leakage of flammable liquid or gas.
- Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- The socket-outlet shall be installed near the equipment and easily be accessible.
- The contents of this manual may not be reproduced without the permission of the manufacturer.
- Technical specifications and user manual contents for this product are subject to change without notice.
- When replacement parts are required, be sure the service technician uses replacement parts specified by the manufacturer that have the same characteristics as the original parts. Unauthorized substitutions may result in fire, electric shock, or other hazards.
- Do not ingest the battery, Chemical Burn Hazard.
- This product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children.
- If the battery compartment does not close securely, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- The console is intended to be used only indoors.
- This product is intended for use only with the adaptor provided.
- The console shall be used with the adaptor that included in the packaging.
- Place the console at least 20cm from nearby persons.
- This device is only suitable for mounting at height < 2m.

## INTRODUCTION

---

Thank you for selecting WI-FI weather station with 5-In-1 professional sensor. This system gathers and automatically uploads accurate and detail weather data to Weather Underground and Weathercloud website - the famous weather service which allows weather observers to upload their local weather data with automated personal weather stations (PWS) - at which you can access and upload your weather data freely. This product offers professional weather observers or serious weather enthusiasts robust performance with a wide range of options and sensors. You will get your own local forecast, high/ lows, totals and averages for virtually all weather variables without using a PC/Mac.

The 5-In-1 sensor which measures outdoor temperature, humidity, wind, rain together with up to 7 individual temperature humidity sensors, which can add to a sensor array of maximum 7 units continually, transmits weather data to the console. Both sensors are fully assembled and calibrated for your easy installation. They send data at a low power radio frequency to the console from up to 150m/450 feet away (line of sight).

In the console, high-speed processors are embedded to analyze the received weather data and these real-time data can be published to [Wunderground.com](http://Wunderground.com) and [weathercloud.net](http://weathercloud.net) through your home WI-FI router. The console can also synchronize with Internet time server to show high precision time and for its weather data time stamp. The color LCD display shows informative weather readings with advanced features, such as high/low alert alarm, different weather index, and MAX/ MIN records. With calibration, sunrise / sunset and moon phase features, this system is truly a remarkably personal yet professional weather station for your own backyard.


### NOTE:

This instruction manual contains useful information on the proper use and care of this product. Please read

this manual through to fully understand and enjoy its features, and keep it handy for future use.

OVERVIEW

CONSOLE

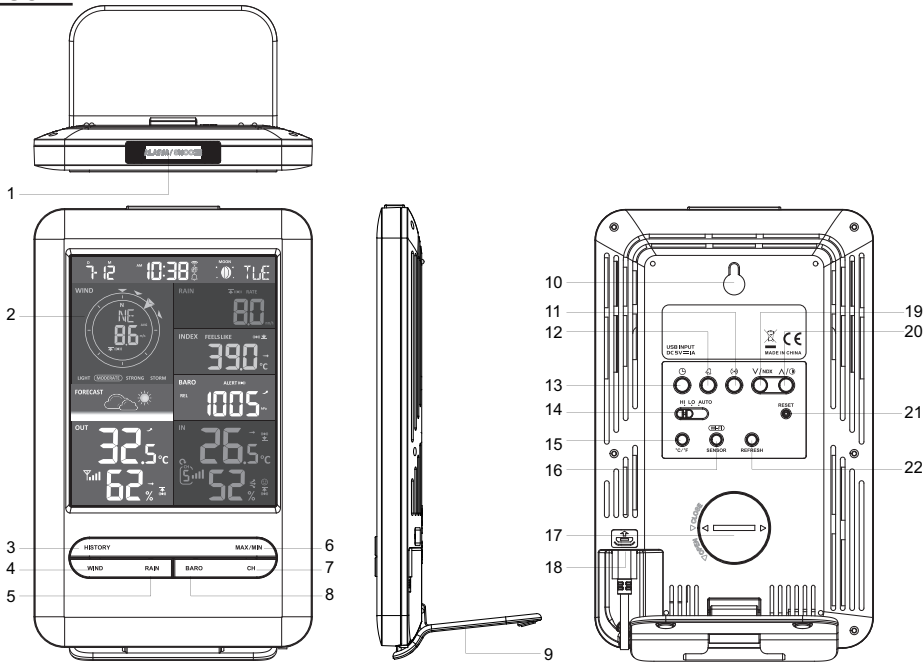

1. [ **ALARM/SNOOZE** ] key

2. LCD display

3. [ **HISTORY** ] key

4. [ **WIND** ] key

5. [ **RAIN** ] key

6. [ **MAX / MIN** ] key

7. [ **CHANNEL** ] key

8. [ **BARO** ] key
9. Table stand

10. Wall mounting holder

11. [ **ALERT** ] key

12. [ **ALARM** ] key

13. [ **CLOCK SET** ] key

14. [ **HI / LO / AUTO** ] key

15. [ **°C / °F** ] slide switch

16. [ **SENSOR / WI-FI** ] key
17. Battery door

18. USB Power socket


19. [ **V / NDX** ] key

20. [ **^ / v** ] key


21. [ **RESET** ] key

22. [ **REFRESH** ] key

LCD DISPLAY

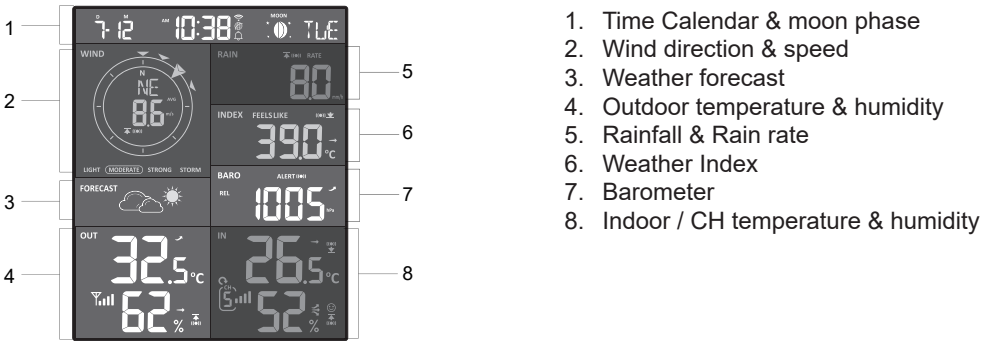

## WIRELESS 5-IN-1 SENSOR

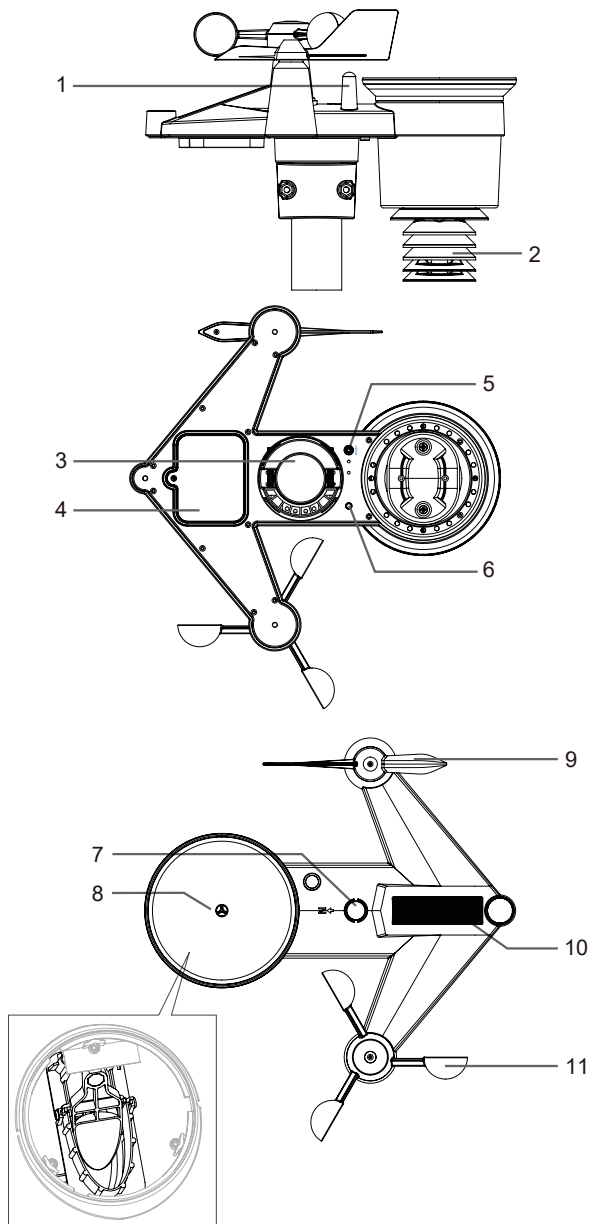

- |  |                            |
|--|----------------------------|
| 1. Antenna   | 7. Bubble level gradienter |
| 2. Radiation shield & Thermo-hygro sensor          | 8. Rain collector          |
| 3. Mounting parts (fit for 35 ~40mm diameter pole) | 9. Wind vane               |
| 4. Battery door                                    | 10. Solar panel            |
| 5. <b>[ RESET ]</b> key                            | 11. Wind cups              |
| 6. Transmission status LED                         |                            |

**INSTALLATION AND SETUP**


Your console can pair up with one wireless 5-In-1 outdoor sensor and up to 7 wireless thermo-hygro sensors. (1pc wireless thermo-hygro sensor included)

**INSTALL WIRELESS 5-IN-1 SENSOR**

Your wireless 5-In-1 sensor measures wind-speed, wind-direction, rainfall, temperature and humidity for you. It's assembled and calibrated for your easy installation.


**INSTALL RAIN COLLECTOR**

Rain Collector Installation

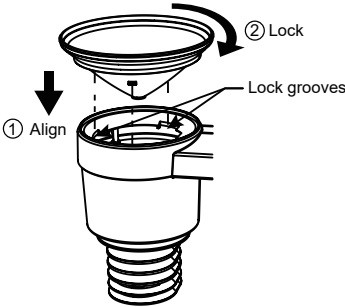

**INSTALL BATTERIES**


Unscrew the battery door at bottom of unit and insert the batteries according to the +/- polarity indicated. Screw the battery door compartment on tightly.

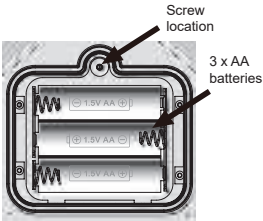



**NOTE:**

The red LED will begin flashing every 12 seconds.

**MOUNTING POLE AND DIRECTION ALIGNMENT**

 Install the wireless 5-In-1 sensor in an open location with no obstructions above and around the sensor for accurate rain and wind measurement. Install the sensor with the smaller end facing the North to properly orient the wind direction vane. Secure the mounting stand and bracket (included) to a 35 ~ 40mm diameter steel post or pole, and allow minimum 2m off the ground.

Add rubber pad before mounting on pole or post

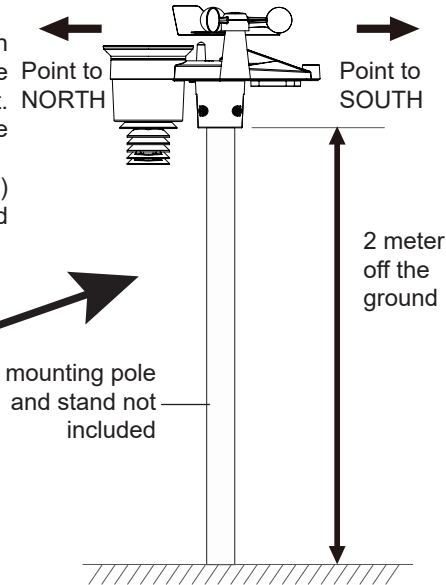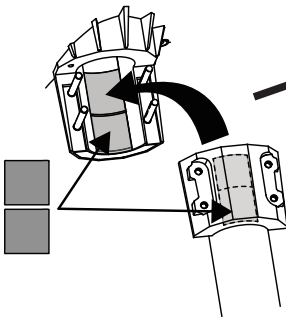

## **POWER UP CONSOLE**

Your console can pairing up with the wireless 5-IN-1 outdoor weather sensor and up to 7 optional wireless sensors. (Not included)

## **INSTALL THE BACKUP BATTERY**

1. Remove the battery door of the console.
2. Insert a new CR2032 battery as per the polarity information marked on the battery compartment.
3. Replace the battery door.


### **NOTE:**

The backup battery can backup: Time & Date, Max/Min & Past 24 hours weather records, Alert setting values, offset value of weather data and Sensor(s) channel history.

The built-in memory can backup: Router setting and Weather server setting

## **POWER UP THE CONSOLE**

1. Plug the power adapter USB plug to power up the main unit.
2. Once the main unit power up, all the segments of the LCD will be shown.
3. The console will automatically start AP mode.

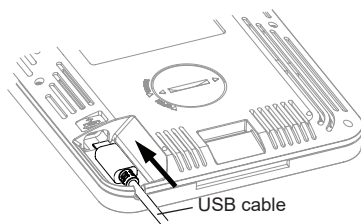


### **NOTE:**


If no display appears on the LCD after you plug the adaptor, press [ **RESET** ] key by using a pointed object.

## **TABLE STAND INSTALLATION**

The unit is designed for desktop or wall mount for easy viewing. follow the steps to hook the table stand on the bottom of the console.

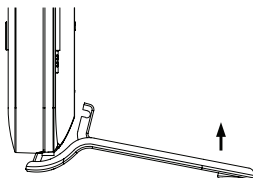

Step 1

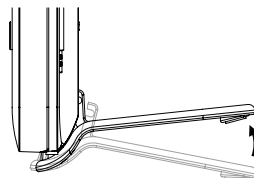

Step 2

## **SET LCD DISPLAY VIEWING ANGLE**

Press [ **^** ] or [ **v** ] key in normal mode to adjust LCD viewing angle to fit table stand or wall mount situation.

## **BUILT-IN MEMORY**

The console has built-in FLASH memory that holds the vital settings. These include:

- Time Zone, DST status, Time SYNC status, Wi-Fi and Weather server setting, Latitude / Longitude, Hemisphere setting, Calibration values, and Sensor ID of paired sensor(s)



## **RESET AND FACTORY HARD RESET**

To reset the console and start again, press the [ **RESET** ] key once or remove the backup battery and then unplug the adapter. To resume factory settings and remove all data, press and hold the [ **RESET** ] key for 6 seconds.

## RESYNCHRONIZE SENSORS

Press the [ **SENSOR / WI-FI** ] key once for the console to enter sensor Synchronization mode, and the console will re-register all the sensors that have already been registered to the it before. i.e. the console will not lose the connection of the sensors that you'd paired up before.

## CHANGING BATTERIES AND MANUAL PAIRING OF SENSOR

Whenever you changed the batteries of the wireless thermo-hygro or 5-In-1 weather sensor, re-synchronization must be done manually.

1. Change all the batteries to new ones in the sensor.
2. Press [ **SENSOR / WI-FI** ] key on the console to enter sensor synchronization mode.
3. Press [ **RESET** ] key on the wireless thermo-hygro or 5-In-1 weather sensor.

## SYNCHRONIZING ADDITIONAL WIRELESS SENSOR(S) (OPTIONAL)

The console can support up to 7 additional wireless sensors.


1. Press the [ **SENSOR / WI-FI** ] key once on the console to enter synchronization mode.
2. Press the [ **RESET** ] key on the new sensor, and wait for a few minutes for the new sensor to paired to the console.

### NOTE:

- Channel number of the thermo-hygro sensor must not be duplicated among the sensors. Please refer to "**INSTALL WIRELESS THERMO-HYGRO SENSOR**" for details
- This console can support different type of additional wireless sensor, e.g. soil moisture and pool sensor. If you would like to pair up additional sensors, please check with your retailer for more detail.

## POINTING THE WIRELESS 5-IN-1 SENSOR TO SOUTH

The outdoor 5-In-1 sensor is calibrated to point to North for the maximum accuracy. However, for the user's convenience (e.g. users in the Southern hemisphere), it is possible to use the sensor with the wind vane pointing to South.

1. Install the 5-In-1 wireless sensor with its wind meter end pointing to South. (Please refer to **INSTALLATION OF THE WIRELESS SENSOR** section for mounting details)
2. Select "S" in hemisphere section of the setup UI setup page. (Please refer to **SETUP THE WEATHER SERVER CONNECTION** section for setup details)
3. Press  icon to confirm and exit.

### NOTE:

Changing the hemisphere setting will automatically switch the direction of the moon phase on the display.

## CREATE WEATHER SERVER ACCOUNT & SETUP WI-FI CONNECTION

The console can upload weather data to WUnderground and / or Weathercloud through WI-FI router, you can follow the step below to setup your device.

### NOTE:

The Weather Underground and Weathercloud website are subjected to change without notice.

## CREATE WEATHER UNDERGROUND ACCOUNT

1. In <https://www.wunderground.com> click the "Join" on the top right corner to open the registration page. Follow the instructions to create your account.



### NOTE:

Use the valid email address to register your account.




2. After you have created your account and completed the Email validation, please go back to the WUunderground web page to login. Then, click “My Profile” button on the top to open the drop-down menu and click “My Weather Station”.



3. In "My Weather Station" page bottom, press the "Add New Device" button to add your device.
4. In step “Select a Device Type”, choose “Other” in the list, then press “Next”.



5. In step “Set Device Name & Location”, select your location on the map, then press "Next".

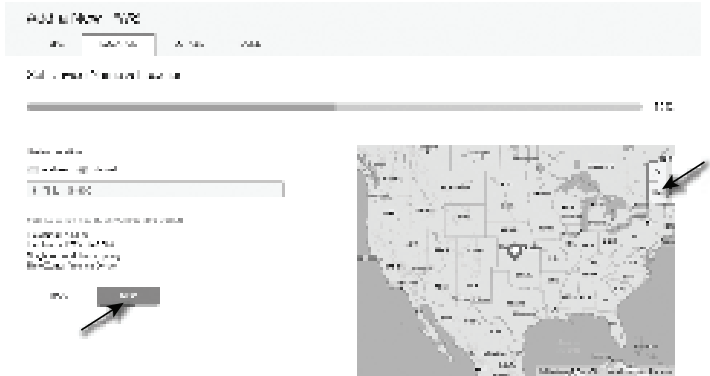

6. Follow their instruction to enter your station information, in the Step "Tell Us More About Your Device", (1) enter a Name for your weather station. (2) fill in the other information (3) select "**I Accept**" to accept Weather underground's privacy terms, (4) click "**Next**" to create your station ID and key.

1. Device Name

2. Device Location

3. Privacy Policy

4. Next

7. Jot down Your "Station ID" and "Station key" for the further setup step.

Station ID: 1234567890

Station Key: ABCDEF123456

Next Step

**CREATE WEATHERCLOUD ACCOUNT**

1. In <https://weathercloud.net> enter your information in "Join us today" section, then follow the instructions to create your account.

Join us today

First Name

Last Name

Email

Password

Join

[Forgot Password](#)

**NOTE:**

Use the valid email address to register your account.

2. Sign in weathercloud and then you will go the "Devices" page, click "+ New" to create new device.



3. Enter all the information in **Create new device** page, for the **Model\*** selection box select the **"W100 Series"** under **"CCL"** section. For the Link type\* selection box select the **"SETTINGS"**, Once you have completed, click **Create**.

A screenshot of the 'Create new device' form. The form has two main sections: 'Basic information' and 'Link information'. In the 'Basic information' section, the 'Model' dropdown is set to 'W100 Series' and the 'Link type' dropdown is set to 'SETTINGS'. In the 'Link information' section, there are fields for 'Link ID', 'Link key', and 'Link type'. The 'Create' button is highlighted with an arrow.

4. Jot down your ID and key for the further setup step.



**SETUP WI-FI CONNECTION**

- 1. When you power up the console for the first time, the console LCD will show flashing "AP" and "📶" icon to signify that it has entered AP (Access Point) mode, and is ready for WI-FI settings. User can also press and hold the [ **SENSOR / WI-FI** ] key for 6 seconds to enter AP mode manually.
- 2. Use the smart phone, tablet, or computer to connect the console through WI-FI.
- 3. In PC/Mac choose WI-FI network settings or In Android / iOS choose setting → WI-FI to select the console's SSID: *PWS-XXXXXX* in the list and it will need several second to connect.



PC (Windows 10) Wi-Fi network interface



Android Wi-Fi network interface

- 4. Once connected, enter the following IP address into your Internet browser's address bar, to access the console's web interface:




**http://192.168.1.1**

**NOTE :**

- Some browsers will treat **192.168.1.1** as a search, so make sure you include **http://** header.
- Recommended browsers, such as the latest version of Chrome, Safari, Edge, Firefox or Opera.
- Wi-Fi network interface of PC/Mac or mobile subject to change.

**WI-FI CONNECTION STATUS**

Below is the WI-FI icon status on the console LCD:

		
Stable: Console is in connection with WI-FI router	Flashing: Console is trying to connect to WI-FI router	Flashing: Console currently in Access Point (AP) mode

## SETUP THE WEATHER SERVER CONNECTION

Enter the following information into the below web interface "SETUP" page to connect the console to weather server, If you do not want to use Wunderground.com or Weathercloud.net, please empty the station ID & key to ignore the data upload.

SETUP page

The screenshot shows the 'SETTINGS' page with the 'SETUP' tab selected. The page is divided into two main sections: 'WiFi Router setup' and 'Weather server setup'. The 'Weather server setup' section is further divided into 'Wunderground', 'Weathercloud', and 'Mac address' sub-sections. The 'Time server setup' section is also present. The 'Location for sunrise / sunset' section includes fields for Latitude, Longitude, and Hemisphere. The 'Firmware version' is 1.00. The 'Apply' button is at the bottom right.

Annotations:

- Press "ADVANCED" icon to Advanced page
- Select setup UI display language
- Press to search router
- Press to allow add router manually
- Select router (SSID) for connection
- Manually enter the SSID if not on list
- Select router's security type (usually WAP2)
- Router's password (leave blank if the Security type is "Open")
- Enter new Station ID and Station key that assigned by Wundergruind
- Enter new Station ID and Station key that assigned by weathercloud
- Reserved for validated weather server, detail please consult with your retailer
- Enter new Station ID and Station key that assigned by the corresponding weather server
- Select time server
- Select time zone of your location
- Enter the Latitude value
- Enter the Longitude value
- Select the direction (e.g. EU countries Longitude is East and US is West)
- Select the sensor located hemisphere (e.g. US and EU countries are also "N", Australia is "S")
- Press to complete the setting

### NOTE:

- When WI-FI setup is completed, your PC/Mac or mobile will resume your default WI-FI connection.
- During AP mode, you can press and hold the [ **SENSOR / WI-FI** ] key for 6 seconds to stop AP mode and the console will restore your previous setting.

### TIME ZONE

To automatically set the time display to your time-zone, change the time zone in SETUP page of previous section from '0:00' (default) to your time zone (e.g.+1:00 for Germany).

The close-up shows the 'Time server setup' section with the 'Server URL' set to 'nist.time.gov' and the 'Time Zone' set to '0:00'. An arrow points to the 'Time Zone' dropdown menu.

TIME SERVER CONNECTION STATUS

After the console has connected to the Internet, it will attempt to connect to the Internet time server to obtain the UTC time. Once the connection succeeds and the console time has been updated, the " SYNC " icon will appear on the LCD.



The time will automatically synchronize Internet time server at 12:00AM and 12:00PM per day. Also you can press the [ REFRESH ] key to get the Internet time manually within 1 minute.

ADVANCE SETTING IN WEB INTERFACE

Press "ADVANCED" key at the top of web interface to enter the advance setting page, this page allow you to set and view the calibration data of the console, as well as update the firmware version on PC/Mac web browser.

ADVANCED page

Press "SETUP" icon to Setup page

SETTINGS

SETUP

ADVANCED

Select setting unit

Temperature °C Humidity %

In/Outdoor & Ch 1~7 temperature calibration section

In/Outdoor & Ch 1~7 humidity calibration section

Pressure calibration section

Select setting unit

Current offset value is the value that you set before to offset the pressure reading.

Current firmware version

The rain, wind speed, UV and Light calibration use gain method. The wind direction is +/- 10 offset.

The firmware update function only available in PC/Mac web browser

CALIBRATION

1. User can input the offset and/or gain values for different parameters while current offset and gain values are shown next to their corresponding blank.

2. Once completed, press 

Apply

 at the bottom of the SETUP page

The current offset value will show the previous value that you entered, please input the new value in the blank if any changes needed, the new value will effective once you press 

Apply

 icon in SETUP page.


12

## NOTE:

Calibration of most parameter is not required, with the exception of Relative Pressure, which must be calibrated to sea-level to account for altitude effects.

## VIEW YOUR WEATHER DATA IN WUNDERGROUND

To view your weather station live data in a web browser (PC or mobile version), please visit <http://www.wunderground.com>, and then enter your "Station ID" in the searching box. Your weather data will show up on the next page. You can also login your account to view and download the recorded data of your weather station.

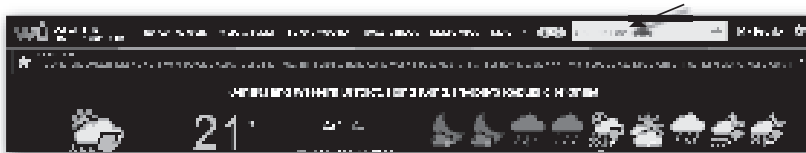



Another way to view your station is use the web browser URL bar, type below in the URL bar:


**<https://www.wunderground.com/dashboard/pws/XXXX>**

Then replace the XXXX by your Weather underground station ID to view your station live data.


You can also check Weather Underground web site to learn more about their mobile App for Android and iOS.

## VIEWING YOUR WEATHER DATA IN WEATHERCLOUD

1. To view your weather station live data in a web browser (PC or mobile version), please visit <https://weathercloud.net> and sign in your own account.
2. Click the  icon inside the  pull down menu of your station.

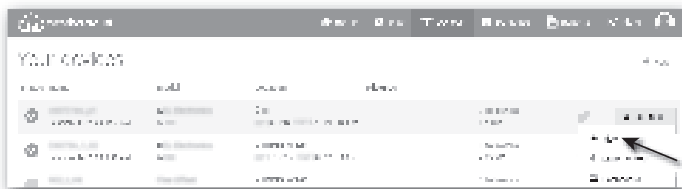

3. Click "Current", "Wind", "Evolution" or "Inside" icon to view the live data of your weather station.

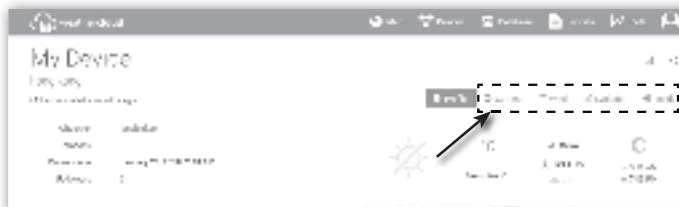

## FIRMWARE UPDATE

The console supports OTA firmware update capability. Its firmware may be updated over the air anytime (whenever necessary) through any web-browser on a PC/Mac with WI-FI connectivity. Update function, however, is not available through mobile/smart devices.




## FIRMWARE UPDATE STEP

1. Download the latest version firmware to your PC/Mac.
2. Set the Console into AP (access point) mode then connect the PC/Mac to the console (ref to "SETUP WI-FI CONNECTION" section in previous page).
3. Click the **Browse** in firmware update section and browse the location of the file you download in step 1. To update the WI-FI firmware, click the **Browse** in WI-FI firmware section.
4. Click the corresponding **Upload** to start transfer the firmware file to console.
5. In the meantime, the console will execute the update automatically and will show the update progress on display (i.e. 100 is completion).

The update time is around 5 ~ 10 minutes

6. The console will restart once the update is completed.
7. The console will stay in **AP mode** for you to check the firmware version and all the current setting.



### IMPORTANT NOTE:

- Please keep connecting the power during the firmware update process.
- Please make sure your PC/Mac's WI-FI connection is stable.
- When the update process start, do not operate the PC/Mac and console until the update finished.
- During firmware update the console will stop upload data to the cloud server. It will reconnect to your WI-FI router and upload the data again once the firmware update succeed. If the console cannot connect to your router, please enter the SETUP page to setup again.
- After the firmware update, If the setup informations are missing, please input the setup information again.
- Firmware update process have potential risk, which cannot guarantee 100% success. If the update fail, please redo the above step to update again.

## OTHER SETTING & FUNCTIONS OF THE CONSOLE

### MANUAL CLOCK SETTING

This console is designed to obtain the UTC time by synchronize with the assigned Internet time server. If you want to use it off line, you can set the time and date manually. During the first time startup, press and hold the **[ SENSOR / WI-FI ]** key for 6 seconds and let the console back to normal mode.

1. In normal mode, press and hold **[ CLOCK SET ]** key for 2 seconds to enter setting.
2. The setting sequence: DST AUTO/OFF → Hour → Minute → 12/24 hour format → Year → Month → Day → M-D/D-M format → Time sync ON/OFF → weekday Language.
3. Press **[ ^ ]** or **[ v ]** key to change the value. Press and hold the key for quick-adjust.
4. Press **[ CLOCK SET ]** key to save and exit the setting mode, or it will automatically exit the setting mode 60 seconds later without pressing any key.

### NOTE:

- In normal mode, press **[ CLOCK SET ]** key to switch between year and date display.
- During the setting, you can back to normal model by press and hold **[ CLOCK SET ]** key for 2 seconds.

### DAYLIGHT SAVING TIME (DST)

DST function is default "AUTO" (for EU or US version). If the current date on display is with in the summer daylight saving period, the time will be automatically adjusted forward by +1 hour, and DST icon will be shown on the LCD display.

### SETTING ALARM TIME

1. In normal time mode, press and hold **[ ALARM ]** key for 2 seconds until the alarm hour digit flashes to enter alarm time setting mode.
2. Press **[ ^ ]** or **[ v ]** key to change the value. Press and hold the key for quick-adjust.



3. Press [ **ALARM** ] key again to step the setting value to Minute with the Minute digit flashing.
4. Press [ **^** ] or [ **v** ] key to adjust the value of the flashing digit.
5. Press [ **ALARM** ] key to save and exit the setting.

#### NOTE:

- In alarm mode, the “” icon will display on the LCD.
- The alarm function will turn on automatically once you set the alarm time.

#### ACTIVATING ALARM AND TEMPERATURE PRE-ALARM FUNCTION

1. In normal mode, press [ **ALARM** ] key to show the alarm time for 5 seconds.
2. When the alarm time displays, press [ **ALARM** ] key again to activate the alarm function.  
Or press [ **ALARM** ] key twice to activate the alarm with ice pre-alarm function.

		
<b>Alarm off</b>	<b>Alarm on</b>	<b>Alarm with ice-alert</b>

#### NOTE:


Once the ice pre-alert activates, the pre-set alarm will sound and ice-alert icon will flash 30 minutes earlier if the outdoor temperature is below -3°C.

When clock reach the alarm time, alarm sound will start.

Where it can be stopped by following operation:

















- Auto-stop after 2 minutes alarming if without any operation and the alarm will activate again in the next day.
- By pressing [ **ALARM / SNOOZE** ] key to enter snooze that the alarm will sound again after 5 minutes.
- By pressing and hold [ **ALARM / SNOOZE** ] key for 2 seconds to stop the alarm and will activate again in the next day
- By pressing [ **ALARM** ] key to stop the alarm and the alarm will activate again in the next day.

#### NOTE:

- The snooze could be used continuously in 24 hours.
- During the snooze, the alarm icon “” will keep flashing.

#### MOON PHASE

The moon phase is determined by the time, date and time zone. The following table explains the moon phase icons of the Northern and Southern Hemispheres. Please refer to **POINTING THE WIRELESS 5-IN-1 SENSOR TO SOUTH** section about how to setup for the Southern Hemispheres.

Northern Hemisphere	Moon Phase	Southern Hemisphere
	New Moon	
	Waxing Crescent	
	First quarter	
	Waxing Gibbous	
	Full Moon	
	Waning Gibbous	
	Third quarter	
	Waning Crescent	

TEMPERATURE / HUMIDITY FUNCTION

- The temperature and humidity reading are display on the outdoor and indoor / CH section.
- Use the [ °C / °F ] slide switch to select the temperature display unit.
- If temperature / humidity is below the measurement range, the reading will show "Lo". If temperature / humidity is above the measurement range, the reading will show "HI".

COMFORT INDICATION

The comfort indication is a pictorial indication based on indoor air temperature and humidity in an attempt to determine comfort level.

Too cold	Comfortable	Too hot

NOTE:

- Comfort indication can vary under the same temperature, depending on the humidity.
- There is no comfort indication when temperature is below 0°C (32°F) or over 60°C (140°F).

WIRELESS SENSOR SIGNAL RECEIVING

1. The console display signal strength for the wireless sensor(s), as per table below:

Outdoor 5-In-1 sensor			
Thermo-hygro channel sensor			
	No signal	Weak signal	Good signal

- 2. If the signal has discontinued and does not recover within 15 minutes, the signal icon will disappear. The temperature and humidity will display "Er" for the corresponding channel.
- 3. If the signal does not recover within 48 hours, the "Er" display will become permanent. You need to replace the batteries and then press [ SENSOR / WI-FI ] key to pair up the sensor again.

VIEW THE OTHER THERMO-HYGRO CHANNELS (OPTIONAL FEATURE WITH ADD ON EXTRA SENSORS)

This console is capable to pair with a wireless 5-In-1 sensor and up to 7 wireless thermo-hygro sensors. If you have 2 or more thermo-hygro sensors, you can press [ CHANNEL ] key to switch between different wireless channels in normal mode, or press and hold [ CHANNEL ] key for 2 seconds to toggle auto-cycle mode to display the connected channels at 4 seconds interval. During auto-cycle mode, the "🔄" icon will show on the indoor channel section of the console display. Press [ CHANNEL ] key to stop auto cycle and display the current channel.


TREND INDICATOR

The trend indicator shows the trends of changes in the forthcoming few minutes. The icon will appear in temperature, humidity, index and baro section.

Rising	Steady	Falling

WIND

WIND SPEED AND DIRECTION SECTION OVERVIEW

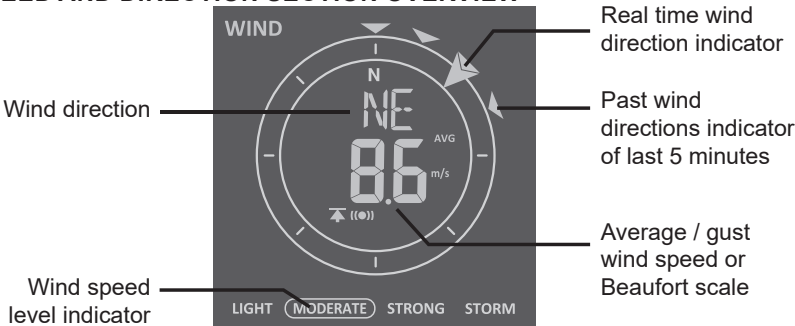

## TO SET THE WIND SPEED UNIT AND DIRECTION DISPLAY FORMAT

1. In normal mode, press and hold [ **WIND** ] key for 2 seconds to enter into wind speed unit mode and the unit will flash. Press [  $\wedge$  ] or [  $\vee$  ] key to change the wind speed unit in this sequence: m/s  $\rightarrow$  km/h  $\rightarrow$  knots  $\rightarrow$  mph
2. Press [ **WIND** ] key again to enter wind direction setting mode. The wind direction reading will flash, and then press [  $\wedge$  ] or [  $\vee$  ] key to select the display format between 360 degree or 16 direction.
3. Press [ **WIND** ] key again to return normal mode.

## TO SELECT THE WIND DISPLAY MODE

In normal mode, press [ **WIND** ] key to switch between **BEAUFORT** scale, **AVERAGE** and **GUST** wind speed.

## BEAUFORT SCALE TABLE

The Beaufort scale is an international scale of wind velocities ranging from 0 (calm) to 12 (Hurricane force).

Beaufort Scale	Description	Wind Speed	Land Condition
0	Calm	< 1 km/h	Calm. Smoke rises vertically.
		< 1 mph	
		< 1 knots	
		< 0.3 m/s	
1	Light air	1.1 ~ 5km/h	Smoke drift indicates wind direction. Leaves and wind vanes are stationary.
		1 ~ 3 mph	
		1 ~ 3 knots	
		0.3 ~ 1.5 m/s	
2	Light breeze	6 ~ 11 km/h	Wind felt on exposed skin. Leaves rustle. Wind vanes begin to move.
		4 ~ 7 mph	
		4 ~ 6 knots	
		1.6 ~ 3.3 m/s	
3	Gentle breeze	12 ~ 19 km/h	Leaves and small twigs constantly moving, light flags extended.
		8 ~ 12 mph	
		7 ~ 10 knots	
		3.4 ~ 5.4 m/s	
4	Moderate breeze	20 ~ 28 km/h	Dust and loose paper raised. Small branches begin to move.
		13 ~ 17 mph	
		11 ~ 16 knots	
		5.5 ~ 7.9 m/s	
5	Fresh breeze	29 ~ 38 km/h	Branches of a moderate size move. Small trees in leaf begin to sway.
		18 ~ 24 mph	
		17 ~ 21 knots	
		8.0 ~ 10.7 m/s	
6	Strong breeze	39 ~ 49 km/h	Large branches in motion. Whistling heard in overhead wires. Umbrella use becomes difficult. Empty plastic bins tip over.
		25 ~ 30 mph	
		22 ~ 27 knots	
		10.8 ~ 13.8 m/s	
7	High wind	50 ~ 61 km/h	Whole trees in motion. Effort needed to walk against the wind.
		31 ~ 38 mph	
		28 ~ 33 knots	
		13.9 ~ 17.1 m/s	
8	Gale	62 ~ 74 km/h	Some twigs broken from trees. Cars veer on road. Progress on foot is seriously impeded
		39 ~ 46 mph	
		34 ~ 40 knots	
		17.2 ~ 20.7 m/s	


9	Strong gale	75 ~ 88 km/h	Some branches break off trees, and some small trees blow over. Construction / temporary signs and barricades blow over.
		47 ~ 54 mph	
		41 ~ 47 knots	
		20.8 ~ 24.4 m/s	
10	Storm	89 ~ 102 km/h	Trees are broken off or uprooted, structural damage likely.
		55 ~ 63 mph	
		48 ~ 55 knots	
		24.5 ~ 28.4 m/s	
11	Violent storm	103 ~ 117 km/h	Widespread vegetation and structural damage likely.
		64 ~ 73 mph	
		56 ~ 63 knots	
		28.5 ~ 32.6 m/s	
12	Hurricane force	≥ 118 km/h	Severe widespread damage to vegetation and structures. Debris and unsecured objects are hurled about.
		≥ 74 mph	
		≥ 64 knots	
		≥ 32.7m/s	

**WEATHER INDEX**

At the WEATHER INDEX section, you can press [ **NDX** ] Index key to view different weather index in this sequence: **FEELS LIKE → DEW POINT → HEAT INDEX → WIND CHILL**.

**FEELS LIKE**

Feels Like Temperature shows what the outdoor temperature will feel like. It's a collective mixture of Wind Chill factor (18°C or below) and the Heat Index (26°C or above). For temperatures in the region between 18.1°C to 25.9°C where both wind and humidity are less significant in affecting the temperature, the device will show the actual outdoor measured temperature as Feels Like Temperature.

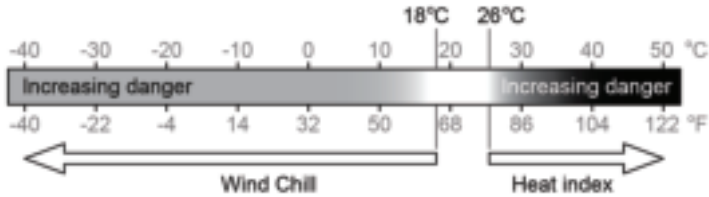

**DEW POINT**

- The dew point is the temperature below which the water vapor in air at constant barometric pressure condenses into liquid water at the same rate at which it evaporates. The condensed water is called *dew* when it forms on a solid surface.
- The dew point temperature is determined by the temperature & humidity data from wireless 5-In-1 sensor.

**HEAT INDEX**

The heat index which is determined by the wireless 5-In-1 sensor's temperature & humidity data when the temperature is between 26°C (79°F) and 50°C (120°F).

Heat Index range	Warning	Explanation
27°C to 32°C (80°F to 90°F)	Caution	Possibility of heat exhaustion
33°C to 40°C (91°F to 105°F)	Extreme Caution	Possibility of heat dehydration
41°C to 54°C (106°F to 129°F)	Danger	Heat exhaustion likely
≥55°C (≥130°F)	Extreme Danger	Strong risk of dehydration / sun stroke

**WIND CHILL**

A combination of the wireless 5-In-1 sensor's temperature and wind speed data determines the current wind chill factor.

## WEATHER FORECAST

The built-in barometer continually monitor atmosphere pressure. Based on the data collected, it can predict the weather conditions in the forthcoming 12~24 hours within a 30~50km (19~31 miles) radius.



Sunny



Partly cloudy



Cloudy



Rainy



Rainy / Stormy



Snowy

### NOTE:

- The accuracy of a general pressure-based weather forecast is about 70% to 75%.
- The weather forecast is reflecting the weather situation for next 12~24 hours, it may not necessarily reflect the current situation.
- The **SNOWY** weather forecast is not based on the atmospheric pressure, but based on the temperature of outdoor. When the temperature is below -3°C (26°F), the **SNOWY** weather icon will be displayed on the LCD.

## BAROMETRIC PRESSURE

The atmospheric pressure is the pressure at any location of the earth caused by the weight of the column of air above it. One atmospheric pressure refers to the average pressure and gradually decreases as altitude increases. Meteorologists use barometers to measure atmospheric pressure. Since variation in atmospheric pressure greatly affected by weather, it is possible to forecast the weather by measuring the changes in pressure.



### TO VIEW THE BAROMETRIC PRESSURE IN DIFFERENT UNIT

1. In normal mode, press and hold [ **BARO** ] key with 2 seconds enter unit setting mode.
2. Press [ **△** ] or [ **▽** ] key to change the unit in sequence: hPa → inHg → mmHg

### TO SELECT ABSOLUTE OR RELATIVE BAROMETRIC PRESSURE MODE

In normal mode, press [ **BARO** ] key to switch between **ABSOLUTE** / **RELATIVE** barometric pressure.

## RAIN

The **RAINFALL** section shows the rainfall or rain rate information.

### TO SET THE RAINFALL UNIT

1. In normal mode, press and hold [ **RAIN** ] key for 2 seconds to enter unit setting mode.
2. Press [ **△** ] or [ **▽** ] key to toggle the unit between mm and in (rainfall) or mm/h and in/h (rain rate).
3. Press [ **RAIN** ] key to confirm and exit the setting.

### TO SELECT THE RAINFALL DISPLAY MODE

Press [ **RAIN** ] key to toggle between:

1. **HOURLY** - the total rainfall in the past hour
2. **DAILY** - the total rainfall from midnight (default)
3. **WEEKLY** - the total rainfall of the current week
4. **MONTHLY** - the total rainfall of the current calendar month
5. **Total** - the total rainfall since the last reset
6. **Rate** - Current rainfall rate (base on 10 min rain data)

Period of rainfall



TO RESET THE TOTAL RAINFALL RECORD

In normal mode, press and hold [ HISTORY ] key for 2 seconds to reset all the rainfall record.

NOTE:

To ensure to have correct data, please reset all the rainfall record when you reinstall your wireless 5-In-1 sensor to other location.

MAX / MIN DATA RECORD

The console can record the accumulated MAX / MIN weather data with the corresponding time stamp for you to easy review.

TO VIEW THE ACCUMULATED MAX / MIN

In normal mode, press [ MAX / MIN ] key to check MAX/MIN records in the following display sequence is: outdoor MAX temperature → outdoor MIN temperature → outdoor MAX humidity → outdoor MIN humidity → indoor or current channel MAX temperature → indoor or current channel MIN temperature → indoor or current channel MAX humidity → indoor or current channel MIN humidity → MAX average wind speed → MAX gust → MAX FEELS LIKE → MIN FEELS LIKE → MAX dew point → MIN dew point → MAX heat index → MIN heat index → MAX wind chill → MIN wind chill → MAX relative pressure → MIN relative pressure → MAX absolute pressure → MIN absolute pressure → MAX rain rate.

TO CLEAR THE MAX/MIN RECORDS

Press and hold [ MAX / MIN ] key for 2 seconds to reset the current on display MAX or MIN records.

NOTE:

The LCD will also display the " MAX " / " MIN " , " HISTORY " icon, data records time & date.

PAST 24 HOURS HISTORY DATA

The console automatically stores the weather data of the past 24 hours.

- 1. Press [ HISTORY ] key to check the beginning of the current hour's weather data, e.g. the current time is 7:25 am, March 8, the display will show the data of 7:00am, March 8.
- 2. Press [ HISTORY ] key repeatedly to view older readings of the past 24 hours, e.g. 6:00am (Mar 8), 5:00am (Mar 8), ..., 10:00am (Mar 7), 9:00am (Mar 7), 8:00am (Mar 7)

NOTE:

The LCD will also display the " HISTORY " icon, history data records with time & date.

WEATHER ALERT SETTING

Weather Alert can alert you of certain weather conditions. Once the alert criterion is met, the alarm sound will activate and the alert icon on display will flash.


TO SET ALERT

- 1. Press [ ALERT ] to select and display the desired weather alert reading in the table below:

Alert Type	Setting Range	Display Section	Default
Outdoor Temperature High Alert	-40°C ~ 80°C	Outdoor temperature & humidity	40°C
Outdoor Temperature Low Alert			0°C
Outdoor Humidity High Alert	1% ~ 99%		80%
Outdoor Humidity Low Alert			40%
Thermo-hygro Current Channel Temperature High Alert	-40°C ~ 80°C	Indoor / CH temperature & humidity	40°C
Thermo-hygro Current Channel Temperature Low Alert			0°C
Thermo-hygro Current Channel Humidity High Alert	1% ~ 99%		80%
Thermo-hygro Current Channel Humidity Low Alert			40%
Average Wind Speed	0.1m/s ~ 50m/s	Wind direction & speed	17.2m/s

Feels Like High Alert	-65°C ~ 50°C	Weather index	20°C
Feels Like Low Alert			0°C
Dew point High Alert	-40°C ~ 80°C		10°C
Dew point Low Alert			-10°C
Heat Index High Alert	26°C ~ 50°C		30°C
Wind Chill Low Alert	-65°C ~ 18°C		0°C
Pressure Drop	1hPa ~ 10hPa	Barometer	3hPa
Rain rate	1mm ~ 1000mm	Rain rate	100mm

2. Under the current alert reading, press and hold [ **ALERT** ] key for 2 seconds to enter alert setting and the alert reading will flash.
3. Press [ **^** ] or [ **v** ] key to adjust the value or press and hold the key to change rapidly.
4. Press [ **ALERT** ] key to confirm the value.
5. Press [ **ALARM** ] key to toggle the regarding alert on / off.
6. Press [ **ALERT** ] key to shift to next alert reading.

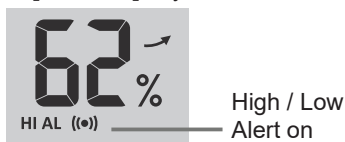

**Alert on**



**Alert off**

7. Press any key on the front side to save alert on /off status and back to normal mode, or it will automatically back to normal mode after 30 seconds without pressing any key.

## TO SILENCE THE ALERT ALARM

Press [ **SNOOZE** ] key to silence the alert alarm or let the alarm automatically turn off after 2 minutes.

## NOTE:

- Once the alert is triggered, the alarm will sound for 2 minutes and the related alert icon and readings will flash.
- If the alert alarm is automatically off after 2 minutes, the alert icon and readings will still keep flash until the weather reading is out of the alert range.
- The weather alert will sound again when the weather readings falls into the alert range again.

## BACK LIGHT

The main unit back light can be adjust, using the [ **OFF / LO / HI** ] sliding switch to select the appropriate brightness:


- Slide to the [ **HI** ] position for the brighter back light.
- Slide to the [ **LO** ] position for the dimmer back light.
- Slide to the [ **OFF** ] position to turn off the back light.


## DISPLAY CONTRAST

Press [ **^** / **⊙** ] key in normal mode to adjust LCD contrast in order to fit table stand or wall mount angle.

## MAINTENANCE

### BATTERY REPLACEMENT


When low battery indicator “” is displayed in OUT or CH section, it indicates that the outdoor 5-In-1 sensor and/or current channel sensor battery power is low respectively. Please replace with new batteries.

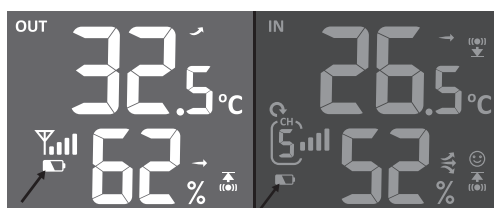

WIRELESS 5-IN-1 SENSOR MAINTENANCE

CLEANING THE RAIN COLLECTOR

- 1. Rotate the rain collector by turning it 30° anti-clockwise.
- 2. Gently remove the rain collector.
- 3. Clean and remove any debris or insects.
- 4. Install the collector when it is clean and fully dried.

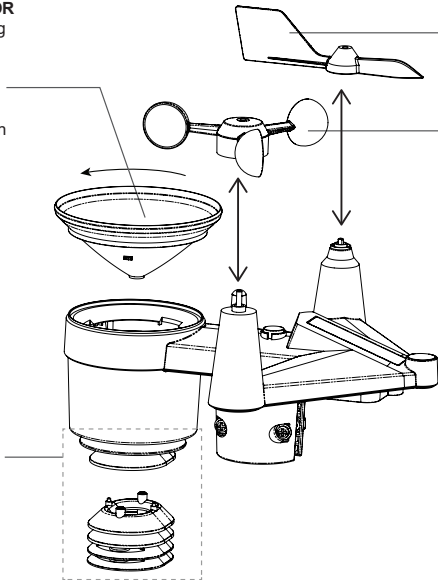

- REPLACE THE WIND VANE**  
Unscrew and remove the wind vane for replacement

- REPLACE THE WIND CUP**  
1. Unscrew and remove the top cap  
2. Remove the wind cup for replacement

CLEANING HYGRO-THERMO SENSOR

- 1. Remove the 2 screws at the bottom of the radiation shield.
- 2. Gently pull out the shield.
- 3. Carefully remove any dirt or insects on the sensor and ventilation fan (do not let the sensors inside get wet).
- 4. Clean the shield with water to remove any dirt or insects.
- 5. Install all the parts back when they are clean and fully dried.

TROUBLESHOOT

Problems	Solution
5-In-1 wireless sensor is intermittent or no connection	<ul style="list-style-type: none"><li>1. Make sure the sensor is within the transmission range</li><li>2. If it still not work, reset the sensor and resynchronize with console.</li></ul>
Wireless thermo-hygro sensor is intermittent or no connection	<ul style="list-style-type: none"><li>1. Make sure the sensor is within the transmission range</li><li>2. Make sure the channel displayed match to the channel selection on sensor</li><li>3. If it still not work, reset the sensor and resynchronize with console.</li></ul>
No WI-FI connection	<ul style="list-style-type: none"><li>1. Check for WI-FI symbol on the display, it should be alway on.</li><li>2. Make sure you connect to 2.4G band but not 5G band of your WI-FI router.</li></ul>
Data not reporting to Wunderground.com or weathercloud.net	<ul style="list-style-type: none"><li>1. Ensure your Station ID and Station Key are correct.</li><li>2. Ensure the date and time is correct on the tablet . If incorrect, you may be reporting old data, not real time data.</li><li>3. Ensure your time zone is set properly. If incorrect, you may be reporting old data, not real time data.</li></ul>
Wunderground Precip. Accum. Total graph offset 1 hour reset time, during summer daylight saving time	<ul style="list-style-type: none"><li>1. Ensure the time zone of the device on Wunderground set correctly</li><li>2. Ensure the time zone and DST on your console are correct.</li><li>3. If you located your station out of US time zone region in Wunderground, the DST will be invalid. To solve this issue, please turn off the DST function in console.</li></ul>
Rainfall is not correct	<ul style="list-style-type: none"><li>1. Please keep the rain collector clean</li><li>2. Make sure the tipping bucket inside can work smoothly</li></ul>
Temperature reading too high in the day time	<ul style="list-style-type: none"><li>1. Place the sensor in open area and at least 1.5m off the ground.</li><li>2. Make certain that the sensor array is not too close to heat generating sources or strictures, such as buildings, pavement, walls or air conditioning units.</li></ul>



## SPECIFICATIONS

### CONSOLE

#### General Specification

Dimensions (W x H x D)	118 x 192.5 x 21mm (4.6 x 7.6 x 0.83in )without attach table stand
Weight	265g (with batteries)
Main power	DC 5V, 1A adaptor (Manufacturer: HUAXU Electronics Factory, Model: HX075-0501000-AB, HX075-0501000-AG-001 or HX075-050100-AX)
Backup battery	CR2032
Operating temperature range	-5°C ~ 50°C
Operating Humidity range	10~90% RH

#### Wi-Fi Communication Specification

Standard	802.11 b/g/n
Operating frequency :	2.4GHz
Supported router security type	WPA/WPA2, OPEN, WEP (WEP only support Hexadecimal password)
Supported device for setup UI	Built-in Wi-Fi with AP mode function smart devices or laptops e.g.: Android smart phone, Android pad, iPhone, iPad or PC/Mac computer.
Recommended web browser for setup UI	Web browsers that support HTML 5, such as the latest version of Chrome, Safari, Edge, Firefox or Opera.

#### Wireless Sensor side Communication Specification

Support sensors	- 1 Wireless 5-In-1 weather outdoor sensor - Up to 7 Wireless hygro-thermo sensors (optional)
RF frequency (Depend on country version)	915Mhz (US version)
RF transmission range	150m

#### Time Related Function Specification

Time display	HH: MM
Hour format	12hr AM / PM or 24 hr
Date display	DD / MM or MM / DD
Time synchronize method	Through Internet time server to synchronize the UTC
Weekday languages	EN / DE / FR / ES / IT / NL / RU
Time Zone	+13 ~ -12 hour
DST	AUTO / OFF

#### Barometer (Note: Data detect by console)

Barometer unit	hPa, inHg and mmHg
Measuring range	540 ~ 1100hPa
Accuracy	(700 ~ 1100hPa ± 5hPa) / (540 ~ 696hPa ± 8hPa) (20.67 ~ 32.48inHg ± 0.15inHg) / (15.95 ~ 20.55inHg ± 0.24inHg) (525 ~ 825mmHg ± 3.8mmHg) / (405 ~ 522mmHg ± 6mmHg) Typical at 25°C (77°F)
Resolution	1hPa / 0.01inHg / 0.1mmHg
Weather forecast	Sunny / Clear, Slightly Cloudy, Cloudy, Rainy, Rainy / Stormy and Snowy
Memory modes	Historical data of past 24 hours, daily Max / Min

#### Indoor Temperature (Note: Data detect by console)

Temperature unit	°C and °F
Accuracy	<0°C or >40°C ± 2°C (<32°F or >104°F ± 3.6°F) 0~40°C ±1°C (32~104°F ± 1.8°F)
Resolution	°C / °F (1 decimal place)
Memory modes	Historical data of past 24 hours, daily Max / Min

#### Indoor Humidity (Note: Data detect by console)

Humidity unit	%
Accuracy	1 ~ 20% RH $\pm$ 6.5% RH @ 25°C (77°F) 21 ~ 80% RH $\pm$ 3.5% RH @ 25°C (77°F) 81 ~ 99% RH $\pm$ 6.5% RH @ 25°C (77°F)
Resolution	1%
Memory modes	Historical data of past 24 hours, Max / Min

#### **Outdoor Temperature (Note: Data detect by 5-In-1 sensor)**

Temperature unit	°C and °F
Accuracy	5.1 ~ 60°C $\pm$ 0.4°C (41.2 ~ 140°F $\pm$ 0.7°F) -19.9 ~ 5°C $\pm$ 1°C (-3.8 ~ 41°F $\pm$ 1.8°F) -40 ~ -20°C $\pm$ 1.5°C (-40 ~ -4°F $\pm$ 2.7°F)
Resolution	°C / °F (1 decimal place)
Memory modes	Historical data of past 24 hours, daily Max / Min

#### **Outdoor Humidity (Note: Data detect by 5-In-1 sensor)**

Humidity unit	%
Accuracy	1 ~ 20% RH $\pm$ 6.5% RH @ 25°C (77°F) 21 ~ 80% RH $\pm$ 3.5% RH @ 25°C (77°F) 81 ~ 99% RH $\pm$ 6.5% RH @ 25°C (77°F)
Resolution	1%
Memory modes	Historical data of past 24 hours, Max / Min

#### **Wind Speed & Direction (Note: Data detect by 5-In-1 sensor)**

Wind speed unit	mph, m/s, km/h and knots
Wind speed display range	0 ~ 112mph, 50m/s, 180km/h, 97knots
Resolution	mph, m/s, km/h and knots (1 decimal place)
Speed accuracy	< 5m/s: +/- 0.5m/s; > 5m/s: +/- 6% (whichever is greater)
Display mode	Gust / Average
Memory modes	Historical Data of past 24 hours, Max Gust / Average
Wind direction display mode	16 directions or 360 degree

#### **Rain (Note: Data detect by 5-In-1 sensor)**

Unit for rainfall	mm and in
Unit for rain rate	mm/h and in/h
Accuracy	$\pm$ 7% or 1 tip
Range	0 ~ 19999mm (0 ~ 787.3 in)
Resolution	0.4mm (0.0157in)
Memory modes	Historical Data of the past 24 hours, Max
Rain display mode	Rate / Hourly / Daily / Weekly / Monthly / Total rainfall

#### **Weather Index (Note: Data detect by 5-In-1 sensor)**

Weather index mode	Feels like, Wind Chill, Heat Index and Dew point
Feels like display range	-65 ~ 50°C
Dew point display range	-20 ~ 80°C
Heat index display range	26 ~ 50°C
Wind chill display range	-65 ~ 18°C (wind speed > 4.8km/h)
Memory modes	Historical Data of past 24 hours, Max / Min

## **WIRELESS 5-IN-1 SENSOR**

Dimensions (W x H x D)	322 x 296 x 217mm (12.7 x 11.7 x 8.5in)
Weight	674g (with batteries)
Main power	3 x AA size 1.5V batteries ( Lithium batteries recommended)
Weather data	Temperature, Humidity, Wind speed, Wind direction, Rainfall
RF transmission range	150m
RF frequency (depend on country version)	915Mhz (US)
Transmission interval	- 12 seconds for wind speed and wind direction data - 24 seconds for temperature, humidity and rain data
Operating temperature range	-40 ~ 60°C (-40 ~ 140°F) Lithium batteries required for low temperature
Operating humidity range	1 ~99% RH

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

" FCC RF Radiation Exposure Statement

Caution: To maintain compliance with the FCC's RF exposure guidelines, place the unit at least 20cm from nearby persons."