

---

---

**ATTACHMENT :      SAR VALIDATION PLOTS**

---

---

# DIGITAL EMC CO., LTD

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.922 \text{ mho/m}$ ;  $\epsilon_r = 40.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

## **DASY4 Configuration:**

Probe: ET3DV6 - SN1703; ConvF(6.51, 6.51, 6.51); Calibrated: 2005-03-24; Electronics: DAE3 Sn520

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Test Date: 2005-08-03; Ambient Temp: 23.0; Tissue Temp: 21.5

## **Dipole Validation**


**Area Scan (51x101x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Power Drift = -0.100 dB

Peak SAR (extrapolated) = 4.00 W/kg

**SAR(1 g) = 2.59 mW/g; SAR(10 g) = 1.67 mW/g**

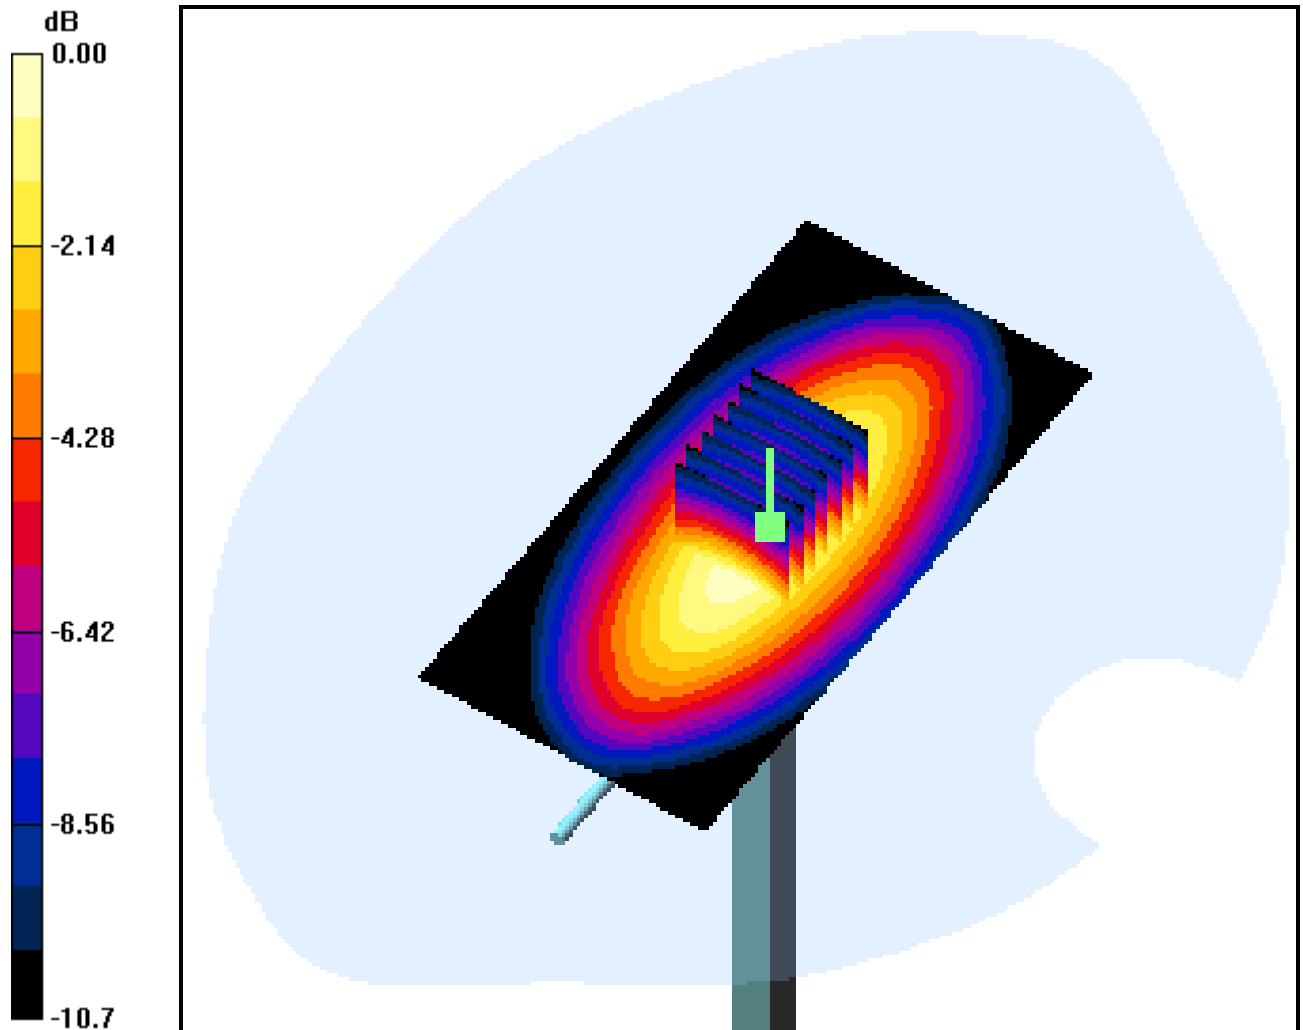

0 dB = 2.81mW/g