



TEST REPORT

Applicant Name : FCC: VTech Telecommunications Ltd
ISEDC: VTECH TELECOMMUNICATIONS LIMITED
Address : FCC: 23/F Tai Ping Ind Center Block 1 57 Ting Kok Rd
Tai Po NT, Hong Kong
ISEDC: BL.1 23/F Tai Ping Industr Ctr. 57 Ting Kok Road
Tai Po, NT Hongkong
Report Number : SZ1211009-52658E-RFA
FCC ID: EW780-S110-00
IC: 1135B-80S11000

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

Sample Description

Product Type: SIP Phone corded
Model No.: D865
Trade Mark: SNOM
Date Received: 2021/10/09
Date of Test: 2021/10/28~2021/12/22
Report Date: 2021/12/23

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ting Lü
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	13
APPLICABLE STANDARD	13
RESULT	13
RSS-102 § 4 –EXPOSURE LIMITS.....	15
APPLICABLE STANDARD	15
FCC §15.203 & RSS-GEN §6.8 – ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.207 (A) & RSS-GEN § 8.8 – AC LINE CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.209, §15.205 & §15.247(D) & RSS-247§ 5.5 - SPURIOUS EMISSIONS	26
APPLICABLE STANDARD	26
EUT SETUP	26
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	27
TEST PROCEDURE	27
CORRECTED FACTOR & MARGIN CALCULATION	27
TEST DATA	27
FCC §15.247(A) (1) & RSS-247 § 5.1 (B) -CHANNEL SEPARATION TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37

FCC §15.247(A) (1) & RSS-247 § 5.1 (A), RSS-GEN § 6.7 – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	39
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - QUANTITY OF HOPPING CHANNEL TEST.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST DATA	40
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - TIME OF OCCUPANCY (DWELL TIME)	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	41
FCC §15.247(B) (1) & RSS-247§ 5.1(B) &§ 5.4(B) - PEAK OUTPUT POWER MEASUREMENT	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST DATA	44
APPENDIX	45
APPENDIX A: 20DB EMISSION BANDWIDTH.....	45
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	49
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	53
APPENDIX D: CARRIER FREQUENCY SEPARATION	57
APPENDIX E: TIME OF OCCUPANCY	59
APPENDIX F: NUMBER OF HOPPING CHANNELS	66
APPENDIX G: BAND EDGE MEASUREMENTS	67

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	35-400320BSA
FVIN	10.1.95.0-HW4
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Peak Power	8.3 dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	Antenna: 0dBi
Voltage Range	DC 5.0V from adapter and DC 48V from POE
Sample serial number	SZ1211009-52658E-RF-S1 for RF conducted SZ1211009-52658E-RF-S2 for Radiated test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 information	Model: NBS12E050200UV Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2.0A, 10.0W
Adapter 2 information	Model: R122-0502000ID Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5.0V, 2.0A, 10.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“Tear Term.exe” software was used to test the EUT and power level is default*. The software and power level was provided by the applicant.

Special Accessories

No special accessory.


Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Sandisk	U disk	SDCZ33-016G-Z35	Unknown
Lenovo	U disk	L3C	Unknown
DELL	PC	Latitude E5430	JG3NLV1
DELL	PC	Latitude E5430	590NLV1
HIKVISION	Router	DS-3WR03	10021642429
Vtech	IP phone	D862	Unknown
Unknown	POE	VX-PI1000GB	1712086039
Unknown	Load	CX5122	Unknown
Unknown	Earphone	D02	Unknown

Cable Description	Length (m)	From/Port	To
Un-shielded un-detachable AC cable	1.0	Socket	LISN
Un-shielded un-detachable DC cable	1.5	EUT	Adapter
Un-shielded detachable RJ45 cable	8.0	EUT	PC
Un-shielded detachable RJ45 cable	8.0	EUT	Router
Un-shielded detachable RJ45 cable	1.5	Router	PC
Un-shielded detachable RJ45 cable	1.5	Router	IP phone
Un-shielded detachable AC cable	1.0	POE	LISN
Un-shielded detachable RJ45 cable	1.5	POE	EUT
Un-shielded detachable RJ45 cable	8.0	POE	Router

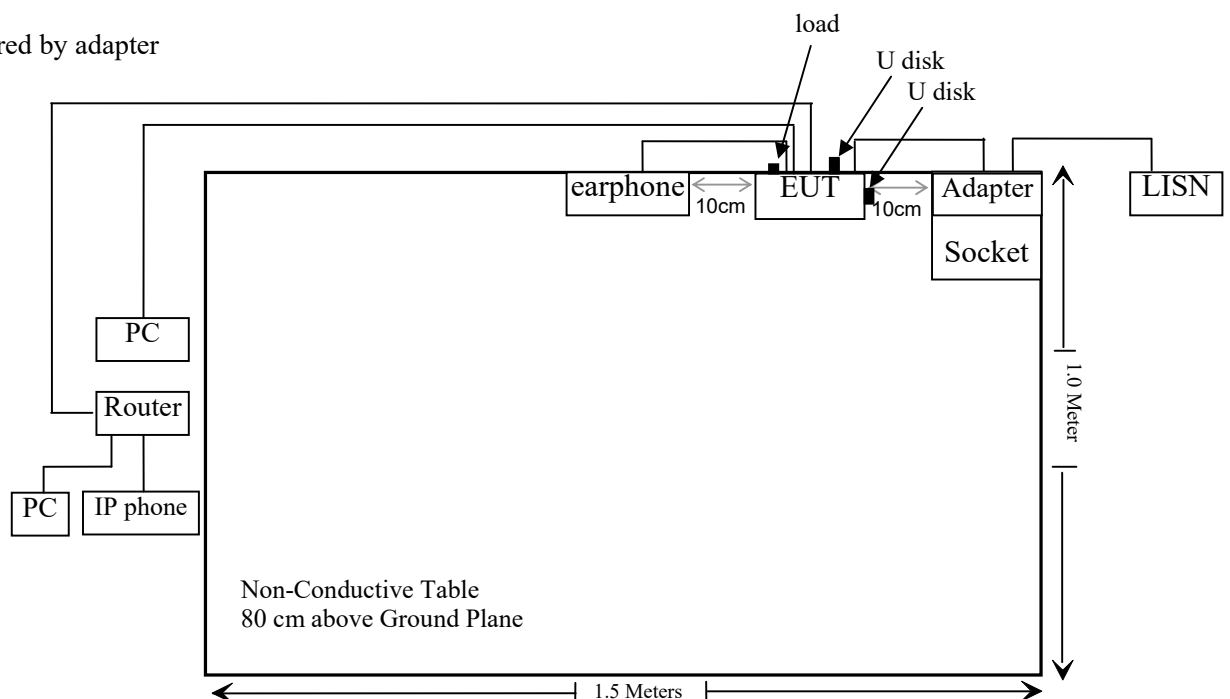


The diagram illustrates the experimental setup for measuring the radiation field of a PoE switch. The setup is placed on a non-conductive table 80 cm above the ground plane. The table dimensions are 1.5 Meters in width and 1.0 Meter in height. A PC and Router are connected to the PoE switch (EUT) via a cable. The PoE switch is connected to a LISN. The PoE switch is also connected to a load and two U disks. The distance between the PoE switch and the load is 10 cm, and the distance between the PoE switch and the U disks is 10 cm. The PoE switch is also connected to an earphone. The distance between the earphone and the PoE switch is 10 cm.

The diagram illustrates the experimental setup for EUT testing. The setup is on a non-conductive table 80 cm above ground. The setup area is 1.5 Meters wide and 1.0 Meter high. The components and connections are as follows:


- Mains** is connected to the **Adapter** and the **EUT**.
- The **Adapter** is connected to the **Socket**.
- A **U disk** is connected to the **EUT**.
- A **load** is connected to the **EUT**.
- The **EUT** is connected to the **earphone**.
- The **PC** is connected to the **Router**.
- The **Router** is connected to the **IP phone** and another **PC**.

powered by POE

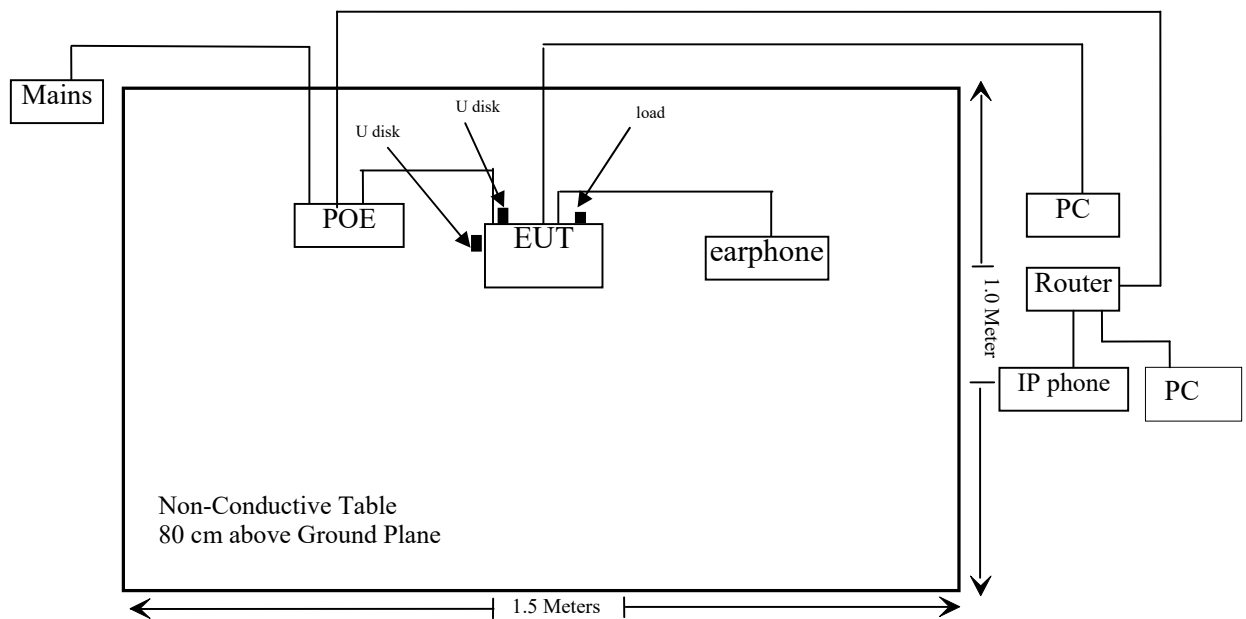

For RE above 1 G

powered by adapter

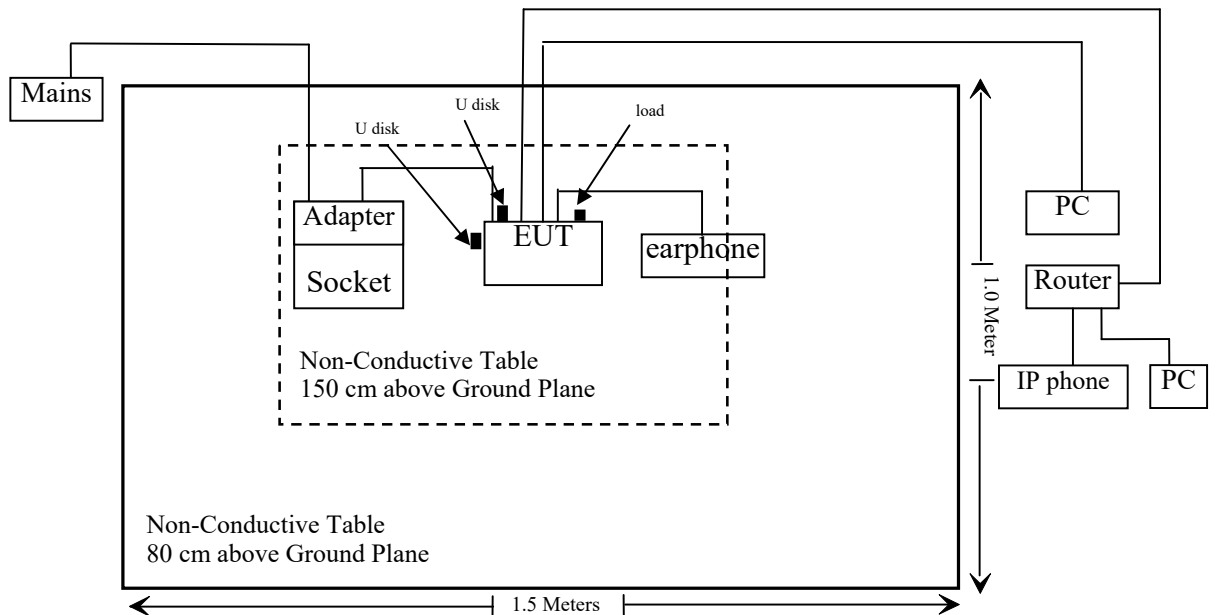

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
RSS-102 § 4	EXPOSURE LIMITS	Compliant
FCC §15.203 RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207(a) RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d) RSS-247 § 5.5, RSS-GEN § 8.10	Radiated Emissions	Compliant
FCC §15.247(a)(1) RSS-247 § 5.1(a), RSS-GEN § 6.7	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.247(a)(1) RSS-247 § 5.1 (b)	Channel Separation Test	Compliant
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	Compliant
FCC §15.247(a)(1)(iii) RSS-247 § 5.1 (d)	Quantity of hopping channel Test	Compliant
FCC §15.247(b)(1) RSS-247 § 5.1(b) & § 5.4(b)	Peak Output Power Measurement	Compliant
FCC §15.247(d) RSS-247 § 5.5	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/02/03	2022/02/02
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50ΩCoaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/28	2021/11/27
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/28	2022/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Radiated Emission Test Software: e3 19821b (V9)					
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2020/12/25	2021/12/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05
Unknown	6dB Attenuator	Unknown	F-03-EM123	2020/11/28	2021/11/27
Unknown	RF Cable	RF Cable1	RF Cable1	Each Time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

a)

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BT	2402-2480	0	1.00	8.5	7.08	20	0.0014	1
BLE	2402-2480	0	1.00	8.5	7.08	20	0.0014	1
2.4GHz Wi-Fi	2412-2462	2	1.58	18.0	63.10	20	0.0199	1
5GHz Wi-Fi	5150-5250	2	1.58	18.0	63.10	20	0.0199	1
	5250-5350	2	1.58	18.0	63.10	20	0.0199	1
	5470-5725	2	1.58	20.0	100.00	20	0.0315	1
	5725-5850	2	1.58	20.0	100.00	20	0.0315	1

Note: 1. The tune up conducted power was declared by the applicant.

2. The BT and Wi-Fi can transmit at the same time.

Simultaneous transmitting consideration (worst case):

The ratio= $\text{MPE}_{\text{BT}}/\text{limit} + \text{MPE}_{\text{Wi-Fi}}/\text{limit} = 0.0014/1 + 0.0315/1 = 0.0329 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

RSS-102 § 4 –EXPOSURE LIMITS

Applicable Standard

According to RSS-102 §4:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619 f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/f ^{1.2}

Note: f is frequency in MHz.
 * Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Max Tune Up Conducted Power		Distance (m)	Power Density (W/m ²)	MPE Limit (W/m ²)
		(dBi)	(numeric)	(dBm)	(W)			
BT	2402-2480	0	1.00	8.5	0.0071	0.2	0.014	5.351
BLE	2402-2480	0	1.00	8.5	0.0071	0.2	0.014	5.351
2.4G Wi-Fi	2412-2462	2	1.58	18.0	0.0631	0.2	0.199	5.366
5G Wi-Fi	5150-5250	2	1.58	18.0	0.0631	0.2	0.199	9.011
	5250-5350	2	1.58	18.0	0.0631	0.2	0.199	9.13
	5470-5725	2	1.58	20.0	0.1000	0.2	0.315	9.39
	5725-5850	2	1.58	20.0	0.1000	0.2	0.315	9.687

Note: 1. The tune up conducted power was declared by the applicant.

2. The BT and Wi-Fi can transmit at the same time.

Simultaneous transmitting consideration (worst case):

The ratio= $MPE_{BT}/limit + MPE_{Wi-Fi}/limit = 0.014/5.351 + 0.199/5.366 = 0.04 < 1.0$

To maintain compliance with the ISED's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 & RSS-GEN §6.8 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to FCC § 15.203, the applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the maximum antenna gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain	Impedance	Frequency Range
Monopole	0 dBi	50 Ω	2.4~2.5GHz


Result: Compliant.

FCC §15.207 (a) & RSS-GEN § 8.8 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), RSS-GEN § 8.8

EUT Setup

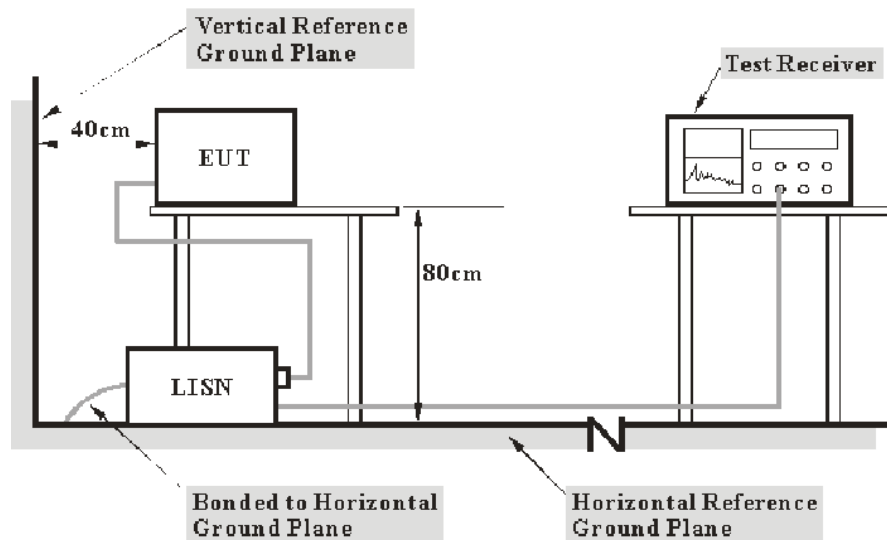

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 & RSS-Gen.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Reading level} + \text{Transd Factor}$$

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	64 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2021-11-15 and 2021-11-23.

EUT operation mode: Transmitting(the worst case for GFSK Middle channel)


For POE

AC 120V/60 Hz, Line

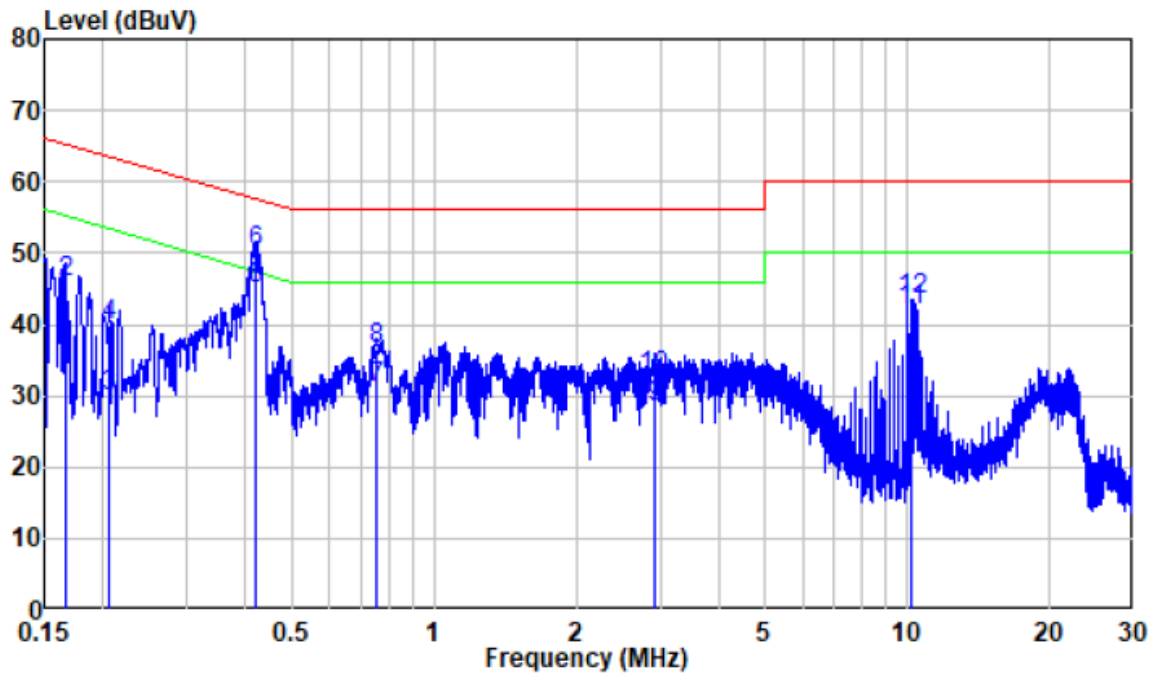

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.166	9.87	25.91	35.78	55.16	-19.38	Average
2	0.166	9.87	36.00	45.87	65.16	-19.29	QP
3	0.205	9.80	20.10	29.90	53.39	-23.49	Average
4	0.205	9.80	30.16	39.96	63.39	-23.43	QP
5	0.420	9.80	35.04	44.84	47.46	-2.62	Average
6	0.420	9.80	40.29	50.09	57.46	-7.37	QP
7	0.755	9.81	21.34	31.15	46.00	-14.85	Average
8	0.755	9.81	26.79	36.60	56.00	-19.40	QP
9	2.907	9.93	18.41	28.34	46.00	-17.66	Average
10	2.907	9.93	22.63	32.56	56.00	-23.44	QP
11	10.152	10.10	31.74	41.84	50.00	-8.16	Average
12	10.152	10.10	33.51	43.61	60.00	-16.39	QP


AC 120V/60 Hz, Neutral

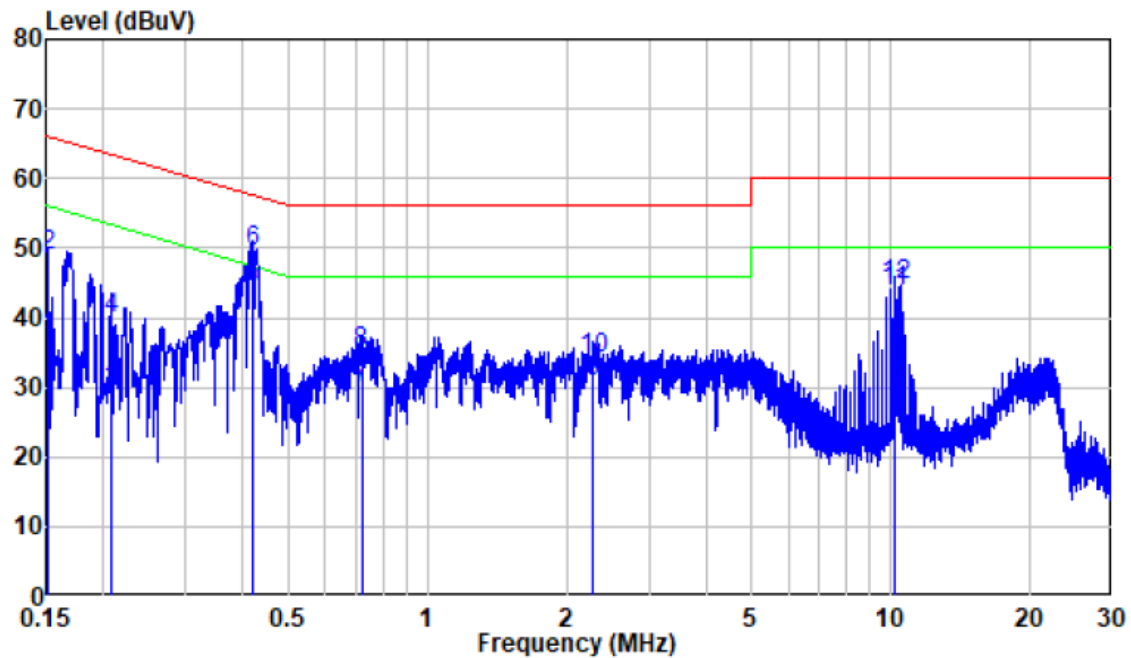

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.151	9.90	27.20	37.10	55.94	-18.84	Average
2	0.151	9.90	38.91	48.81	65.94	-17.13	QP
3	0.208	10.00	19.38	29.38	53.30	-23.92	Average
4	0.208	10.00	29.93	39.93	63.30	-23.37	QP
5	0.420	9.92	34.49	44.41	47.46	-3.05	Average
6	0.420	9.92	39.71	49.63	57.46	-7.83	QP
7	0.720	9.91	20.08	29.99	46.00	-16.01	Average
8	0.720	9.91	25.03	34.94	56.00	-21.06	QP
9	2.268	9.94	20.92	30.86	46.00	-15.14	Average
10	2.268	9.94	24.13	34.07	56.00	-21.93	QP
11	10.145	10.10	33.72	43.82	50.00	-6.18	Average
12	10.145	10.10	34.56	44.66	60.00	-15.34	QP


For Adapter NBS12E050200UV

AC 120V/60 Hz, Line

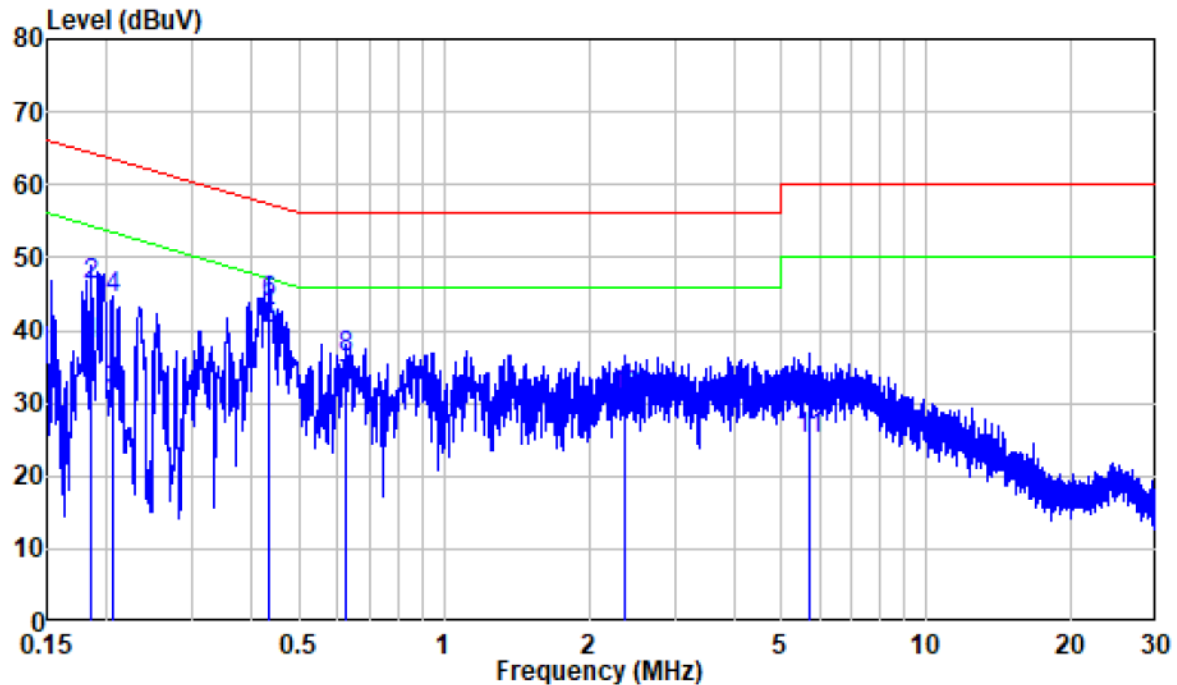

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.185	9.83	28.19	38.02	54.24	-16.22	Average
2	0.185	9.83	36.33	46.16	64.24	-18.08	QP
3	0.206	9.80	22.01	31.81	53.38	-21.57	Average
4	0.206	9.80	34.43	44.23	63.38	-19.15	QP
5	0.434	9.80	30.48	40.28	47.18	-6.90	Average
6	0.434	9.80	33.86	43.66	57.18	-13.52	QP
7	0.624	9.81	22.40	32.21	46.00	-13.79	Average
8	0.624	9.81	26.48	36.29	56.00	-19.71	QP
9	2.380	9.92	17.40	27.32	46.00	-18.68	Average
10	2.380	9.92	20.90	30.82	56.00	-25.18	QP
11	5.706	10.02	15.08	25.10	50.00	-24.90	Average
12	5.706	10.02	19.59	29.61	60.00	-30.39	QP


AC 120V/60 Hz, Neutral

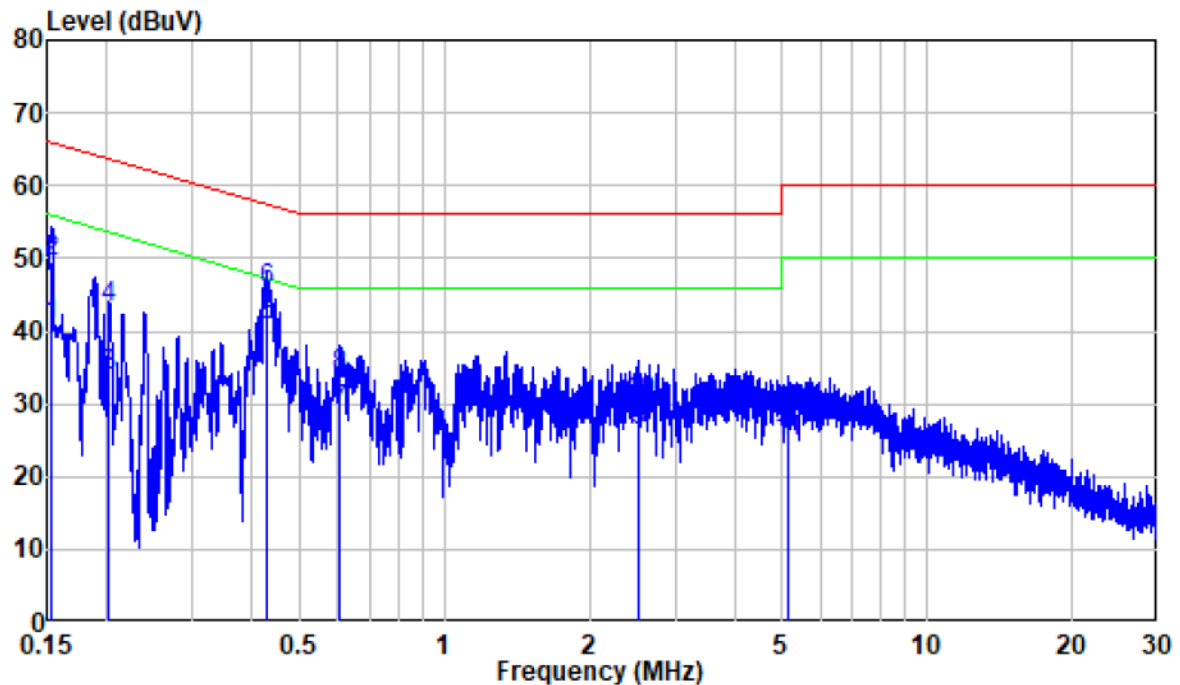

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	9.91	30.74	40.65	55.79	-15.14	Average
2	0.154	9.91	39.67	49.58	65.79	-16.21	QP
3	0.202	10.00	23.83	33.83	53.54	-19.71	Average
4	0.202	10.00	33.19	43.19	63.54	-20.35	QP
5	0.429	9.92	30.70	40.62	47.26	-6.64	Average
6	0.429	9.92	35.60	45.52	57.26	-11.74	QP
7	0.606	9.91	18.92	28.83	46.00	-17.17	Average
8	0.606	9.91	23.92	33.83	56.00	-22.17	QP
9	2.530	9.96	16.34	26.30	46.00	-19.70	Average
10	2.530	9.96	20.17	30.13	56.00	-25.87	QP
11	5.153	10.05	14.66	24.71	50.00	-25.29	Average
12	5.153	10.05	18.86	28.91	60.00	-31.09	QP


For Adapter R122-0502000ID

AC 120V/60 Hz, Line

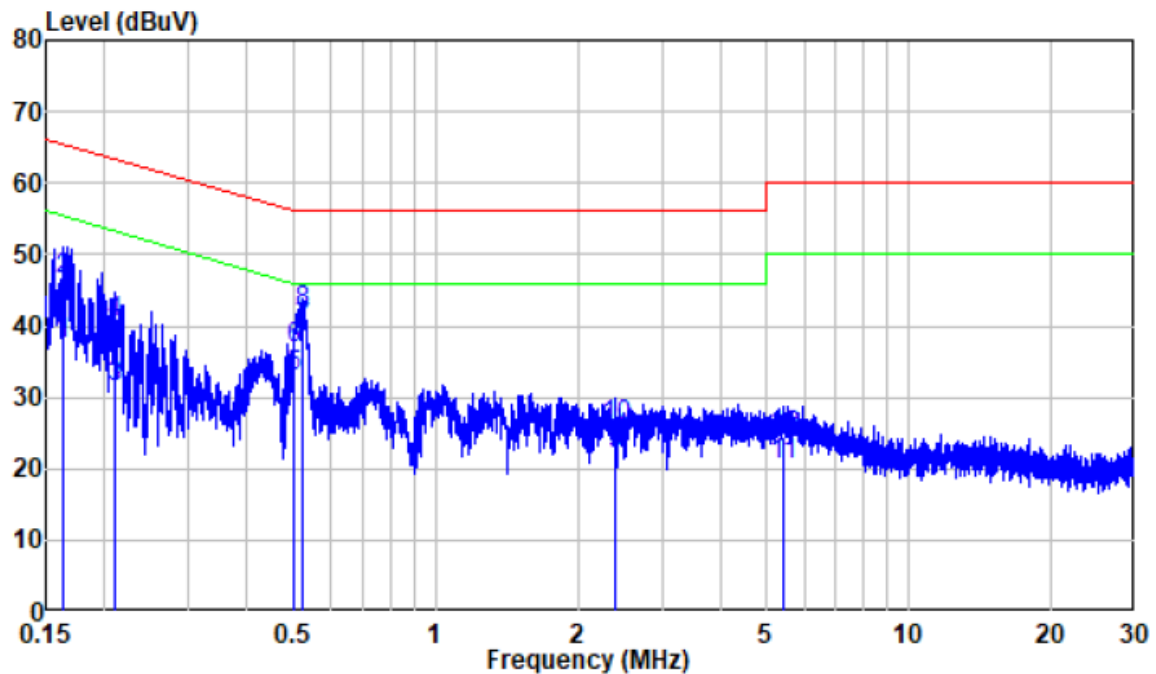

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.163	9.87	27.71	37.58	55.30	-17.72	Average
2	0.163	9.87	36.57	46.44	65.30	-18.86	QP
3	0.210	9.80	21.74	31.54	53.21	-21.67	Average
4	0.210	9.80	30.78	40.58	63.21	-22.63	QP
5	0.500	9.80	23.19	32.99	46.00	-13.01	Average
6	0.500	9.80	27.09	36.89	56.00	-19.11	QP
7	0.525	9.81	29.78	39.59	46.00	-6.41	Average
8	0.525	9.81	32.07	41.88	56.00	-14.12	QP
9	2.393	9.92	12.21	22.13	46.00	-23.87	Average
10	2.393	9.92	15.93	25.85	56.00	-30.15	QP
11	5.419	10.00	10.68	20.68	50.00	-29.32	Average
12	5.419	10.00	14.56	24.56	60.00	-35.44	QP

AC 120V/60 Hz, Neutral

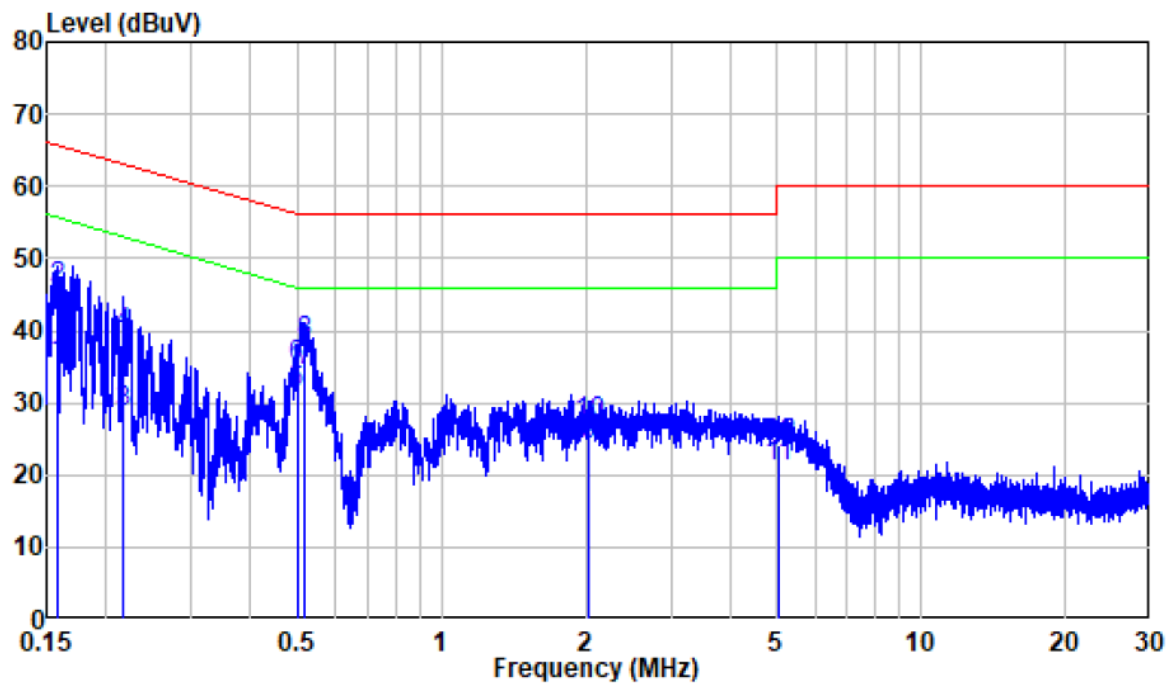

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.92	25.46	35.38	55.59	-20.21	Average
2	0.158	9.92	35.91	45.83	65.59	-19.76	QP
3	0.217	9.99	18.66	28.65	52.92	-24.27	Average
4	0.217	9.99	29.41	39.40	62.92	-23.52	QP
5	0.499	9.90	21.39	31.29	46.02	-14.73	Average
6	0.499	9.90	25.26	35.16	56.02	-20.86	QP
7	0.517	9.91	24.58	34.49	46.00	-11.51	Average
8	0.517	9.91	28.55	38.46	56.00	-17.54	QP
9	2.024	9.92	14.14	24.06	46.00	-21.94	Average
10	2.024	9.92	17.11	27.03	56.00	-28.97	QP
11	5.025	10.05	11.06	21.11	50.00	-28.89	Average
12	5.025	10.05	14.19	24.24	60.00	-35.76	QP


FCC §15.209, §15.205 & §15.247(d) & RSS-247§ 5.5 - Spurious Emissions

Applicable Standard


FCC §15.205; §15.209; §15.247(d); RSS-247§ 5.5; RSS-GEN § 8.10

EUT Setup

Below 1 GHz:

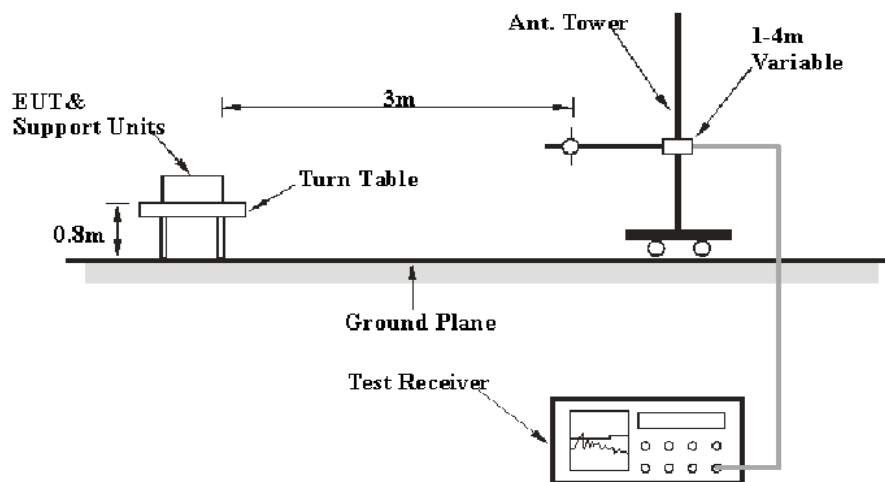

Above 1GHz:

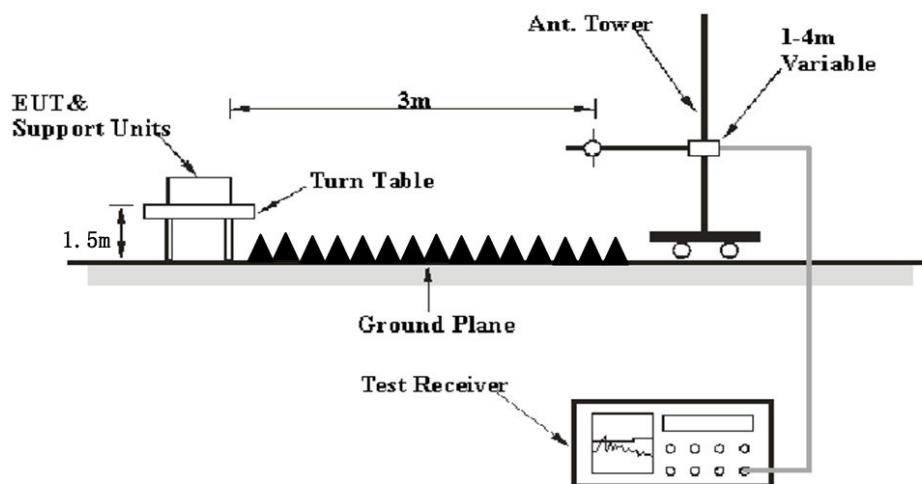

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247, RSS-247, RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	25~26.3 °C
Relative Humidity:	51~64 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Deng and Caro Hu from 2021-11-18 to 2021-12-22.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


Below 1GHz:**Worst case for 8DPSK Mode, High channel:***For POE*

Horizontal

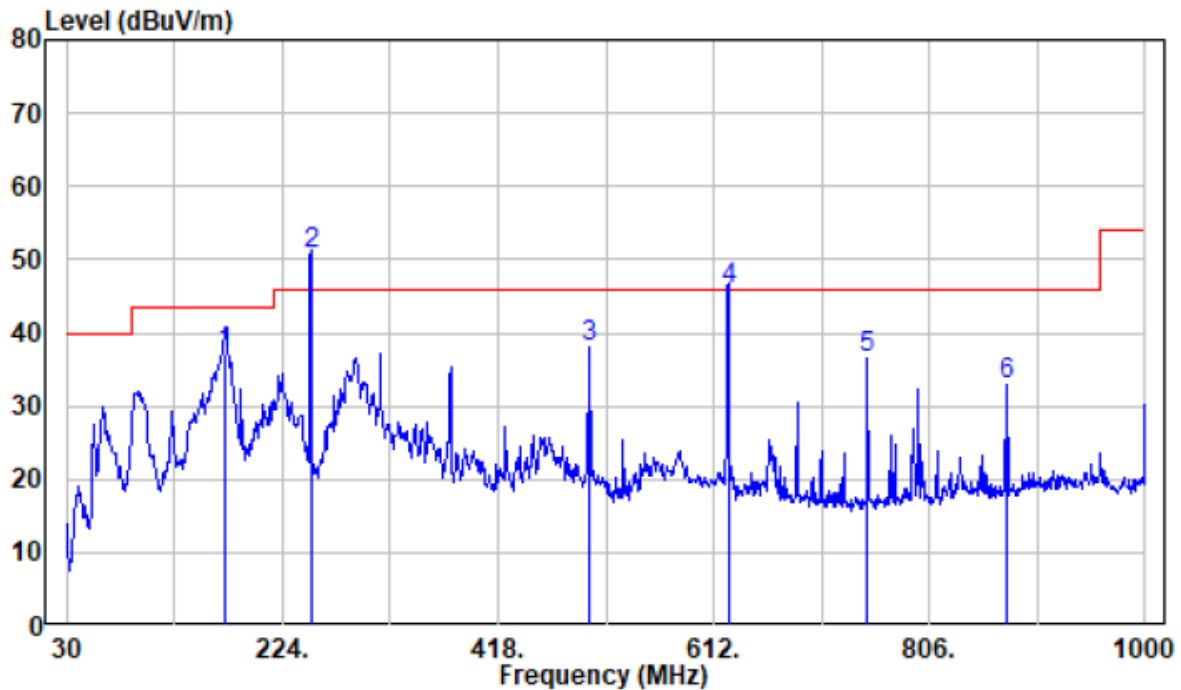

	Freq Factor		Read Level	Limit	Over	Remark
	MHz	dB/m	dBuV	Line	Limit	
1	172.59	-21.07	58.32	37.25	43.50	-6.25 QP
2	250.19	-18.53	69.32	50.79	46.00	4.79 QP *
3	500.45	-14.18	52.20	38.02	46.00	-7.98 Peak
4	625.58	-11.49	57.32	45.83	46.00	-0.17 QP
5	750.71	-11.05	47.66	36.61	46.00	-9.39 Peak
6	875.84	-9.12	41.88	32.76	46.00	-13.24 Peak


Vertical

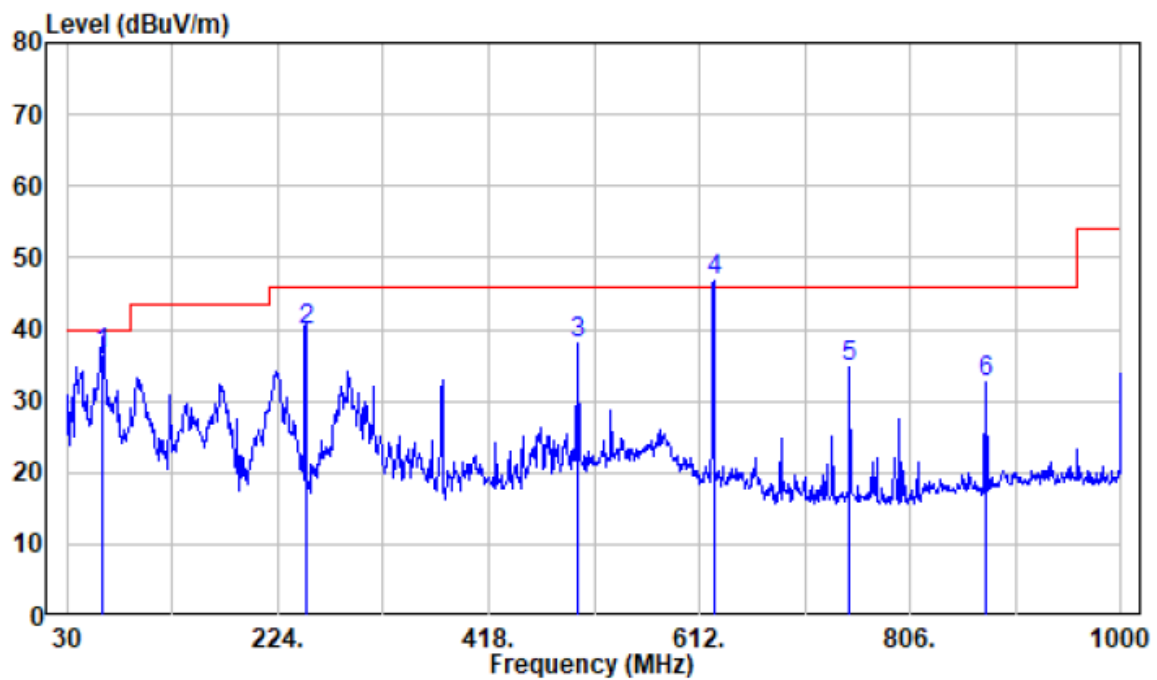

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	62.01	-19.87	56.31	36.44	40.00	-3.56	QP
2	250.19	-18.53	58.32	39.79	46.00	-6.21	QP
3	500.45	-14.18	52.35	38.17	46.00	-7.83	Peak
4	625.58	-11.49	58.32	46.83	46.00	0.83	QP *
5	750.71	-11.05	45.73	34.68	46.00	-11.32	Peak
6	875.84	-9.12	41.63	32.51	46.00	-13.49	Peak


For Adapter NBS12E050200UV

Horizontal

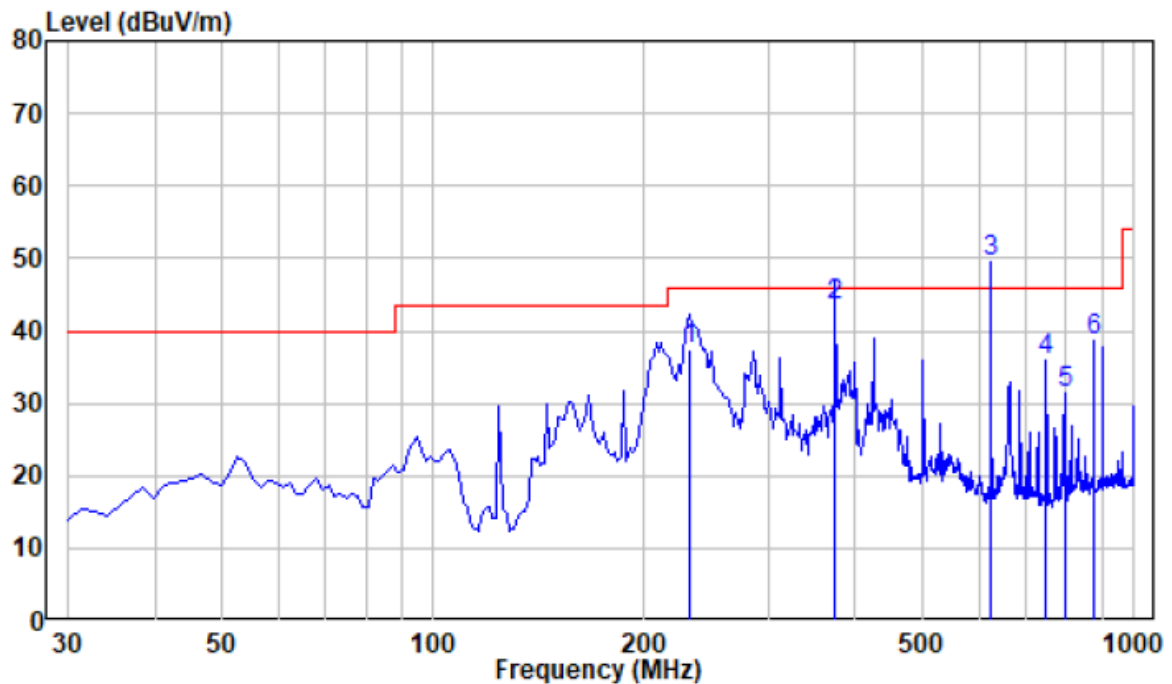

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	232.43	-18.83	56.31	37.48	46.00	-8.52	QP
2	374.42	-15.71	59.30	43.59	46.00	-2.41	QP
3	624.65	-11.50	61.01	49.51	46.00	3.51	QP*
4	749.77	-11.05	46.95	35.90	46.00	-10.10	Peak
5	796.16	-11.46	42.86	31.40	46.00	-14.60	Peak
6	874.88	-9.17	47.92	38.75	46.00	-7.25	Peak


Vertical

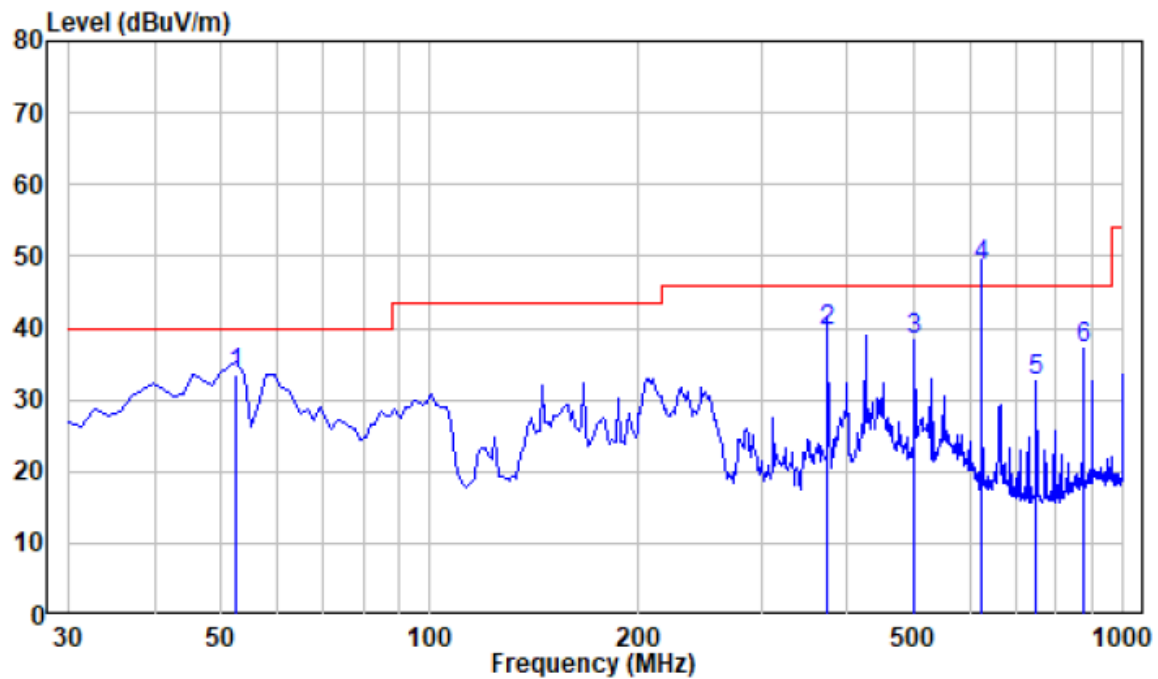

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	52.49	-17.81	51.30	33.49	40.00	-6.51	QP
2	374.42	-15.71	55.23	39.52	46.00	-6.48	QP
3	499.54	-14.18	52.61	38.43	46.00	-7.57	Peak
4	624.65	-11.50	60.13	48.63	46.00	2.63	QP *
5	749.77	-11.05	43.59	32.54	46.00	-13.46	Peak
6	874.88	-9.17	46.35	37.18	46.00	-8.82	Peak


For Adapter R122-0502000ID

Horizontal

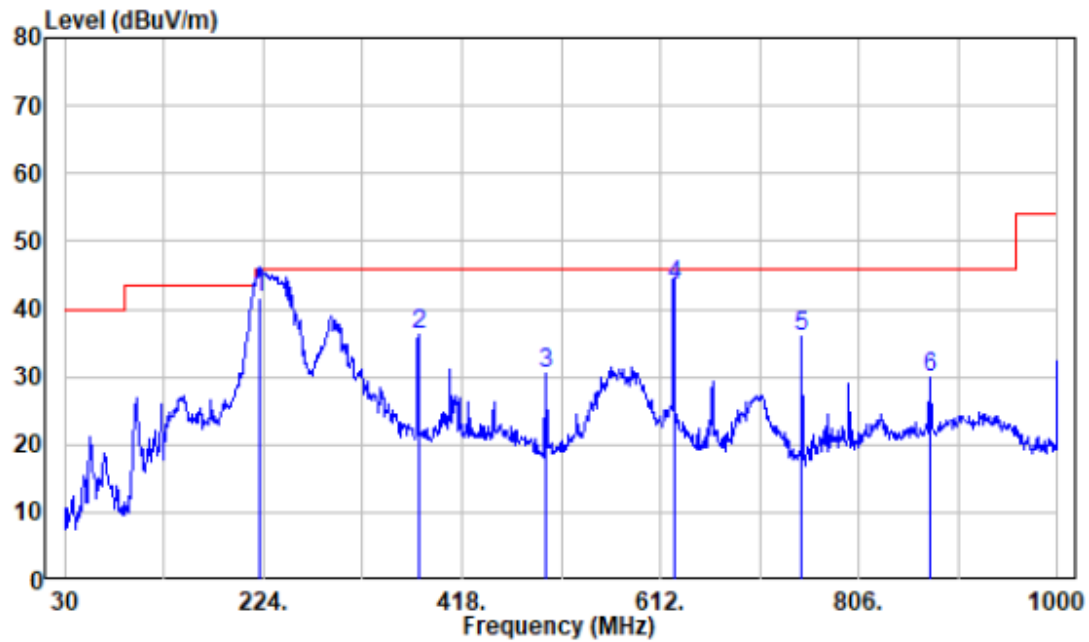

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	221.09	-18.96	60.60	41.64	46.00	-4.36	QP
2	375.32	-15.70	52.04	36.34	46.00	-9.66	Peak
3	500.45	-14.18	44.56	30.38	46.00	-15.62	Peak
4	625.58	-11.49	54.90	43.41	46.00	-2.59	QP
5	750.71	-11.05	46.92	35.87	46.00	-10.13	Peak
6	875.84	-9.12	39.08	29.96	46.00	-16.04	Peak

Vertical

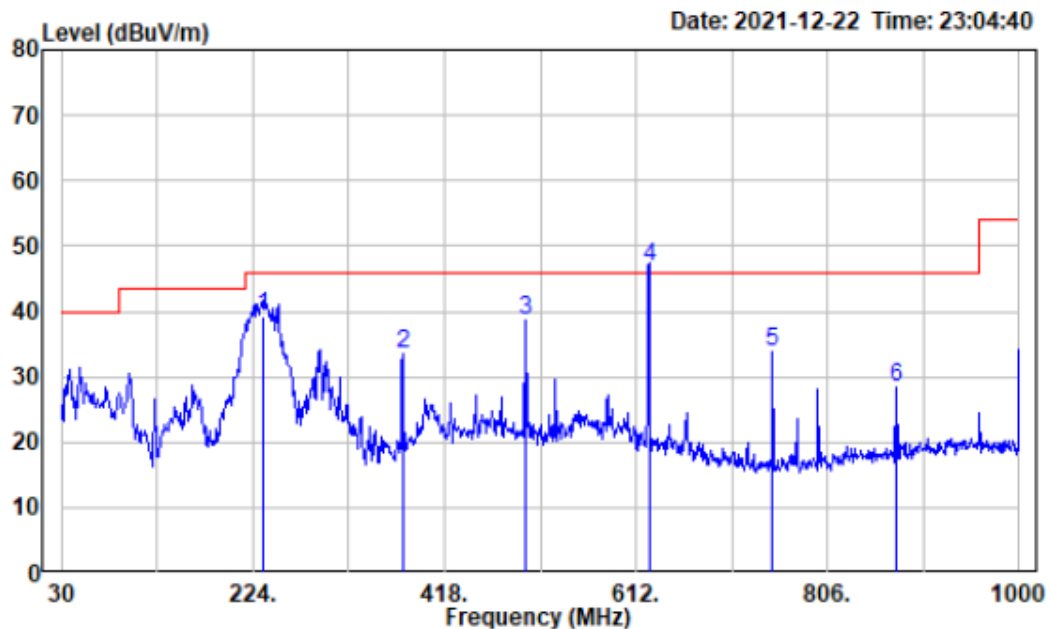

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	233.70	-18.80	58.08	39.28	46.00	-6.72	QP
2	375.32	-15.70	49.19	33.49	46.00	-12.51	Peak
3	500.45	-14.18	52.70	38.52	46.00	-7.48	Peak
4	625.58	-11.49	58.20	46.71	46.00	0.71	QP *
5	750.71	-11.05	44.99	33.94	46.00	-12.06	Peak
6	875.84	-9.12	37.63	28.51	46.00	-17.49	Peak

Note *: The data recorded above represents the worst case for all supported operating modes, there were no spurious emission in the range 30MHz -1GHz over the limit in §15.209&RSS-GEN caused by radio, the emission list at above table was investigated and was not caused by the radio, the emission was present when the radio was disabled. Those emissions comply with the FCC Part 15, Subpart B-Unintentional radiators §15.109(b) and ICES-003 limit set for Class A digital device as the EUT is declared as a Class A equipment according the user manual.

Above 1GHz: (worst case for 8DPSK, powered by Adapter 1)

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV		Height (m)	Polar (H/V)				
Low Channel									
2310	68.55	PK	345	2.4	H	-6.84	61.71	74	-12.29
2310	53.88	AV	345	2.4	H	-6.84	47.04	54	-6.96
2310	68.11	PK	217	2.1	V	-6.84	61.27	74	-12.73
2310	54.35	AV	217	2.1	V	-6.84	47.51	54	-6.49
2390	67.98	PK	71	1.2	H	-6.44	61.54	74	-12.46
2390	53.32	AV	71	1.2	H	-6.44	46.88	54	-7.12
2390	67.99	PK	256	2.2	V	-6.44	61.55	74	-12.45
2390	54.07	AV	256	2.2	V	-6.44	47.63	54	-6.37
4804	48.94	PK	340	1.7	H	2.81	51.75	74	-22.25
4804	49.18	PK	31	1.7	V	2.81	51.99	74	-22.01
Middle Channel									
4882	48.37	PK	180	2.3	H	3.04	51.41	74	-22.59
4882	49.61	PK	37	2.3	V	3.04	52.65	74	-21.35
High Channel									
2483.5	67.35	PK	238	1.4	H	-5.96	61.39	74	-12.61
2483.5	52.85	AV	238	1.4	H	-5.96	46.89	54	-7.11
2483.5	67.02	PK	230	2.1	V	-5.96	61.06	74	-12.94
2483.5	53.58	AV	230	2.1	V	-5.96	47.62	54	-6.38
2500	66.89	PK	65	2.1	H	-5.88	61.01	74	-12.99
2500	52.70	AV	65	2.1	H	-5.88	46.82	54	-7.18
2500	67.38	PK	144	1.7	V	-5.88	61.5	74	-12.5
2500	53.33	AV	144	1.7	V	-5.88	47.45	54	-6.55
4960	48.33	PK	100	1.7	H	3.29	51.62	74	-22.38
4960	48.84	PK	44	1.7	V	3.29	52.13	74	-21.87

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor was not recorded.

When the test result of peak was less than the limit of average, just peak value were recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

Middle channel

Horizontal

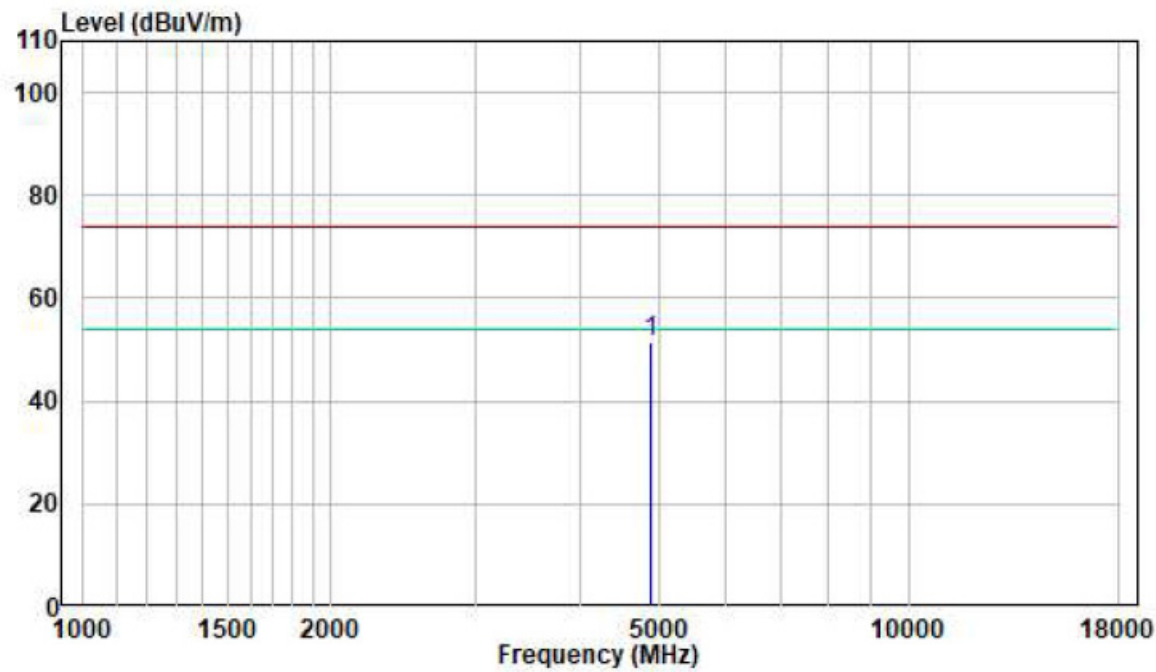


Vertical

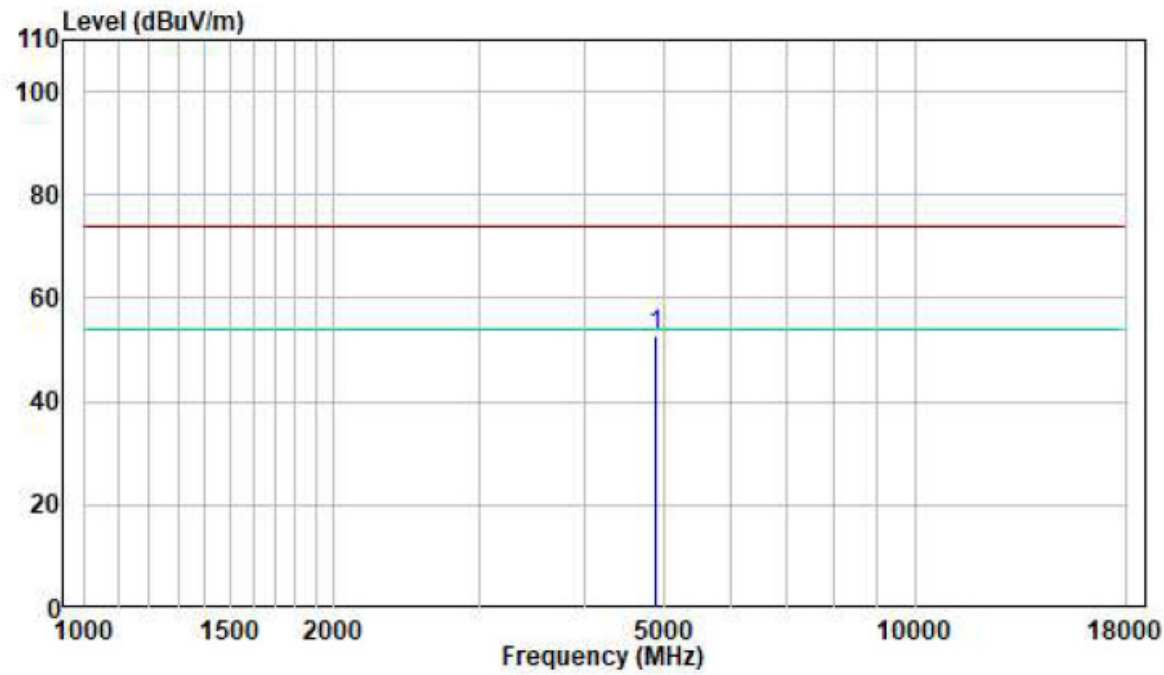


18-25GHz: (Pre-Scan plots)

Middle channel

Horizontal

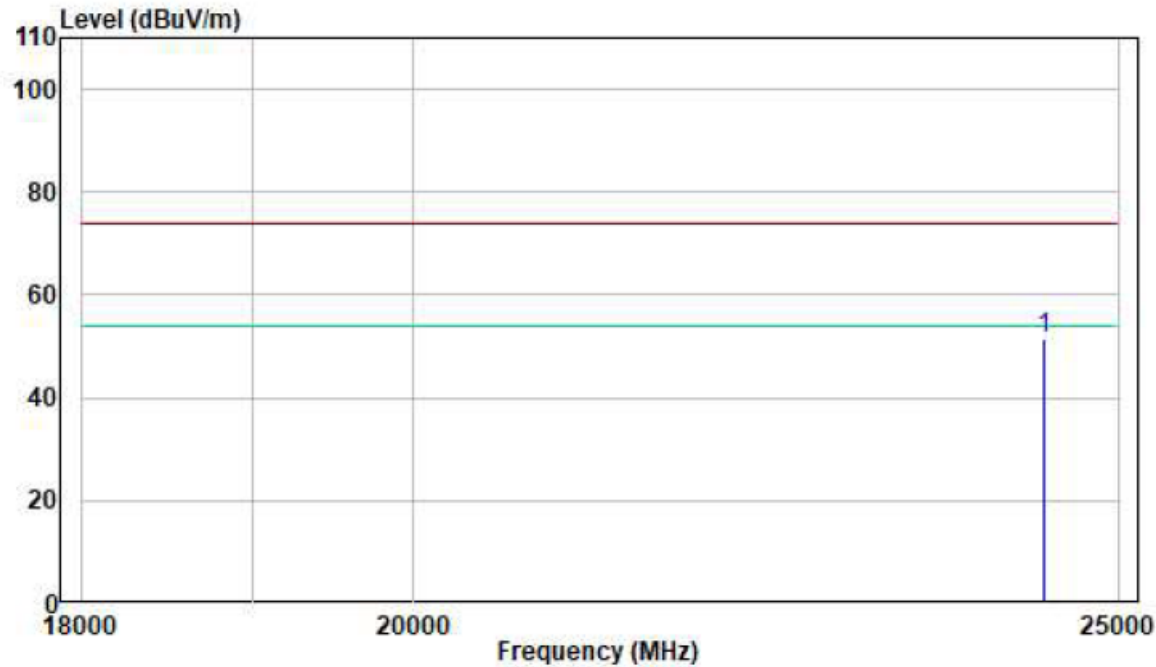

Vertical

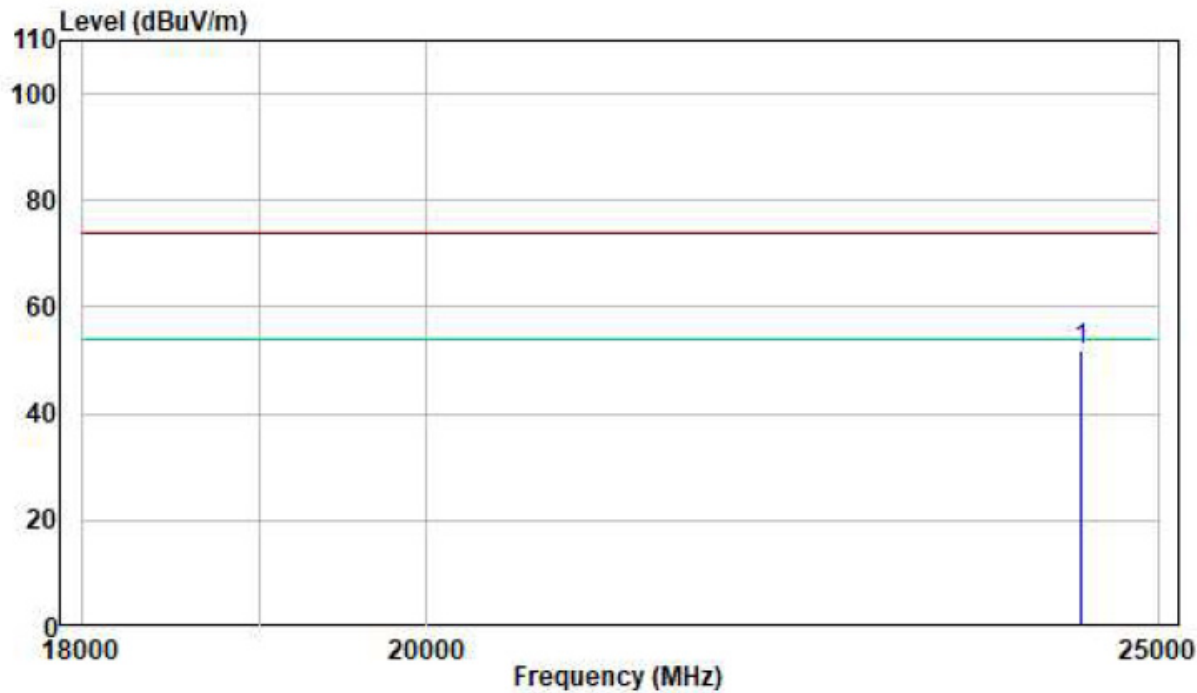

FCC §15.247(a) (1) & RSS-247 § 5.1 (b) -CHANNEL SEPARATION TEST

Applicable Standard

According to FCC §15.247(a) (1):


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to RSS-247 § 5.1 (b):

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, max hold the channel.
2. Set the adjacent channel of the EUT and max hold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2021-10-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) & RSS-247 § 5.1 (a), RSS-GEN § 6.7 – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (1):

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 § 5.1 (a), RSS-GEN § 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “20 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 20 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2021-10-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

According to FCC §15.247(a) (1) (iii):


Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSS) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

2. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
3. Set the EUT in hopping mode from first channel to last.
4. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2021-10-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

According to FCC §15.247(a) (1) (iii):


Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to RSS-247 § 5.1 (d):

Frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that at least 15 hopping channels are used.

Test Procedure

5. The EUT was worked in channel hopping.
6. Set the RBW to: 1MHz.
7. Set the VBW $\geq 3 \times$ RBW.
8. Set the span to 0Hz.
9. Detector = peak.
10. Sweep time = auto couple.
11. Trace mode = max hold.
12. Allow trace to fully stabilize.
13. Recorded the time of single pulses



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2021-10-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) & RSS-247§ 5.1(b) &§ 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to FCC §15.247(b) (1):

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


According to RSS-247§ 5.1(b) &§ 5.4(b):

For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2021-10-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING

Applicable Standard

According to FCC §15.247(d).


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(e), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	62 %
ATM Pressure:	101.0 kPa

The testing was performed by Paul Liu on 2021-10-28.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix.

APPENDIX


Appendix A: 20dB Emission Bandwidth Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.891	---	PASS
		2441	1.023	---	PASS
		2480	0.891	---	PASS
2DH1	Ant1	2402	1.221	---	PASS
		2441	1.230	---	PASS
		2480	1.221	---	PASS
3DH1	Ant1	2402	1.260	---	PASS
		2441	1.233	---	PASS
		2480	1.260	---	PASS

Test Graphs

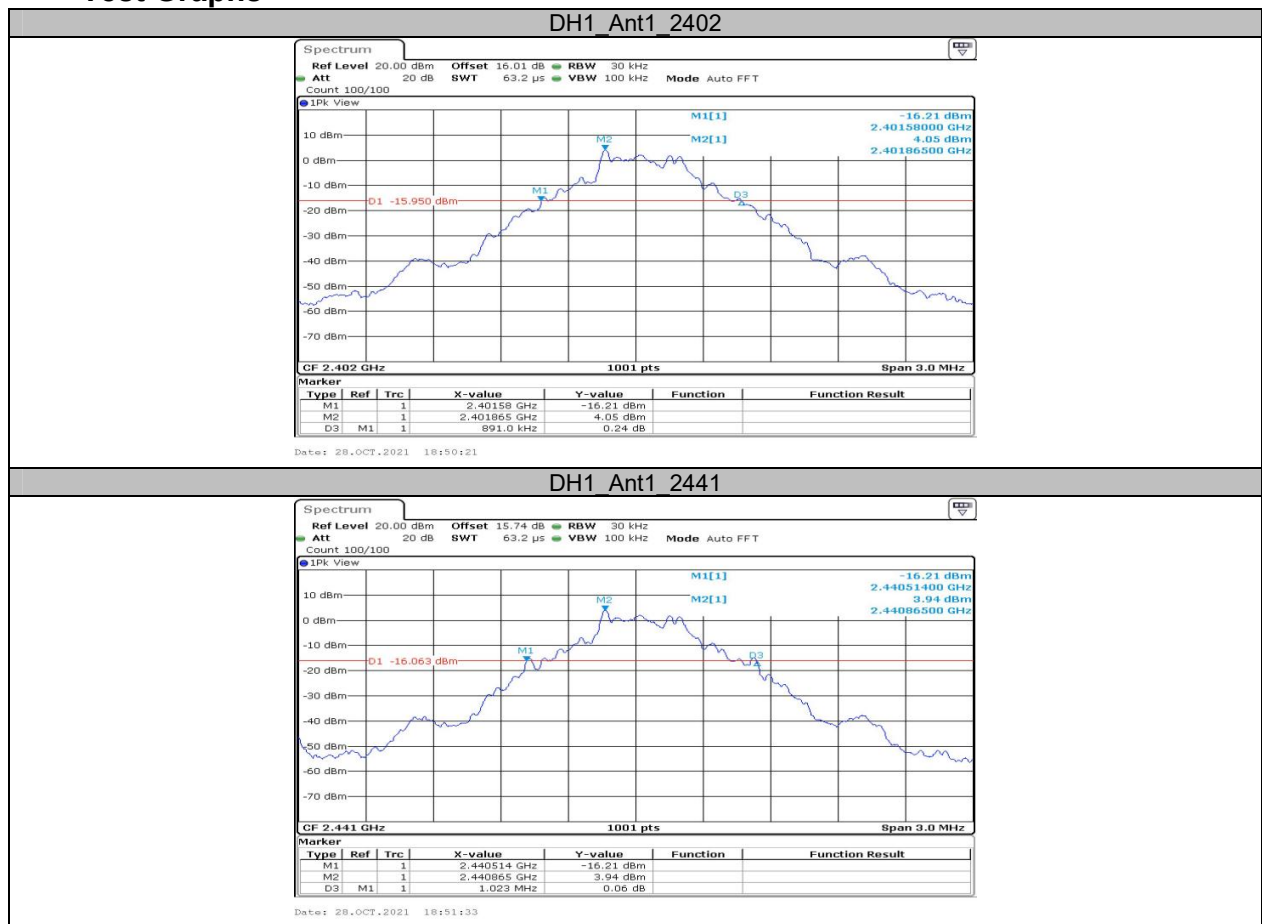


DH1_Ant1_2480

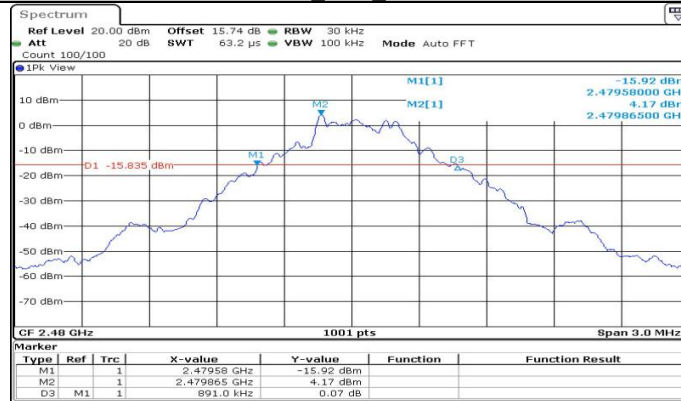


Date: 28.OCT.2021 18:51:55

2DH1_Ant1_2402

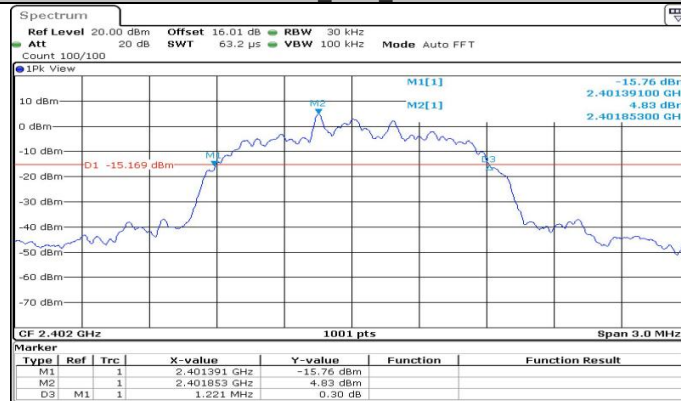

Date: 28.OCT.2021 18:52:25

2DH1_Ant1_2441

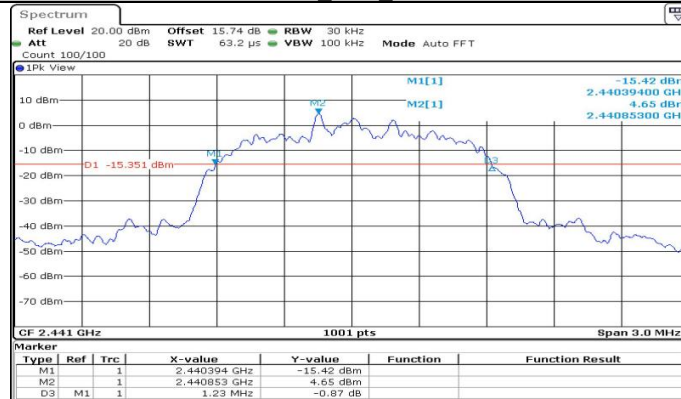


Date: 28.OCT.2021 18:52:55


2DH1_Ant1_2480




3DH1_Ant1_2402

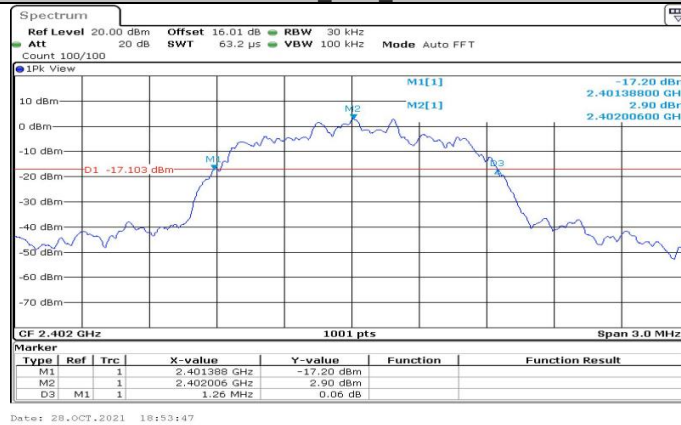

3DH1_Ant1_2441

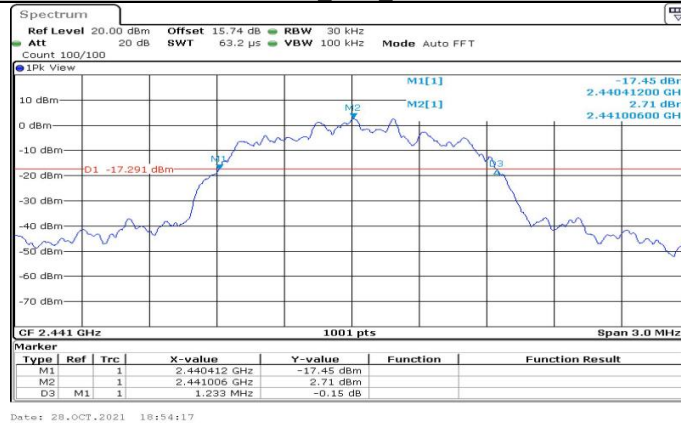

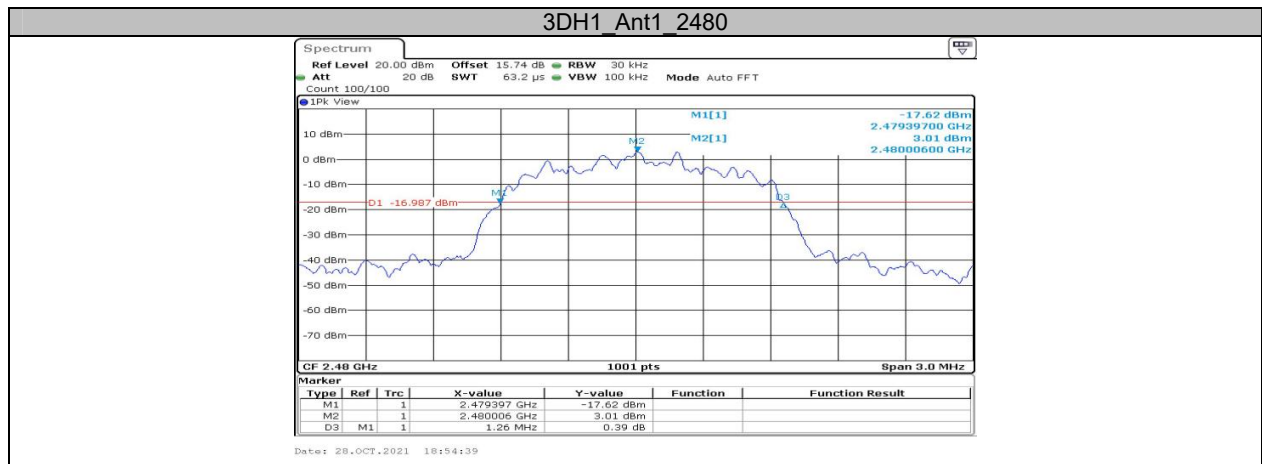


Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.83	---	PASS
		2441	0.83	---	PASS
		2480	0.83	---	PASS
2DH1	Ant1	2402	1.142	---	PASS
		2441	1.145	---	PASS
		2480	1.145	---	PASS
3DH1	Ant1	2402	1.13	---	PASS
		2441	1.136	---	PASS
		2480	1.142	---	PASS


Test Graphs

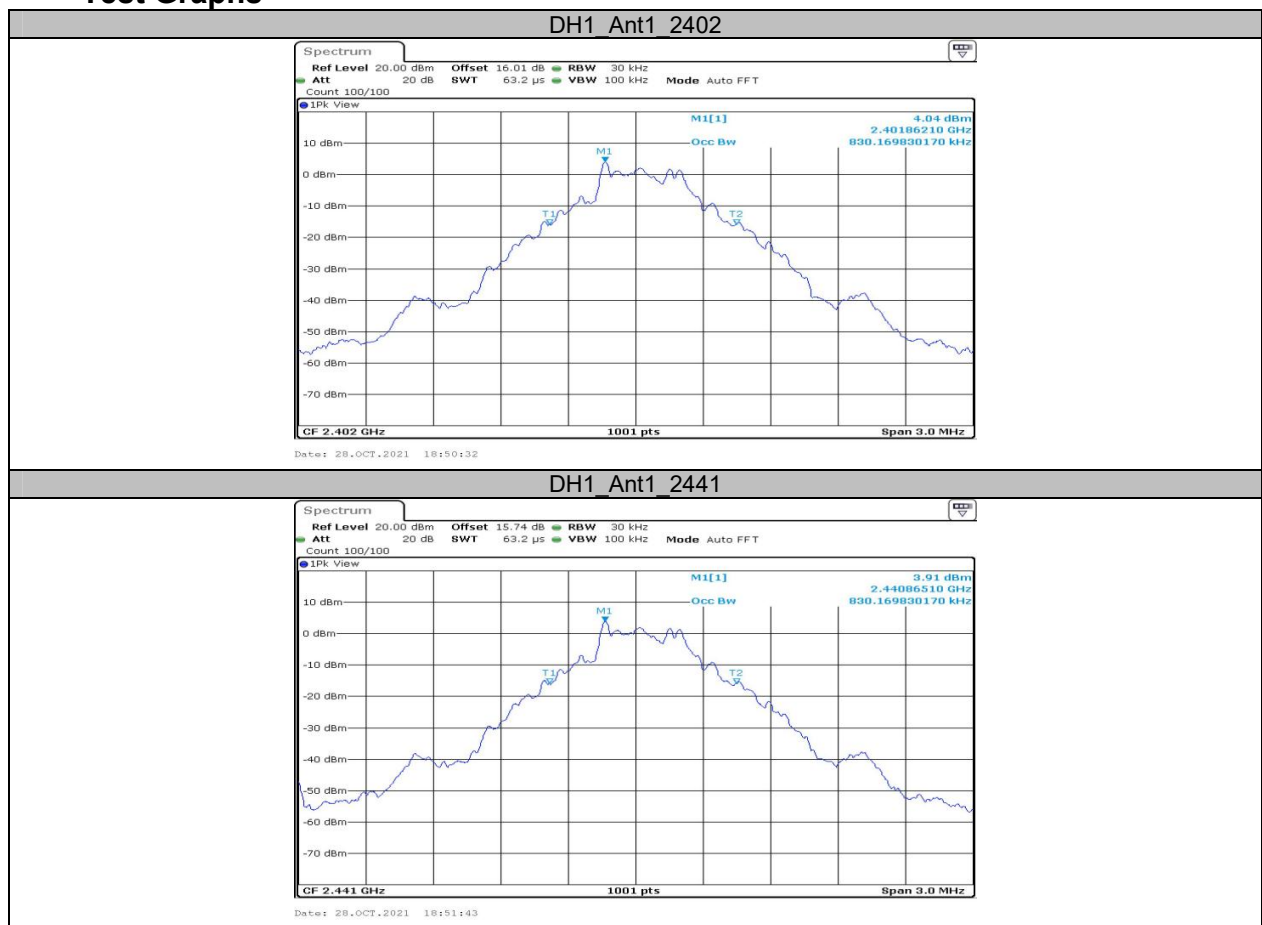

DH1 Ant1 2480



2DH1 Ant1 2402

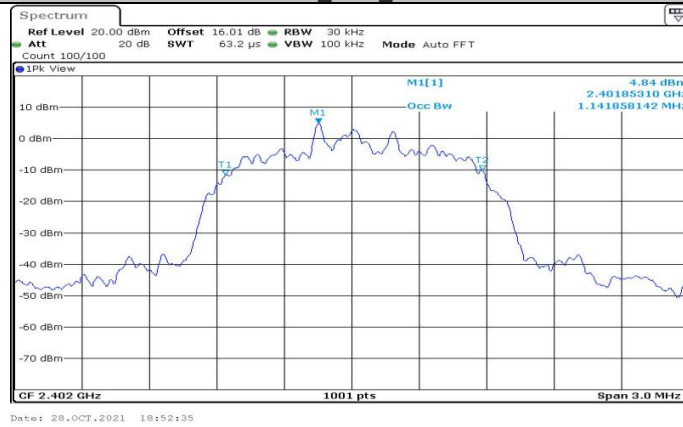

2DH1 Ant1 2441

