



Features:

- Frequency 868-928MHz
- Gain 1dBi
- Efficiency 70%
- Length 195mm straight
- Connectors:
 - W1063 RP-SMA Male
 - W1063M SMA Male
- RoHS Compliant

Applications:

- Indoor use
- 868MHz and 915MHz ISM band radios
- IoT devices
- Security
- Sensors
- Monitoring

All dimensions are in mm

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg,4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998

ELECTRICAL SPECIFICATIONS

Frequency	863-928 MHz
Nominal Impedance	50 Ω
VSWR	2 Maximum
Radiation Pattern	Omni
Gain	1 dBi
Efficiency	70 %
Polarization	Linear
Power Withstanding	1 W

MECHANICAL SPECIFICATIONS

Overall Length	195+/-2 mm
Weight	23.5 g
Antenna Color / Material	Black
Connector type	W1063 RP SMA Male W1063M SMA Male
IP Rating	IP20, Indoor use

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature	-20 °C /+65 ° C
Storage Temperature	-30 °C /+75 °C

Series: Stick Antenna

Description: 868-928MHz Swivel Type
dipole antenna


PART NUMBER: W1063/ W1063M

MECHANICAL DRAWING

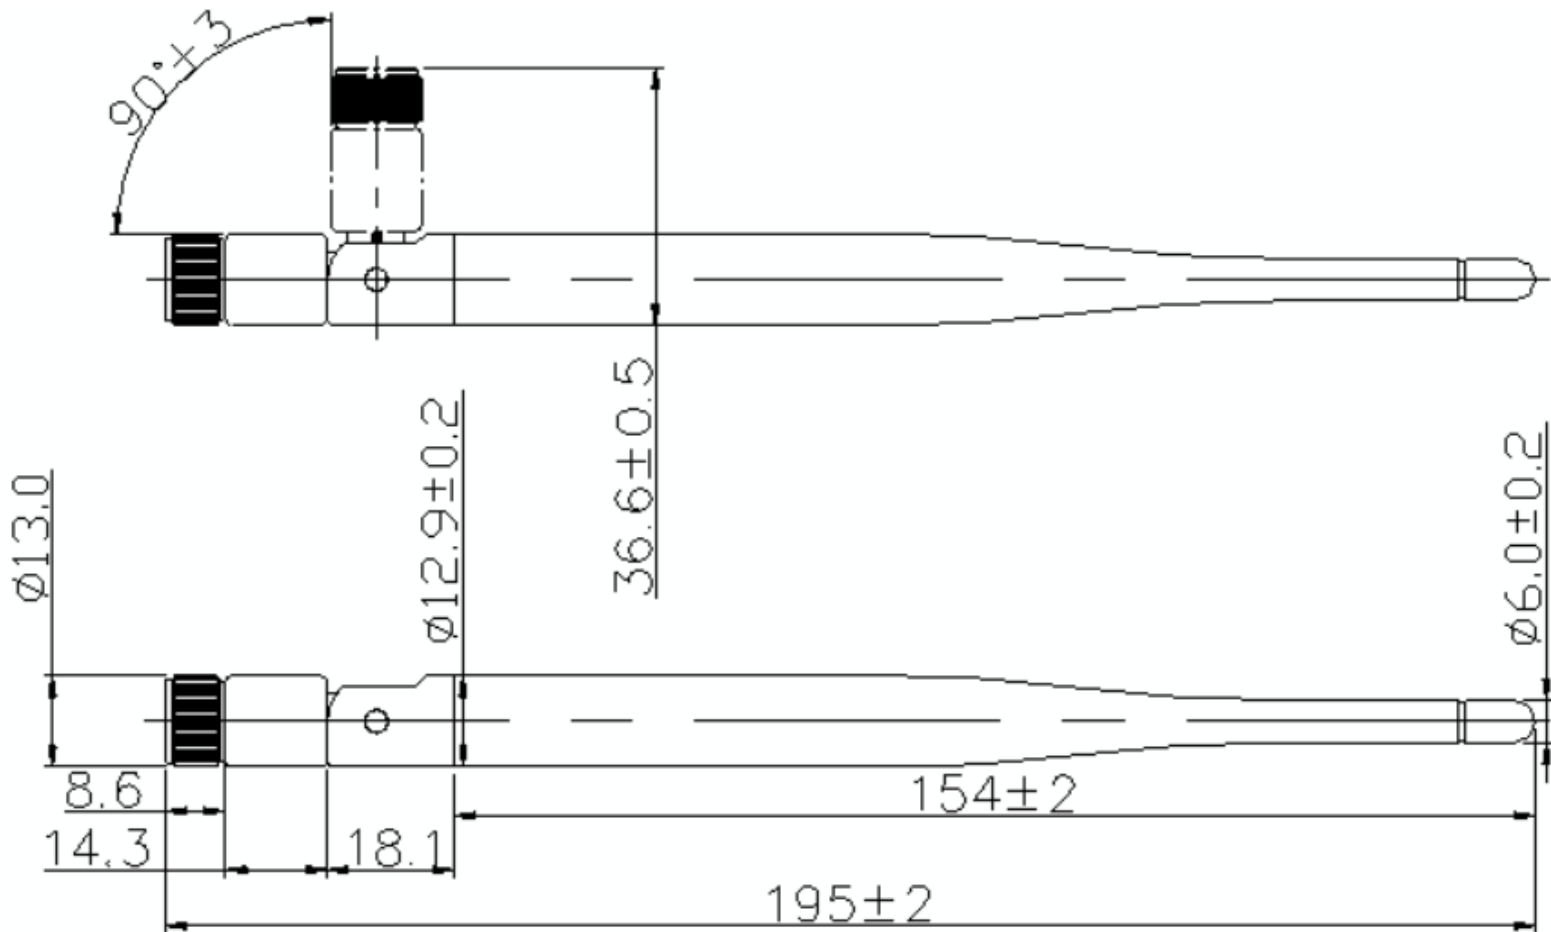


All dimensions are in mm

TEST SETUP

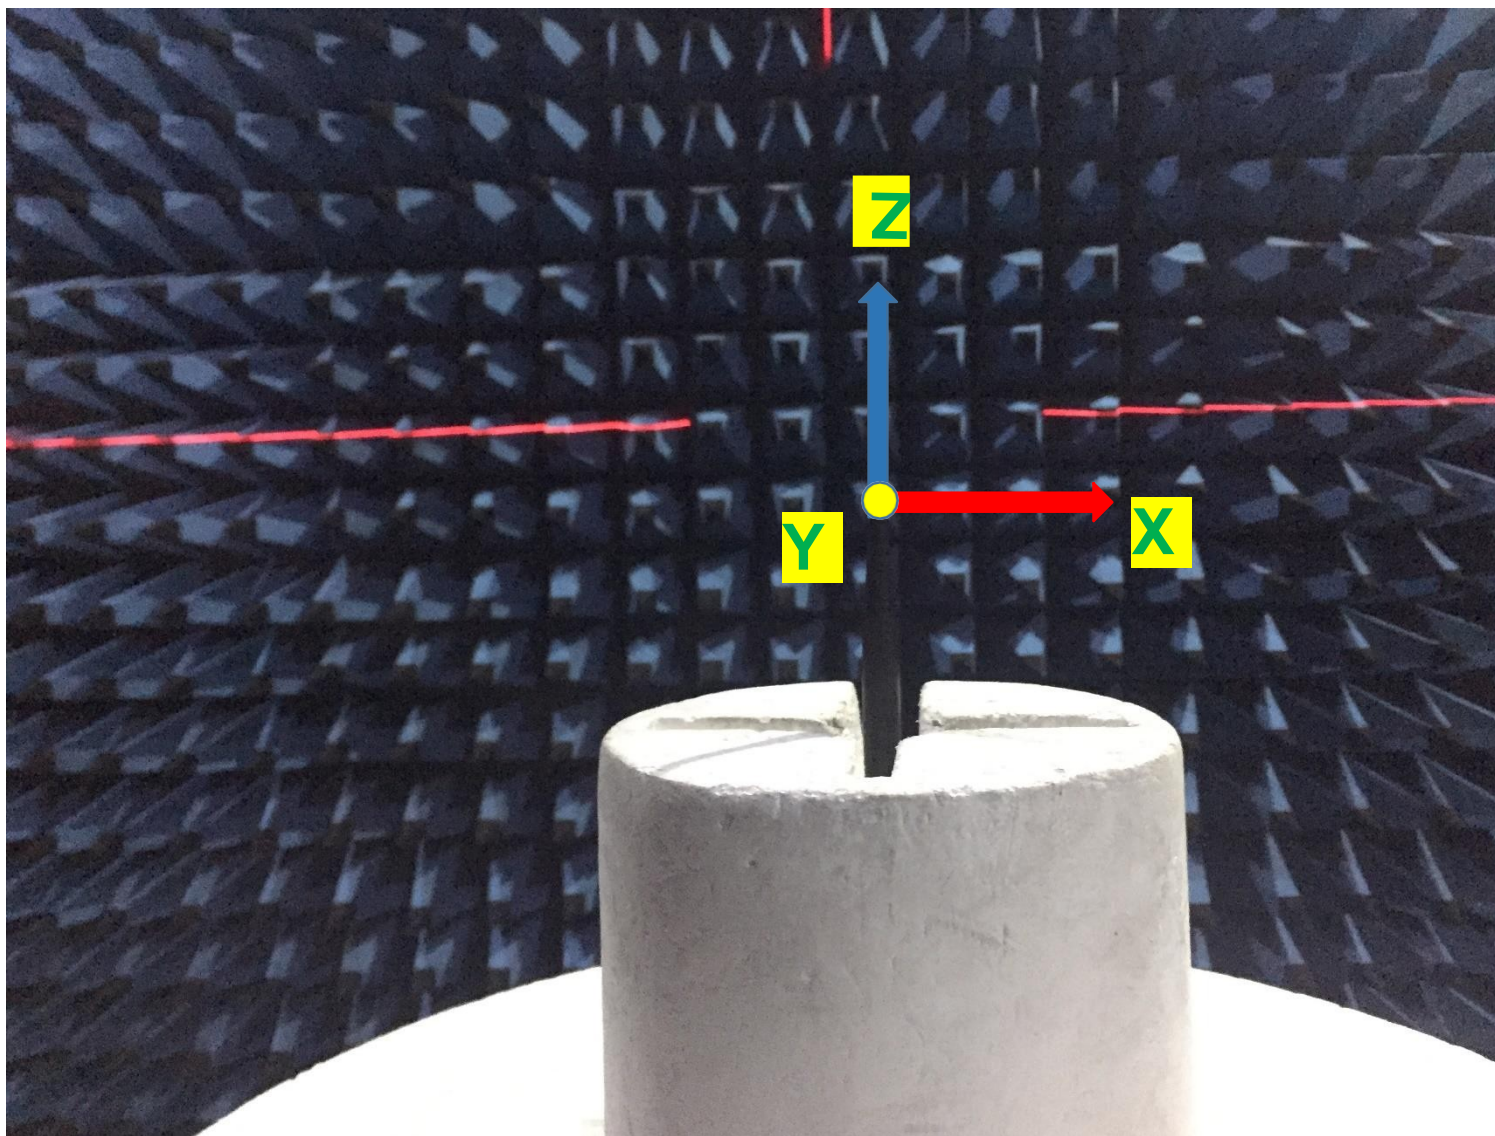


CHARTS

VSWR

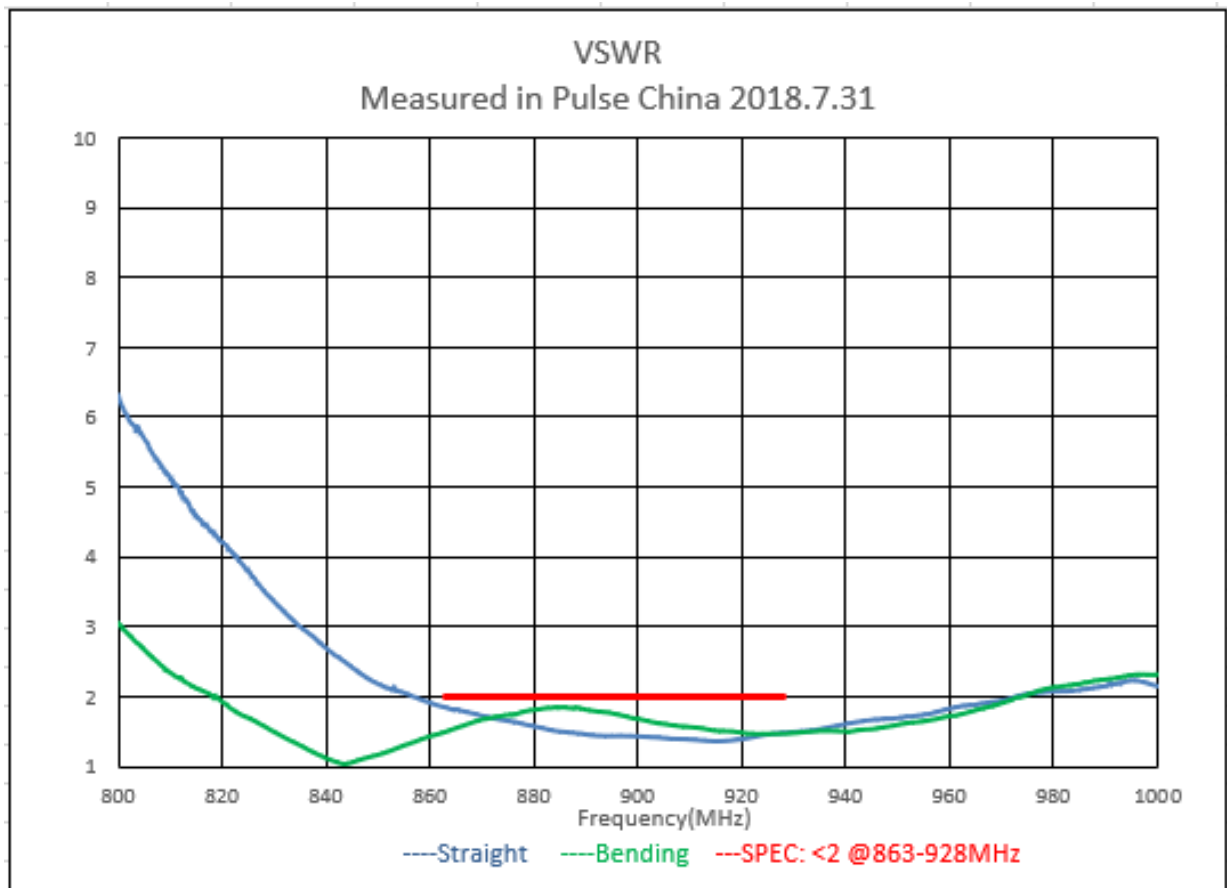


CHARTS

Efficiency(%)

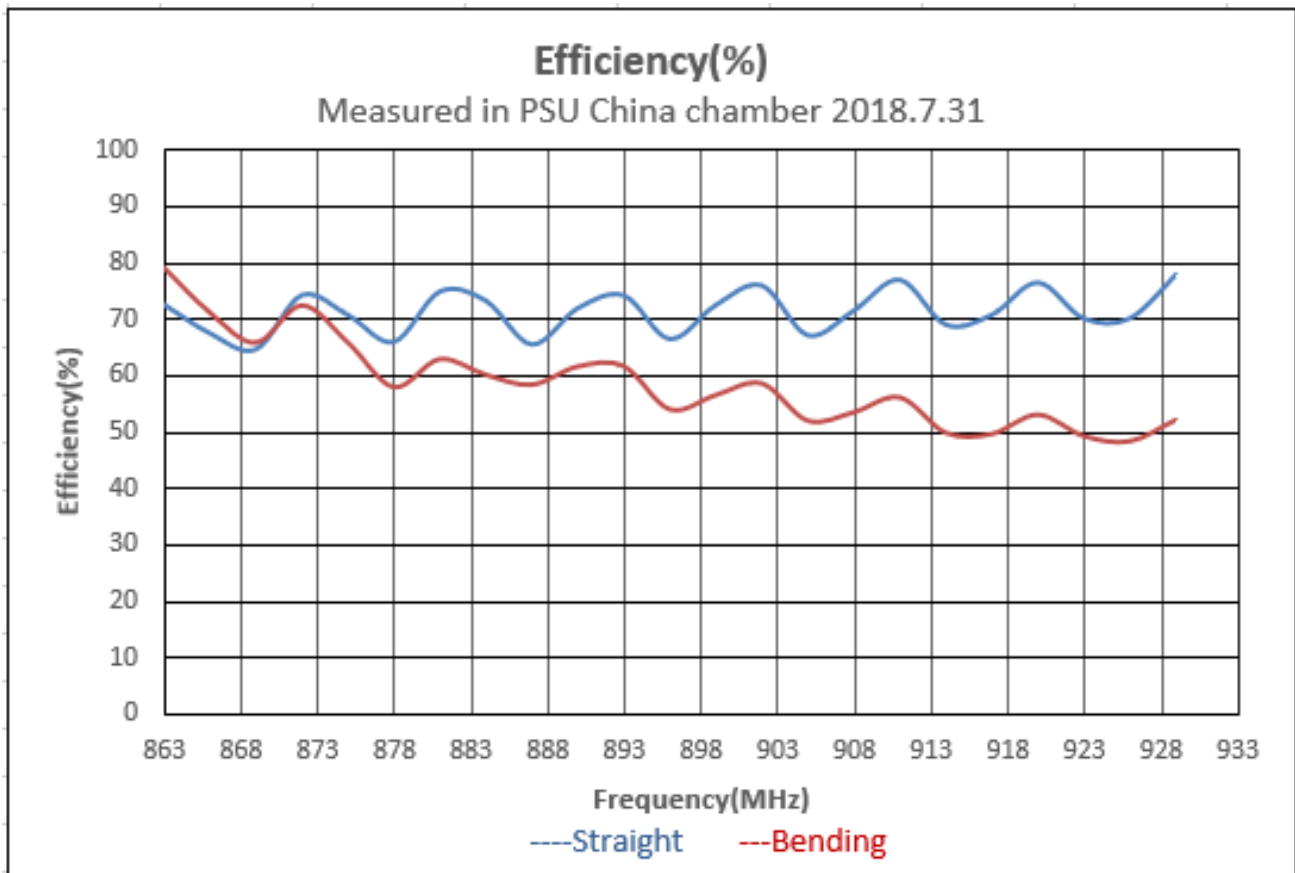


CHARTS

Peak Gain (dBi)

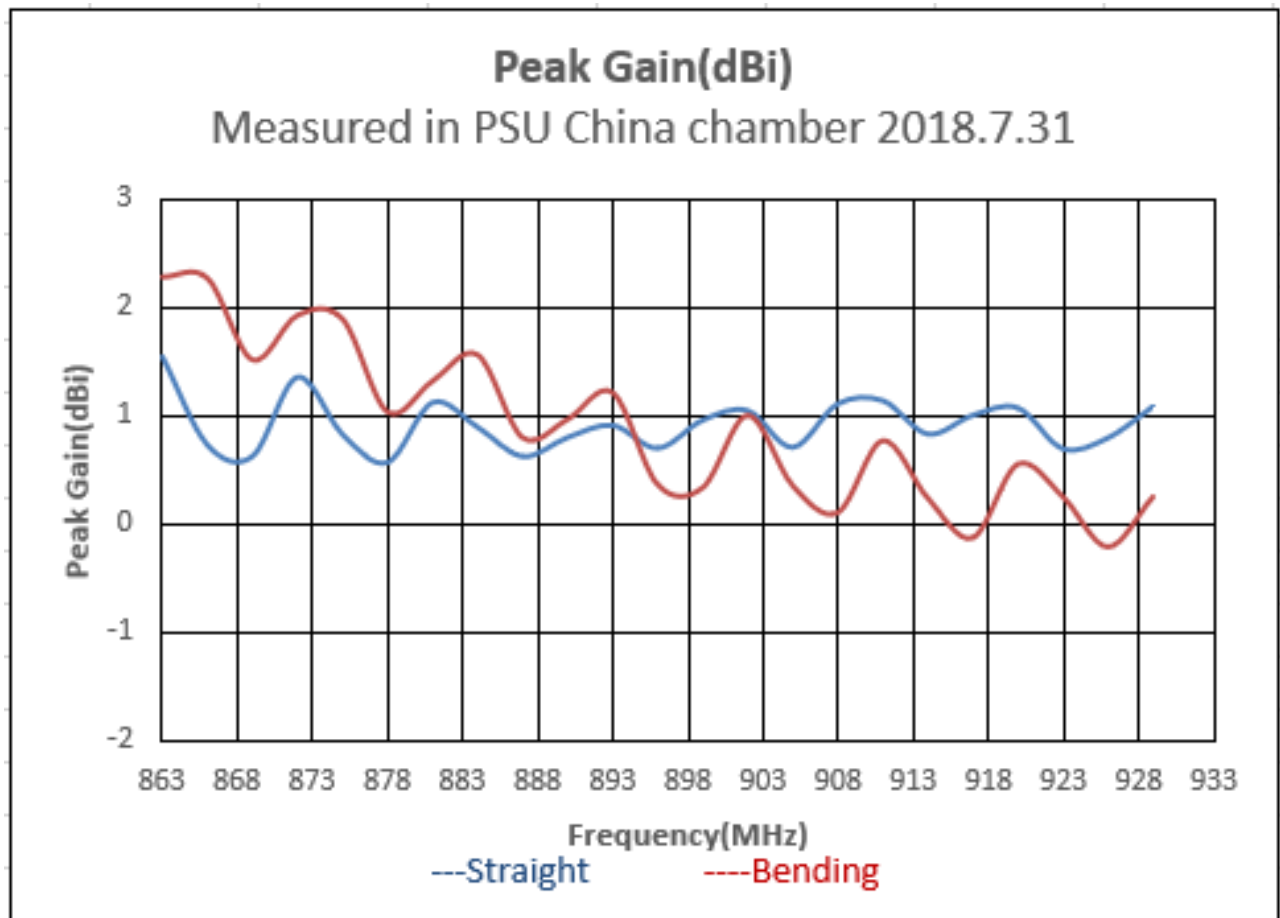


CHARTS

Free space radiation pattern

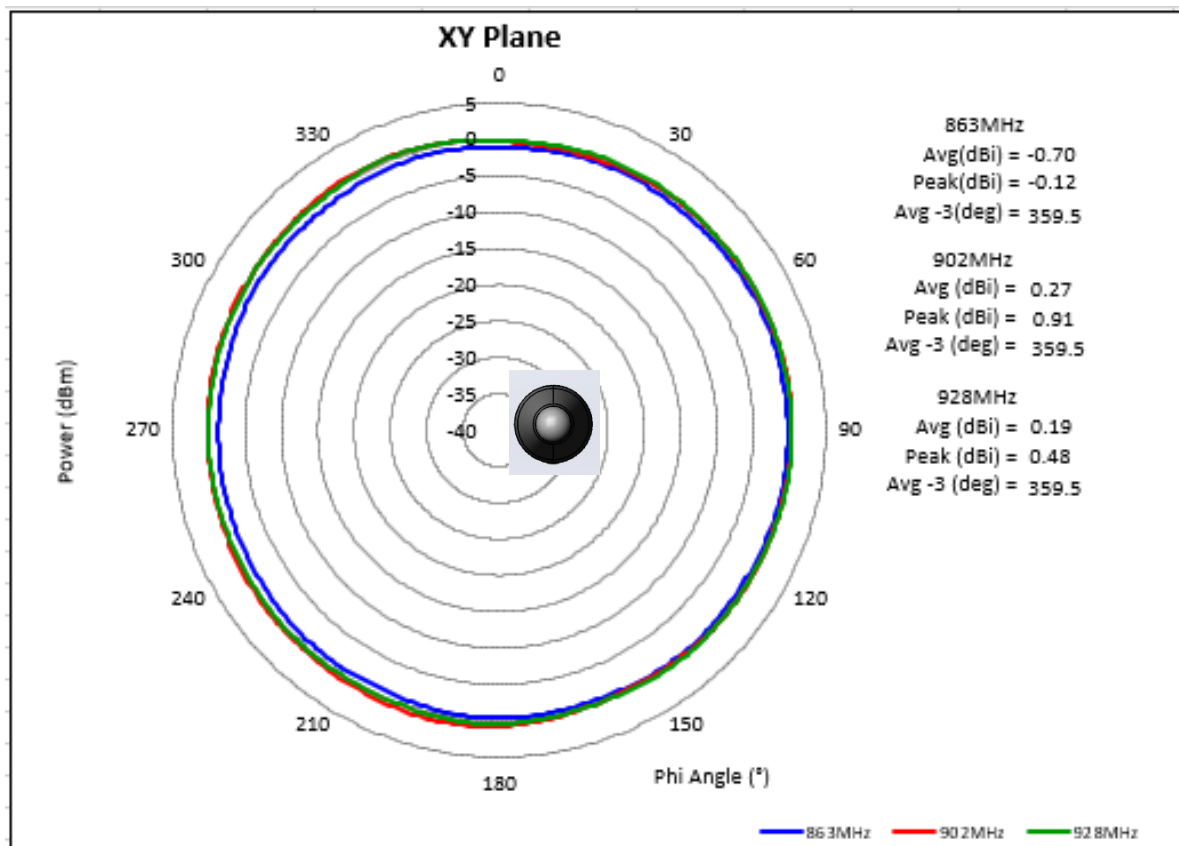


CHARTS

Free space radiation pattern

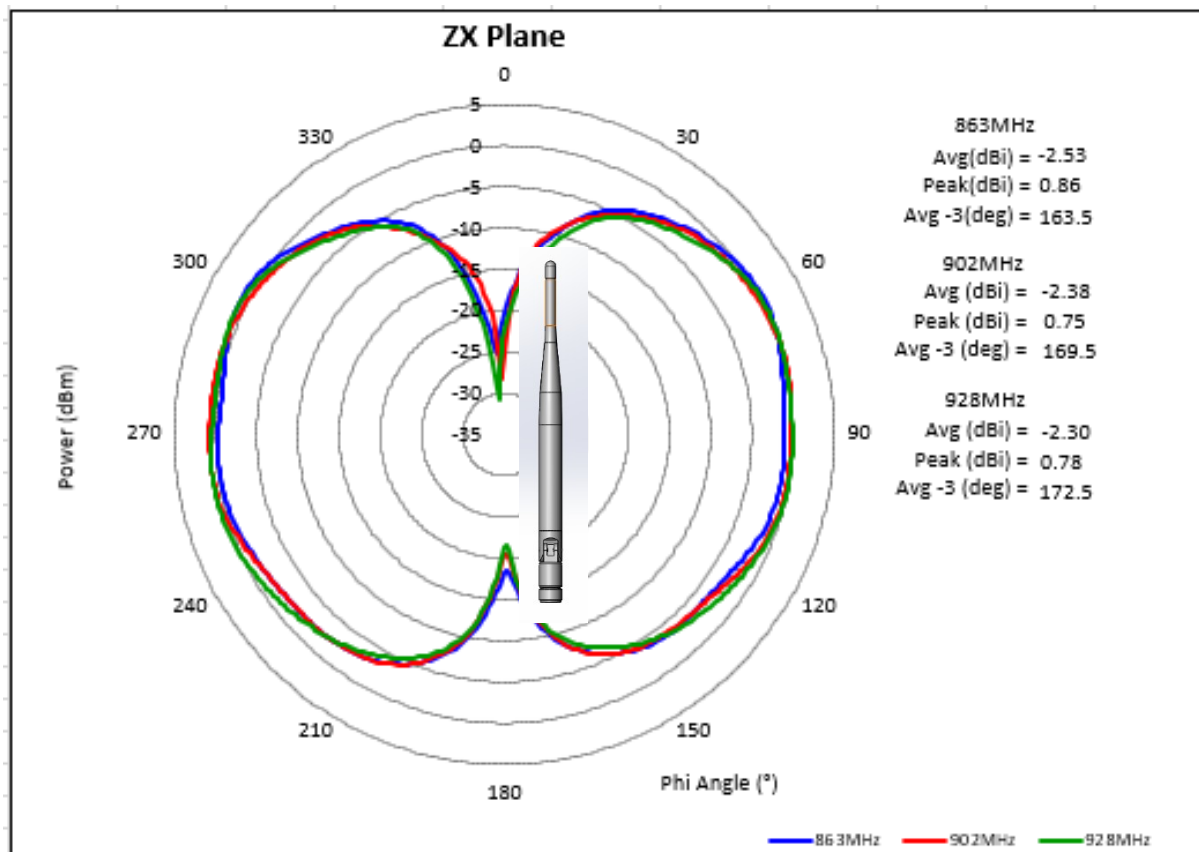

CHARTS

Free space radiation pattern

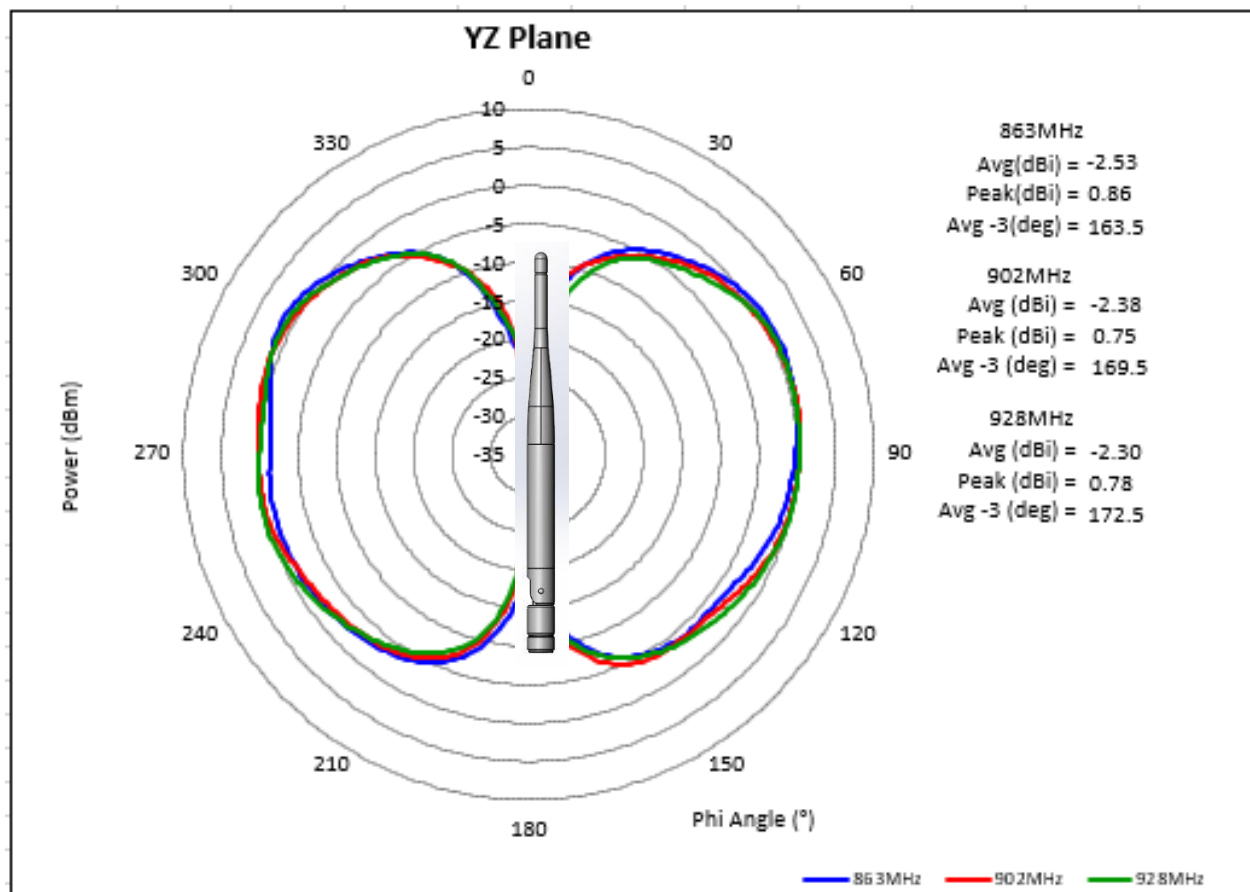

Series: Stick Antenna

Description: **868-928MHz Swivel Type
dipole antenna**

PART NUMBER: **W1063/ W1063M**

PACKAGING

1PCS/PE BAG

250PCS/ carton box

Carton box dimensions (MM): 460x235x140