

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
**AC650 High-Gain Dual Band Wireless USB
Adapter**

ISSUED TO
Ugreen Group Limited

URGEEN Building, Longcheng Industrial Park, Longguanxi Road,
Longhua, ShenZhen, China



Tested by:

Julie Zhu

Julie Zhu

Date

Feb. 21, 2022

Approved by:

Liao Jianming

Liao Jianming

(Technical Director)

Date

Feb. 21, 2022

Report No.: BL-SZ2210449-601

EUT Name: AC650 High-Gain Dual Band Wireless
USB Adapter

Model Name: CM496 (refer section 2.4)

Brand Name: **UGREEN**

Test Standard: 47 CFR Part 15 Subpart C
(refer section 3.1)

FCC ID: 2AQI5-UG650A

Test Conclusion: Pass

Test Date: Jan. 13, 2022 ~ Feb. 08, 2022

Date of Issue: Feb. 21, 2022

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Feb. 21, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION.....	6
2.1	Applicant Information.....	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	9
3	SUMMARY OF TEST RESULTS.....	11
3.1	Test Standards	11
3.2	Verdict	11
4	GENERAL TEST CONFIGURATIONS.....	12
4.1	Test Environments	12
4.2	Test Equipment List.....	12
4.3	Test Software List.....	12
4.4	Measurement Uncertainty	13
4.5	Description of Test Setup	13
4.5.1	For Antenna Port Test.....	13
4.5.2	For AC Power Supply Port Test	14
4.5.3	For Radiated Test (Below 30 MHz)	14
4.5.4	For Radiated Test (30 MHz-1 GHz)	15
4.5.5	For Radiated Test (Above 1 GHz).....	15

4.6	Measurement Results Explanation Example.....	16
4.6.1	For conducted test items:	16
4.6.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards	17
5.1.2	Antenna Anti-Replacement Construction	17
5.1.3	Antenna Gain	17
5.2	Output Power	18
5.2.1	Test Limit.....	18
5.2.2	Test Setup	18
5.2.3	Test Procedure	18
5.2.4	Test Result	19
5.3	6dB Bandwidth	20
5.3.1	Limit.....	20
5.3.2	Test Setup	20
5.3.3	Test Procedure	20
5.3.4	Test Result	20
5.4	Conducted Spurious Emission	21
5.4.1	Limit.....	21
5.4.2	Test Setup	21
5.4.3	Test Procedure	21
5.4.4	Test Result	22
5.5	Band Edge (Authorized-band band-edge).....	23
5.5.1	Limit.....	23
5.5.2	Test Setup	23
5.5.3	Test Procedure	23
5.5.4	Test Result	24
5.6	Conducted Emission	25
5.6.1	Limit.....	25
5.6.2	Test Setup	25
5.6.3	Test Procedure	25

5.6.4	Test Result	25
5.7	Radiated Spurious Emission	26
5.7.1	Limit.....	26
5.7.2	Test Setup	26
5.7.3	Test Procedure	26
5.7.4	Test Result	29
5.8	Band Edge (Restricted-band band-edge).....	30
5.8.1	Limit.....	30
5.8.2	Test Setup	30
5.8.3	Test Procedure	30
5.8.4	Test Result	30
5.9	Power Spectral density (PSD)	31
5.9.1	Limit.....	31
5.9.2	Test Setup	31
5.9.3	Test Procedure	31
5.9.4	Test Result	31
ANNEX A	TEST RESULT	32
A.1	Output Power	32
A.2	Bandwidth.....	34
A.3	Conducted Spurious Emissions	42
A.4	Band Edge (Authorized-band band-edge).....	57
A.5	Conducted Emissions.....	69
A.6	Radiated Emission	71
A.7	Band Edge (Restricted-band band-edge).....	93
A.8	Power Spectral Density (PSD)	101
ANNEX B	TEST SETUP PHOTOS	106
ANNEX C	EUT EXTERNAL PHOTOS	106
ANNEX D	EUT INTERNAL PHOTOS	106

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.6.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Ugreen Group Limited
Address	URGEEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

2.2 Manufacturer Information

Manufacturer	Ugreen Group Limited
Address	URGEEN Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China

2.3 Factory Information

Factory	SHENZHEN TENDA TECHNOLOGY CO., LTD.
Address	6/F-8/F, Block E3, TCL Hi-tech Park, #1001 Zhongshanyua Rd, Xili, Nanshan District. Shenzhen, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	AC650 High-Gain Dual Band Wireless USB Adapter
Model Name Under Test	CM496
Series Model Name	90339, CM580, 90553
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in Case and Dimensions.
Hardware Version	V1.0
Software Version	FS_U10V1.0_RTL_V0.0.5.2_CLL01.bin
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	WIFI 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac U-NII-1/3
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11. 802.11n(40 MHz): 2.422 GHz - 2.452 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 3 to 9.
Modulation Type	DSSS, OFDM
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna Type	External Antenna
Antenna Gain	4.2 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20/40) was tested in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n-20MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n-40MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
6dB Bandwidth	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40	1/6/6.5/13.5 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	MP Tool		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Soft Set	
802.11b	1	31	
	2	31	
	3	31	
	4	32	
	5	32	
	6	33	
	7	32	
	8	32	
	9	33	
	10	33	
	11	33	
802.11g	1	48	
	6	49	
	11	49	
802.11n20	1	48	
	6	49	
	11	49	
802.11n40	3	48	
	6	49	
	9	49	

Run software:

MPTool

MP WPG

Stop Testing MAP E-FUSE 1*2_PG Quit Reset Help Enable AutoInstall Flash

Testing Item

Continuous Tx -

A 49 B 0

C 0 D 0

Band Bandwidth

2.4G 20M

Data Rate

OFDM 6M

Preamble

Long Preamble -

Channel

6

Tx Path Rx Path

A AB

RFPATHSet

Default

HW Tx Packet Setting

Pattern LDPC

Random

Length Count

1000

Type Period

Normal 2000

Mac Address

Self Get

502B73A90268

Tx Dest Set

FFFFFFFFFFFF

FW

LED1 ON Ant_1

IQK LCK

PMAC Packet TX Start

Tx Packets 1

Rx OK 0

Rx CRC32 Error 0

Rx P/M OK PHYOK MACOK

Rx P/M Err PHYERR MACERR

E-FUSE

Write Read Update

BYTE Offset Value

RF RfPath_A

Offset

Value

Reg Read Reg Write

RF Read RF Write

TxPowerTrack Start

Thermal Val + Monitor

Crystal Calibration

Xin/Xout 0x1E

EnableTxPowerLimit

Change settings

Power by rate file: Default

Power limit file: Default

Efuse Used 177 Bytes

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC PART No.	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	Pass ^{Note 1}
2	Output Power	15.247 (b)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247 (a)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247 (d)	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247 (d)	ANNEX A.4	Pass
6	Conducted Emission	15.207	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247 (d)	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247 (d)	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247 (e)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	N/A	N/A ^{Note 2}

Note ¹: Please refer to section 5.1.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	5.0 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.01.04	2023.01.03
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
Power Sensor	KEYSIGHT	U2063XA	MY58000247	2021.05.08	2022.05.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.09.13	2022.09.12
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.10.10	2022.10.09
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.08	2022.06.07
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2021.08.20	2024.08.19
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2021.09.04	2024.09.09
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2021.08.15	2024.08.14
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

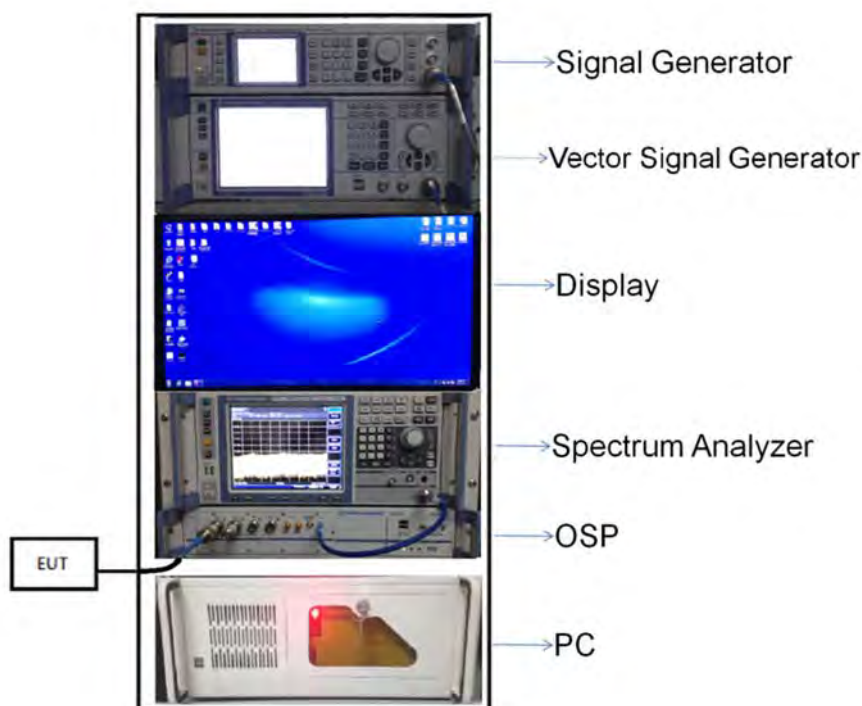


(Diagram 1)

4.5.2 For AC Power Supply Port Test

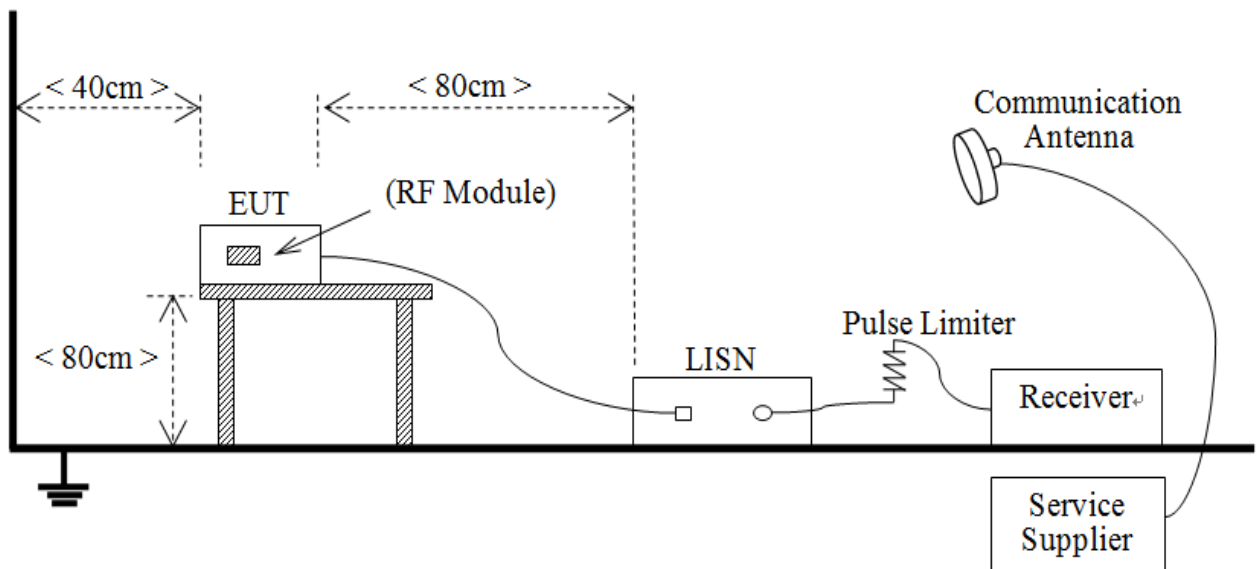


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

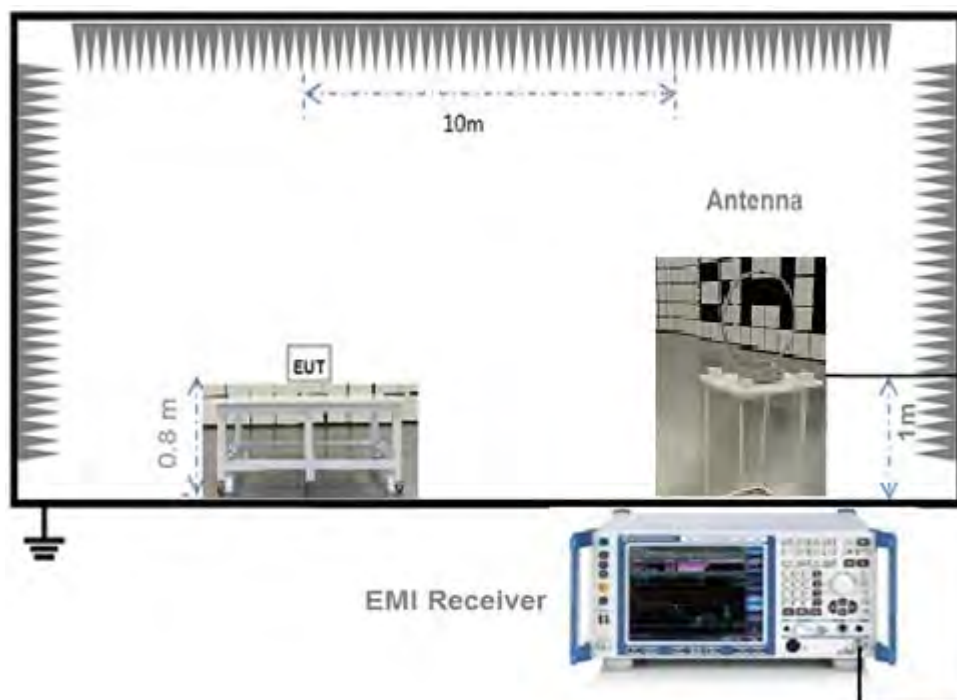


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

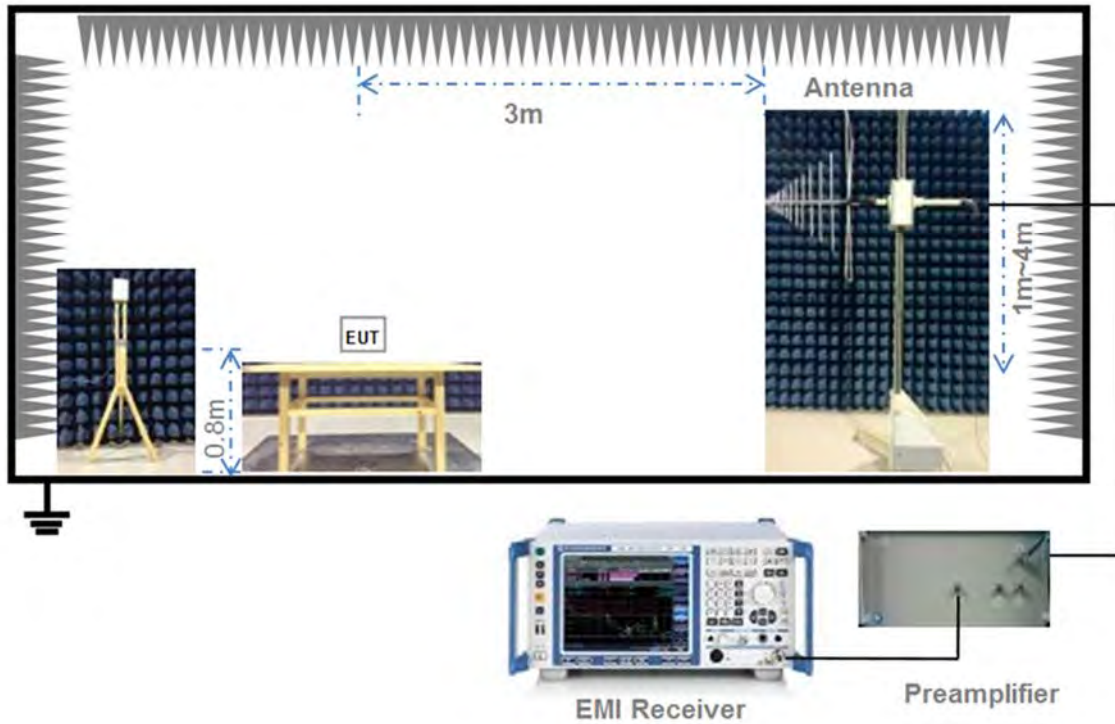

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

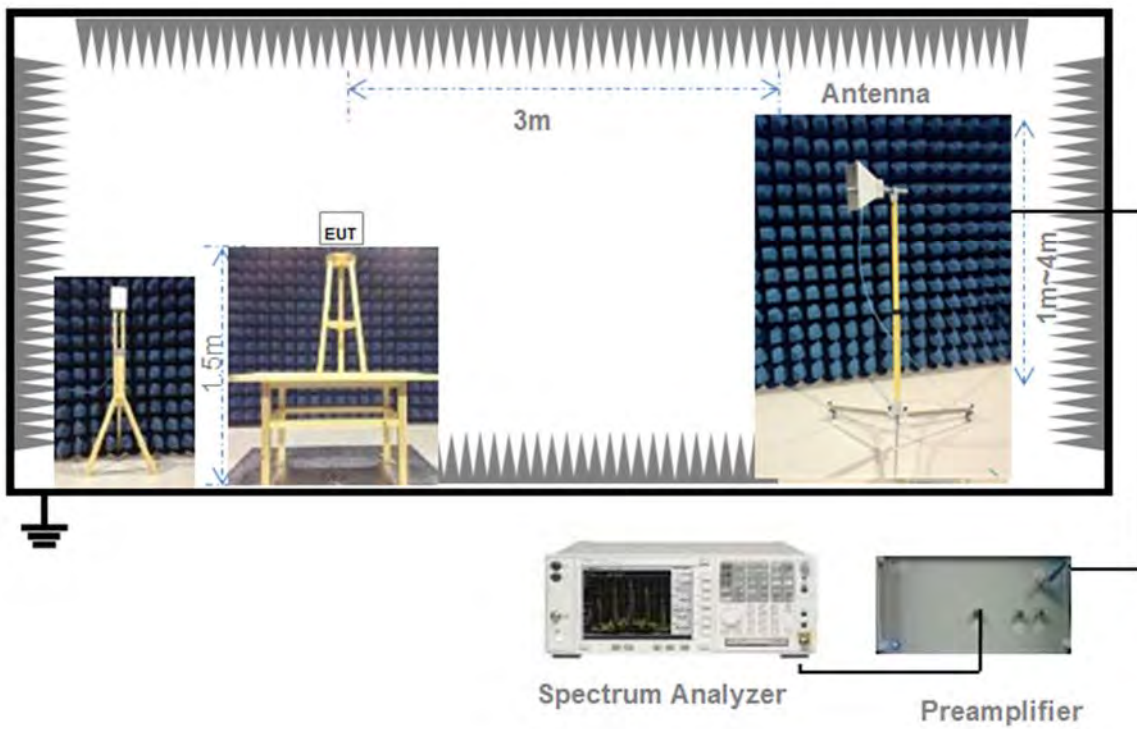

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a wire antenna.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.36dB Bandwidth

5.3.1 Limit

FCC §15.247(a)

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.

- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz

1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Duty Cycle

Test Mode	On Time (ms)	On+Off time (ms)	Duty Cycle
802.11b	10.06	10.06	100.00%
802.11g	10.06	10.06	100.00%
802.11n-20 MHz	10.06	10.06	100.00%
802.11n-40 MHz	10.06	10.06	100.00%

Peak Power Test Data

802.11b Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	18.49	70.63	30	1000	Pass
CH2	18.27	67.14			Pass
CH3	18.14	65.16			Pass
CH4	18.53	71.29			Pass
CH5	18.43	69.66			Pass
CH6	18.81	76.03			Pass
CH7	18.76	75.16			Pass
CH8	18.30	67.61			Pass
CH9	18.62	72.78			Pass
CH10	18.60	72.44			Pass
CH11	18.73	74.64			Pass

802.11g Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	25.48	353.18	30	1000	Pass
CH6	25.68	369.83			Pass
CH11	25.44	349.95			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	25.84	383.71	30	1000	Pass
CH6	25.85	384.59			Pass
CH11	25.53	357.27			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	25.79	379.31	30	1000	Pass
CH6	25.99	397.19			Pass
CH9	25.71	372.39			Pass

Average Power Test Data

802.11b Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	16.50	44.67	30	1000	Pass
CH2	16.24	42.07			Pass
CH3	16.19	41.59			Pass
CH4	16.29	42.56			Pass
CH5	16.36	43.25			Pass
CH6	16.64	46.13			Pass
CH7	16.40	43.65			Pass
CH8	16.54	45.08			Pass
CH9	16.71	46.88			Pass
CH10	16.78	47.64			Pass
CH11	16.62	45.92			Pass

802.11g Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	18.64	73.11	30	1000	Pass
CH6	18.75	74.99			Pass
CH11	18.55	71.61			Pass

802.11n-20 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH1	18.59	72.28	30	1000	Pass
CH6	18.59	72.28			Pass
CH11	18.43	69.66			Pass

802.11n-40 MHz Mode:

Channel	Measured Output Average Power		Limit		Verdict
	dBm	mW	dBm	mW	
CH3	18.52	71.12	30	1000	Pass
CH6	18.76	75.16			Pass
CH9	18.59	72.28			Pass

A.2 Bandwidth

Test Data

802.11b Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	10.200000	15.019000	≥500
CH2	10.150000	15.018000	≥500
CH3	10.200000	15.017000	≥500
CH4	10.200000	15.000000	≥500
CH5	10.150000	15.011000	≥500
CH6	10.200000	15.024000	≥500
CH7	10.150000	15.018000	≥500
CH8	10.150000	15.012000	≥500
CH9	10.150000	15.010000	≥500
CH10	10.150000	15.011000	≥500
CH11	10.150000	15.015000	≥500

802.11g Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	16.600000	17.306000	≥500
CH6	16.650000	17.357000	≥500
CH11	16.650000	17.375000	≥500

802.11n-20MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH1	17.700000	18.220000	≥500
CH6	17.700000	18.243000	≥500
CH11	17.750000	18.218000	≥500

802.11n-40MHz Mode:

Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH3	36.450000	36.401000	≥500
CH6	36.450000	36.474000	≥500
CH9	36.450000	36.465000	≥500

Test Plots

6 dB Bandwidth

802.11b CHANNEL 1



802.11b CHANNEL 2



802.11b CHANNEL 3



802.11b CHANNEL 4



802.11b CHANNEL 5



802.11b CHANNEL 6



802.11b CHANNEL 7



802.11b CHANNEL 8



802.11b CHANNEL 9



802.11b CHANNEL 10



802.11b CHANNEL 11



802.11g CHANNEL 1





802.11n-40 MHz CHANNEL 6



802.11n-40 MHz CHANNEL 9



99% Bandwidth

802.11b CHANNEL 1



802.11b CHANNEL 2



802.11b CHANNEL 3



802.11b CHANNEL 4



802.11b CHANNEL 5



802.11b CHANNEL 6



802.11b CHANNEL 7



802.11b CHANNEL 8



802.11b CHANNEL 9




802.11b CHANNEL 10



802.11b CHANNEL 11




802.11g CHANNEL 1

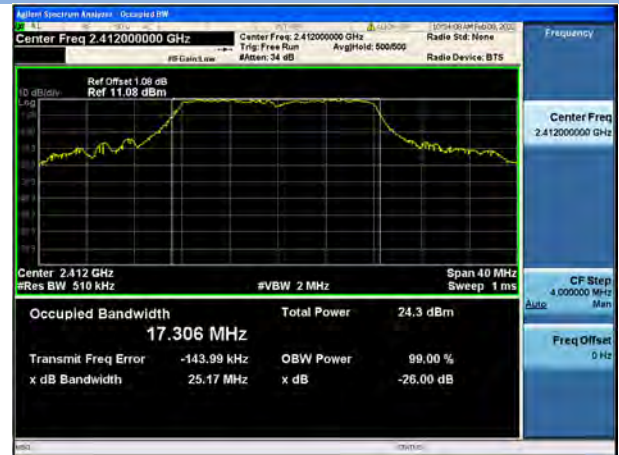


802.11g CHANNEL 6




802.11g CHANNEL 11

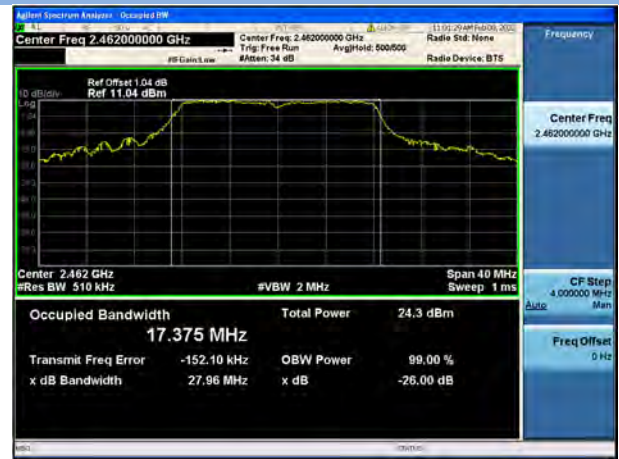

802.11n-20 MHz CHANNEL 1

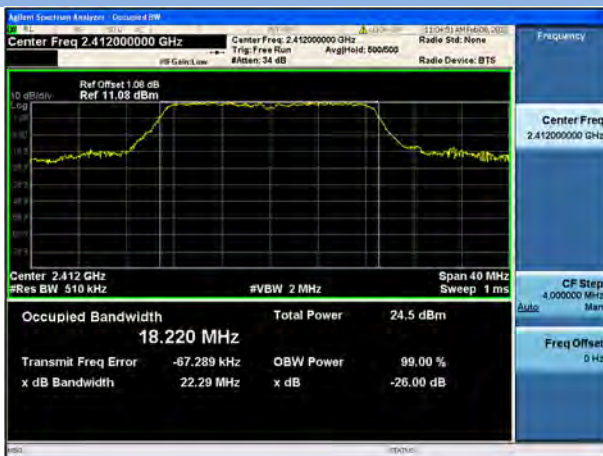


802.11 n-20 MHz CHANNEL 6

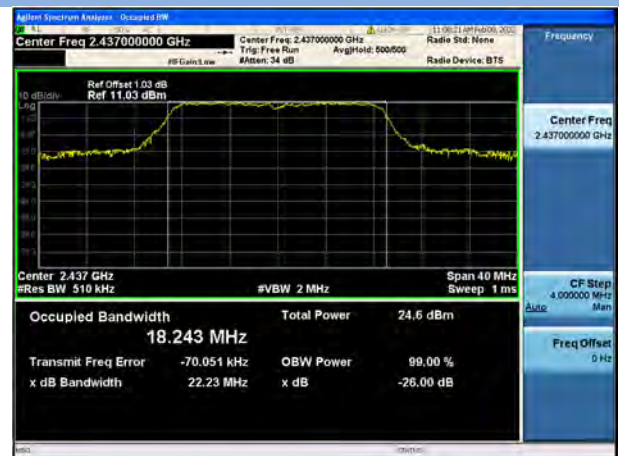


802.11n-20 MHz CHANNEL 11



802.11n-40 MHz CHANNEL 3

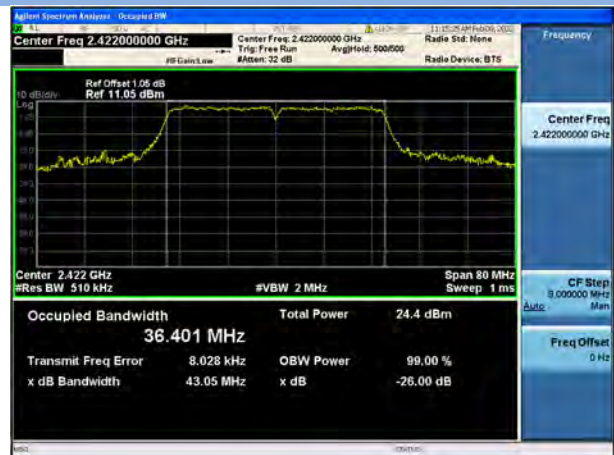

802.11n-40 MHz CHANNEL 6

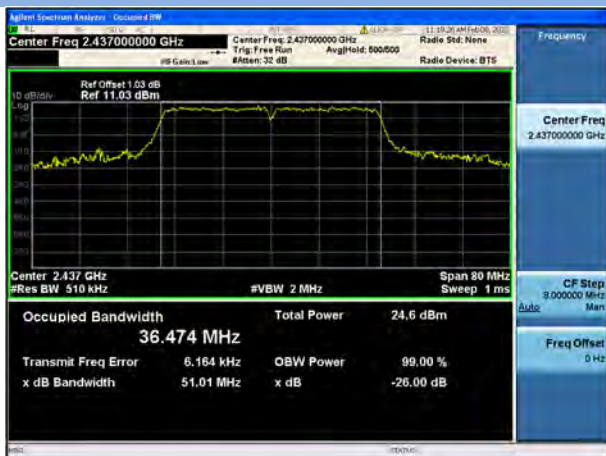

802.11n-40 MHz CHANNEL 9



A.3 Conducted Spurious Emissions

Test Data

802.11b Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-49.90	4.97	-15.04	Pass
CH2	-50.12	4.86	-15.14	Pass
CH3	-50.54	4.68	-15.32	Pass
CH4	-49.83	5.03	-14.97	Pass
CH5	-50.20	5.13	-14.87	Pass
CH6	-50.38	5.48	-14.52	Pass
CH7	-48.85	5.29	-14.71	Pass
CH8	-50.07	5.00	-15.00	Pass
CH9	-50.47	5.29	-14.71	Pass
CH10	-49.18	5.42	-14.58	Pass
CH11	-50.63	5.40	-14.60	Pass

802.11g Mode:

Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-50.48	3.49	-16.51	Pass
CH6	-49.55	3.82	-16.18	Pass
CH11	-49.96	3.76	-16.24	Pass

802.11n-20MHz Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-50.05	4.35	-15.65	Pass
CH6	-50.91	3.55	-16.45	Pass
CH11	-49.39	3.93	-16.07	Pass

802.11n-40MHz Mode:


Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH3	-49.87	0.47	-19.53	Pass
CH6	-49.58	0.99	-19.01	Pass
CH9	-49.08	0.42	-19.58	Pass

Test Plots


802.11b CHANNEL 1 CARRIER LEVEL

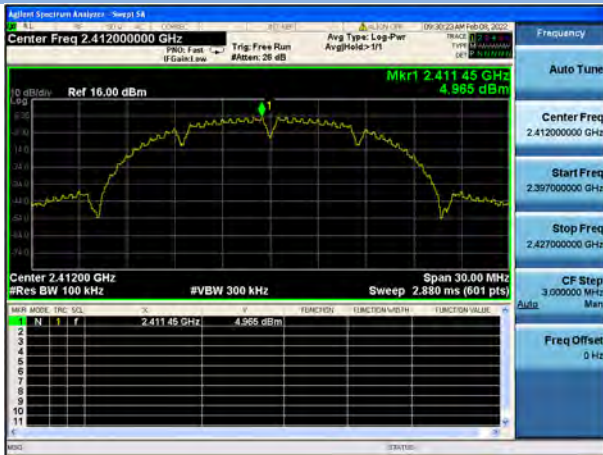

802.11b CHANNEL 1, SPURIOUS 30 MHz ~ 3 GHz

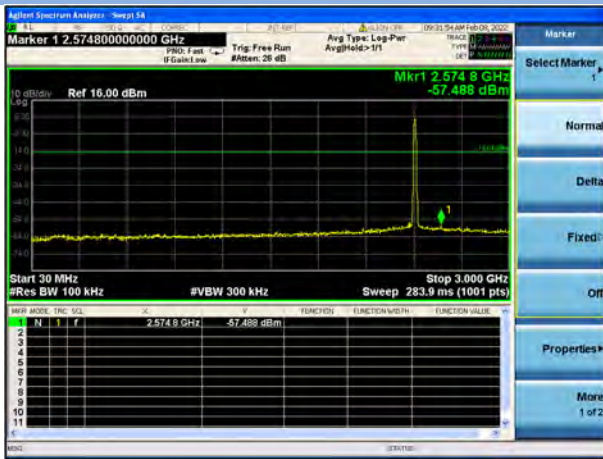


802.11b CHANNEL 1, SPURIOUS 2 GHz ~ 25 GHz

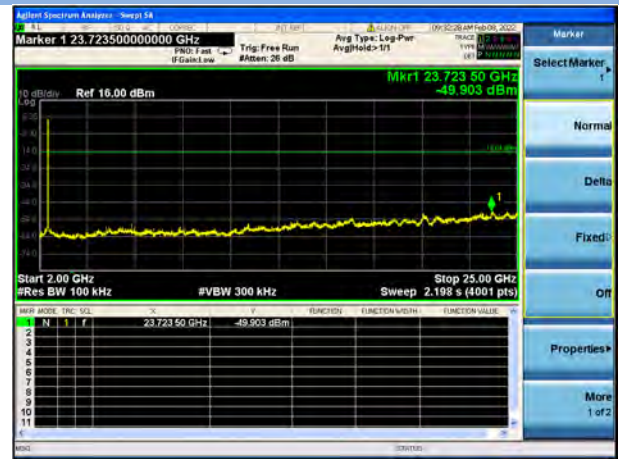


802.11b CHANNEL 2 CARRIER LEVEL



802.11b CHANNEL 2, SPURIOUS 30 MHz ~ 3 GHz

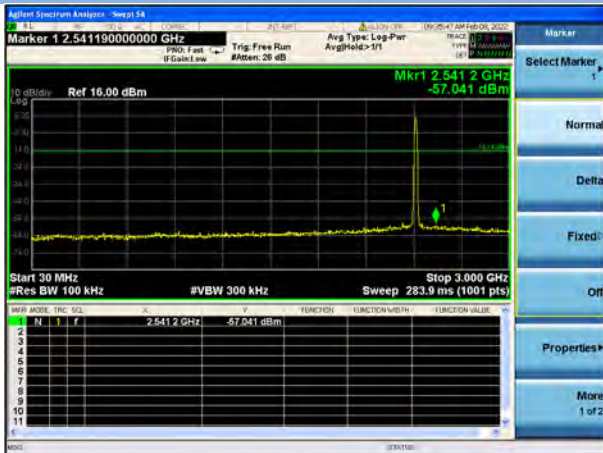


802.11b CHANNEL 2, SPURIOUS 2 GHz ~ 25 GHz

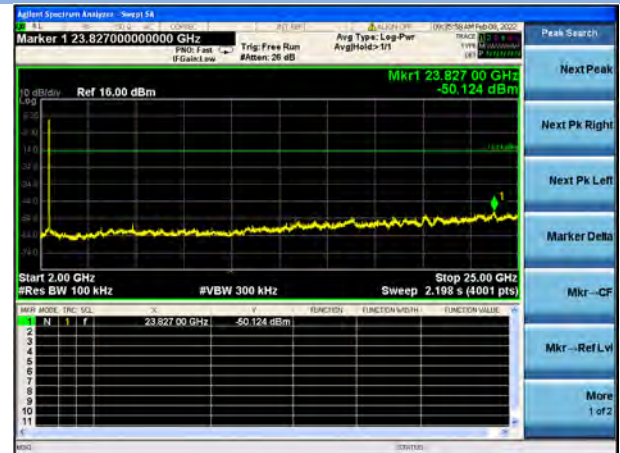


802.11b CHANNEL 3 CARRIER LEVEL



802.11b CHANNEL 3, SPURIOUS 30 MHz ~ 3 GHz

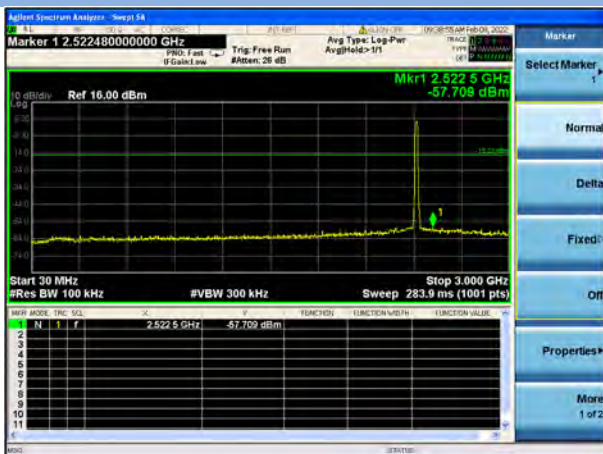


802.11b CHANNEL 3, SPURIOUS 2 GHz ~ 25 GHz

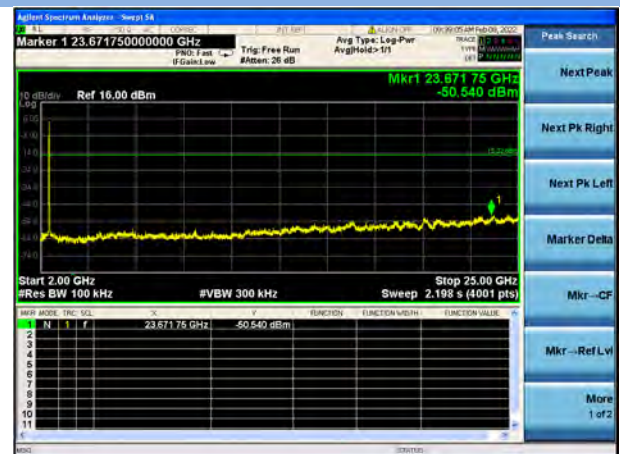


802.11b CHANNEL 4 CARRIER LEVEL



802.11b CHANNEL 4, SPURIOUS 30 MHz ~ 3 GHz

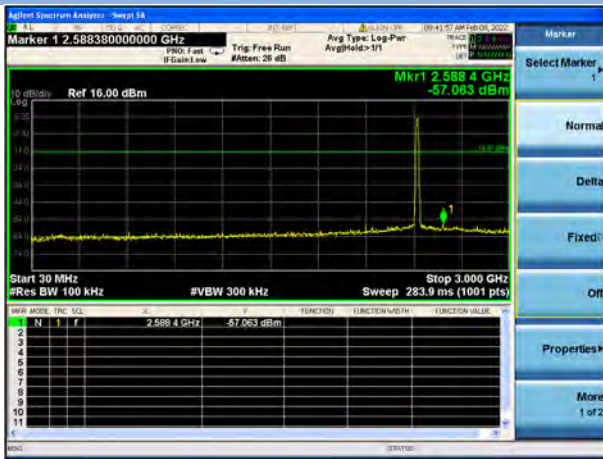


802.11b CHANNEL 4, SPURIOUS 2 GHz ~ 25 GHz

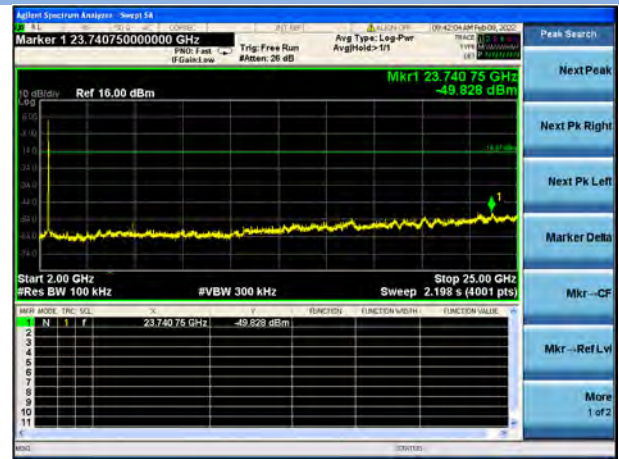


802.11b CHANNEL 5 CARRIER LEVEL



802.11b CHANNEL 5, SPURIOUS 30 MHz ~ 3 GHz

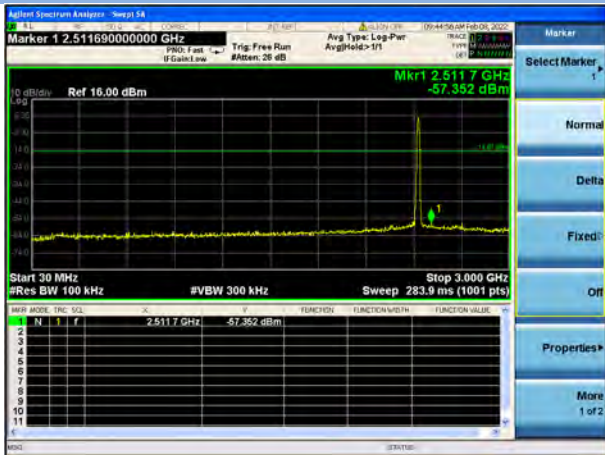


802.11b CHANNEL 5, SPURIOUS 2 GHz ~ 25 GHz

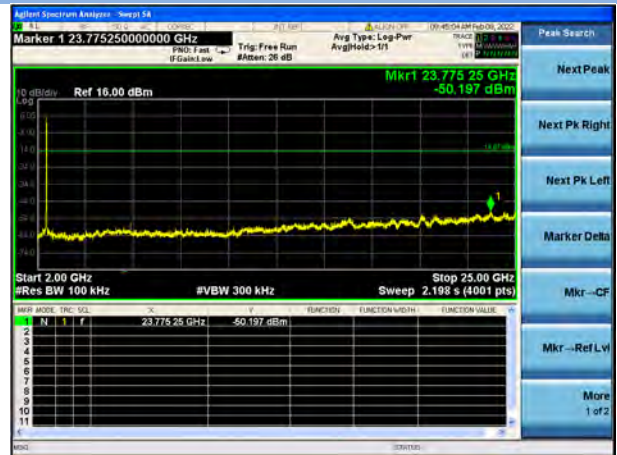


802.11b CHANNEL 6 CARRIER LEVEL



802.11b CHANNEL 6, SPURIOUS 30 MHz ~ 3 GHz

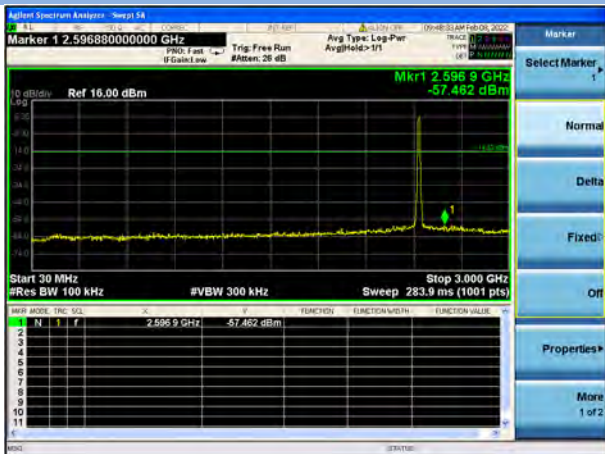


802.11b CHANNEL 6, SPURIOUS 2 GHz ~ 25 GHz

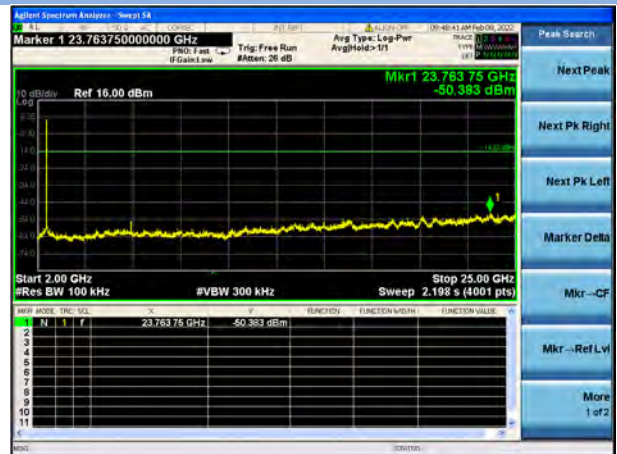


802.11b CHANNEL 7 CARRIER LEVEL



802.11b CHANNEL 7, SPURIOUS 30 MHz ~ 3 GHz

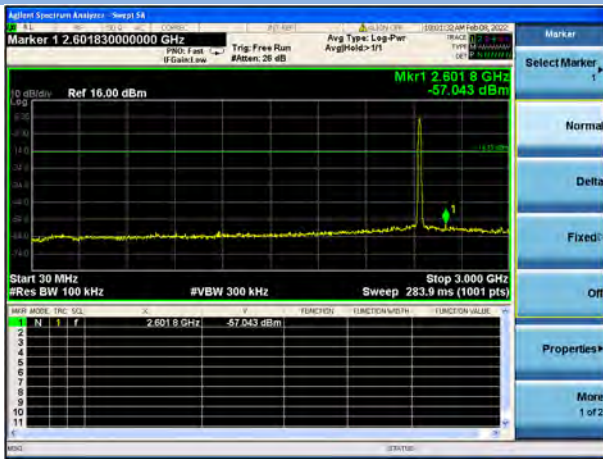


802.11b CHANNEL 7, SPURIOUS 2 GHz ~ 25 GHz

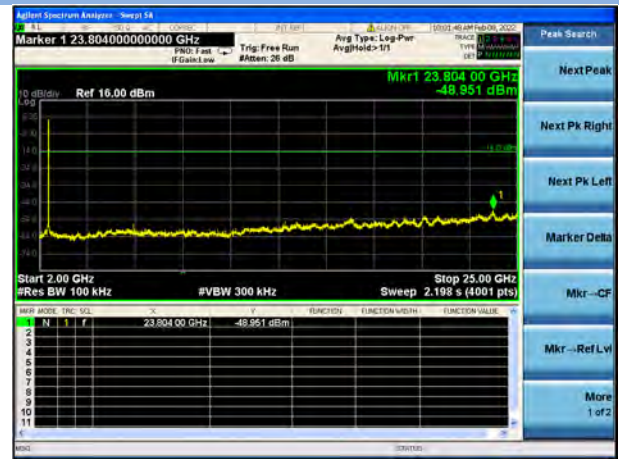


802.11b CHANNEL 8 CARRIER LEVEL



802.11b CHANNEL 8, SPURIOUS 30 MHz ~ 3 GHz

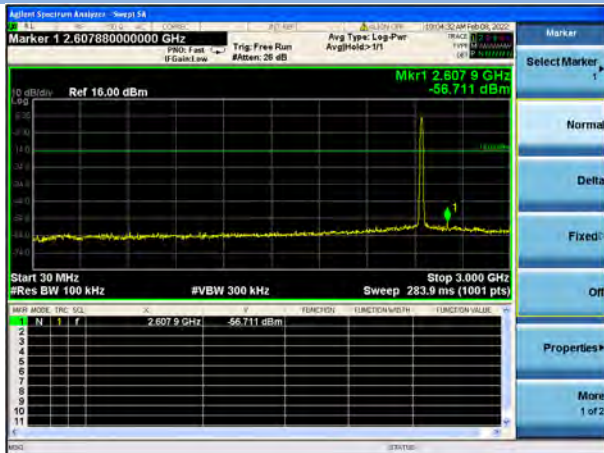


802.11b CHANNEL 8, SPURIOUS 2 GHz ~ 25 GHz

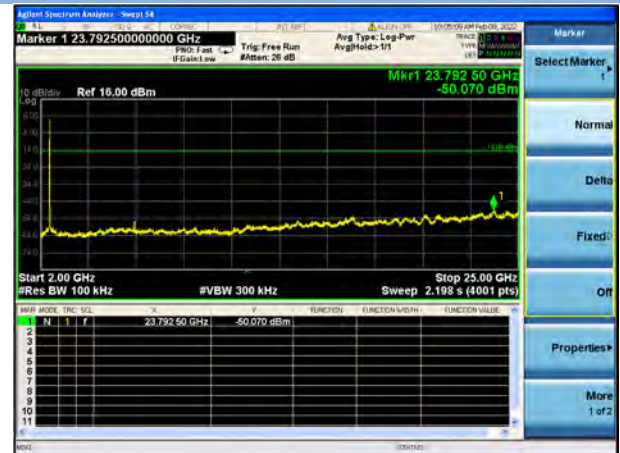


802.11b CHANNEL 9 CARRIER LEVEL




802.11b CHANNEL 9, SPURIOUS 30 MHz ~ 3 GHz

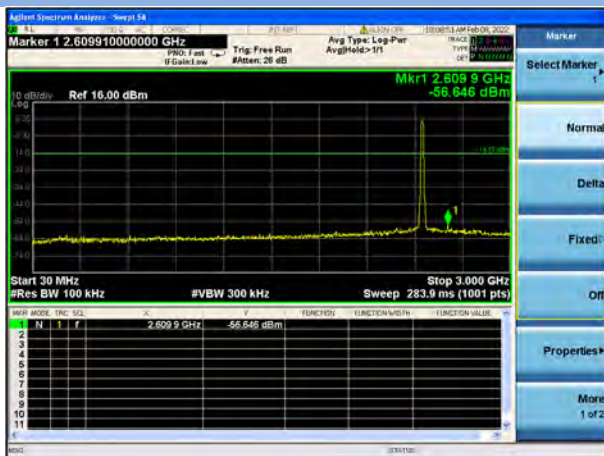


802.11b CHANNEL 9, SPURIOUS 2 GHz ~ 25 GHz

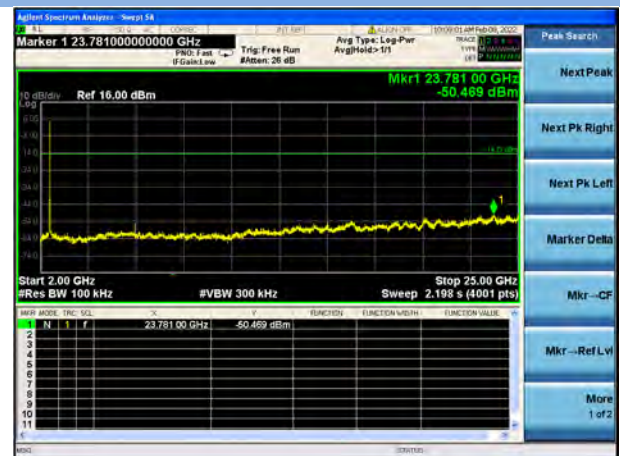


802.11b CHANNEL 10 CARRIER LEVEL

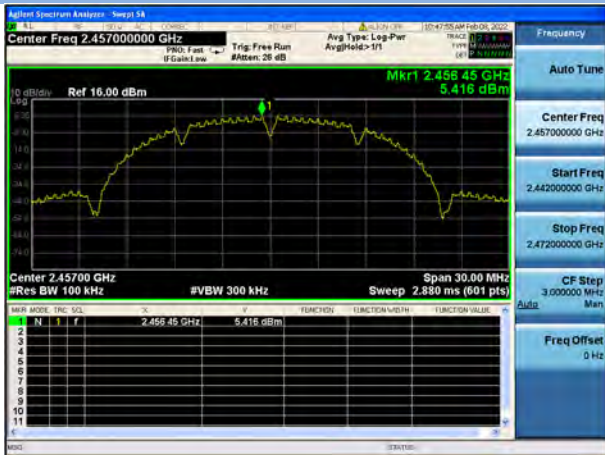


802.11b CHANNEL 10, SPURIOUS 30 MHz ~ 3 GHz

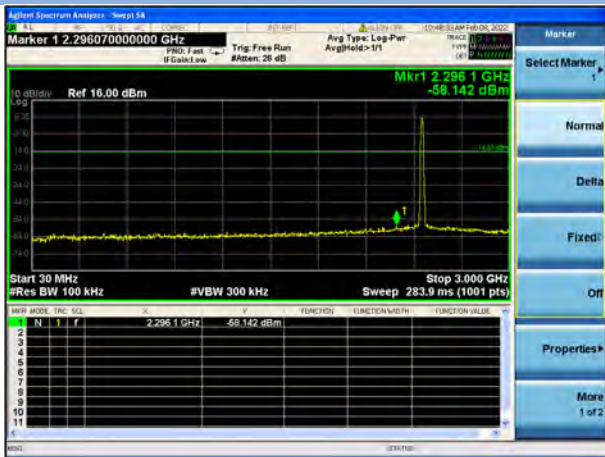


802.11b CHANNEL 10, SPURIOUS 2 GHz ~ 25 GHz

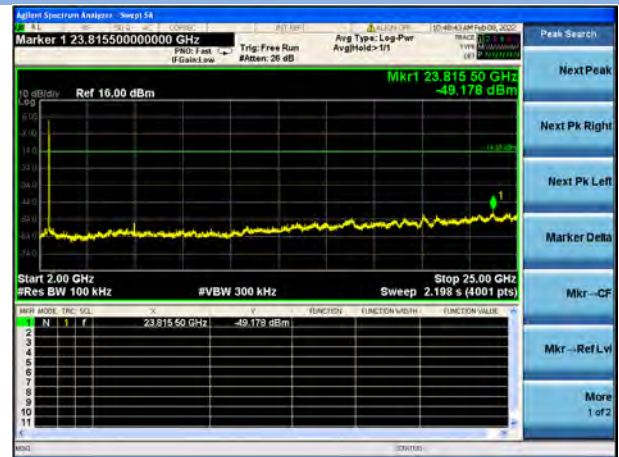


802.11b CHANNEL 11 CARRIER LEVEL

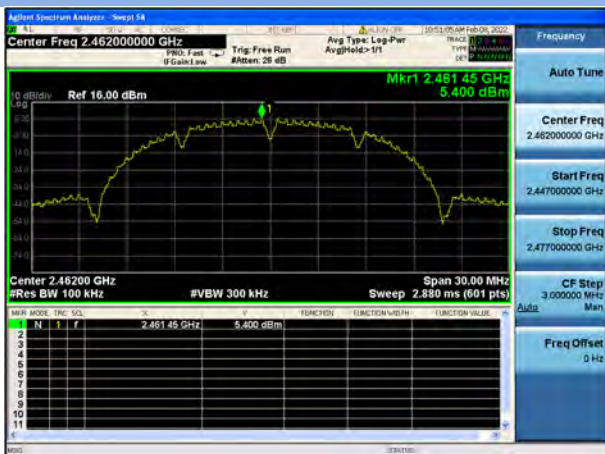

802.11b CHANNEL 11, SPURIOUS 30 MHz ~ 3 GHz

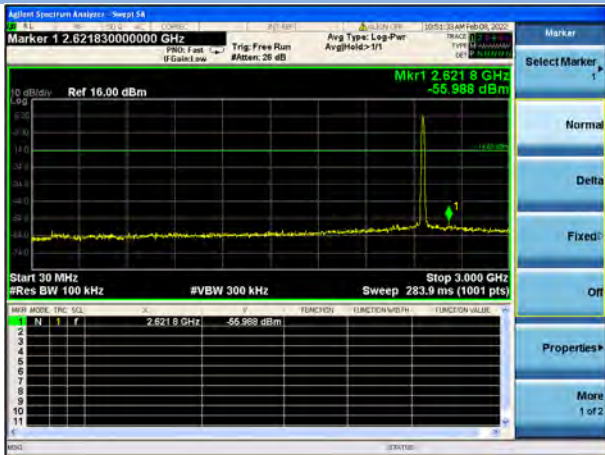


802.11b CHANNEL 11, SPURIOUS 2 GHz ~ 25 GHz

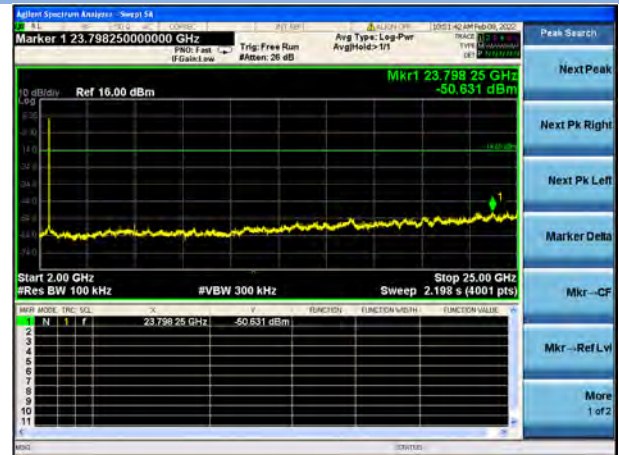


802.11g CHANNEL 1 CARRIER LEVEL



802.11g CHANNEL 1, SPURIOUS 30 MHz ~ 3 GHz

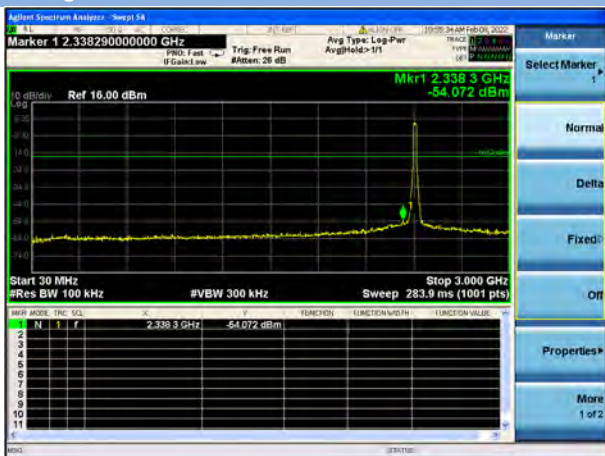


802.11g CHANNEL 1, SPURIOUS 2 GHz ~ 25 GHz

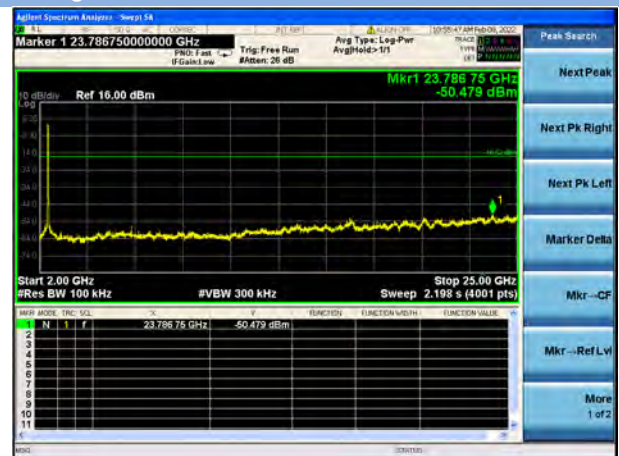


802.11g CHANNEL 6 CARRIER LEVEL




802.11g CHANNEL 6, SPURIOUS 30 MHz ~ 3 GHz

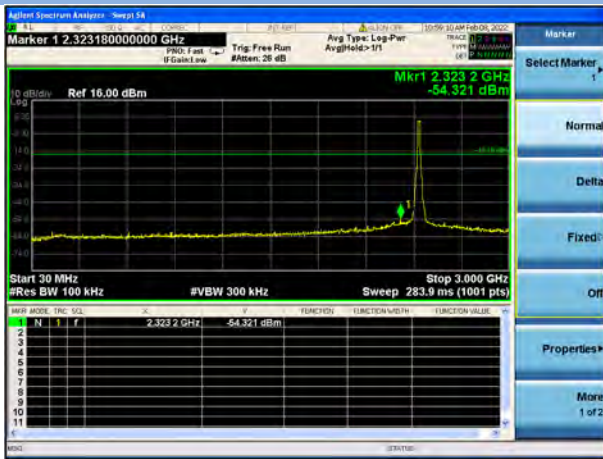


802.11g CHANNEL 6, SPURIOUS 2 GHz ~ 25 GHz

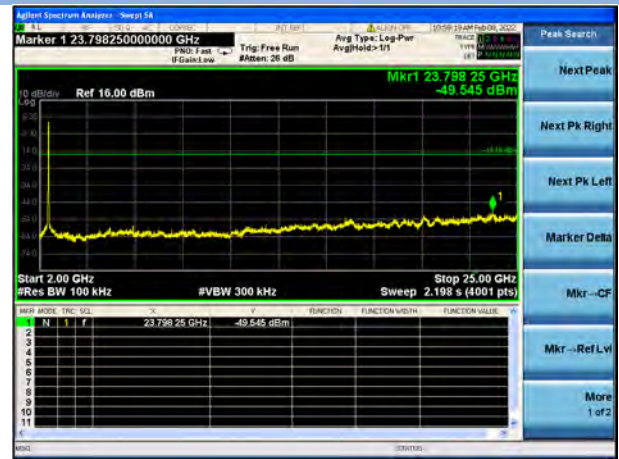


802.11g CHANNEL 11 CARRIER LEVEL

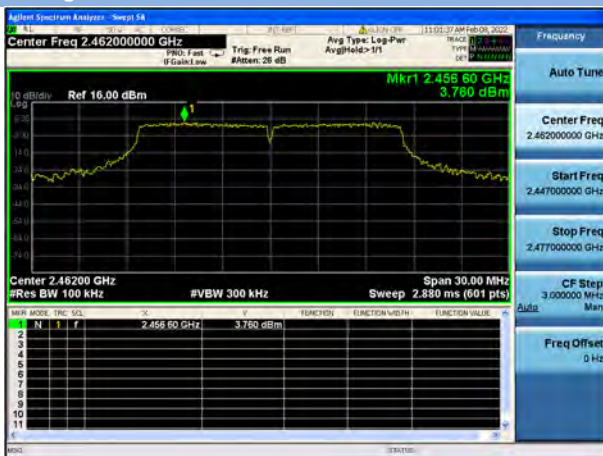




802.11g CHANNEL 11, SPURIOUS 30 MHz ~ 3 GHz

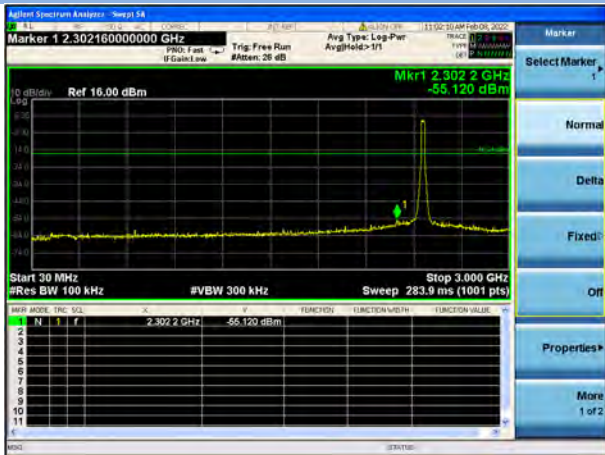


802.11g CHANNEL 11, SPURIOUS 2 GHz ~ 25 GHz

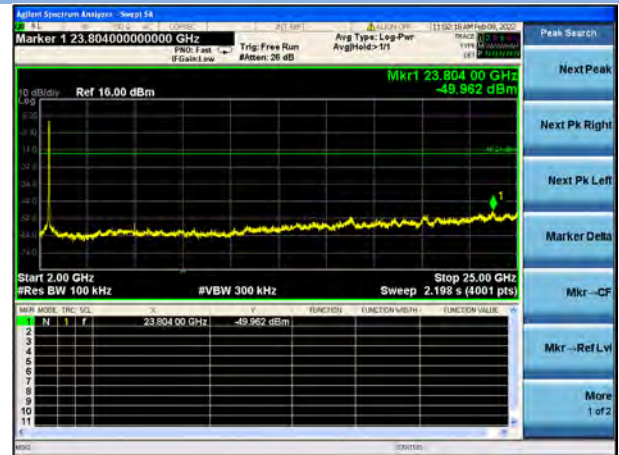


802.11n-20 CHANNEL 1 CARRIER LEVEL

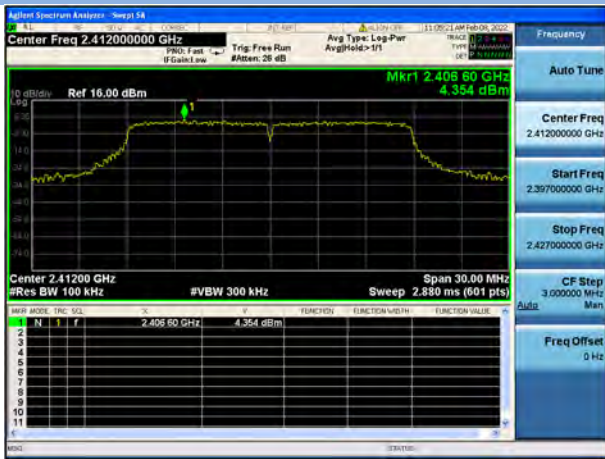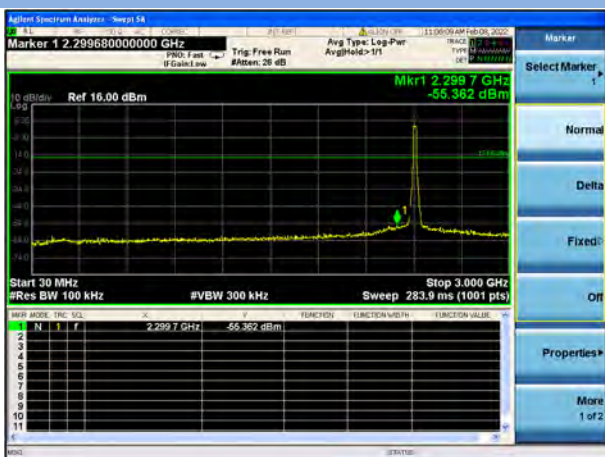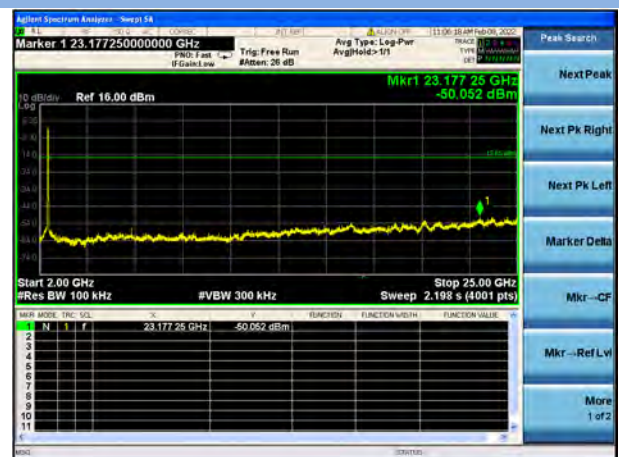
802.11n-20 CHANNEL 1, SPURIOUS
30 MHz ~ 3 GHz

802.11n-20 CHANNEL 1, SPURIOUS
2 GHz ~ 25 GHz

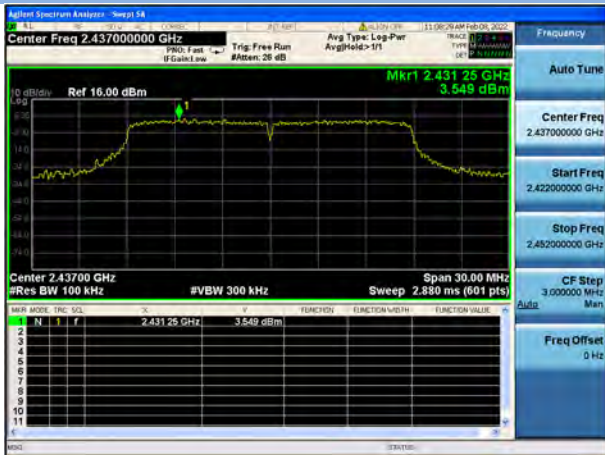
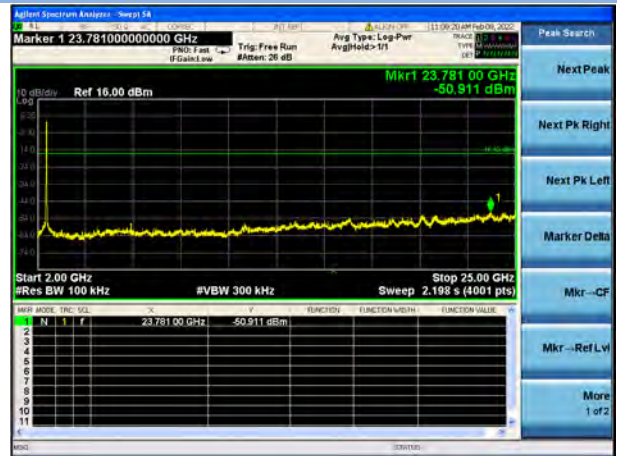
802.11n-20 CHANNEL 6 CARRIER LEVEL

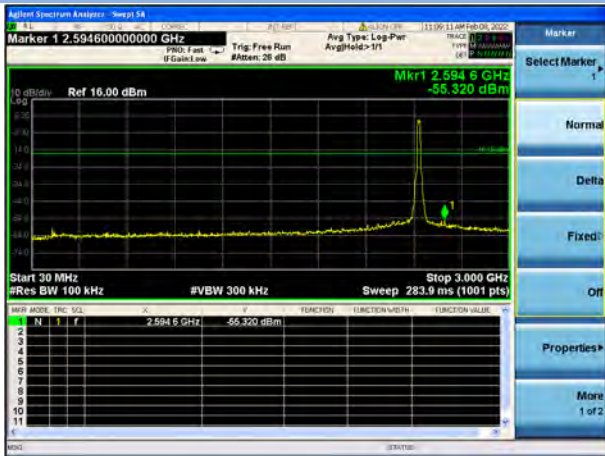


802.11n-20 CHANNEL 6, SPURIOUS 30 MHz ~ 3 GHz





802.11n-20 CHANNEL 6, SPURIOUS 2 GHz ~ 25 GHz






802.11n-20 CHANNEL 11 CARRIER LEVEL

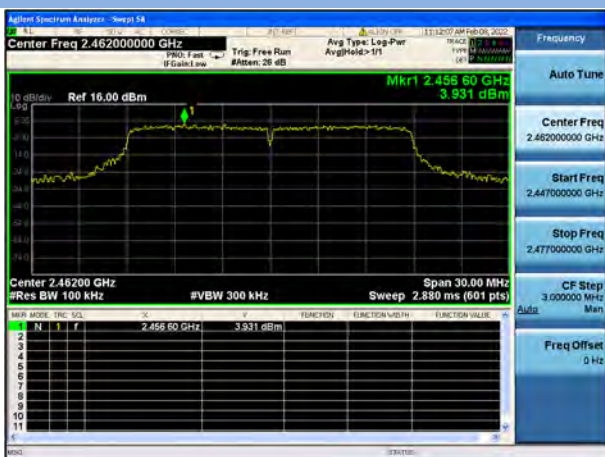


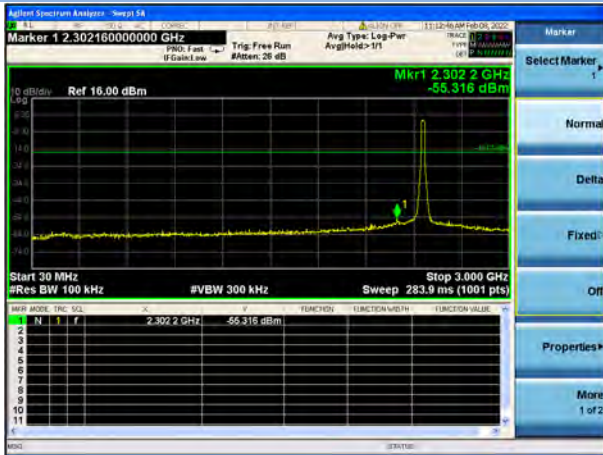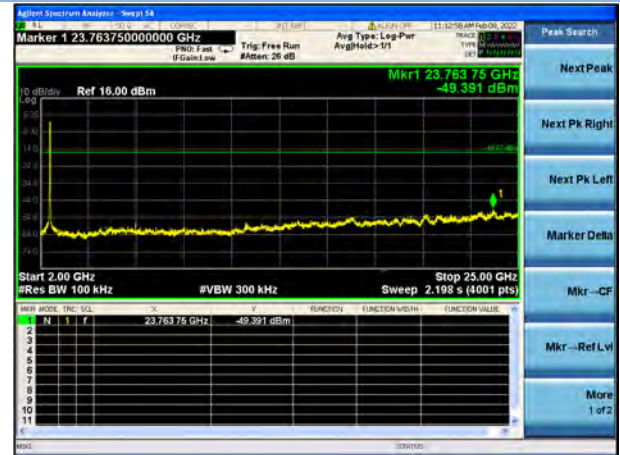802.11n-20 CHANNEL 11, SPURIOUS
30 MHz ~ 3 GHz

802.11n-20 CHANNEL 11, SPURIOUS
2 GHz ~ 25 GHz

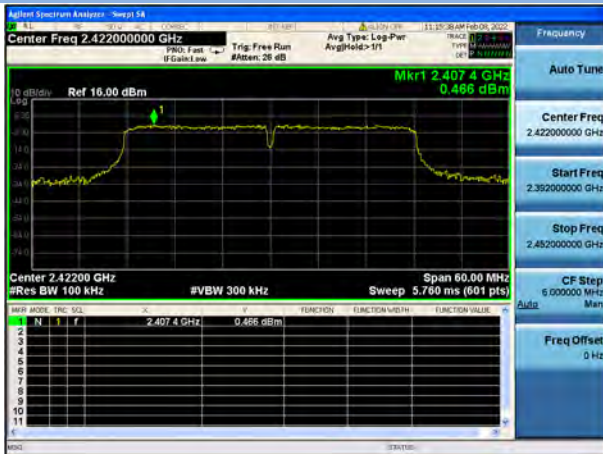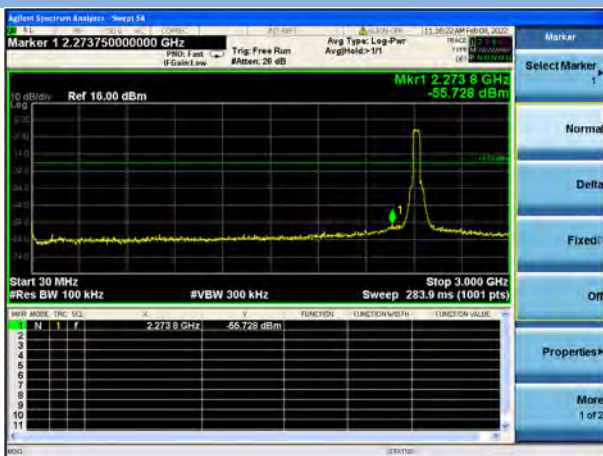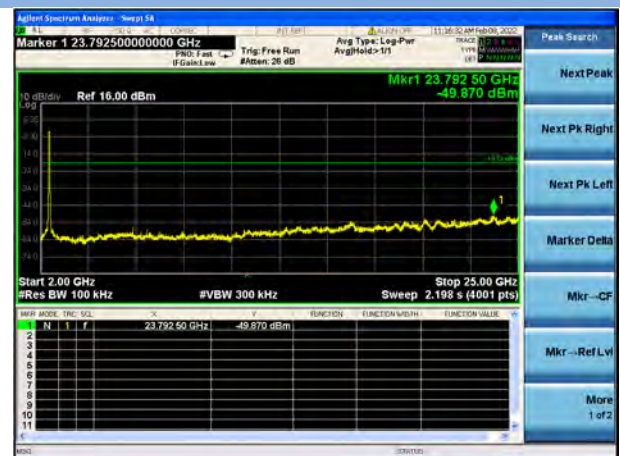
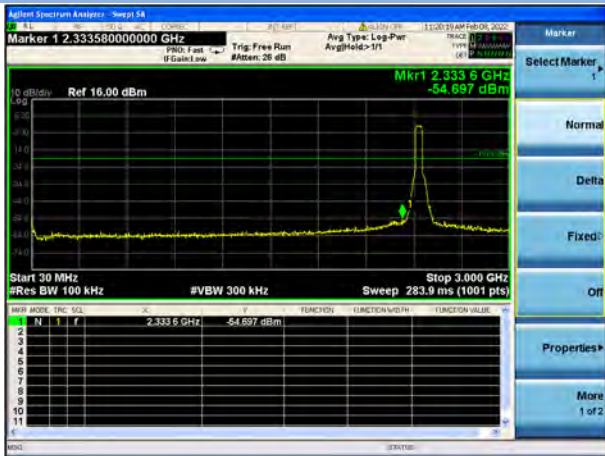
802.11n-40 CHANNEL 3 CARRIER LEVEL


802.11n-40 CHANNEL 3, SPURIOUS
30 MHz ~ 3 GHz

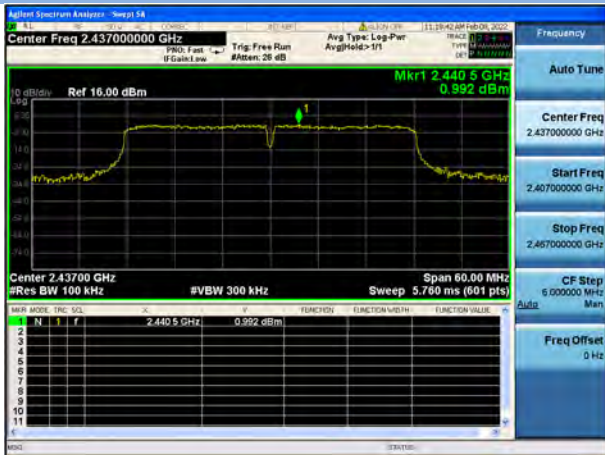802.11n-40 CHANNEL 3, SPURIOUS
2 GHz ~ 25 GHz


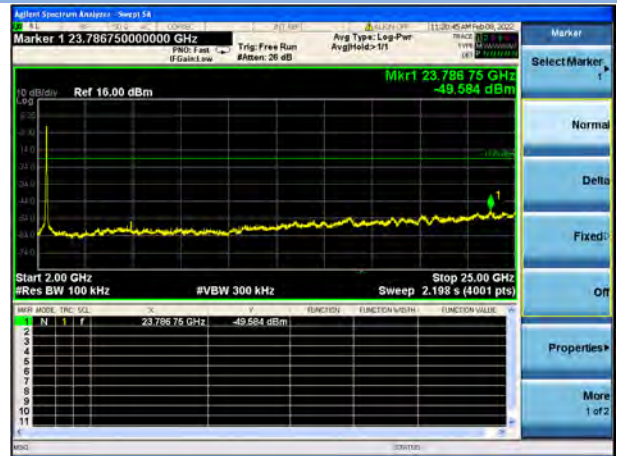
802.11n-40 CHANNEL 6 CARRIER LEVEL




802.11n-40 CHANNEL 6, SPURIOUS 30 MHz ~ 3 GHz





802.11n-40 CHANNEL 6, SPURIOUS 2 GHz ~ 25 GHz



802.11n-40 CHANNEL 9 CARRIER LEVEL

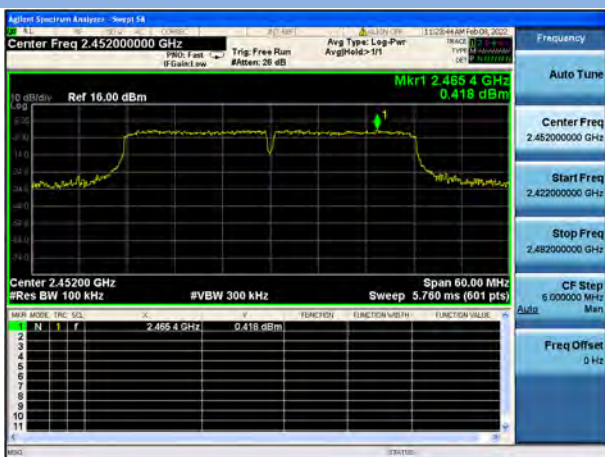

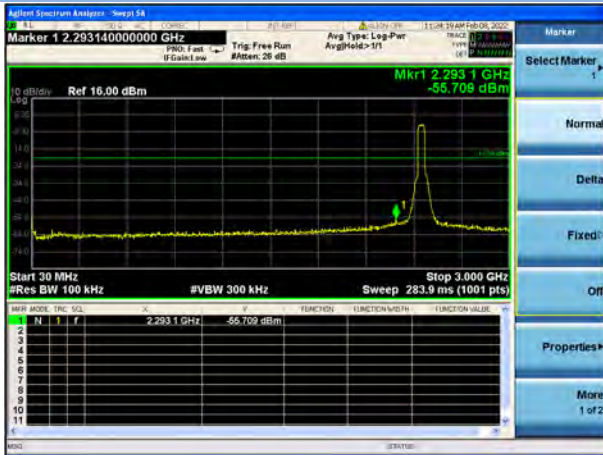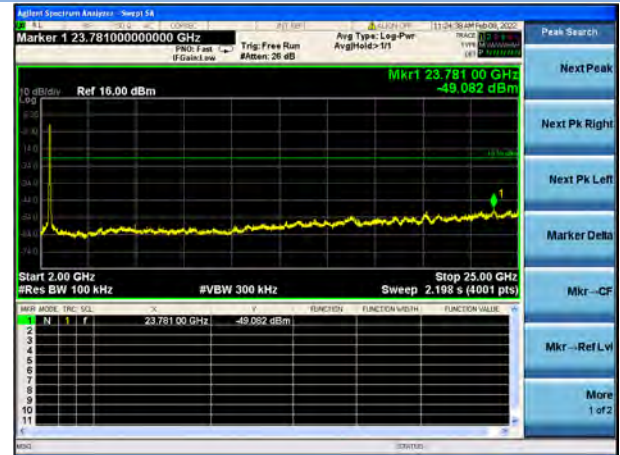802.11n-40 CHANNEL 9, SPURIOUS
30 MHz ~ 3 GHz

802.11n-40 CHANNEL 9, SPURIOUS
2 GHz ~ 25 GHz


A.4 Band Edge (Authorized-band band-edge)

Test Data

Note: The 99% OBW of the fundamental emission is without 2 MHz of the authorized band.

802.11b Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-39.32	4.97	-15.04	Pass
CH2	-51.84	4.68	-15.32	Pass
CH3	-56.79	4.68	-15.32	Pass
CH4	-57.09	5.13	-14.87	Pass
CH5	-57.39	5.13	-14.87	Pass
CH7	-57.85	5.29	-14.71	Pass
CH8	-57.81	5.00	-15.00	Pass
CH9	-57.60	5.29	-14.71	Pass
CH10	-57.07	5.42	-14.58	Pass
CH11	-56.57	5.40	-14.60	Pass

802.11g Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-28.45	3.49	-16.51	Pass
CH11	-37.81	3.76	-16.24	Pass

802.11n-20 MHz Mode:


Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH1	-29.75	4.35	-15.65	Pass
CH11	-36.71	3.93	-16.07	Pass

802.11n-40 MHz Mode:

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
CH3	-31.27	0.47	-19.53	Pass
CH9	-31.67	0.42	-19.58	Pass

Test Plots


802.11b CHANNEL 1, Carrier level

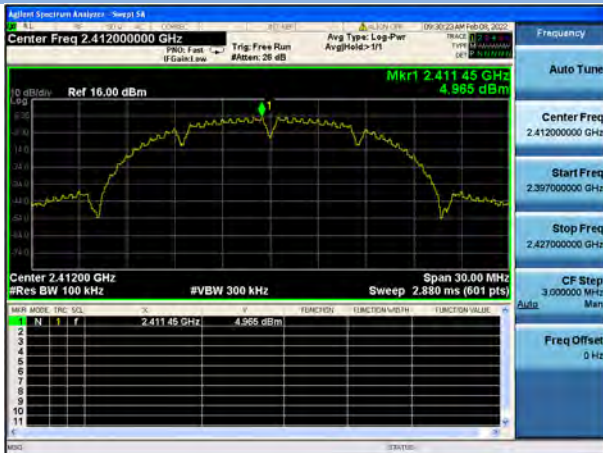


802.11b CHANNEL 1, Reference level




802.11b CHANNEL 1, Band Edge

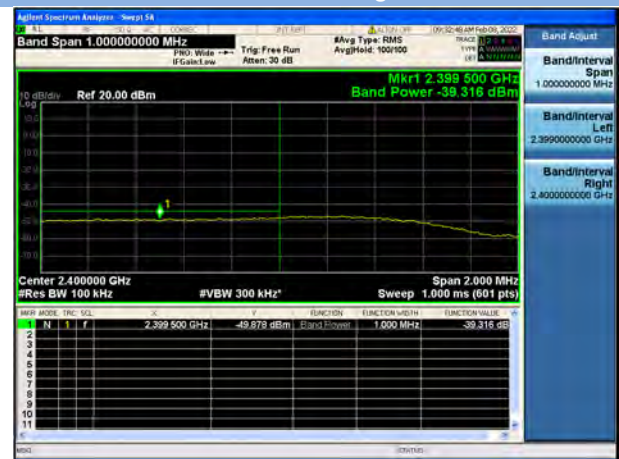

802.11b CHANNEL 2, Carrier level

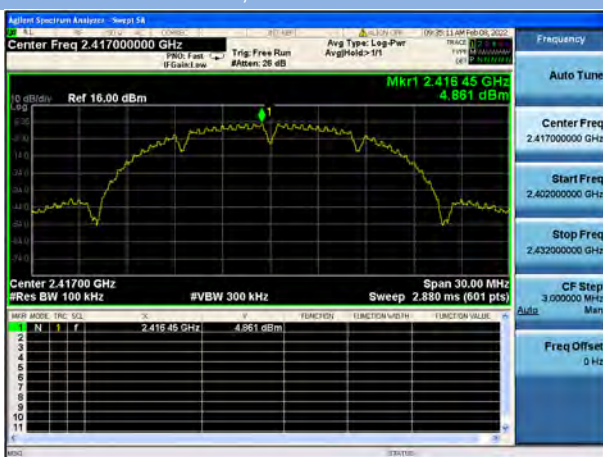

802.11b CHANNEL 2, Reference level

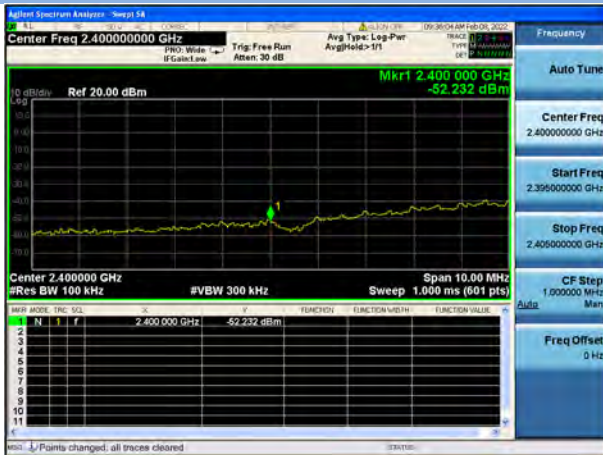


802.11b CHANNEL 2, Band Edge




802.11b CHANNEL 3, Carrier level



802.11b CHANNEL 3, Reference level

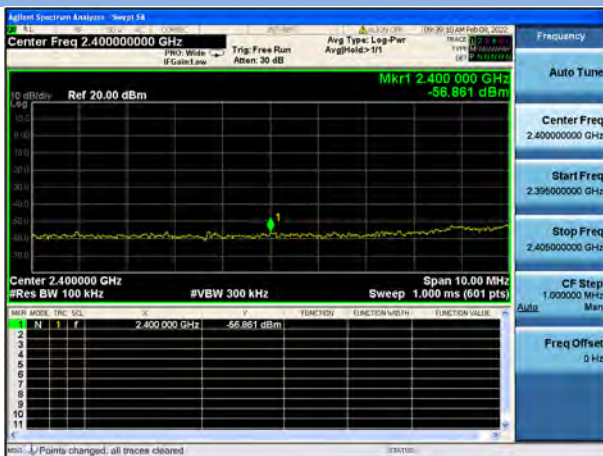


802.11b CHANNEL 3, Band Edge

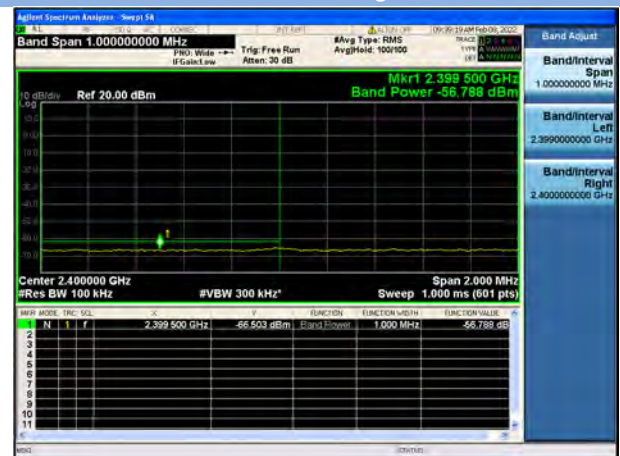


802.11b CHANNEL 4, Carrier level



802.11b CHANNEL 4, Reference level

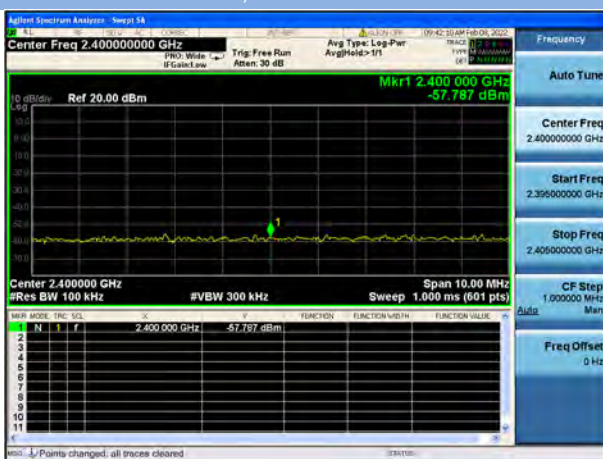


802.11b CHANNEL 4, Band Edge

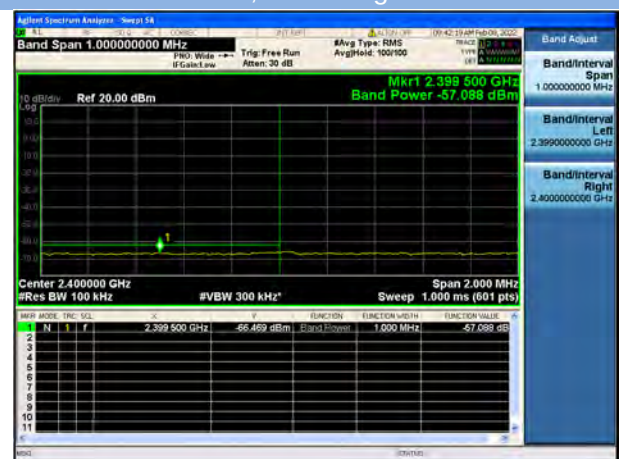


802.11b CHANNEL 5, Carrier level




802.11b CHANNEL 5, Reference level

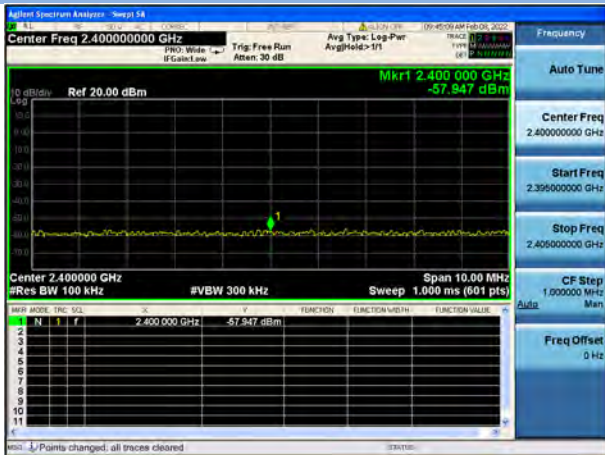


802.11b CHANNEL 5, Band Edge

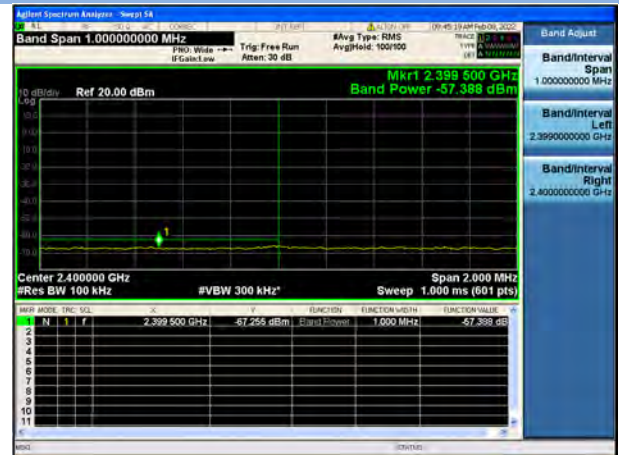


802.11b CHANNEL 7, Carrier level

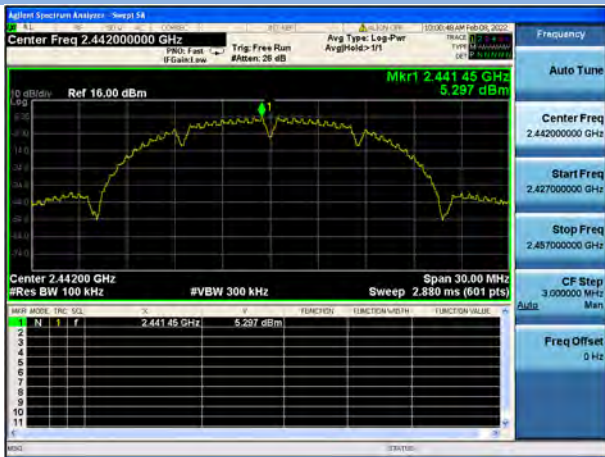

802.11b CHANNEL 7, Reference level

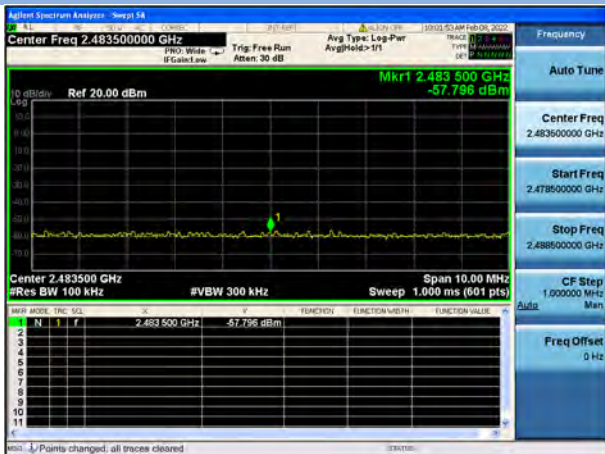


802.11b CHANNEL 7, Band Edge

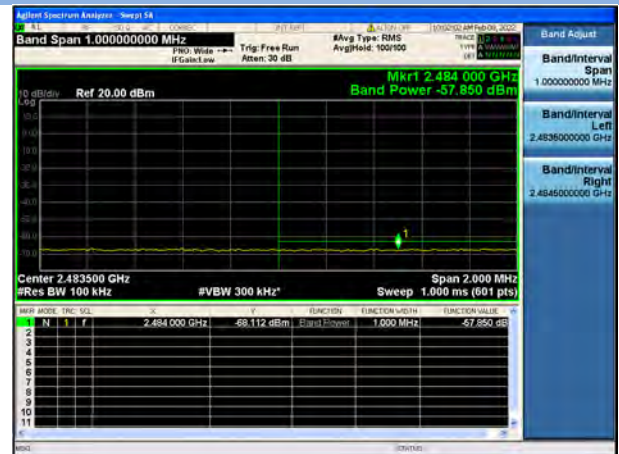


802.11b CHANNEL 8, Carrier level



802.11b CHANNEL 8, Reference level

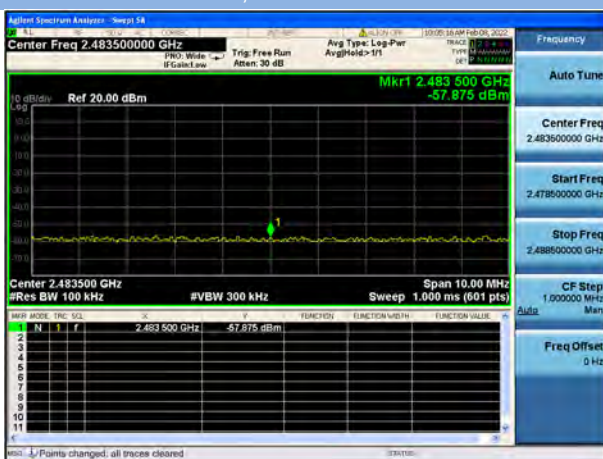


802.11b CHANNEL 8, Band Edge

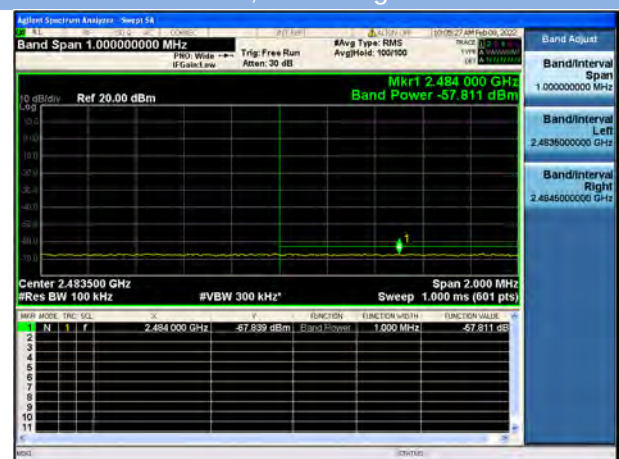


802.11b CHANNEL 9, Carrier level




802.11b CHANNEL 9, Reference level

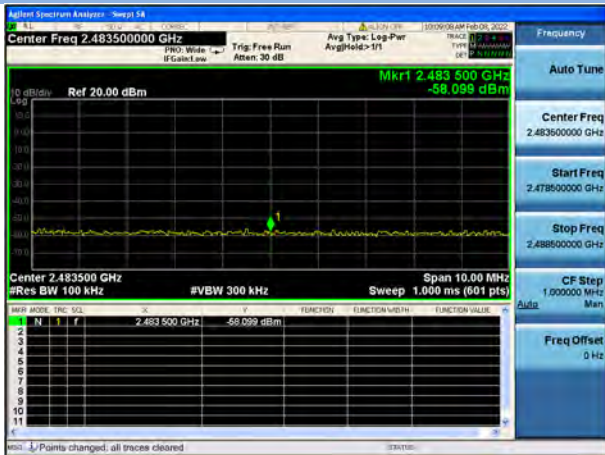


802.11b CHANNEL 9, Band Edge

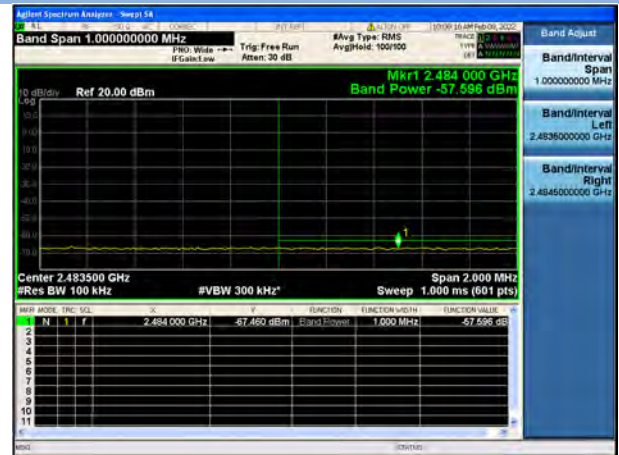


802.11b CHANNEL 10, Carrier level

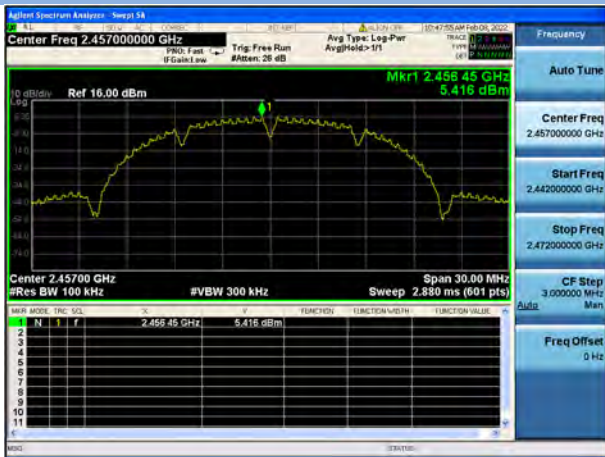

802.11b CHANNEL 10, Reference level

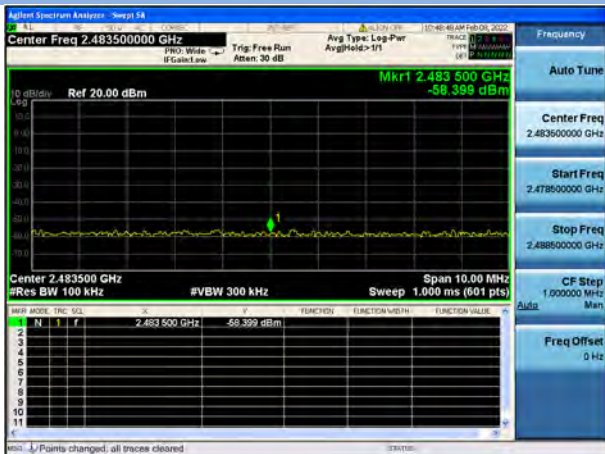


802.11b CHANNEL 10, Band Edge

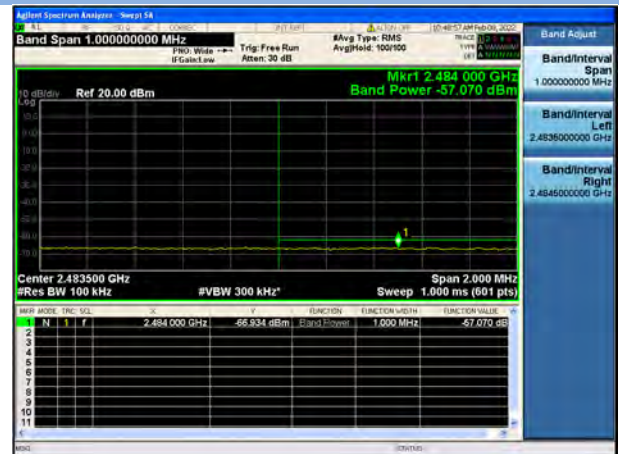


802.11b CHANNEL 11, Carrier level




802.11b CHANNEL 11, Reference level

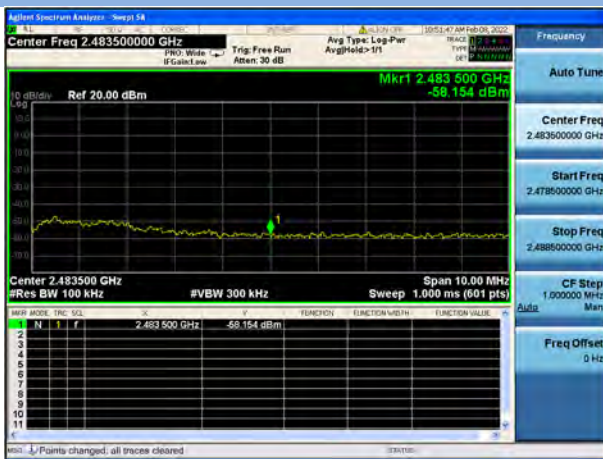

802.11b CHANNEL 11, Band Edge

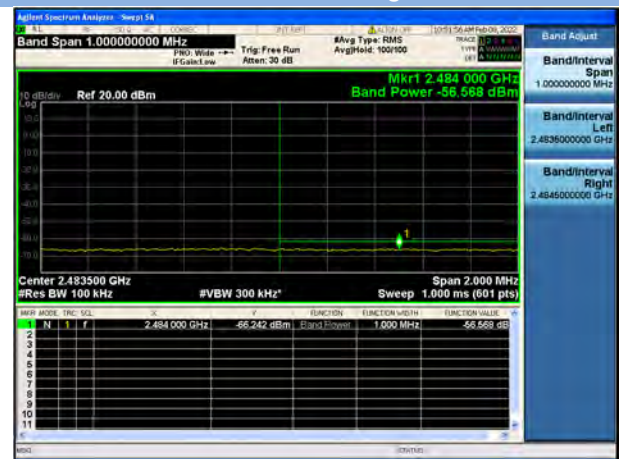


802.11g CHANNEL 1, Carrier level

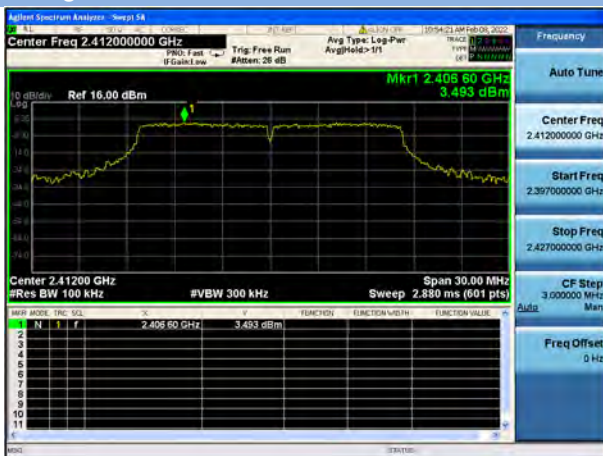

802.11g CHANNEL 1, Reference level




802.11g CHANNEL 1, Band Edge

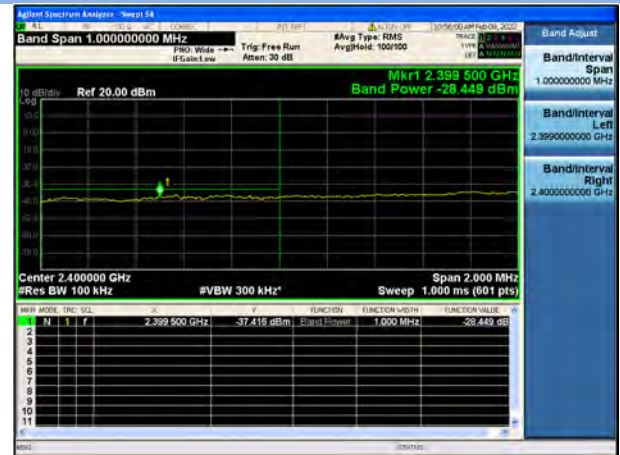


802.11g CHANNEL 11, Carrier level



802.11g CHANNEL 11, Band Edge

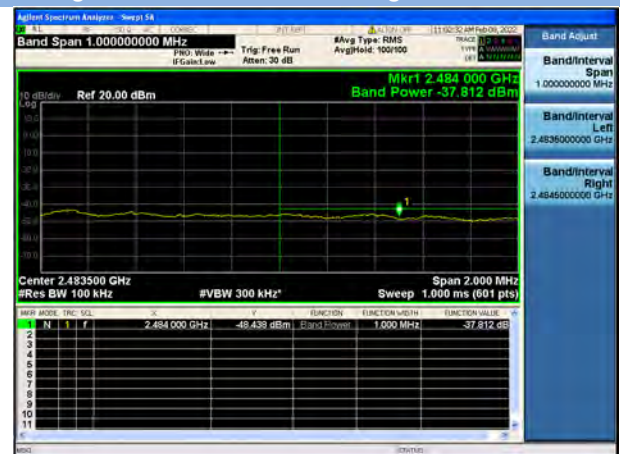


802.11n-20 MHz CHANNEL 1, Carrier level

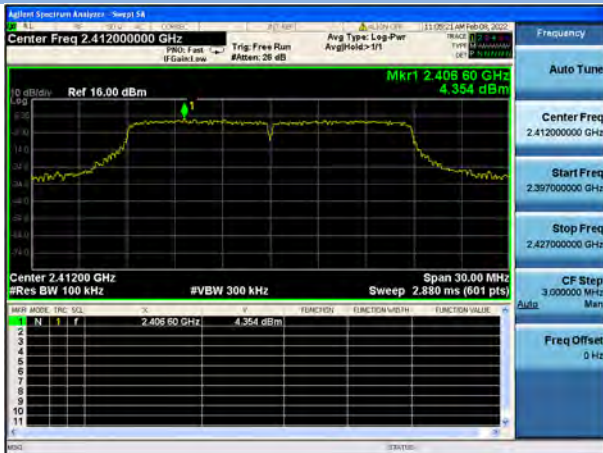


802.11n-20 MHz CHANNEL 1, Reference level




802.11n-20 MHz CHANNEL 1, Band Edge

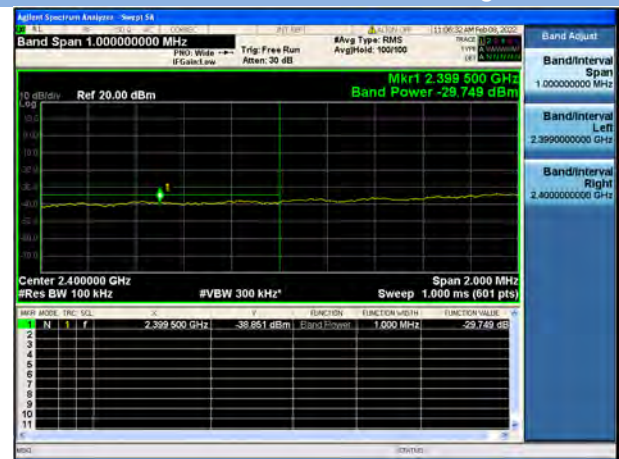


802.11n-20 MHz CHANNEL 11, Carrier level

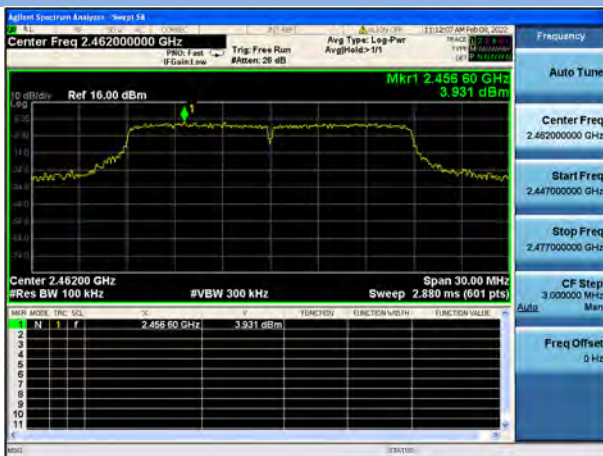


802.11n-20 MHz CHANNEL 11, Reference level

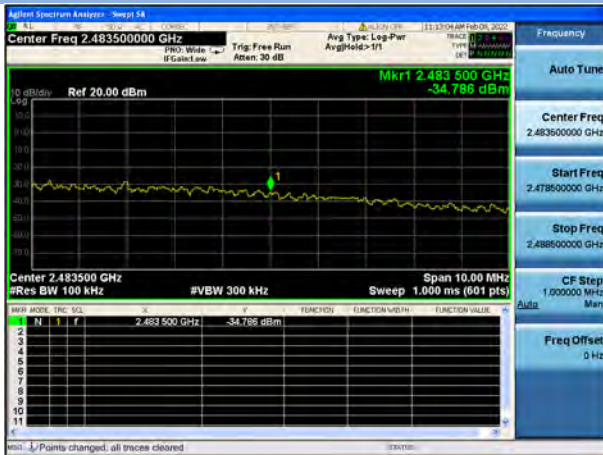

802.11n-20 MHz CHANNEL 11, Band Edge

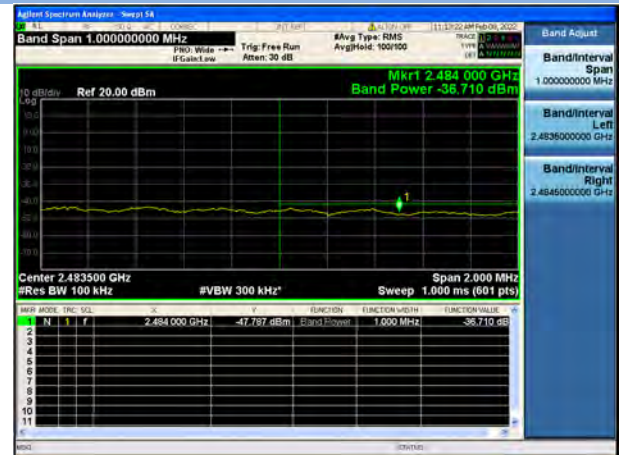


802.11n-40 MHz CHANNEL 3, Carrier level

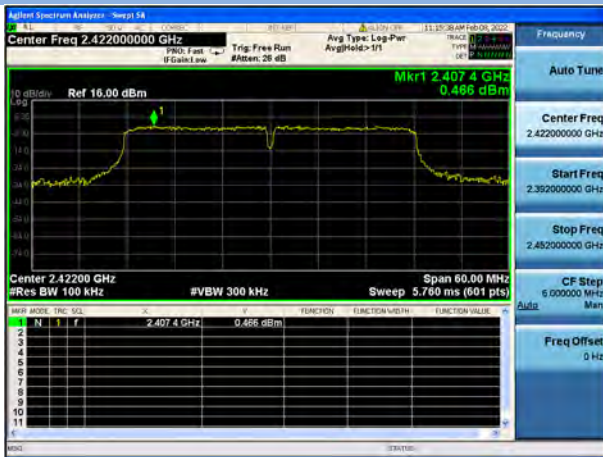


802.11n-40 MHz CHANNEL 3, Reference level




802.11n-40 MHz CHANNEL 3, Band Edge

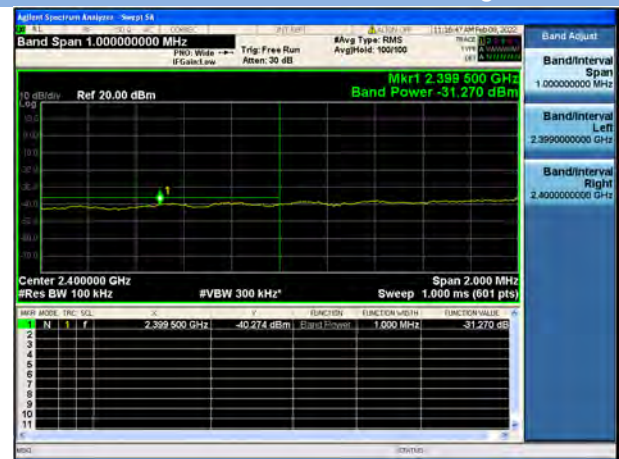


802.11n-40 MHz CHANNEL 9, Carrier level

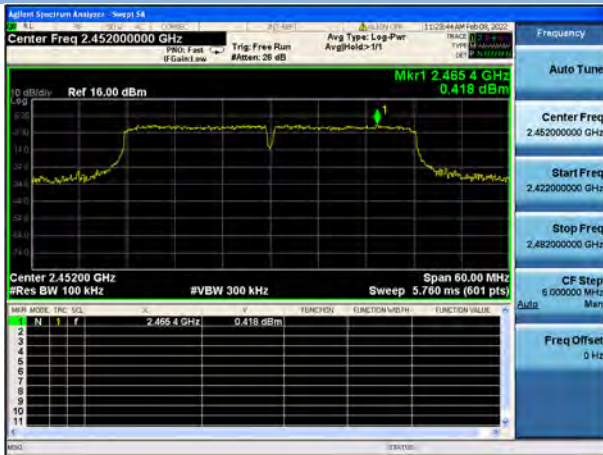

802.11n-40 MHz CHANNEL 9, Reference level

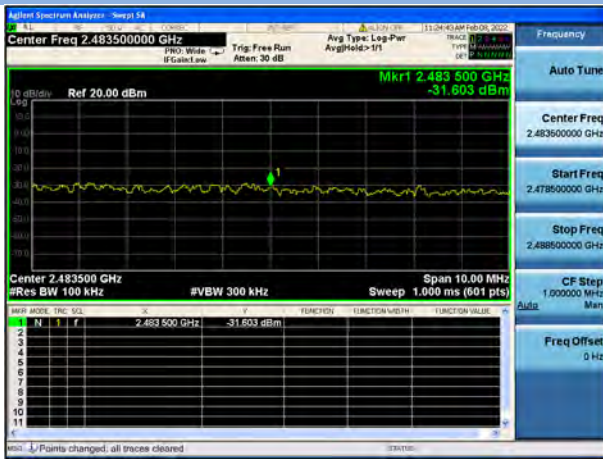

802.11n-40 MHz CHANNEL 9, Band Edge

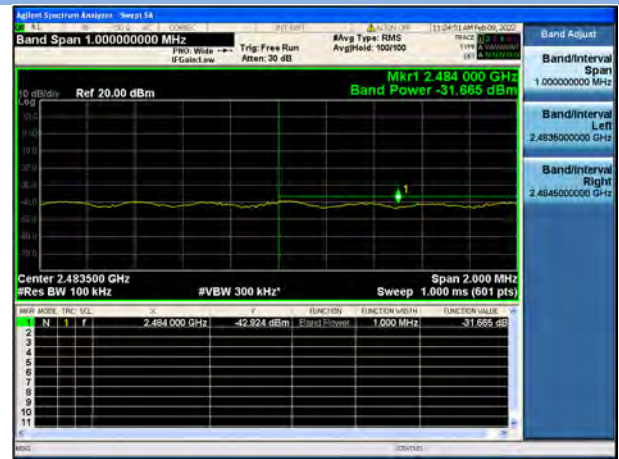

A.5 Conducted Emissions


Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_ Class B

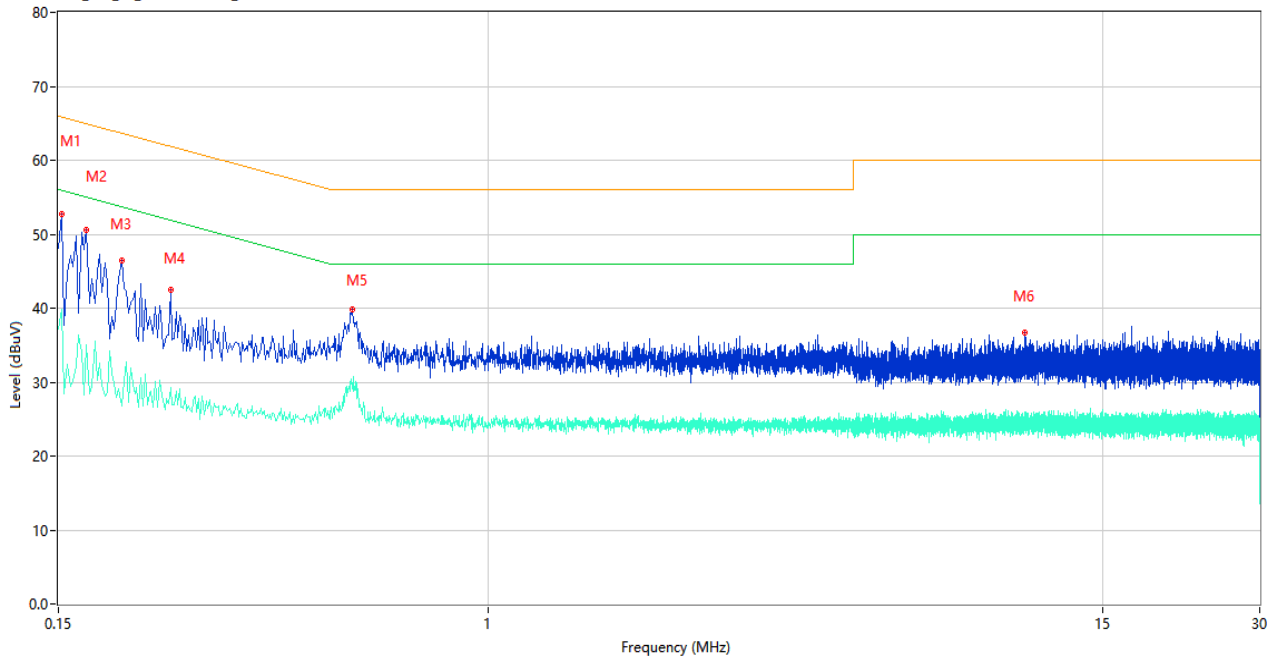

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	48.13	11.00	66.00	-17.87	Peak	L	Pass
1**	0.150	37.25	11.00	56.00	-18.75	AV	L	Pass
2	0.170	50.59	10.98	64.96	-14.37	Peak	L	Pass
2**	0.170	35.09	10.98	54.96	-19.87	AV	L	Pass
3	0.198	46.39	10.96	63.69	-17.30	Peak	L	Pass
3**	0.198	26.85	10.96	53.69	-26.84	AV	L	Pass
4	0.246	42.40	10.92	61.89	-19.49	Peak	L	Pass
4**	0.246	29.21	10.92	51.89	-22.68	AV	L	Pass
5	0.548	39.88	10.90	56.00	-16.12	Peak	L	Pass
5**	0.548	29.17	10.90	46.00	-16.83	AV	L	Pass
6	10.646	36.78	10.66	60.00	-23.22	Peak	L	Pass
6**	10.646	23.87	10.66	50.00	-26.13	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

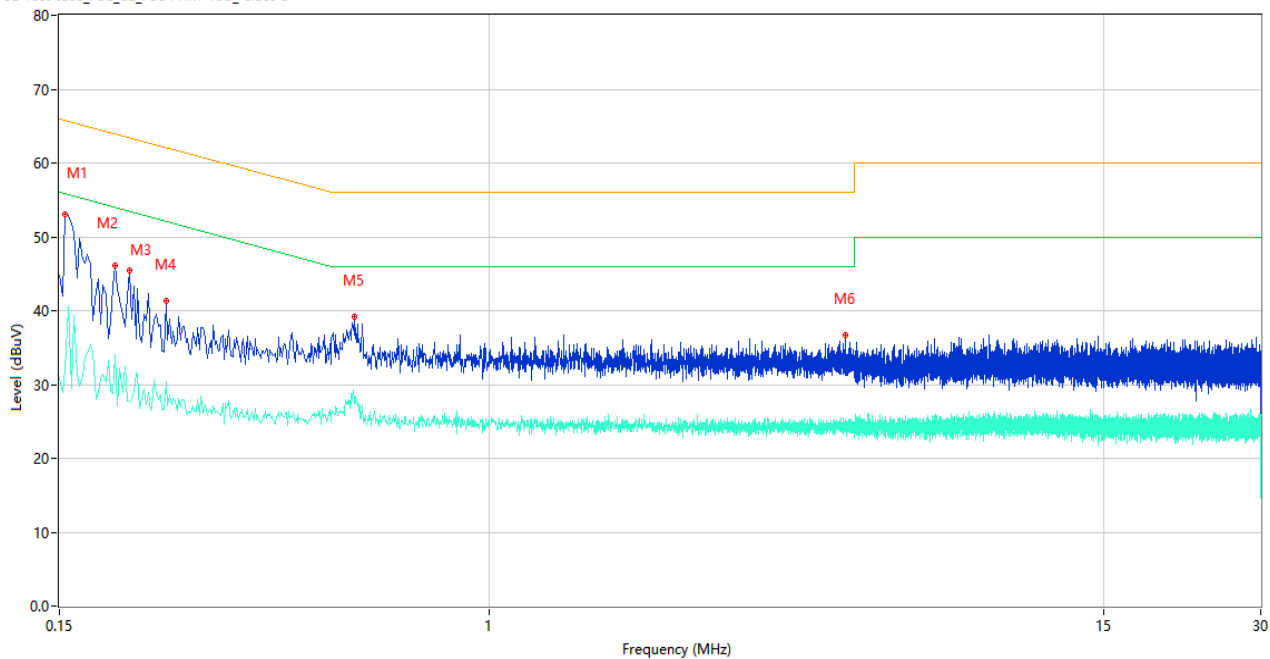

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	53.08	10.99	65.78	-12.70	Peak	N	Pass
1**	0.154	32.11	10.99	55.78	-23.67	AV	N	Pass
2	0.192	46.10	10.96	63.95	-17.85	Peak	N	Pass
2**	0.192	34.07	10.96	53.95	-19.88	AV	N	Pass
3	0.204	45.43	10.95	63.45	-18.02	Peak	N	Pass
3**	0.204	27.54	10.95	53.45	-25.91	AV	N	Pass
4	0.240	41.26	10.93	62.10	-20.84	Peak	N	Pass
4**	0.240	30.46	10.93	52.10	-21.64	AV	N	Pass
5	0.552	39.13	10.90	56.00	-16.87	Peak	N	Pass
5**	0.552	27.47	10.90	46.00	-18.53	AV	N	Pass
6	4.806	36.69	10.69	56.00	-19.31	Peak	N	Pass
6**	4.806	24.50	10.69	46.00	-21.50	AV	N	Pass

A.6 Radiated Emission

Note¹: The symbol of “--” in the table which means not application.


Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.


Test Data and Plots

30 MHz to 1 GHz, ANT H

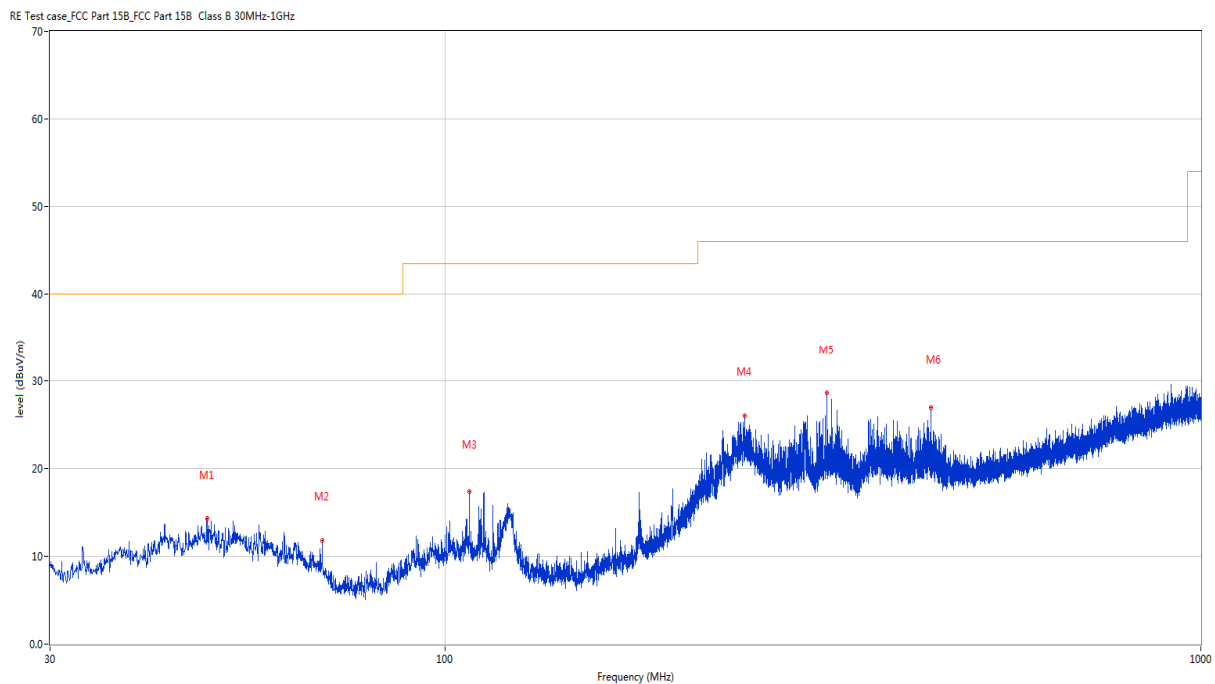

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.430	14.29	-22.55	40.0	-25.71	Peak	189.50	200	Horizontal	Pass
2	68.800	11.78	-26.36	40.0	-28.22	Peak	360.00	200	Horizontal	Pass
3	107.648	17.34	-24.28	43.5	-26.16	Peak	308.90	200	Horizontal	Pass
4	249.171	26.01	-22.93	46.0	-19.99	Peak	265.70	100	Horizontal	Pass
5	320.321	28.58	-21.18	46.0	-17.42	Peak	359.20	100	Horizontal	Pass
6	439.243	26.92	-18.01	46.0	-19.08	Peak	267.80	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

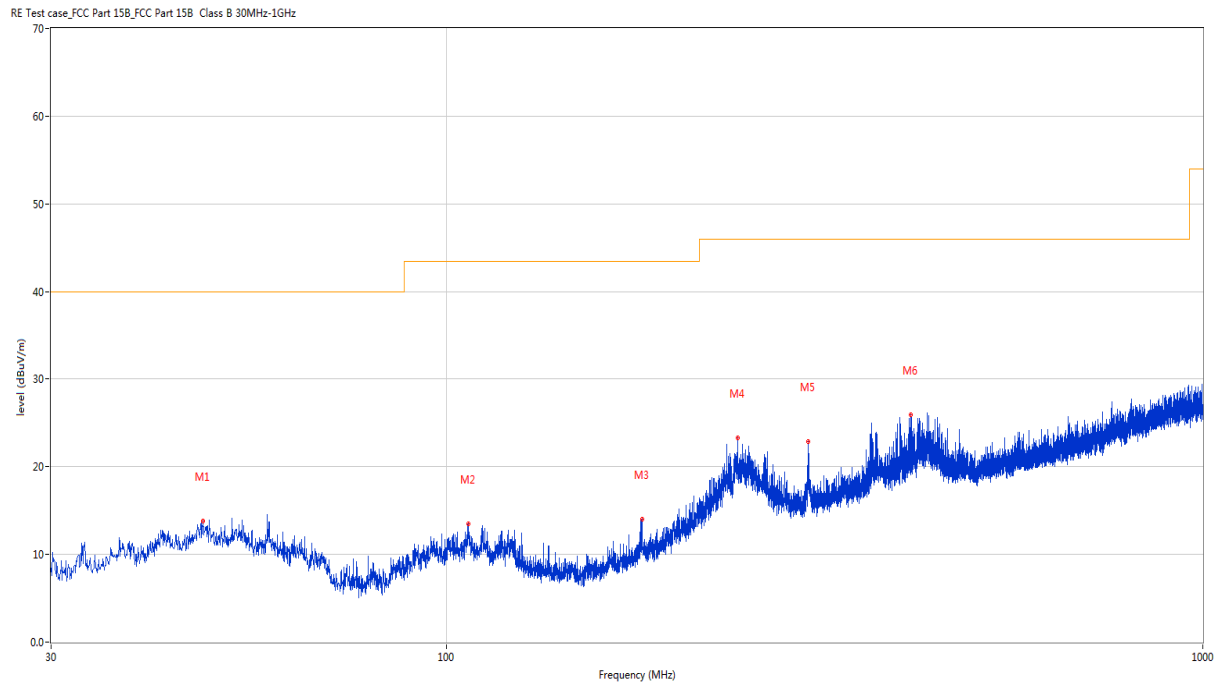

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.605	13.78	-22.74	40.0	-26.22	Peak	199.50	100	Vertical	Pass
2	106.775	13.50	-24.15	43.5	-30.00	Peak	238.60	100	Vertical	Pass
3	181.272	13.98	-25.83	43.5	-29.52	Peak	195.30	100	Vertical	Pass
4	242.915	23.25	-22.68	46.0	-22.75	Peak	208.90	200	Vertical	Pass
5	301.066	22.88	-21.65	46.0	-23.12	Peak	360.00	200	Vertical	Pass
6	411.404	25.88	-18.81	46.0	-20.12	Peak	360.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

1 GHz to 18 GHz, ANT H 802.11b Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1438.100	41.05	-17.43	74.0	-32.95	Peak	105.00	150	Horizontal	Pass
1**	1438.100	31.25	-17.43	54.0	-22.75	AV	105.00	150	Horizontal	Pass
2	2410.400	63.64	-12.24	74.0	-10.36	Peak	24.00	150	Horizontal	N/A
2**	2410.400	60.36	-12.24	54.0	6.36	AV	24.00	150	Horizontal	N/A
3	4824.000	51.83	-3.38	74.0	-22.17	Peak	323.00	150	Horizontal	Pass
3**	4824.000	46.36	-3.38	54.0	-7.64	AV	323.00	150	Horizontal	Pass
4	6678.000	53.79	-0.56	74.0	-20.21	Peak	360.00	150	Horizontal	Pass
4**	6678.000	44.65	-0.56	54.0	-9.35	AV	360.00	150	Horizontal	Pass
5	9829.287	52.15	-0.32	74.0	-21.85	Peak	0.00	150	Horizontal	Pass
5**	9829.287	42.55	-0.32	54.0	-11.45	AV	0.00	150	Horizontal	Pass
6	13314.375	56.03	0.88	74.0	-17.97	Peak	269.00	150	Horizontal	Pass
6**	13314.375	46.44	0.88	54.0	-7.56	AV	269.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1659.000	41.91	-17.56	74.0	-32.09	Peak	42.00	150	Vertical	Pass
1**	1659.000	31.29	-17.56	54.0	-22.71	AV	42.00	150	Vertical	Pass
2	2412.000	63.09	-12.26	74.0	-10.91	Peak	106.00	150	Vertical	N/A
2**	2412.000	58.11	-12.26	54.0	4.11	AV	106.00	150	Vertical	N/A
3	4824.200	52.97	-3.39	74.0	-21.03	Peak	83.00	150	Vertical	Pass
3**	4824.200	50.42	-3.39	54.0	-3.58	AV	83.00	150	Vertical	Pass
4	6682.800	54.41	-0.42	74.0	-19.59	Peak	0.00	150	Vertical	Pass
4**	6682.800	44.95	-0.42	54.0	-9.05	AV	0.00	150	Vertical	Pass
5	10197.862	52.88	0.47	74.0	-21.12	Peak	182.00	150	Vertical	Pass
5**	10197.862	43.77	0.47	54.0	-10.23	AV	182.00	150	Vertical	Pass
6	13305.713	56.02	0.87	74.0	-17.98	Peak	183.00	150	Vertical	Pass
6**	13305.713	46.23	0.87	54.0	-7.77	AV	183.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.300	40.99	-17.46	74.0	-33.01	Peak	38.00	150	Horizontal	Pass
1**	1440.300	30.45	-17.46	54.0	-23.55	AV	38.00	150	Horizontal	Pass
2	2418.200	63.99	-12.25	74.0	-10.01	Peak	29.00	150	Horizontal	N/A
2**	2418.200	60.82	-12.25	54.0	6.82	AV	29.00	150	Horizontal	N/A
3	4834.200	51.11	-3.48	74.0	-22.89	Peak	8.00	150	Horizontal	Pass
3**	4834.200	47.88	-3.48	54.0	-6.12	AV	8.00	150	Horizontal	Pass
4	6613.400	54.19	0.19	74.0	-19.81	Peak	311.00	150	Horizontal	Pass
4**	6613.400	44.57	0.19	54.0	-9.43	AV	311.00	150	Horizontal	Pass
5	10161.063	52.16	-0.31	74.0	-21.84	Peak	270.00	150	Horizontal	Pass
5**	10161.063	42.09	-0.31	54.0	-11.91	AV	270.00	150	Horizontal	Pass
6	15225.375	56.94	0.75	74.0	-17.06	Peak	360.00	150	Horizontal	Pass
6**	15225.375	47.29	0.75	54.0	-6.71	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 2

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1832.000	44.93	-16.60	74.0	-29.07	Peak	220.00	150	Vertical	Pass
1**	1832.000	32.66	-16.60	54.0	-21.34	AV	220.00	150	Vertical	Pass
2	2418.300	63.24	-12.25	74.0	-10.76	Peak	120.00	150	Vertical	N/A
2**	2418.300	60.10	-12.25	54.0	6.10	AV	120.00	150	Vertical	N/A
3	4834.200	53.39	-3.48	74.0	-20.61	Peak	74.00	150	Vertical	Pass
3**	4834.200	50.67	-3.48	54.0	-3.33	AV	74.00	150	Vertical	Pass
4	6688.600	54.23	-0.25	74.0	-19.77	Peak	48.00	150	Vertical	Pass
4**	6688.600	45.35	-0.25	54.0	-8.65	AV	48.00	150	Vertical	Pass
5	10366.338	52.40	0.11	74.0	-21.60	Peak	87.00	150	Vertical	Pass
5**	10366.338	42.42	0.11	54.0	-11.58	AV	87.00	150	Vertical	Pass
6	16232.063	56.41	1.32	74.0	-17.59	Peak	120.00	150	Vertical	Pass
6**	16232.063	46.82	1.32	54.0	-7.18	AV	120.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1435.700	40.93	-17.35	74.0	-33.07	Peak	55.00	150	Horizontal	Pass
1**	1435.700	29.43	-17.35	54.0	-24.57	AV	55.00	150	Horizontal	Pass
2	2420.800	64.09	-12.42	74.0	-9.91	Peak	29.00	150	Horizontal	N/A
2**	2420.800	60.71	-12.42	54.0	6.71	AV	29.00	150	Horizontal	N/A
3	4843.600	51.37	-3.47	74.0	-22.63	Peak	351.00	150	Horizontal	Pass
3**	4843.600	44.34	-3.47	54.0	-9.66	AV	351.00	150	Horizontal	Pass
4	6679.400	54.08	-0.54	74.0	-19.92	Peak	299.00	150	Horizontal	Pass
4**	6679.400	45.38	-0.54	54.0	-8.62	AV	299.00	150	Horizontal	Pass
5	10546.600	52.20	-0.63	74.0	-21.80	Peak	253.00	150	Horizontal	Pass
5**	10546.600	42.56	-0.63	54.0	-11.44	AV	253.00	150	Horizontal	Pass
6	13431.451	56.67	0.40	74.0	-17.33	Peak	114.00	150	Horizontal	Pass
6**	13431.451	46.74	0.40	54.0	-7.26	AV	114.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1825.200	44.78	-16.66	74.0	-29.22	Peak	208.00	150	Vertical	Pass
1**	1825.200	37.35	-16.66	54.0	-16.65	AV	208.00	150	Vertical	Pass
2	2420.600	63.66	-12.39	74.0	-10.34	Peak	110.00	150	Vertical	N/A
2**	2420.600	60.60	-12.39	54.0	6.60	AV	110.00	150	Vertical	N/A
3	4844.000	52.80	-3.46	74.0	-21.20	Peak	201.00	150	Vertical	Pass
3**	4844.000	50.54	-3.46	54.0	-3.46	AV	201.00	150	Vertical	Pass
4	6684.400	53.54	-0.28	74.0	-20.46	Peak	356.00	150	Vertical	Pass
4**	6684.400	45.17	-0.28	54.0	-8.83	AV	356.00	150	Vertical	Pass
5	10205.625	51.95	0.32	74.0	-22.05	Peak	181.00	150	Vertical	Pass
5**	10205.625	42.95	0.32	54.0	-11.05	AV	181.00	150	Vertical	Pass
6	13270.537	56.17	0.69	74.0	-17.83	Peak	19.00	150	Vertical	Pass
6**	13270.537	45.63	0.69	54.0	-8.37	AV	19.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1436.100	41.27	-17.35	74.0	-32.73	Peak	56.00	150	Horizontal	Pass
1**	1436.100	29.60	-17.35	54.0	-24.40	AV	56.00	150	Horizontal	Pass
2	2428.400	63.82	-12.80	74.0	-10.18	Peak	31.00	150	Horizontal	N/A
2**	2428.400	60.50	-12.80	54.0	6.50	AV	31.00	150	Horizontal	N/A
3	4854.200	51.14	-3.20	74.0	-22.86	Peak	9.00	150	Horizontal	Pass
3**	4854.200	48.74	-3.20	54.0	-5.26	AV	9.00	150	Horizontal	Pass
4	6679.800	53.68	-0.53	74.0	-20.32	Peak	0.00	150	Horizontal	Pass
4**	6679.800	44.76	-0.53	54.0	-9.24	AV	0.00	150	Horizontal	Pass
5	10186.651	52.61	0.20	74.0	-21.39	Peak	0.00	150	Horizontal	Pass
5**	10186.651	42.48	0.20	54.0	-11.52	AV	0.00	150	Horizontal	Pass
6	13413.338	56.16	0.44	74.0	-17.84	Peak	360.00	150	Horizontal	Pass
6**	13413.338	46.80	0.44	54.0	-7.20	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 4

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1664.500	43.73	-17.51	74.0	-30.27	Peak	54.00	150	Vertical	Pass
1**	1664.500	31.66	-17.51	54.0	-22.34	AV	54.00	150	Vertical	Pass
2	2428.300	63.48	-12.80	74.0	-10.52	Peak	121.00	150	Vertical	N/A
2**	2428.300	60.28	-12.80	54.0	6.28	AV	121.00	150	Vertical	N/A
3	4854.000	53.56	-3.18	74.0	-20.44	Peak	74.00	150	Vertical	Pass
3**	4854.000	50.83	-3.18	54.0	-3.17	AV	74.00	150	Vertical	Pass
4	6999.200	54.21	0.24	74.0	-19.79	Peak	141.00	150	Vertical	Pass
4**	6999.200	45.33	0.24	54.0	-8.67	AV	141.00	150	Vertical	Pass
5	10341.325	52.29	0.07	74.0	-21.71	Peak	224.00	150	Vertical	Pass
5**	10341.325	43.33	0.07	54.0	-10.67	AV	224.00	150	Vertical	Pass
6	13245.862	56.09	0.94	74.0	-17.91	Peak	50.00	150	Vertical	Pass
6**	13245.862	45.75	0.94	54.0	-8.25	AV	50.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.100	40.75	-17.47	74.0	-33.25	Peak	44.00	150	Horizontal	Pass
1**	1440.100	30.40	-17.47	54.0	-23.60	AV	44.00	150	Horizontal	Pass
2	2433.400	64.11	-12.89	74.0	-9.89	Peak	19.00	150	Horizontal	N/A
2**	2433.400	61.01	-12.89	54.0	7.01	AV	19.00	150	Horizontal	N/A
3	4864.200	52.27	-3.44	74.0	-21.73	Peak	301.00	150	Horizontal	Pass
3**	4864.200	48.88	-3.44	54.0	-5.12	AV	301.00	150	Horizontal	Pass
4	6988.600	54.59	0.25	74.0	-19.41	Peak	353.00	150	Horizontal	Pass
4**	6988.600	44.24	0.25	54.0	-9.76	AV	353.00	150	Horizontal	Pass
5	10086.600	52.32	-0.17	74.0	-21.68	Peak	213.00	150	Horizontal	Pass
5**	10086.600	41.84	-0.17	54.0	-12.16	AV	213.00	150	Horizontal	Pass
6	13309.388	56.24	0.86	74.0	-17.76	Peak	294.00	150	Horizontal	Pass
6**	13309.388	47.44	0.86	54.0	-6.56	AV	294.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 5

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1824.600	45.81	-16.69	74.0	-28.19	Peak	216.00	150	Vertical	Pass
1**	1824.600	32.55	-16.69	54.0	-21.45	AV	216.00	150	Vertical	Pass
2	2432.000	64.37	-12.82	74.0	-9.63	Peak	109.00	150	Vertical	N/A
2**	2432.000	59.92	-12.82	54.0	5.92	AV	109.00	150	Vertical	N/A
3	4864.200	53.79	-3.44	74.0	-20.21	Peak	88.00	150	Vertical	Pass
3**	4864.200	50.81	-3.44	54.0	-3.19	AV	88.00	150	Vertical	Pass
4	6676.000	54.05	-0.61	74.0	-19.95	Peak	311.00	150	Vertical	Pass
4**	6676.000	44.96	-0.61	54.0	-9.04	AV	311.00	150	Vertical	Pass
5	9979.362	51.66	-0.79	74.0	-22.34	Peak	233.00	150	Vertical	Pass
5**	9979.362	42.15	-0.79	54.0	-11.85	AV	233.00	150	Vertical	Pass
6	13307.550	55.73	0.86	74.0	-18.27	Peak	123.00	150	Vertical	Pass
6**	13307.550	48.01	0.86	54.0	-5.99	AV	123.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.400	41.19	-17.47	74.0	-32.81	Peak	54.00	150	Horizontal	Pass
1**	1439.400	30.39	-17.47	54.0	-23.61	AV	54.00	150	Horizontal	Pass
2	2438.000	64.60	-12.60	74.0	-9.40	Peak	21.00	150	Horizontal	N/A
2**	2438.000	61.40	-12.60	54.0	7.40	AV	21.00	150	Horizontal	N/A
3	4874.200	53.12	-3.35	74.0	-20.88	Peak	22.00	150	Horizontal	Pass
3**	4874.200	49.67	-3.35	54.0	-4.33	AV	22.00	150	Horizontal	Pass
4	6692.200	54.06	-0.31	74.0	-19.94	Peak	208.00	150	Horizontal	Pass
4**	6692.200	45.69	-0.31	54.0	-8.31	AV	208.00	150	Horizontal	Pass
5	9814.912	51.74	-0.03	74.0	-22.26	Peak	289.00	150	Horizontal	Pass
5**	9814.912	42.13	-0.03	54.0	-11.87	AV	289.00	150	Horizontal	Pass
6	13315.951	55.53	0.89	74.0	-18.47	Peak	0.00	150	Horizontal	Pass
6**	13315.951	46.97	0.89	54.0	-7.03	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1831.200	46.19	-16.64	74.0	-27.81	Peak	222.00	150	Vertical	Pass
1**	1831.200	31.33	-16.64	54.0	-22.67	AV	222.00	150	Vertical	Pass
2	2437.100	64.09	-12.64	74.0	-9.91	Peak	113.00	150	Vertical	N/A
2**	2437.100	59.53	-12.64	54.0	5.53	AV	113.00	150	Vertical	N/A
3	4874.200	53.39	-3.35	74.0	-20.61	Peak	192.00	150	Vertical	Pass
3**	4874.200	50.24	-3.35	54.0	-3.76	AV	192.00	150	Vertical	Pass
4	6684.400	54.32	-0.28	74.0	-19.68	Peak	271.00	150	Vertical	Pass
4**	6684.400	45.19	-0.28	54.0	-8.81	AV	271.00	150	Vertical	Pass
5	10374.674	52.02	0.18	74.0	-21.98	Peak	171.00	150	Vertical	Pass
5**	10374.674	43.26	0.18	54.0	-10.74	AV	171.00	150	Vertical	Pass
6	13315.162	55.83	0.89	74.0	-18.17	Peak	249.00	150	Vertical	Pass
6**	13315.162	47.70	0.89	54.0	-6.30	AV	249.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.400	41.20	-17.46	74.0	-32.80	Peak	50.00	150	Horizontal	Pass
1**	1440.400	30.54	-17.46	54.0	-23.46	AV	50.00	150	Horizontal	Pass
2	2443.500	64.51	-12.81	74.0	-9.49	Peak	25.00	150	Horizontal	N/A
2**	2443.500	61.38	-12.81	54.0	7.38	AV	25.00	150	Horizontal	N/A
3	4884.000	51.80	-3.35	74.0	-22.20	Peak	10.00	150	Horizontal	Pass
3**	4884.000	48.74	-3.35	54.0	-5.26	AV	10.00	150	Horizontal	Pass
4	6407.600	53.95	-0.81	74.0	-20.05	Peak	360.00	150	Horizontal	Pass
4**	6407.600	43.82	-0.81	54.0	-10.18	AV	360.00	150	Horizontal	Pass
5	9701.349	51.85	-0.06	74.0	-22.15	Peak	152.00	150	Horizontal	Pass
5**	9701.349	42.58	-0.06	54.0	-11.42	AV	152.00	150	Horizontal	Pass
6	13410.713	56.01	0.49	74.0	-17.99	Peak	105.00	150	Horizontal	Pass
6**	13410.713	46.32	0.49	54.0	-7.68	AV	105.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 7

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1665.500	43.35	-17.49	74.0	-30.65	Peak	52.00	150	Vertical	Pass
1**	1665.500	31.43	-17.49	54.0	-22.57	AV	52.00	150	Vertical	Pass
2	2443.200	63.78	-12.83	74.0	-10.22	Peak	104.00	150	Vertical	N/A
2**	2443.200	60.42	-12.83	54.0	6.42	AV	104.00	150	Vertical	N/A
3	4884.200	54.33	-3.34	74.0	-19.67	Peak	195.00	150	Vertical	Pass
3**	4884.200	50.70	-3.34	54.0	-3.30	AV	195.00	150	Vertical	Pass
4	6606.200	53.58	0.13	74.0	-20.42	Peak	80.00	150	Vertical	Pass
4**	6606.200	44.90	0.13	54.0	-9.10	AV	80.00	150	Vertical	Pass
5	10336.151	52.07	0.07	74.0	-21.93	Peak	0.00	150	Vertical	Pass
5**	10336.151	42.81	0.07	54.0	-11.19	AV	0.00	150	Vertical	Pass
6	13320.412	55.87	0.91	74.0	-18.13	Peak	110.00	150	Vertical	Pass
6**	13320.412	46.70	0.91	54.0	-7.30	AV	110.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.700	41.04	-17.47	74.0	-32.96	Peak	42.00	150	Horizontal	Pass
1**	1439.700	29.64	-17.47	54.0	-24.36	AV	42.00	150	Horizontal	Pass
2	2447.000	64.45	-12.69	74.0	-9.55	Peak	19.00	150	Horizontal	N/A
2**	2447.000	60.11	-12.69	54.0	6.11	AV	19.00	150	Horizontal	N/A
3	4894.000	52.11	-3.20	74.0	-21.89	Peak	23.00	150	Horizontal	Pass
3**	4894.000	46.96	-3.20	54.0	-7.04	AV	23.00	150	Horizontal	Pass
4	6689.600	54.34	-0.27	74.0	-19.66	Peak	103.00	150	Horizontal	Pass
4**	6689.600	44.94	-0.27	54.0	-9.06	AV	103.00	150	Horizontal	Pass
5	10481.338	51.95	-0.86	74.0	-22.05	Peak	262.00	150	Horizontal	Pass
5**	10481.338	42.48	-0.86	54.0	-11.52	AV	262.00	150	Horizontal	Pass
6	13265.025	55.84	0.67	74.0	-18.16	Peak	300.00	150	Horizontal	Pass
6**	13265.025	46.01	0.67	54.0	-7.99	AV	300.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 8

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1659.700	42.87	-17.61	74.0	-31.13	Peak	36.00	150	Vertical	Pass
1**	1659.700	30.34	-17.61	54.0	-23.66	AV	36.00	150	Vertical	Pass
2	2445.800	63.75	-12.70	74.0	-10.25	Peak	105.00	150	Vertical	N/A
2**	2445.800	60.55	-12.70	54.0	6.55	AV	105.00	150	Vertical	N/A
3	4894.200	52.89	-3.17	74.0	-21.11	Peak	193.00	150	Vertical	Pass
3**	4894.200	50.00	-3.17	54.0	-4.00	AV	193.00	150	Vertical	Pass
4	6682.400	54.21	-0.45	74.0	-19.79	Peak	272.00	150	Vertical	Pass
4**	6682.400	45.04	-0.45	54.0	-8.96	AV	272.00	150	Vertical	Pass
5	9690.424	51.53	0.12	74.0	-22.47	Peak	188.00	150	Vertical	Pass
5**	9690.424	42.63	0.12	54.0	-11.37	AV	188.00	150	Vertical	Pass
6	15997.650	56.93	0.26	74.0	-17.07	Peak	38.00	150	Vertical	Pass
6**	15997.650	45.46	0.26	54.0	-8.54	AV	38.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1441.200	42.03	-17.46	74.0	-31.97	Peak	42.00	150	Horizontal	Pass
1**	1441.200	29.65	-17.46	54.0	-24.35	AV	42.00	150	Horizontal	Pass
2	2452.000	64.93	-12.66	74.0	-9.07	Peak	31.00	150	Horizontal	N/A
2**	2452.000	59.88	-12.66	54.0	5.88	AV	31.00	150	Horizontal	N/A
3	4904.000	51.71	-2.60	74.0	-22.29	Peak	11.00	150	Horizontal	Pass
3**	4904.000	48.48	-2.60	54.0	-5.52	AV	11.00	150	Horizontal	Pass
4	6691.800	53.86	-0.30	74.0	-20.14	Peak	198.00	150	Horizontal	Pass
4**	6691.800	45.22	-0.30	54.0	-8.78	AV	198.00	150	Horizontal	Pass
5	9768.337	51.68	-0.34	74.0	-22.32	Peak	114.00	150	Horizontal	Pass
5**	9768.337	42.44	-0.34	54.0	-11.56	AV	114.00	150	Horizontal	Pass
6	13315.425	55.54	0.89	74.0	-18.46	Peak	299.00	150	Horizontal	Pass
6**	13315.425	47.02	0.89	54.0	-6.98	AV	299.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1664.600	44.19	-17.51	74.0	-29.81	Peak	61.00	150	Vertical	Pass
1**	1664.600	36.32	-17.51	54.0	-17.68	AV	61.00	150	Vertical	Pass
2	2450.900	63.98	-12.57	74.0	-10.02	Peak	125.00	150	Vertical	N/A
2**	2450.900	60.89	-12.57	54.0	6.89	AV	125.00	150	Vertical	N/A
3	4904.200	54.33	-2.59	74.0	-19.67	Peak	74.00	150	Vertical	Pass
3**	4904.200	50.60	-2.59	54.0	-3.40	AV	74.00	150	Vertical	Pass
4	6662.600	54.56	-0.88	74.0	-19.44	Peak	87.00	150	Vertical	Pass
4**	6662.600	43.79	-0.88	54.0	-10.21	AV	87.00	150	Vertical	Pass
5	10197.000	52.52	0.45	74.0	-21.48	Peak	281.00	150	Vertical	Pass
5**	10197.000	43.58	0.45	54.0	-10.42	AV	281.00	150	Vertical	Pass
6	13303.875	55.81	0.87	74.0	-18.19	Peak	118.00	150	Vertical	Pass
6**	13303.875	47.11	0.87	54.0	-6.89	AV	118.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 10

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1438.200	40.69	-17.43	74.0	-33.31	Peak	62.00	150	Horizontal	Pass
1**	1438.200	30.08	-17.43	54.0	-23.92	AV	62.00	150	Horizontal	Pass
2	2457.000	65.12	-12.74	74.0	-8.88	Peak	30.00	150	Horizontal	N/A
2**	2457.000	61.46	-12.74	54.0	7.46	AV	30.00	150	Horizontal	N/A
3	4914.200	52.71	-2.29	74.0	-21.29	Peak	310.00	150	Horizontal	Pass
3**	4914.200	49.91	-2.29	54.0	-4.09	AV	310.00	150	Horizontal	Pass
4	6998.200	54.65	0.23	74.0	-19.35	Peak	74.00	150	Horizontal	Pass
4**	6998.200	44.58	0.23	54.0	-9.42	AV	74.00	150	Horizontal	Pass
5	10155.600	52.40	-0.17	74.0	-21.60	Peak	170.00	150	Horizontal	Pass
5**	10155.600	43.67	-0.17	54.0	-10.33	AV	170.00	150	Horizontal	Pass
6	13443.526	56.24	0.54	74.0	-17.76	Peak	320.00	150	Horizontal	Pass
6**	13443.526	46.53	0.54	54.0	-7.47	AV	320.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 10

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1831.600	42.27	-16.62	74.0	-31.73	Peak	215.00	150	Vertical	Pass
1**	1831.600	31.48	-16.62	54.0	-22.52	AV	215.00	150	Vertical	Pass
2	2455.700	62.93	-12.70	74.0	-11.07	Peak	116.00	150	Vertical	N/A
2**	2455.700	59.82	-12.70	54.0	5.82	AV	116.00	150	Vertical	N/A
3	4914.200	53.48	-2.29	74.0	-20.52	Peak	74.00	150	Vertical	Pass
3**	4914.200	50.56	-2.29	54.0	-3.44	AV	74.00	150	Vertical	Pass
4	6998.600	54.14	0.23	74.0	-19.86	Peak	235.00	150	Vertical	Pass
4**	6998.600	44.79	0.23	54.0	-9.21	AV	235.00	150	Vertical	Pass
5	10433.613	53.05	-0.16	74.0	-20.95	Peak	360.00	150	Vertical	Pass
5**	10433.613	42.30	-0.16	54.0	-11.70	AV	360.00	150	Vertical	Pass
6	13375.799	55.67	0.67	74.0	-18.33	Peak	360.00	150	Vertical	Pass
6**	13375.799	46.09	0.67	54.0	-7.91	AV	360.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11b Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.000	41.46	-17.47	74.0	-32.54	Peak	57.00	150	Horizontal	Pass
1**	1440.000	30.78	-17.47	54.0	-23.22	AV	57.00	150	Horizontal	Pass
2	2460.600	64.90	-12.75	74.0	-9.10	Peak	37.00	150	Horizontal	N/A
2**	2460.600	61.68	-12.75	54.0	7.68	AV	37.00	150	Horizontal	N/A
3	4924.200	53.23	-2.60	74.0	-20.77	Peak	14.00	150	Horizontal	Pass
3**	4924.200	48.95	-2.60	54.0	-5.05	AV	14.00	150	Horizontal	Pass
4	6613.600	55.14	0.18	74.0	-18.86	Peak	130.00	150	Horizontal	Pass
4**	6613.600	44.58	0.18	54.0	-9.42	AV	130.00	150	Horizontal	Pass
5	9004.738	51.61	-0.73	74.0	-22.39	Peak	343.00	150	Horizontal	Pass
5**	9004.738	40.94	-0.73	54.0	-13.06	AV	343.00	150	Horizontal	Pass
6	14171.700	55.81	1.02	74.0	-18.19	Peak	0.00	150	Horizontal	Pass
6**	14171.700	45.62	1.02	54.0	-8.38	AV	0.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11b Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1665.400	45.20	-17.49	74.0	-28.80	Peak	61.00	150	Vertical	Pass
1**	1665.400	29.36	-17.49	54.0	-24.64	AV	61.00	150	Vertical	Pass
2	2460.300	63.28	-12.75	74.0	-10.72	Peak	114.00	150	Vertical	N/A
2**	2460.300	60.09	-12.75	54.0	6.09	AV	114.00	150	Vertical	N/A
3	4924.200	53.46	-2.60	74.0	-20.54	Peak	71.00	150	Vertical	Pass
3**	4924.200	50.85	-2.60	54.0	-3.15	AV	71.00	150	Vertical	Pass
4	6613.200	54.01	0.19	74.0	-19.99	Peak	58.00	150	Vertical	Pass
4**	6613.200	45.29	0.19	54.0	-8.71	AV	58.00	150	Vertical	Pass
5	10559.537	52.33	-0.70	74.0	-21.67	Peak	356.00	150	Vertical	Pass
5**	10559.537	42.11	-0.70	54.0	-11.89	AV	356.00	150	Vertical	Pass
6	13431.451	56.29	0.40	74.0	-17.71	Peak	212.00	150	Vertical	Pass
6**	13431.451	46.23	0.40	54.0	-7.77	AV	212.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.500	41.41	-17.47	74.0	-32.59	Peak	20.00	150	Horizontal	Pass
1**	1439.500	29.58	-17.47	54.0	-24.42	AV	20.00	150	Horizontal	Pass
2	2417.200	68.34	-12.25	74.0	-5.66	Peak	20.00	150	Horizontal	N/A
2**	2417.200	60.84	-12.25	54.0	6.84	AV	20.00	150	Horizontal	N/A
3	4826.000	53.63	-3.48	74.0	-20.37	Peak	314.00	150	Horizontal	Pass
3**	4826.000	45.37	-3.48	54.0	-8.63	AV	314.00	150	Horizontal	Pass
4	6684.200	54.80	-0.30	74.0	-19.20	Peak	360.00	150	Horizontal	Pass
4**	6684.200	45.80	-0.30	54.0	-8.20	AV	360.00	150	Horizontal	Pass
5	10434.187	52.83	-0.16	74.0	-21.17	Peak	171.00	150	Horizontal	Pass
5**	10434.187	43.15	-0.16	54.0	-10.85	AV	171.00	150	Horizontal	Pass
6	13310.701	55.85	0.86	74.0	-18.15	Peak	360.00	150	Horizontal	Pass
6**	13310.701	47.37	0.86	54.0	-6.63	AV	360.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1662.000	43.52	-17.52	74.0	-30.48	Peak	55.00	150	Vertical	Pass
1**	1662.000	29.48	-17.52	54.0	-24.52	AV	55.00	150	Vertical	Pass
2	2417.400	68.13	-12.25	74.0	-5.87	Peak	106.00	150	Vertical	N/A
2**	2417.400	60.49	-12.25	54.0	6.49	AV	106.00	150	Vertical	N/A
3	4826.000	55.08	-3.48	74.0	-18.92	Peak	78.00	150	Vertical	Pass
3**	4826.000	49.29	-3.48	54.0	-4.71	AV	78.00	150	Vertical	Pass
4	6680.400	53.80	-0.53	74.0	-20.20	Peak	78.00	150	Vertical	Pass
4**	6680.400	45.51	-0.53	54.0	-8.49	AV	78.00	150	Vertical	Pass
5	10417.512	51.79	0.04	74.0	-22.21	Peak	72.00	150	Vertical	Pass
5**	10417.512	42.26	0.04	54.0	-11.74	AV	72.00	150	Vertical	Pass
6	13295.213	55.86	0.84	74.0	-18.14	Peak	152.00	150	Vertical	Pass
6**	13295.213	47.29	0.84	54.0	-6.71	AV	152.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1442.100	41.03	-17.44	74.0	-32.97	Peak	57.00	150	Horizontal	Pass
1**	1442.100	30.55	-17.44	54.0	-23.45	AV	57.00	150	Horizontal	Pass
2	2442.400	69.36	-12.89	74.0	-4.64	Peak	18.00	150	Horizontal	N/A
2**	2442.400	61.81	-12.89	54.0	7.81	AV	18.00	150	Horizontal	N/A
3	4874.200	55.69	-3.35	74.0	-18.31	Peak	23.00	150	Horizontal	Pass
3**	4874.200	46.94	-3.35	54.0	-7.06	AV	23.00	150	Horizontal	Pass
4	6673.000	53.84	-0.78	74.0	-20.16	Peak	92.00	150	Horizontal	Pass
4**	6673.000	45.27	-0.78	54.0	-8.73	AV	92.00	150	Horizontal	Pass
5	9696.750	50.92	0.08	74.0	-23.08	Peak	0.00	150	Horizontal	Pass
5**	9696.750	42.73	0.08	54.0	-11.27	AV	0.00	150	Horizontal	Pass
6	13297.050	55.64	0.85	74.0	-18.36	Peak	18.00	150	Horizontal	Pass
6**	13297.050	47.57	0.85	54.0	-6.43	AV	18.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1830.000	44.96	-16.70	74.0	-29.04	Peak	219.00	150	Vertical	Pass
1**	1830.000	32.67	-16.70	54.0	-21.33	AV	219.00	150	Vertical	Pass
2	2439.800	68.51	-12.66	74.0	-5.49	Peak	114.00	150	Vertical	N/A
2**	2439.800	60.90	-12.66	54.0	6.90	AV	114.00	150	Vertical	N/A
3	4875.800	54.76	-3.41	74.0	-19.24	Peak	79.00	150	Vertical	Pass
3**	4875.800	50.17	-3.41	54.0	-3.83	AV	79.00	150	Vertical	Pass
4	6992.600	54.36	0.26	74.0	-19.64	Peak	229.00	150	Vertical	Pass
4**	6992.600	44.63	0.26	54.0	-9.37	AV	229.00	150	Vertical	Pass
5	10196.425	52.59	0.45	74.0	-21.41	Peak	70.00	150	Vertical	Pass
5**	10196.425	43.65	0.45	54.0	-10.35	AV	70.00	150	Vertical	Pass
6	13303.875	55.96	0.87	74.0	-18.04	Peak	83.00	150	Vertical	Pass
6**	13303.875	47.00	0.87	54.0	-7.00	AV	83.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11g Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1438.700	41.51	-17.47	74.0	-32.49	Peak	52.00	150	Horizontal	Pass
1**	1438.700	30.98	-17.47	54.0	-23.02	AV	52.00	150	Horizontal	Pass
2	2456.900	69.36	-12.74	74.0	-4.64	Peak	25.00	150	Horizontal	N/A
2**	2456.900	62.34	-12.74	54.0	8.34	AV	25.00	150	Horizontal	N/A
3	4920.800	53.31	-2.50	74.0	-20.69	Peak	25.00	150	Horizontal	Pass
3**	4920.800	48.90	-2.50	54.0	-5.10	AV	25.00	150	Horizontal	Pass
4	6611.800	54.21	0.19	74.0	-19.79	Peak	212.00	150	Horizontal	Pass
4**	6611.800	44.63	0.19	54.0	-9.37	AV	212.00	150	Horizontal	Pass
5	10396.812	51.81	-0.04	74.0	-22.19	Peak	210.00	150	Horizontal	Pass
5**	10396.812	41.22	-0.04	54.0	-12.78	AV	210.00	150	Horizontal	Pass
6	13418.325	56.44	0.40	74.0	-17.56	Peak	260.00	150	Horizontal	Pass
6**	13418.325	47.48	0.40	54.0	-6.52	AV	260.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11g Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.400	41.74	-17.50	74.0	-32.26	Peak	172.00	150	Vertical	Pass
1**	1327.400	33.81	-17.50	54.0	-20.19	AV	172.00	150	Vertical	Pass
2	2455.200	68.27	-12.68	74.0	-5.73	Peak	104.00	150	Vertical	N/A
2**	2455.200	61.83	-12.68	54.0	7.83	AV	104.00	150	Vertical	N/A
3	4925.800	54.37	-2.74	74.0	-19.63	Peak	81.00	150	Vertical	Pass
3**	4925.800	50.57	-2.74	54.0	-3.43	AV	81.00	150	Vertical	Pass
4	6975.600	54.73	0.78	74.0	-19.27	Peak	280.00	150	Vertical	Pass
4**	6975.600	44.20	0.78	54.0	-9.80	AV	280.00	150	Vertical	Pass
5	10508.363	51.87	-0.78	74.0	-22.13	Peak	325.00	150	Vertical	Pass
5**	10508.363	40.70	-0.78	54.0	-13.30	AV	325.00	150	Vertical	Pass
6	13418.588	55.57	0.40	74.0	-18.43	Peak	127.00	150	Vertical	Pass
6**	13418.588	46.50	0.40	54.0	-7.50	AV	127.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1441.700	41.05	-17.45	74.0	-32.95	Peak	27.00	150	Horizontal	Pass
1**	1441.700	29.93	-17.45	54.0	-24.07	AV	27.00	150	Horizontal	Pass
2	2419.100	67.97	-12.29	74.0	-6.03	Peak	27.00	150	Horizontal	N/A
2**	2419.100	61.57	-12.29	54.0	7.57	AV	27.00	150	Horizontal	N/A
3	4823.600	54.92	-3.38	74.0	-19.08	Peak	317.00	150	Horizontal	Pass
3**	4823.600	44.17	-3.38	54.0	-9.83	AV	317.00	150	Horizontal	Pass
4	6598.200	53.82	-0.66	74.0	-20.18	Peak	113.00	150	Horizontal	Pass
4**	6598.200	44.68	-0.66	54.0	-9.32	AV	113.00	150	Horizontal	Pass
5	10165.375	52.46	-0.29	74.0	-21.54	Peak	345.00	150	Horizontal	Pass
5**	10165.375	42.24	-0.29	54.0	-11.76	AV	345.00	150	Horizontal	Pass
6	13394.962	55.80	0.63	74.0	-18.20	Peak	262.00	150	Horizontal	Pass
6**	13394.962	46.22	0.63	54.0	-7.78	AV	262.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 1

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1828.600	44.00	-16.64	74.0	-30.00	Peak	209.00	150	Vertical	Pass
1**	1828.600	30.73	-16.64	54.0	-23.27	AV	209.00	150	Vertical	Pass
2	2416.400	67.56	-12.24	74.0	-6.44	Peak	112.00	150	Vertical	N/A
2**	2416.400	60.21	-12.24	54.0	6.21	AV	112.00	150	Vertical	N/A
3	4823.200	54.08	-3.39	74.0	-19.92	Peak	83.00	150	Vertical	Pass
3**	4823.200	49.21	-3.39	54.0	-4.79	AV	83.00	150	Vertical	Pass
4	6683.000	53.97	-0.41	74.0	-20.03	Peak	225.00	150	Vertical	Pass
4**	6683.000	45.32	-0.41	54.0	-8.68	AV	225.00	150	Vertical	Pass
5	10148.412	53.14	0.01	74.0	-20.86	Peak	92.00	150	Vertical	Pass
5**	10148.412	43.43	0.01	54.0	-10.57	AV	92.00	150	Vertical	Pass
6	13397.063	55.81	0.59	74.0	-18.19	Peak	360.00	150	Vertical	Pass
6**	13397.063	47.50	0.59	54.0	-6.50	AV	360.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1441.200	42.67	-17.46	74.0	-31.33	Peak	37.00	150	Horizontal	Pass
1**	1441.200	31.47	-17.46	54.0	-22.53	AV	37.00	150	Horizontal	Pass
2	2441.500	68.90	-12.88	74.0	-5.10	Peak	23.00	150	Horizontal	N/A
2**	2441.500	61.38	-12.88	54.0	7.38	AV	23.00	150	Horizontal	N/A
3	4873.000	53.39	-3.30	74.0	-20.61	Peak	308.00	150	Horizontal	Pass
3**	4873.000	47.92	-3.30	54.0	-6.08	AV	308.00	150	Horizontal	Pass
4	6681.600	54.17	-0.49	74.0	-19.83	Peak	360.00	150	Horizontal	Pass
4**	6681.600	45.41	-0.49	54.0	-8.59	AV	360.00	150	Horizontal	Pass
5	10154.738	52.34	-0.14	74.0	-21.66	Peak	360.00	150	Horizontal	Pass
5**	10154.738	43.81	-0.14	54.0	-10.19	AV	360.00	150	Horizontal	Pass
6	13380.525	56.15	0.65	74.0	-17.85	Peak	18.00	150	Horizontal	Pass
6**	13380.525	46.24	0.65	54.0	-7.76	AV	18.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1833.200	46.86	-16.63	74.0	-27.14	Peak	213.00	150	Vertical	Pass
1**	1833.200	31.19	-16.63	54.0	-22.81	AV	213.00	150	Vertical	Pass
2	2444.500	68.34	-12.75	74.0	-5.66	Peak	113.00	150	Vertical	N/A
2**	2444.500	60.66	-12.75	54.0	6.66	AV	113.00	150	Vertical	N/A
3	4874.600	55.83	-3.37	74.0	-18.17	Peak	86.00	150	Vertical	Pass
3**	4874.600	50.16	-3.37	54.0	-3.84	AV	86.00	150	Vertical	Pass
4	6740.000	53.54	-0.23	74.0	-20.46	Peak	115.00	150	Vertical	Pass
4**	6740.000	44.05	-0.23	54.0	-9.95	AV	115.00	150	Vertical	Pass
5	10383.588	51.91	0.14	74.0	-22.09	Peak	360.00	150	Vertical	Pass
5**	10383.588	42.31	0.14	54.0	-11.69	AV	360.00	150	Vertical	Pass
6	13309.912	55.92	0.86	74.0	-18.08	Peak	153.00	150	Vertical	Pass
6**	13309.912	46.61	0.86	54.0	-7.39	AV	153.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.800	41.12	-17.47	74.0	-32.88	Peak	69.00	150	Horizontal	Pass
1**	1439.800	30.26	-17.47	54.0	-23.74	AV	69.00	150	Horizontal	Pass
2	2455.000	69.14	-12.67	74.0	-4.86	Peak	24.00	150	Horizontal	N/A
2**	2455.000	62.32	-12.67	54.0	8.32	AV	24.00	150	Horizontal	N/A
3	4924.200	53.91	-2.60	74.0	-20.09	Peak	43.00	150	Horizontal	Pass
3**	4924.200	48.07	-2.60	54.0	-5.93	AV	43.00	150	Horizontal	Pass
4	6999.600	55.14	0.25	74.0	-18.86	Peak	333.00	150	Horizontal	Pass
4**	6999.600	44.74	0.25	54.0	-9.26	AV	333.00	150	Horizontal	Pass
5	10493.987	52.83	-0.81	74.0	-21.17	Peak	92.00	150	Horizontal	Pass
5**	10493.987	42.27	-0.81	54.0	-11.73	AV	92.00	150	Horizontal	Pass
6	15837.787	56.90	1.45	74.0	-17.10	Peak	62.00	150	Horizontal	Pass
6**	15837.787	46.66	1.45	54.0	-7.34	AV	62.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n20 Channel 11

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1166.800	40.83	-18.18	74.0	-33.17	Peak	78.00	150	Vertical	Pass
1**	1166.800	28.61	-18.18	54.0	-25.39	AV	78.00	150	Vertical	Pass
2	2456.600	67.88	-12.74	74.0	-6.12	Peak	108.00	150	Vertical	N/A
2**	2456.600	61.14	-12.74	54.0	7.14	AV	108.00	150	Vertical	N/A
3	4922.600	54.89	-2.55	74.0	-19.11	Peak	197.00	150	Vertical	Pass
3**	4922.600	49.88	-2.55	54.0	-4.12	AV	197.00	150	Vertical	Pass
4	6603.000	54.76	-0.09	74.0	-19.24	Peak	290.00	150	Vertical	Pass
4**	6603.000	44.35	-0.09	54.0	-9.65	AV	290.00	150	Vertical	Pass
5	10187.800	51.79	0.22	74.0	-22.21	Peak	304.00	150	Vertical	Pass
5**	10187.800	42.18	0.22	54.0	-11.82	AV	304.00	150	Vertical	Pass
6	14610.338	55.70	0.39	74.0	-18.30	Peak	176.00	150	Vertical	Pass
6**	14610.338	46.44	0.39	54.0	-7.56	AV	176.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1439.500	41.14	-17.47	74.0	-32.86	Peak	21.00	150	Horizontal	Pass
1**	1439.500	30.02	-17.47	54.0	-23.98	AV	21.00	150	Horizontal	Pass
2	2437.700	65.45	-12.59	74.0	-8.55	Peak	21.00	150	Horizontal	N/A
2**	2437.700	58.18	-12.59	54.0	4.18	AV	21.00	150	Horizontal	N/A
3	4832.000	51.49	-3.56	74.0	-22.51	Peak	28.00	150	Horizontal	Pass
3**	4832.000	43.19	-3.56	54.0	-10.81	AV	28.00	150	Horizontal	Pass
4	6679.800	54.08	-0.53	74.0	-19.92	Peak	120.00	150	Horizontal	Pass
4**	6679.800	45.53	-0.53	54.0	-8.47	AV	120.00	150	Horizontal	Pass
5	8610.288	51.93	-2.15	74.0	-22.07	Peak	266.00	150	Horizontal	Pass
5**	8610.288	41.45	-2.15	54.0	-12.55	AV	266.00	150	Horizontal	Pass
6	13288.125	56.22	0.77	74.0	-17.78	Peak	87.00	150	Horizontal	Pass
6**	13288.125	46.32	0.77	54.0	-7.68	AV	87.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 3

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1832.700	45.58	-16.62	74.0	-28.42	Peak	224.00	150	Vertical	Pass
1**	1832.700	30.76	-16.62	54.0	-23.24	AV	224.00	150	Vertical	Pass
2	2418.900	65.21	-12.28	74.0	-8.79	Peak	98.00	150	Vertical	N/A
2**	2418.900	57.28	-12.28	54.0	3.28	AV	98.00	150	Vertical	N/A
3	4858.200	53.88	-3.28	74.0	-20.12	Peak	92.00	150	Vertical	Pass
3**	4858.200	45.07	-3.28	54.0	-8.93	AV	92.00	150	Vertical	Pass
4	6683.800	53.97	-0.34	74.0	-20.03	Peak	170.00	150	Vertical	Pass
4**	6683.800	45.10	-0.34	54.0	-8.90	AV	170.00	150	Vertical	Pass
5	9702.500	51.84	-0.11	74.0	-22.16	Peak	130.00	150	Vertical	Pass
5**	9702.500	42.16	-0.11	54.0	-11.84	AV	130.00	150	Vertical	Pass
6	13408.612	55.50	0.52	74.0	-18.50	Peak	106.00	150	Vertical	Pass
6**	13408.612	46.07	0.52	54.0	-7.93	AV	106.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1437.200	41.02	-17.37	74.0	-32.98	Peak	34.00	150	Horizontal	Pass
1**	1437.200	29.74	-17.37	54.0	-24.26	AV	34.00	150	Horizontal	Pass
2	2450.100	66.57	-12.54	74.0	-7.43	Peak	18.00	150	Horizontal	N/A
2**	2450.100	59.31	-12.54	54.0	5.31	AV	18.00	150	Horizontal	N/A
3	4899.000	53.73	-2.90	74.0	-20.27	Peak	29.00	150	Horizontal	Pass
3**	4899.000	42.45	-2.90	54.0	-11.55	AV	29.00	150	Horizontal	Pass
4	6682.400	53.93	-0.45	74.0	-20.07	Peak	78.00	150	Horizontal	Pass
4**	6682.400	45.78	-0.45	54.0	-8.22	AV	78.00	150	Horizontal	Pass
5	10321.776	51.71	-0.14	74.0	-22.29	Peak	9.00	150	Horizontal	Pass
5**	10321.776	42.65	-0.14	54.0	-11.35	AV	9.00	150	Horizontal	Pass
6	13298.099	55.47	0.85	74.0	-18.53	Peak	265.00	150	Horizontal	Pass
6**	13298.099	47.12	0.85	54.0	-6.88	AV	265.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 6

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1666.500	44.41	-17.46	74.0	-29.59	Peak	52.00	150	Vertical	Pass
1**	1666.500	33.07	-17.46	54.0	-20.93	AV	52.00	150	Vertical	Pass
2	2441.500	65.59	-12.88	74.0	-8.41	Peak	99.00	150	Vertical	N/A
2**	2441.500	57.28	-12.88	54.0	3.28	AV	99.00	150	Vertical	N/A
3	4881.800	53.65	-3.43	74.0	-20.35	Peak	203.00	150	Vertical	Pass
3**	4881.800	47.70	-3.43	54.0	-6.30	AV	203.00	150	Vertical	Pass
4	6685.000	54.08	-0.21	74.0	-19.92	Peak	219.00	150	Vertical	Pass
4**	6685.000	45.46	-0.21	54.0	-8.54	AV	219.00	150	Vertical	Pass
5	10201.312	52.29	0.45	74.0	-21.71	Peak	261.00	150	Vertical	Pass
5**	10201.312	44.21	0.45	54.0	-9.79	AV	261.00	150	Vertical	Pass
6	13376.062	55.75	0.67	74.0	-18.25	Peak	308.00	150	Vertical	Pass
6**	13376.062	46.36	0.67	54.0	-7.64	AV	308.00	150	Vertical	Pass

1 GHz to 18 GHz, ANT H 802.11n40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1441.300	41.25	-17.45	74.0	-32.75	Peak	46.00	150	Horizontal	Pass
1**	1441.300	30.51	-17.45	54.0	-23.49	AV	46.00	150	Horizontal	Pass
2	2465.400	66.82	-12.72	74.0	-7.18	Peak	13.00	150	Horizontal	N/A
2**	2465.400	58.71	-12.72	54.0	4.71	AV	13.00	150	Horizontal	N/A
3	4908.600	51.67	-2.44	74.0	-22.33	Peak	29.00	150	Horizontal	Pass
3**	4908.600	46.90	-2.44	54.0	-7.10	AV	29.00	150	Horizontal	Pass
4	6454.800	54.12	-1.18	74.0	-19.88	Peak	341.00	150	Horizontal	Pass
4**	6454.800	43.13	-1.18	54.0	-10.87	AV	341.00	150	Horizontal	Pass
5	10203.612	53.49	0.37	74.0	-20.51	Peak	247.00	150	Horizontal	Pass
5**	10203.612	43.25	0.37	54.0	-10.75	AV	247.00	150	Horizontal	Pass
6	13265.549	56.38	0.68	74.0	-17.62	Peak	42.00	150	Horizontal	Pass
6**	13265.549	46.31	0.68	54.0	-7.69	AV	42.00	150	Horizontal	Pass

1 GHz to 18 GHz, ANT V 802.11n40 Channel 9

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1826.000	44.51	-16.63	74.0	-29.49	Peak	219.00	150	Vertical	Pass
1**	1826.000	31.05	-16.63	54.0	-22.95	AV	219.00	150	Vertical	Pass
2	2455.100	65.39	-12.67	74.0	-8.61	Peak	108.00	150	Vertical	N/A
2**	2455.100	57.40	-12.67	54.0	3.40	AV	108.00	150	Vertical	N/A
3	4905.000	54.74	-2.57	74.0	-19.26	Peak	199.00	150	Vertical	Pass
3**	4905.000	46.56	-2.57	54.0	-7.44	AV	199.00	150	Vertical	Pass
4	6684.000	53.85	-0.32	74.0	-20.15	Peak	269.00	150	Vertical	Pass
4**	6684.000	45.55	-0.32	54.0	-8.45	AV	269.00	150	Vertical	Pass
5	10427.000	51.98	-0.03	74.0	-22.02	Peak	227.00	150	Vertical	Pass
5**	10427.000	41.93	-0.03	54.0	-12.07	AV	227.00	150	Vertical	Pass
6	13419.375	56.89	0.40	74.0	-17.11	Peak	41.00	150	Vertical	Pass
6**	13419.375	47.10	0.40	54.0	-6.90	AV	41.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)


Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Test Data and Plots

802.11b CHANNEL 1

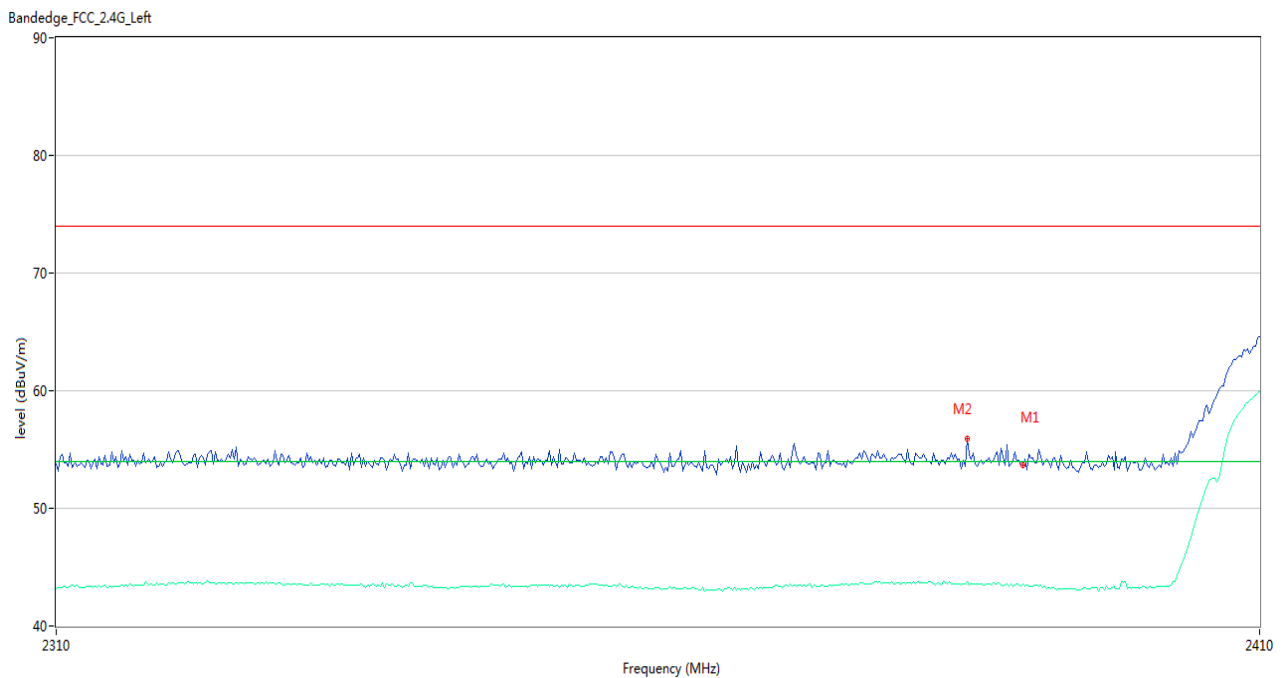


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	53.64	-0.50	74.0	-20.36	Peak	214.00	150	Horizontal	Pass
1**	2390.000	43.54	-0.50	54.0	-10.46	AV	214.00	150	Horizontal	Pass
2	2385.333	55.87	-0.63	74.0	-18.13	Peak	198.00	150	Horizontal	Pass
2**	2385.333	43.74	-0.63	54.0	-10.26	AV	198.00	150	Horizontal	Pass

802.11b CHANNEL 11

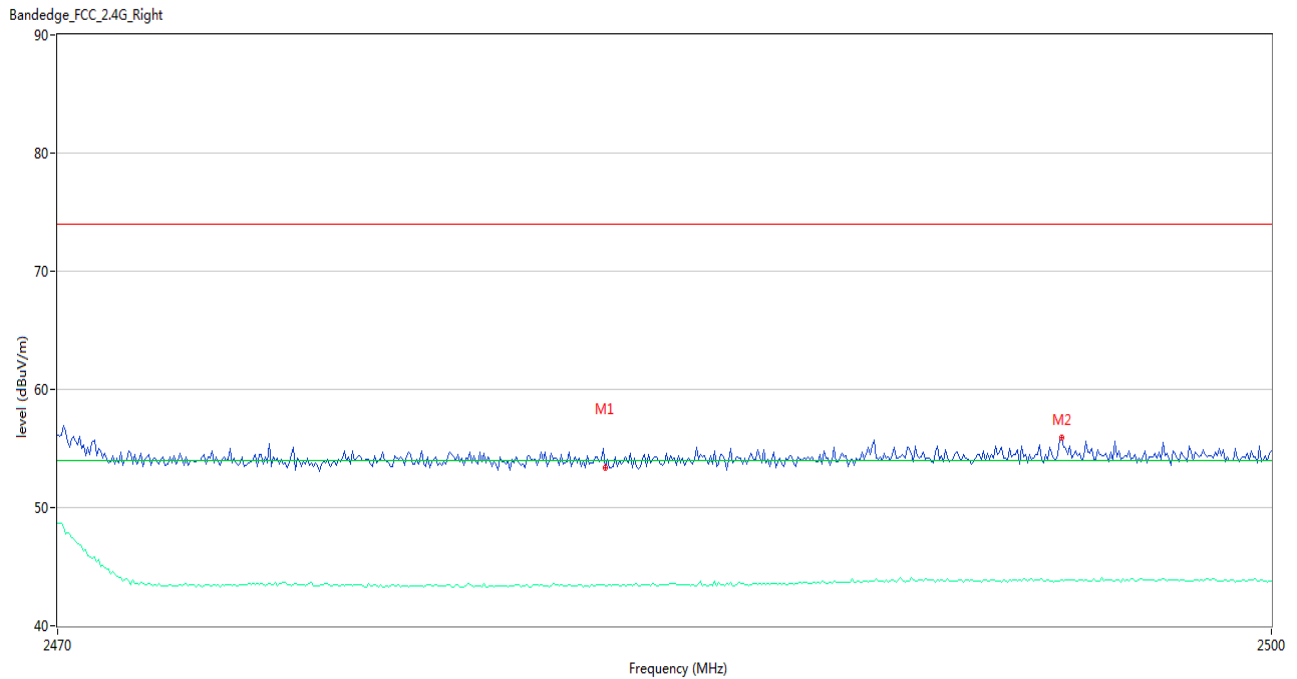


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.37	-0.36	74.0	-20.63	Peak	0.00	150	Horizontal	Pass
1**	2483.500	43.35	-0.36	54.0	-10.65	AV	0.00	150	Horizontal	Pass
2	2494.800	55.90	-0.04	74.0	-18.10	Peak	145.00	150	Horizontal	Pass
2**	2494.800	43.86	-0.04	54.0	-10.14	AV	145.00	150	Horizontal	Pass

802.11g CHANNEL 1

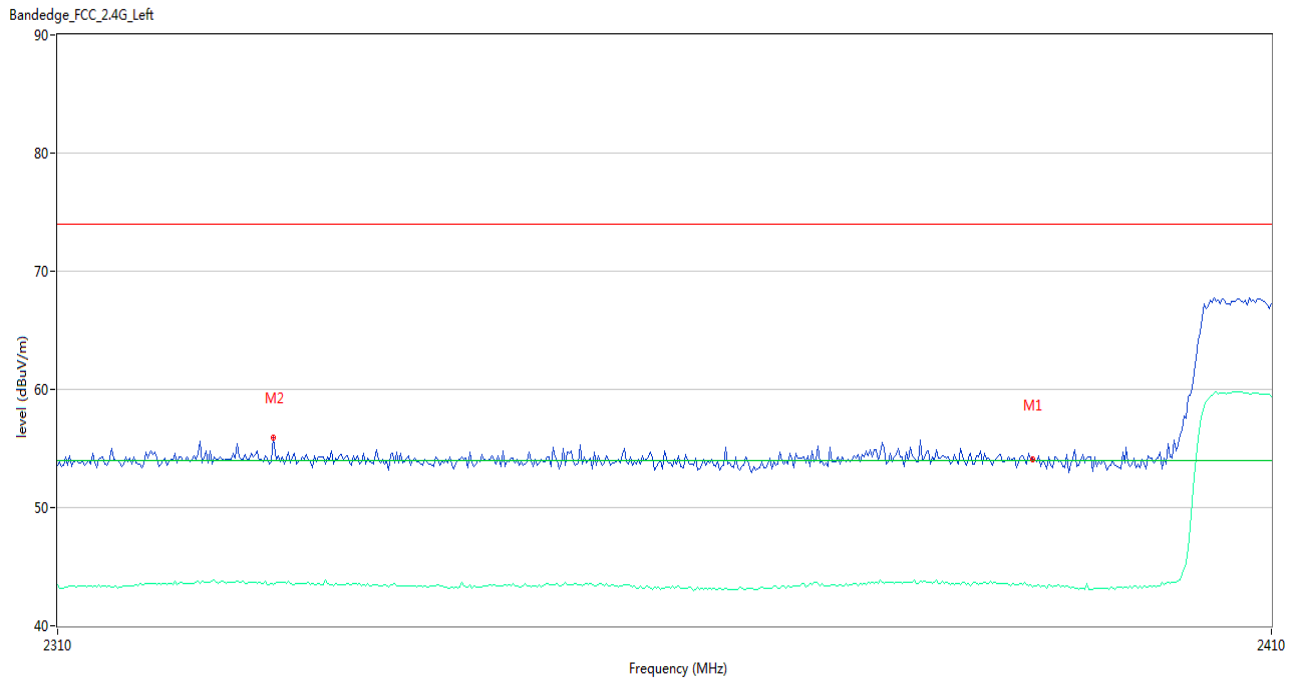


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.04	-0.50	74.0	-19.96	Peak	79.00	150	Horizontal	Pass
1**	2390.000	43.32	-0.50	54.0	-10.68	AV	79.00	150	Horizontal	Pass
2	2327.500	55.97	-0.75	74.0	-18.03	Peak	307.00	150	Horizontal	Pass
2**	2327.500	43.51	-0.75	54.0	-10.49	AV	307.00	150	Horizontal	Pass

802.11g CHANNEL 11

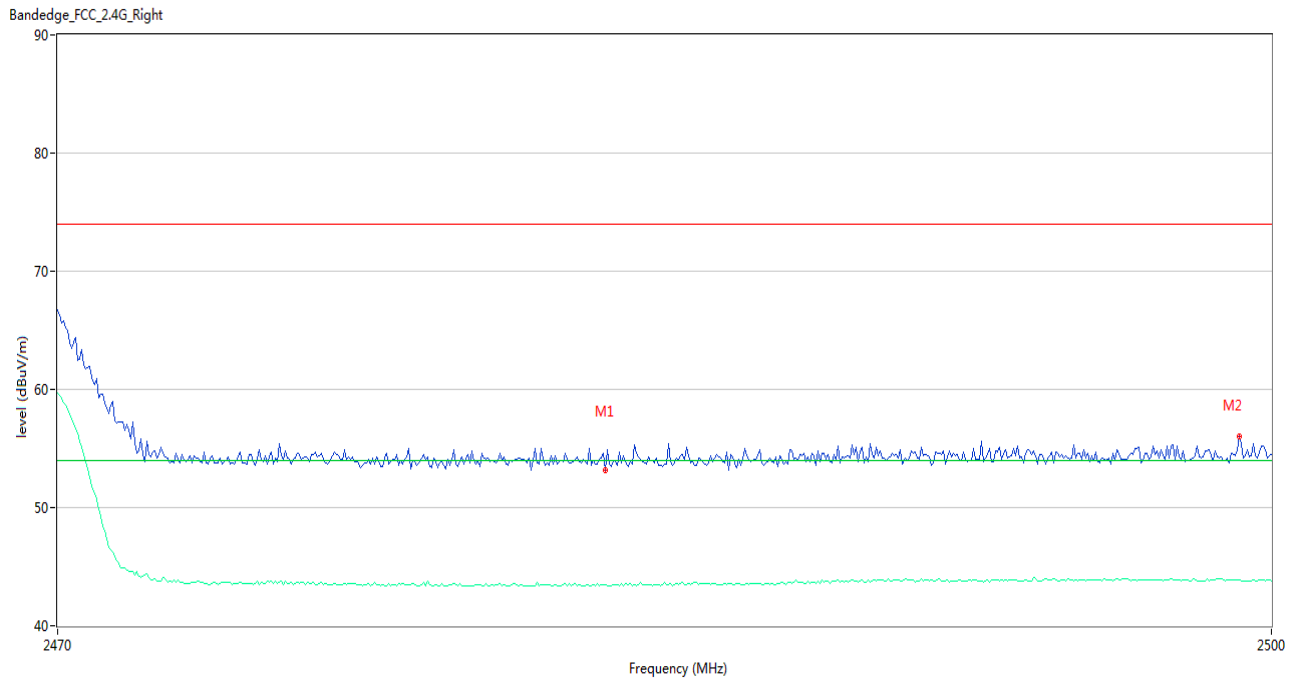


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.13	-0.36	74.0	-20.87	Peak	215.00	150	Horizontal	Pass
1**	2483.500	43.42	-0.36	54.0	-10.58	AV	215.00	150	Horizontal	Pass
2	2499.200	55.99	-0.06	74.0	-18.01	Peak	149.00	150	Horizontal	Pass
2**	2499.200	43.86	-0.06	54.0	-10.14	AV	149.00	150	Horizontal	Pass

802.11n20 CHANNEL 1

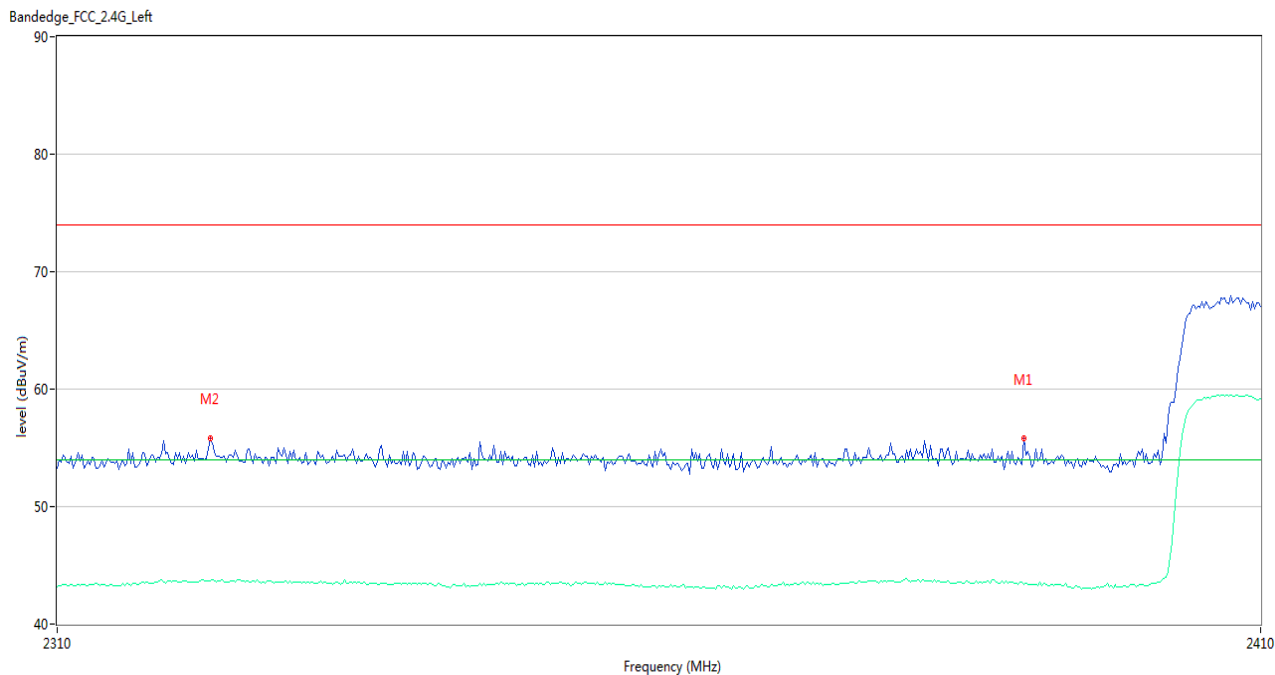


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	55.80	-0.50	74.0	-18.20	Peak	270.00	150	Horizontal	Pass
1**	2390.000	43.42	-0.50	54.0	-10.58	AV	270.00	150	Horizontal	Pass
2	2322.500	55.78	-0.70	74.0	-18.22	Peak	238.00	150	Horizontal	Pass
2**	2322.500	43.67	-0.70	54.0	-10.33	AV	238.00	150	Horizontal	Pass

802.11n20 CHANNEL 11

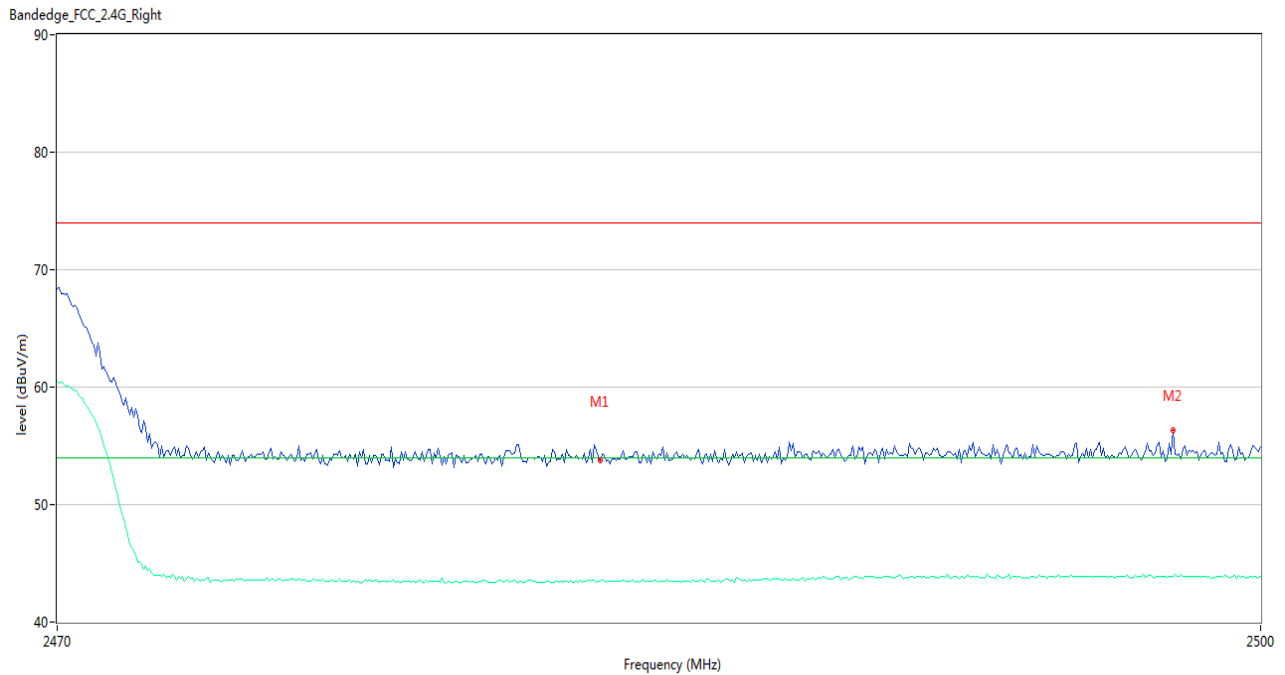


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	53.77	-0.36	74.0	-20.23	Peak	12.00	150	Horizontal	Pass
1**	2483.500	43.46	-0.36	54.0	-10.54	AV	12.00	150	Horizontal	Pass
2	2497.800	56.34	-0.02	74.0	-17.66	Peak	0.00	150	Horizontal	Pass
2**	2497.800	43.92	-0.02	54.0	-10.08	AV	0.00	150	Horizontal	Pass

802.11n40 CHANNEL 3

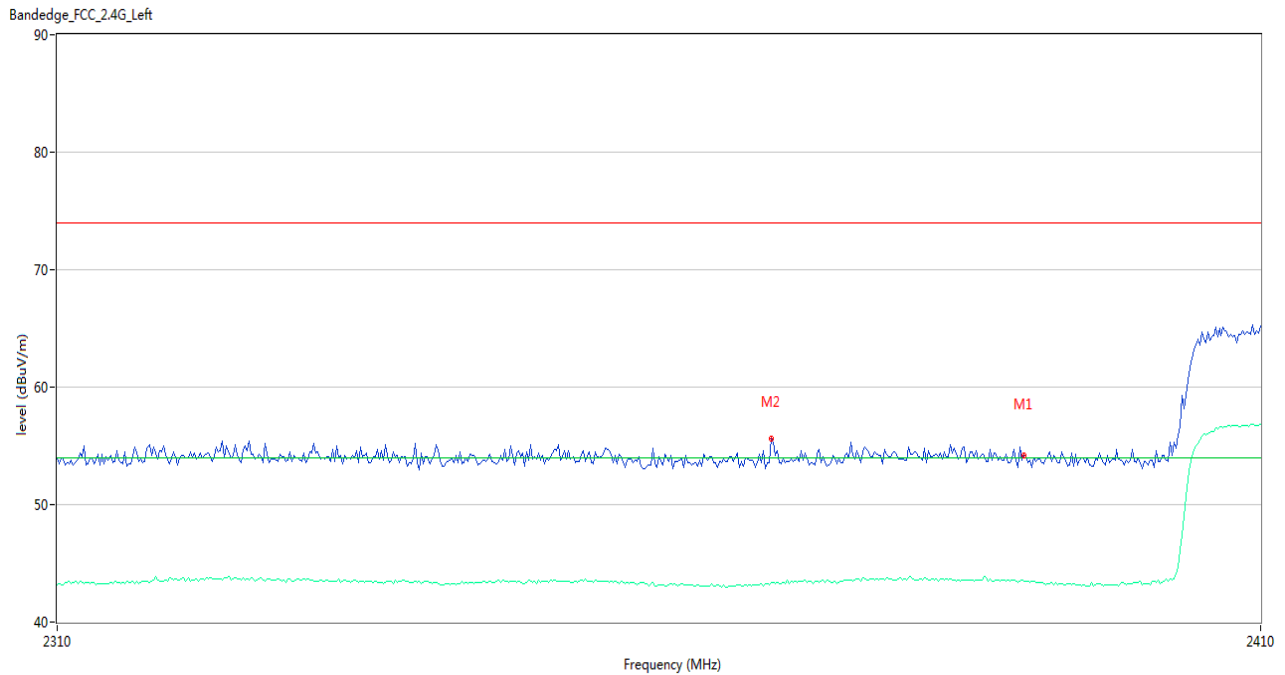

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	54.17	-0.50	74.0	-19.83	Peak	0.00	150	Horizontal	Pass
1**	2390.000	43.44	-0.50	54.0	-10.56	AV	0.00	150	Horizontal	Pass
2	2368.833	55.63	-0.59	74.0	-18.37	Peak	349.00	150	Horizontal	Pass
2**	2368.833	43.38	-0.59	54.0	-10.62	AV	349.00	150	Horizontal	Pass

802.11n40 CHANNEL 9

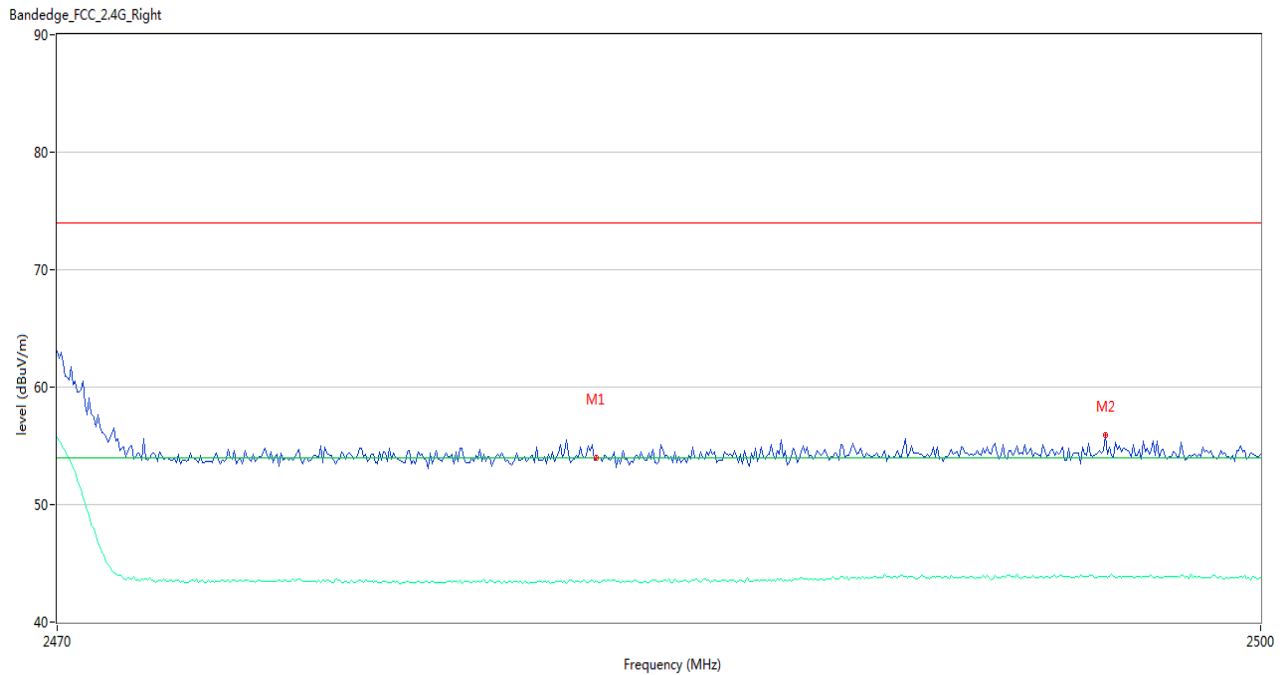

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.01	-0.36	74.0	-19.99	Peak	333.00	150	Horizontal	Pass
1**	2483.500	43.39	-0.36	54.0	-10.61	AV	333.00	150	Horizontal	Pass
2	2496.100	55.97	-0.01	74.0	-18.03	Peak	29.00	150	Horizontal	Pass
2**	2496.100	43.85	-0.01	54.0	-10.15	AV	29.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Test Data

802.11b Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH1	-18.34	8
CH2	-18.35	8
CH3	-18.48	8
CH4	-18.06	8
CH5	-18.01	8
CH6	-17.63	8
CH7	-18.07	8
CH8	-18.21	8
CH9	-17.80	8
CH10	-17.72	8
CH11	-17.80	8

802.11g Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH1	-17.18	8
CH6	-17.33	8
CH11	-17.30	8

802.11n-20 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH1	-17.71	8
CH6	-17.60	8
CH11	-17.74	8

802.11n-40 MHz Mode:

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)
CH3	-21.11	8
CH6	-20.91	8
CH9	-21.02	8

Test Plots

802.11b CHANNEL 1



802.11b CHANNEL 2



802.11b CHANNEL 3



802.11b CHANNEL 4



802.11b CHANNEL 5



802.11b CHANNEL 6



802.11b CHANNEL 7




802.11b CHANNEL 8



802.11b CHANNEL 9




802.11b CHANNEL 10

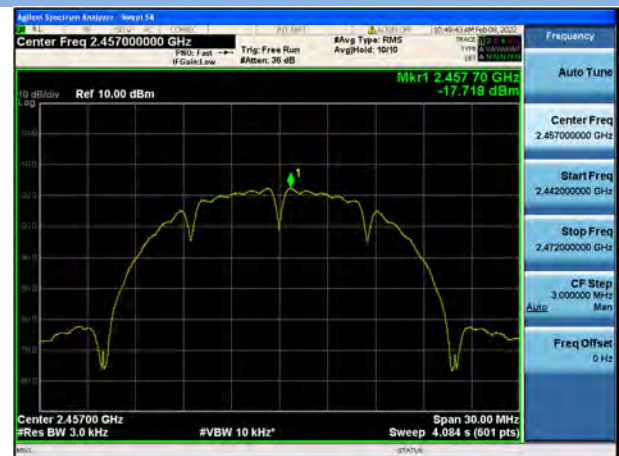


802.11b CHANNEL 11



802.11g CHANNEL 1

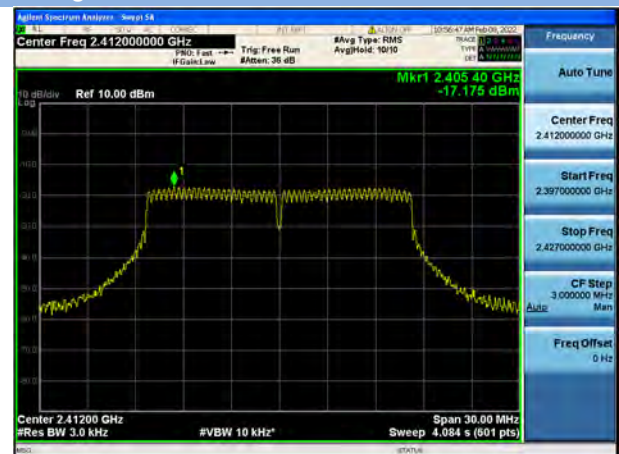

802.11g CHANNEL 6

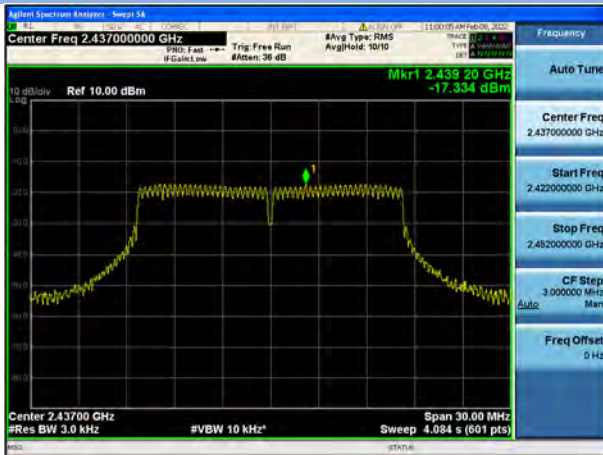


802.11g CHANNEL 11



802.11n-20 MHz CHANNEL 1



802.11 n-20 MHz CHANNEL 6

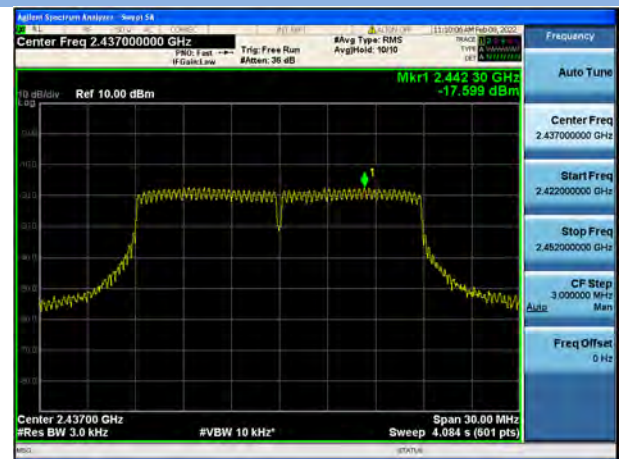

802.11n-20 MHz CHANNEL 11



802.11n-40 MHz CHANNEL 3



802.11n-40 MHz CHANNEL 6



802.11n-40 MHz CHANNEL 9



ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2210449-AR.pdf".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2210449-AW.pdf".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2210449-AI.pdf".

--END OF REPORT--