

FCC Test Report

Report No.: AGC04316250102FR02

FCC ID	:	2ALXL-P1I
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	BUTTON PORTABLE BLUETOOTH SPEAKER
BRAND NAME	:	MUZEN
MODEL NAME	:	MW-P1I, MW-P1, MW-P1S, MW-P1C
APPLICANT	:	Shenzhen Airsmart Technology Co., Ltd.
DATE OF ISSUE	:	Jan. 21, 2025
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jan. 21, 2025	Valid	Initial Release	



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	8
3.2 Test Facility	8
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	12
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	12
4.4 Equipment Used In Tested System	12
4.5 Summary of Test Results	13
5. Description of Test Modes	14
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	16
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	17
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	21
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	



10.1 Provisions Applicable	28
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	29
11. Radiated Spurious Emission	35
11.1 Measurement Limit	35
11.2 Measurement Procedure	35
11.3 Measurement Setup (Block Diagram of Configuration)	38
11.4 Measurement Result	39
12. AC Power Line Conducted Emission Test	48
12.1 Measurement Limit	48
12.2 Measurement Setup (Block Diagram of Configuration)	48
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	49
12.5 Measurement Results	49
Appendix I: Photographs of Test Setup	52
Appendix II: Photographs of Test EUT	52



1. General Information

Applicant	Shenzhen Airsmart Technology Co., Ltd.
Address	12/F, Building A, Guangqi Future Center, No.88 Gaoxin South 4th Rd, Yuehai Street, Nanshan, Shenzhen, China
Manufacturer	Shenzhen Airsmart Technology Co., Ltd.
Address	12/F, Building A, Guangqi Future Center, No.88 Gaoxin South 4th Rd, Yuehai Street, Nanshan, Shenzhen, China
Factory	N/A
Address	N/A
Product Designation	BUTTON PORTABLE BLUETOOTH SPEAKER
Brand Name	MUZEN
Test Model	MW-P1I
Series Model(s)	MW-P1, MW-P1S, MW-P1C
Difference Description	All the series models are the same as the test model except for the model names and the color of appearance.
Date of receipt of test item	Jan. 09, 2025
Date of Test	Jan. 09, 2025 ~ Jan. 21, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Thea Huang Prepared By Thea Huang Jan. 21, 2025 (Project Engineer) in Lin **Reviewed By** Calvin Liu Jan. 21, 2025 (Reviewer) Approved By 10h Angela Li Jan. 21, 2025

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

(Authorized Officer)



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.0
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	0.140dBm
Hardware Version	MW-P1GJ V1.0
Software Version	V1.2
Antenna Designation	FPC Antenna
Antenna Gain	3.29dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2ALXL-P1I**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.29dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V by battery or DC 5V by adapter

3.4 Measurement Uncertainty

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty		
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$		
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$		
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$		
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$		
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$		
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$		
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$		
Uncertainty of Dwell Time	$U_c = \pm 2 \%$		



3.5 List of Equipment Use

RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20
\square	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A
 Radiated Spurious Emission 							
Used	Jsed Equipment No. Test Equipment Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD) (YY-MM-DD)						

Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

• A	AC Power Line Conducted Emission									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27			
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08			
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27			



• Tes	Test Software										
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information						
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71						
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A						
	AGC-EM-S004	RE Test System	Tonscend	TS+Ver2.1(JS32-RE)	4.0.0.0						
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6						
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0						



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

			,		
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	RISYM	USB-TTL		
2	Adapter	HUAWEI	HW-200440C00		
	Test Accessories	Come From The	Manufacturer		
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1					

Test Accessories Come From The Laboratory



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

	Summary Tab	e of Test Cases					
Test Item							
lest item	Bluetooth–LE(1Mbps)/GFSK						
Radiated & Conducted Test CasesMode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC							
AC Conducted Emission	Mode 1: Bluetooth Link	+ Battery + USB Cable (Charging	from AC Adapter)				
 The battery is full-cha For Radiated Emission For Conducted Test in 	n, 3axis were chosen for tes nethod, a temporary antenna Software Se Assist 1.0.0.2	ting for each applicable mode. connector is provided by the man stting Diagram -	ufacture.				
		▼ 清除日志					




6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	erating mode T(µs)		Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	
BLE_1Mbps	90	14.29	8.45	11.11	
BLE_2Mbps	N/A	N/A	N/A	N/A	

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value
- The test plots as follows:

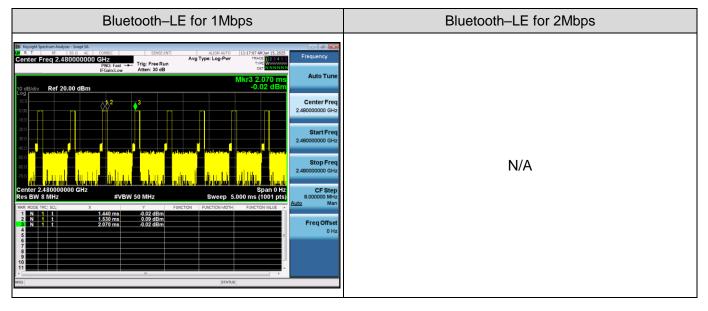



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW≥[3 × RBW].
- 4. Span≥[3 × RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

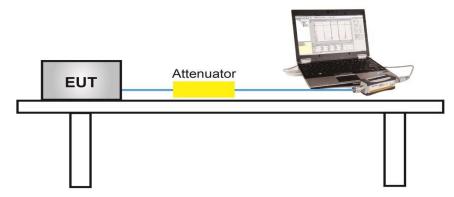




For peak power test setup

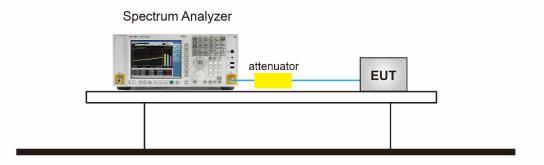

7.4 Measurement Result

Test Data of Conducted Output Power									
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail					
	2402	-1.635	≪30	Pass					
GFSK_1Mbps	2440	-0.680	≪30	Pass					
	2480	0.140	≤30	Pass					



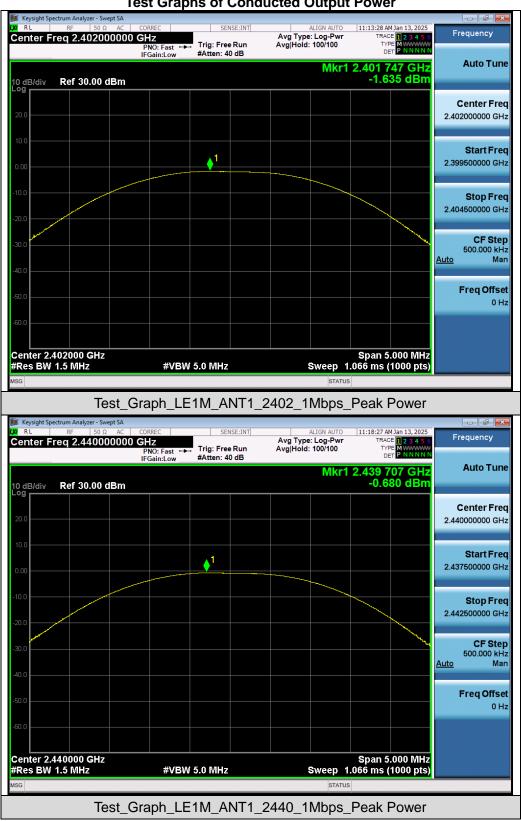

Test Graphs of Conducted Output Power



	ectrum Analyzer - Swep										
Contor F	RF 50 Ω reg 2.48000			SEN	SE:INT		ALIGN AUTO		4 Jan 13, 2025 E 1 2 3 4 5 6	Frequ	ency
	Teq 2.48000	PN	O: Fast ↔ ain:Low	, Trig: Free #Atten: 40	Run) dB	Avg Hold:	: 100/100	TYP	32 GHz	Au	ito Tune
10 dB/div Log	Ref 30.00 d	Bm						0.1	40 dBm		
											ter Frec
20.0										2.48000	0000 GH:
10.0				1							artFree
0.00			****							2.47750	0000 GH
-10.0										St 2.48250	op Fre 0000 GH
-20.0											CF Ster
-30.0											0.000 kH Ma
-50.0										Fre	qOffse
-60.0											0 H
#Res BW	480000 GHz 1.5 MHz		#VBW	/ 5.0 MHz			Sweep 1	.066 ms (.000 MHz 1000 pts)		
MSG	STATUS										
	Test_Graph_LE1M_ANT1_2480_1Mbps_Peak Power										



8. 6dB Bandwidth Measurement


8.1 Provisions Applicable

The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

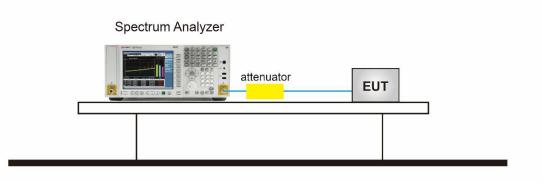





8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth									
Test Mode Test Frequency (MHz)		Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail				
	2402	1.016	0.502	≥0.5	Pass				
GFSK_1Mbps	2440	1.016	0.503	≥0.5	Pass				
	2480	1.016	0.503	≥0.5	Pass				

Test Graphs of Occupied Bandwidth

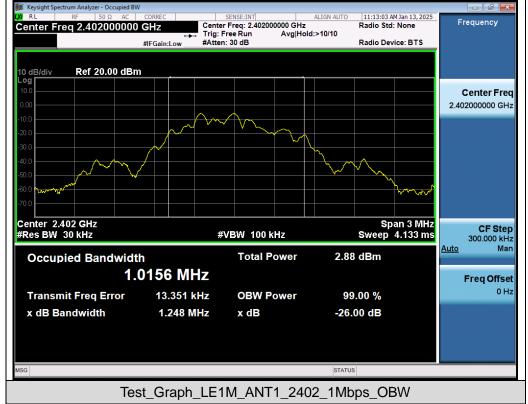




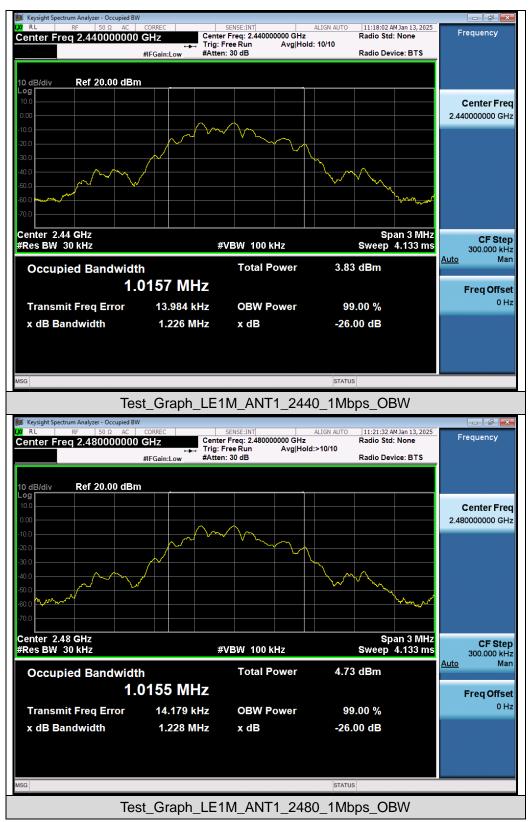





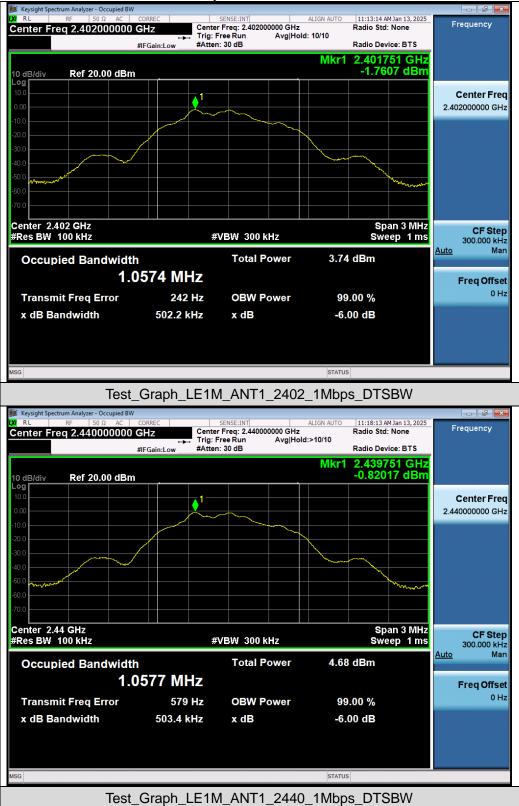



💓 Keysight Spectrum Analyzer - Occupied BW					- d -	
RL RF 50 Ω AC COR CO	Center F	ENSE:INT Freq: 2.480000000 GH;		11:21:42 AM Jan 13, 2025 Radio Std: None	Frequency	
	→→ Trig: Fre		old: 10/10	Radio Device: BTS		
			Mkr1	2.479751 GHz		
10 dB/div Ref 20.00 dBm				0.075361 dBm		
Log						
0.00	\ 1				Center Freq 2.48000000 GHz	
-10.0					2.480000000 GHZ	
-20.0			<u>_</u>			
-30.0						
-40.0				\sim		
-50.0 0000000000000000000000000000000000						
-60.0				" www.		
-70.0						
				0		
Center 2.48 GHz #Res BW 100 kHz	#V	BW 300 kHz		Span 3 MHz Sweep 1 ms	CF Step 300.000 kHz	
					Auto Man	
Occupied Bandwidth		Total Power	5.58	3 dBm		
1.05	86 MHz				Freq Offset	
Transmit Freg Error	695 Hz	OBW Power	99	.00 %	0 Hz	
x dB Bandwidth	502.9 kHz	x dB		00 dB		
	502.5 KHZ	X UB	-0.			
MSG			STATUS	5		
Test_Graph_LE1M_ANT1_2480_1Mbps_DTSBW						
iest_G	raph_LE1M	_ANT1_248		S_DI2RM		



9. Power Spectral Density Measurement


9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

- The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- 6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

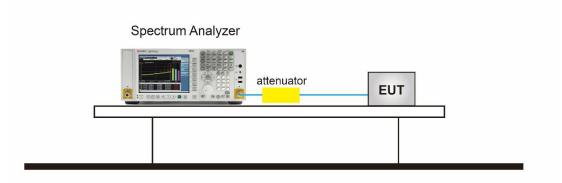





9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density								
Test Mode	Test Frequency (MHz) Power density (dBm/3kHz) Limit (dBm/3kHz)							
	2402	-20.062	≪8	Pass				
GFSK_1Mbps	2440	-19.081	≪8	Pass				
	2480	-18.185	≪8	Pass				

Test Graphs of Conducted Output Power Spectral Density

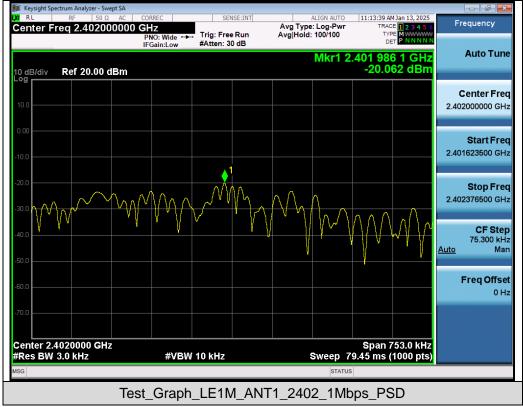



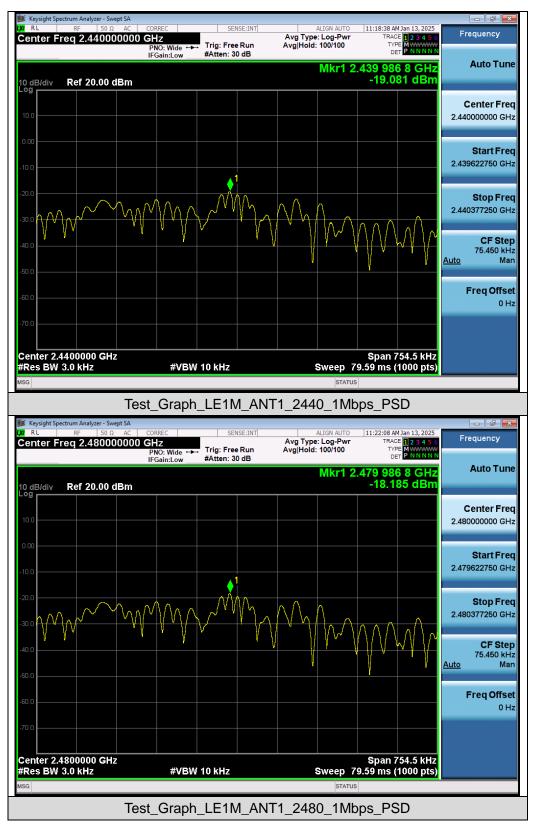



10. Conducted Band Edge and Out-of-Band Emissions


10.1 Provisions Applicable

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \ge 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

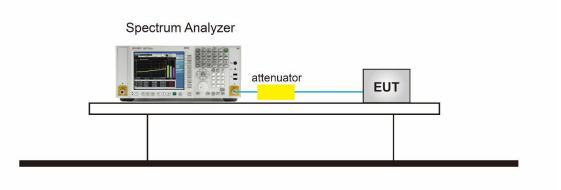




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




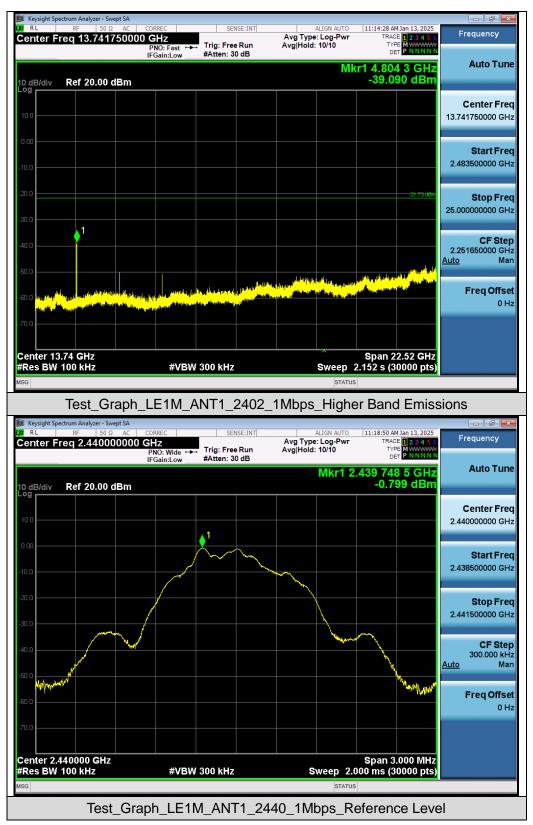



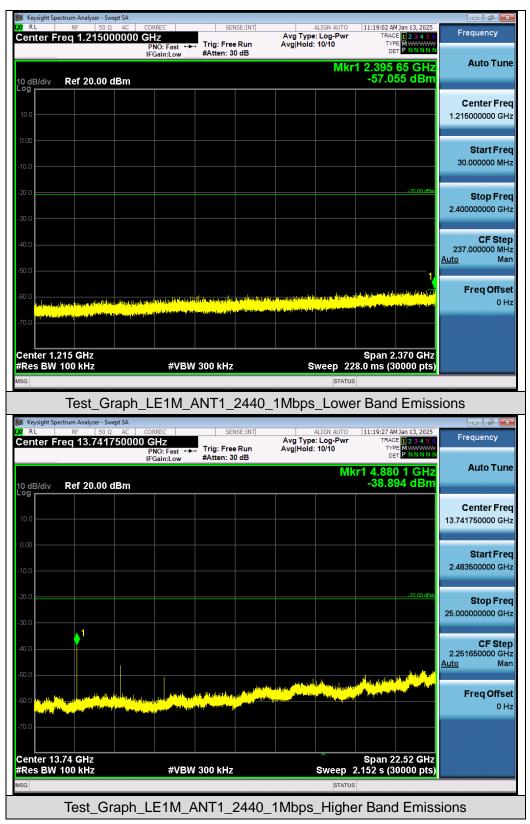




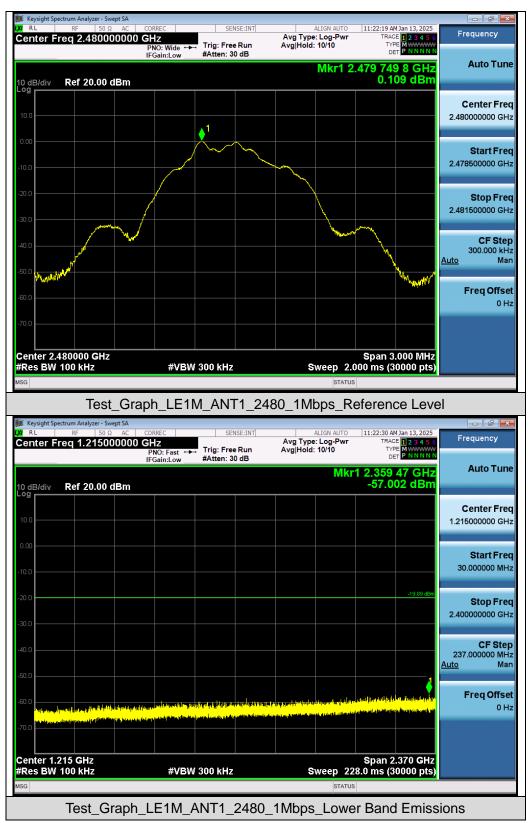



Og Center Freq 13.75000000 GHz 13.750000000 GHz 13.75000000 GHz 13.750000000 GHz 13.75000000 GHz 13.75000000 GHz 13.750000000 GHz 13.75000000 GHz 14.1500 Man 15.1500 Man 15.1	🗱 Keysight Spectrum Analyzer - Swept SA 👘 💼 📾										
Auto Tune Mkr1 7.438 9 GHz -41.548 dBm Center Freq 13.75000000 GHz -41.548 dBm Center Freq 13.75000000 GHz -19.99 dB Center Freq 2.50000000 GHz -19.99 dB -19.99 d			00000 C	Hz			Avg Type	: Log-Pwr	TRAC TYP	E 1 2 3 4 5 6 E M WWWW	Frequency
00 Center Freq 13.75000000 GHz 00 1 00 1 00 1 00 1 00 1 00 1 01 1 02 1 03 1 04 1 05 1 06 1 11 1 12 1 13 1 14 1 15 1 16 1 17 1 18 1 19 1 10 1 10 1 11 1 12 1 13 1 14 1 15 1 16 1 17 1 18 1 19 1 10 1 10 1 10 1 10 1	10 dB/div	Ref 20.00 d	IF						or 17.438	B 9 GHz	Auto Tune
Start Freq 2.50000000 GHz 2.50000000 GHz 2.50000000 GHz 2.250000000 GHz	10.0										•
Stop Freq 25.0000000 GHz 1 CF Step 2.25000000 GHz Auto Man Freq Offset 0 Hz enter 13.75 GHz Span 22.50 GHz	-10.0										
enter 13.75 GHz Span 22.50 GHz	-20.0									-19.89 dBm	
enter 13.75 GHz Span 22.50 GHz	-40.0		● ¹							لم الد الد	2.250000000 GHz
enter 13.75 GHz Span 22.50 GHz	-60.0 <mark>-60.0 -70.0</mark>				inkalikasi kitasi ^{Man} un ⁿ istra kata			addillada a sin dhina S ^{an} aringang pakin			-
	Center 1: #Res BW			#VBW	300 kHz				2.152 s (3	2.50 GHz 0000 pts)	
Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Emissions											

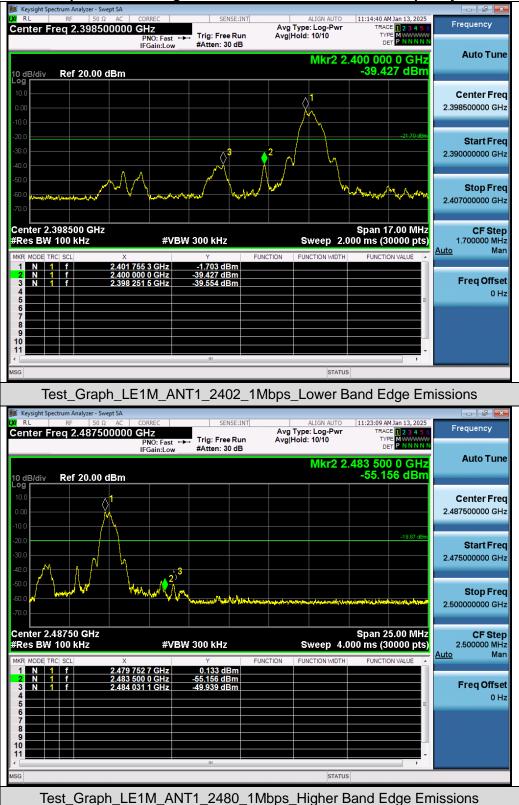

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



11. Radiated Spurious Emission

11.1 Measurement Limit

• FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



- 8. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 9. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9kHz~150kHz/RB 200Hz for QPStart ~Stop Frequency150kHz~30MHz/RB 9kHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120kHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting		
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP		
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP		



Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

• Average Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)

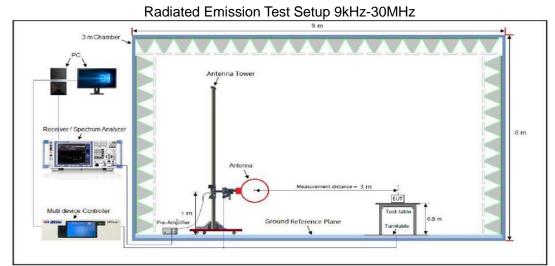

Radiated Emission Test Setup 30MHz-1000MHz

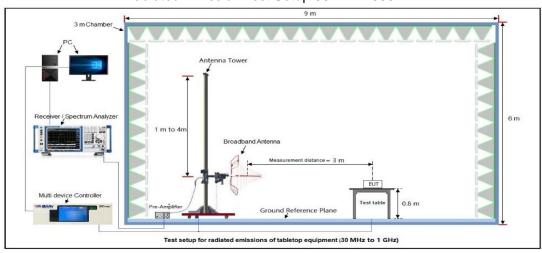

Radiated Emission Test Setup Above 1000MHz

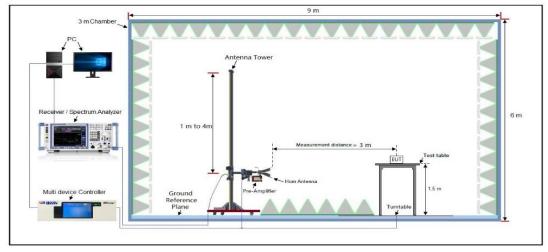



11.4 Measurement Result


Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

	Radiate	d Emissio	on Test Re	sults	at 30	MHZ-1GF	iz		
BUTTON PO SPEAKER	RTABLE	BLUETC	DOTH	I	Mode	l Name		MW-P1	I
22.3℃ Relative Humidity			56.8%						
960hPa				•	Test V	/oltage		Normal	Voltage
Mode 3					Anten	na Polar	ity	Horizon	tal
dBuV/m									
			2 	3	30	4 4 0 400	5	Margin: —	
1 45.3 2 137.9 3 240.8 4 440.7 5 530.7	Freq. MHz 3755 9028 8304 1963 1014	Reading Level dBuV 6.55 8.24 9.47 5.98 7.94 6.68	Correct Factor dB 13.52 15.33 15.38 25.09 24.54 31.03	m dBu 20 23 24 31 32	ent V/m .07 .57 .85 .07 .48	Limit	dB -19.9 -19.9 -21.1 -14.9 -13.5	Detecto 3 peak 3 peak 5 peak 3 peak 2 peak	
	SPEAKER 22.3°C 960hPa Mode 3 dBuV/m 00 40 50 No. Mk. F 1 45.3 2 137.9 3 240.3 4 440.5 5 530.	SPEAKER 22.3°C 960hPa Mode 3 dBuV/m dBuV/m 00 40 00 50 60 70 80 No.<	SPEAKER 22.3°C 960hPa Mode 3 dBuV/m dBuV/m 00 40 5 530.1014 7.94	22.3°C 960hPa Mode 3	SPEAKER I 22.3°C I 960hPa I Mode 3 I dBuV/m I Image: Speaker of the system o	SPEAKER Mode 22.3°C Relati 960hPa Test V Mode 3 Anten dBuV/m Anten dBuV/m Image: Speaker of the second	SPEAKER Model Name 22.3 °C Relative Humin 960hPa Test Voltage Model 3 Antenna Polar dBuV/m Image: Speaker Strateging Strat	SPEAKER Model Name 22.3°C Relative Humidity 960hPa Test Voltage Model 3 Antenna Polarity dBuV/m Image: Second	SPEAKER Model Name MW-P1 22.3°C Relative Humidity 56.8% 960hPa Test Voltage Normal Model 3 Antenna Polarity Horizon d8wV/m Image: Construction of the second o



Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	BUTTON PORTABLE BLUETOOTH SPEAKER	Model Name	MW-P1I		
Temperature	22.3℃	Relative Humidity	56.8%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 3	Antenna Polarity	Vertical		

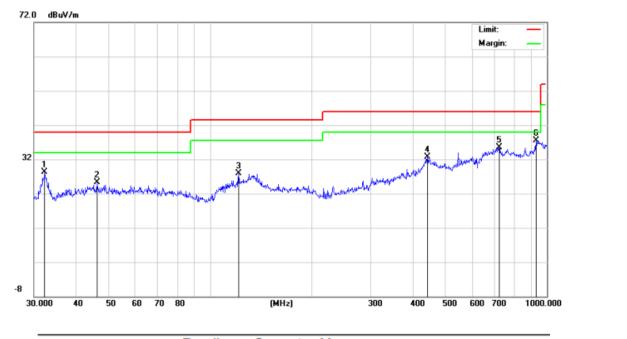

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		32.2925	14.00	14.36	28.36	40.00	-11.64	peak
2		46.1779	8.29	16.96	25.25	40.00	-14.75	peak
3		121.5486	10.21	17.74	27.95	43.50	-15.55	peak
4		441.7426	6.74	26.02	32.76	46.00	-13.24	peak
5		721.7259	6.85	28.64	35.49	46.00	-10.51	peak
6	*	929.0082	8.01	29.52	37.53	46.00	-8.47	peak

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.



Radiated Emissions Test Results for Above 1GHz

EUT Name		BUTTON PORTABLE BLUETOOTH SPEAKER			Model Name		MW-P1I	
Temperature	22.3 ℃	22.3°C		Relative Humidity		56.8%	56.8%	
Pressure	960hPa			Test V	Voltage	Normal	/oltage	
Test Mode	Mode 1			Anter	nna Polarity	Horizont	al	
Frequency	Meter Reading	Factor	Emissior	n Level	Limits	Margin		
(MHz)	(dBµV)	(dB)	(dBµV	//m)	(dBµV/m)	(dB)	Value Type	
4804.000	46.28	0.08	46.3	86	74.00	-27.64	peak	
4804.000	36.43	0.08	36.5	51	54.00	-17.49	AVG	
7206.000	41.16	2.21	43.3	37	74.00	-30.63	peak	
7206.000	30.58	2.21	32.7	'9	54.00	-21.21	AVG	
Remark:								
	na Factor + Cab	le Loss – Pre-a	amplifier.					
			amplifier.			_		
	BUTTON P		amplifier.	Mode	I Name	MW-P1I		
Factor = Anter	BUTTON P	ORTABLE	amplifier.		I Name ive Humidity	MW-P1I 56.8%		
Factor = Anter	BUTTON P BLUETOO	ORTABLE	amplifier.	Relat			/oltage	
Factor = Anter EUT Name Temperature	BUTTON P BLUETOO 22.3°C	ORTABLE	amplifier.	Relat Test	ive Humidity	56.8%	/oltage	
Factor = Anter	BUTTON P BLUETOO 22.3°C 960hPa Mode 1	ORTABLE TH SPEAKER		Relat Test V Anter	ive Humidity /oltage nna Polarity	56.8% Normal Vertical	/oltage	
Factor = Anter	BUTTON P BLUETOO 22.3°C 960hPa Mode 1 Meter Reading	ORTABLE TH SPEAKER Factor	Emission	Relat	ive Humidity Voltage nna Polarity Limits	56.8% Normal Vertical Margin	/oltage Value Type	
Factor = Anter	BUTTON P BLUETOO 22.3°C 960hPa Mode 1 Meter Reading (dBµV)	ORTABLE TH SPEAKER Factor (dB)	Emission (dBµV	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m)	56.8% Normal V Vertical Margin (dB)	Value Type	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	BUTTON P BLUETOO 22.3°C 960hPa Mode 1 Meter Reading (dBµV) 46.80	ORTABLE TH SPEAKER Factor (dB) 0.08	Emission (dBµV 46.8	Relat Test V Anter	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00	56.8% Normal V Vertical Margin (dB) -27.12	Value Type	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	BUTTON P BLUETOO 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.80 35.08	PORTABLE TH SPEAKER Factor (dB) 0.08 0.08	Emissior (dBµV 46.8 35.1	Relat Test M Anter h Level //m) 88 6	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00	56.8% Normal V Vertical Margin (dB) -27.12 -18.84	Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 7206.000	BUTTON P BLUETOO 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.80 35.08 44.51	PORTABLE TH SPEAKER Factor (dB) 0.08 0.08 2.21	Emission (dBµV 46.8 35.1 46.7	Relat Test V Anter Mn) 38 6 22	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00 74.00	56.8% Normal V Vertical Margin (dB) -27.12 -18.84 -27.28	Value Type peak AVG peak	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	BUTTON P BLUETOO 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.80 35.08	PORTABLE TH SPEAKER Factor (dB) 0.08 0.08	Emissior (dBµV 46.8 35.1	Relat Test M Anter M Level (/m) 38 6 22	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00	56.8% Normal V Vertical Margin (dB) -27.12 -18.84	Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 7206.000 7206.000	BUTTON P BLUETOO 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.80 35.08 44.51	PORTABLE TH SPEAKER Factor (dB) 0.08 0.08 2.21	Emission (dBµV 46.8 35.1 46.7	Relat Test M Anter M Level (/m) 38 6 22	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00 74.00	56.8% Normal V Vertical Margin (dB) -27.12 -18.84 -27.28	Value Type peak AVG peak	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000 7206.000 Remark:	BUTTON P BLUETOO 22.3 °C 960hPa Mode 1 Meter Reading (dBµV) 46.80 35.08 44.51	PORTABLE TH SPEAKER Factor (dB) 0.08 0.08 2.21 2.21	Emissior (dBµV 46.8 35.1 46.7 33.8	Relat Test M Anter M Level (/m) 38 6 22	ive Humidity Voltage nna Polarity Limits (dBµV/m) 74.00 54.00 74.00	56.8% Normal V Vertical Margin (dB) -27.12 -18.84 -27.28	Value Type peak AVG peak	

RESULT: Pass



Radiated Emissions Test Results for Above 1GHz

El	JT Name		BUTTON PORTABLE BLUETOOTH SPEAKER			el Name	MW-P1I		
Te	emperature 22.3 °C			Relat	ive Humidity	56.8%	56.8%		
Pr	essure	960hPa			Test	Voltage	Normal	Voltage	
Te	est Mode	Mode 2			Ante	nna Polarity	Horizont	al	
	Frequency	Meter Reading	Factor	Emissio	n Level	Limits	Margin	Value Type	
	(MHz)	(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)	(dB)	value Type	
	4880.000	46.24	0.14	46.3	38	74.00	-27.62	peak	
	4880.000	37.84	0.14	37.9	98	54.00	-16.02	AVG	
	7320.000	44.72	2.36	47.0)8	74.00	-26.92	peak	
	7320.000	36.26	2.36	38.6	62	54.00	-15.38	AVG	
	Remark:								
	Factor = Anter	na Factor + Cab	e Loss – Pre-	amplifier.					
El	JT Name	BUTTON F	ORTABLE TH SPEAKER		Model Name		MW-P1I		
Тє	emperature	22.3 ℃	-		Relat	ive Humidity	56.8%		
Pr	essure	960hPa			Test Voltage		Normal	Normal Voltage	
Те	est Mode	Mode 2			Ante	nna Polarity	Vertical		
		Mater D				ine !t-	Maxaira		
	Frequency	Meter Reading	Factor	Emissio		Limits	Margin	Value Type	
	(MHz)	(dBµV)	(dB)	(dBµ\	,	(dBµV/m)	(dB)	nee!	
	4882.000	48.07	0.14	48.2		74.00	-25.79	peak AVG	
	4882.000	36.21	0.14	36.3		54.00	-17.65		
	7323.000	44.38	2.36	46.7		74.00	-27.26	peak AVG	
	7323.000	31.42	2.36	33.7	б	54.00	-20.22	AVG	
	Remark:	na Factor + Cab							

RESULT: Pass



Radiated Emissions Test Results for Above 1GHz

EUT Name		BUTTON PORTABLE BLUETOOTH SPEAKER			I Name	MW-P1I		
Temperature 22.3 °C		Relative Humidity		56.8%	56.8%			
Pressure	960hPa			Test V	/oltage	Normal V	oltage	
Test Mode	Mode 3			Anten	na Polarity	Horizonta	al	
Frequency	Meter Reading	Factor	Emissic	on Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµ	V/m)	(dBµV/m)	(dB)	value Type	
4960.000	47.39	0.22	47.	.61	74.00	-26.39	peak	
4960.000	38.71	0.22	38.	.93	54.00	-15.07	AVG	
7440.000	43.92	2.64	46.	.56	74.00	-27.44	peak	
7440.000	37.88	2.64	40.	.52	54.00	-13.48	AVG	
	<u> </u>							
Remark:	<u> </u>							
Factor = Anter	nna Factor + Cab	<u>le Loss – Pre-a</u>	amplifier.					
EUT Name		BUTTON PORTABLE BLUETOOTH SPEAKER			Model Name		MW-P1I	
Temperature	22.3 ℃			Relative Humidity 56.8%				
Pressure	960hPa			Test V		Normal V	(alta aa	
					onage		onage	
Test Mode	Mode 3			Anten	na Polarity	Vertical		
Test Mode					na Polarity	Vertical		
Frequency	Meter Reading	Factor	Emissic	on Level	na Polarity	Vertical Margin	Value Type	
Frequency (MHz)	Meter Reading (dBµV)	(dB)	(dBµ	on Level V/m)	Limits (dBµV/m)	Vertical Margin (dB)	Value Type	
Frequency (MHz) 4960.000	Meter Reading (dBµV) 46.05	(dB) 0.22	(dBµ 46.	on Level V/m) .27	Limits (dBµV/m) 74.00	Vertical Margin (dB) -27.73	- Value Type peak	
Frequency (MHz) 4960.000 4960.000	Meter Reading (dBµV) 46.05 35.61	(dB) 0.22 0.22	(dBµ 46. 35.	on Level V/m) .27 .83	Limits (dBµV/m) 74.00 54.00	Vertical Margin (dB) -27.73 -18.17	Value Type peak AVG	
Frequency (MHz) 4960.000 4960.000 7440.000	Meter Reading (dBµV) 46.05 35.61 41.41	(dB) 0.22 0.22 2.64	(dBµ) 46. 35. 44.	on Level V/m) .27 .83 .05	Limits (dBµV/m) 74.00 54.00 74.00	Vertical Margin (dB) -27.73 -18.17 -29.95	Value Type peak AVG peak	
Frequency (MHz) 4960.000 4960.000	Meter Reading (dBµV) 46.05 35.61	(dB) 0.22 0.22	(dBµ 46. 35.	on Level V/m) .27 .83 .05	Limits (dBµV/m) 74.00 54.00	Vertical Margin (dB) -27.73 -18.17	Value Type peak AVG	
Frequency (MHz) 4960.000 4960.000 7440.000	Meter Reading (dBµV) 46.05 35.61 41.41	(dB) 0.22 0.22 2.64	(dBµ) 46. 35. 44.	on Level V/m) .27 .83 .05	Limits (dBµV/m) 74.00 54.00 74.00	Vertical Margin (dB) -27.73 -18.17 -29.95	Value Type peak AVG peak	
Frequency (MHz) 4960.000 4960.000 7440.000	Meter Reading (dBµV) 46.05 35.61 41.41	(dB) 0.22 0.22 2.64	(dBµ) 46. 35. 44.	on Level V/m) .27 .83 .05	Limits (dBµV/m) 74.00 54.00 74.00	Vertical Margin (dB) -27.73 -18.17 -29.95	Value Type peak AVG peak	

RESULT: Pass


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



EUT Name	BUTTON PORTABLE BLUETOOTH SPEAKER	Model Name	MW-P1I
Temperature	22.3 ℃	Relative Humidity	56.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

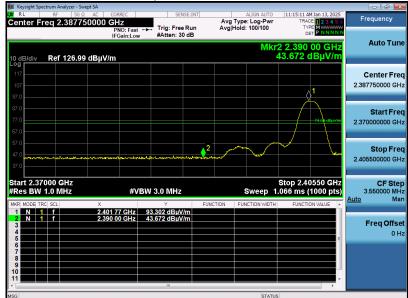

Test Graph for Average Measurement




RESULT: Pass



EUT Name	BUTTON PORTABLE BLUETOOTH SPEAKER	Model Name	MW-P1I
Temperature	22.3 ℃	Relative Humidity	56.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

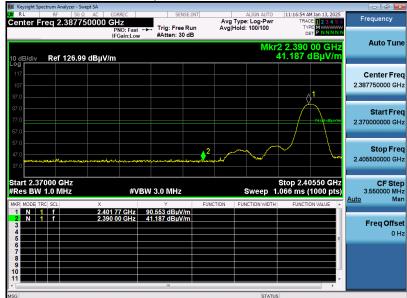

Test Graph for Average Measurement




RESULT: Pass




EUT Name	BUTTON PORTABLE BLUETOOTH SPEAKER	Model Name	MW-P1I
Temperature	22.3 ℃	Relative Humidity	56.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

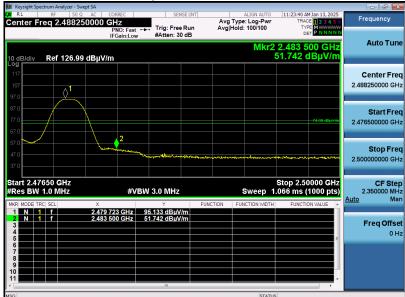

Test Graph for Average Measurement

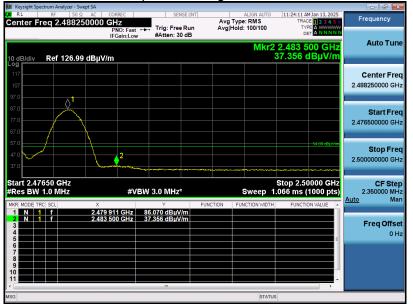


RESULT: Pass



EUT Name	BUTTON PORTABLE BLUETOOTH SPEAKER	Model Name	MW-P1I
Temperature	22.3 ℃	Relative Humidity	56.8%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

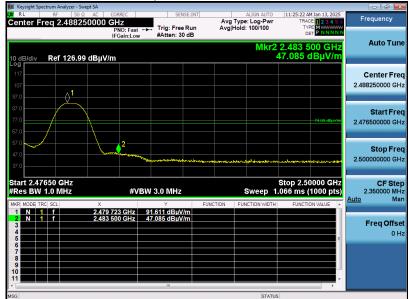

Test Graph for Average Measurement



RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


F	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

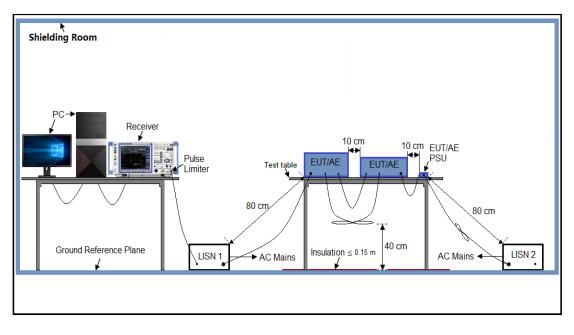



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


12.5 Measurement Results



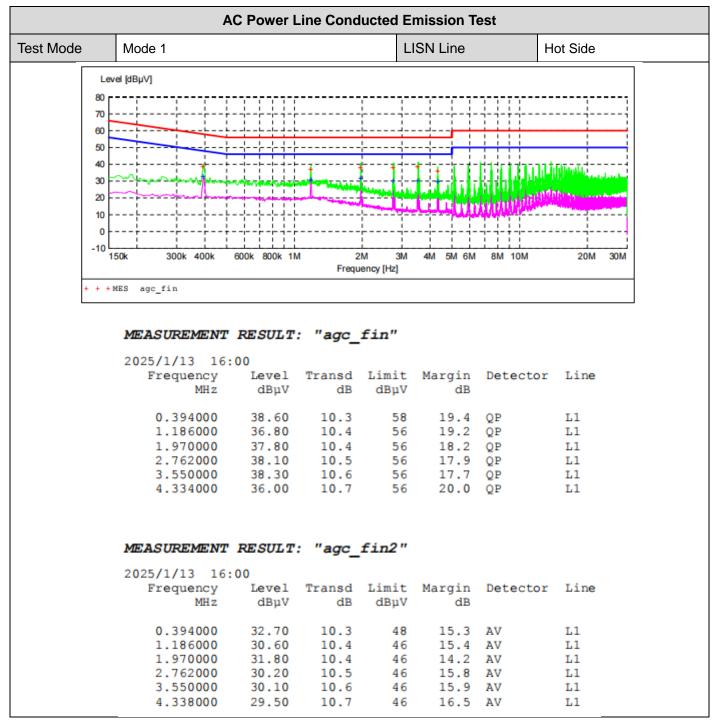

RESULT: PASS



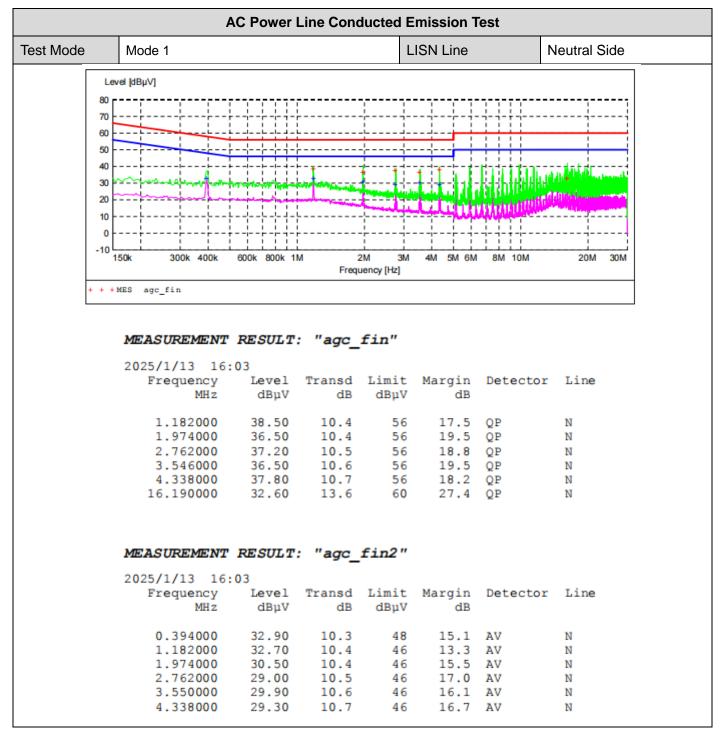

RESULT: PASS

Report No.: AGC04316250102FR02 Page 52 of 52



Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC04316250102AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC04316250102AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.