



TEST REPORT

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr		Report No.: KR23-SRF0224 Page (1) of (120)	KCTL
1. Client - Name : Samsung Electronics Co., Ltd. - Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea - Date of Receipt : 2023-08-24			
2. Use of Report : Certification			
3. Name of Product / Model : Tablet PC / SM-X306B			
4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Vietnam			
5. FCC ID : A3LSMX306B			
6. Date of Test : 2023-09-19 to 2023-10-27			
7. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)			
8. Test method used : FCC Part 15 Subpart C, 15.247			
9. Test Result : Refer to the test result in the test report			
Affirmation	Tested by Name : Sunghyun Yoon (Signature)		Technical Manager Name : Seungyong Kim (Signature)
2023-11-06			
Eurofins KCTL Co.,Ltd.			
As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.			

REPORT REVISION HISTORY

Date	Revision	Page No
2023-11-06	Originally issued	-

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	5
2.2.	Duty Cycle Factor	6
3.	Antenna requirement	8
3.1	Antenna information.....	9
3.2	Directional Gain Calculations.....	9
4.	Summary of tests.....	10
5.	Measurement uncertainty	11
6.	Measurement results explanation example	12
7.	Test results	13
7.1.	Maximum peak output power.....	13
7.2.	Peak Power Spectral Density	20
7.3.	6 dB Bandwidth(DTS Channel Bandwidth) & 99% Bandwidth.....	26
7.4.	Spurious Emission, Band Edge and Restricted bands.....	36
7.5.	Conducted Spurious Emission.....	99
7.6.	AC Conducted emission	118
8.	Measurement equipment.....	120

1. General information

Client : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Manufacturer : Samsung Electronics Co., Ltd.
 Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
 Factory : Samsung Electronics Vietnam Thai Nguyen Co., Ltd
 Address : Yen Binh Industrial Park, Dong Tien Ward, Pho Yen Town, Thai Nguyen Province, Vietnam
 Laboratory : Eurofins KCTL Co.,Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
 CAB Identifier: KR0040
 ISED Number: 8035A
 KOLAS No.: KT231

2. Device information

Equipment under test : Tablet PC
 Model : SM-X306B
 Modulation technique : WIFI(802.11b/g/n/ax) : DSSS, OFDM, OFDMA
 Number of channels : 13 ch (20 MHz)
 Power source : DC 3.85 V
 Antenna specification : Antenna 1 : LDS Antenna
 Antenna 2 : LDS Antenna
 Antenna gain : Antenna 1 : -4.00 dBi
 Antenna 2 : -4.00 dBi
 Frequency range : 2 412 MHz ~ 2 472 MHz (802.11b/g/n/ax_HT20/HE20)
 Software version : X306B.001
 Hardware version : REV1.0
 Test device serial No. : Conducted : R32W80011PV
 Radiated : R32W80019GF
 Operation temperature : 0 °C ~ 35 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

WLAN (11a/b/g/n/ac/ax), Bluetooth (BDR/EDR/BLE), NR n5/66, LTE B2/4/5/12/13/17/26/41/66, GSM 850/1900, WCDMA 850/1700/1900, NFC, Digitizer

Ch.	Frequency (MHz)
01	2 412
.	.
06	2 437
.	.
11	2 462
12	2 467
13	2 472

Table 2.1-1. 802.11b/g/n_HT20 mode


2.2. Duty Cycle Factor

SISO

Test mode	Period (ms)	On time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
802.11b	8.720	8.609	0.987 3	98.73	0.06
802.11g	1.520	1.420	0.934 2	93.42	0.30
802.11n_HT20	1.431	1.331	0.930 1	93.01	0.31

Notes.

1. Duty cycle (Linear) = Ton time / Period
2. DCF(Duty cycle factor) = $10\log(1/\text{duty cycle})$
3. DCF is not compensated to Average result if duty cycle is more than 98%

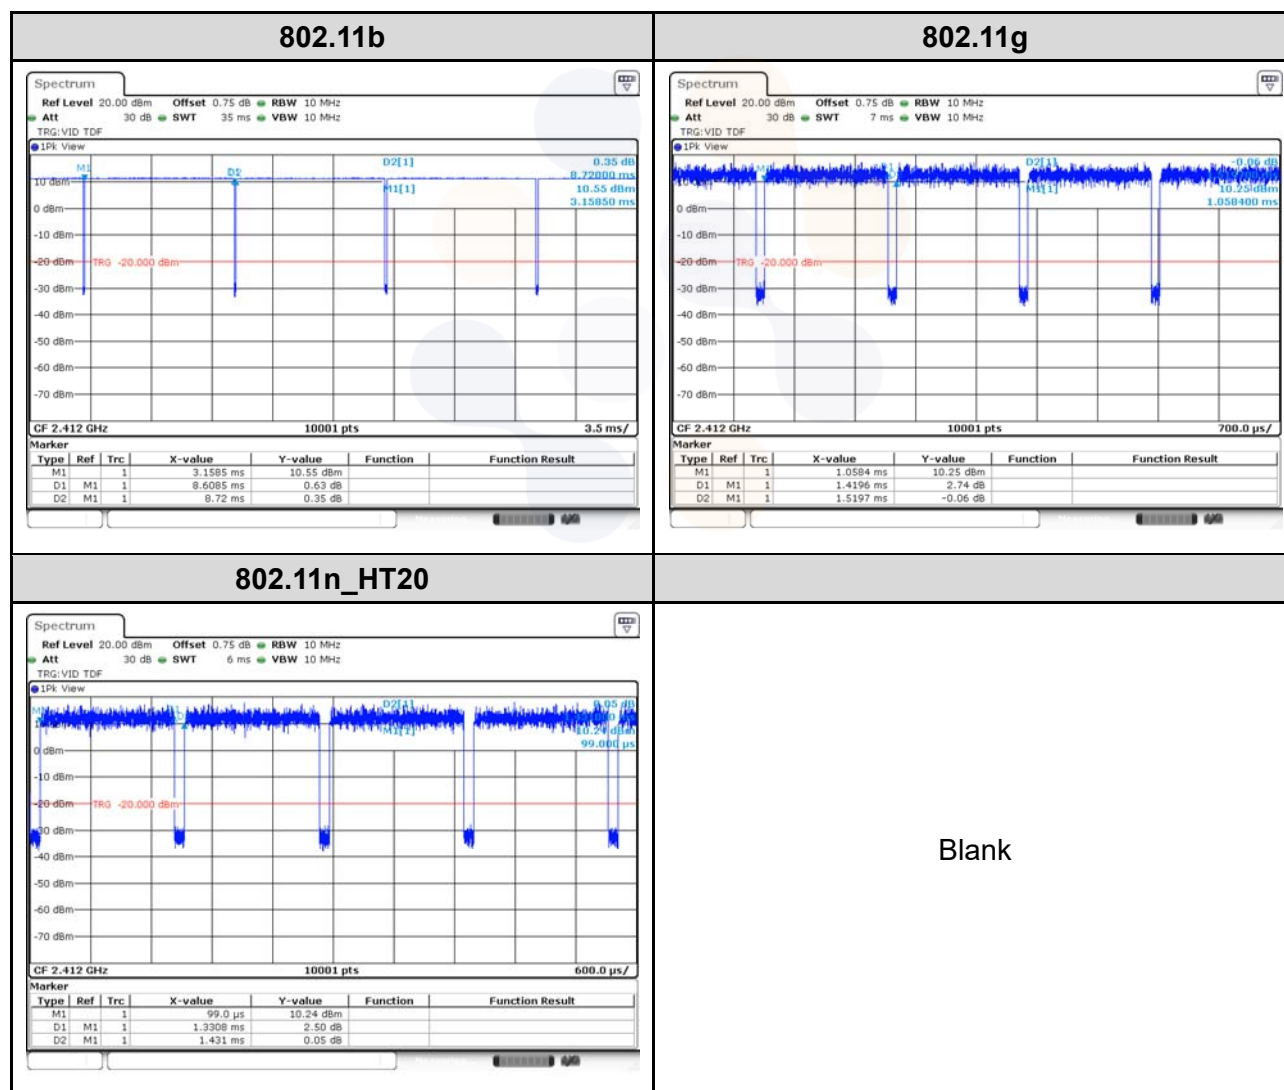


MIMO

Test mode	Period (ms)	On time (ms)	Duty cycle		Duty Cycle Factor (dB)
			(Linear)	(%)	
802.11b	8.720	8.605	0.986 8	98.68	0.06
802.11g	1.520	1.420	0.934 2	93.42	0.30
802.11n_HT20	0.791	0.690	0.872 3	87.23	0.59

Notes.

1. Duty cycle (Linear) = Ton time / Period
2. DCF(Duty cycle factor) = $10\log(1/\text{duty cycle})$
3. DCF is not compensated to Average result if duty cycle is more than 98%

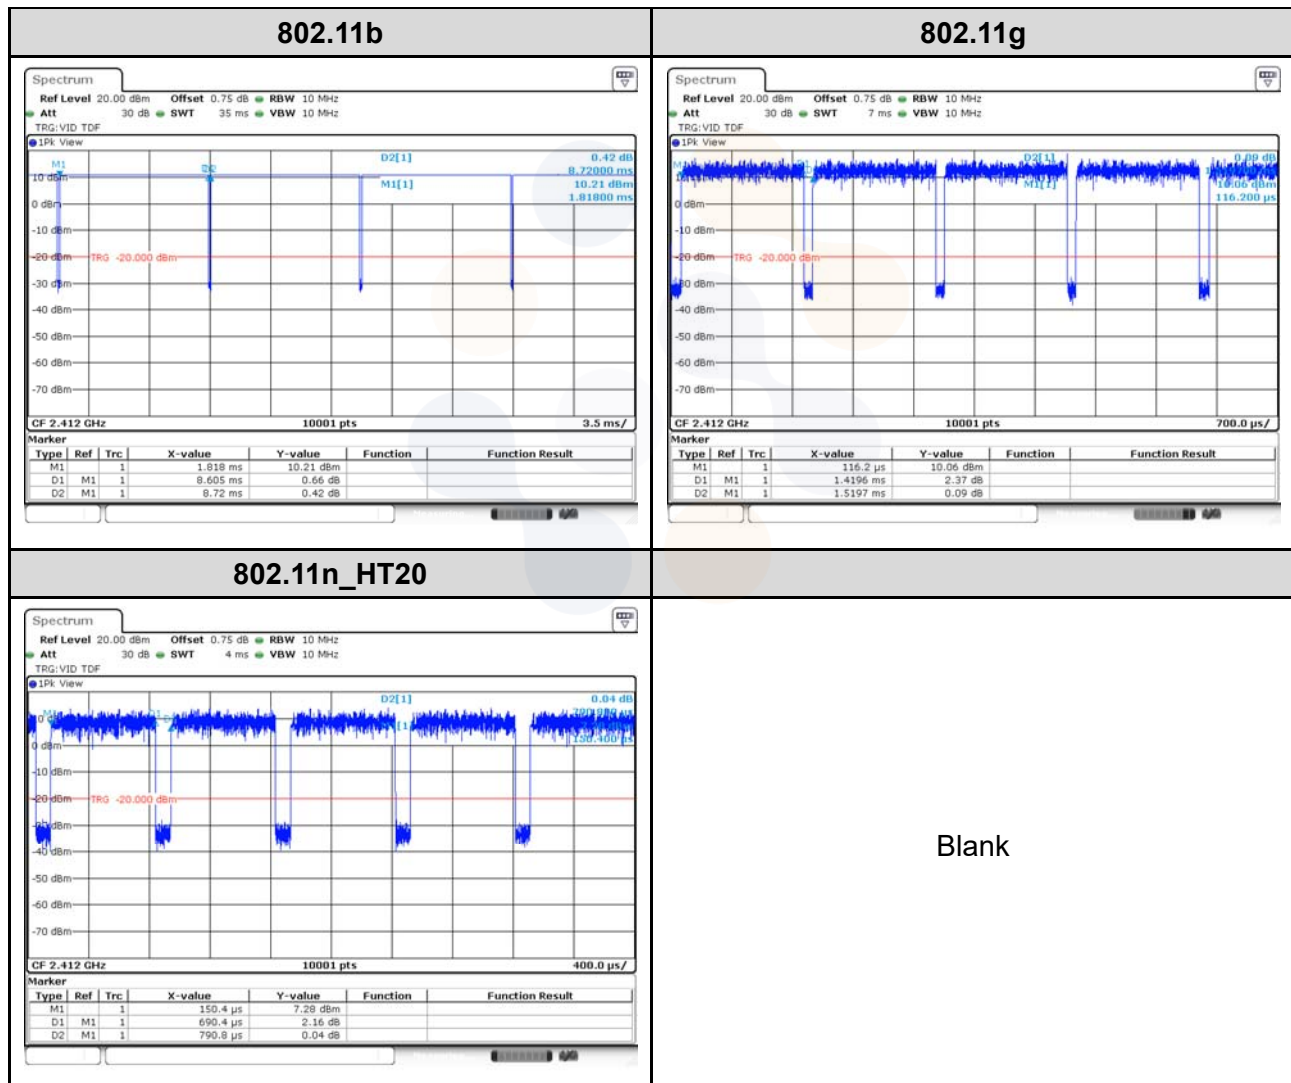

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0224 Page (8) of (120)	
--	---	---

3. Antenna requirement

Requirement of FCC part section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Requirement of RSS-Gen Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

- The transmitter has permanently attached LDS Antenna (Internal antenna) on board.
- The E.U.T Complies with the requirement of §15.203, §15.247.

3.1 Antenna information

Mode	SISO		CDD	SDM
	ANT 1	ANT 2	ANT 1 + 2	ANT 1 + 2
802.11b	√	X	√	X
802.11g	√	X	√	X
802.11n HT20	√	X	X	√

√ = Support, X = Not support

3.2 Directional Gain Calculations

According to clause F), 2), d), (i) and (ii) of KDB 662911 D01 Multiple Transmitter Output, Directional gain may be calculated by using the formulas as below.

Directional Antenna Gain

ANT 1 Gain (dBi)	ANT 2 Gain (dBi)	Combined Gain (dBi)
-4.00	-4.00	-0.99

Correlated_CDD

ANT 1 Gain (dBi)	ANT 2 Gain (dBi)	Combined Gain (dBi)
-4.00	-4.00	-4.00

Uncorrelated_SDM

Note.

1. Correlated_CDD

Unequal antenna gains, with equal transmit powers. For antenna gains given by $G_1, G_2, \dots, G_N$ dBi
 Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dB i

Sample calculation

Directional gain = $10 \log[(10^{-4.00/20} + 10^{-4.00/20})^2 / 2] = -0.99$ dB i

2. Uncorrelated_SDM

Unequal antenna gains, with equal transmit powers. For antenna gains given by $G_1, G_2, \dots, G_N$ dBi
 Directional gain = $10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{ANT}]$ dB i

Sample calculation

Directional gain = $10 \log[(10^{-4.00/10} + 10^{-4.00/10}) / 2] = -4.00$ dB i

4. Summary of tests

FCC Part section(s)	IC Rule Referene	Parameter	Test Condition	Test results
15.247(b)(3)	RSS-247 (5.4)(d)	Maximum peak output power	Conducted	Pass
15.247(e)	RSS-247 (5.2)(b)	Peak power spectral density		Pass
15.247(a)(2)	RSS-247 (5.2)(a)	6 dB channel bandwidth		Pass
-	RSS-Gen (6.7)	Occupied Bandwidth		Pass
15.207(a)	RSS-Gen (8.8)	AC Conducted Emissions		Pass
15.247(d)	RSS-247 (5.5)	Conducted Spurious Emissions		Pass
15.205(a), 15.209(a)	RSS-Gen (8.9), (8.10)	Spurious emission	Radiated	Pass
		Band-edge, restricted band		Pass

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
3. EUT was investigated in three orthogonal orientations X, Y and Z. it was determined that Y orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y orientation.
4. All configurations have been performed (Stand-alone, Stand-alone with TA, With accessories).
Worst case: Stand-alone
5. The test procedure(s) in this report were performed in accordance as following.
 - ◆ ANSI C63.10-2013
 - ◆ KDB 558074 D01 v05r02
 - ◆ KDB 662911 D01 v02r01
6. The worst-case data rate were:
 - 802.11b mode: 1Mbps
 - 802.11g mode: 6Mbps
 - 802.11n_HT20 mode: MCS8

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ($\pm$)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.3 dB	
Radiated spurious emissions	Below 30 MHz:	2.3 dB
	30 MHz ~ 1 000 MHz	2.5 dB
	1 000 MHz ~ 18 000 MHz	4.7 dB
	Above 18 000 MHz	4.8 dB
Conducted emissions	9 kHz ~ 150 kHz	2.7 dB
	150 kHz ~ 30 MHz	2.7 dB

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.


Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.13	9 000	10.73
50	9.78	10 000	10.94
100	9.98	11 000	10.88
200	9.96	12 000	10.38
300	10.12	13 000	11.40
400	10.09	14 000	11.40
500	10.15	15 000	10.52
600	10.11	16 000	12.52
700	10.18	17 000	10.31
800	10.16	18 000	11.71
900	10.34	19 000	11.27
1 000	10.33	20 000	11.62
2 000	10.64	21 000	12.61
3 000	10.87	22 000	12.01
4 000	11.08	23 000	12.42
5 000	11.31	24 000	12.32
6 000	11.44	25 000	12.23
7 000	10.03	26 000	13.20
8 000	10.09	26 500	12.51

Note : Offset(dB) = RF cable loss(dB) + Attenuator(dB)

7. Test results

7.1. Maximum peak output power

Test setup



Limit

FCC

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC

According to RSS-247 5.4(d), For DTSS employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

Test procedure

ANSI C63.10 - Section 11.9

Used test method is section 11.9.1.3 and 11.9.2.3.1

Test settings

General

Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth (see ANSI C63.10 for measurement guidance).

When using a spectrum analyzer or EMI receiver to perform these measurements, it shall be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW to set a bin-to-bin spacing of $\leq \text{RBW}/2$ so that narrowband signals are not lost between frequency bins.

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level. The intent is to test at 100 % duty cycle; however a small reduction in duty cycle (to no lower than 98 %) is permitted, if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

If continuous transmission (or at least 98 % duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level, with the transmit duration as long as possible, and the duty cycle as high as possible during which sweep triggering/signal gating techniques may be used to perform the measurement over the transmission duration.

11.9.1. Maximum peak conducted output power

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

11.9.1.1. RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

11.9.1.3. PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0224 Page (15) of (120)	
--	--	---

11.9.2.3.1. Measurement using a power meter (PM)

Method AVGPM is a measurement using an RF average power meter, as follows:

- a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:
 - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.
- c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- d) Adjust the measurement in dBm by adding $[10 \log(1/D)]$, where D is the duty cycle

Notes:

A peak responding power sensor is used, where the power sensor system video bandwidth is greater than the occupied bandwidth of the EUT.

Test results

SISO

Conducted Output Power

Conducted Output Power							
Test mode	Frequency (MHz)	Measured output power					Limit (dBm)
		Reading (dBm)		DCF (dB)	Result (dBm)		
		Peak	Average		Peak	Average	
802.11b	2412	20.69	18.32	-	20.69	18.32	30
	2437	20.81	18.41		20.81	18.41	
	2462	18.50	16.14		18.50	16.14	
	2467	7.22	4.81		7.22	4.81	
	2472	0.79	-1.84		0.79	-1.84	
802.11g	2412	27.99	17.45	0.30	27.99	17.75	
	2437	26.84	17.08		26.84	17.38	
	2462	26.34	15.16		26.34	15.46	
	2467	16.06	5.36		16.06	5.66	
	2472	8.03	-2.26		8.03	-1.96	
802.11n HT20	2412	27.91	17.37	0.31	27.91	17.68	
	2437	27.68	17.29		27.68	17.60	
	2462	26.25	15.23		26.25	15.54	
	2467	17.01	5.44		17.01	5.75	
	2472	8.49	-3.18		8.49	-2.87	

Notes:

1. Average result(dB m) = Average Reading (dB m) + DCF(dB)

E.I.R.P.

Test mode	Frequency (MHz)	Measured output power					Max. e.i.r.p Limit (dBm)
		Conducted Output Power (dBm)		ANT Gain (dBi)	Max.e.i.r.p (dBm)		
		Peak	Average		Peak	Average	
802.11b	2412	20.69	18.32	-4.00	16.69	14.32	36.02
	2437	20.81	18.41		16.81	14.41	
	2462	18.50	16.14		14.50	12.14	
	2467	7.22	4.81		3.22	0.81	
	2472	0.79	-1.84		-3.21	-5.84	
802.11g	2412	27.99	17.75		23.99	13.75	
	2437	26.84	17.38		22.84	13.38	
	2462	26.34	15.46		22.34	11.46	
	2467	16.06	5.66		12.06	1.66	
	2472	8.03	-1.96		4.03	-5.96	
802.11n HT20	2412	27.91	17.68		23.91	13.68	
	2437	27.68	17.60		23.68	13.60	
	2462	26.25	15.54		22.25	11.54	
	2467	17.01	5.75		13.01	1.75	
	2472	8.49	-2.87		4.49	-6.87	

Notes:

1. E.I.R.P. Calculation:

$$\text{E.I.R.P. (dBm)} = \text{Conducted output power (dBm)} + \text{Antenna gain (dBi)}$$

MIMO

Conducted Output Power

Conducted Output Power									
Test mode	Frequency (MHz)	Measured output power							Limit (dBm)
		Reading (dBm)				DCF (dB)	Result (dBm)		
		Peak		Average			Peak	Average	
		ANT 1	ANT 2	ANT 1	ANT 2		ANT1 + ANT2	ANT1 + ANT2	
802.11b	2412	20.62	18.22	20.71	18.28	-	23.68	21.26	30
	2437	20.59	18.17	20.47	18.07		23.54	21.13	
	2462	18.37	16.01	18.62	16.26		21.51	19.15	
	2467	7.47	5.07	7.76	5.36		10.63	8.23	
	2472	0.46	-2.30	0.35	-2.33		3.42	0.70	
802.11g	2412	26.60	16.13	26.70	16.47	0.30	29.66	19.61	
	2437	26.87	17.33	26.47	16.47		29.68	20.23	
	2462	25.31	14.93	26.60	15.21		29.01	18.38	
	2467	15.67	4.80	16.08	5.62		18.89	8.54	
	2472	7.71	-2.43	8.83	-2.47		11.32	0.86	
802.11n HT20	2412	26.21	15.64	26.84	15.78	0.59	29.55	19.31	
	2437	26.68	16.45	26.71	15.80		29.71	19.74	
	2462	25.64	15.02	26.28	15.30		28.98	18.76	
	2467	15.59	4.76	16.36	5.36		19.00	8.67	
	2472	7.09	-3.36	7.72	-3.45		10.43	0.20	

Notes:

1. Result(dB m) = $10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dB m)

E.I.R.P.

Test mode	Frequency (MHz)	Measured output power					Max e.i.r.p Limit (dBm)
		Conducted Output Power (dBm)		ANT Gain (dBi)	Max.e.i.r.p (dBm)		
		Peak	Average		Peak	Average	
802.11b	2412	23.68	21.26	-0.99	22.69	20.27	36.02
	2437	23.54	21.13		22.55	20.14	
	2462	21.51	19.15		20.52	18.16	
	2467	10.63	8.23		9.64	7.24	
	2472	3.42	0.70		2.43	-0.29	
802.11g	2412	29.66	19.61		28.67	18.62	
	2437	29.68	20.23		28.69	19.24	
	2462	29.01	18.38		28.02	17.39	
	2467	18.89	8.54		17.90	7.55	
	2472	11.32	0.86		10.33	-0.13	
802.11n HT20	2412	29.55	19.31	-4.00	25.55	15.31	
	2437	29.71	19.74		25.71	15.74	
	2462	28.98	18.76		24.98	14.76	
	2467	19.00	8.67		15.00	4.67	
	2472	10.43	0.20		6.43	-3.80	


Notes:

1. E.I.R.P. Calculation:

$$\text{E.I.R.P. (dBm)} = \text{Conducted output power (dBm)} + \text{Antenna gain (dBi)}$$

7.2. Peak Power Spectral Density

Test setup



Limit

According to §15.247(e) and RSS-247(5.2), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test procedure

ANSI C63.10 - Section 11.10.2

Test settings

Method PKPSD (peak PSD)

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set the span to 1.5 times the DTS bandwidth.
- 3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- 4) Set the VBW $\geq 3 \times \text{RBW}$.
- 5) Detector = peak.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test results

SISO

Test mode	Frequency (MHz)	Result (dBm/ 3kHz)	Limit (dBm/ 3kHz)
802.11b	2412	-6.41	8.00
	2437	-6.50	
	2462	-8.39	
	2467	-20.39	
	2472	-26.73	
802.11g	2412	-11.38	
	2437	-10.70	
	2462	-12.73	
	2467	-22.10	
	2472	-29.04	
802.11n HT20	2412	-9.66	
	2437	-8.84	
	2462	-10.51	
	2467	-21.16	
	2472	-29.42	


MIMO

Test mode	Frequency (MHz)	Reading (dBm/ 3kHz)		Result (dBm/ 3kHz)	Limit (dBm/ 3kHz)
		ANT 1	ANT 2		
802.11b	2412	-7.09	-6.92	-3.99	8.00
	2437	-7.56	-6.80	-4.15	
	2462	-8.72	-8.15	-5.42	
	2467	-20.30	-19.38	-16.81	
	2472	-27.09	-26.92	-23.99	
802.11g	2412	-12.03	-10.59	-8.24	
	2437	-11.75	-10.37	-8.00	
	2462	-13.80	-11.72	-9.63	
	2467	-21.83	-22.11	-18.96	
	2472	-27.33	-30.13	-25.50	
802.11n HT20	2412	-10.93	-9.81	-7.32	
	2437	-10.76	-10.28	-7.50	
	2462	-12.71	-10.01	-8.14	
	2467	-22.34	-20.21	-18.14	
	2472	-30.85	-30.17	-27.49	


Notes:

1. Result(dB m) = $10\log(10^{(ANT1/10)} + 10^{(ANT2/10)})$ (dB m)

In order to simplify the report, attached plots were the worst case per channel.
SISO

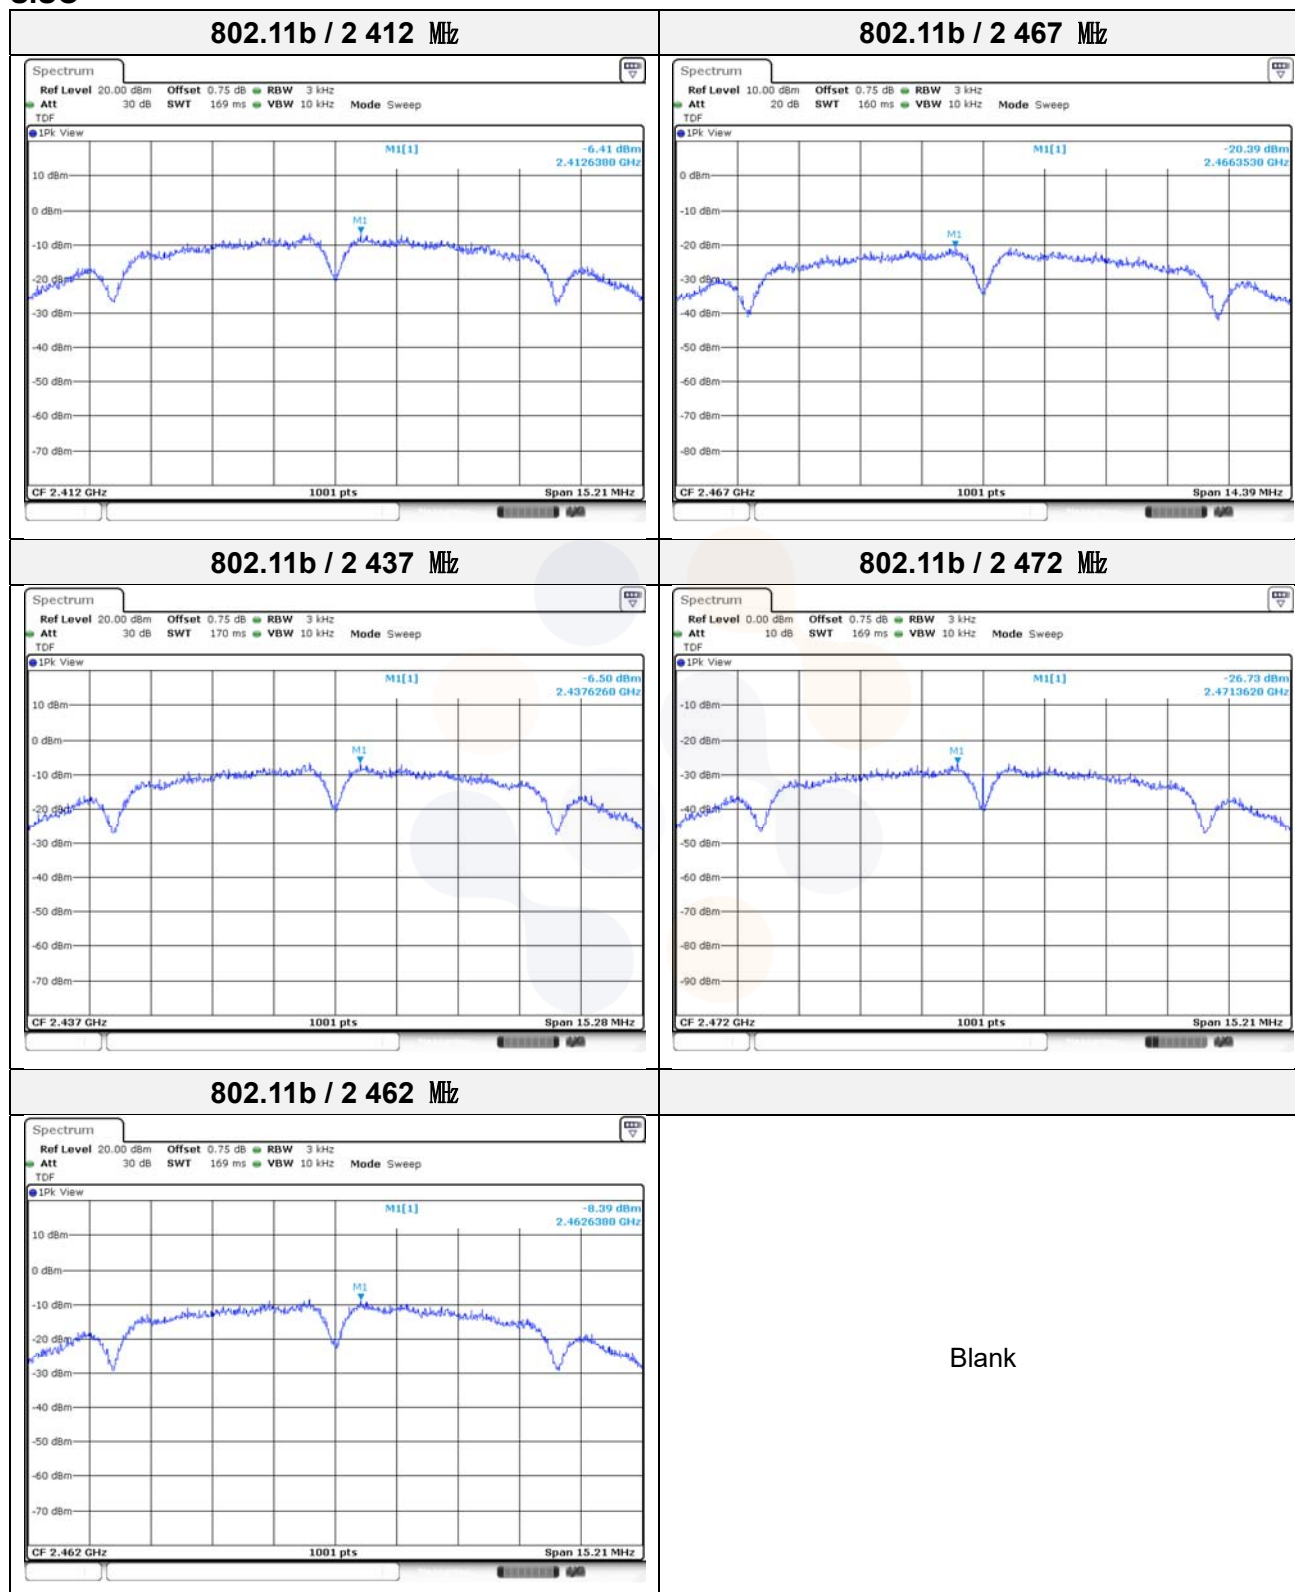



MIMO

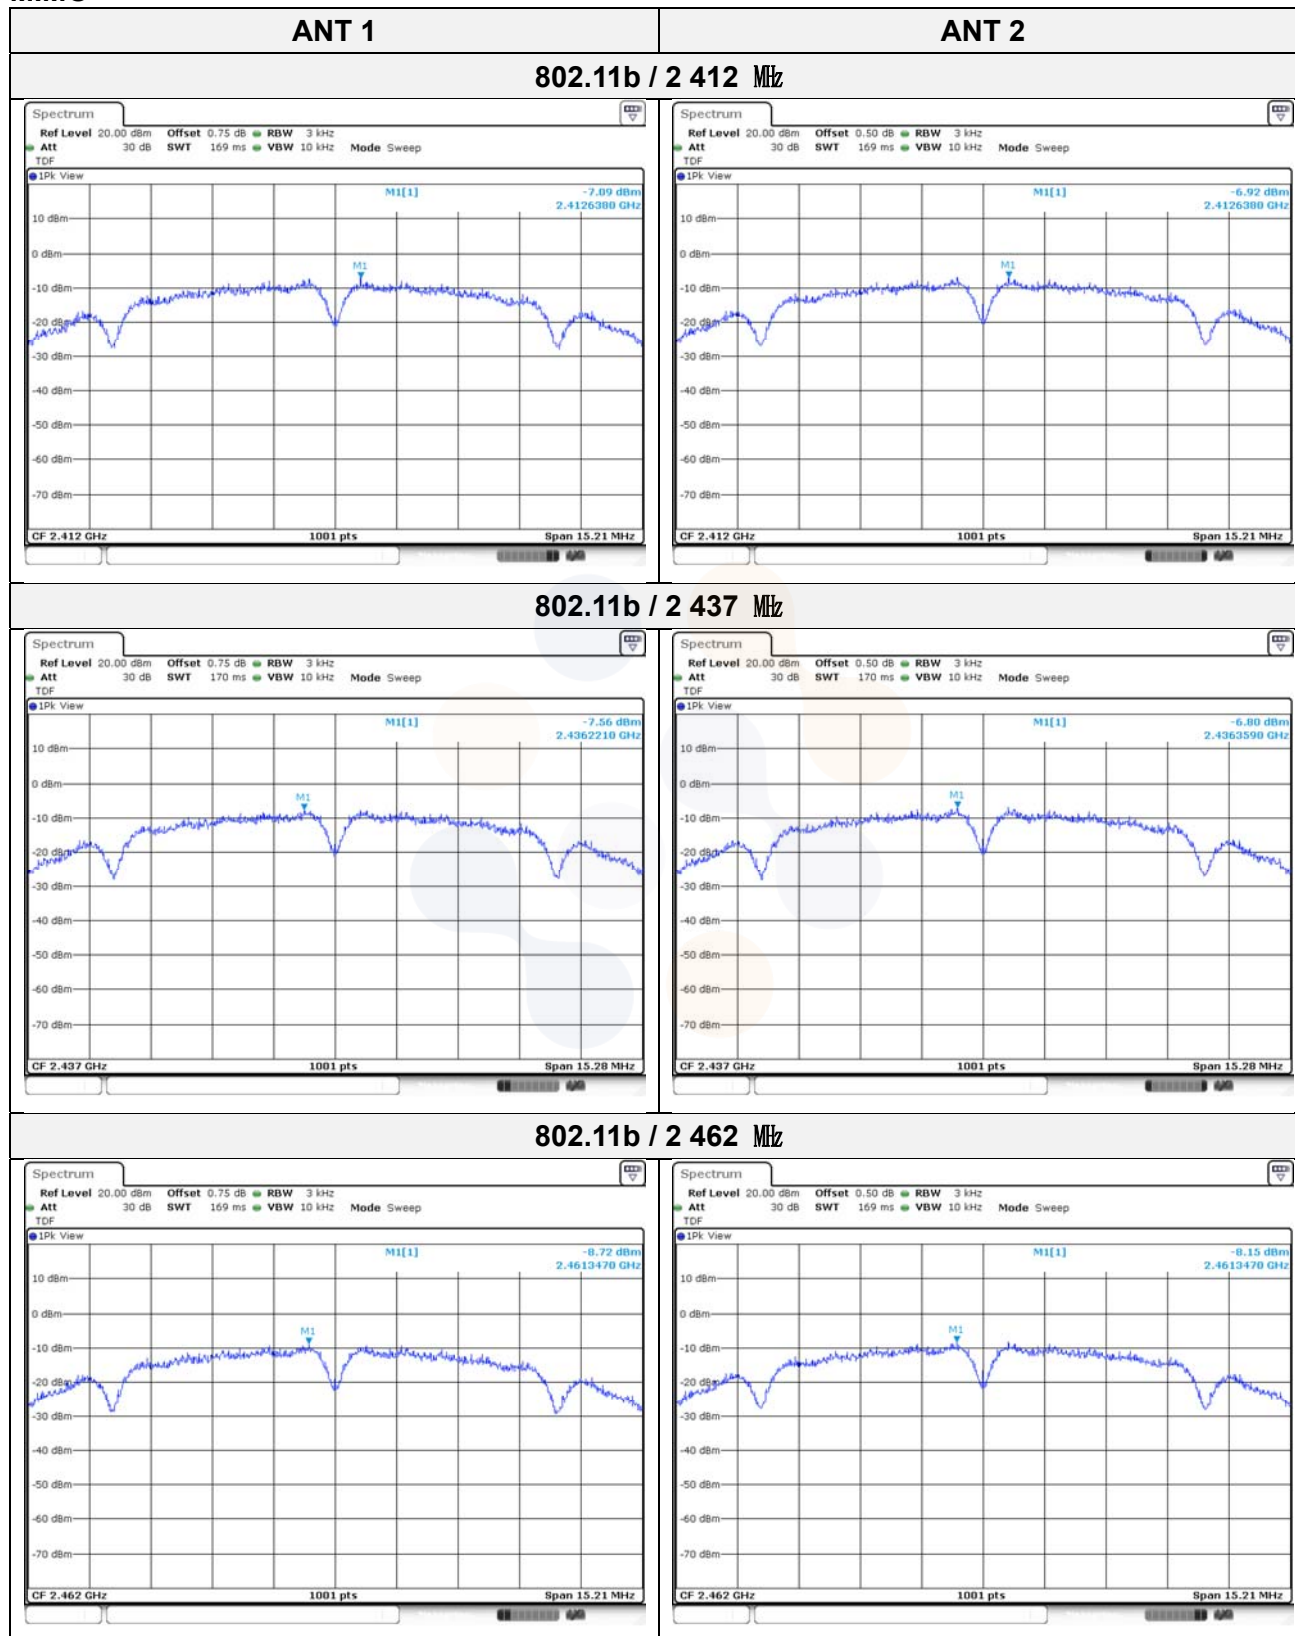



ANT 1

ANT 2

802.11b / 2 467 MHz

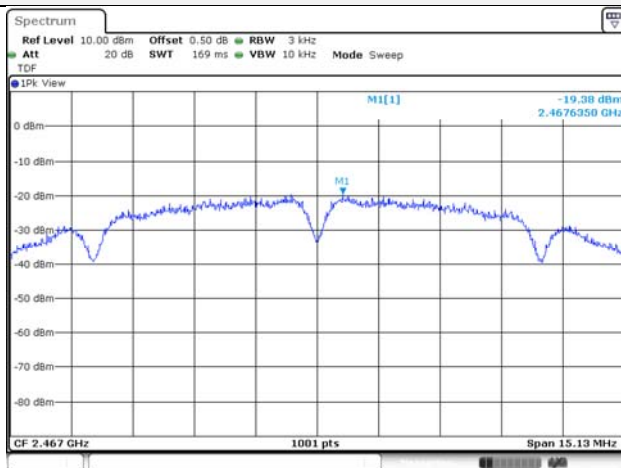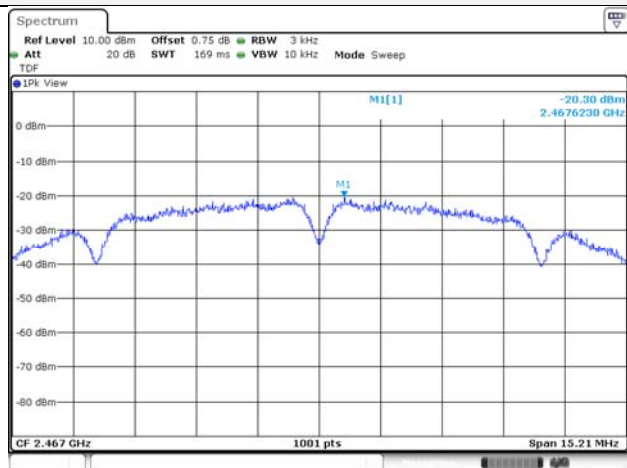


802.11b / 2 472 MHz

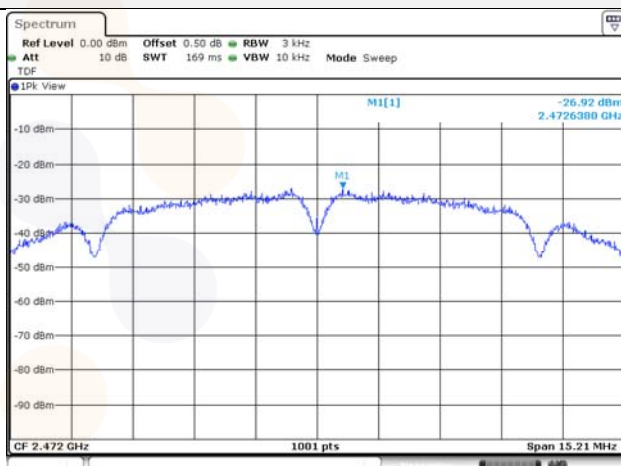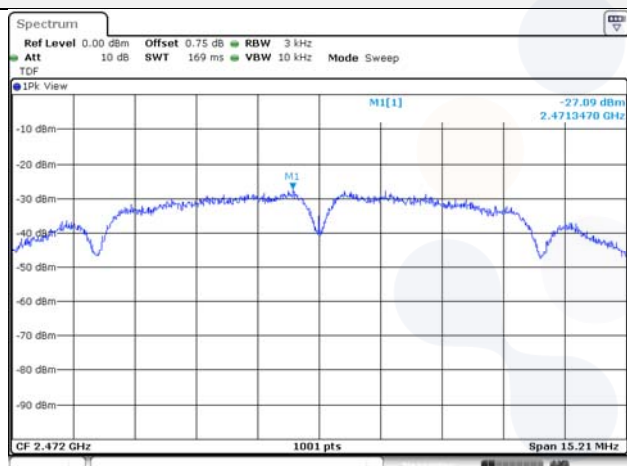

7.3. 6 dB Bandwidth(DTS Channel Bandwidth) & 99% Bandwidth

Test setup



Limit

According to §15.247(a)(2) and RSS-247(5.2), Systems using digital modulation techniques may operate in the 902–928 MHz, 2 400–2 483.5 MHz, and 5 725–5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

ANSI C63.10 - Section 11.8.2

Test settings

DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

Option 1

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-5008-1021 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR23-SRF0224 Page (27) of (120)	
--	--	---

Occupied bandwidth (or 99% emission bandwidth)

- ♦ The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- ♦ The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emissions skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- ♦ The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- ♦ The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted

Notes: it may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms, The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test results

SISO

Test mode	Frequency(MHz)	6 dB Bandwidth(MHz)	99% Bandwidth(MHz)
802.11b	2412	10.14	13.94
	2437	10.19	13.99
	2462	10.14	14.04
	2467	9.59	14.09
	2472	10.14	14.04
802.11g	2412	16.43	17.13
	2437	16.48	17.18
	2462	16.43	17.13
	2467	16.43	17.18
	2472	16.48	17.13
802.11n HT20	2412	17.68	18.38
	2437	17.68	18.43
	2462	17.68	18.43
	2467	17.68	18.38
	2472	17.68	18.33

MIMO


Test mode	Frequency(MHz)	6 dB Bandwidth(MHz)		99% Bandwidth(MHz)	
		ANT 1	ANT 2	ANT 1	ANT 2
802.11b	2412	10.14	10.14	13.94	14.04
	2437	10.19	10.19	13.99	13.94
	2462	10.14	10.14	13.99	14.09
	2467	10.14	10.09	14.09	14.09
	2472	10.14	10.14	14.04	13.99
802.11g	2412	16.43	16.48	17.13	17.13
	2437	16.48	16.43	17.13	17.03
	2462	16.43	16.48	17.13	17.08
	2467	16.43	16.43	17.18	16.98
	2472	16.48	16.43	17.13	16.88
802.11n HT20	2412	17.68	17.68	18.28	17.98
	2437	17.68	17.68	18.33	17.98
	2462	17.68	17.68	18.38	18.08
	2467	17.68	17.68	18.38	18.03
	2472	17.68	17.63	18.33	17.88

In order to simplify the report, attached plots were the worst case per channel.


6 dB bandwidth

SISO


802.11b / 2 412 MHz

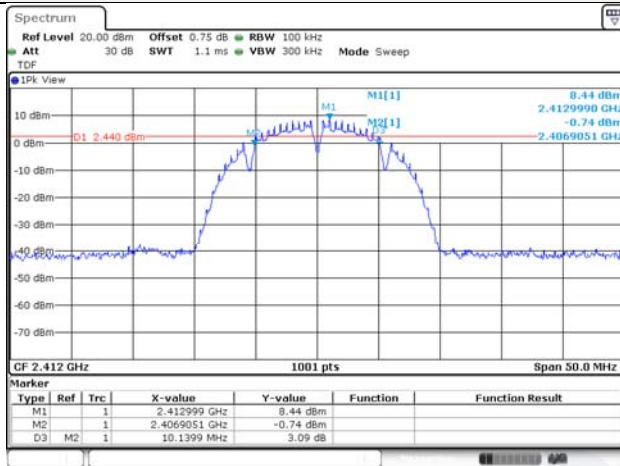


802.11b / 2 467 MHz

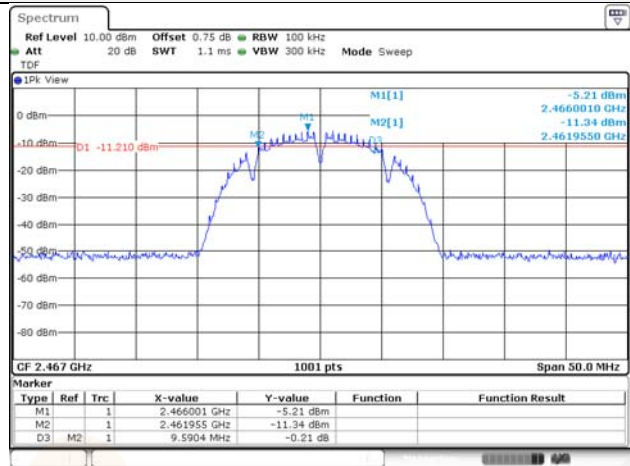


802.11b / 2 437 MHz

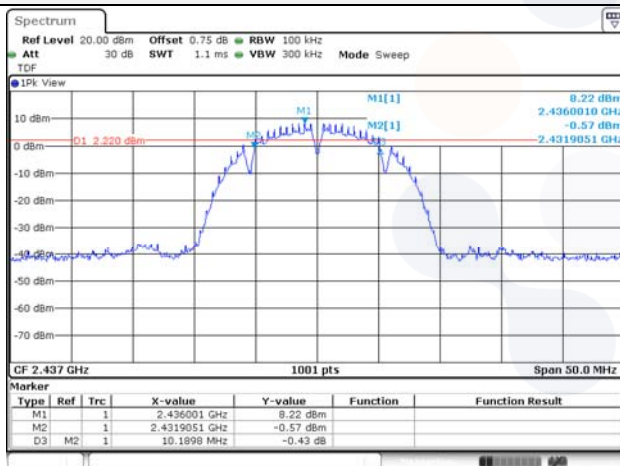

802.11b / 2 472 MHz

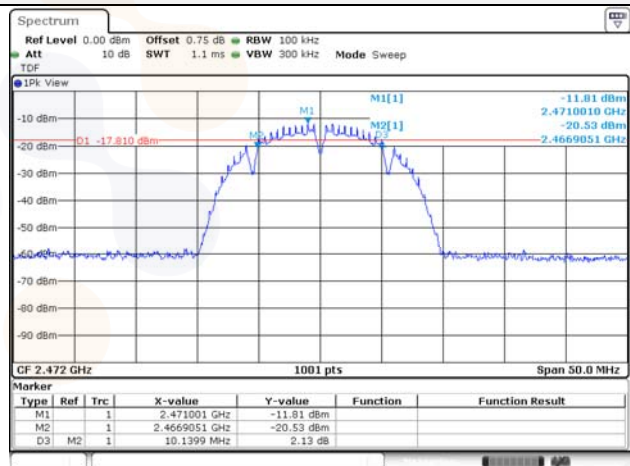


802.11b / 2 462 MHz

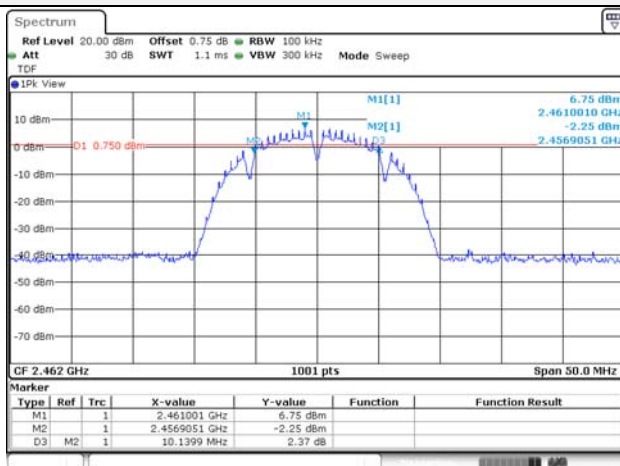

Blank



MIMO

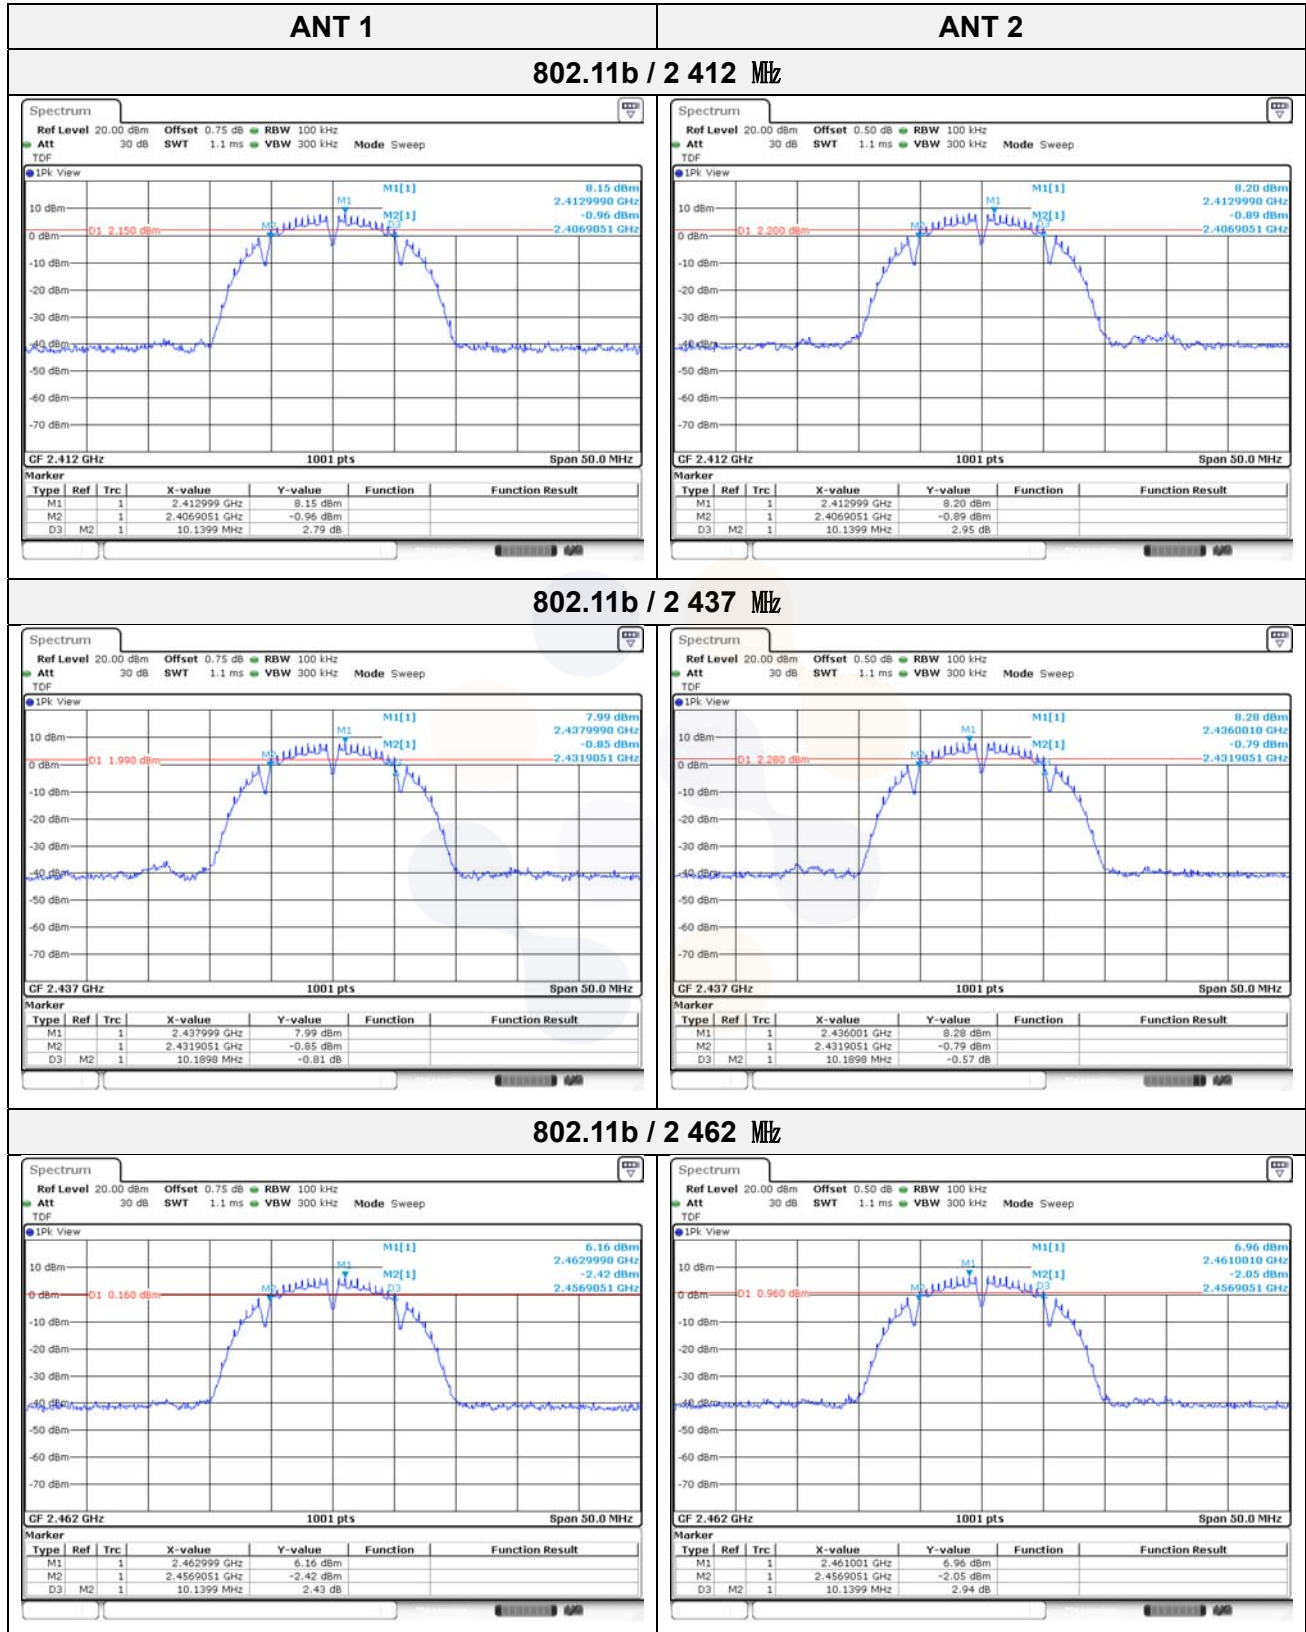



ANT 1

ANT 2

802.11b / 2 467 MHz

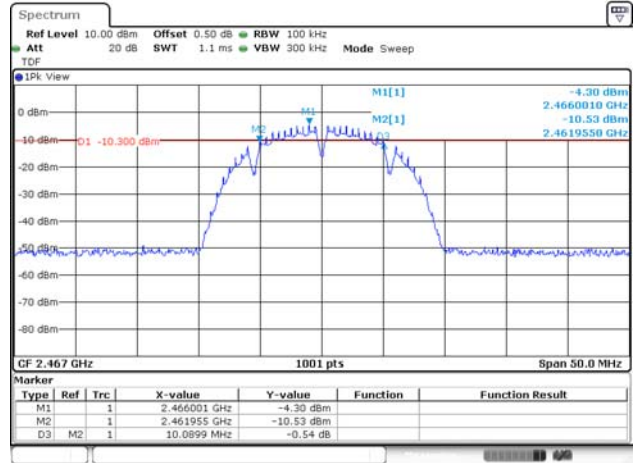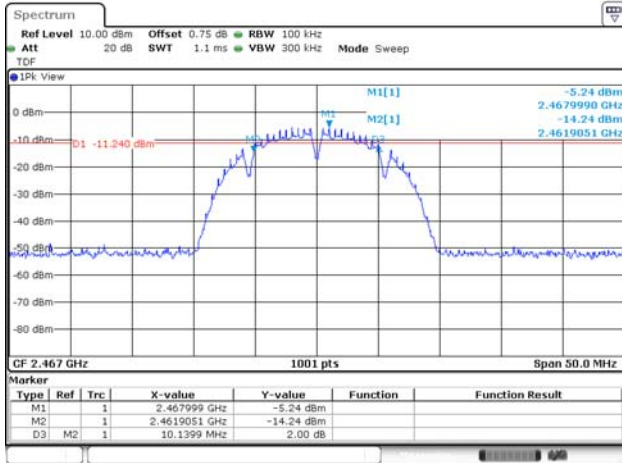

802.11b / 2 472 MHz

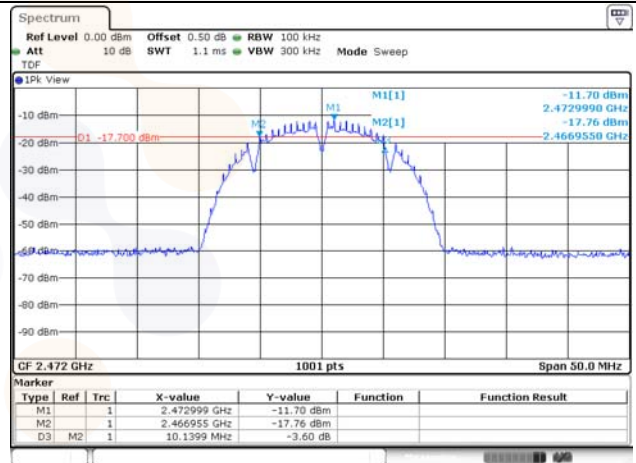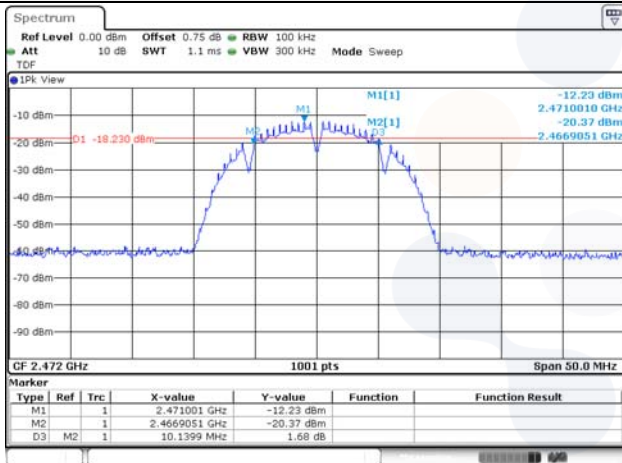


In order to simplify the report, only n mode test plots are attached.


99% Bandwidth

SISO


802.11n HT20 / 2 412 MHz

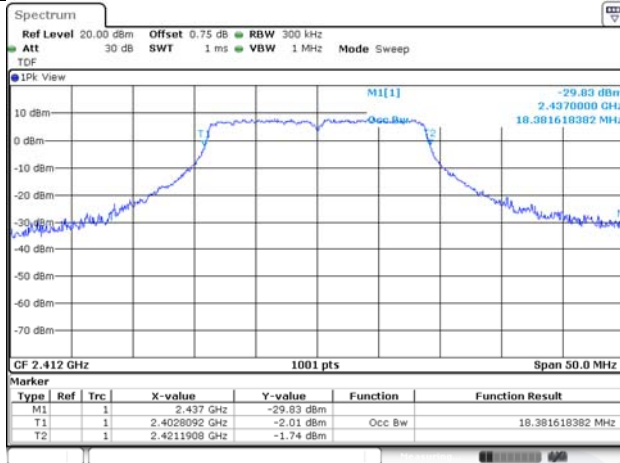


802.11n HT20 / 2 467 MHz

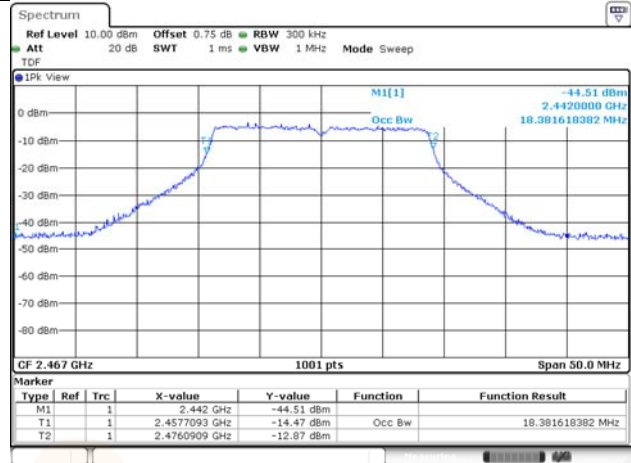


802.11n HT20 / 2 437 MHz

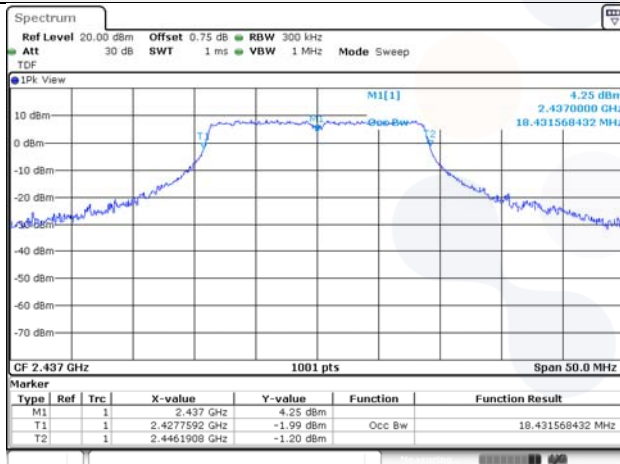

802.11n HT20 / 2 472 MHz

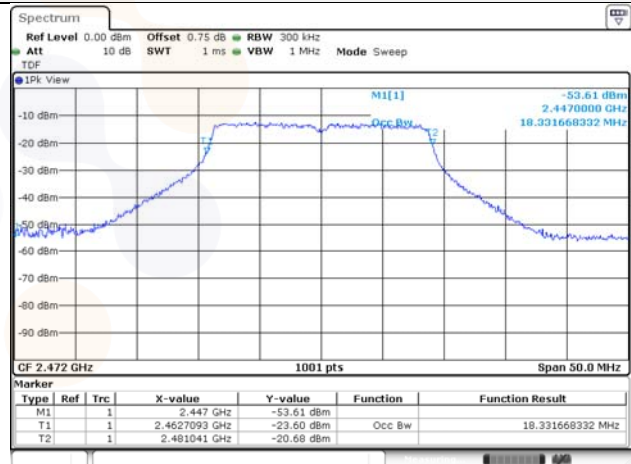


802.11n HT20 / 2 462 MHz

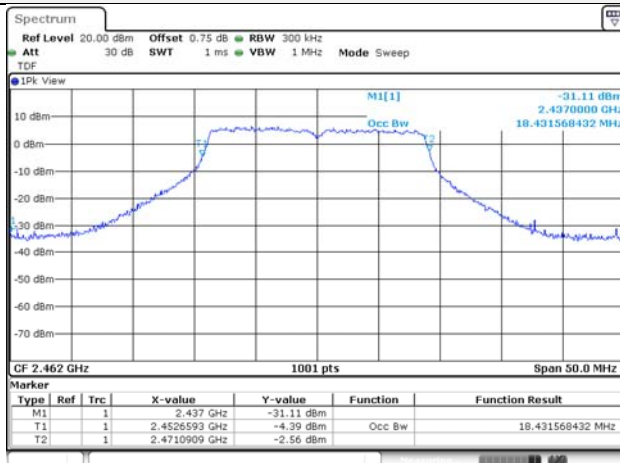

Blank



MIMO

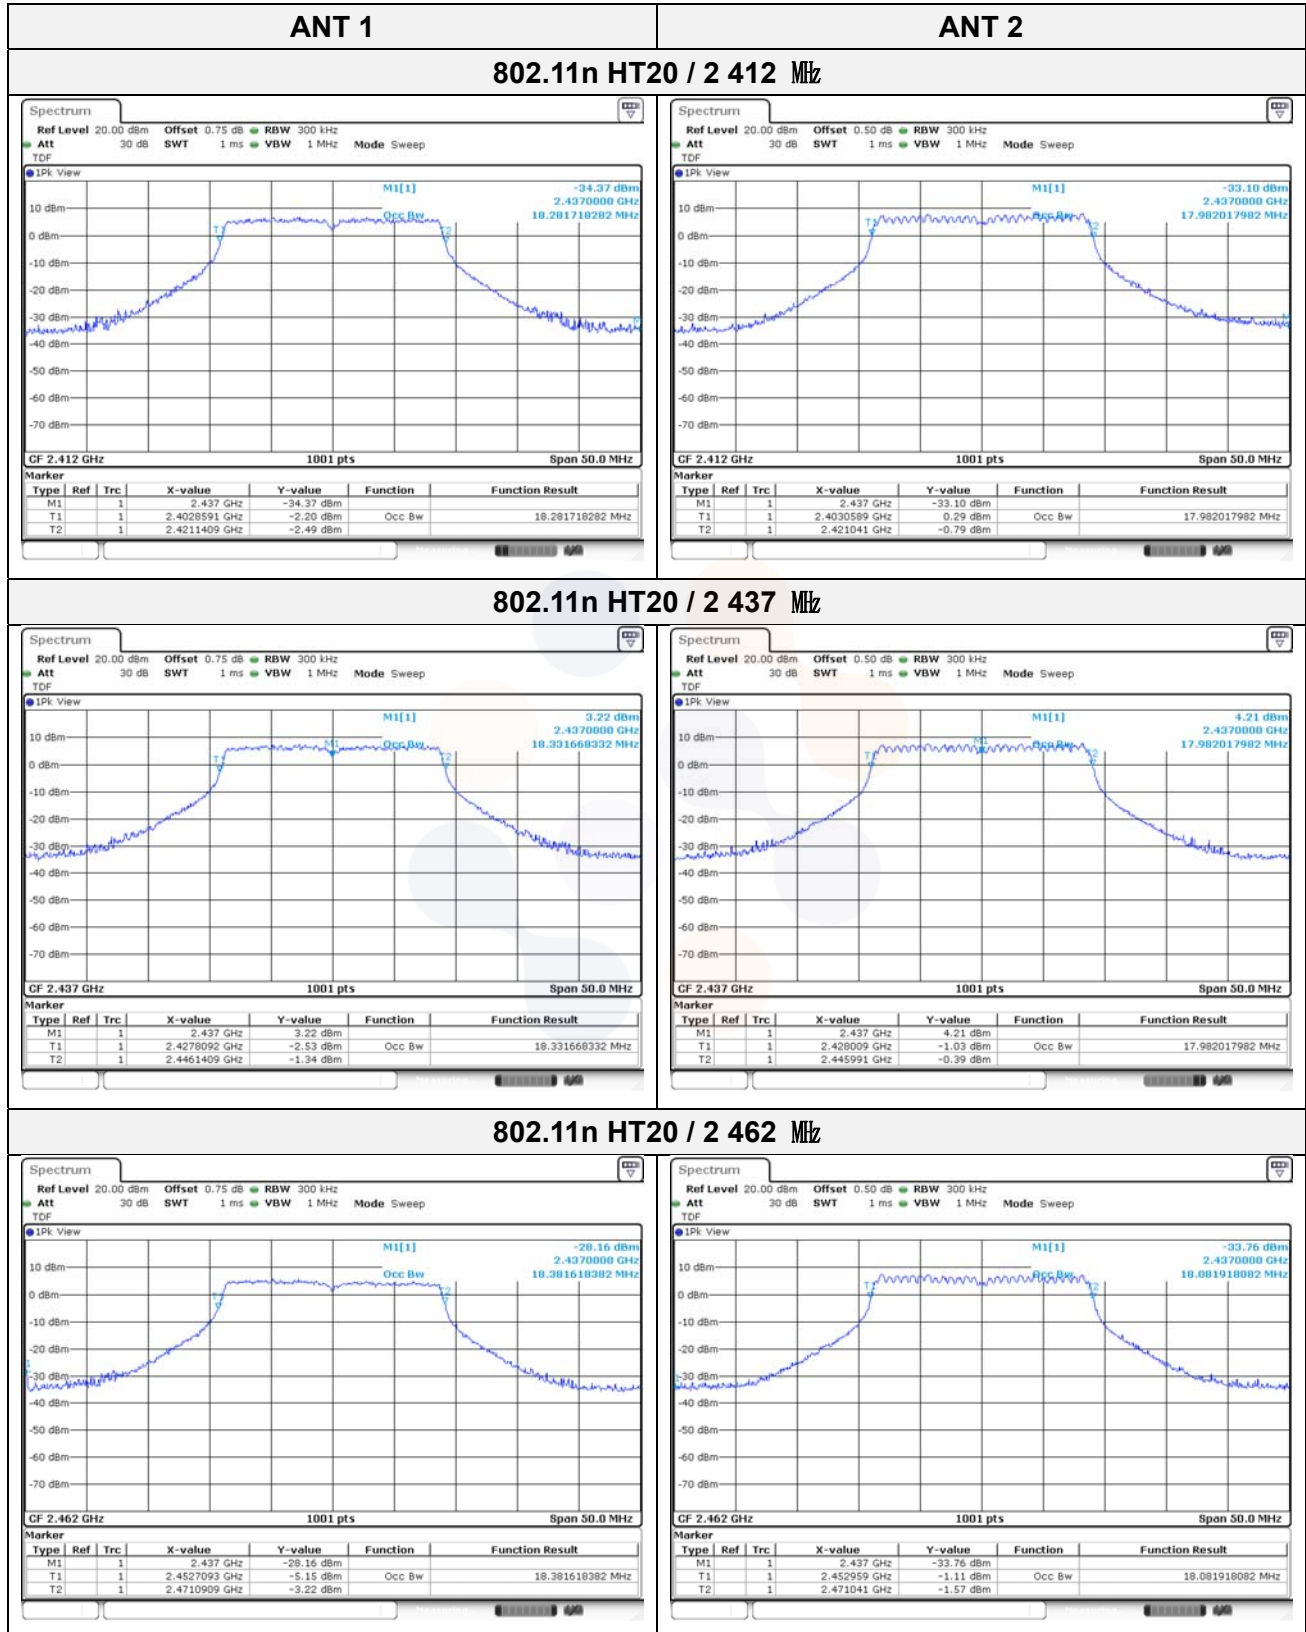



ANT 1

ANT 2

802.11n HT20 / 2 467 MHz

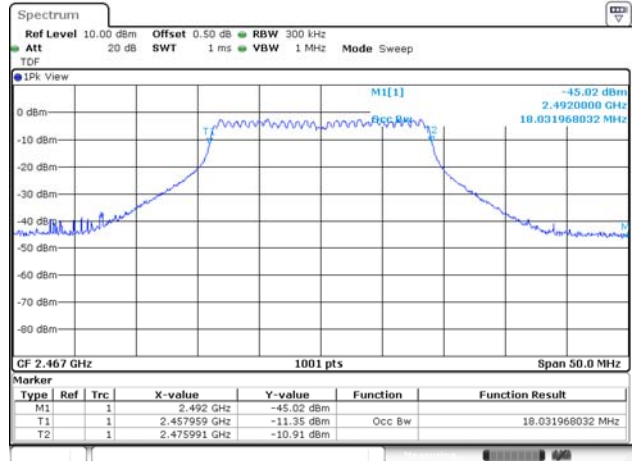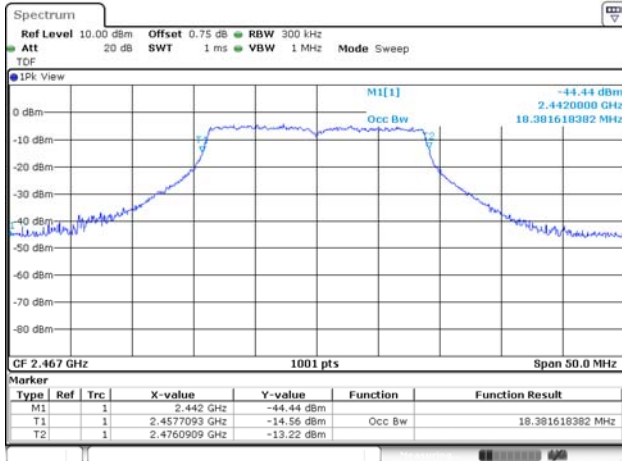


802.11n HT20 / 2 472 MHz

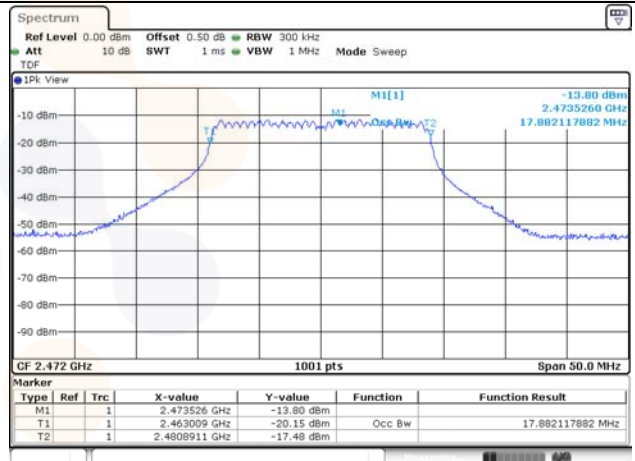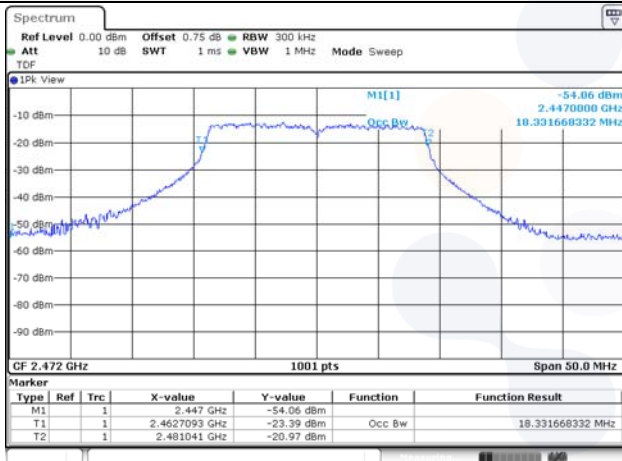


7.4. Spurious Emission, Band Edge and Restricted bands

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions

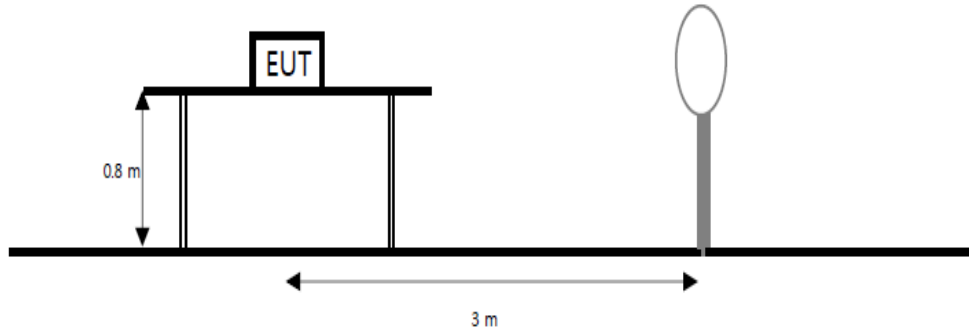

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

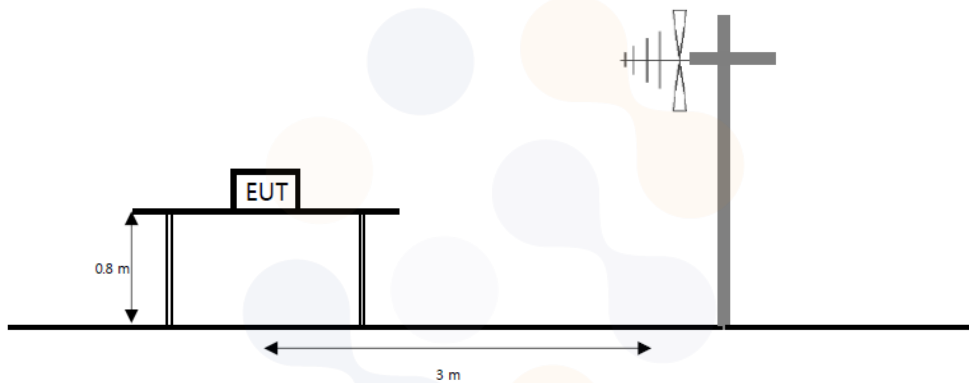

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

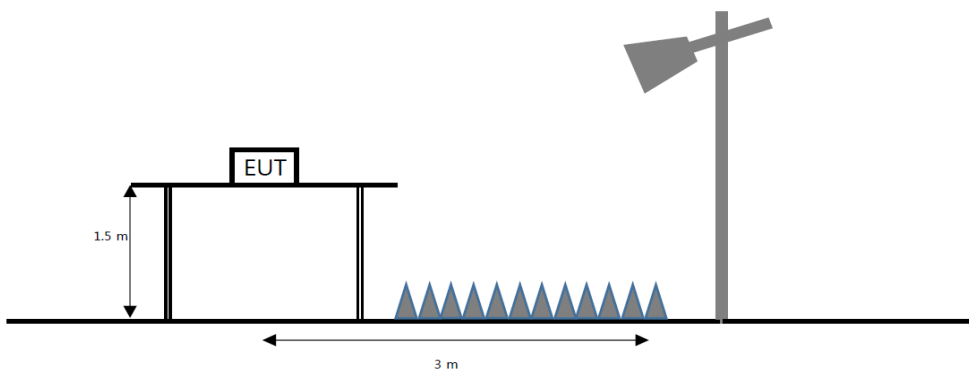

Limit

FCC

According to section 15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength ($\mu V/m$)	Measurement distance (m)
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

According to section 15.205(a) and (b), only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.009 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	25	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	156.7 - 156.9	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	162.012 5 - 167.17	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	167.72 - 173.2	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	240 - 285	3 600 - 4 400	Above 38.6
13.36 - 13.41	322 - 335.4		

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in section 15.35 apply to these measurements.

IC

According to RSS-247(5.5), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen(8.9), Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5- General field strength limits at frequencies above 30 MHz

Frequency(MHz)	Field strength (μ V/m at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

Table 6- General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance(m)
9 – 490 kHz ¹⁾	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

According to RSS-Gen(8.10), Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:

- The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).
- Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.
- Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7- Restricted frequency bands*

7

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

* Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Test procedure

ANSI C63.10-2013

Test settings

Peak field strength measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in table
3. VBW $\geq (3 \times \text{RBW})$
4. Detector = peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow sweeps to continue until the trace stabilizes

Table. RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1 000 MHz	100 kHz to 120 kHz
> 1 000 MHz	1 MHz

Average field strength measurements

Trace averaging with continuous EUT transmission at full power

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

1. RBW = 1 MHz (unless otherwise specified).
2. VBW $\geq (3 \times \text{RBW})$.
3. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
4. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.

Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used:

1. The EUT shall be configured to operate at the maximum achievable duty cycle.
2. Measure the duty cycle D of the transmitter output signal as described in 11.6.
3. RBW = 1 MHz (unless otherwise specified).
4. VBW $\geq [3 \times \text{RBW}]$.
5. Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.


6. Averaging type = power (i.e., rms):
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.
7. Sweep time = auto.
8. Perform a trace average of at least 100 traces.
9. A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Notes:

1. $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40 \log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20 \log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
2. Factors(dB) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB) + or F_d (dB)
3. The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
4. Average test would be performed if the peak result were greater than the average limit.
5. ¹⁾ means restricted band.
6. Above 1 GHz the worst results between two antenna polarizations (H and V) were documented in the test report.
7. Below 30 MHz frequency range, In order to search for the worst result, all orientations about parallel, perpendicular, and ground-parallel were investigated then reported. when the emission level was higher than 20 dB of the limit, then the following statement shall be made: "No spurious emissions were detected within 20 dB of the limit."
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBμV/m, which is equivalent to $Y - 51.5 = Z$ dBμA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.


Test results (Below 30 MHz) – Worst case: 802.11n HT20 2TX MIMO / 2 437 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. +Cable	Distance Factor	DCF	Result	Limit	Margin
[MHz]	[V/H]	[dB(μV)]	[dB]	[dB]	[dB]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
No spurious emissions were detected within 20 dB of the limit.									

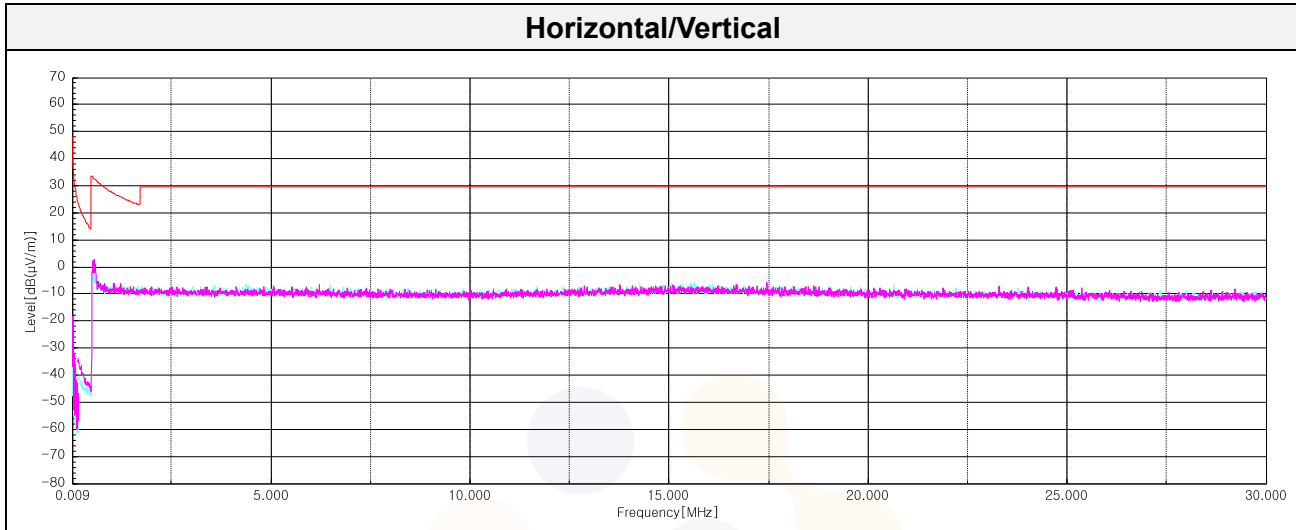

Test results (Below 1 000 MHz) – Worst case: 802.11n HT20 2TX MIMO / 2 437 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Quasi peak data								
39.94	V	30.80	19.03	-31.90	-	17.93	40.00	22.07
68.68	H	39.20	12.10	-31.54	-	19.76	40.00	20.24
99.96	V	34.80	16.49	-31.41	-	19.88	43.50	23.62
369.86	H	24.60	20.80	-30.62	-	14.78	46.00	31.22
747.68	V	26.80	25.50	-30.11	-	22.19	46.00	23.81
961.81 ¹⁾	H	23.20	26.80	-28.20	-	21.80	54.00	32.20

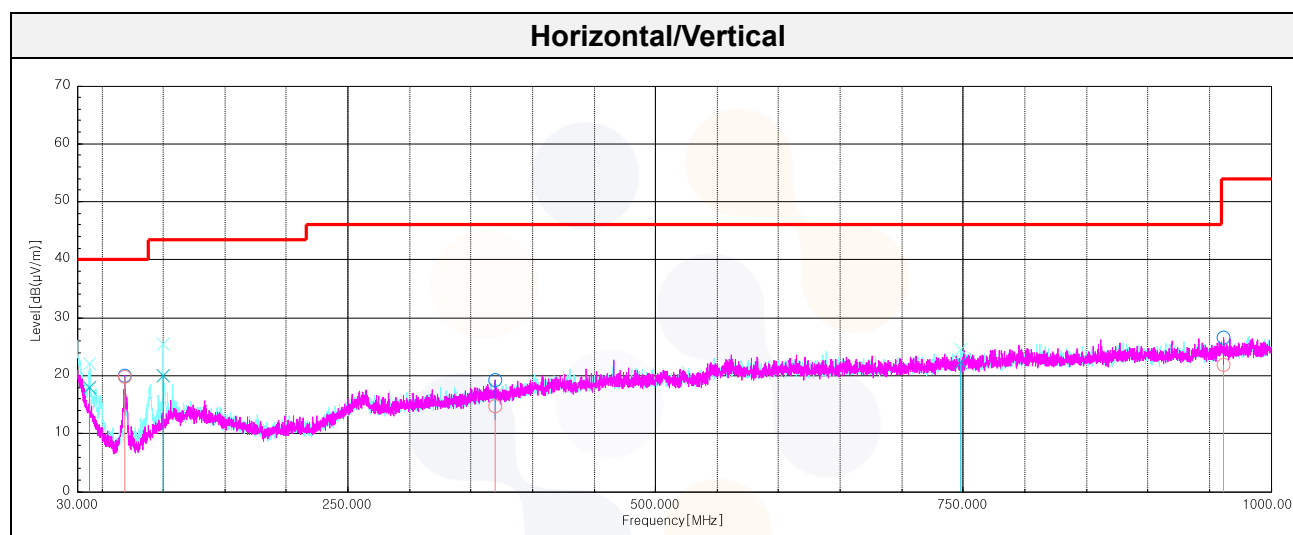


Test results (Above 1 000 MHz)

SISO


802.11b_2 412 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 388.86 ¹⁾	V	64.10	27.29	-30.59	-	60.80	74.00	13.20
2 483.59 ¹⁾	V	64.00	27.80	-30.48	-	61.32	74.00	12.68
4 828.20 ¹⁾	H	54.90	32.47	-45.74	-	41.63	74.00	32.37
7 249.22	V	53.70	37.20	-44.34	-	46.56	74.00	27.44
Average Data								
2 388.86 ¹⁾	V	45.29	27.29	-30.59	-	41.99	54.00	12.01
2 483.59 ¹⁾	V	46.02	27.80	-30.48	-	43.34	54.00	10.66


Average data

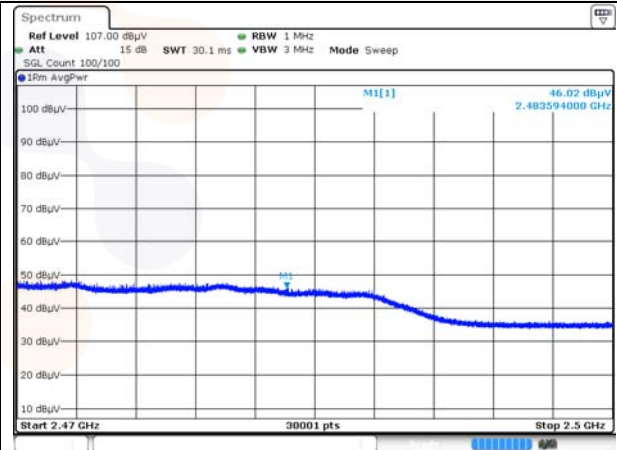


Horizontal/Vertical for Band-edge

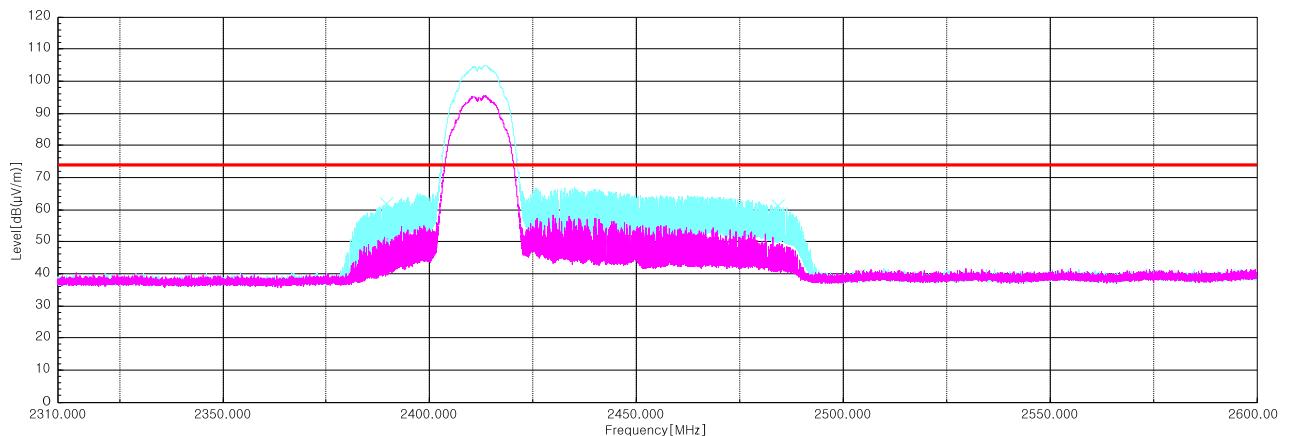

Horizontal/Vertical for 1 GHz ~ 3.5 GHz

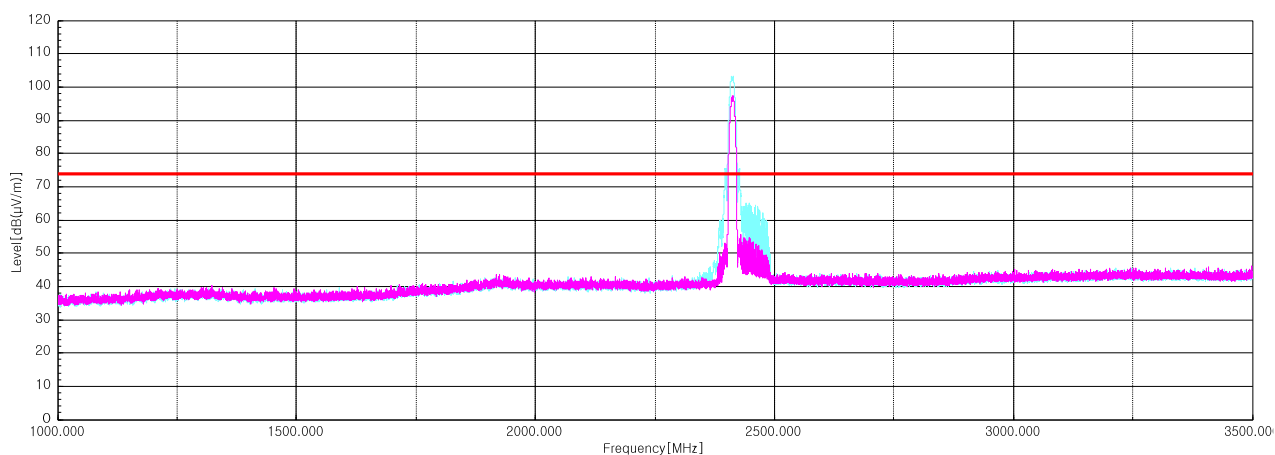


Horizontal/Vertical for 3.5 GHz ~ 18 GHz

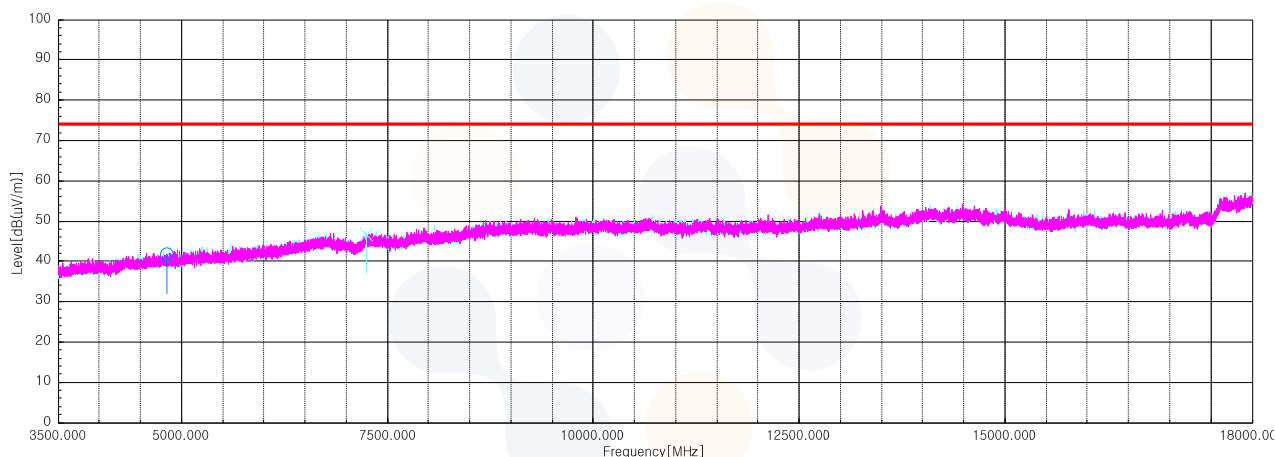


802.11b_2 437 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
4 813.22 ¹⁾	H	55.30	32.38	-45.80	-	41.88	74.00	32.12
7 293.20 ¹⁾	V	53.50	37.47	-44.23	-	46.74	74.00	27.26
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

Horizontal/Vertical for 1 GHz ~ 3.5 GHz

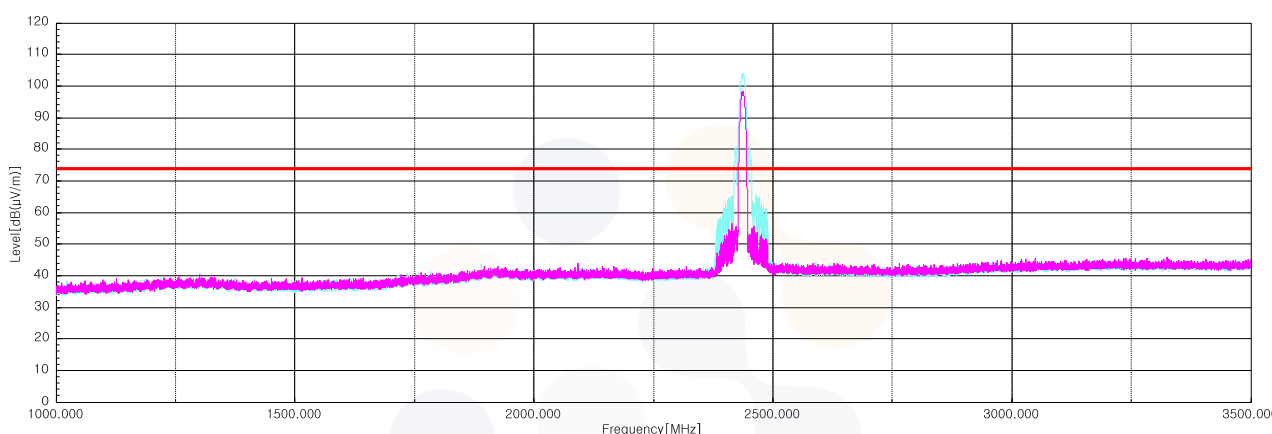


Horizontal/Vertical for 3.5 GHz ~ 18 GHz

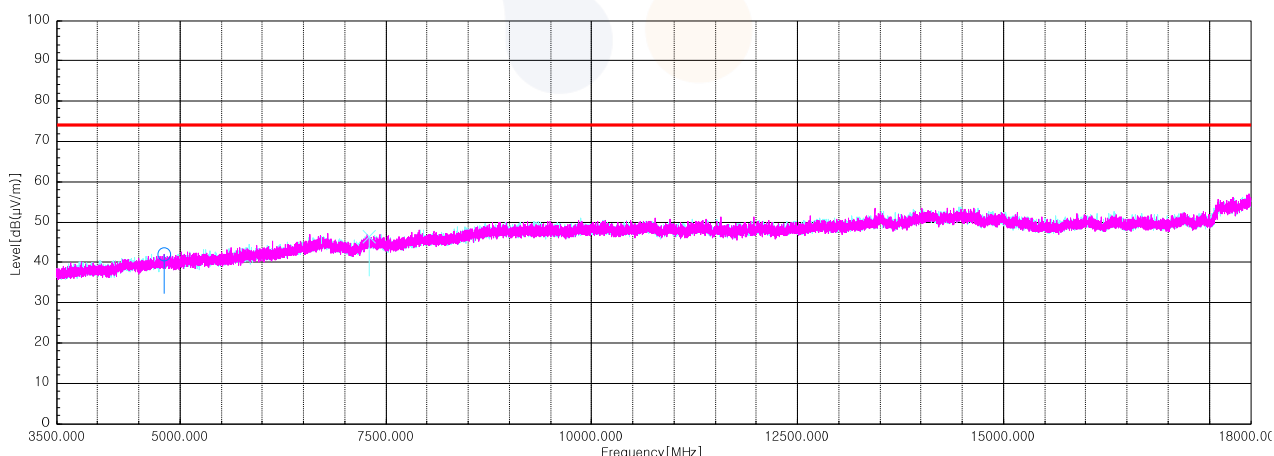


802.11b_2 462 MHz


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 389.24 ¹⁾	V	62.70	27.29	-30.59	-	59.40	74.00	14.60
2 483.90 ¹⁾	V	66.60	27.80	-30.48	-	63.92	74.00	10.08
4 918.58 ¹⁾	H	54.40	32.74	-45.34	-	41.80	74.00	32.20
7 365.22 ¹⁾	V	53.50	36.97	-44.05	-	46.42	74.00	27.58
Average Data								
2 389.24 ¹⁾	V	44.23	27.29	-30.59	-	40.93	54.00	13.07
2 483.90 ¹⁾	V	47.99	27.80	-30.48	-	45.31	54.00	8.69

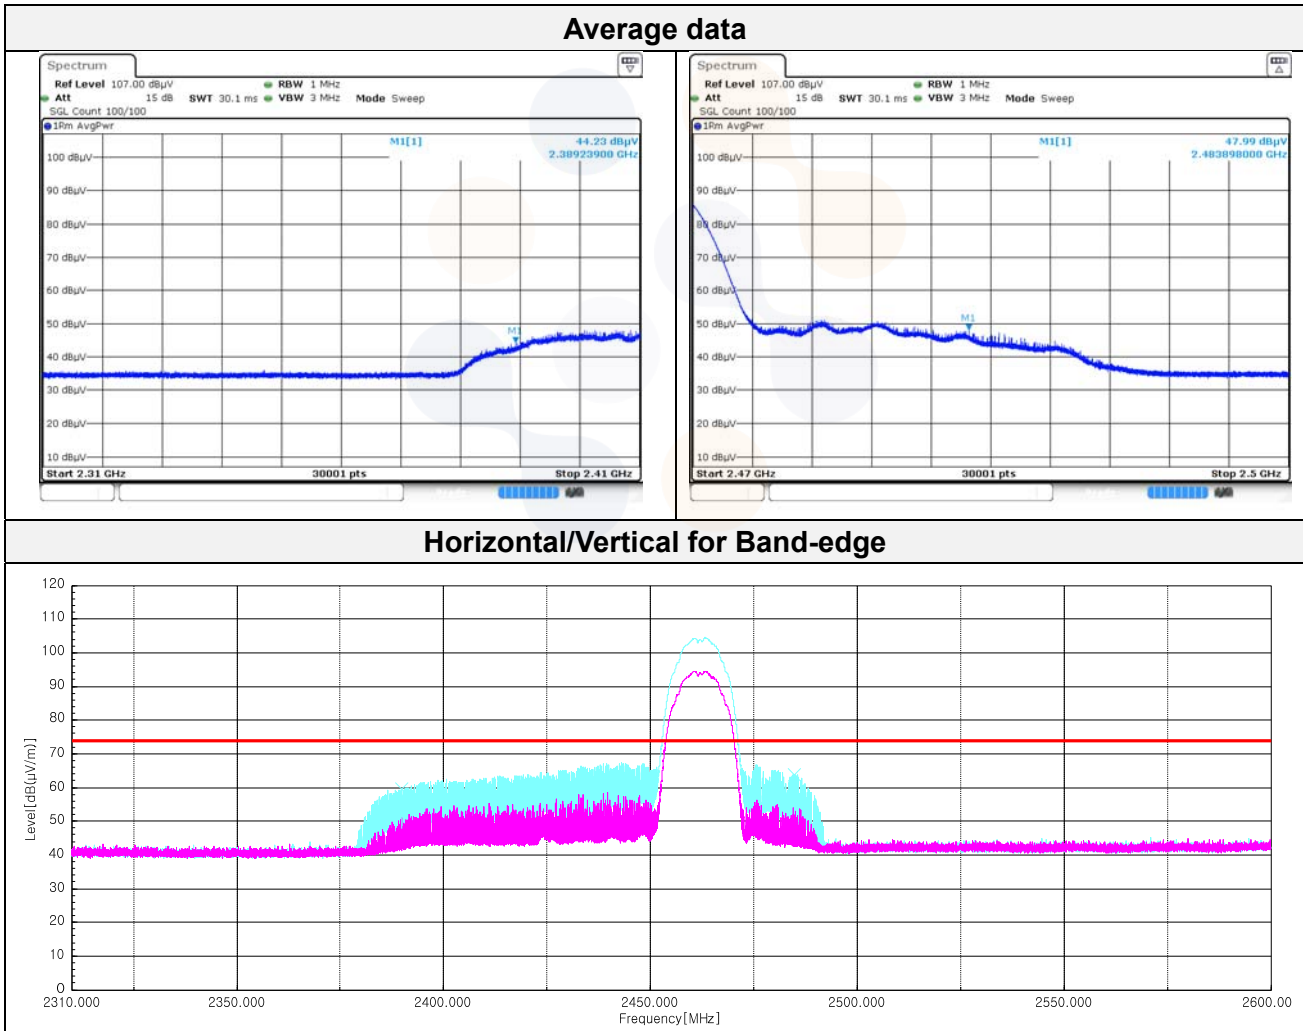

Horizontal/Vertical for 1 GHz ~ 3.5 GHz


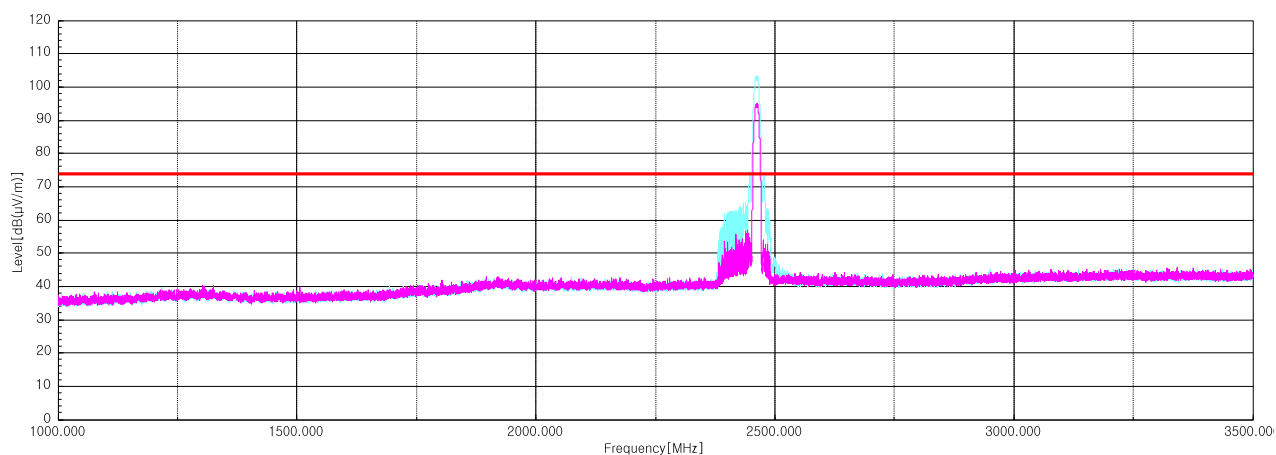


Horizontal/Vertical for 3.5 GHz ~ 18 GHz

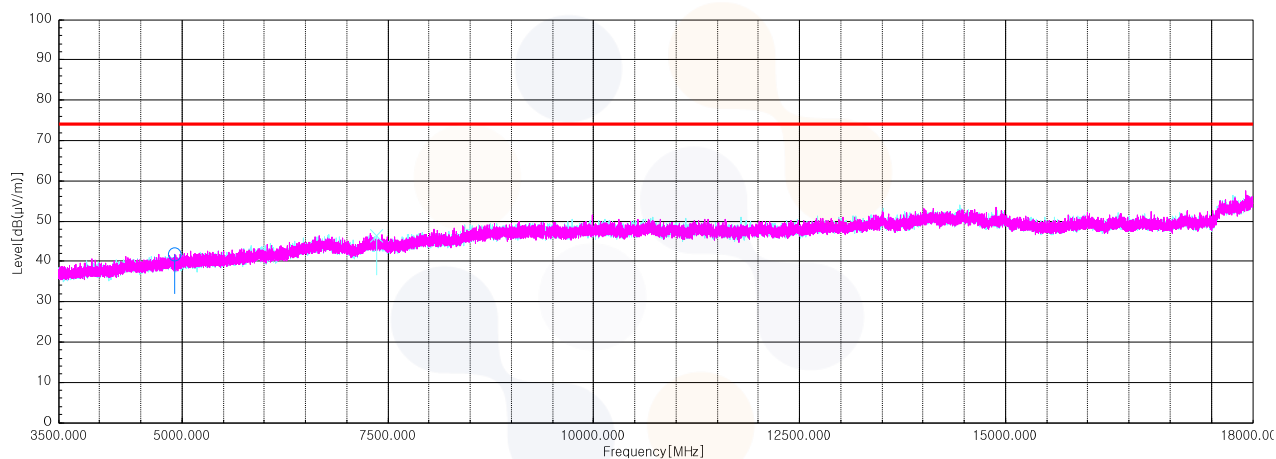


802.11b_2 467 MHz


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μ V))	(dB)	(dB)	(dB)	(dB(μ V/m))	(dB(μ V/m))	(dB)
Peak data								
2 389.34 ¹⁾	V	50.10	27.29	-30.59	-	46.80	74.00	27.20
2 484.14 ¹⁾	V	54.70	27.80	-30.48	-	52.02	74.00	21.98
4 931.63 ¹⁾	V	53.50	32.76	-45.28	-	40.98	74.00	33.02
7 408.72 ¹⁾	V	54.20	36.88	-43.95	-	47.13	74.00	26.87
Average Data								
2 484.14 ¹⁾	V	39.07	27.80	-30.48	-	36.39	54.00	17.61

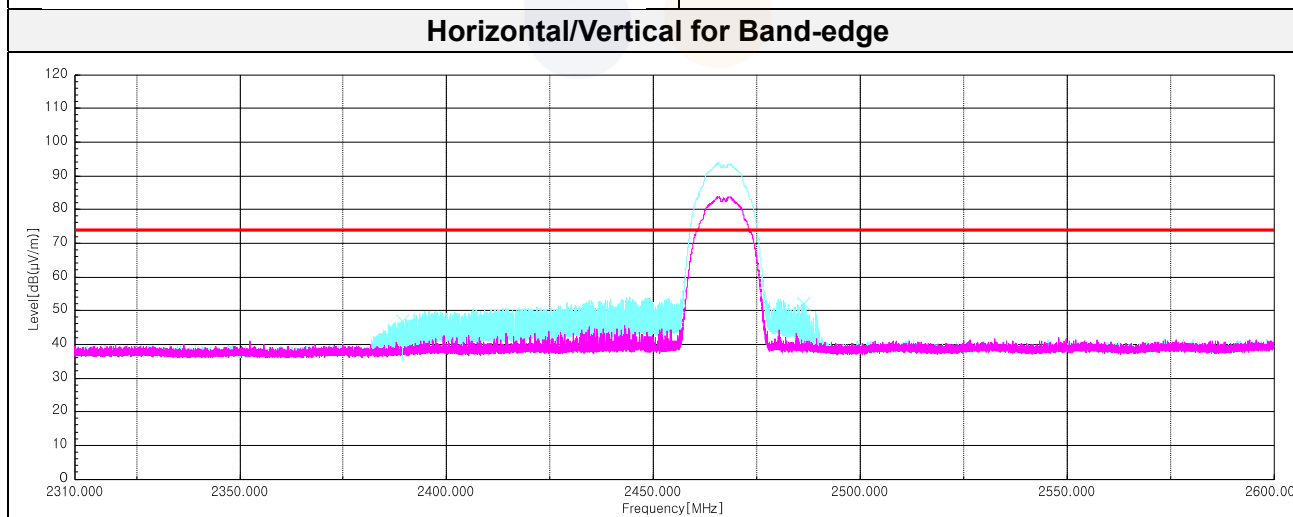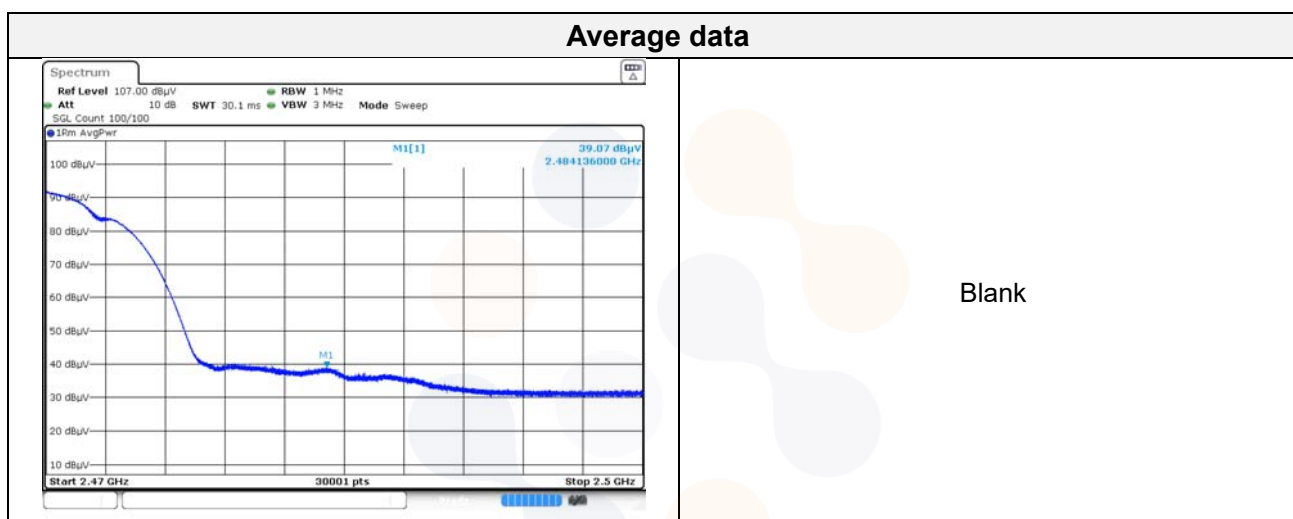

Horizontal/Vertical for 1 GHz ~ 3.5 GHz

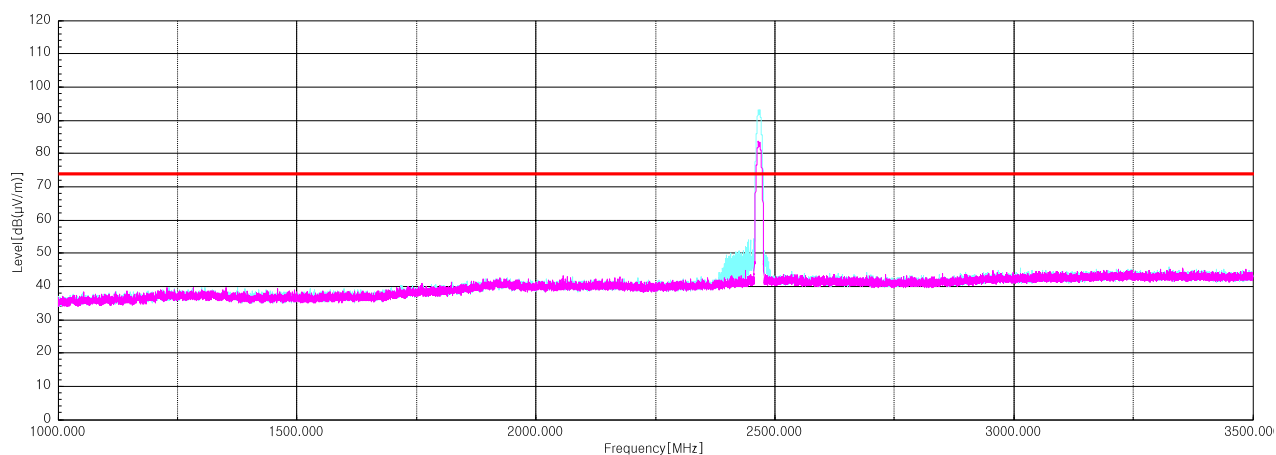


Horizontal/Vertical for 3.5 GHz ~ 18 GHz

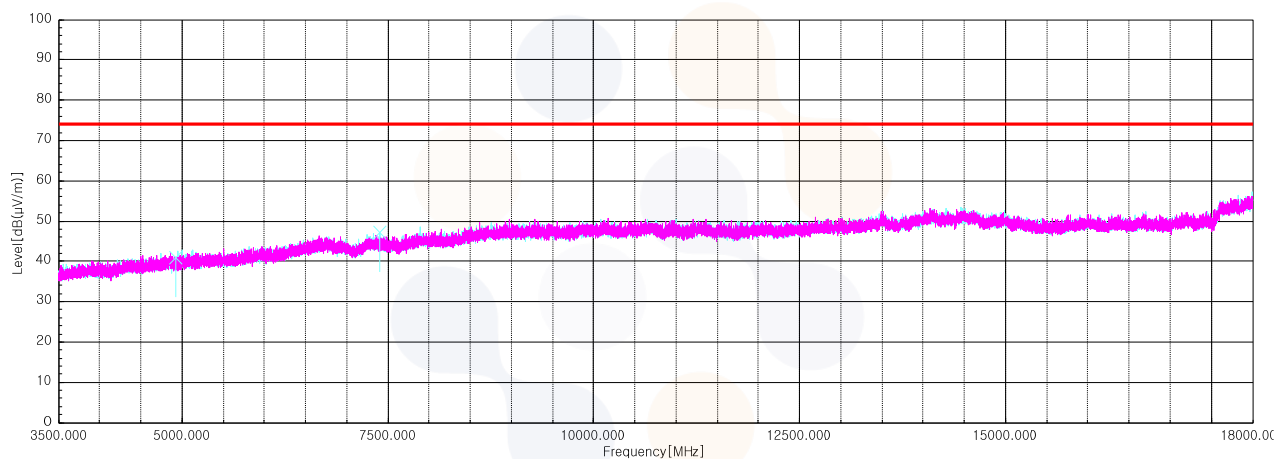


802.11b_2 472 MHz


Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB($\mu V/m$))	(dB($\mu V/m$))	(dB)
Peak data								
2 389.25 ¹⁾	V	49.70	27.29	-30.59	-	46.40	74.00	27.60
2 485.91 ¹⁾	V	51.80	27.80	-30.48	-	49.12	74.00	24.88
5 002.20 ¹⁾	H	53.20	33.01	-44.98	-	41.23	74.00	32.77
7 421.77 ¹⁾	H	52.30	36.86	-43.91	-	45.25	74.00	28.75
Average Data								
No spurious emissions were detected within 20 dB of the limit.								

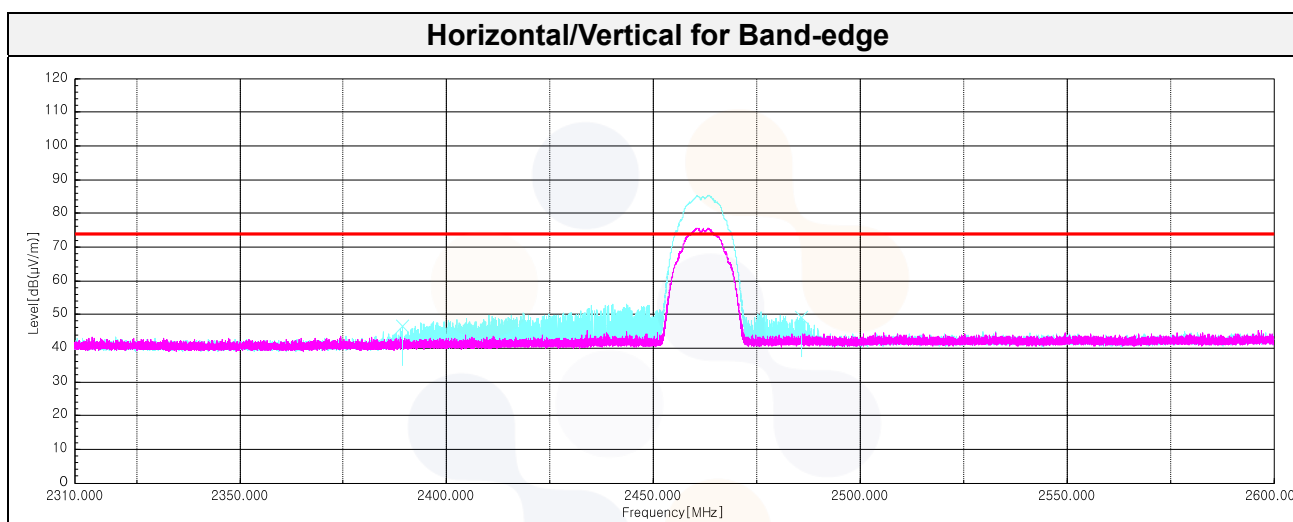

Horizontal/Vertical for 1 GHz ~ 3.5 GHz


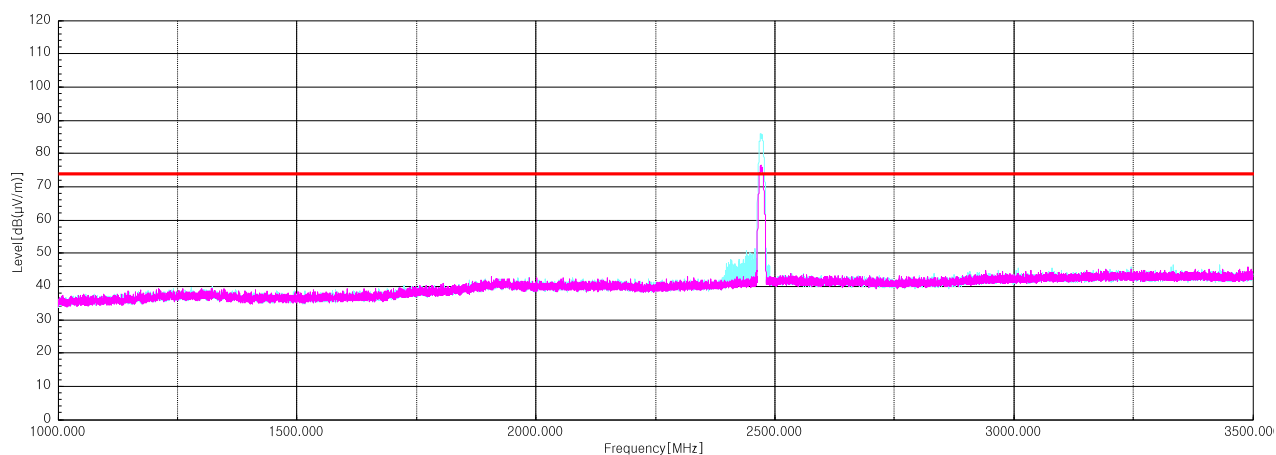


Horizontal/Vertical for 3.5 GHz ~ 18 GHz

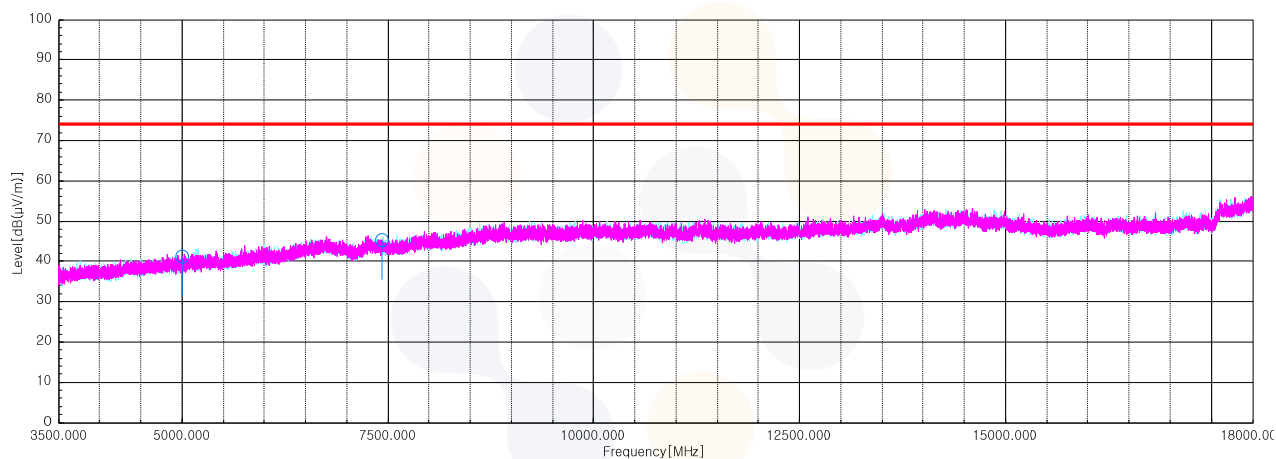


802.11g_2 412 MHz

Frequency	Pol.	Reading	Ant. Factor	Amp. + Cable	DCF	Result	Limit	Margin
(MHz)	(V/H)	(dB(μV))	(dB)	(dB)	(dB)	(dB(μV/m))	(dB(μV/m))	(dB)
Peak data								
2 389.89 ¹⁾	V	68.20	27.30	-30.59	-	64.91	74.00	9.09
2 484.14 ¹⁾	V	66.70	27.80	-30.48	-	64.02	74.00	9.98
4 819.98 ¹⁾	V	55.10	32.42	-45.77	-	41.75	74.00	32.25
7 216.35	H	52.80	37.13	-44.25	-	45.68	74.00	28.32
Average Data								
2 389.89 ¹⁾	V	50.22	27.30	-30.59	0.30	47.23	54.00	6.77
2 484.14 ¹⁾	V	48.33	27.80	-30.48	0.30	45.95	54.00	8.05

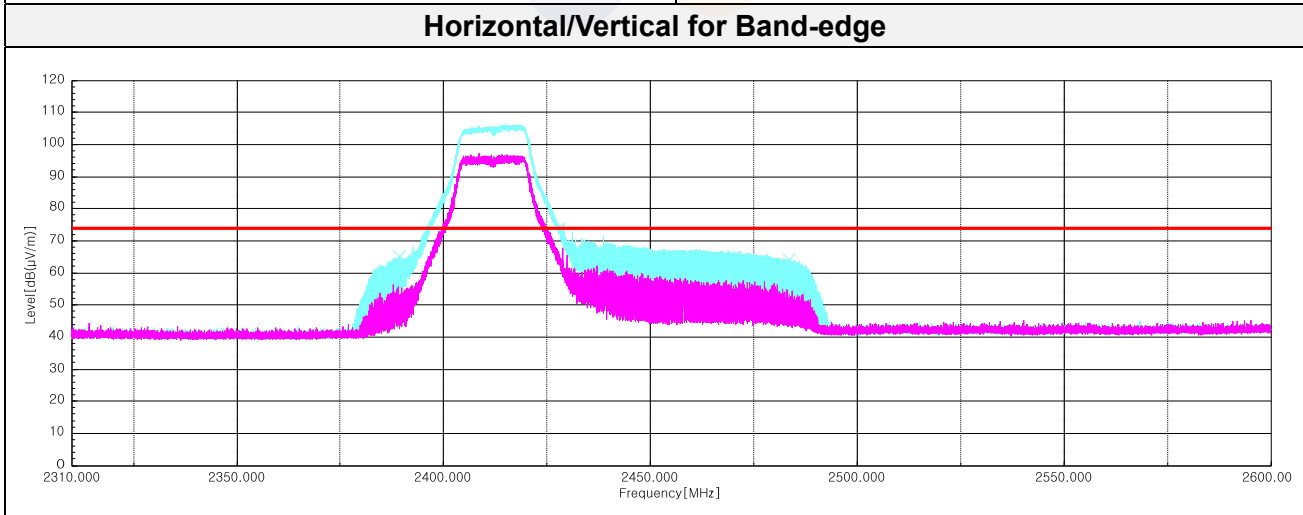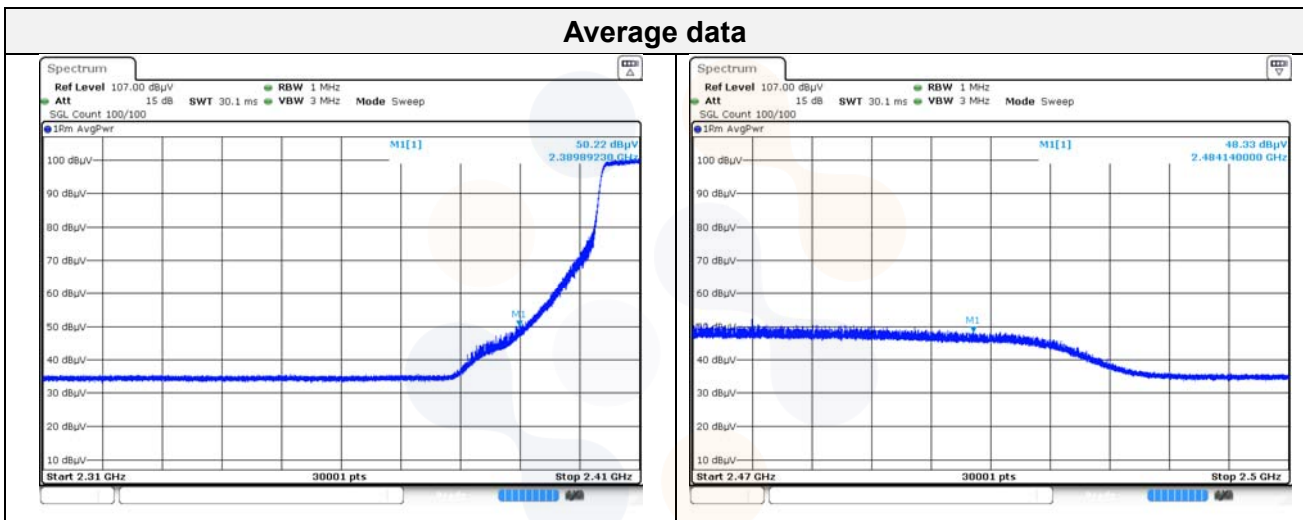

Horizontal/Vertical for 1 GHz ~ 3.5 GHz

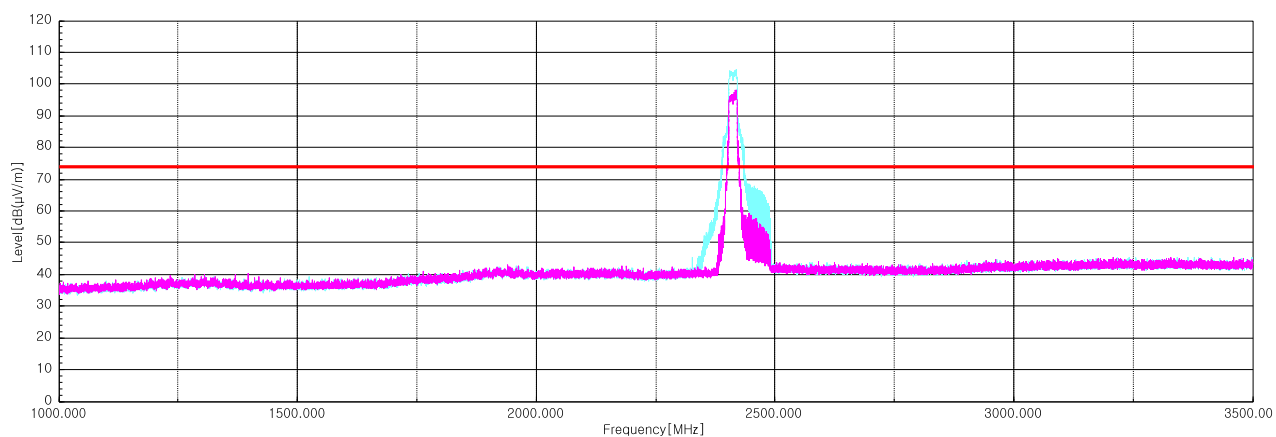

Horizontal/Vertical for 3.5 GHz ~ 18 GHz

