

FCC REPORT

Applicant: Dynamox SA

Address of Applicant: Rodovia Jose Carlos Daux, n 600 KM 01 Modulo 05, Parque Tec. Alfa CEP 88030-090, Florianopolis, SC Brazil

Equipment Under Test (EUT)

Product Name: DynaLogger

Model No.: DynaLogger HF, DynaLogger TcA+

FCC ID: 2AT3M010232

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 05 Jan., 2021

Date of Test: 06 Jan., to 16 Mar., 2021

Date of report issued: 16 Mar., 2021

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	16 Mar., 2021	Original

Tested by:*Mike.Ou***Date:** 16 Mar., 2021**Test Engineer****Reviewed by:***Winner Zhang***Date:** 16 Mar., 2021**Project Engineer**

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE.....	5
5.4 MEASUREMENT UNCERTAINTY.....	5
5.5 DESCRIPTION OF SUPPORT UNITS	5
5.6 RELATED SUBMITTAL(S) / GRANT (s).....	5
5.7 DESCRIPTION OF CABLE USED	6
5.8 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	6
5.9 LABORATORY FACILITY.....	6
5.10 LABORATORY LOCATION.....	6
5.11 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	8
6.1 CONDUCTED EMISSION.....	8
6.2 RADIATED EMISSION	9
7 TEST SETUP PHOTO	19
8 EUT CONSTRUCTIONAL DETAILS	21

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part 15.107	N/A
Radiated Emission	Part 15.109	Pass
Remark:		
1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: The EUT not applicable of the test item.		
Test Method:	ANSI C63.4:2014	

5 General Information

5.1 Client Information

Applicant:	Dynamox SA
Address:	Rodovia Jose Carlos Daux, n 600 KM 01 Modulo 05, Parque Tec. Alfa CEP 88030-090, Florianopolis, SC Brazil
Manufacturer/ Factory:	Dynamox SA
Address:	Rodovia Jose Carlos Daux, n 600 KM 01 Modulo 05, Parque Tec. Alfa CEP 88030-090, Florianopolis, SC Brazil

5.2 General Description of E.U.T.

Product Name:	DynaLogger
Model No.:	DynaLogger HF, DynaLogger TcA+
Power supply:	Non-rechargeable coin lithium battery DC 3 V, 1000mAh
Remark:	Model: DynaLogger HF, DynaLogger TcA + BT circuit design, layout, IC, crystal, antenna, components and internal wiring, the only difference is the model name, appearance and peripheral circuit.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

5.3 Test Mode

Operating mode	Detail description
Working mode	Keep the EUT in Working mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
LENOVO	Laptop	SL510	2847A65	DoC
Apple	Mobile phone	iPhone 11 Pro	MWDE2CH/A	Doc

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Description of Cable Used

Cable Type	Description	Length	From	To
N/A.				

5.8 Additions to, deviations, or exclusions from the method

No

5.9 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.10 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.11 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2020	07-21-2021
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-07-2020	03-06-2021
				03-07-2021	03-06-2022
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
				03-07-2021	03-06-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
				03-07-2021	03-06-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2020	06-21-2021
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2020	11-17-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
				03-07-2021	03-06-2022
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
				03-07-2021	03-06-2022
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
				03-05-2021	03-04-2022
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2020	11-17-2021
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
				03-05-2021	03-04-2022
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
				03-07-2021	03-06-2022
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
				03-07-2021	03-06-2022
Cable	SUHNER	SUCAFLEX100	58193/4PE	03-07-2020	03-06-2021
				03-07-2021	03-06-2022

6 Test results and Measurement Data

6.1 Conducted Emission

Test Requirement:	FCC Part 15 B Section 15.107		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)		Limit (dB μ V)
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	0.5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p>Reference Plane</p> <p>LISN</p> <p>AUX Equipment</p> <p>E.U.T.</p> <p>Test table/Insulation plane</p> <p>EMI Receiver</p> <p>Filter</p> <p>AC power</p> <p>40cm</p> <p>80cm</p> <p>Remark: E.U.T. Equipment Under Test LISN Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure	<ol style="list-style-type: none"> The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). They provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4(latest version) on conducted measurement. 		
Test Instruments:	Refer to section 5.11 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	N/A(EUT is powered by DC 3V)		


6.2 Radiated Emission

Test Requirement:	FCC Part 15 B Section 15.109													
Test Frequency Range:	30MHz to 6000MHz													
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)													
Receiver setup:	Frequency	Detector	RBW	VBW	Remark									
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value									
	Above 1GHz	Peak	1MHz	3MHz	Peak Value									
Limit:	RMS	1MHz	3MHz	Average	Value									
	Frequency	Limit (dBuV/m @3m)		Remark										
	30MHz-88MHz	40.0		Quasi-peak Value										
	88MHz-216MHz	43.5		Quasi-peak Value										
	216MHz-960MHz	46.0		Quasi-peak Value										
	960MHz-1GHz	54.0		Quasi-peak Value										
Test setup:	Above 1GHz													
	Below 1GHz													
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 													

	<ol style="list-style-type: none">4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.11 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All of the observed value above 6GHz were the noise floor , which were not recorded

Measurement Data:**Below 1GHz:**

Product Name:	DynaLogger	Product Model:	DynaLogger HF
Test By:	Mike	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

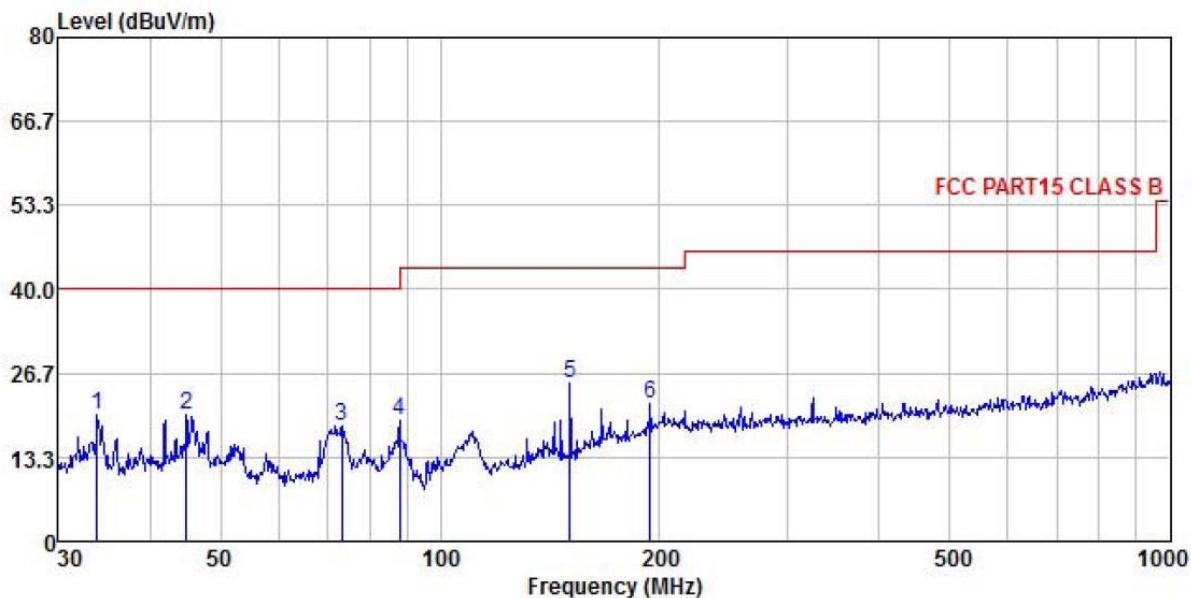


Freq MHz	Read	Antenna	Cable	Aux	Preampl	Limit Level dBuV/m	Line Limit dBuV/m	Over Limit dB	Remark
	Freq MHz	Level Factor	Cable Loss	Preamp Factor	Aux Factor				
1	33.917	37.11	12.44	0.38	0.00	29.96	19.97	40.00	-20.03 QP
2	44.901	36.53	12.90	0.48	0.00	29.86	20.05	40.00	-19.95 QP
3	73.359	36.31	11.06	0.66	0.00	29.69	18.34	40.00	-21.66 QP
4	88.033	37.68	10.29	0.72	0.00	29.58	19.11	43.50	-24.39 QP
5	150.538	39.01	14.31	1.03	0.00	29.22	25.13	43.50	-18.37 QP
6	193.773	31.52	17.70	1.39	0.00	28.87	21.74	43.50	-21.76 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Product Name:	DynaLogger	Product Model:	DynaLogger HF
Test By:	Mike	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

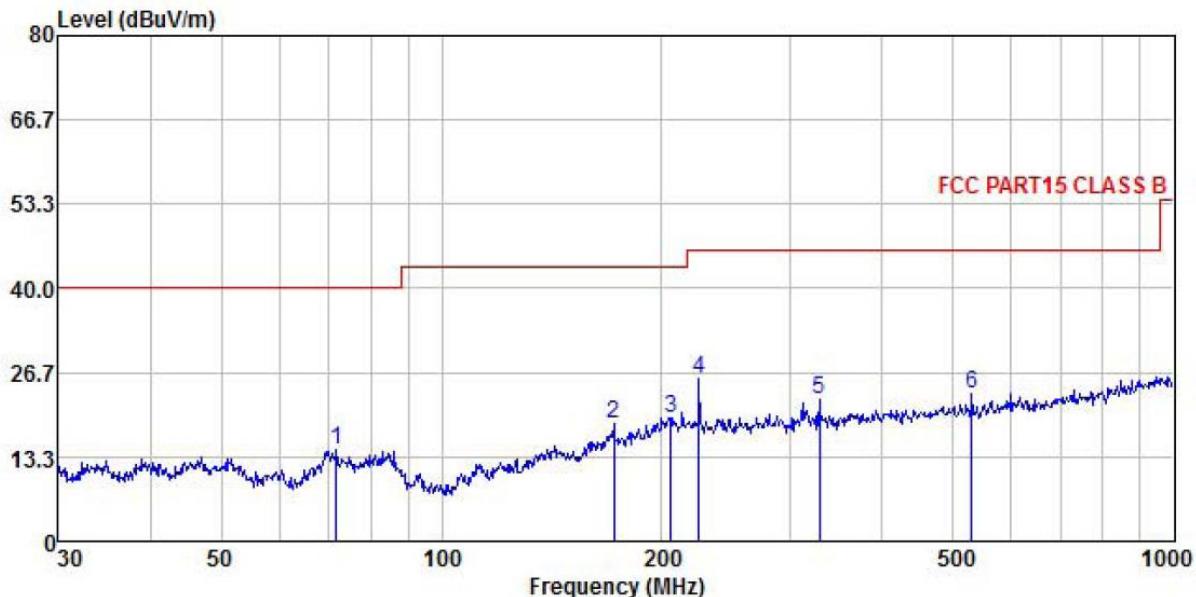


Freq	ReadAntenna Level	Cable Loss	Aux Factor	Preampl Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 71.832	32.98	10.62	0.66	0.00	29.71	14.55	40.00	-25.45 QP
2 171.995	29.69	16.61	1.22	0.00	29.03	18.49	43.50	-25.01 QP
3 205.675	28.60	18.32	1.44	0.00	28.79	19.57	43.50	-23.93 QP
4 224.519	34.53	18.40	1.49	0.00	28.68	25.74	46.00	-20.26 QP
5 327.887	30.34	18.76	1.83	0.00	28.51	22.42	46.00	-23.58 QP
6 530.101	30.46	19.52	2.43	0.00	29.04	23.37	46.00	-22.63 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Above 1GHz:

Product Name:	DynaLogger	Product Model:	DynaLogger HF
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Vertical
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

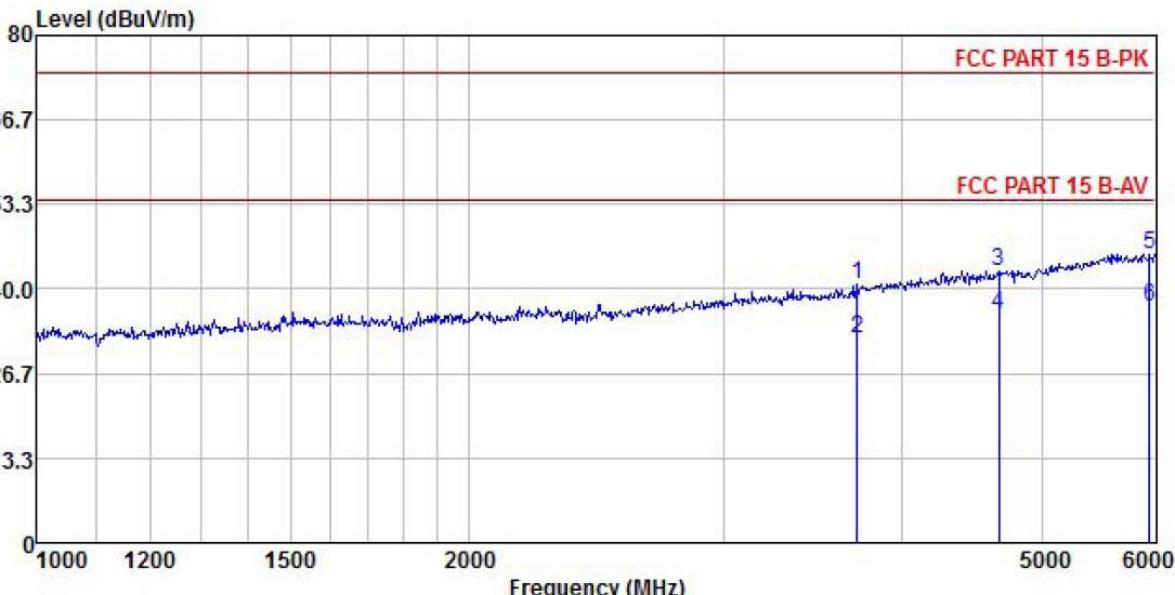


Freq	Read		Antenna	Cable	Aux	Preamp	Limit	Over Line	Over Limit	Remark
	Level	Factor	Level	Loss	Factor	Factor				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	dB	
1	3719.128	44.02	28.97	9.47	0.00	41.68	40.78	74.00	-33.22	Peak
2	3719.128	35.54	28.97	9.47	0.00	41.68	32.30	54.00	-21.70	Average
3	4670.008	43.88	30.49	10.59	0.00	42.03	42.93	74.00	-31.07	Peak
4	4670.008	36.88	30.49	10.59	0.00	42.03	35.93	54.00	-18.07	Average
5	5944.424	43.20	32.48	11.93	0.00	42.04	45.57	74.00	-28.43	Peak
6	5944.424	34.74	32.48	11.93	0.00	42.04	37.11	54.00	-16.89	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	DynaLogger	Product Model:	DynaLogger HF
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

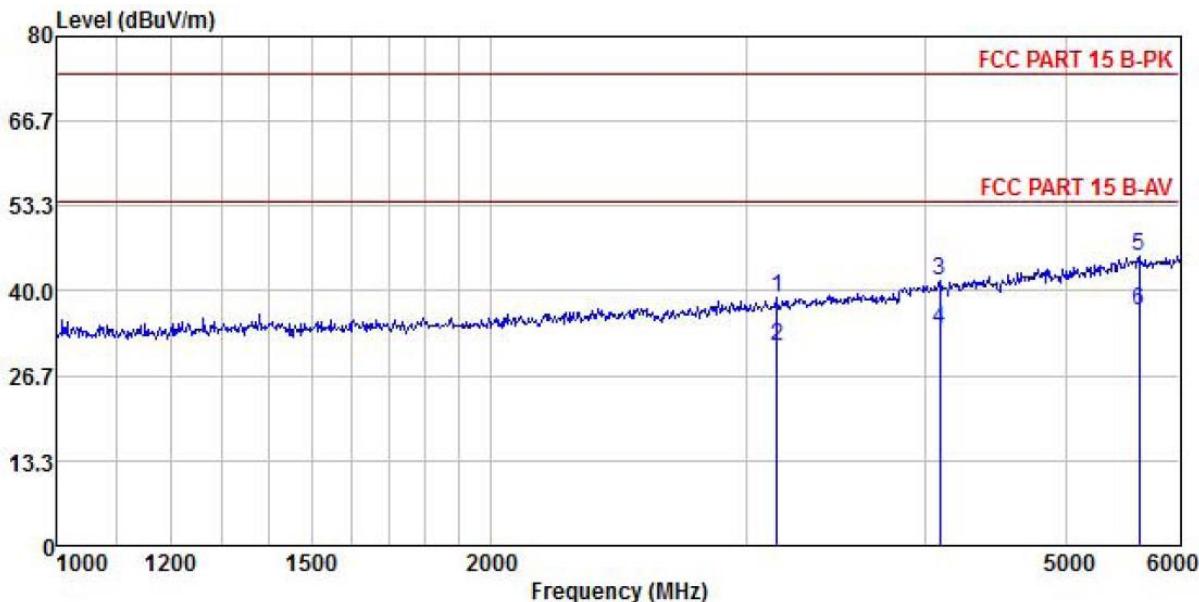


Freq MHz	ReadAntenna Level	Cable Loss	Aux Factor	Preamp Factor	Limit Line	Over Limit	Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 3152.157	43.14	28.50	8.77	0.00	41.43	38.98	74.00 -35.02 Peak
2 3152.157	35.58	28.50	8.77	0.00	41.43	31.42	54.00 -22.58 Average
3 4091.203	44.05	29.44	9.90	0.00	41.81	41.58	74.00 -32.42 Peak
4 4091.203	36.54	29.44	9.90	0.00	41.81	34.07	54.00 -19.93 Average
5 5618.262	43.83	32.35	10.98	0.00	41.81	45.35	74.00 -28.65 Peak
6 5618.262	35.35	32.35	10.98	0.00	41.81	36.87	54.00 -17.13 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Below 1GHz:

Product Name:	DynaLogger	Product Model:	DynaLogger TcA+
Test By:	Mike	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

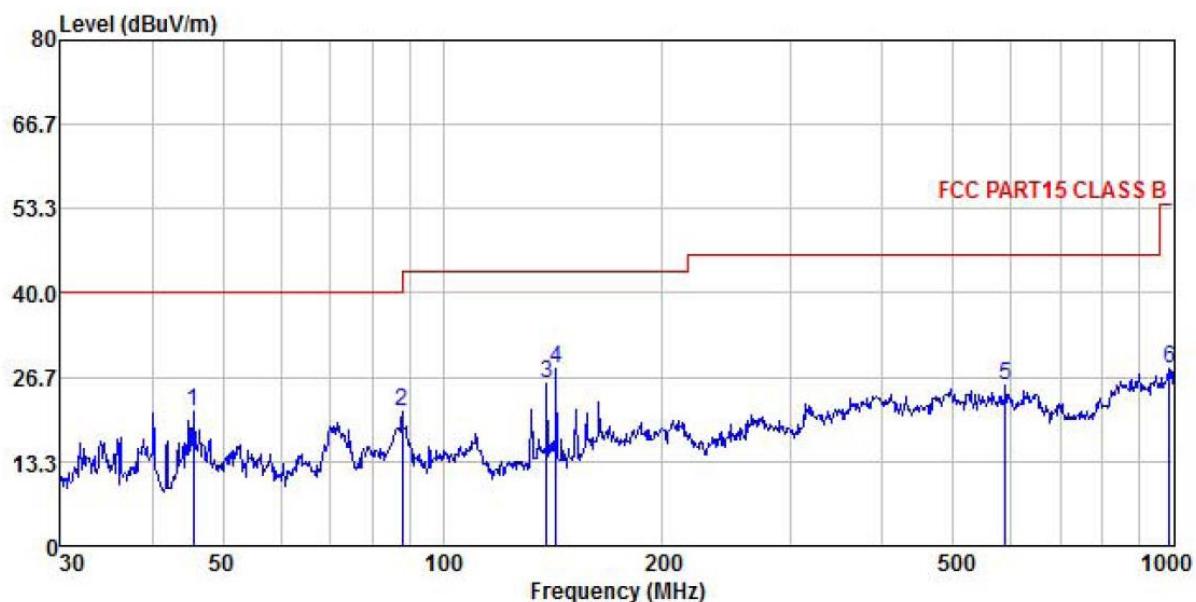


Freq MHz	Read	Antenna	Cable	Aux	Preampl	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	Level dBuV	Factor	Cable Loss dB	Aux Factor	Preampl Factor				
1 45.535	37.60	12.93	0.48	0.00	29.86	21.15	40.00	-18.85	QP
2 88.033	39.90	10.29	0.72	0.00	29.58	21.33	43.50	-22.17	QP
3 138.874	40.27	13.74	0.98	0.00	29.28	25.71	43.50	-17.79	QP
4 142.824	42.48	13.86	1.00	0.00	29.26	28.08	43.50	-15.42	QP
5 588.905	32.02	19.84	2.58	0.00	28.97	25.47	46.00	-20.53	QP
6 986.072	28.91	23.02	3.62	0.00	27.51	28.04	54.00	-25.96	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Product Name:	DynaLogger	Product Model:	DynaLogger TcA+
Test By:	Mike	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

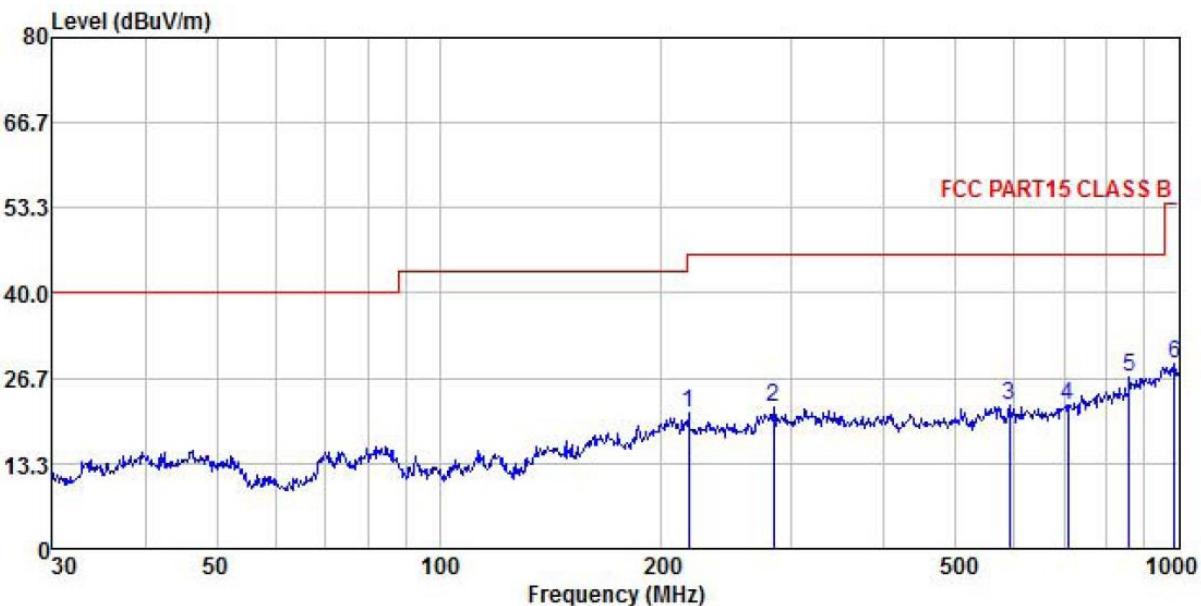

Freq MHz	Read	Antenna	Cable	Aux	Preamp	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	Freq MHz	Level dBuV	Factor dB/m	Loss dB	Factor dB				
1 217.544	30.23	18.38	1.47	0.00	28.72	21.36	46.00	-24.64	QP
2 282.985	30.20	18.63	1.69	0.00	28.48	22.04	46.00	-23.96	QP
3 590.974	28.85	19.85	2.59	0.00	28.97	22.32	46.00	-23.68	QP
4 709.182	27.64	20.52	2.86	0.00	28.63	22.39	46.00	-23.61	QP
5 857.025	29.96	21.55	3.24	0.00	27.99	26.76	46.00	-19.24	QP
6 986.072	29.78	23.02	3.62	0.00	27.51	28.91	54.00	-25.09	QP


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Above 1GHz:

Product Name:	DynaLogger		Product Model:	DynaLogger TcA+																																																																																	
Test By:	Mike		Test mode:	Working mode																																																																																	
Test Frequency:	1 GHz ~ 6 GHz		Polarization:	Vertical																																																																																	
Test Voltage:	DC 3V		Environment:	Temp: 24°C Huni: 57%																																																																																	
<table border="1"> <thead> <tr> <th>Freq</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Aux Factor</th> <th>Preamplifier Factor</th> <th>Limit Level</th> <th>Line Limit</th> <th>Over Limit</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td></td> </tr> <tr> <td>1</td> <td>3719.128</td> <td>44.02</td> <td>28.97</td> <td>9.47</td> <td>0.00</td> <td>41.68</td> <td>40.78</td> <td>74.00</td> <td>-33.22 Peak</td> </tr> <tr> <td>2</td> <td>3719.128</td> <td>37.54</td> <td>28.97</td> <td>9.47</td> <td>0.00</td> <td>41.68</td> <td>34.30</td> <td>54.00</td> <td>-19.70 Average</td> </tr> <tr> <td>3</td> <td>4439.613</td> <td>43.28</td> <td>30.02</td> <td>10.32</td> <td>0.00</td> <td>42.00</td> <td>41.62</td> <td>74.00</td> <td>-32.38 Peak</td> </tr> <tr> <td>4</td> <td>4439.613</td> <td>36.87</td> <td>30.02</td> <td>10.32</td> <td>0.00</td> <td>42.00</td> <td>35.21</td> <td>54.00</td> <td>-18.79 Average</td> </tr> <tr> <td>5</td> <td>5585.559</td> <td>44.13</td> <td>32.33</td> <td>10.88</td> <td>0.00</td> <td>41.80</td> <td>45.54</td> <td>74.00</td> <td>-28.46 Peak</td> </tr> <tr> <td>6</td> <td>5585.559</td> <td>34.28</td> <td>32.33</td> <td>10.88</td> <td>0.00</td> <td>41.80</td> <td>35.69</td> <td>54.00</td> <td>-18.31 Average</td> </tr> </tbody> </table>						Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB		1	3719.128	44.02	28.97	9.47	0.00	41.68	40.78	74.00	-33.22 Peak	2	3719.128	37.54	28.97	9.47	0.00	41.68	34.30	54.00	-19.70 Average	3	4439.613	43.28	30.02	10.32	0.00	42.00	41.62	74.00	-32.38 Peak	4	4439.613	36.87	30.02	10.32	0.00	42.00	35.21	54.00	-18.79 Average	5	5585.559	44.13	32.33	10.88	0.00	41.80	45.54	74.00	-28.46 Peak	6	5585.559	34.28	32.33	10.88	0.00	41.80	35.69	54.00	-18.31 Average
Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark																																																																												
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB																																																																													
1	3719.128	44.02	28.97	9.47	0.00	41.68	40.78	74.00	-33.22 Peak																																																																												
2	3719.128	37.54	28.97	9.47	0.00	41.68	34.30	54.00	-19.70 Average																																																																												
3	4439.613	43.28	30.02	10.32	0.00	42.00	41.62	74.00	-32.38 Peak																																																																												
4	4439.613	36.87	30.02	10.32	0.00	42.00	35.21	54.00	-18.79 Average																																																																												
5	5585.559	44.13	32.33	10.88	0.00	41.80	45.54	74.00	-28.46 Peak																																																																												
6	5585.559	34.28	32.33	10.88	0.00	41.80	35.69	54.00	-18.31 Average																																																																												
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 																																																																																					

Product Name:	DynaLogger	Product Model:	DynaLogger TcA+
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

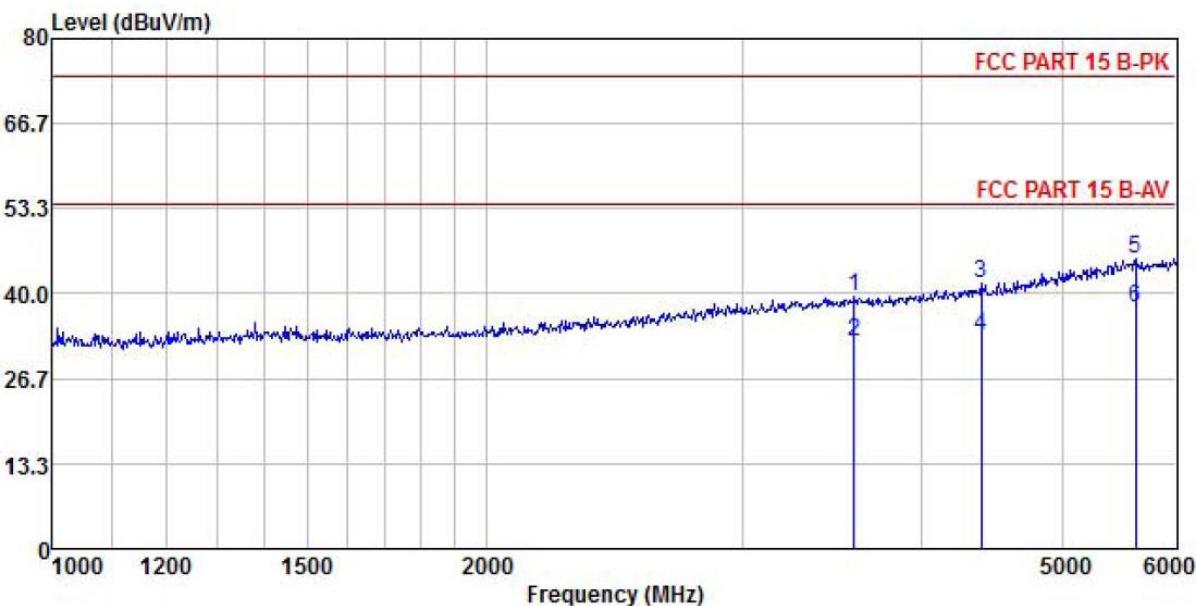

Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamplifier Factor dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 3591.116	42.89	28.81	9.31	0.00	41.53	39.48	74.00	-34.52	Peak
2 3591.116	35.79	28.81	9.31	0.00	41.53	32.38	54.00	-21.62	Average
3 4396.627	43.52	29.94	10.27	0.00	41.96	41.77	74.00	-32.23	Peak
4 4396.627	35.12	29.94	10.27	0.00	41.96	33.37	54.00	-20.63	Average
5 5618.262	43.83	32.35	10.98	0.00	41.81	45.35	74.00	-28.65	Peak
6 5618.262	36.35	32.35	10.98	0.00	41.81	37.87	54.00	-16.13	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

8 EUT Constructional Details

Reference to the test report No.: JYTSZB-R12-2100171.

-----End of report-----