

### FCC REPORT

**Applicant:** Mitac International Corporation

**Address of Applicant:** No.200, Wen Hwa 2nd Rd.,Kuei Shan Dist., Taoyuan,Taiwan

**Manufacturer:** Dongguan Yuanfeng Technology Co., Ltd

**Address of Manufacturer:** No. 18, Industrial East Road, Songshan Lake Hi-Tech Industrial Development Zone, Dongguan, Guangdong, 523808, China

**Equipment Under Test (EUT)**

Product Name: GPS Portable Navigation Device

Model No.: N584M-5000, N584M-7000

Trade mark: Magellan

**FCC ID:** P4Q-N584M

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.249:2017

**Date of sample receipt:** July 03, 2017


**Date of Test:** July 04-10, 2017

**Date of report issued:** July 11, 2017

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




**Robinson Lo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	July 11, 2017	Original

Prepared By:




Date:

July 11, 2017

Project Engineer

Check By:



Date:

July 11, 2017

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 DESCRIPTION OF SUPPORT UNITS.....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION.....	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
6 TEST INSTRUMENTS LIST.....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT.....	9
7.2 RADIATED EMISSION METHOD.....	10
7.2.1 Spurious emissions.....	12
8 TEST SETUP PHOTO.....	13
9 EUT CONSTRUCTIONAL DETAILS.....	13

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	N/A
AC Power Line Conducted Emission	15.207	N/A
Field strength of the fundamental signal	15.249 (a)	N/A
Spurious emissions* (30MHz ~ 1000MHz)	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	N/A
20dB Occupied Bandwidth	15.215 (c)	N/A

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013.*

*\* The memory of the product is upgraded from 8GB to 16GB, according to the assessment of the changes to have an impact on Spurious Emission (30MHz ~ 1000MHz), so the Spurious Emission (30MHz ~ 1000MHz) was retested.*

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.			

## 5 General Information

### 5.1 General Description of EUT

Product Name:	GPS Portable Navigation Device
Model No.:	N584M-5000, N584M-7000
Test Model No.:	N584M-7000
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is the model name for commercial purpose.</i>	
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	Integral antenna
Antenna gain:	0.4dBi
Power supply:	DC 3.7V 1500mAh Li-ion Battery Battery: charge by DC 5V Car charger 1 Model No.: DCCQ050200EC Input: DC 12-24V Output: DC 5.0V 2A or Car charger 2 Model No.: DCCQ050200EC Input: DC 12-24V Output: DC 5.0V 2A or Adapter Model: ASSA107a-050200 Input: AC100-240V 50/60Hz 0.45A Output: DC 5.0V 2.0A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	93.52	94.17	94.01

### Final Test Mode:

The EUT was tested in GFSK,  $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation is the worst case.

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup":

Y axis (see the test setup photo)

## 5.3 Description of Support Units

None.

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

## 5.6 Other Information Requested by the Customer

None.

## 6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2017	June 28 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2017	June 28 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2017	June 28 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2017	June 28 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2017	June 28 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2017	June 28 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2017	June 28 2018
11	Coaxial cable	GTS	N/A	GTS210	June 29 2017	June 28 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2017	June 28 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2017	June 28 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2017	June 28 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2017	June 28 2018
16	Band filter	Amindeon	82346	GTS219	June 29 2017	June 28 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 29 2017	June 28 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 29 2017	June 28 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 29 2017	June 28 2018





## 7 Test results and Measurement Data

### 7.1 Antenna requirement
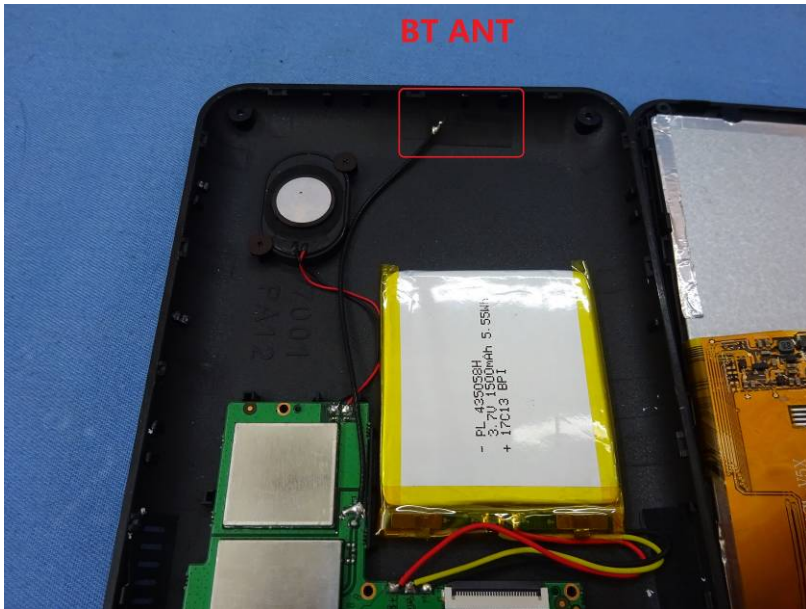
<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b> <p><i>The antenna is Integral antenna, the best case gain of the antenna is 0.4 dBi</i></p> 	

## 7.2 Radiated Emission Method

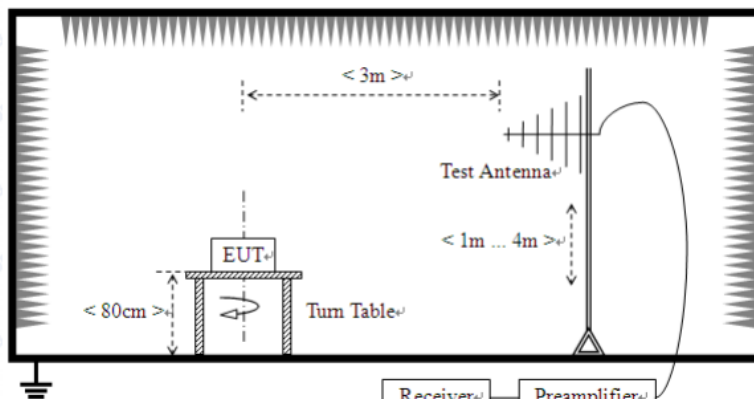Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.00		Quasi-peak Value
	88MHz-216MHz		43.50		Quasi-peak Value
	216MHz-960MHz		46.00		Quasi-peak Value
	960MHz-1GHz		54.00		Quasi-peak Value
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
	<div></div>				
	Above 1GHz				

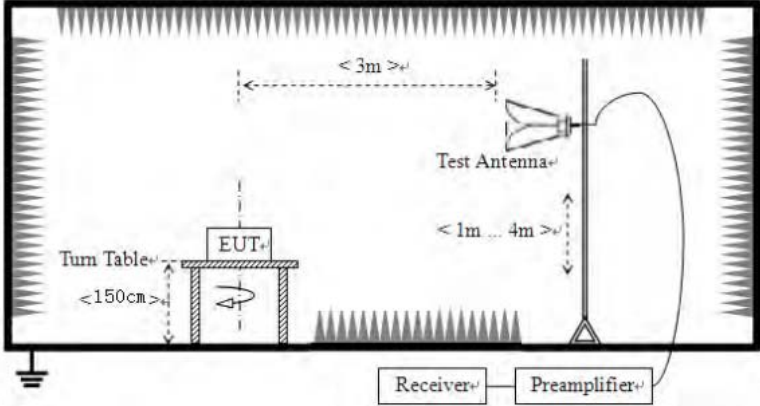	
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Measurement data:


## 7.2.1 Spurious emissions

### ■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
37.42	35.49	11.20	0.64	30.06	17.27	40.00	-22.73	Vertical
52.03	37.98	12.20	0.79	29.98	20.99	40.00	-19.01	Vertical
85.30	40.18	9.50	1.07	29.77	20.98	40.00	-19.02	Vertical
131.76	39.28	8.10	1.45	29.50	19.33	43.50	-24.17	Vertical
155.91	39.18	7.85	1.60	29.38	19.25	43.50	-24.25	Vertical
760.70	28.14	20.71	4.32	29.20	23.97	46.00	-22.03	Vertical
35.01	35.93	11.20	0.61	30.07	17.67	40.00	-22.33	Horizontal
47.99	35.43	12.23	0.75	30.01	18.40	40.00	-21.60	Horizontal
68.87	42.69	7.40	0.93	29.86	21.16	40.00	-18.84	Horizontal
88.34	39.42	10.60	1.10	29.75	21.37	43.50	-22.13	Horizontal
223.73	34.16	10.98	1.98	29.43	17.69	46.00	-28.31	Horizontal
627.27	29.29	19.43	3.83	29.27	23.28	46.00	-22.72	Horizontal

## 8 Test Setup Photo

Radiated Emission

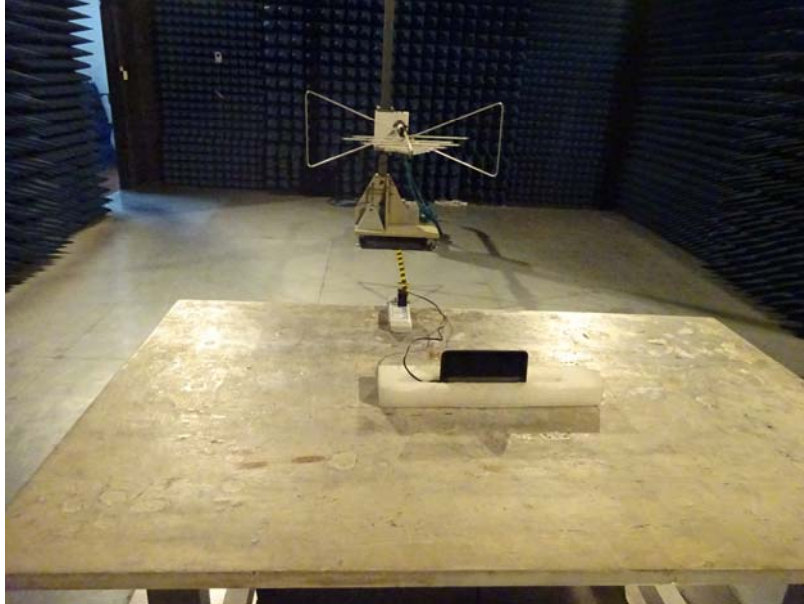

## 9 EUT Constructional Details

Reference to the test report No. GTS201708000227F01

-----End-----