

FCC PART 22, 74 AND 90

TEST REPORT

For

Tait International Limited

245 Wooldridge Road, Harewood, Christchurch, New Zealand

FCC ID:CASTPEHGF


Report Type: Original Report	Product Type: Two way radio
Report Number: DG2210813-34323E-00A	
Report Date: 2021-09-14	
Reviewed By:	Gavin Xu RF Engineer 
Prepared By:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
TECHNICAL SPECIFICATION	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
DECLARATIONS	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	5
TEST EQUIPMENT LIST	6
ENVIRONMENTAL CONDITIONS	6
SUMMARY OF TEST RESULTS	7
2 - RF OUTPUT POWER	8
APPLICABLE STANDARD	8
TEST PROCEDURE	8
TEST DATA	8
3 - MODULATION CHARACTERISTIC	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST DATA	13
4 - OCCUPIED BANDWIDTH & EMISSION MASK	17
APPLICABLE STANDARD	17
TEST PROCEDURE	17
TEST DATA	17
5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26
6 - RADIATED SPURIOUS EMISSIONS	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31
7 - FREQUENCY STABILITY	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
8 - TRANSIENT FREQUENCY BEHAVIOR	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	42

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

Product Name:	Two way radio
Test Model:	T03-00312-GCDA
Multiple Models:	T03-00312-GXXX ("XXX" please refer to the DOS)
Model Difference:	Refer to the DOS letter
Rated Input Voltage:	DC 7.4V from battery, DC 12V charging from charger base
Serial Number:	T03-00312-GCDA: DG2210813-34323E-RF-S1 T03-00312-GBEA: DG2210813-34323E-RF-S2 T03-00312-GAAA: DG2210813-34323E-RF-S3
EUT Received Date:	2021.8.13
EUT Received Status:	Good

Technical Specification

Operation Frequency Range (MHz):	400-480
Rated RF Output Power (Conducted) (W):	High power level: 4 Low power level: 1
Modulation Type:	FM, 4FSK
Channel Spacing (kHz):	12.5/25

Objective

This test report is prepared on behalf of **Tait International Limited** in accordance with Part 2, and Part 22, 74 and 90 of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with:

the Code of federal Regulations Title 47, Part 2, Part 22, Part 74 and Part 90

ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

TIA-603-E-2016, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

EUT Exercise Software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Wenschel	Termination	1440	MD477

Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

Block Diagram of Test Setup

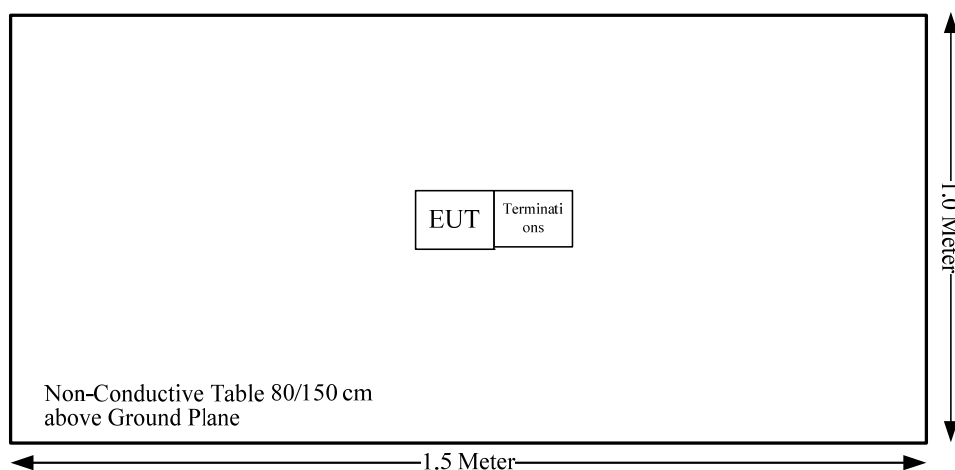

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated emissions below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2021-09-11	2022-09-10
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2021-08-19	2022-08-18
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2021-08-19	2022-08-18
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2021-08-19	2022-08-18
Sonoma	Amplifier	310N	185914	2021-08-19	2022-08-18
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2021-09-05	2022-09-05
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
E-Microwave	Band Rejector Filter	OBF-ZP-400-470-NF	OE01201051	2021/1/23	2022/1/23
Radiated emissions above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-22	2022-07-21
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2020-09-05	2021-09-05
Agilent	Signal Generator	E8247C	MY43321350	2021-04-25	2022-04-24
E-Microwave	Band Rejector Filter	OBF-ZP-400-470-NF	OE01201051	2021/1/23	2022/1/23
RF Conducted Test					
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2020-09-12	2021-09-12
R&S	Spectrum Analyzer	FSV40	101474	2021-07-06	2022-07-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	2020-09-05	2021-09-05
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	2020-09-05	2021-09-05
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	2021-05-06	2022-05-05
E-Microwave	Coaxial Attenuators	EMCA40-200SN-6	OE01201046	2020-09-06	2021-09-06
HP	RF Communications Test Set	8920A	3438A05201	2021-07-06	2022-07-05
BACL	TEMP&HUMI Test Chamber	BTH-150	30022.000000	2021-02-24	2022-02-23
UNI-T	Multimeter	UT39A	M130199938	2020-08-25	2021-08-24
Pro instrument	DC Power Supply	pps3300	3300012.000000	N/A	N/A
E-Microwave	Band Rejector Filter	OBF-ZP-400-470-NF	OE01201051	2021/1/23	2022/1/23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Test Item:	Radiation Below 1GHz	Radiation Above 1GHz	RF Conducted
Temperature:	27 °C	27.5°C	28.8~29.5°C
Relative Humidity:	57%	59%	46~57 %
ATM Pressure:	100.4kPa	100.4kPa	100.0~100.3kPa
Tester:	Johnson Huang	Jeremy Liang	Levi Shi
Test Date:	2021.09.14	2021.09.02	2021.08.18~2021.08.23

SUMMARY OF TEST RESULTS

S/N	FCC Rules	Description of Test	Results
2	§2.1046; § 22.727; §74.461; §90.205	RF Output Power	Compliance
3	§2.1047	Modulation Characteristic	Compliance
4	§2.1049; §22.357; § 22.731; §74.462; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
5	§2.1051; §22.359; §74.462; §90.210	Spurious Emission at Antenna Terminal	Compliance
6	§2.1053; §22.861; §74.462; §90.210	Spurious Radiated Emissions	Compliance
7	§2.1055; § 22.355; §74.464; §90.213	Frequency Stability	Compliance
8	§90.214	Transient Frequency Behavior	Compliance

2 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, § 22.727, §74.461 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W Video B/W
100 kHz 300 kHz

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)		Note
				High Power Level	Low Power Level	High Power Level	Low Power Level	
12.5kHz	FM	Low	400.0125	35.80	29.91	36.81	30.79	FCC
		Middle	453.2125	35.48	29.66	36.81	30.79	Part 90
		High	479.9875	36.14	30.12	36.81	30.79	
		Additional	454.0125	35.47	29.64	36.81	30.79	Part 22
		Additional	455.0125	35.53	29.80	36.81	30.79	Part 74
	4FSK	Low	400.0125	35.91	30.61	36.81	30.79	FCC
		Middle	453.2125	35.64	30.39	36.81	30.79	Part 90
		High	479.9875	36.34	30.63	36.81	30.79	
		Additional	454.0125	35.64	30.36	36.81	30.79	Part 22
		Additional	455.0125	35.71	30.47	36.81	30.79	Part 74
25kHz	FM	Additional	454.0125	35.47	29.64	36.81	30.79	Part 22
		Additional	455.0125	35.55	29.78	36.81	30.79	Part 74


Note:

The high rated power level is 4W(36dBm), and low rated power level is 1W(30dBm).


The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

FM, 12.5kHz:


Low Channel, 400.0125 MHz High Power

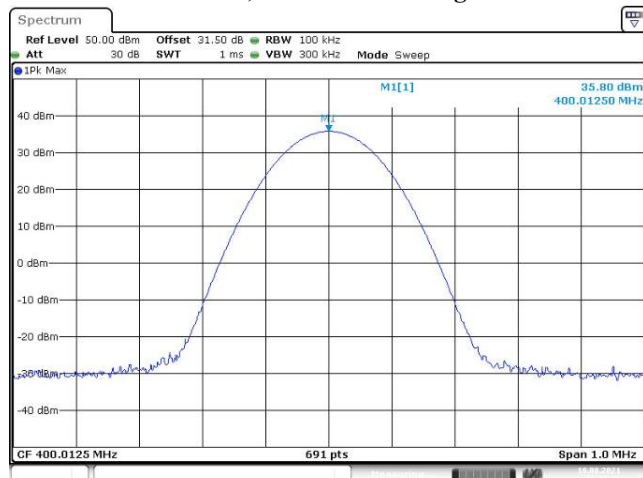


Low Channel, 400.0125 MHz Low Power

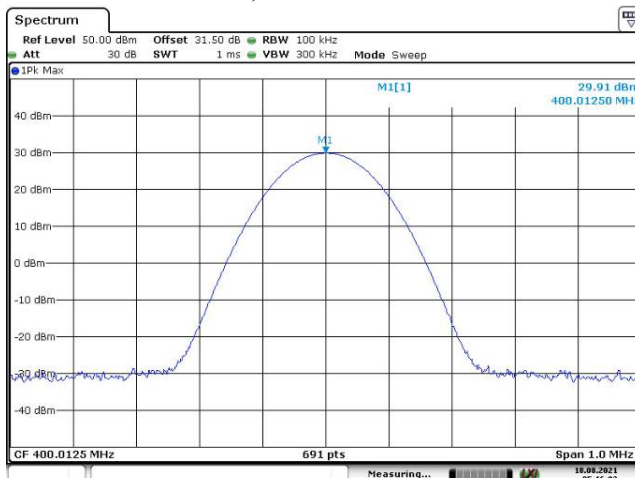


Part 90, Middle Channel, 453.2125 MHz High Power

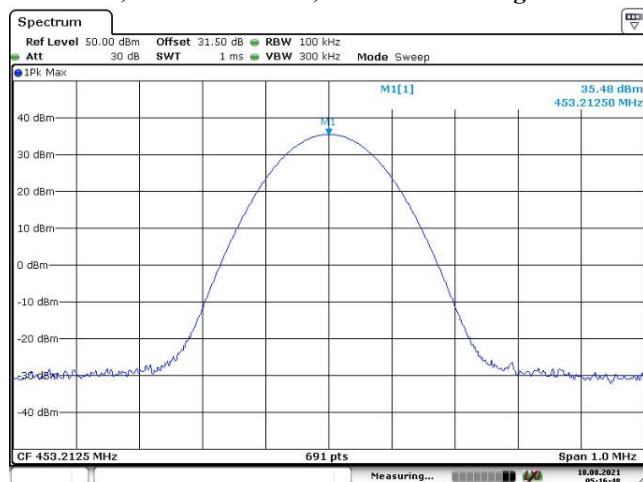


Part 90, Middle Channel, 453.2125 MHz Low Power

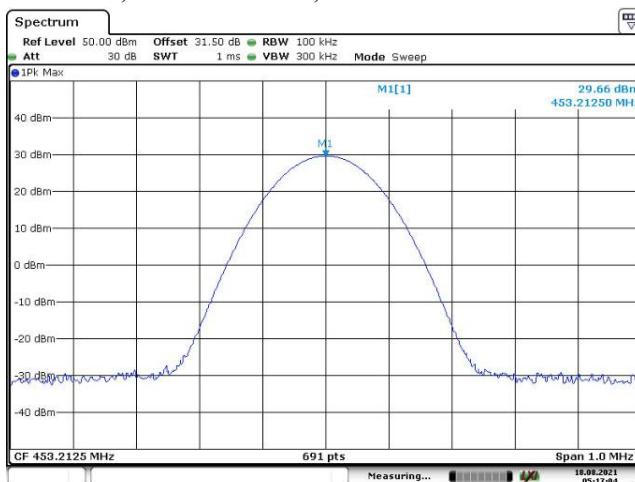


Part 90, High Channel, 479.9875 MHz High Power

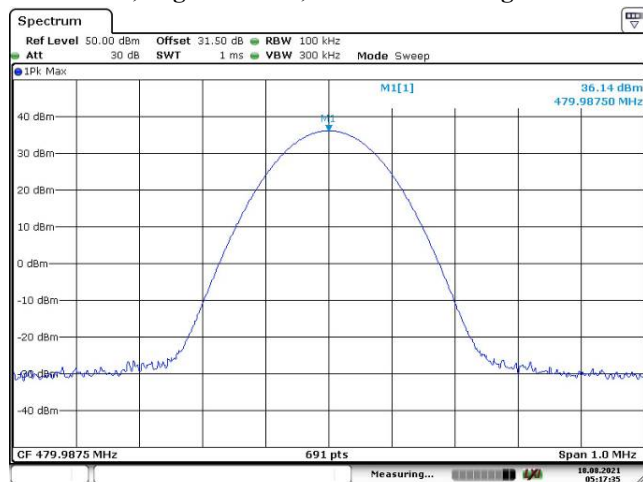

Part 90, High Channel, 479.9875 MHz Low Power

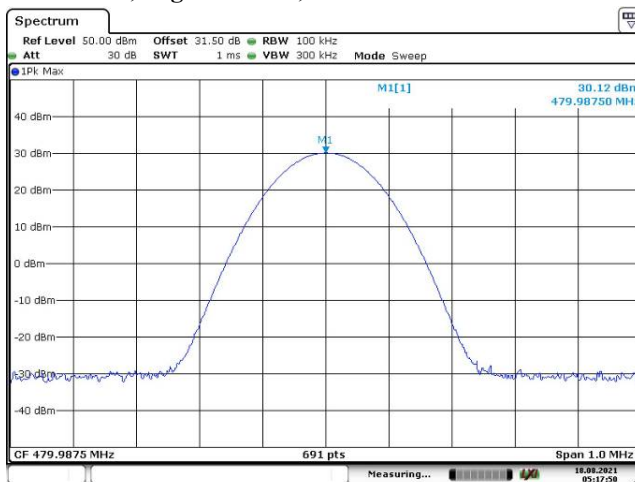

Additional, For Part 22, 454.0125 MHz High Power

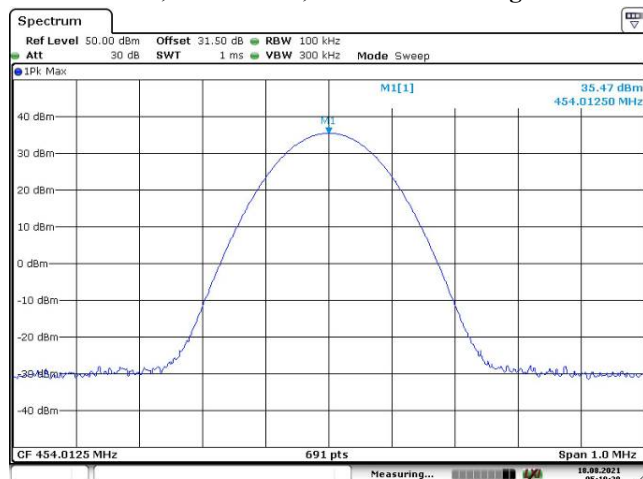


Date: 18.AUG.2021 05:18:39

Additional, For Part 22, 454.0125 MHz Low Power




Date: 18.AUG.2021 05:18:52

Additional, For Part 74, 455.0125 MHz High Power

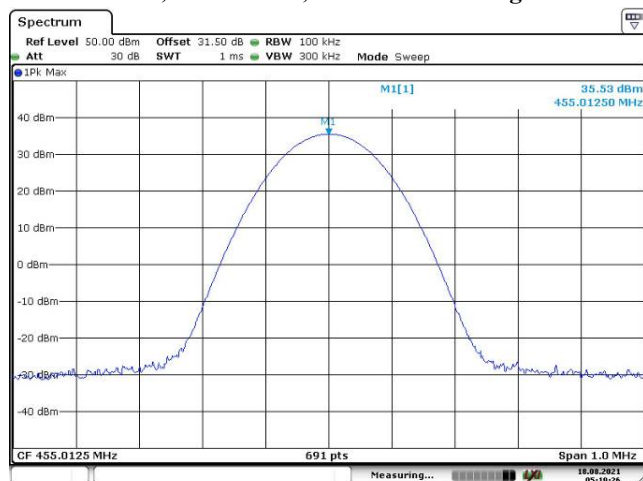

Date: 18.AUG.2021 05:19:26


Additional, For Part 74, 455.0125 MHz Low Power

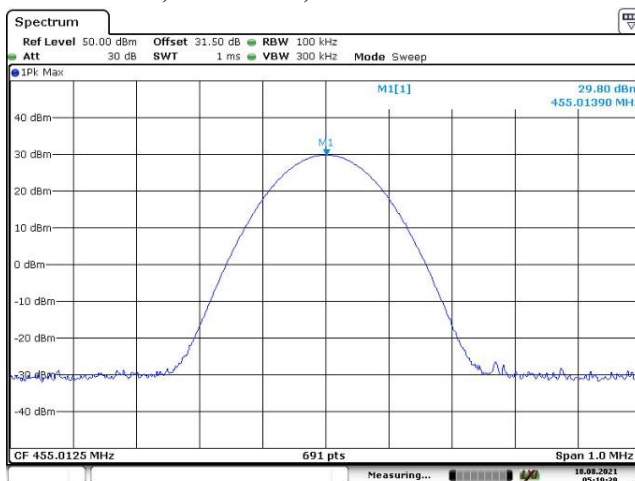

Date: 18.AUG.2021 05:19:39


4FSK, 12.5kHz:

Low Channel, 400.0125 MHz High Power

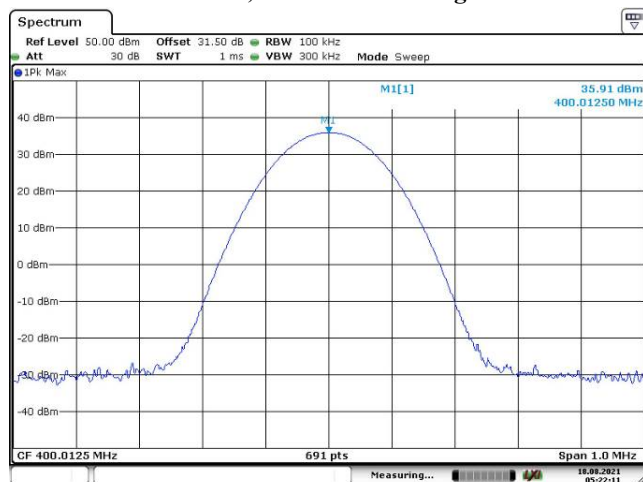


Date: 18.AUG.2021 05:22:11

Low Channel, 400.0125 MHz Low Power

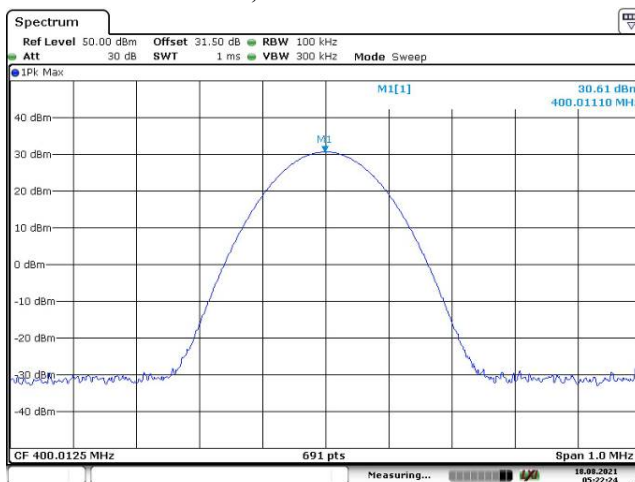


Date: 18.AUG.2021 05:22:24

Part 90, Middle Channel, 453.2125 MHz High Power

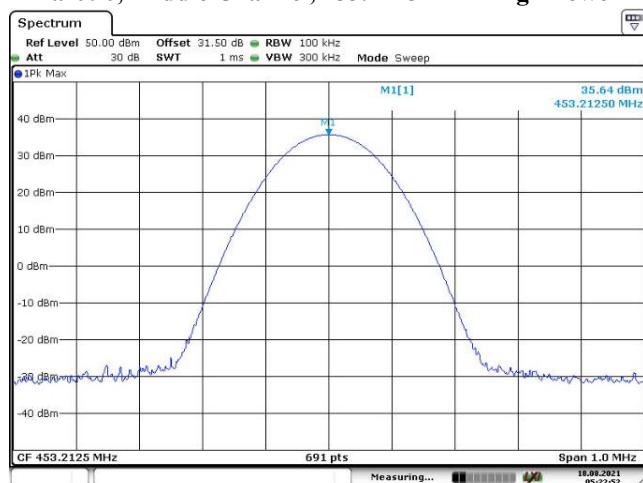


Date: 18.AUG.2021 05:22:52

Part 90, Middle Channel, 453.2125 MHz Low Power

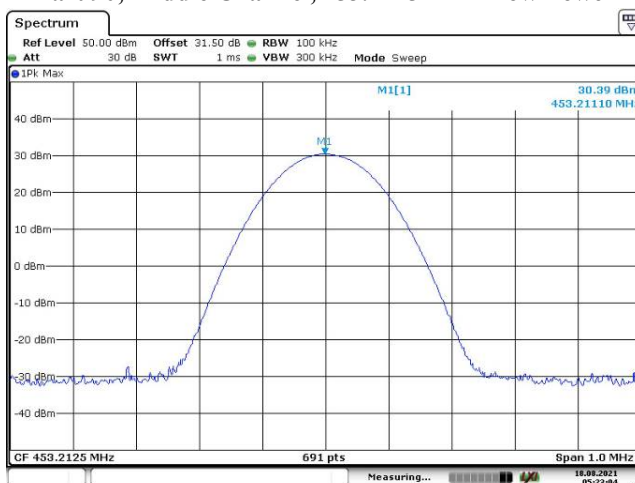


Date: 18.AUG.2021 05:23:04

Part 90, High Channel, 479.9875 MHz High Power

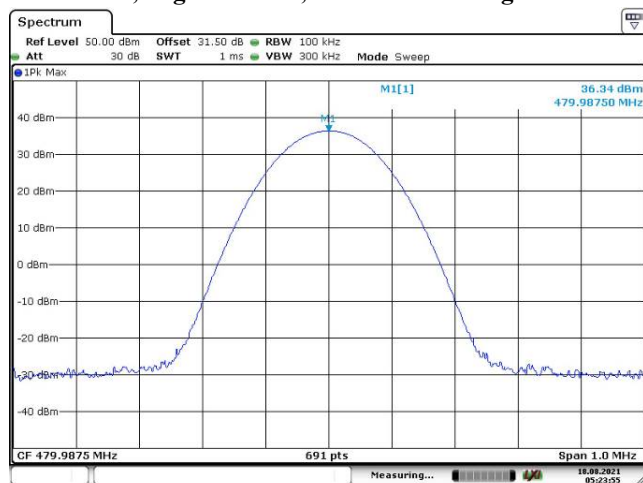


Date: 18.AUG.2021 05:23:55

Part 90, High Channel, 479.9875 MHz Low Power

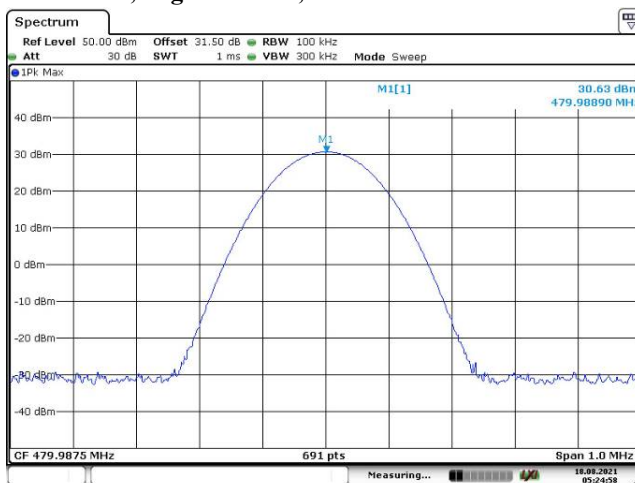


Date: 18.AUG.2021 05:24:58

Additional, For Part 22, 454.0125 MHz High Power

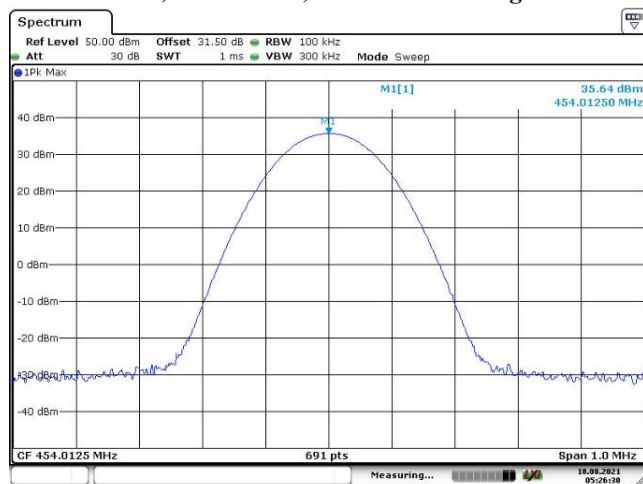


Date: 18.AUG.2021 05:26:30

Additional, For Part 22, 454.0125 MHz Low Power

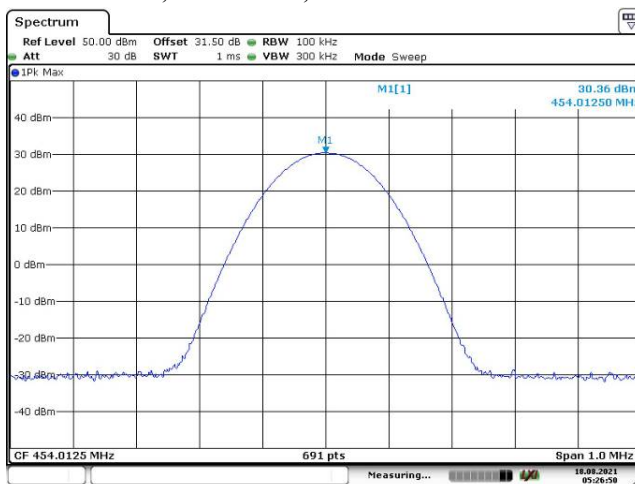


Date: 18.AUG.2021 05:26:50

Additional, For Part 74, 455.0125 MHz High Power

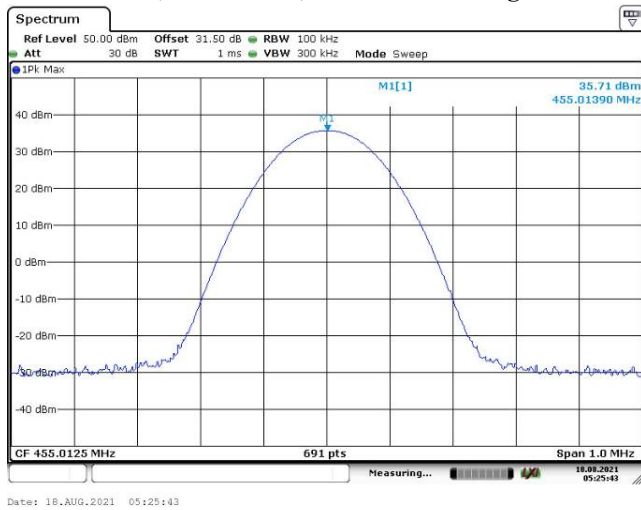


Additional, For Part 74, 455.0125 MHz Low Power

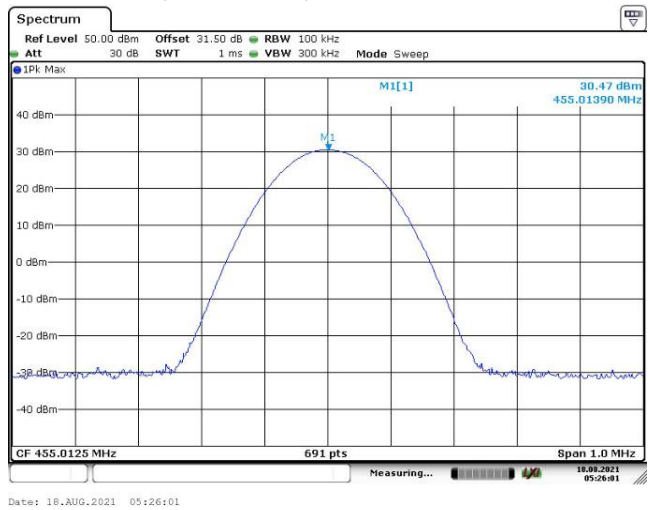


FM, 25kHz:


Additional Channel, Part 74, 455.0125 MHz High Power

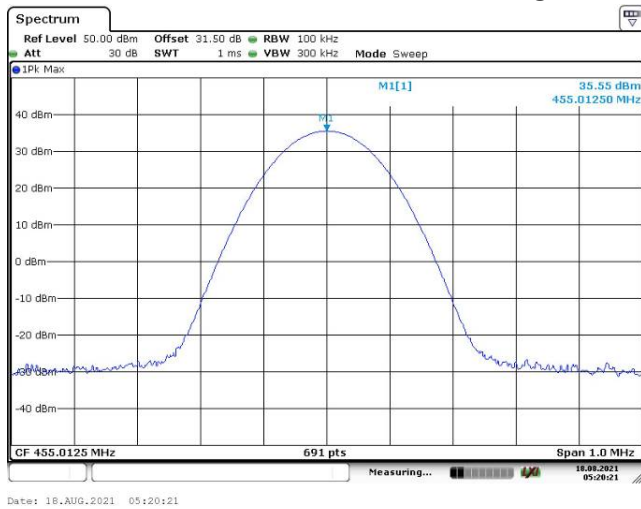


Additional Channel, Part 74, 455.0125 MHz Low Power

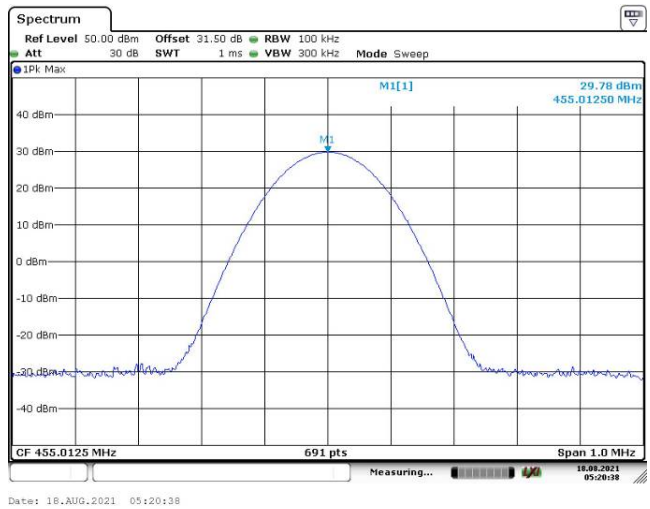

Additional Channel, Part 22, 454.0125 MHz High Power

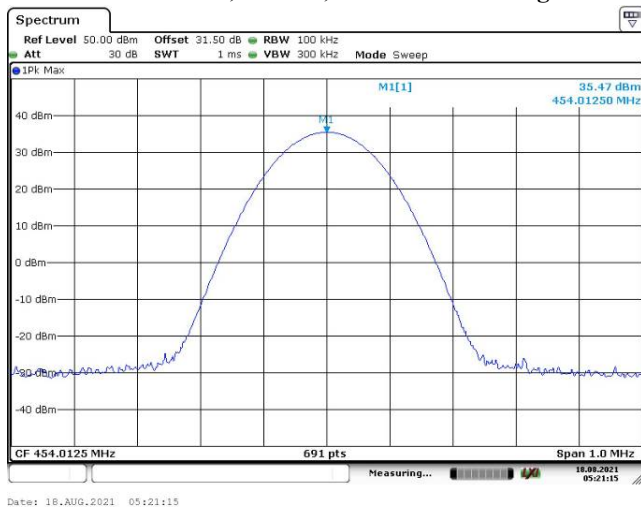

Additional Channel, Part 22, 454.0125 MHz Low Power

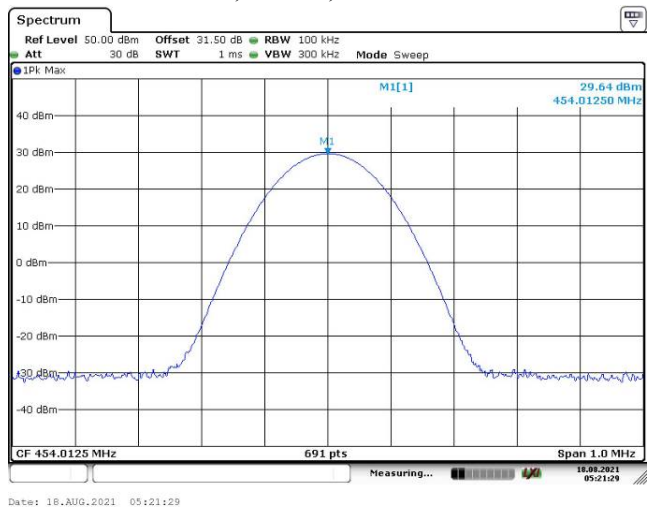

3 - MODULATION CHARACTERISTIC

Applicable Standard

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA-603-E 2.2.3


Test Data

Test Mode: Transmitting

Test Result: Compliance.


Please refer to the following tables and plots.

Audio Frequency Response – High Power

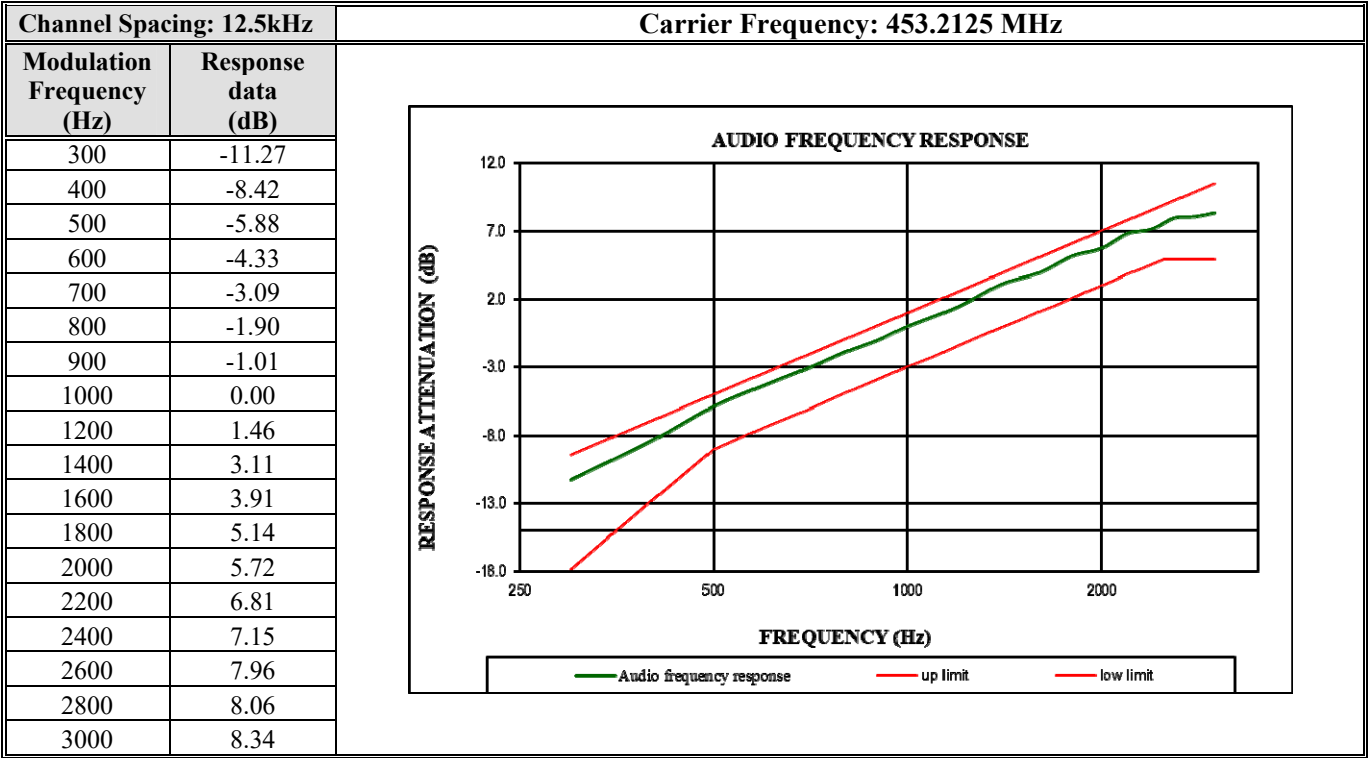


Modulation Limiting – High Power

Channel Spacing: 12.5kHz		Carrier Frequency: 453.2125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.530	0.200	1.588	0.208	2.5
400	1.635	0.226	1.636	0.228	2.5
500	1.735	0.267	1.751	0.268	2.5
600	1.836	0.296	1.827	0.299	2.5
700	1.920	0.308	1.917	0.300	2.5
800	1.988	0.316	1.986	0.318	2.5
900	1.936	0.320	1.928	0.325	2.5
1000	1.925	0.303	1.923	0.310	2.5
1200	1.920	0.356	1.916	0.365	2.5
1400	2.005	0.358	2.047	0.396	2.5
1600	2.025	0.383	2.056	0.405	2.5
1800	1.906	0.411	1.902	0.412	2.5
2000	1.936	0.427	1.946	0.436	2.5
2200	1.955	0.455	1.945	0.433	2.5
2400	1.930	0.486	1.994	0.479	2.5
2600	1.930	0.512	1.926	0.503	2.5
2800	2.005	0.507	2.003	0.508	2.5
3000	2.008	0.551	2.031	0.561	2.5

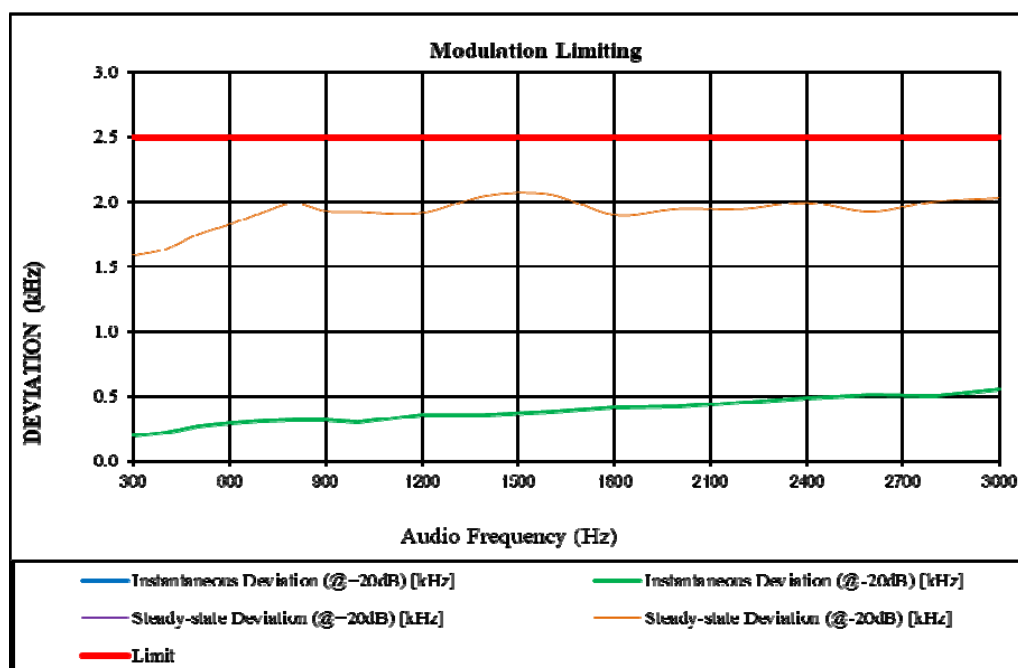

Audio Frequency Low Pass Filter Response – High Power

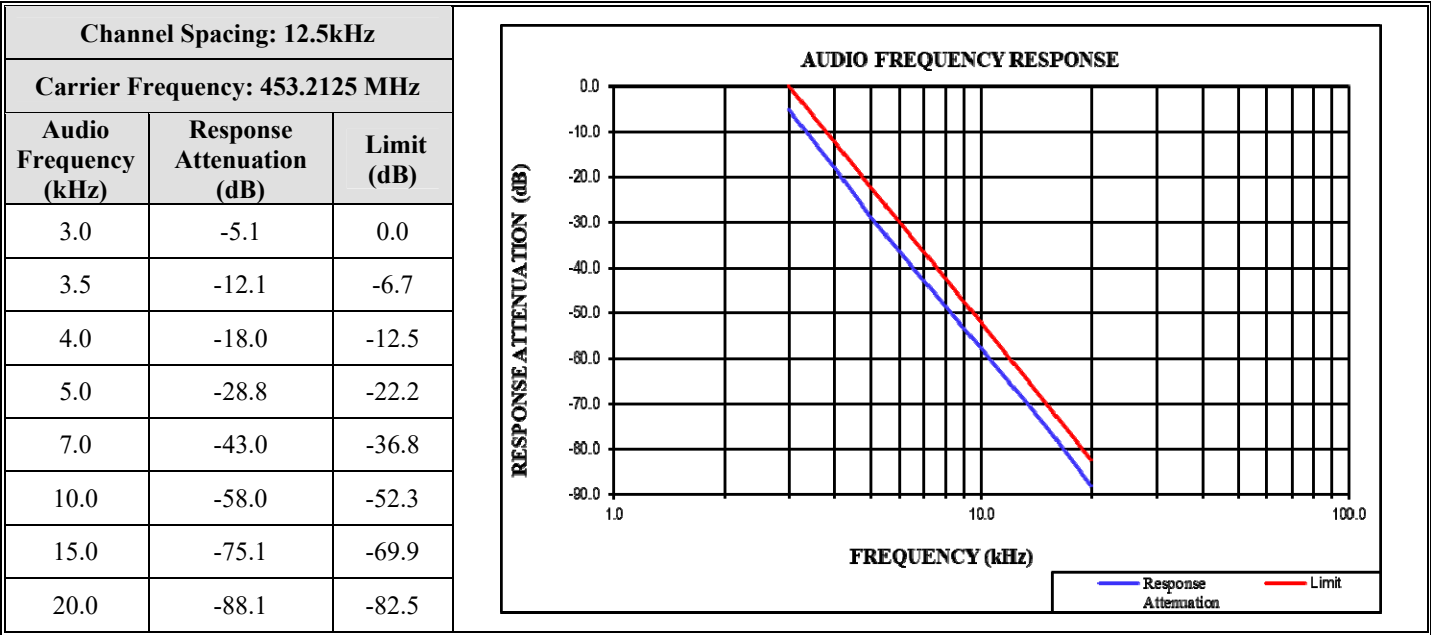

4 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, §90.209 and §90.210

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table and plots.

Test Mode	Test Channel	Test Frequency (MHz)	High Power Level		Low Power Level		Note
			99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	
FM 12.5kHz	Low	400.0125	5.210	10.275	5.282	10.203	Part 90
	Middle	453.2125	5.210	10.203	5.210	10.203	
	High	479.9875	5.282	10.275	5.355	10.275	
	Additional	454.0125	5.210	10.275	5.210	10.275	Part 22
	Additional	455.0125	5.282	10.203	5.282	10.203	Part 74
4FSK 12.5kHz	Low	400.0125	6.585	8.104	6.512	8.828	Part 90
	Middle	453.2125	6.585	8.973	6.729	8.755	
	High	479.9875	6.440	8.828	6.440	7.815	
	Additional	454.0125	6.512	8.249	6.440	8.249	Part 22
	Additional	455.0125	6.078	7.598	6.657	8.828	Part 74
FM 25kHz	Additional	454.0125	10.420	15.480	10.420	15.480	Part 22
	Additional	455.0125	10.420	15.480	10.420	15.480	Part 74

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, $BW = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 7K60F1D and 7K60F1E


The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.


Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

FM, 12.5kHz, High Power:

Low Channel

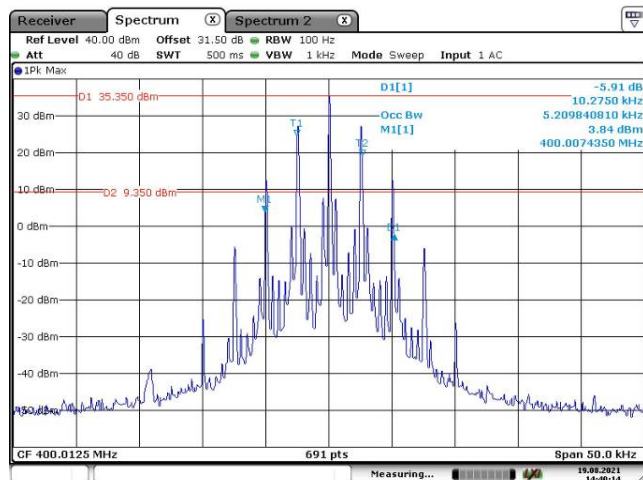


Date: 19.AUG.2021 14:40:14

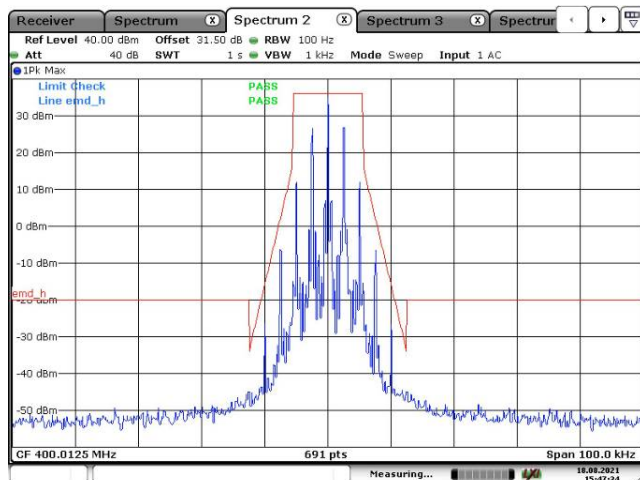


Date: 18.AUG.2021 15:47:34

Middle Channel

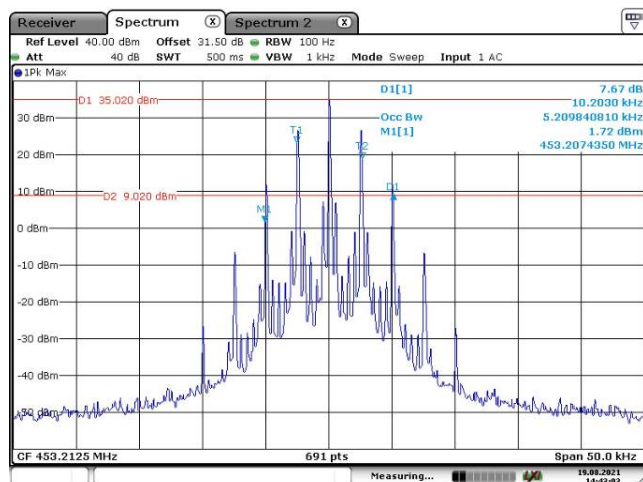


Date: 19.AUG.2021 14:43:04

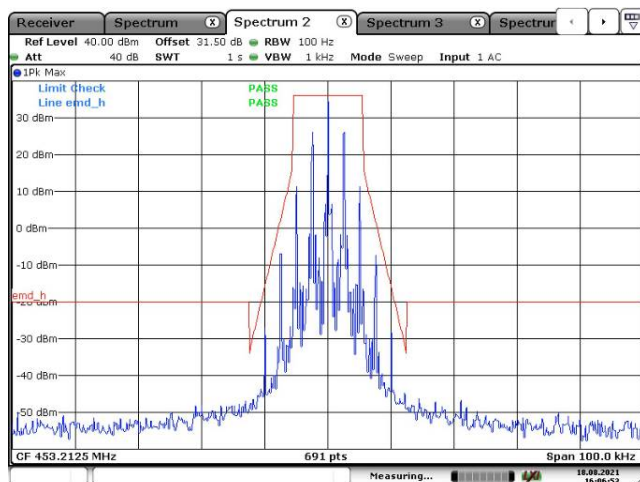


Date: 18.AUG.2021 16:06:53

High Channel

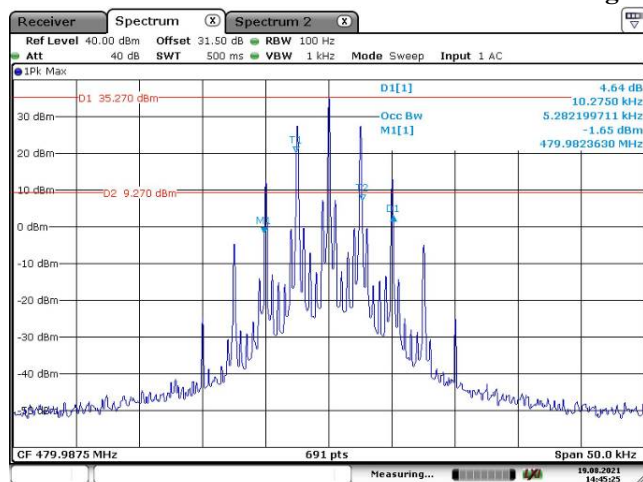


Date: 19.AUG.2021 14:45:25

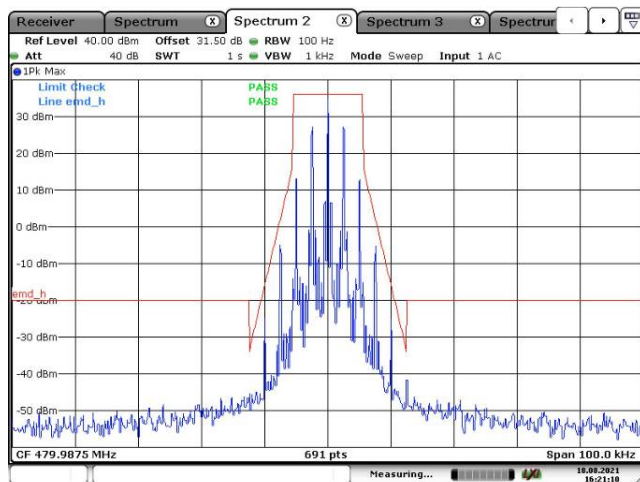


Date: 18.AUG.2021 16:21:10

Additional Channel Part 74, 455.0125 MHz

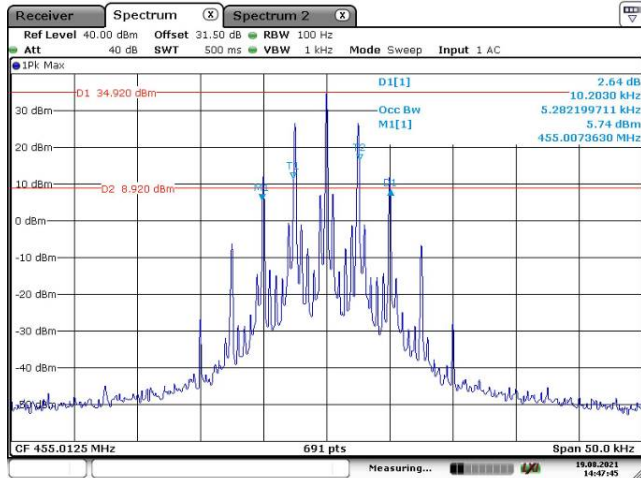


Date: 19.AUG.2021 14:47:45

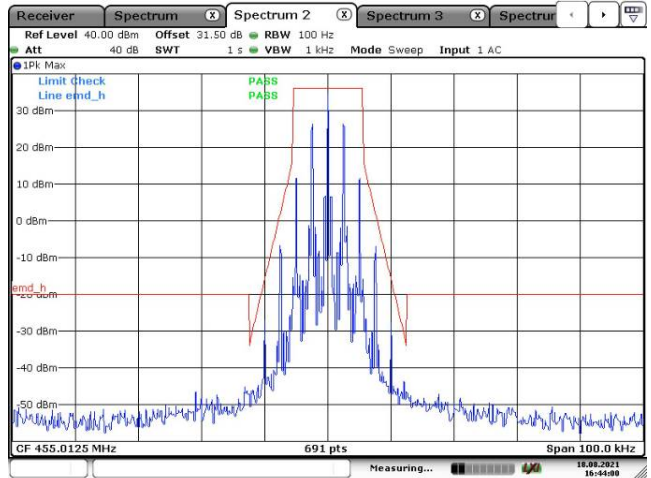


Date: 18.AUG.2021 16:44:00

Additional Channel Part 22, 454.0125 MHz

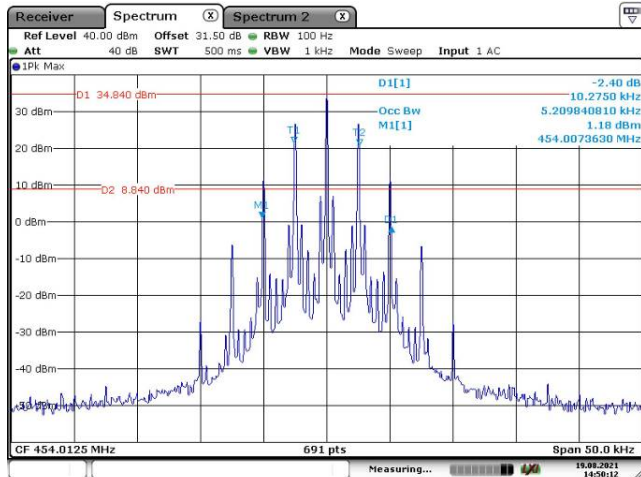


Date: 19.AUG.2021 14:50:13

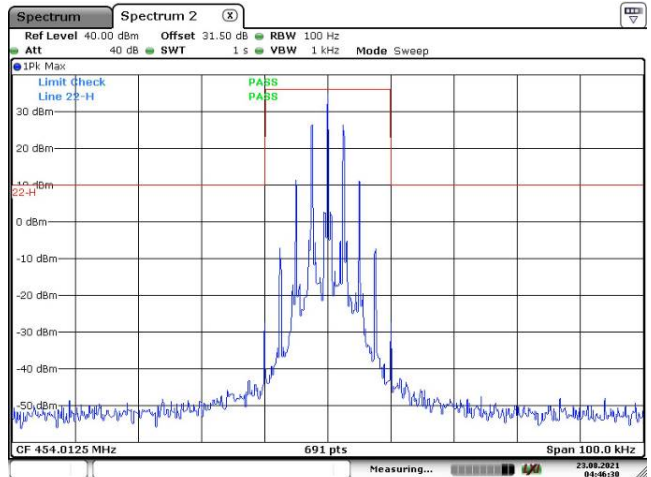


Date: 23.AUG.2021 04:46:30

FM, 12.5kHz, Low Power:

Low Channel

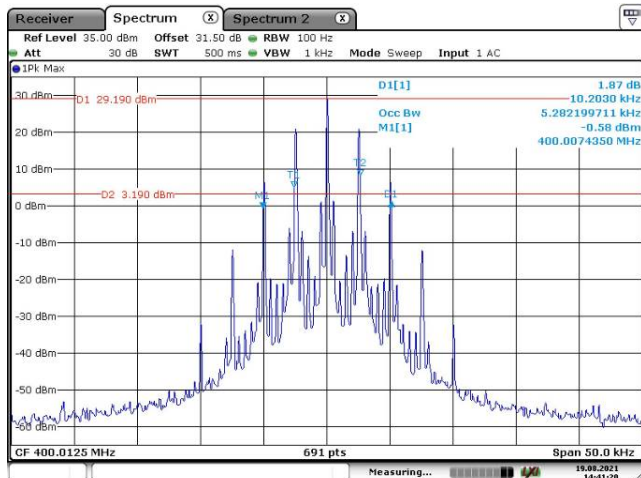


Date: 19.AUG.2021 14:41:20

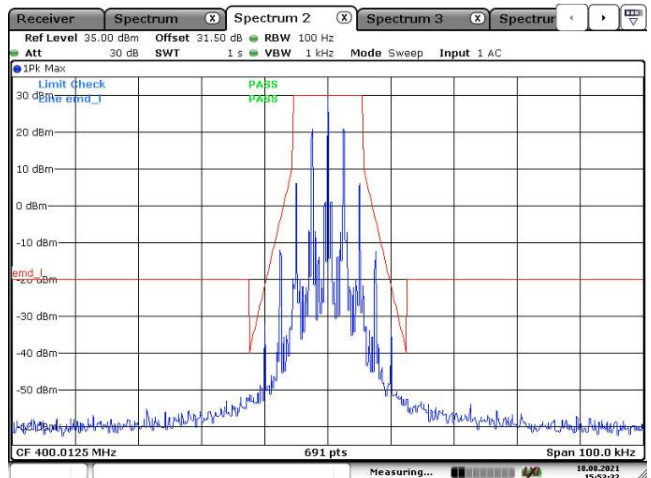


Date: 18.AUG.2021 15:53:33

Middle Channel

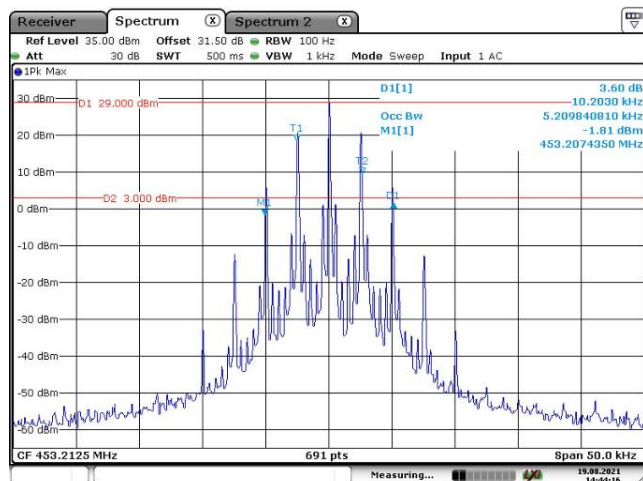


Date: 19.AUG.2021 14:44:16

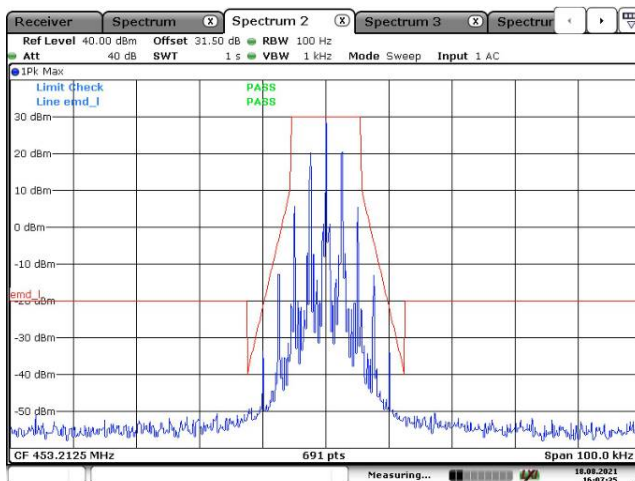


Date: 18.AUG.2021 16:07:36

High Channel

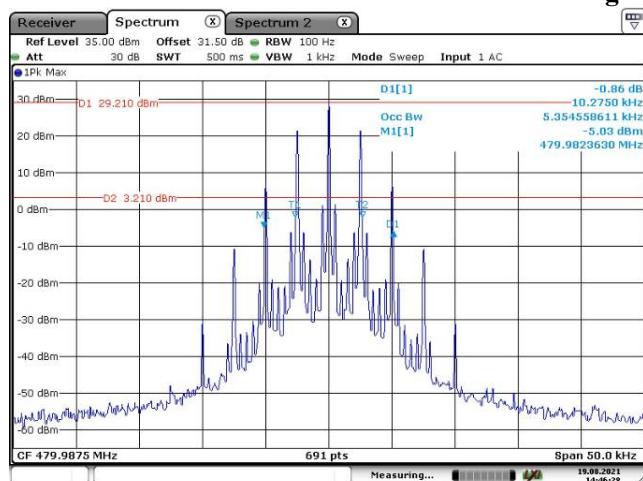


Date: 19.AUG.2021 14:46:28

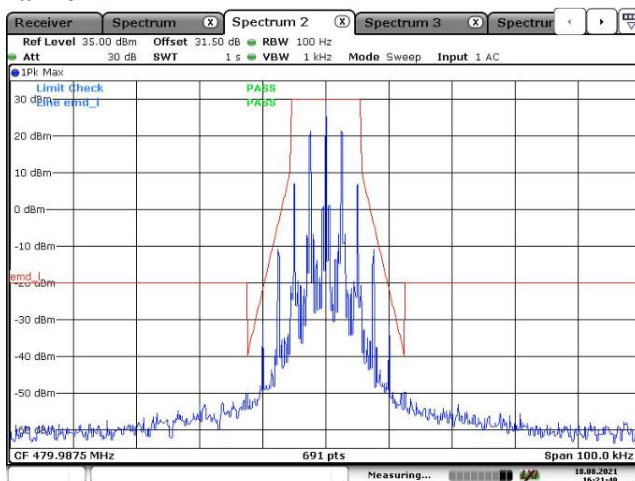


Date: 18.AUG.2021 16:21:09

Additional Channel Part 74, 455.0125 MHz


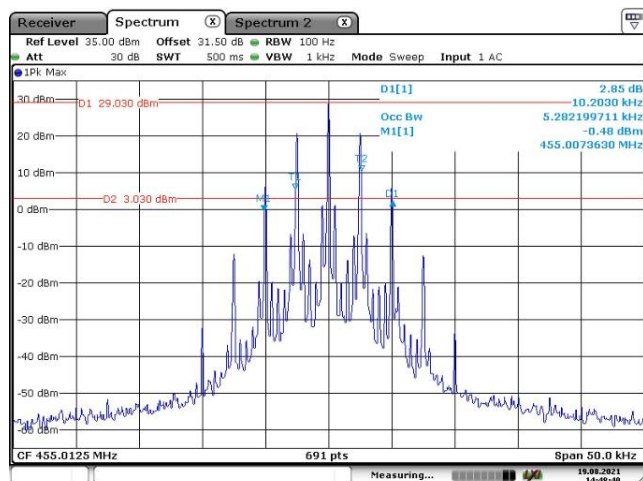


Date: 19.AUG.2021 14:48:40

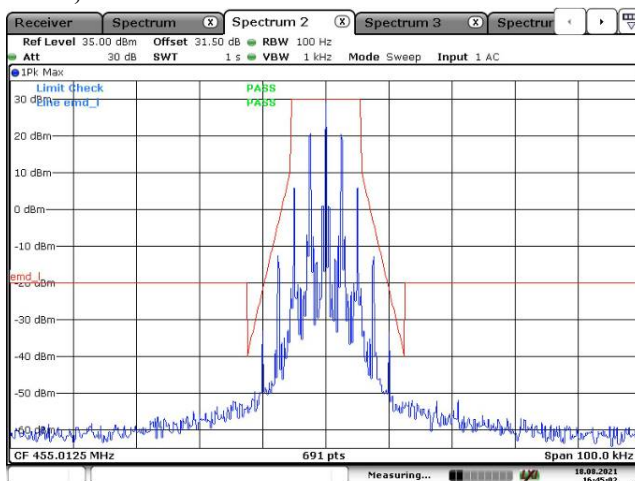



Date: 18.AUG.2021 16:45:03

Additional Channel Part 22, 454.0125 MHz

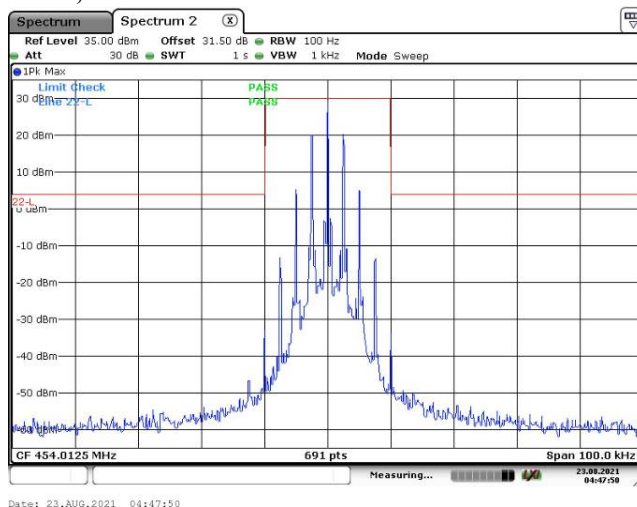
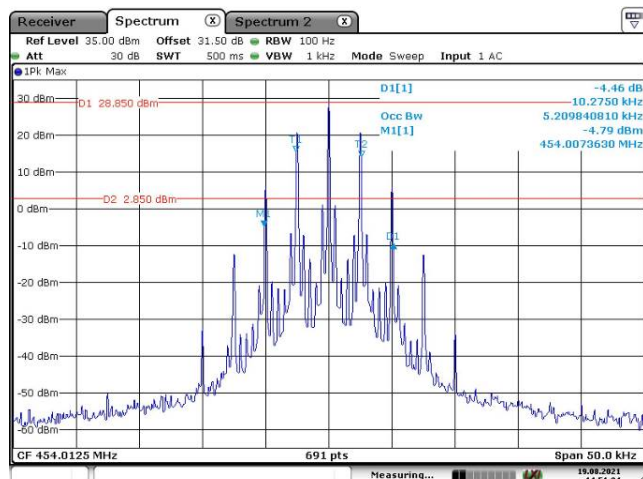


4FSK, 12.5kHz, High Power:


Low Channel

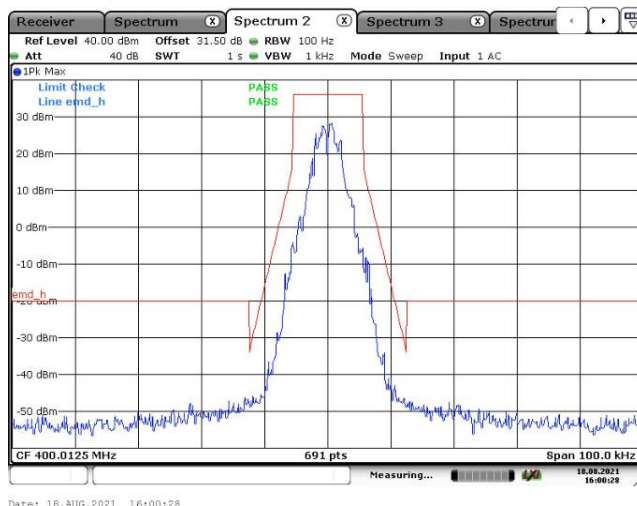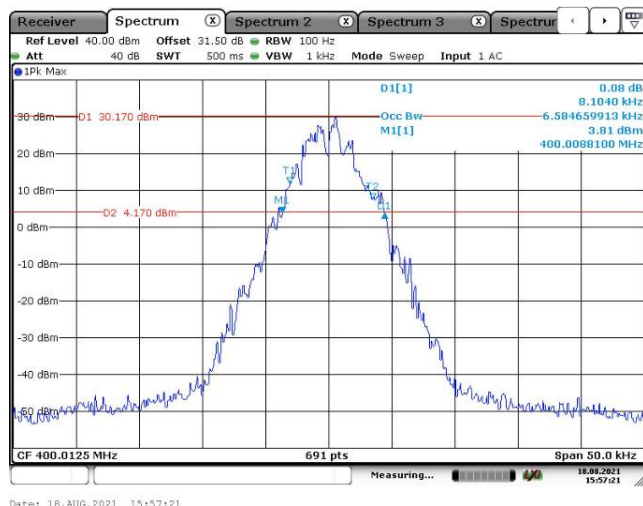


Middle Channel

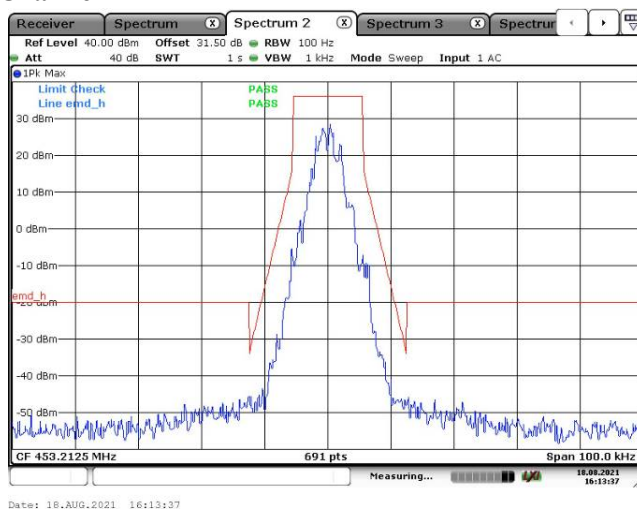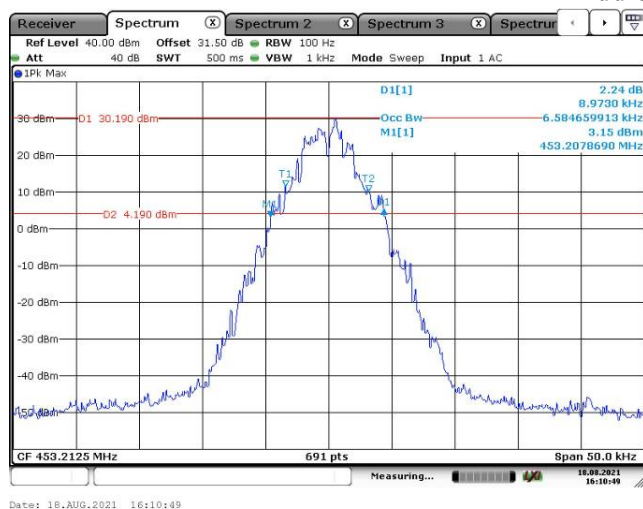

High Channel

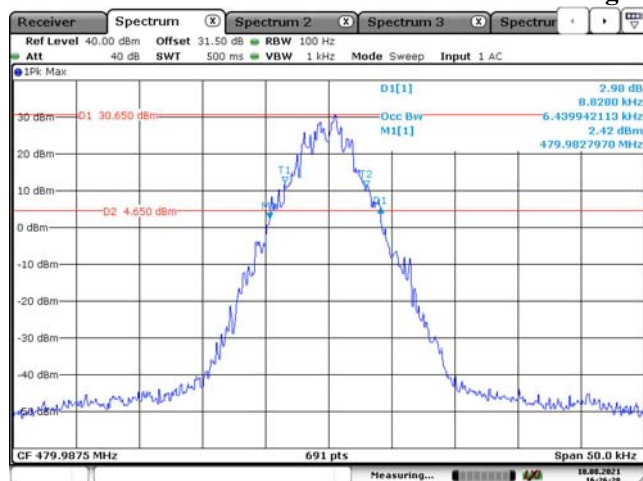


Date: 18.AUG.2021 16:26:28

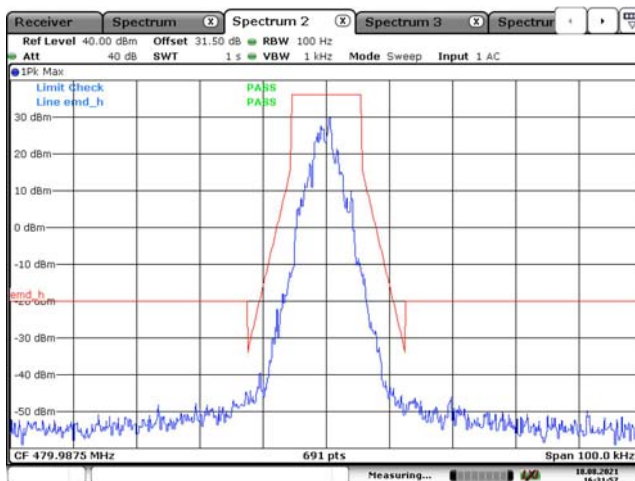


Date: 18.AUG.2021 16:31:57

Additional Channel Part 74, 455.0125 MHz

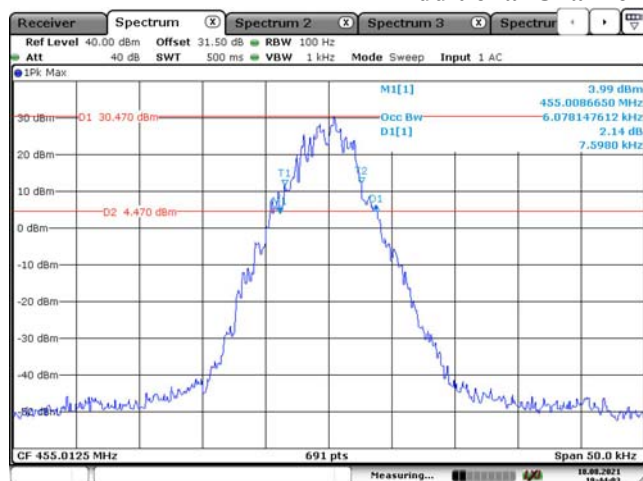


Date: 18.AUG.2021 19:44:03

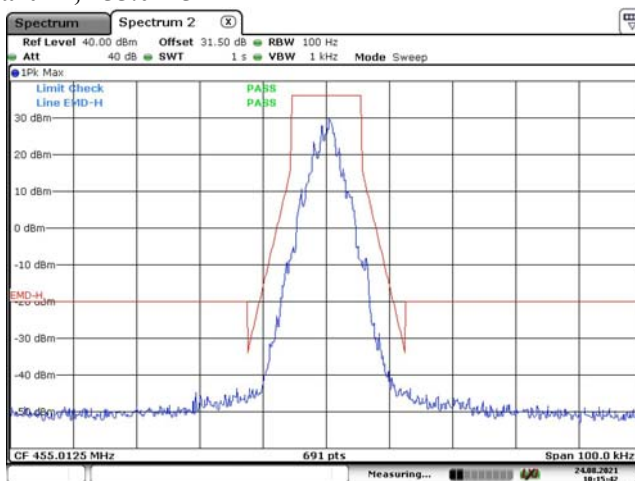


Date: 24.AUG.2021 10:15:42

Additional Channel Part 22, 454.0125 MHz

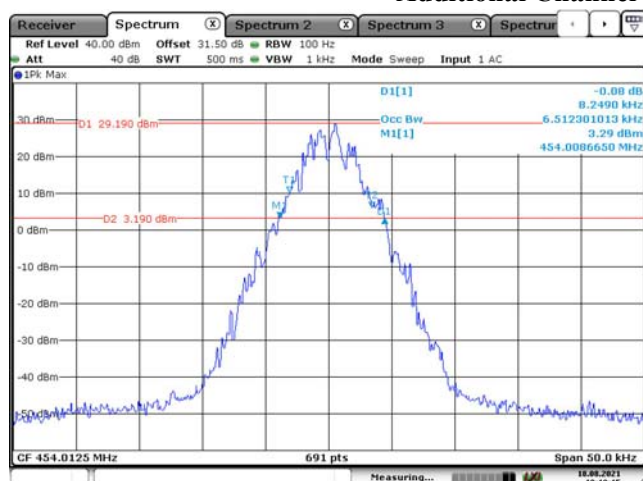



Date: 18.AUG.2021 19:19:15

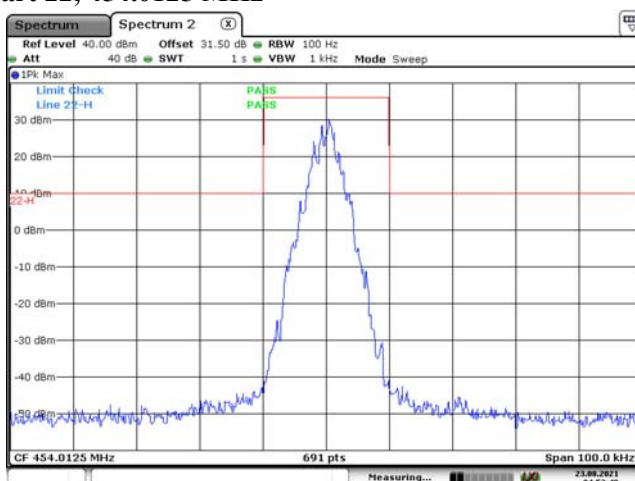



Date: 23.AUG.2021 04:52:49

4FSK, 12.5kHz, Low Power:



Low Channel

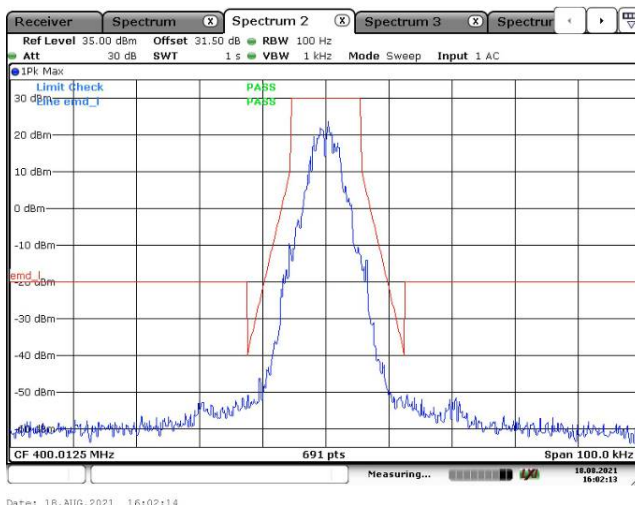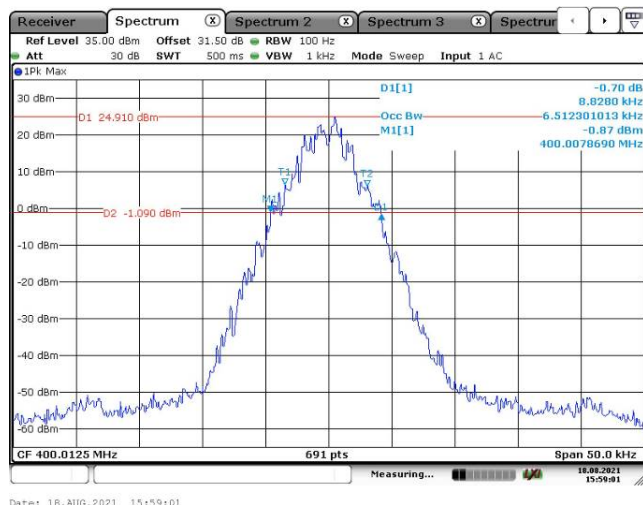


Middle Channel

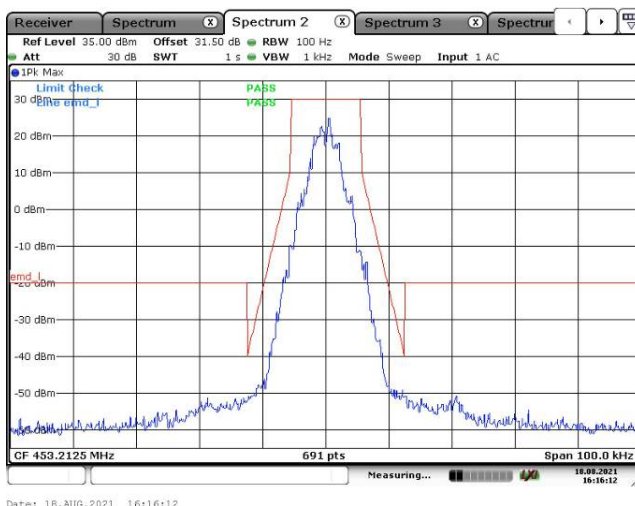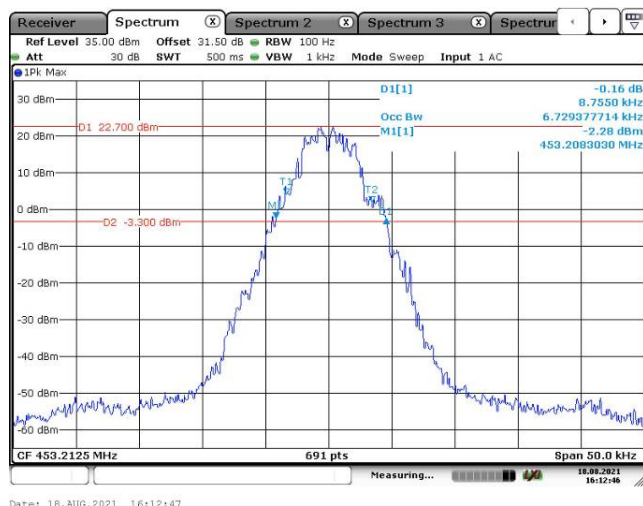


High Channel

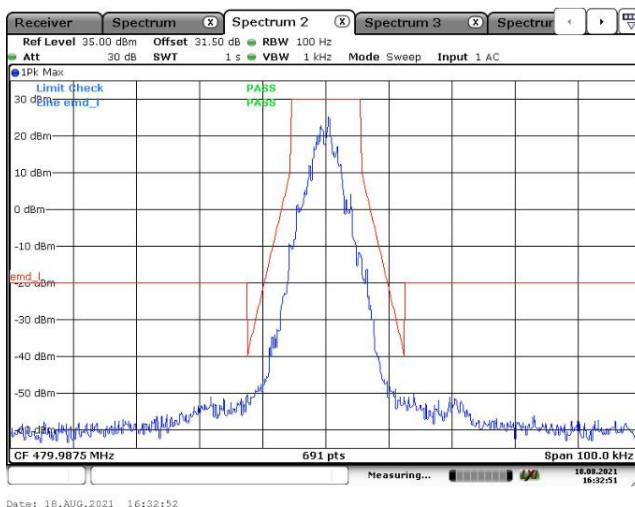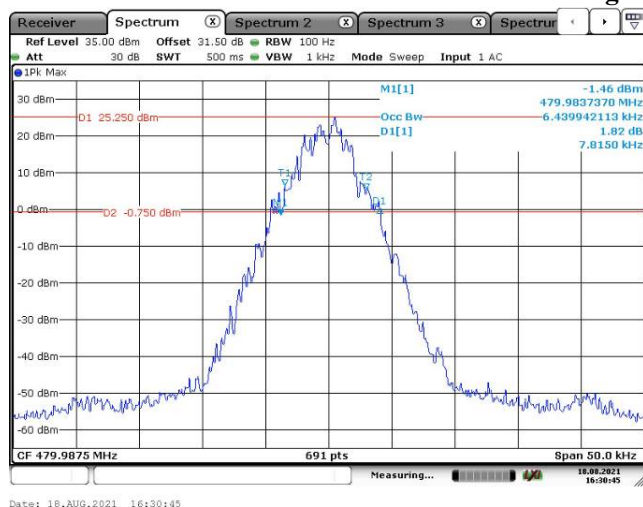

Additional Channel Part 74, 455.0125 MHz

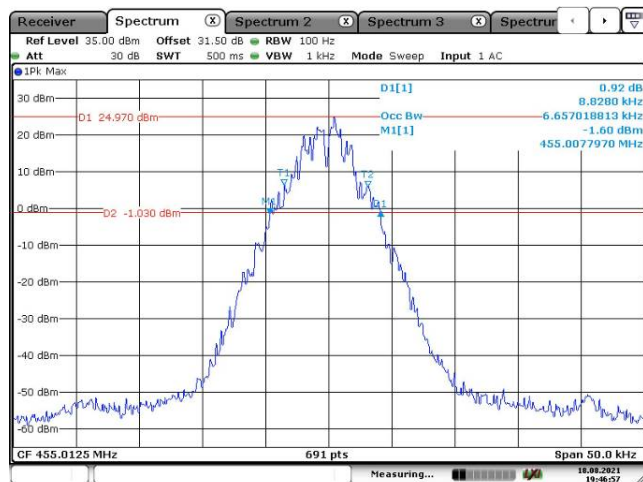


Date: 18.AUG.2021 19:46:57

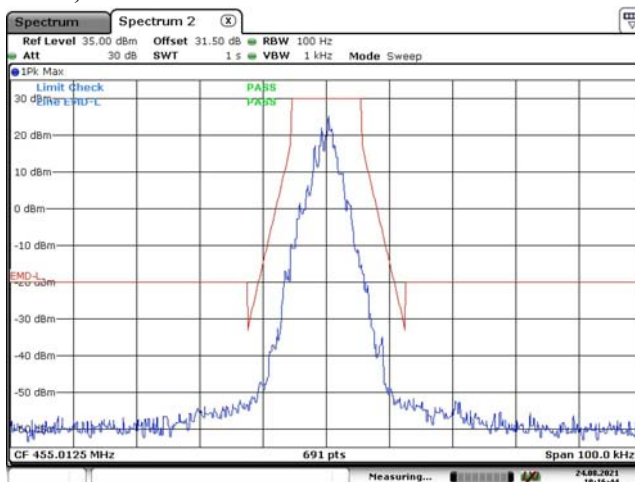


Date: 24.AUG.2021 18:15:44

Additional Channel Part 22, 454.0125 MHz

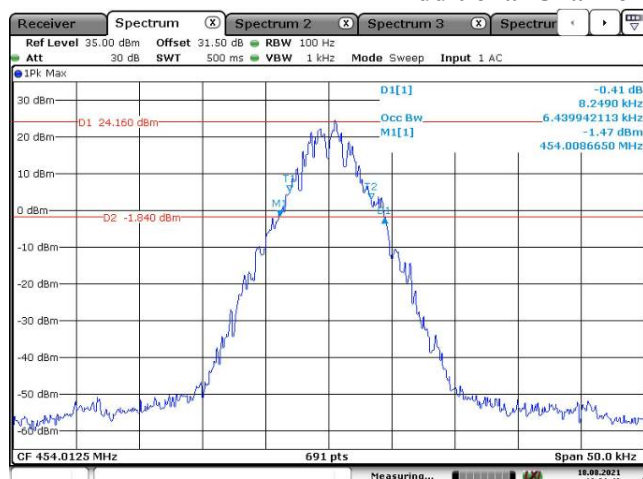


Date: 18.AUG.2021 19:21:42

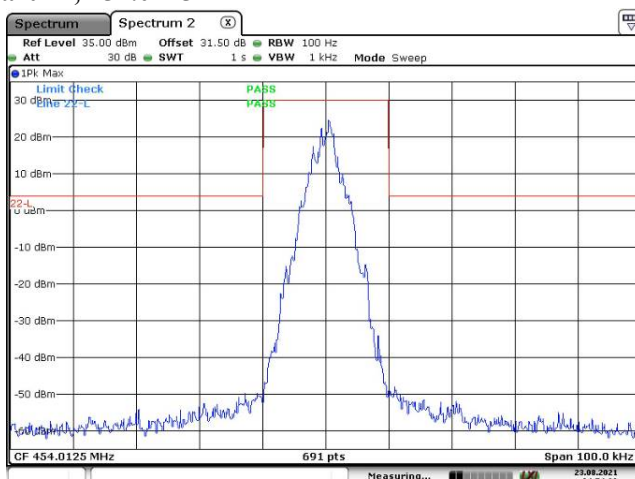


Date: 23.AUG.2021 04:54:02

FM, 25 kHz, High Power:

Additional Channel Part 74, 455.0125 MHz


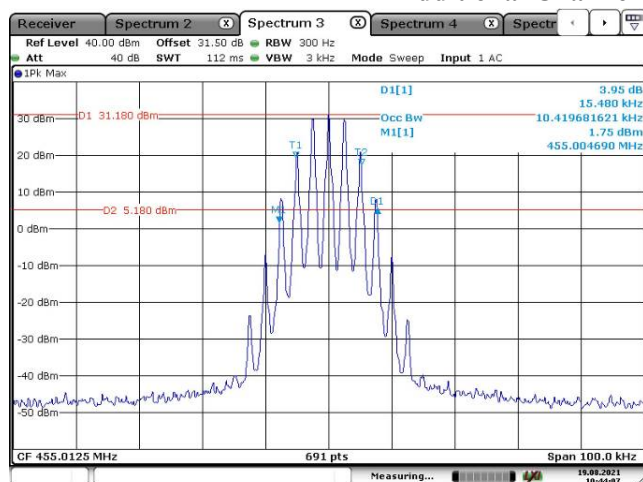


Date: 19.AUG.2021 10:44:07

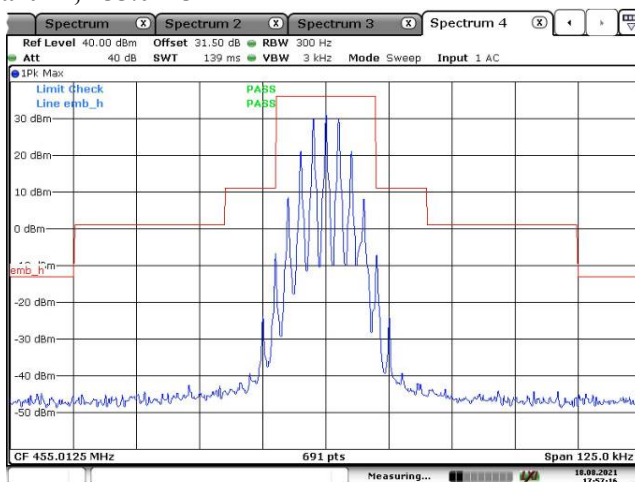



Date: 18.AUG.2021 17:57:16

Additional Channel Part 22, 454.0125 MHz

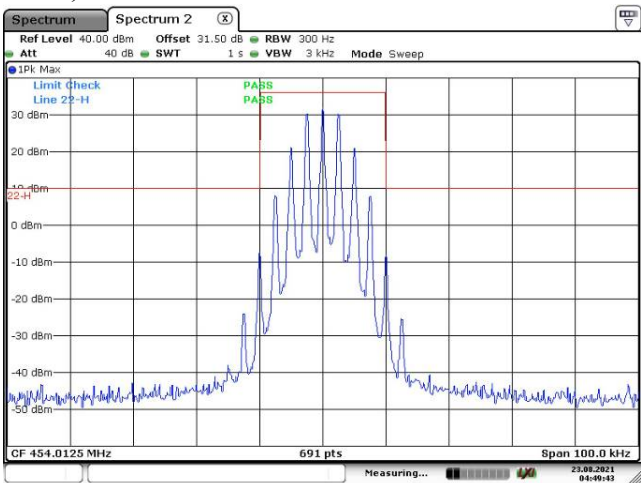
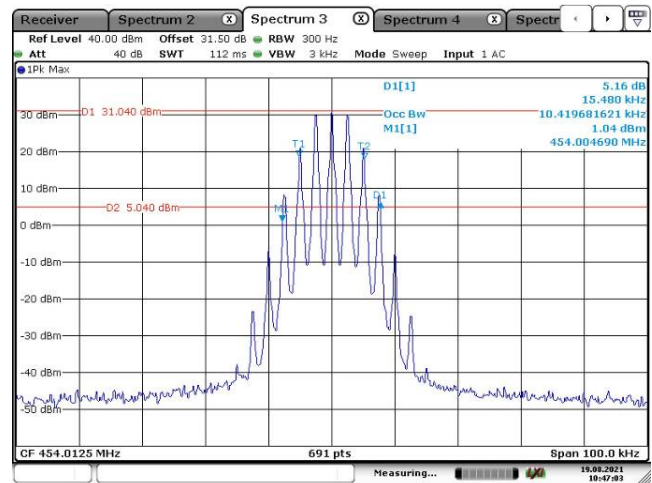


FM, 25 kHz, Low Power:

Additional Channel Part 74, 455.0125 MHz

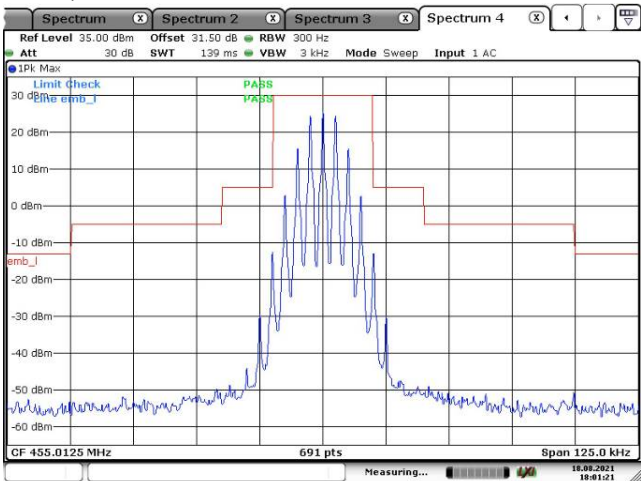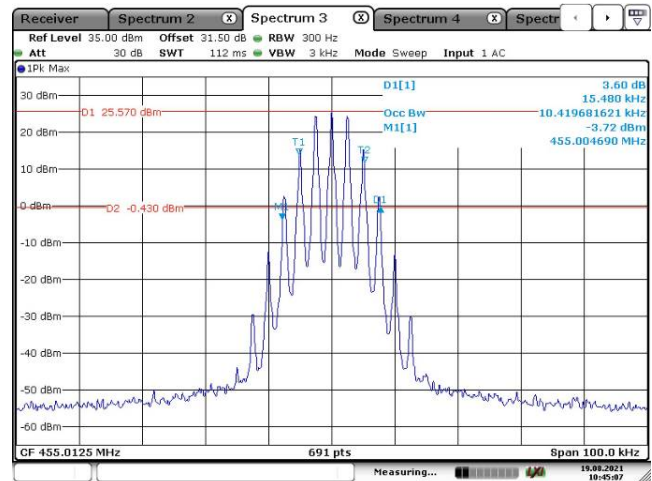

Additional Channel Part 22, 454.0125 MHz

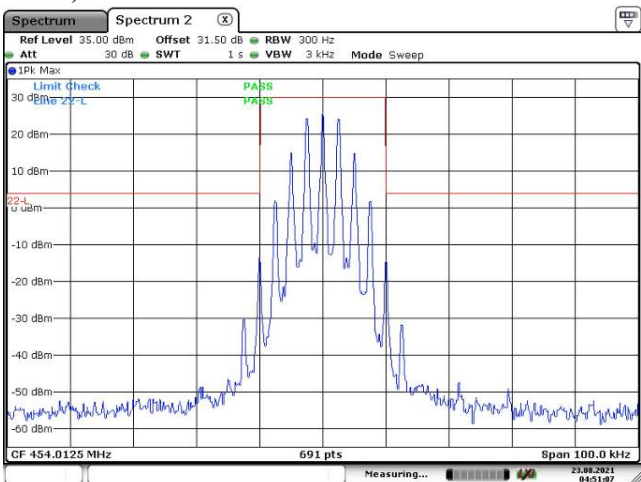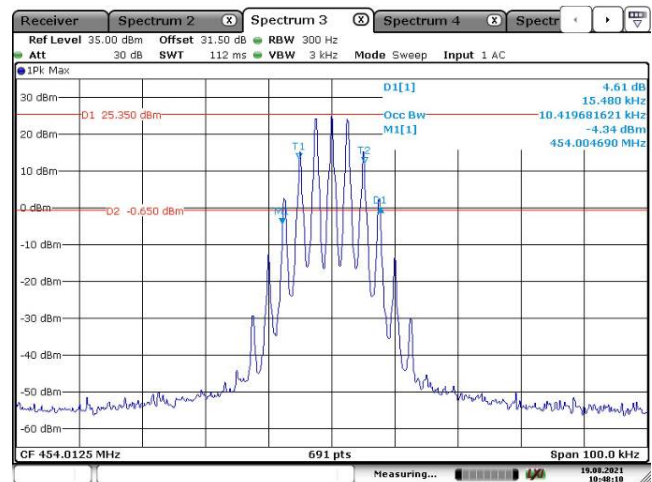

5 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051, §22.861, §74.462, and §90.210

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data


Test Mode: Transmitting

Test Result: Compliance. Please refer to following plots.


Test performed at high power level with Band Rejector Filter, please refer to the following table.

FM, 12.5kHz:

Low Channel, 400.0125 MHz

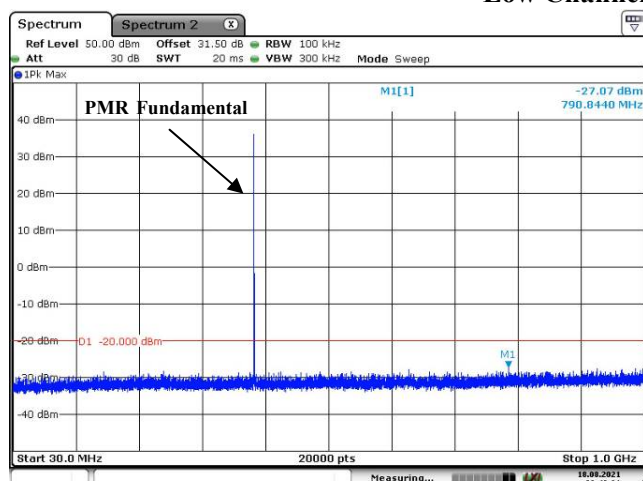


Date: 18.AUG.2021 08:49:31

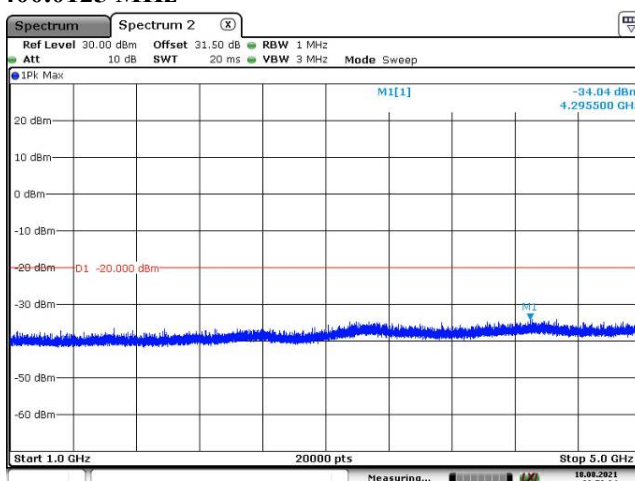


Date: 18.AUG.2021 08:52:34

Middle Channel, 453.2125 MHz


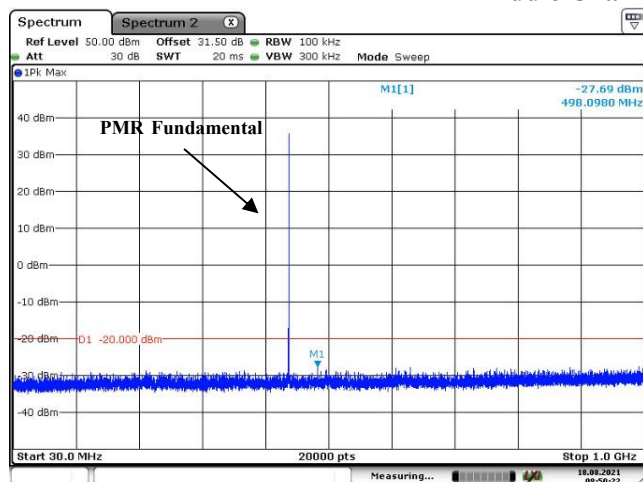


Date: 18.AUG.2021 08:50:22

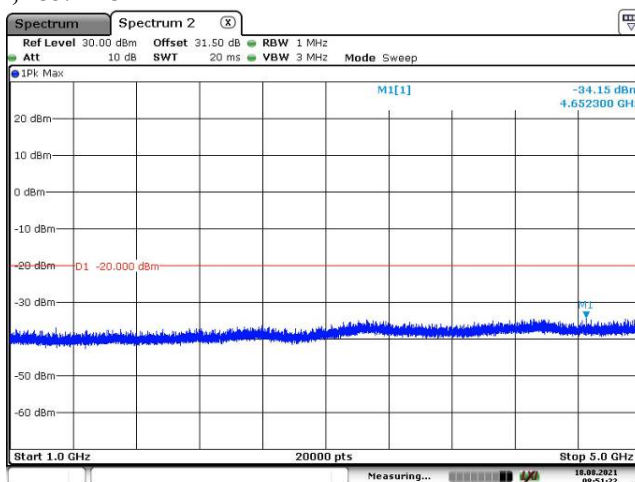



Date: 18.AUG.2021 08:51:22

High Channel, 479.9875 MHz

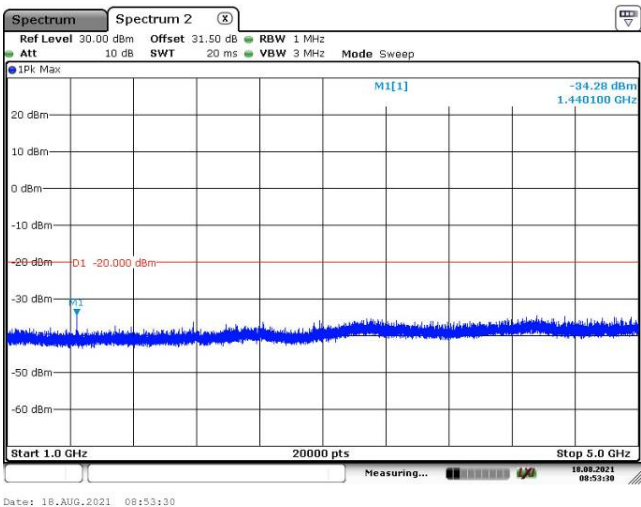
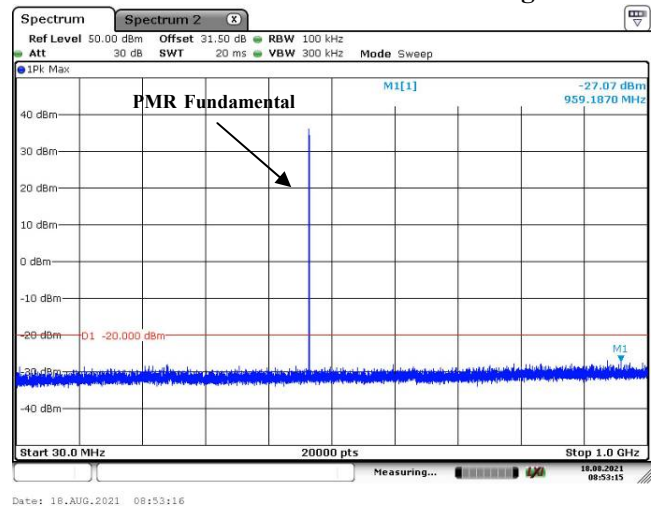


4FSK, 12.5kHz:



Low Channel, 400.0125 MHz

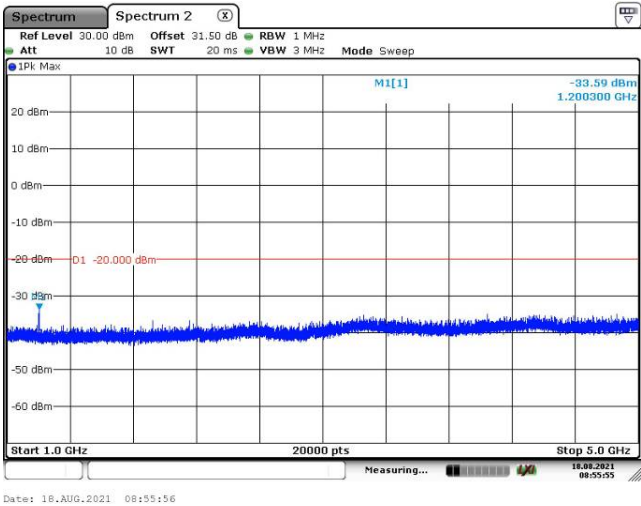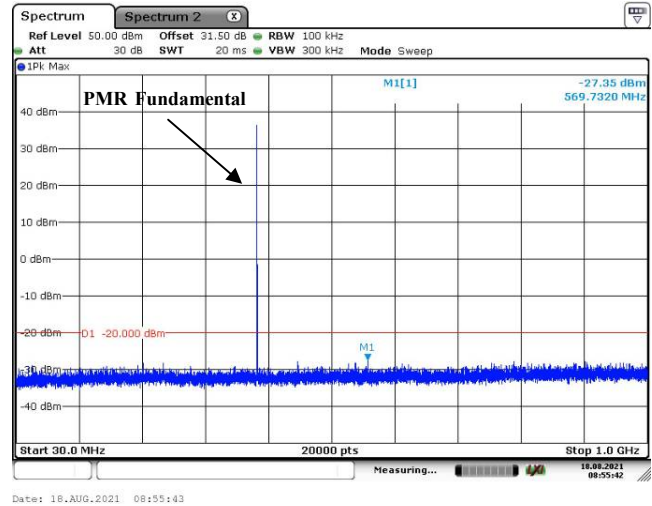

Middle Channel, 453.2125 MHz

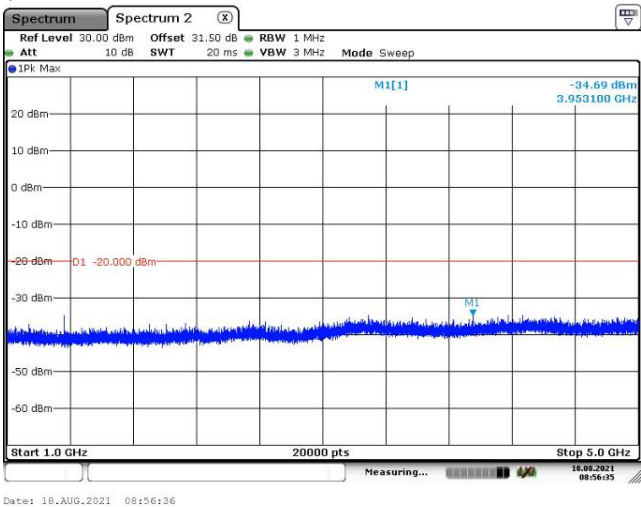
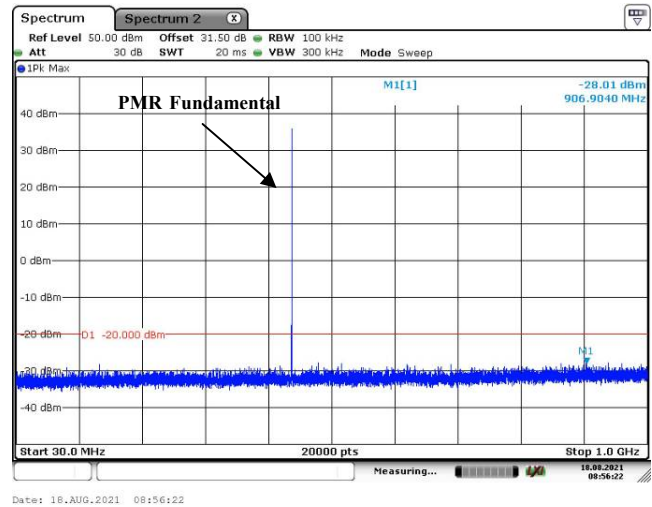


High Channel, 479.9875 MHz

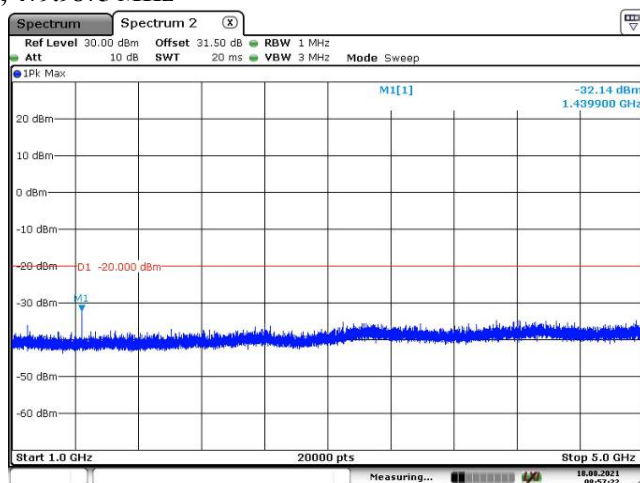
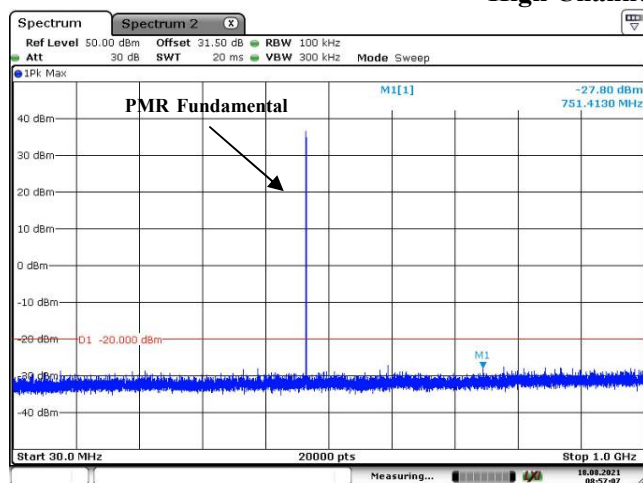


Part 74:



FM, 12.5kHz, 455.0125 MHz (Emissions under Limit -20dBm)

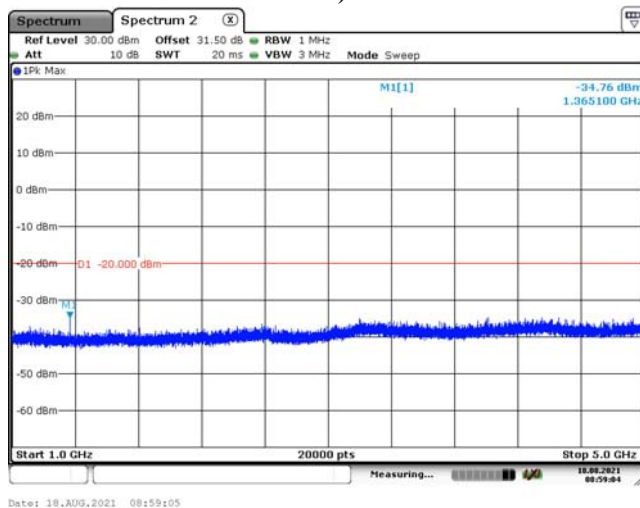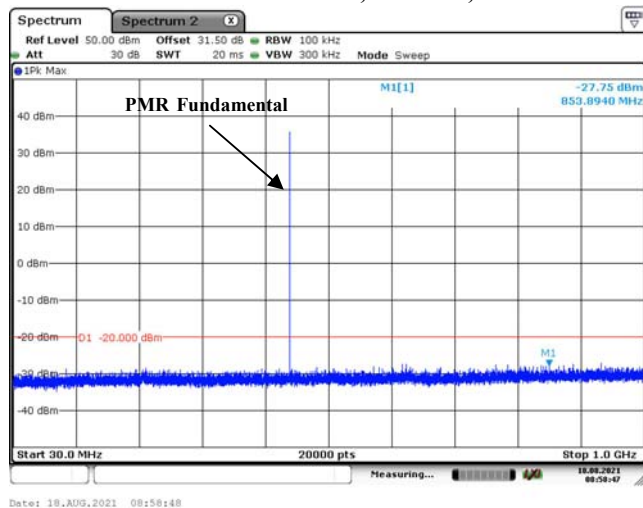

FM, 25kHz, 455.0125 MHz (Emissions under Limit -13dBm)

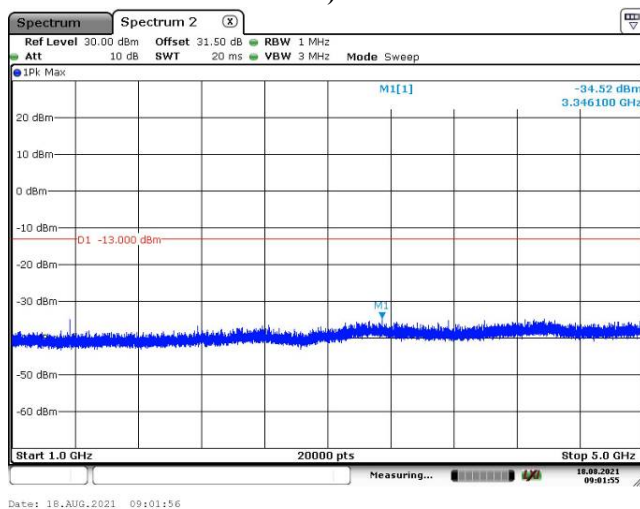
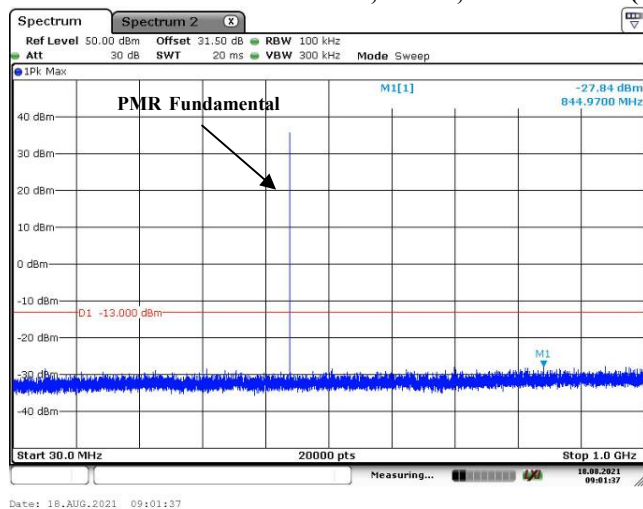


4FSK,12.5kHz, 455.0125 MHz(Emissions under Limit -20dBm)

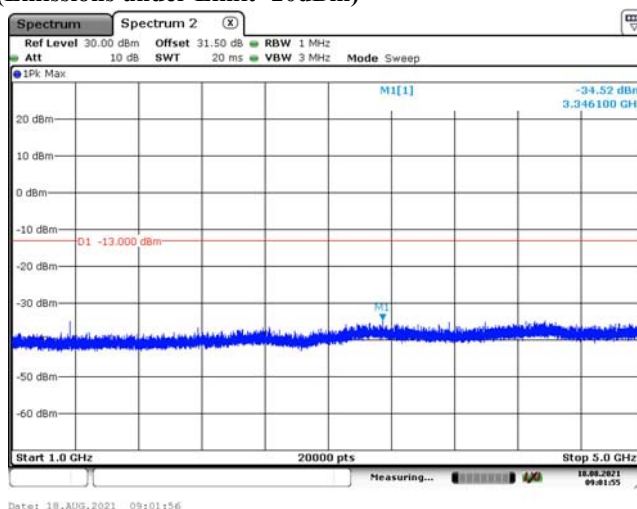
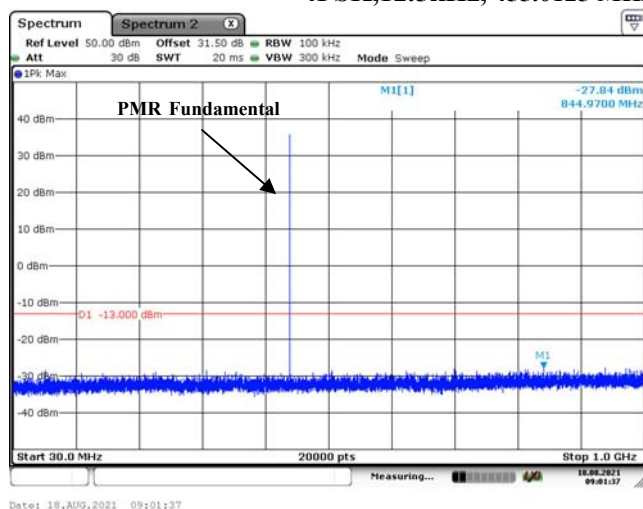


Part 22:


FM,12.5kHz, 454.0125 MHz

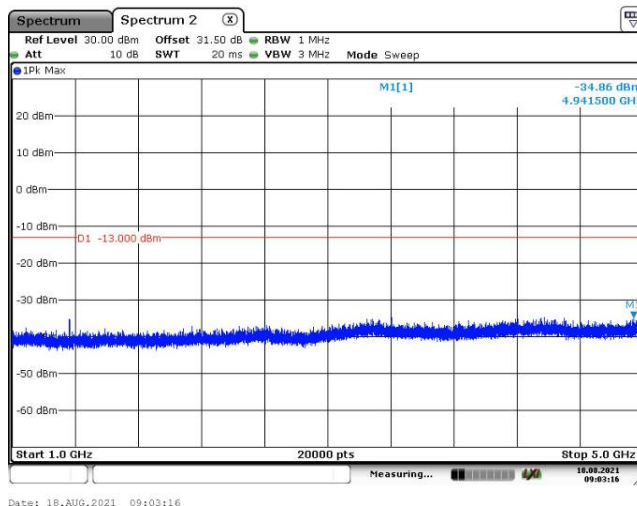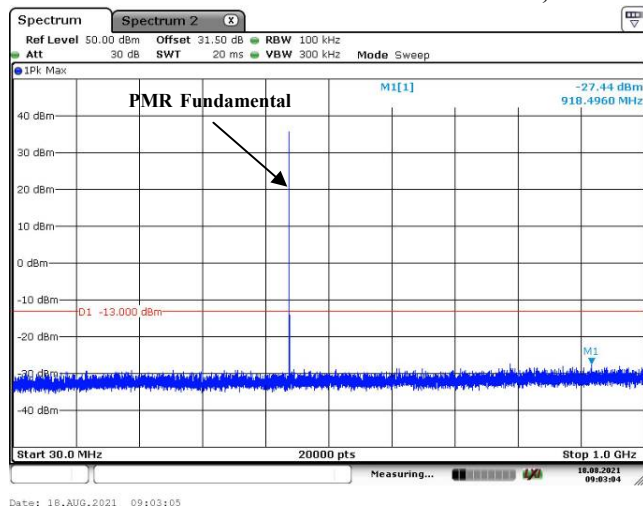


FM,25kHz, 454.0125 MHz

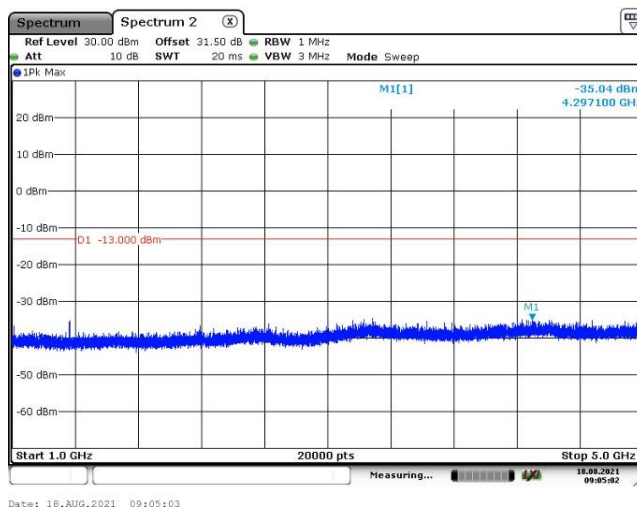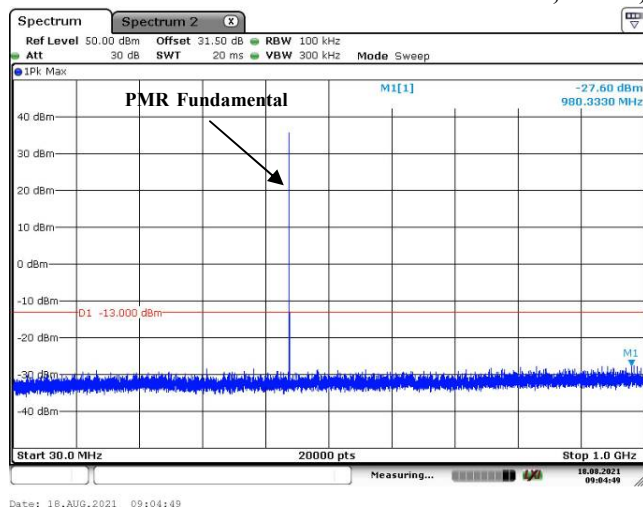

4FSK,12.5kHz, 454.0125 MHz

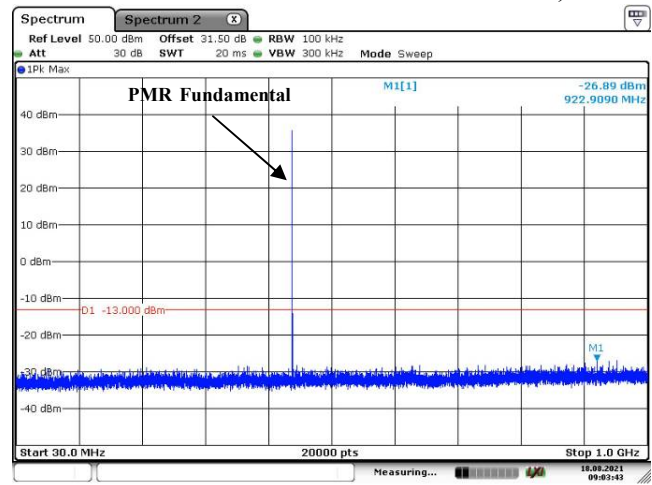

Date: 18.AUG.2021 09:03:43

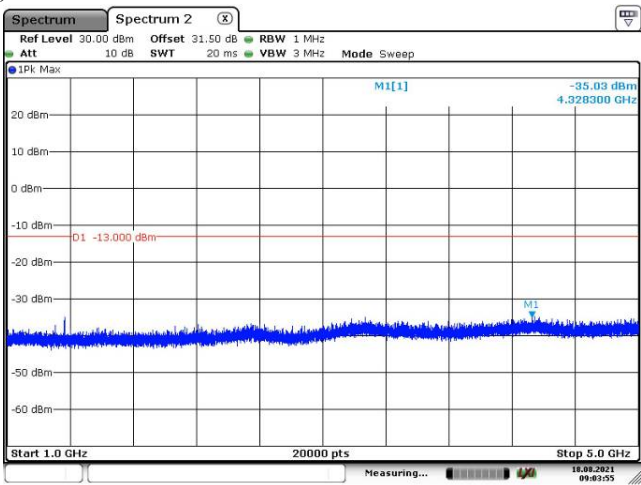

Date: 18.AUG.2021 09:03:55

6 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Test Data

Test Mode: Transmitting

Test Result: Compliance.

Note: Pre-scan model: T03-00312-GCDA, T03-00312-GBEA, T03-00312-GAAA, the worst case as below.

Test performed at high power level with Band Rejector Filter, *please refer to the following table.*

30MHz - 5GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM,Frequency: 400.0125MHz-12.5 kHz								
800.03	H	62.81	-35.72	0.00	0.49	-36.21	-20.00	16.21
800.03	V	68.35	-27.15	0.00	0.49	-27.64	-20.00	7.64
1200.04	H	37.26	-65.72	7.30	1.09	-59.51	-20.00	39.51
1200.04	V	36.65	-67.43	7.30	1.09	-61.22	-20.00	41.22
1600.05	H	42.62	-62.02	10.10	0.68	-52.60	-20.00	32.60
1600.05	V	40.62	-64.62	10.10	0.68	-55.20	-20.00	35.20
2000.06	H	42.51	-60.32	12.00	1.13	-49.45	-20.00	29.45
2000.06	V	40.51	-62.72	12.00	1.13	-51.85	-20.00	31.85
2400.08	H	60.89	-41.57	12.30	1.29	-30.56	-20.00	10.56
2400.08	V	54.95	-47.71	12.30	1.29	-36.70	-20.00	16.70
2800.09	H	65.58	-36.14	13.10	1.36	-24.40	-20.00	4.40
2800.09	V	62.35	-39.57	13.10	1.36	-27.83	-20.00	7.83
3200.10	H	47.57	-51.10	13.60	1.57	-39.07	-20.00	19.07
3200.10	V	43.19	-55.54	13.60	1.57	-43.51	-20.00	23.51
3600.11	H	51.67	-47.36	14.10	1.50	-34.76	-20.00	14.76
3600.11	V	45.28	-53.75	14.10	1.50	-41.15	-20.00	21.15
4000.13	H	49.26	-48.21	14.00	1.45	-35.66	-20.00	15.66
4000.13	V	41.84	-55.68	14.00	1.45	-43.13	-20.00	23.13
4FSK,Frequency: 400.0125MHz-12.5 kHz								
800.03	H	55.25	-43.28	0.00	0.49	-43.77	-20.00	23.77
800.03	V	59.36	-36.14	0.00	0.49	-36.63	-20.00	16.63
1200.04	H	37.00	-65.98	7.30	1.09	-59.77	-20.00	39.77
1200.04	V	37.66	-66.42	7.30	1.09	-60.21	-20.00	40.21
1600.05	H	46.81	-57.83	10.10	0.68	-48.41	-20.00	28.41
1600.05	V	40.71	-64.53	10.10	0.68	-55.11	-20.00	35.11
2000.06	H	46.35	-56.48	12.00	1.13	-45.61	-20.00	25.61
2000.06	V	40.62	-62.61	12.00	1.13	-51.74	-20.00	31.74
2400.08	H	61.23	-41.23	12.30	1.29	-30.22	-20.00	10.22
2400.08	V	55.07	-47.59	12.30	1.29	-36.58	-20.00	16.58
2800.09	H	65.56	-36.16	13.10	1.36	-24.42	-20.00	4.42
2800.09	V	58.92	-43.00	13.10	1.36	-31.26	-20.00	11.26
3200.10	H	46.78	-51.89	13.60	1.57	-39.86	-20.00	19.86
3200.10	V	43.27	-55.46	13.60	1.57	-43.43	-20.00	23.43
3600.11	H	52.04	-46.99	14.10	1.50	-34.39	-20.00	14.39
3600.11	V	46.63	-52.40	14.10	1.50	-39.80	-20.00	19.80
4000.13	H	50.91	-46.56	14.00	1.45	-34.01	-20.00	14.01
4000.13	V	42.27	-55.25	14.00	1.45	-42.70	-20.00	22.70

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM,Frequency: 453.2125MHz-12.5 kHz								
906.43	H	54.25	-41.12	0.00	0.51	-41.63	-20.00	21.63
906.43	V	66.79	-25.25	0.00	0.51	-25.76	-20.00	5.76
1359.64	H	42.53	-61.03	8.72	1.20	-53.51	-20.00	33.51
1359.64	V	40.23	-64.05	8.72	1.20	-56.53	-20.00	36.53
1812.85	H	49.67	-54.43	11.19	0.72	-43.96	-20.00	23.96
1812.85	V	47.36	-57.30	11.19	0.72	-46.83	-20.00	26.83
2266.06	H	50.51	-51.54	11.06	1.20	-41.68	-20.00	21.68
2266.06	V	43.64	-58.31	11.06	1.20	-48.45	-20.00	28.45
2719.28	H	57.84	-44.07	13.10	1.27	-32.24	-20.00	12.24
2719.28	V	55.06	-46.96	13.10	1.27	-35.13	-20.00	15.13
3172.49	H	46.39	-52.63	13.49	1.64	-40.78	-20.00	20.78
3172.49	V	42.68	-56.38	13.49	1.64	-44.53	-20.00	24.53
3625.70	H	40.49	-58.27	14.07	1.58	-45.78	-20.00	25.78
3625.70	V	38.54	-60.22	14.07	1.58	-47.73	-20.00	27.73
4078.91	H	47.15	-50.84	13.76	1.36	-38.44	-20.00	18.44
4078.91	V	42.33	-55.78	13.76	1.36	-43.38	-20.00	23.38
4532.13	H	46.31	-50.94	14.13	1.64	-38.45	-20.00	18.45
4532.13	V	44.62	-52.56	14.13	1.64	-40.07	-20.00	20.07
4FSK,Frequency: 453.2125MHz-12.5 kHz								
906.43	H	52.25	-43.12	0.00	0.51	-43.63	-20.00	23.63
906.43	V	62.23	-29.81	0.00	0.51	-30.32	-20.00	10.32
1359.64	H	42.68	-60.88	8.72	1.20	-53.36	-20.00	33.36
1359.64	V	40.36	-63.92	8.72	1.20	-56.40	-20.00	36.40
1812.85	H	49.36	-54.74	11.19	0.72	-44.27	-20.00	24.27
1812.85	V	46.41	-58.25	11.19	0.72	-47.78	-20.00	27.78
2266.06	H	49.93	-52.12	11.06	1.20	-42.26	-20.00	22.26
2266.06	V	43.46	-58.49	11.06	1.20	-48.63	-20.00	28.63
2719.28	H	55.45	-46.46	13.10	1.27	-34.63	-20.00	14.63
2719.28	V	57.35	-44.67	13.10	1.27	-32.84	-20.00	12.84
3172.49	H	45.95	-53.07	13.49	1.64	-41.22	-20.00	21.22
3172.49	V	43.38	-55.68	13.49	1.64	-43.83	-20.00	23.83
3625.70	H	41.59	-57.17	14.07	1.58	-44.68	-20.00	24.68
3625.70	V	38.23	-60.53	14.07	1.58	-48.04	-20.00	28.04
4078.91	H	46.79	-51.20	13.76	1.36	-38.80	-20.00	18.80
4078.91	V	41.97	-56.14	13.76	1.36	-43.74	-20.00	23.74
4532.13	H	45.95	-51.30	14.13	1.64	-38.81	-20.00	18.81
4532.13	V	44.26	-52.92	14.13	1.64	-40.43	-20.00	20.43

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM,Frequency: 479.9875MHz-12.5 kHz								
959.98	H	61.58	-31.90	0.00	0.51	-32.41	-20.00	12.41
959.98	V	67.27	-23.23	0.00	0.51	-23.74	-20.00	3.74
1439.96	H	41.28	-62.69	9.20	1.26	-54.75	-20.00	34.75
1439.96	V	38.96	-65.41	9.20	1.26	-57.47	-20.00	37.47
1919.95	H	45.16	-57.66	11.84	1.04	-46.86	-20.00	26.86
1919.95	V	43.16	-59.98	11.84	1.04	-49.18	-20.00	29.18
2399.94	H	43.86	-58.60	12.30	1.29	-47.59	-20.00	27.59
2399.94	V	40.63	-62.03	12.30	1.29	-51.02	-20.00	31.02
2879.93	H	59.93	-40.99	13.74	1.35	-28.60	-20.00	8.60
2879.93	V	57.86	-43.34	13.74	1.35	-30.95	-20.00	10.95
3359.91	H	46.38	-53.25	13.90	1.62	-40.97	-20.00	20.97
3359.91	V	46.35	-53.34	13.90	1.62	-41.06	-20.00	21.06
3839.90	H	48.36	-48.74	13.52	1.51	-36.73	-20.00	16.73
3839.90	V	41.89	-55.05	13.52	1.51	-43.04	-20.00	23.04
4319.89	H	57.83	-39.85	13.90	0.95	-26.90	-20.00	6.90
4319.89	V	55.35	-42.35	13.90	0.95	-29.40	-20.00	9.40
4799.88	H	50.69	-45.45	14.30	1.58	-32.73	-20.00	12.73
4799.88	V	48.77	-47.49	14.30	1.58	-34.77	-20.00	14.77
4FSK,Frequency: 479.9875MHz-12.5 kHz								
959.98	H	62.17	-31.31	0.00	0.51	-31.82	-20.00	11.82
959.98	V	67.81	-22.69	0.00	0.51	-23.20	-20.00	3.20
1439.96	H	38.39	-65.58	9.20	1.26	-57.64	-20.00	37.64
1439.96	V	39.45	-64.92	9.20	1.26	-56.98	-20.00	36.98
1919.95	H	41.63	-61.19	11.84	1.04	-50.39	-20.00	30.39
1919.95	V	43.66	-59.48	11.84	1.04	-48.68	-20.00	28.68
2399.94	H	53.77	-48.69	12.30	1.29	-37.68	-20.00	17.68
2399.94	V	47.89	-54.77	12.30	1.29	-43.76	-20.00	23.76
2879.93	H	57.83	-43.09	13.74	1.35	-30.70	-20.00	10.70
2879.93	V	58.62	-42.58	13.74	1.35	-30.19	-20.00	10.19
3359.91	H	45.08	-54.55	13.90	1.62	-42.27	-20.00	22.27
3359.91	V	57.91	-41.78	13.90	1.62	-29.50	-20.00	9.50
3839.90	H	47.38	-49.72	13.52	1.51	-37.71	-20.00	17.71
3839.90	V	44.38	-52.56	13.52	1.51	-40.55	-20.00	20.55
4319.89	H	58.81	-38.87	13.90	0.95	-25.92	-20.00	5.92
4319.89	V	57.64	-40.06	13.90	0.95	-27.11	-20.00	7.11
4799.88	H	49.68	-46.46	14.30	1.58	-33.74	-20.00	13.74
4799.88	V	52.42	-43.84	14.30	1.58	-31.12	-20.00	11.12

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	54.66	-40.59	0.00	0.51	-41.10	-20.00	21.10
910.03	V	62.96	-28.97	0.00	0.51	-29.48	-20.00	9.48
1365.04	H	41.36	-62.17	8.76	1.20	-54.61	-20.00	34.61
1365.04	V	42.31	-61.93	8.76	1.20	-54.37	-20.00	34.37
1820.05	H	47.69	-56.31	11.24	0.75	-45.82	-20.00	25.82
1820.05	V	45.98	-58.56	11.24	0.75	-48.07	-20.00	28.07
2275.06	H	47.35	-54.73	11.10	1.21	-44.84	-20.00	24.84
2275.06	V	43.82	-58.16	11.10	1.21	-48.27	-20.00	28.27
2730.08	H	54.52	-47.36	13.10	1.28	-35.54	-20.00	15.54
2730.08	V	57.64	-44.37	13.10	1.28	-32.55	-20.00	12.55
3185.09	H	41.92	-56.94	13.54	1.61	-45.01	-20.00	25.01
3185.09	V	46.32	-52.59	13.54	1.61	-40.66	-20.00	20.66
3640.10	H	36.44	-62.17	14.06	1.63	-49.74	-20.00	29.74
3640.10	V	37.56	-61.04	14.06	1.63	-48.61	-20.00	28.61
4095.11	H	39.77	-58.33	13.71	1.35	-45.97	-20.00	25.97
4095.11	V	41.48	-56.75	13.71	1.35	-44.39	-20.00	24.39
4550.13	H	45.87	-51.33	14.15	1.70	-38.88	-20.00	18.88
4550.13	V	47.82	-49.35	14.15	1.70	-36.90	-20.00	16.90
FM, Frequency: 455.0125MHz-25 kHz								
910.03	H	54.37	-40.88	0.00	0.51	-41.39	-13.00	28.39
910.03	V	62.66	-29.27	0.00	0.51	-29.78	-13.00	16.78
1365.04	H	41.92	-61.61	8.76	1.20	-54.05	-13.00	41.05
1365.04	V	44.09	-60.15	8.76	1.20	-52.59	-13.00	39.59
1820.05	H	50.52	-53.48	11.24	0.75	-42.99	-13.00	29.99
1820.05	V	50.43	-54.11	11.24	0.75	-43.62	-13.00	30.62
2275.06	H	44.62	-57.46	11.10	1.21	-47.57	-13.00	34.57
2275.06	V	44.61	-57.37	11.10	1.21	-47.48	-13.00	34.48
2730.08	H	61.43	-40.45	13.10	1.28	-28.63	-13.00	15.63
2730.08	V	52.39	-49.62	13.10	1.28	-37.80	-13.00	24.80
3185.09	H	43.43	-55.43	13.54	1.61	-43.50	-13.00	30.50
3185.09	V	43.91	-55.00	13.54	1.61	-43.07	-13.00	30.07
3640.10	H	36.31	-62.30	14.06	1.63	-49.87	-13.00	36.87
3640.10	V	36.14	-62.46	14.06	1.63	-50.03	-13.00	37.03
4095.11	H	38.31	-59.79	13.71	1.35	-47.43	-13.00	34.43
4095.11	V	36.72	-61.51	13.71	1.35	-49.15	-13.00	36.15
4550.13	H	42.64	-54.56	14.15	1.70	-42.11	-13.00	29.11
4550.13	V	46.35	-50.82	14.15	1.70	-38.37	-13.00	25.37

4FSK, Frequency: 455.0125MHz-12.5 kHz								
910.03	H	53.12	-42.13	0.00	0.51	-42.64	-20.00	22.64
910.03	V	62.11	-29.82	0.00	0.51	-30.33	-20.00	10.33
1365.04	H	41.83	-61.70	8.76	1.20	-54.14	-20.00	34.14
1365.04	V	43.13	-61.11	8.76	1.20	-53.55	-20.00	33.55
1820.05	H	50.29	-53.71	11.24	0.75	-43.22	-20.00	23.22
1820.05	V	49.68	-54.86	11.24	0.75	-44.37	-20.00	24.37
2275.06	H	45.12	-56.96	11.10	1.21	-47.07	-20.00	27.07
2275.06	V	46.84	-55.14	11.10	1.21	-45.25	-20.00	25.25
2730.08	H	62.15	-39.73	13.10	1.28	-27.91	-20.00	7.91
2730.08	V	52.28	-49.73	13.10	1.28	-37.91	-20.00	17.91
3185.09	H	43.45	-55.41	13.54	1.61	-43.48	-20.00	23.48
3185.09	V	44.79	-54.12	13.54	1.61	-42.19	-20.00	22.19
3640.10	H	37.31	-61.30	14.06	1.63	-48.87	-20.00	28.87
3640.10	V	38.63	-59.97	14.06	1.63	-47.54	-20.00	27.54
4095.11	H	38.26	-59.84	13.71	1.35	-47.48	-20.00	27.48
4095.11	V	38.32	-59.91	13.71	1.35	-47.55	-20.00	27.55
4550.13	H	44.16	-53.04	14.15	1.70	-40.59	-20.00	20.59
4550.13	V	45.72	-51.45	14.15	1.70	-39.00	-20.00	19.00

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM,Frequency: 454.0125MHz-12.5 kHz								
908.03	H	56.51	-38.81	0.00	0.51	-39.32	-13.00	26.32
908.03	V	64.18	-27.81	0.00	0.51	-28.32	-13.00	15.32
1362.04	H	41.23	-62.32	8.73	1.20	-54.79	-13.00	41.79
1362.04	V	45.21	-59.05	8.73	1.20	-51.52	-13.00	38.52
1816.05	H	49.93	-54.12	11.21	0.73	-43.64	-13.00	30.64
1816.05	V	47.94	-56.67	11.21	0.73	-46.19	-13.00	33.19
2270.06	H	45.36	-56.70	11.08	1.20	-46.82	-13.00	33.82
2270.06	V	47.53	-54.43	11.08	1.20	-44.55	-13.00	31.55
2724.08	H	60.87	-41.02	13.10	1.28	-29.20	-13.00	16.20
2724.08	V	53.47	-48.55	13.10	1.28	-36.73	-13.00	23.73
3178.09	H	43.65	-55.30	13.51	1.63	-43.42	-13.00	30.42
3178.09	V	44.63	-54.36	13.51	1.63	-42.48	-13.00	29.48
3632.10	H	37.67	-61.03	14.07	1.61	-48.57	-13.00	35.57
3632.10	V	38.01	-60.68	14.07	1.61	-48.22	-13.00	35.22
4086.11	H	38.91	-59.13	13.74	1.36	-46.75	-13.00	33.75
4086.11	V	40.86	-57.31	13.74	1.36	-44.93	-13.00	31.93
4540.13	H	45.66	-51.57	14.14	1.66	-39.09	-13.00	26.09
4540.13	V	45.85	-51.33	14.14	1.66	-38.85	-13.00	25.85

FM, Frequency: 454.0125MHz-25 kHz								
908.03	H	56.43	-38.89	0.00	0.51	-39.40	-13.00	26.40
908.03	V	64.12	-27.87	0.00	0.51	-28.38	-13.00	15.38
1362.04	H	42.36	-61.19	8.73	1.20	-53.66	-13.00	40.66
1362.04	V	44.98	-59.28	8.73	1.20	-51.75	-13.00	38.75
1816.05	H	50.16	-53.89	11.21	0.73	-43.41	-13.00	30.41
1816.05	V	48.46	-56.15	11.21	0.73	-45.67	-13.00	32.67
2270.06	H	45.17	-56.89	11.08	1.20	-47.01	-13.00	34.01
2270.06	V	46.39	-55.57	11.08	1.20	-45.69	-13.00	32.69
2724.08	H	60.88	-41.01	13.10	1.28	-29.19	-13.00	16.19
2724.08	V	52.68	-49.34	13.10	1.28	-37.52	-13.00	24.52
3178.09	H	44.36	-54.59	13.51	1.63	-42.71	-13.00	29.71
3178.09	V	45.36	-53.63	13.51	1.63	-41.75	-13.00	28.75
3632.10	H	37.85	-60.85	14.07	1.61	-48.39	-13.00	35.39
3632.10	V	37.89	-60.80	14.07	1.61	-48.34	-13.00	35.34
4086.11	H	39.06	-58.98	13.74	1.36	-46.60	-13.00	33.60
4086.11	V	39.11	-59.06	13.74	1.36	-46.68	-13.00	33.68
4540.13	H	46.07	-51.16	14.14	1.66	-38.68	-13.00	25.68
4540.13	V	46.93	-50.25	14.14	1.66	-37.77	-13.00	24.77
4FSK, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	56.12	-39.20	0.00	0.51	-39.71	-13.00	26.71
908.03	V	64.27	-27.72	0.00	0.51	-28.23	-13.00	15.23
1362.04	H	42.76	-60.79	8.73	1.20	-53.26	-13.00	40.26
1362.04	V	45.36	-58.90	8.73	1.20	-51.37	-13.00	38.37
1816.05	H	49.84	-54.21	11.21	0.73	-43.73	-13.00	30.73
1816.05	V	49.64	-54.97	11.21	0.73	-44.49	-13.00	31.49
2270.06	H	45.22	-56.84	11.08	1.20	-46.96	-13.00	33.96
2270.06	V	45.65	-56.31	11.08	1.20	-46.43	-13.00	33.43
2724.08	H	61.39	-40.50	13.10	1.28	-28.68	-13.00	15.68
2724.08	V	53.09	-48.93	13.10	1.28	-37.11	-13.00	24.11
3178.09	H	43.63	-55.32	13.51	1.63	-43.44	-13.00	30.44
3178.09	V	45.83	-53.16	13.51	1.63	-41.28	-13.00	28.28
3632.10	H	39.06	-59.64	14.07	1.61	-47.18	-13.00	34.18
3632.10	V	40.91	-57.78	14.07	1.61	-45.32	-13.00	32.32
4086.11	H	41.42	-56.62	13.74	1.36	-44.24	-13.00	31.24
4086.11	V	41.64	-56.53	13.74	1.36	-44.15	-13.00	31.15
4540.13	H	45.65	-51.58	14.14	1.66	-39.10	-13.00	26.10
4540.13	V	45.98	-51.20	14.14	1.66	-38.72	-13.00	25.72

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

7 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables.

FCC Part 90:

FM,12.5kHz, Reference Frequency: 453.2125 MHz, Limit: ±2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	453.2126584	0.35
-20		453.2126382	0.30
-10		453.2126181	0.26
0		453.2125580	0.13
10		453.2125582	0.13
20		453.2125580	0.13
30		453.2125179	0.04
40		453.2124977	-0.01
50		453.2124873	-0.03
20	6.3	453.2124271	-0.16
20	8.4	453.2124070	-0.21

4FSK, 12.5kHz, Reference Frequency: 453.2125MHz, Limit: ±2.5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	453.2127452	0.54
-20		453.2127151	0.47
-10		453.2126945	0.43
0		453.2126449	0.32
10		453.2126448	0.32
20		453.2126445	0.32
30		453.2126144	0.25
40		453.2125961	0.21
50		453.2125739	0.16
20	6.3	453.2125631	0.14
20	8.4	453.2125230	0.05

FCC Part 74:

FM, 12.5kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	455.0126009	0.22
-20		455.0125910	0.20
-10		455.0125811	0.18
0		455.0125609	0.13
10		455.0125009	0.00
20		455.0125000	0.00
30		455.0124906	-0.02
40		455.0124705	-0.06
50		455.0124303	-0.15
20	6.3	455.0124202	-0.18
20	8.4	455.0124001	-0.22

4FSK, 12.5kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	455.0125780	0.17
-20		455.0125660	0.15
-10		455.0125350	0.08
0		455.0124640	-0.08
10		455.0124639	-0.08
20		455.0124635	-0.08
30		455.0124931	-0.02
40		455.0124150	-0.19
50		455.0124081	-0.20
20	6.3	455.0124003	-0.22
20	8.4	455.0123996	-0.22

FM, 25kHz, Reference Frequency: 455.0125 MHz, Limit: ± 5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	455.0126089	0.24
-20		455.0125988	0.22
-10		455.0125787	0.17
0		455.0125589	0.13
10		455.0125019	0.00
20		455.0125000	0.00
30		455.0124986	0.00
40		455.0124800	-0.04
50		455.0124709	-0.06
20	6.3	455.0124508	-0.11
20	8.4	455.0124406	-0.13

FCC Part 22:

FM, 12.5kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	454.0125991	0.22
-20		454.0125892	0.20
-10		454.0125693	0.15
0		454.0125395	0.09
10		454.0125296	0.07
20		454.0125290	0.06
30		454.0125198	0.04
40		454.0124999	0.00
50		454.0124897	-0.02
20	6.3	454.0124696	-0.07
20	8.4	454.0124591	-0.09

4FSK, 12.5kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	454.0125869	0.19
-20		454.0125768	0.17
-10		454.0125667	0.15
0		454.0125366	0.08
10		454.0125365	0.08
20		454.0125361	0.08
30		454.0124859	-0.03
40		454.0124751	-0.05
50		454.0124148	-0.19
20	6.3	454.0124039	-0.21
20	8.4	454.0123928	-0.24

FM, 25kHz, Reference Frequency: 454.0125MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	7.4	454.0125899	0.20
-20		454.0125694	0.15
-10		454.0125496	0.11
0		454.0125393	0.09
10		454.0125293	0.06
20		454.0125290	0.06
30		454.0125193	0.04
40		454.0124889	-0.02
50		454.0124785	-0.05
20	6.3	454.0124583	-0.09
20	8.4	454.0124181	-0.18


8 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

Regulations: FCC §90.214

Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .


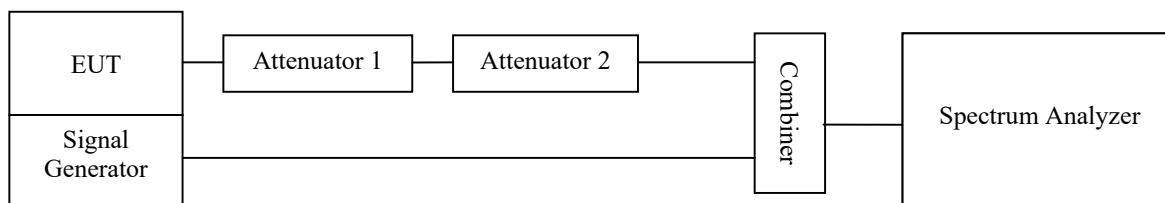


Test Data

Test Mode: Transmitting

Test Result: Compliance. *Please refer to the following table and plots.*

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	<10(t ₁)	±12.5 kHz	Pass
	<25(t ₂)	±6.25 kHz	
	<10(t ₃)	±12.5 kHz	

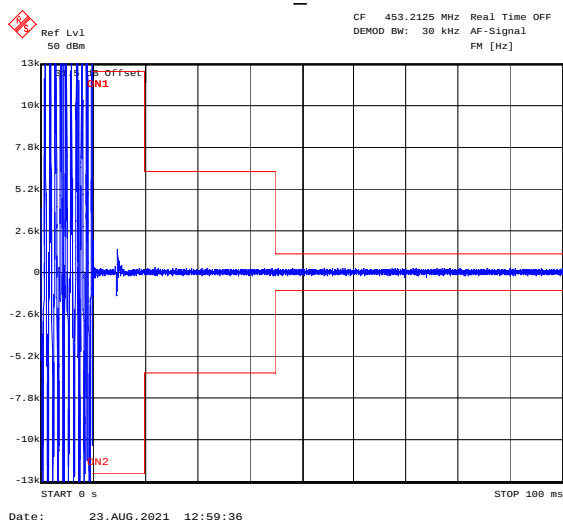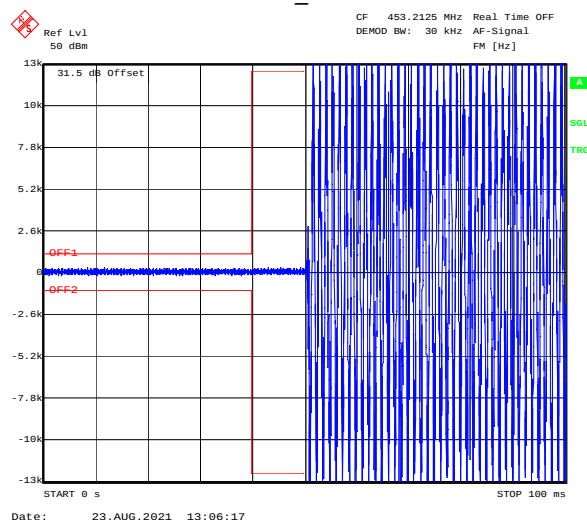453.2125_Turn On**453.2125_Turn Off********* END OF REPORT *******