


<b>Report Reference ID:</b>	REP074710
-----------------------------	-----------

<b>Test specification:</b>	<b>Title 47 – Telecommunication</b> Chapter I – Federal Communications Commission Subchapter A – General Part 22 – Public Mobile Services Subpart H – Cellular Radiotelephone Service
----------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>Applicant:</b>	TEKO Telecom Srl. Via Meucci, 24/a 40024 – Castel S. Pietro Terme (BO) – Italy
<b>Apparatus:</b>	Medium Power Remote Unit
<b>Model:</b>	TRU67E8AEWM/AC-WT
<b>FCC ID:</b>	XM2-MP67E8AE

<b>Testing laboratory:</b>	<b>Nemko Italy Spa</b> Via del Carroccio, 4 20853 Biassono (MB) – Italy Telephone: +39 039 2201201 Facsimile: +39 039 2201221
----------------------------	-------------------------------------------------------------------------------------------------------------------------------------------

	<b>Name and title</b>	<b>Date</b>
<b>Tested by:</b>	 P. Barbieri, Wireless/EMC Specialist	2024-12-24
<b>Reviewed by:</b>	R. Giampaglia, Laboratory manager	2024-12-24

## Table of contents

<b>Section 1: Report summary .....</b>	<b>3</b>
1.1 Test specification.....	3
1.2 Statement of compliance .....	3
1.3 Exclusions .....	3
1.4 Registration number .....	3
1.5 Test report revision history .....	3
1.6 Limits of responsibility .....	3
<b>Section 2: Summary of test results .....</b>	<b>4</b>
2.1 FCC Part 22, test results .....	4
<b>Section 3: Equipment under test (EUT) and application details.....</b>	<b>5</b>
3.1 Applicant details .....	5
3.2 Modular equipment.....	5
3.3 Product details.....	5
3.4 Application purpose .....	5
3.5 Composite/related equipment.....	6
3.6 Sample information.....	6
3.7 EUT technical specifications.....	6
3.8 Accessories and support equipment.....	7
3.9 Operation of the EUT during testing .....	8
3.10 EUT setup diagram.....	8
<b>Section 4: Engineering considerations.....</b>	<b>9</b>
4.1 Modifications incorporated in the EUT .....	9
4.2 Deviations from laboratory tests procedures.....	9
4.3 Technical judgment .....	9
<b>Section 5: Test conditions .....</b>	<b>10</b>
5.1 Deviations from laboratory tests procedures.....	10
5.2 Test conditions, power source and ambient temperatures .....	10
5.3 Measurement uncertainty .....	10
5.4 Test equipment.....	12
<b>Appendix A: Test results.....</b>	<b>13</b>
Clause 935210 D05v01r04 (3.2) AGC threshold.....	13
Clause 935210 D05v01r04 (3.3) Out of band rejection .....	15
Clause 22.917(b) Occupied bandwidth .....	17
Clause 22.913(a) Peak output power at RF antenna connector .....	20
Clause 22.917(a) Spurious emissions at RF antenna connector.....	24
Clause 22.917(a) Radiated Spurious emissions .....	28
<b>Appendix B: Block diagrams of test set-ups .....</b>	<b>30</b>
<b>Appendix C: EUT Photos .....</b>	<b>31</b>

## Section 1: Report summary

### 1.1 Test specification

<b>Specifications</b>	<b>Part 22 Subpart H, Cellular Radiotelephone Service</b>
-----------------------	-----------------------------------------------------------

### 1.2 Statement of compliance

<b>Compliance</b>	<p>In the configuration tested the EUT was found compliant</p> <p>Yes <input checked="" type="checkbox"/> No <input type="checkbox"/></p> <p>Test method: ANSI C63.26-2015, 935210 D05 Measurements guidance for industrial and non-consumer signal booster, repeater and amplifier devices v01r04.</p>
-------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### 1.3 Exclusions

<b>Exclusions</b>	None
-------------------	------

### 1.4 Registration number

<b>FCC site number</b>	682159
------------------------	--------

### 1.5 Test report revision history

Revision #	Details of changes made to test report
REP074710	Original report issued

### 1.6 Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## Section 2: Summary of test results

### 2.1 FCC Part 22, test results

Part	Methods	Test description	Verdict
	§ 935210 D05v01r04 (3.2)	AGC threshold	Pass
	§ 935210 D05v01r04 (3.3)	Out of band rejection	Pass
§22.917(b)	§ 935210 D05v01r04 (3.4)	Occupied bandwidth	Pass
§22.913(a)	§ 935210 D05v01r04 (3.5)	Peak output power at RF antenna connector	Pass
§22.917(a)	§ 935210 D05v01r04 (3.6)	Spurious emissions at RF antenna connector	Pass
§22.917(a)	§ 935210 D05v01r04 (3.8)	Radiated spurious emissions	Pass
§22.355	§ 935210 D05v01r04 (3.7)	Frequency stability	N/A a)

Notes:

- a) NOT APPLICABLE: Modulation/frequency conversion circuitry not in use. No frequency change in EUT (input and output have same frequency)

## Section 3: Equipment under test (EUT) and application details

### 3.1 Applicant details

<b>Applicant complete business name</b>	Name:	Teko Telecom Srl
	Federal Registration Number (FRN):	0018963462
	Grantee code	XM2
<b>Mailing address</b>	Address:	Via Meucci, 24/a
	City:	Castel S. Pietro Terme
	Province/State:	Bologna
	Post code:	40024
	Country:	Italy

### 3.2 Modular equipment

<b>a) Single modular approval</b>	Single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>b) Limited single modular approval</b>	Limited single modular approval Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>

### 3.3 Product details

<b>FCC ID</b>	Grantee code:	XM2
	Product code:	-MP67E8AE
<b>Equipment class</b>	B2I	
<b>Description of product as it is marketed</b>	Booster	
	Model name/number:	TRU67E8AEWM/AC-WT
	Serial number:	1012791001

### 3.4 Application purpose

<b>Type of application</b>	<input type="checkbox"/> Original certification
	<input type="checkbox"/> Change in identification of presently authorized equipment
	Original FCC ID: Grant date:
	<input checked="" type="checkbox"/> Class II permissive change or modification of presently authorized equipment

## Section 3: Equipment under test

### 3.5 Composite/related equipment

<b>a) Composite equipment</b>	The EUT is a composite device subject to an additional equipment authorization Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
<b>b) Related equipment</b>	The EUT is part of a system that operates with, or is marketed with, another device that requires an equipment authorization Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>
<b>c) Related FCC ID</b>	If either of the above is "yes": <input type="checkbox"/> has been granted under the FCC ID(s) listed below: <input type="checkbox"/> is in the process of being filled under the FCC ID(s) listed below: <input type="checkbox"/> is pending with the FCC ID(s) listed below: <input type="checkbox"/> has a mix of pending and granted statues under the FCC ID(s) listed below: i FCC ID: XM2-MP67E8AE ii FCC ID:

### 3.6 Sample information

<b>Receipt date:</b>	2024-12-13
<b>Nemko sample ID number:</b>	PRJ007185400006

### 3.7 EUT technical specifications

<b>Operating band:</b>	Down Link 869-894 MHz; Up Link 824-849 MHz
<b>Operating frequency:</b>	Wideband
<b>Modulation type:</b>	5G NR (QAM and QPSK)
<b>Occupied bandwidth:</b>	5G NR: 3 MHz to 30 MHz
<b>Channel spacing:</b>	standard
<b>Emission designator:</b>	5G NR: D7W
<b>RF Output</b>	Down Link: 33dBm (2W) Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Gain</b>	Down Link: 38dB Up Link: N.A. (The EUT does not transmit over the air in the up-link direction)
<b>Antenna type:</b>	External Antenna is not provided, equipment that has an external 50 $\Omega$ RF connector
<b>Power source:</b>	100-240 Vac

## Section 3: Equipment under test

### 3.8 Accessories and support equipment

The following information identifies accessories used to exercise the EUT during testing:

#### Item # 1

Type of equipment:	Master Unit - Subrack
Brand name:	Teko Telecom srl
Model name or number:	SUB-TRX-PSU
Serial number:	1007067005
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----

#### Item # 2

Type of equipment:	Master Unit – Management Module
Brand name:	Teko Telecom srl
Model name or number:	TSPV-EBB
Serial number:	1007944030
Nemko sample number:	-----
Connection port:	LAN port
Cable length and type:	-----

#### Item # 3

Type of equipment:	Master Unit – Optical Module
Brand name:	Teko Telecom srl
Model name or number:	TTRU4W-S-M
Serial number:	1008678019
Nemko sample number:	-----
Connection port:	DL/UL RF connector (to connect to the base station) Optical port (to connect to remote unit)
Cable length and type:	-----

#### Item # 4

Type of equipment:	Master Unit – Power Supply
Brand name:	Teko Telecom srl
Model name or number:	TPSU/AC
Serial number:	100012284
Nemko sample number:	-----
Connection port:	-----
Cable length and type:	-----

## Section 3: Equipment under test

### 3.9 Operation of the EUT during testing

<b>Details:</b>	In down-link direction, normal working at max gain with max RF power output.
-----------------	------------------------------------------------------------------------------

### 3.10 EUT setup diagram

In this system, Remote Unit is the EUT. Master Unit includes only management module and optical module (to convert RF signal in optical signal in down link direction and vice versa optical signal in RF signal in uplink direction). As described in "Operational description", master unit is connected directly to base station, so the system doesn't use another equipment (under another FCC ID) to exercise the EUT. Signal generator is linked directly to the RF connector of optical module in the Master Unit.

#### Test setup for output power, occupied bandwidth, spurious emissions:



#### Procedure

Connect the signal modulated generator to the input of the EUT, so that the EUT works at the max gain. Raise the input level to the EUT until reach the maximum output power. Connect the spectrum analyzer to the RF output connector of the EUT.



## Section 4: Engineering considerations

### 4.1 Modifications incorporated in the EUT

**Modifications**

Modifications performed to the EUT during this assessment  
None ☒ Yes ☐, performed by Client ☐ or Nemko ☐  
Details:

### 4.2 Deviations from laboratory tests procedures

**Deviations**

Deviations from laboratory test procedures  
None ☒ Yes ☐ - details are listed below:

### 4.3 Technical judgment

**Judgment**

None

## Section 5: Test conditions

### 5.1 Deviations from laboratory tests procedures

No deviations were made from laboratory test procedures.

### 5.2 Test conditions, power source and ambient temperatures

Normal temperature, humidity and air pressure test conditions	Temperature: 18–33 °C Relative humidity: 25–75 % Air pressure: 86–106 kPa  When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.
Power supply range:	The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$ , for which the equipment was designed.

### 5.3 Measurement uncertainty

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002. The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

## Section 5: Test conditions, continued

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	0.009 MHz ÷ 30 MHz	1.1 dB	(1)
			30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
		Conducted spurious emissions	0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter– Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
Receiver	Radiated	Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
	Radiated	Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
		Sensitivity measurement	1 MHz ÷ 18 GHz	6.0 dB	(1)
Receiver	Conducted	Conducted spurious emissions	0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)

## NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$ , which for a normal distribution corresponds to a coverage probability of approximately 95 %

## Section 5: Test conditions, continued

## 5.4 Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2025-07
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2024-12
Combiner	Miczen	MZP200506GA (0.5-6 GHz)	210314001	COU
Antenna Trilog 25MHz - 8GHz	Schwarzbeck	VULB9168	9168-242	2025-06
Antenna 1-18 GHz	Schwarzbeck	STLP 9148	STPL 9148-123	2025-06
Double Ridge Horn Antenna	RFSpin	DRH40	061106A40	2026-05
Broadband Amplifier	Schwarzbeck	BBV9718C	00121	2025-03
Broadband Bench Top Amplifier	Sage	STB-1834034030-KFKF-L1	18490-01	2025-05
EMI Receiver	Rohde & Schwarz	ESU8	100202	2025-09
Spectrum analyzer	R&S	FSW43	101767	2025-01
Controller	Maturo	FCU3.0	10041	NCR
Tilt antenna mast	Maturo	TAM4.0-E	10042	NCR
Turntable	Maturo	TT4.0-5T	2.527	NCR
3m Semi anechoic chamber	Comtest	SAC-3	1711-150	NCR

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
 (\*) Equipment supplied by manufacturer's

## Appendix A: Test results

### Clause 935210 D05v01r04 (3.2) AGC threshold

Measure of EUT AGC Threshold

Test date: 2024-12-16 to 2024-12-19

Test results: Pass

### Special notes


—

### Test equipment


Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2025-07
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2024-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\*) Equipment supplied by manufacturer's

## Test data

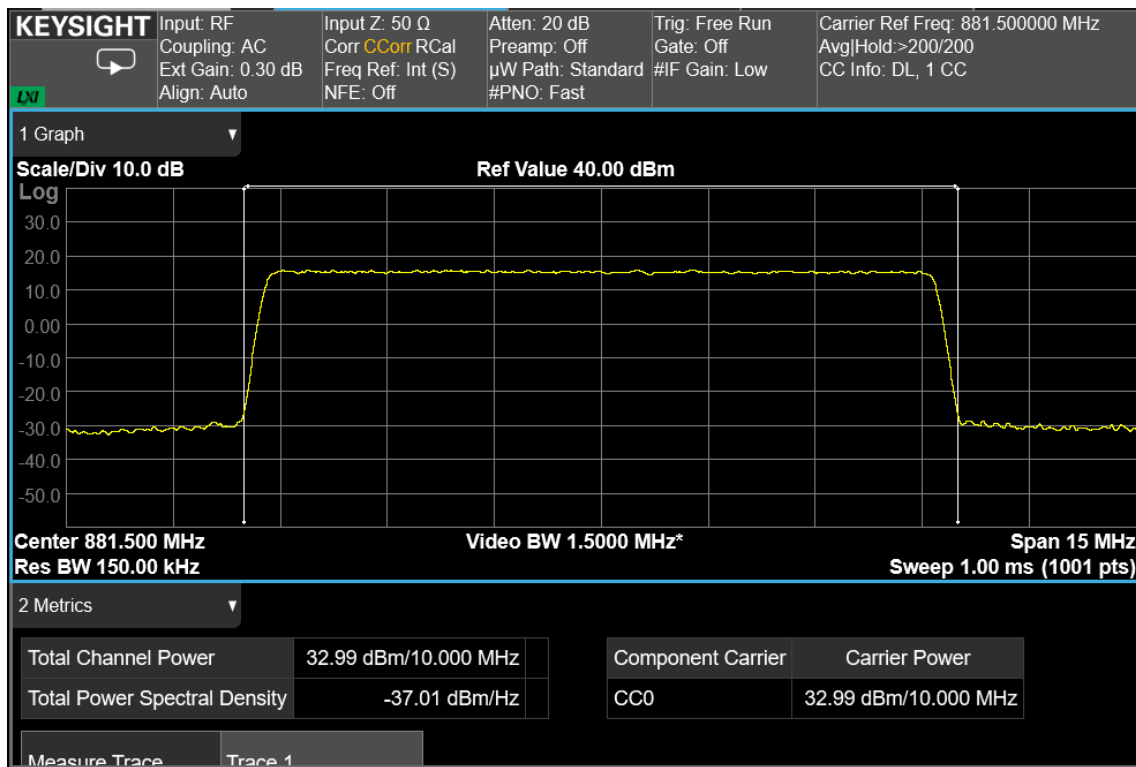

10 MHz signal, middle channel, nominal input signal

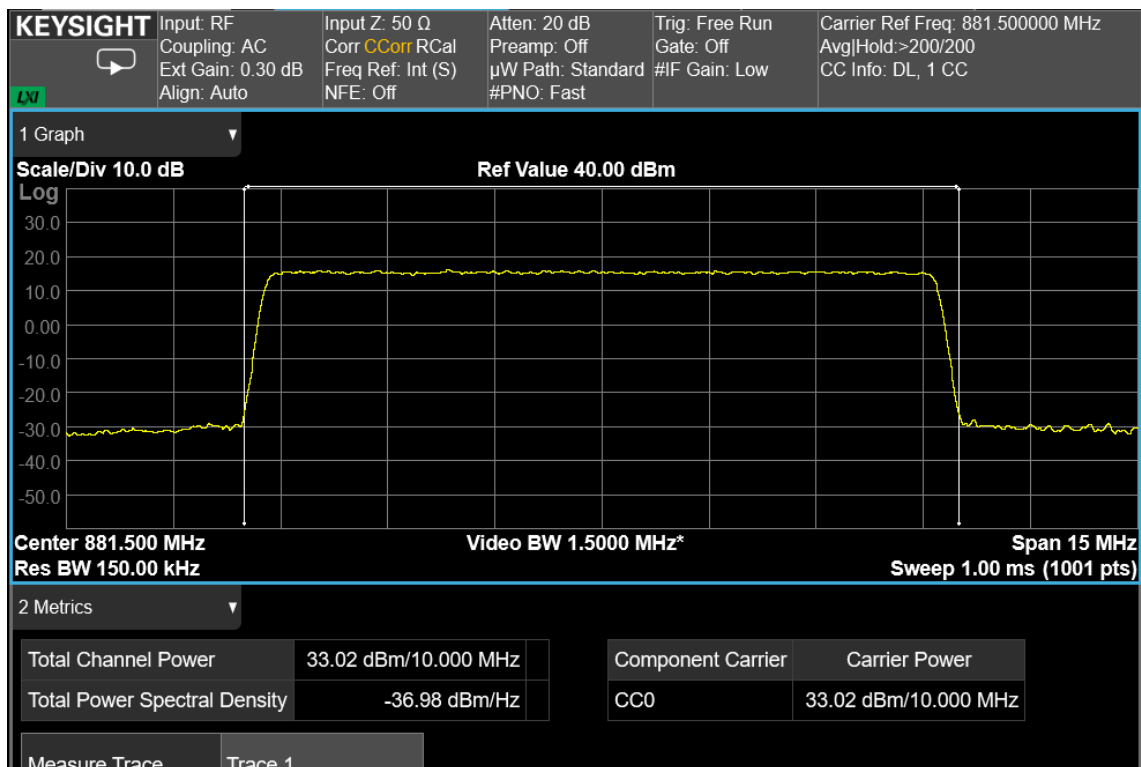

10 MHz signal, middle channel, nominal input signal +1 dB

**Clause 935210 D05v01r04 (3.3) Out of band rejection**

Out of Band Rejection – Test for rejection of out of band signals.

Test date: 2024-12-16 to 2024-12-19

**Test results: Pass****Special notes**


–

**Test equipment**

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2025-07
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2024-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\* ) Equipment supplied by manufacturer's

## Test data

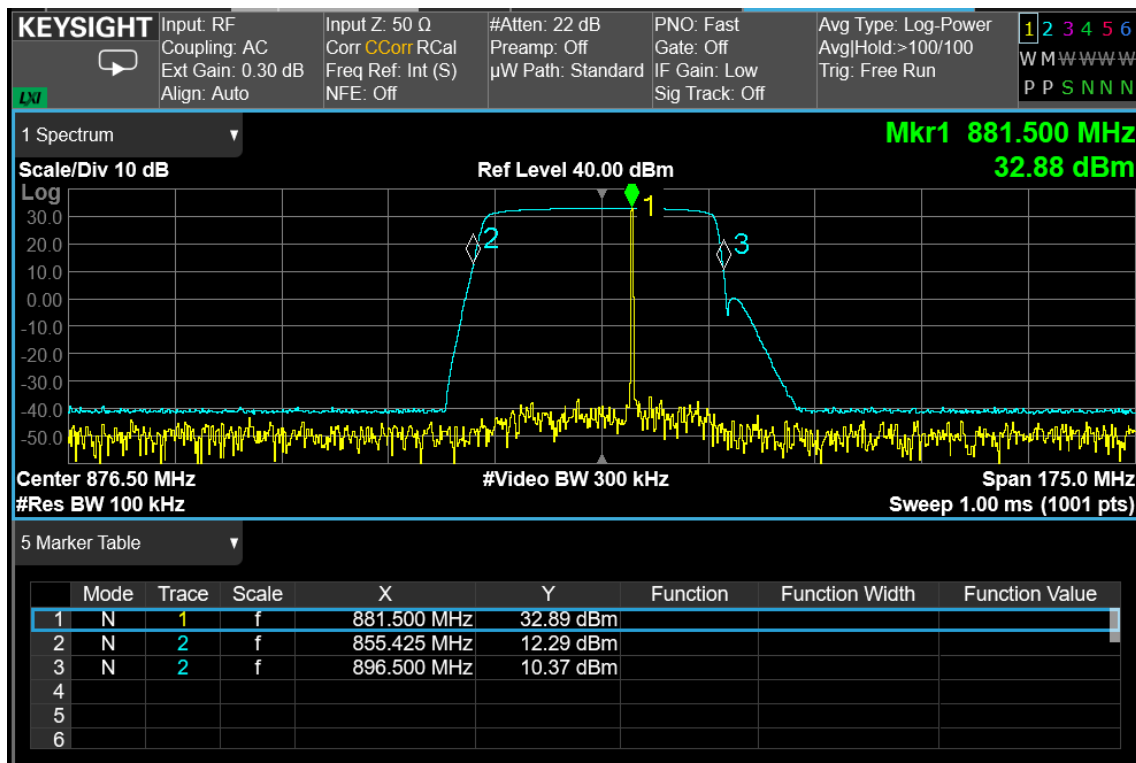



### Clause 22.917(b) Occupied bandwidth

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test date: 2024-12-16 to 2024-12-19

Test results: Pass

### Special notes


-

### Test equipment


Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2025-07
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2024-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\*) Equipment supplied by manufacturer's


## Test data

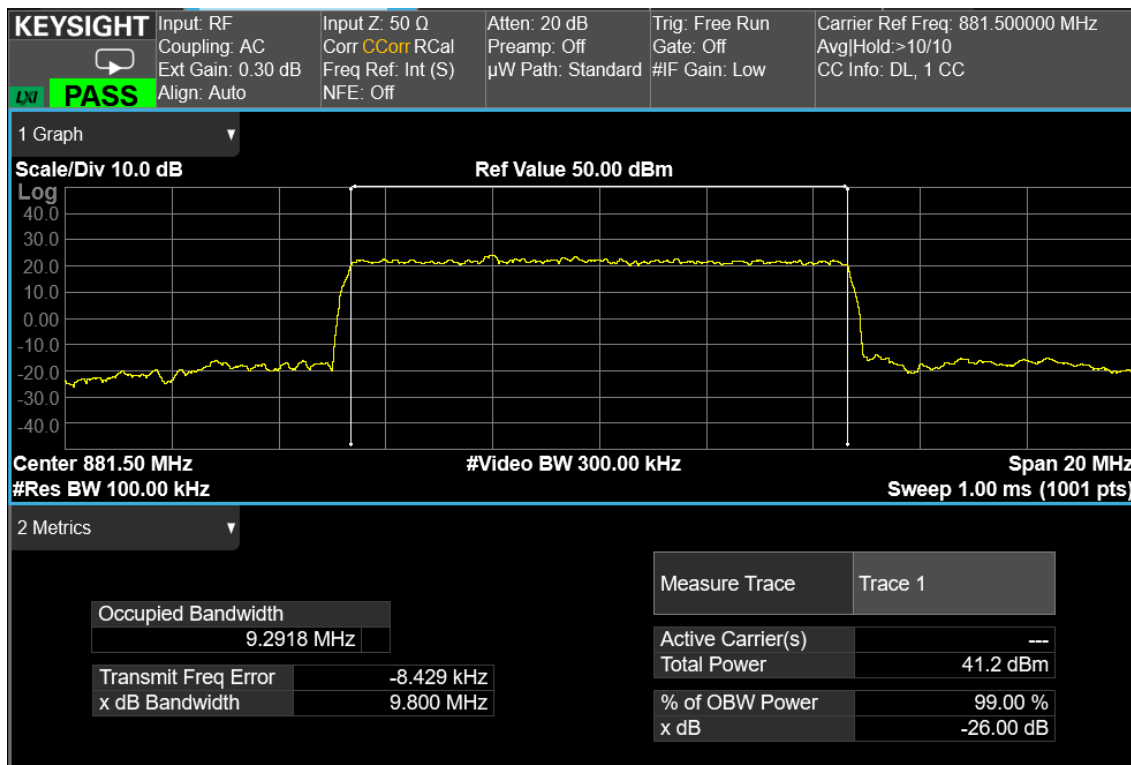


10 MHz signal, middle channel, nominal input signal - Output

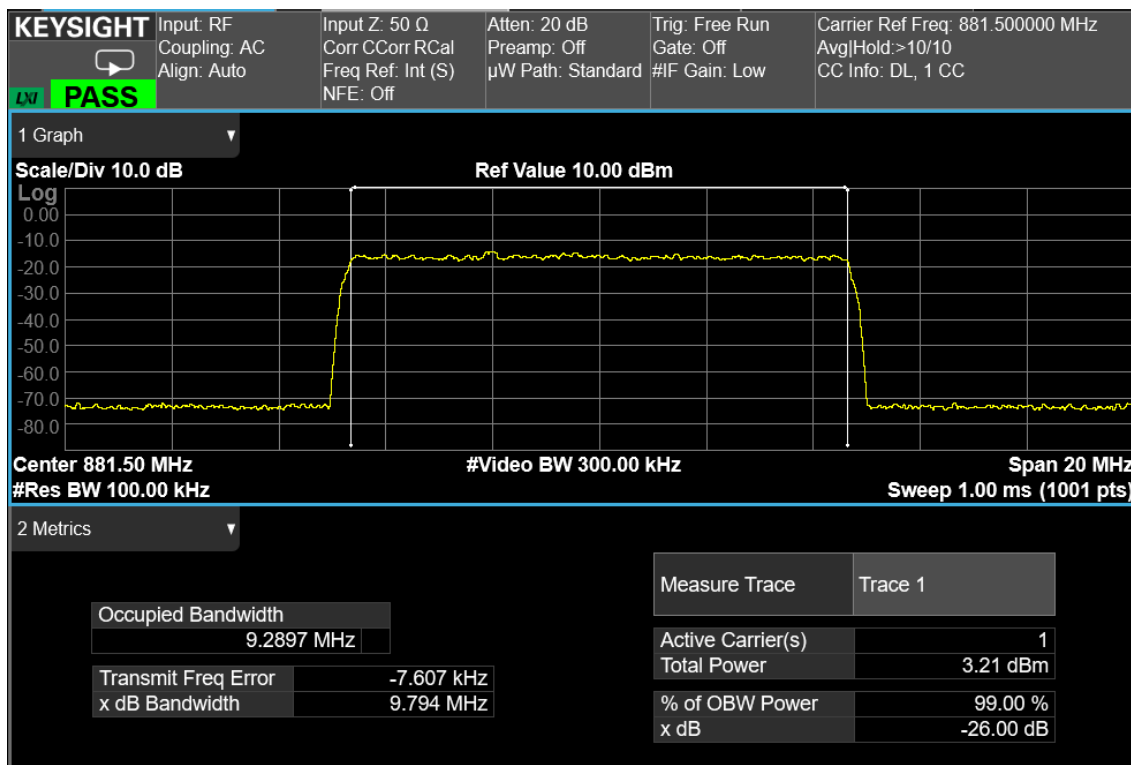

10 MHz signal, middle channel, nominal input signal - Input

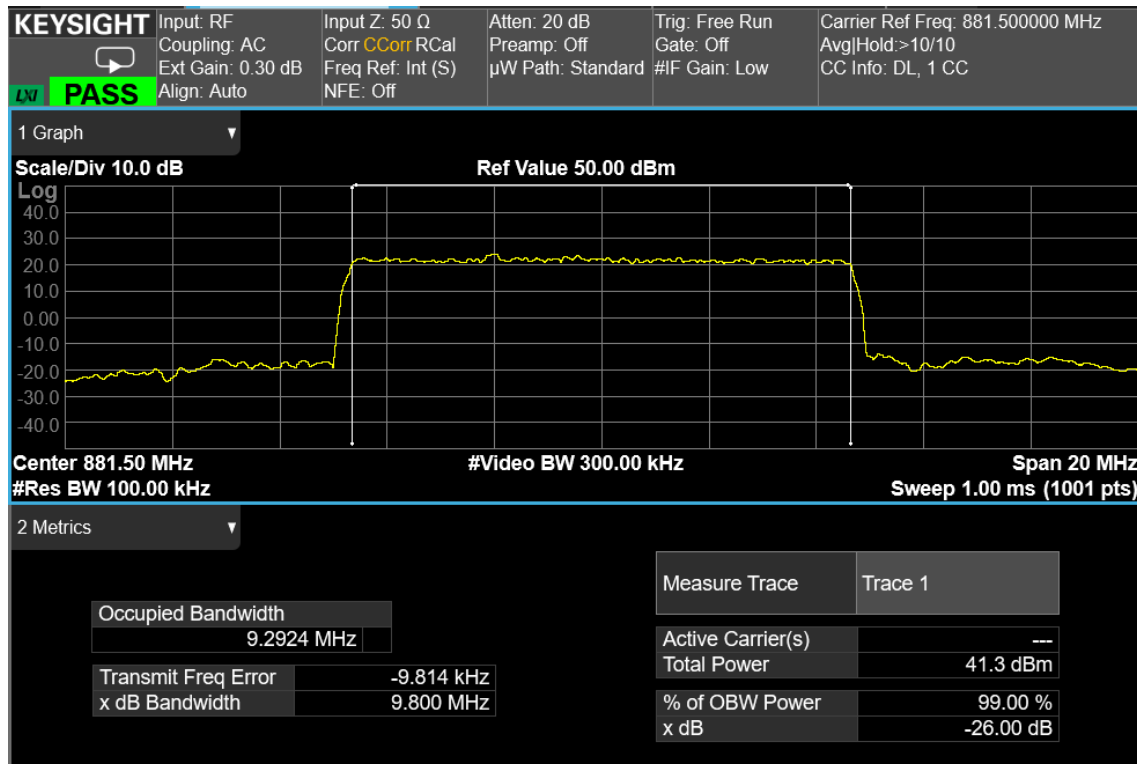

10 MHz signal, middle channel, nominal input signal + 3dB - Output

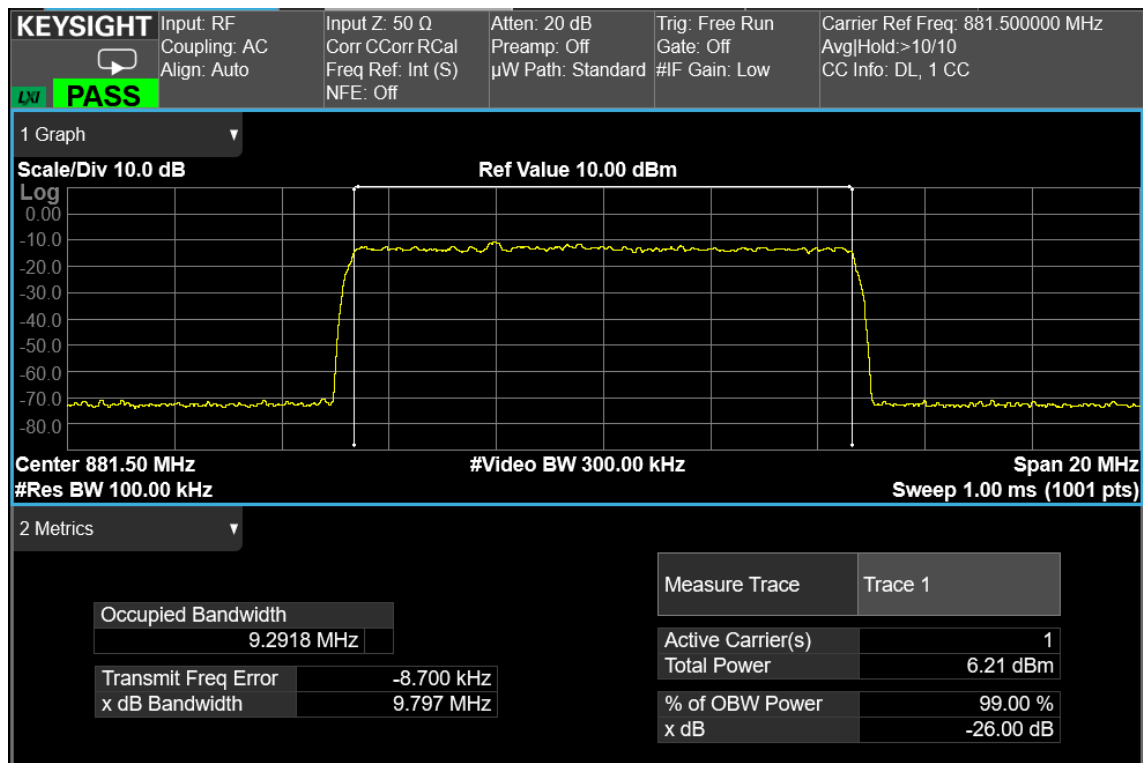

10 MHz signal, middle channel, nominal input signal + 3dB - Input

## Clause 22.913(a) Peak output power at RF antenna connector

Licensees in the Cellular Radiotelephone Service are subject to the effective radiated power (ERP) limits and other requirements in this Section. See also § 22.169.

(a) Maximum ERP. The ERP of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(1) Except as described in paragraphs (a)(2), (3), and (4) of this section, the ERP of base stations and repeaters must not exceed—

- (i) 500 watts per emission; or
- (ii) 400 watts/MHz (PSD) per sector.

(2) Except as described in paragraphs (a)(3) and (4) of this section, for systems operating in areas more than 72 kilometers (45 miles) from international borders that:

- (i) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or
- (ii) Extend coverage into Unserved Area on a secondary basis (see § 22.949), the ERP of base transmitters and repeaters must not exceed—

- (A) 1000 watts per emission; or
- (B) 800 watts/MHz (PSD) per sector.

(3) Provided that they also comply with paragraphs (b) and (c) of this section, licensees are permitted to operate their base transmitters and repeaters with an ERP greater than 400 watts/MHz (PSD) per sector, up to a maximum ERP of 1000 watts/MHz (PSD) per sector unless they meet the conditions in paragraph (a)(4) of this section.

(4) Provided that they also comply with paragraphs (b) and (c) of this section, licensees of systems operating in areas more than 72 kilometers (45 miles) from international borders that:

- (i) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or
- (ii) Extend coverage into Unserved Area on a secondary basis (see § 22.949), are permitted to operate base transmitters and repeaters with an ERP greater than 800 watts/MHz (PSD) per sector, up to a maximum of 2000 watts/MHz (PSD) per sector.

Test date: 2024-12-16 to 2024-12-19

Test results: Pass

### Special notes

-

### Test equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2025-07
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2024-12

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\*) Equipment supplied by manufacturer's

## Test data



## AWGN signal, nominal input signal

Test data						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	5G NR, 10 MHz	881.5	33.0	2.0	0.2	12.4



## AWGN signal, nominal input signal + 3dB

Test data						
Direction	Modulation	Frequency (MHz)	RF output Power (dBm)	RF output channel Power (W)	RF output Power (W/MHz)	PAR (dB)
Down-link	5G NR, 10 MHz	881.5	33.0	2.0	0.2	12.4

Note: PAR measure is performed by the “CCDF” function installed on Spectrum analyzer that provides average power (the same measured with “Channel power” function), peak power and PAR.

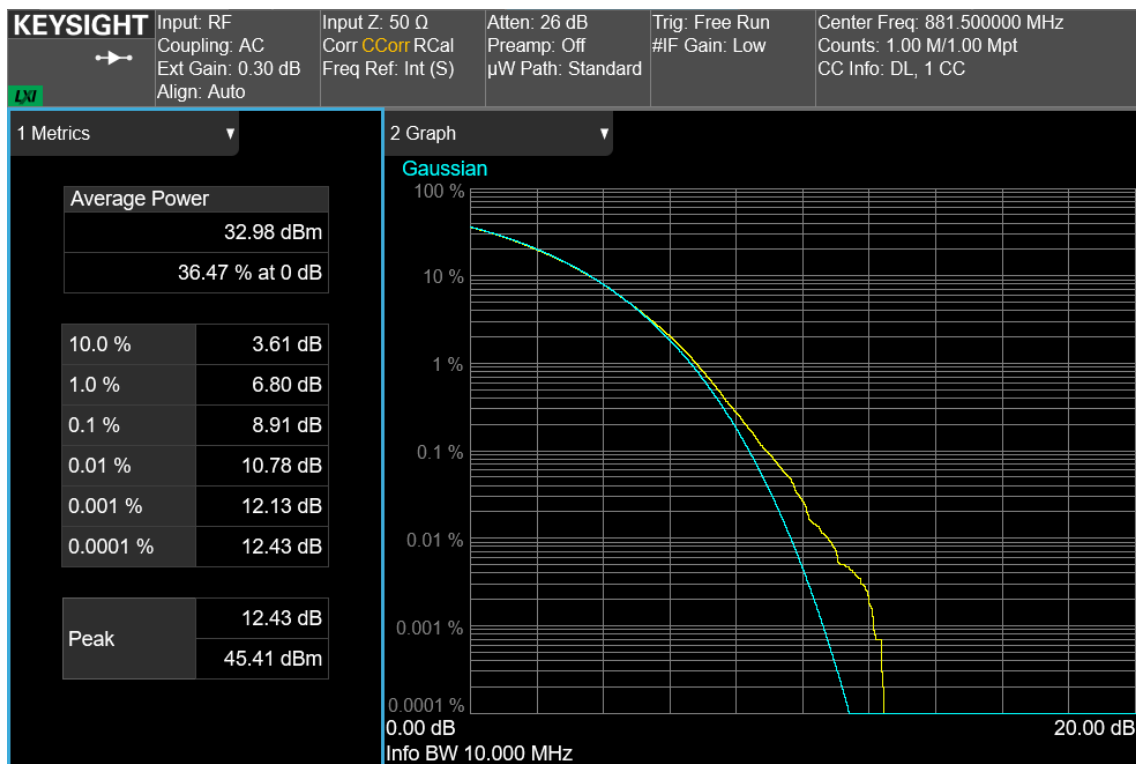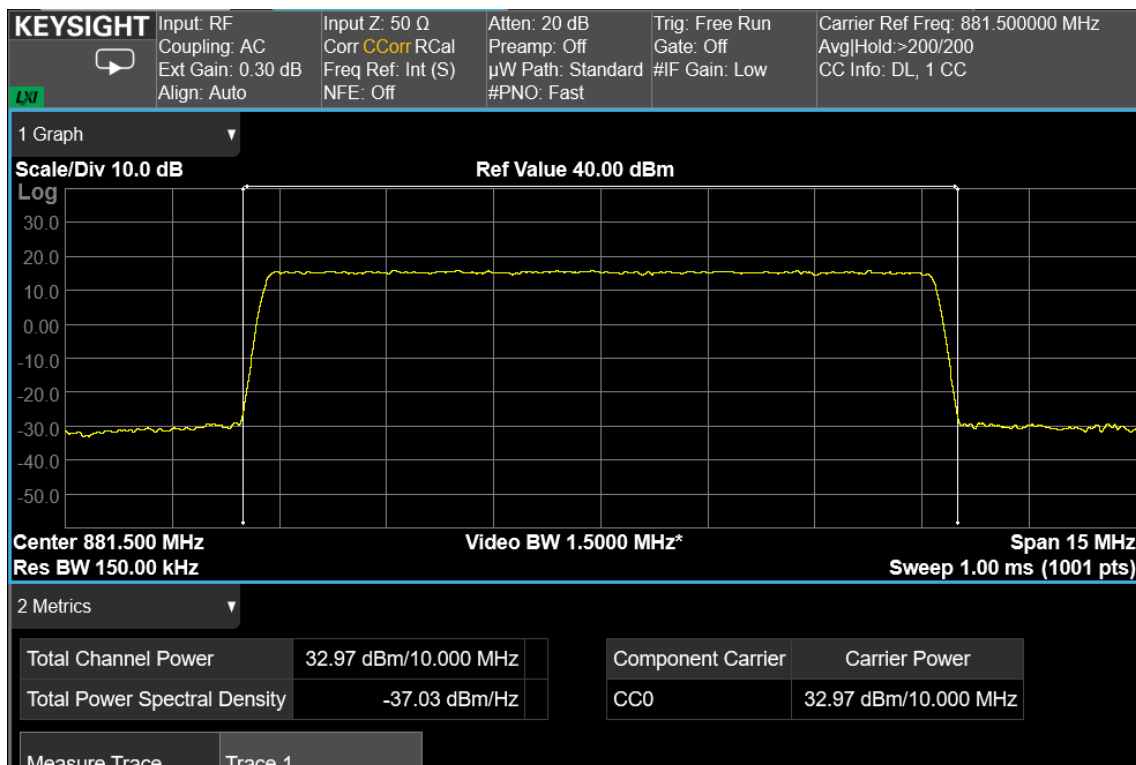

10 MHz signal, middle channel, nominal input signal

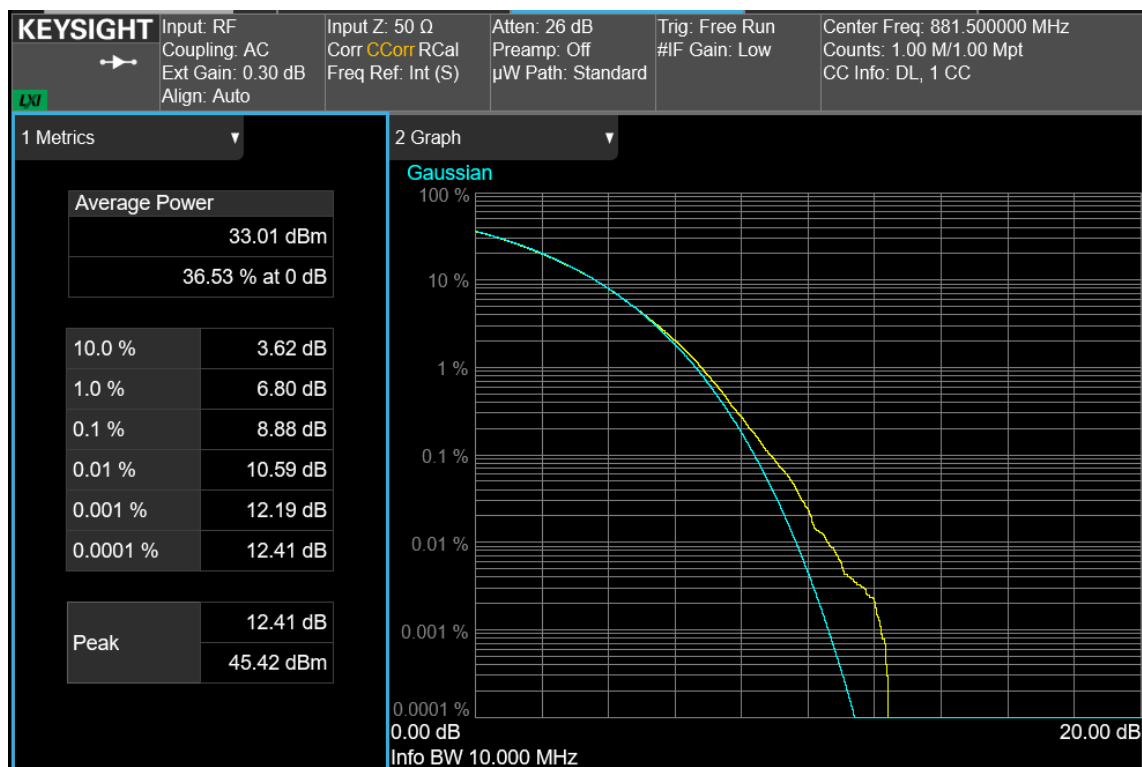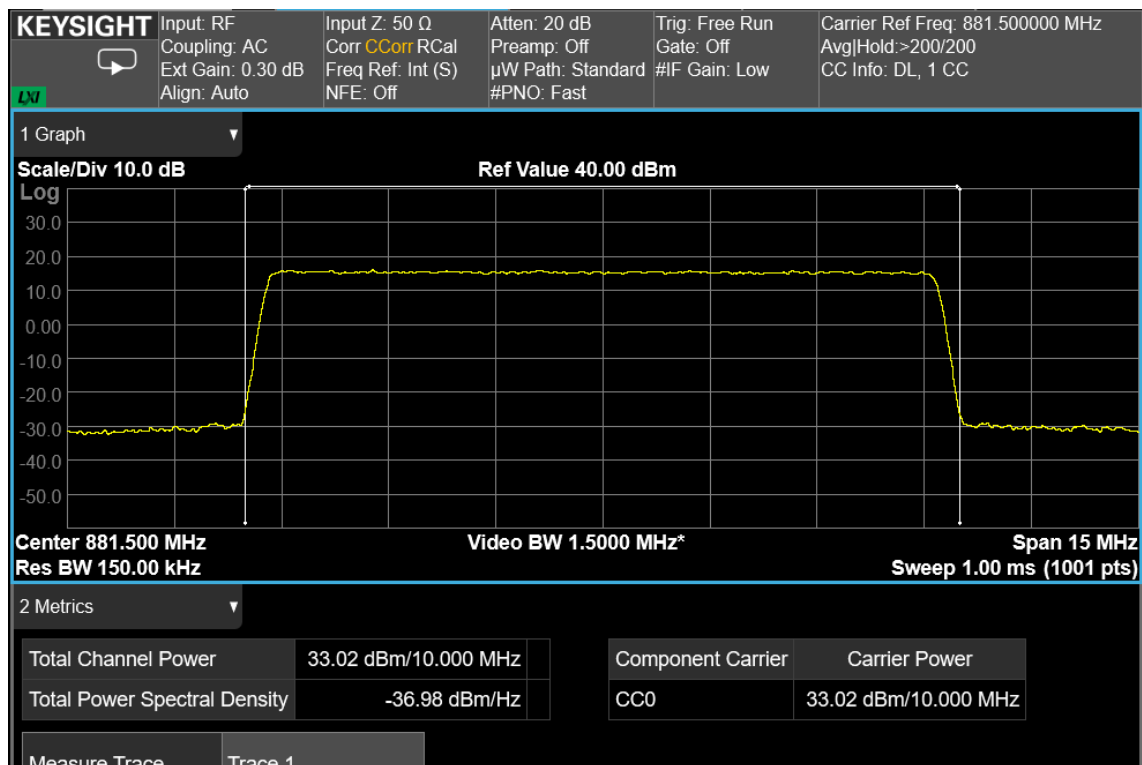

10 MHz signal, middle channel, nominal input signal + 3dB

## Clause 22.917(a) Spurious emissions at RF antenna connector

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

Test date: 2024-12-16 to 2024-12-19

Test results: Pass

### Special notes

For Class 2 Permissive Change new tests were performed only on band edges intermodulation. For previous spurious emissions tests at RF antenna connector see **372719-6TRFWL.pdf** report.

### Test equipment


Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.
Vector Signal Generator	Keysight	N5182B MXG	MY59100262	2025-07
Vector Signal Generator	Keysight	N5182B MXG	MY61252595	2025-11
Spectrum Analyzer	Keysight	N9030B PXA	MY62282033	2024-12
Combiner	Miczen	MZP200506GA (0.5-6 GHz)	210314001	COU

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\*) Equipment supplied by manufacturer's




Test data			
<b>See Plots below</b>			
Spurious emissions measurement results:			
Frequency (MHz)	Spurious emission (dBm)	Limit (dBm)	Margin (dB)
First channel	Negligible	-13	
Mid channel	Negligible	-13	
Last channel	Negligible	-13	


## Test data, continued: band edges Inter modulation

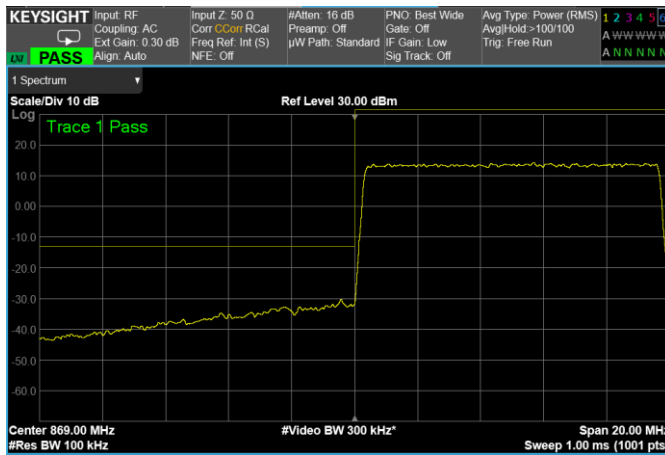


10 MHz signal, Low Band Edge, 1 carrier, nominal input signal

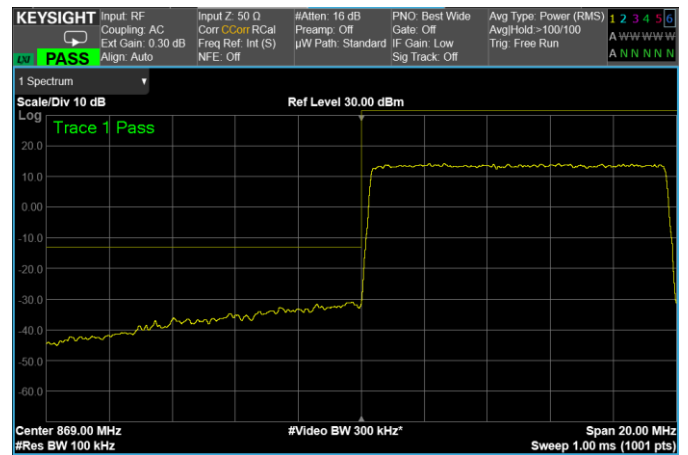


10 MHz signal, Low Band Edge, 1 carrier, nominal input signal + 3dB

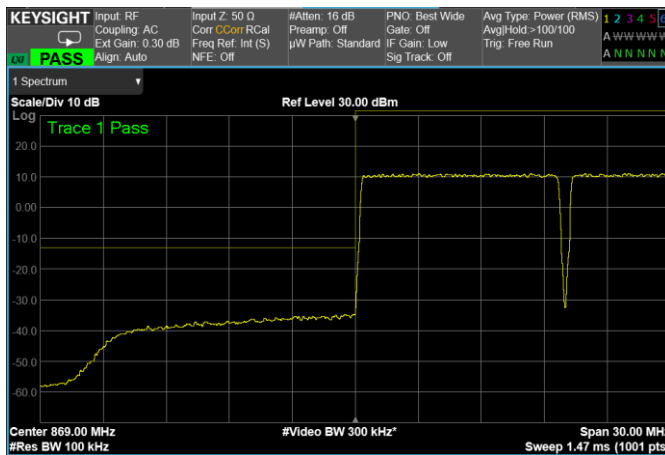


10 MHz signals, Low Band Edge, 2 carriers, nominal input signal

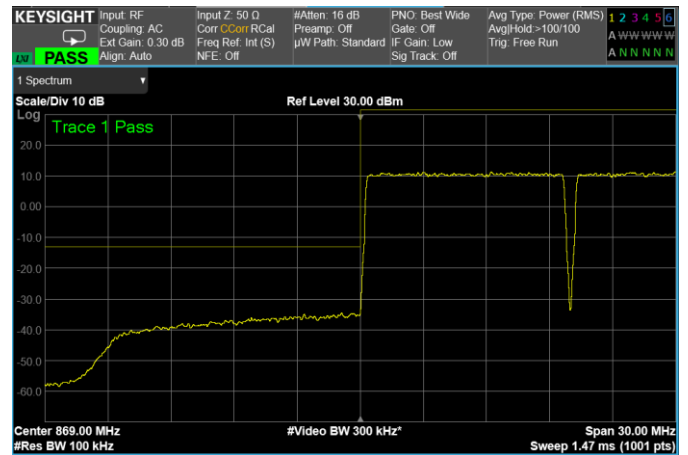


10 MHz signals, Low Band Edge, 2 carriers, nominal input signal + 3dB

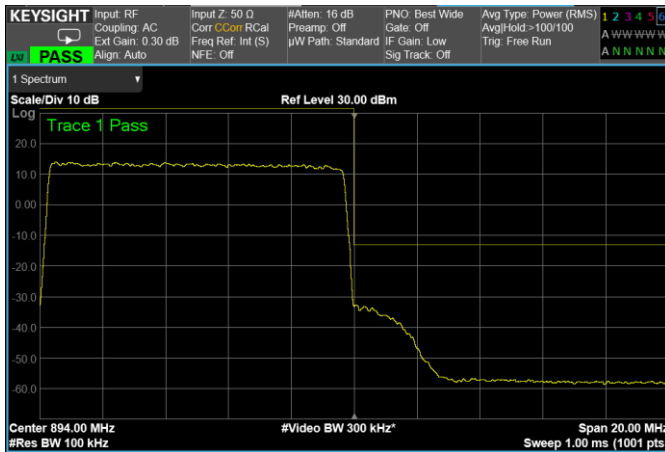


10 MHz signal, High Band Edge, 1 carrier, nominal input signal

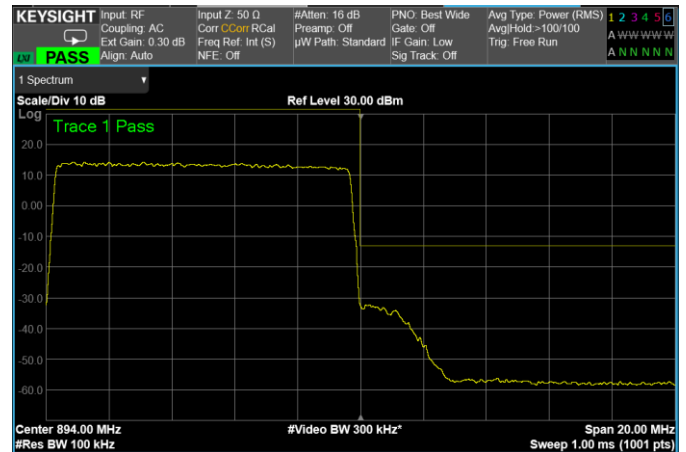

10 MHz signal, High Band Edge, 1 carrier, nominal input signal + 3dB

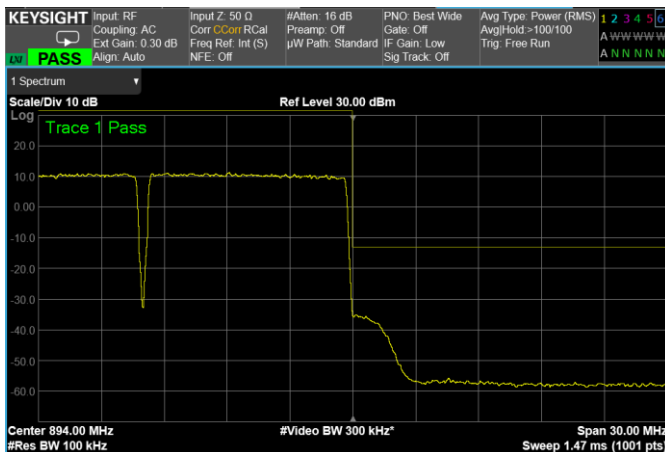

10 MHz signals, High Band Edge, 2 carriers, nominal input signal

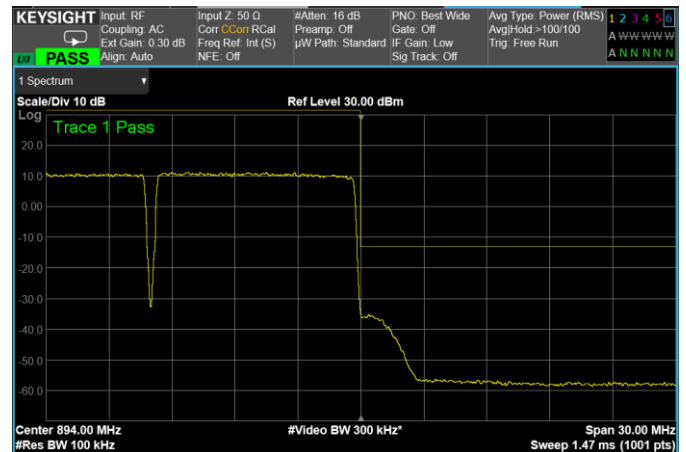

10 MHz signals, High Band Edge, 2 carriers, nominal input signal + 3dB

**Clause 22.917(a) Radiated Spurious emissions**

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

Test date: N/A

Test results: N/A

**Special notes**

- Test not performed because not requested for a Class 2 Permissive Change.
- For previous radiated spurious emission tests see **372719-6TRFWL.pdf** report.

**Test equipment**

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next cal.

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use  
(\*) Equipment supplied by manufacturer's

## Clause 22.917(a) Radiated spurious emissions, continued

## Test data


## Spurious emissions measurement results:

Frequency (MHz)	Polarization. V/H	Field strength (dBm)	Limit (dBm)	Margin (dB)
Low channel				
-				
-				
-				
Mid channel				
High channel				
-				
-				
-				


Note:

## Appendix B: Block diagrams of test set-ups

### Radiated emissions set-up

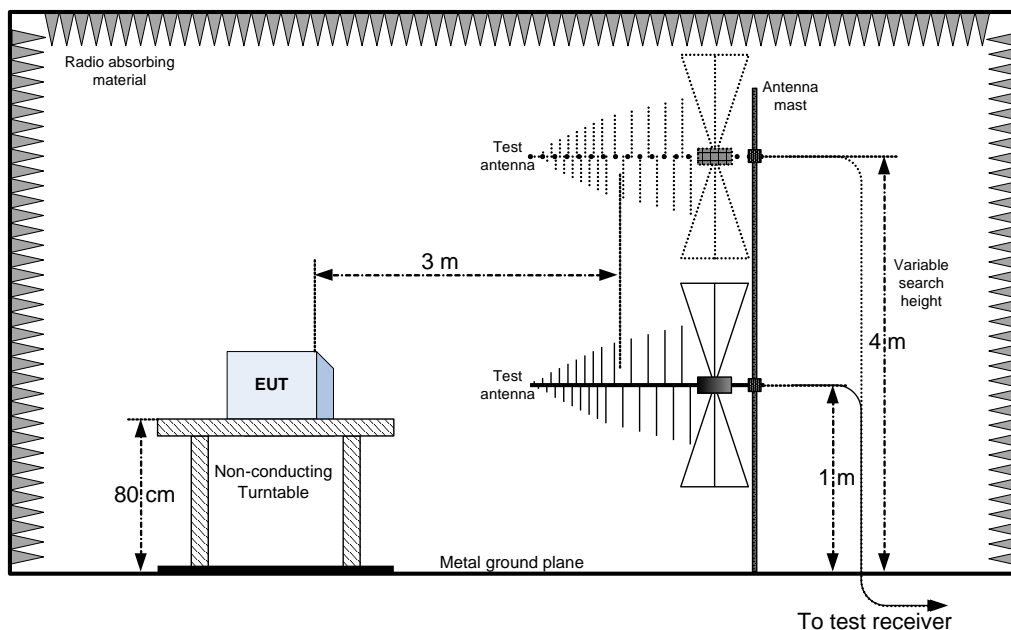

### Substitution method set-up

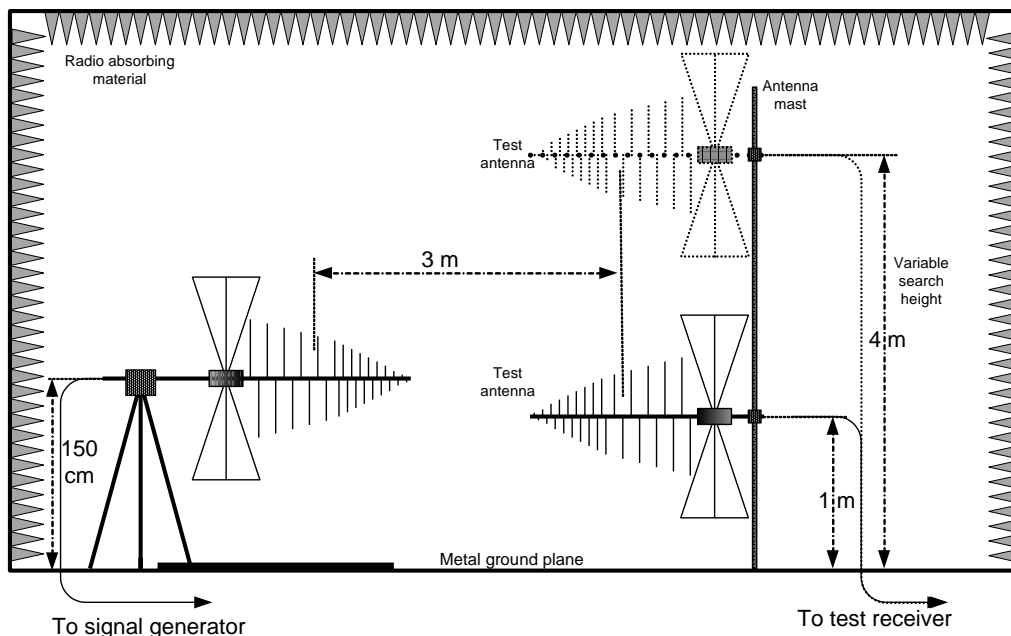

## Appendix C: EUT Photos

### Photo Set up


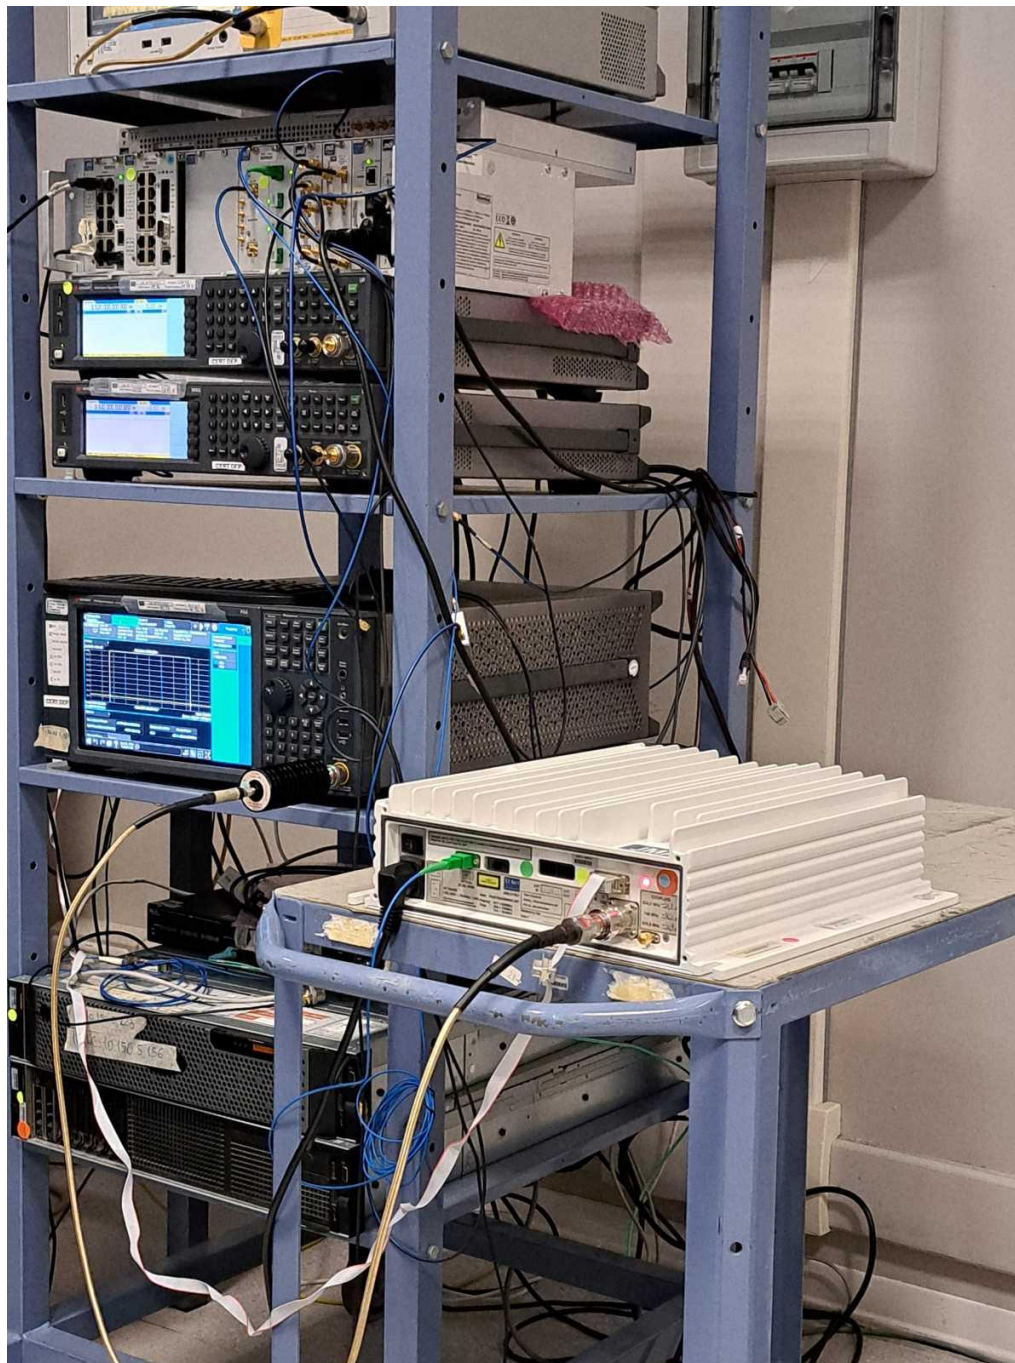




Photo EUT





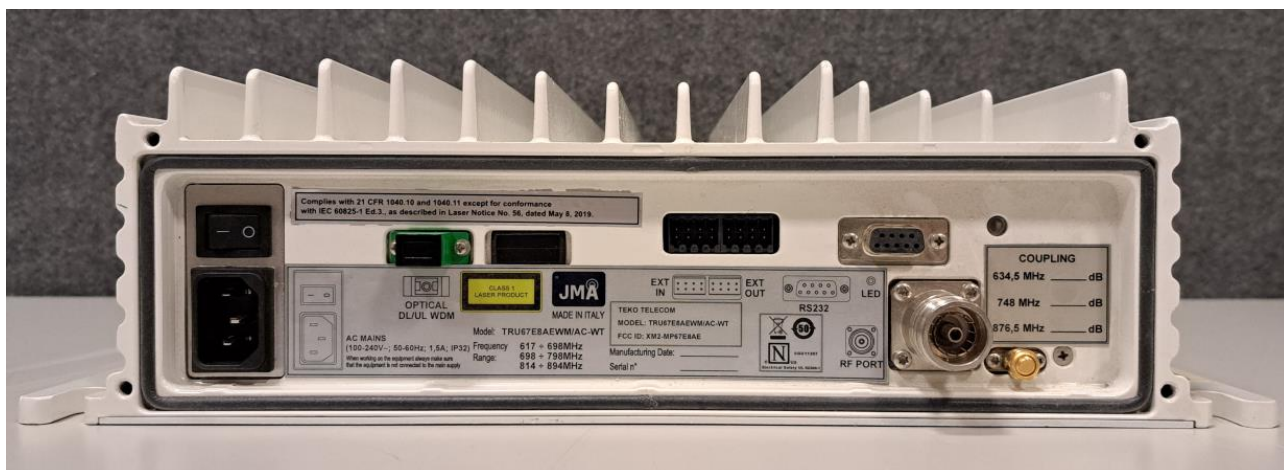

- END OF REPORT -