



Product Service

---

**Choose certainty.  
Add value.**

# Report On

Specific Absorption Rate Testing of the  
Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD  
I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41)  
multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and  
GPS

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00235

Document 75933620 Report 17 Issue 1

May 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

Specific Absorption Rate Testing of the  
Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA  
(FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41)  
multi mode Smart phone with Bluetooth, WLAN,  
SRD(NFC,FeliCa) and GPS

Document 75933620 Report 17 Issue 1

May 2016

**PREPARED FOR**

Sharp Telecommunications of Europe Ltd  
Inspired  
Easthampstead Road  
Bracknell  
Berkshire  
RG12 1NS

**PREPARED BY**

**Nigel Grigsby**  
Senior Engineer

**APPROVED BY**

**Mark Jenkins**  
Authorised Signatory

**DATED**

17 May 2016





## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Product Technical Description ..... 6
1.4	Test Results Summary ..... 6
1.5	Product Information ..... 18
1.6	FCC Power Measurements ..... 22
<b>2</b>	<b>TEST DETAILS ..... 26</b>
2.1	SARA-C SAR Measurement System..... 27
2.2	GSM 850MHz Head SAR Test Results and Course Area Scans – 2D ..... 33
2.3	GSM 850MHz Head SAR Test Results and Course Area Scans – 2D ..... 37
2.4	GSM 850MHz Body SAR Test Results and Course Area Scans – 2D ..... 41
2.5	WCDMA FDDV Head SAR Test Results and Course Area Scans – 2D ..... 46
2.6	WCDMA FDDV Body SAR Test Results and Course Area Scans – 2D ..... 50
2.7	LTE Band 17 Head SAR Test Results and Course Area Scans – 2D ..... 55
2.8	LTE Band 17 Body SAR Test Results and Course Area Scans – 2D ..... 59
2.9	LTE Band 17 Head SAR Test Results and Course Area Scans – 2D ..... 64
2.10	LTE Band 17 Body SAR Test Results and Course Area Scans – 2D ..... 68
2.11	PCS 1900MHz Head SAR Test Results and Course Area Scans – 2D ..... 73
2.12	PCS 1900MHz Head SAR Test Results and Course Area Scans – 2D ..... 77
2.13	PCS 1900MHz Body SAR Test Results and Course Area Scans – 2D ..... 81
2.14	WLAN 2450MHz Head SAR Test Results and Course Area Scans – 2D ..... 85
2.15	WLAN 2450MHz Body SAR Test Results and Course Area Scans – 2D ..... 86
<b>3</b>	<b>TEST EQUIPMENT USED ..... 87</b>
3.1	Test Equipment Used ..... 88
3.2	Test Software..... 89
3.3	Dielectric Properties of Simulant Liquids ..... 90
3.4	Test Conditions..... 91
3.5	Measurement Uncertainty..... 92
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 94</b>
4.1	Accreditation, Disclaimers and Copyright..... 95
<b>ANNEX A</b>	<b>Probe Calibration Reports ..... A.2</b>
<b>ANNEX B</b>	<b>Dipole Calibration Reports..... B.2</b>



## **SECTION 1**

### **REPORT SUMMARY**

Specific Absorption Rate Testing of the  
Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM  
(850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN,  
SRD(NFC,FeliCa) and GPS





## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Specific Absorption Rate Testing of the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS to the requirements of KDB 447498 – D01 v06 General RF Exposure Guidance.

Objective	To perform Specific Absorption Rate Testing to determine the Equipment Under Test's (EUT's) compliance with the requirements specified of KDB 447498 – D01 v05 General RF Exposure Guidance, for the series of tests carried out.
Applicant	Sharp Telecommunications of Europe Ltd
Manufacturer	Sharp Corporation
Manufacturing Description	Mobile Handset
Serial/IMEI Number(s)	004401115744407 (SAR Test: GSM) 004401115744464 (SAR Test: GSM/WCDMA/LTE) 004401115744068 (SAR Test: WLAN) 004401115744472 (Conducted: GSM) 004401115743821 (Conducted: WCDMA) 004401115744563 (Conducted: LTE) 004401115743805 (Conducted: Bluetooth) 004401115744522 (Conducted: WLAN)
Number of Samples Tested	3
Hardware Version	PP1
Software Version	A3110 - GSM/WCDMA/LTE/WLAN
Battery Cell Manufacturer	Sharp Corporation
Battery Model Number	Integral
Test Specification/Issue/Date	KDB 447498 – D01 v06 General RF Exposure Guidance
Start of Test	21 April 2016
Finish of Test	28 April 2016
Related Document(s)	FCC 47CFR 2.1093: 2015 KDB 248227 – D01 v02r02 KDB 865664 – D01 v01r04 KDB 865664 – D02 v01r02 KDB 648474 – D04 v01r03 KDB 941225 – D01 v03r01 KDB 941225 – D06 v02r01 KDB 941225 – D05 v02r05 IEEE 1528-2013
Name of Engineer(s)	Nigel Grigsby Michael Mawby Peter Hill



Product Service

## 1.2 BRIEF SUMMARY OF RESULTS

The measurements shown in this report were made in accordance with the procedures specified KDB 447498 – D01 v06.

### The maximum 1g volume averaged SAR found during this Assessment

Max 1g SAR (W/kg) Head	0.52 (Measured)	0.69 (Scaled)
Max 1g SAR (W/kg) Body / Hotspot	0.51 (Measured)	0.68 (Scaled)
The maximum 1g volume averaged SAR level measured for all the tests performed did not exceed the limits for General Population/Uncontrolled Exposure (W/kg) Partial Body of 1.6 W/kg.		

### The maximum 1g volume averaged Stand-alone Reported SAR found during this Assessment for each supported mode, including highest simultaneous transmission results:

Band	Test Configuration	Max Reported Scaled SAR (W/kg)	Highest Simultaneous Transmission Scaled SAR (W/kg)
GSM/GPRS 850	Head	0.69	1.03
	Body/Hotspot	0.68	
WCDMA FDD V	Head	0.48	
	Body/Hotspot	0.46	
LTE Band 17	Head	0.13	
	Body/Hotspot	0.24	
PCS/GPRS 1900	Head	0.57	
	Body/Hotspot	0.61	
WLAN 2.4GHz	Head	0.35	
	Body/Hotspot	0.35	
The maximum 1g volume averaged SAR level measured for all the tests performed (including simultaneous transmission analysis results) did not exceed the limits for General Population/Uncontrolled Exposure (W/kg) Partial Body of 1.6 W/kg.			



### 1.3 PRODUCT TECHNICAL DESCRIPTION

Refer to Model Description APYHRO00235 Rev 4.0 document.

### 1.4 TEST RESULTS SUMMARY

#### 1.4.1 System Performance / Validation Check Results

Prior to formal testing being performed a System Check was performed in accordance with KDB 865664 and the results were compared against published data in Standard IEEE 1528-2003. The following results were obtained: -

##### System performance / Validation results

Date	Dipole Used	Frequency (MHz)	Max 1g SAR (W/kg)*	Percentage Drift on Reference
21/04/2016	835	835	10.76	2.54%
26/04/2016	835	835	9.70	2.02%
25/04/2016	1900	1900	37.74	-0.49%
27/04/2016	1900	1900	40.13	0.26%
25/04/2016	700	700	8.53	8.82%
27/04/2016	700	700	7.68	2.47%
24/04/2016	2450	2450	53.89	5.00%
28/04/2016	2450	2450	50.62	-7.50%

\*Normalised to a forward power of 1W



### 1.4.2 Results Summary Tables

GSM 850MHz Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	189	836.4	32.14	33.4	0.35	0.47	Figure 6
Left 15°	189	836.4	32.14	33.4	0.24	0.32	Figure 7
Right Cheek	189	836.4	32.14	33.4	0.42	0.56	Figure 8
Right 15°	189	836.4	32.14	33.4	0.25	0.33	Figure 9
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$							

GSM 850MHz GPRS Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	189	836.4	27.48	28.7	0.46	0.61	Figure 10
Left 15°	189	836.4	27.48	28.7	0.31	0.41	Figure 11
Right Cheek	189	836.4	27.48	28.7	0.52	<b>0.69</b>	Figure 12
Right 15°	189	836.4	27.48	28.7	0.28	0.37	Figure 13
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ The time slot configuration with the highest source-based time-averaged maximum output power was used for testing, this was 4x time slots.							



GSM 850MHz GPRS Body & Hotspot Configuration Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Spacing	Position							
10mm	Front Face	189	836.4	27.48	28.7	0.43	0.57	Figure 14
10mm	Rear Face	189	836.4	27.48	28.7	0.51	<b>0.68</b>	Figure 15
10mm	Left Edge	189	836.4	27.48	28.7	0.41	0.54	Figure 16
10mm	Right Edge	189	836.4	27.48	28.7	0.50	0.66	Figure 17
10mm	Bottom Edge	189	836.4	27.48	28.7	0.08	0.11	Figure 18
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06 The time slot configuration with the highest source-based time-averaged maximum output power was used for testing, this was 4x time slots.								

WCDMA FDDV Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	4175	835	22.98	24.2	0.34	0.45	Figure 19
Left 15°	4175	835	22.98	24.2	0.20	0.26	Figure 20
Right Cheek	4175	835	22.98	24.2	0.36	0.48	Figure 21
Right 15°	4175	835	22.98	24.2	0.21	0.28	Figure 22
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ KDB 941225 D01 – Testing of the secondary mode was not required - When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2\text{ W/kg}$ , SAR measurement is not required for the secondary mode.							



WCDMA FDDV Body & Hotspot Configuration Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Spacing	Position							
10mm	Front Face	4175	835	22.98	24.2	0.31	0.41	Figure 23
10mm	Rear Face	4175	835	22.98	24.2	0.35	0.46	Figure 24
10mm	Left Edge	4175	835	22.98	24.2	0.27	0.36	Figure 25
10mm	Right Edge	4175	835	22.98	24.2	0.34	0.45	Figure 26
10mm	Bottom Edge	4175	835	22.98	24.2	0.07	0.09	Figure 27
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06 KDB 941225 D01 – Testing of the secondary mode was not required - When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2\text{ W/kg}$ , SAR measurement is not required for the secondary mode.								

LTE Band 17 Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

10MHz Bandwidth, 1 Resource Blocks, Low Offset.

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	23780	709.0	23.33	24.2	0.11	0.13	Figure 28
Left 15°	23780	709.0	23.33	24.2	0.07	0.09	Figure 29
Right Cheek	23780	709.0	23.33	24.2	0.10	0.12	Figure 30
Right 15°	23780	709.0	23.33	24.2	0.06	0.07	Figure 31
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$							



LTE Band 17 Body & Hotspot Configuration Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

10MHz Bandwidth, 1 Resource Blocks, Low Offset.

Position		Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Spacing	Position							
10mm	Front Facing	23780	709.0	23.33	24.2	0.13	0.16	Figure 32
10mm	Rear Facing	23780	709.0	23.33	24.2	0.20	0.24	Figure 33
10mm	Left Edge	23780	709.0	23.33	24.2	0.10	0.12	Figure 34
10mm	Right Edge	23780	709.0	23.33	24.2	0.09	0.11	Figure 35
10mm	Bottom Edge	23780	709.0	23.33	24.2	0.02	0.02	Figure 36
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06 KDB 941225 D05 - Largest channel bandwidth standalone SAR test requirements – 4.2.2. The requirements to test other resource block allocations and higher order modulations were not met.								

LTE Band 17 Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

10MHz Bandwidth, 25 Resource Blocks, Mid Offset.

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	23800	711.0	22.25	23.2	0.10	0.12	Figure 37
Left 15°	23800	711.0	22.25	23.2	0.06	0.07	Figure 38
Right Cheek	23800	711.0	22.25	23.2	0.09	0.11	Figure 39
Right 15°	23800	711.0	22.25	23.2	0.05	0.06	Figure 40
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$							





LTE Band 17 Body & Hotspot Configuration Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

10MHz Bandwidth, 25 Resource Blocks, Mid Offset.

Position		Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Spacing	Position							
10mm	Front Facing	23800	711.0	22.25	23.2	0.11	0.13	Figure 41
10mm	Rear Facing	23800	711.0	22.25	23.2	0.18	0.21	Figure 42
10mm	Left Edge	23800	711.0	22.25	23.2	0.09	0.11	Figure 43
10mm	Right Edge	23800	711.0	22.25	23.2	0.08	0.09	Figure 44
10mm	Bottom Edge	23800	711.0	22.25	23.2	0.01	0.01	Figure 45
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06 KDB 941225 D05 - Largest channel bandwidth standalone SAR test requirements – 4.2.2. The requirements to test other resource block allocations and higher order modulations were not met.								

PCS 1900MHz Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	810	1909.8	29.24	30.4	0.19	0.25	Figure 46
Left 15°	810	1909.8	29.24	30.4	0.13	0.17	Figure 47
Right Cheek	810	1909.8	29.24	30.4	0.36	0.47	Figure 48
Right 15°	810	1909.8	29.24	30.4	0.13	0.17	Figure 49
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$							





PCS 1900MHz GPRS Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	810	1909.8	24.62	25.2	0.26	0.30	Figure 50
Left 15°	810	1909.8	24.62	25.2	0.15	0.17	Figure 51
Right Cheek	810	1909.8	24.62	25.2	0.50	0.57	Figure 52
Right 15°	810	1909.8	24.62	25.2	0.18	0.21	Figure 53
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ The time slot configuration with the highest source-based time-averaged maximum output power was used for testing, this was 4x time slots.							

PCS 1900MHz GPRS Body & Hotspot Configuration Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Area scan (Figure number)
Spacing	Position							
10mm	Front Facing	810	1909.8	24.62	25.2	0.53	0.61	Figure 54
10mm	Rear Facing	810	1909.8	24.62	25.2	0.49	0.56	Figure 55
10mm	Left Edge	810	1909.8	24.62	25.2	0.37	0.42	Figure 56
10mm	Bottom Edge	810	1909.8	24.62	25.2	0.19	0.22	Figure 57
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06 The time slot configuration with the highest source-based time-averaged maximum output power was used for testing, this was 4x time slots.								



Product Service

WLAN 2462MHz Head Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

802.11b, 1 Mbps, DSSS

Test Position	Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Scaled Duty Cycle 1g SAR (W/kg)	Area scan (Figure number)
Left Cheek	11	2462.0	15.73	16.5	0.29	0.35	0.35	Figure 58
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ KDB248227 D01 v02 - Testing was not required for OFDM as per Section 5.2.2 KDB248227 D01 v02 - Only one position was tested as per Section 5.1.1 KDB248227 D01 v02 - A duty factor scaling was applied to the scaled SAR as per section 2.2								

WLAN 2462MHz Body & Hotspot Configuration Specific Absorption Rate (Maximum SAR) 1g Results for the Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS.

802.11b, 1 Mbps, DSSS

Position		Channel Number	Frequency (MHz)	Measured Conducted Power (dBm)	Tune Up limit (dBm)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Scaled Duty Cycle 1g SAR (W/kg)	Area scan (Figure number)
Spacing	Position								
10mm	Rear Facing	11	2462.0	15.73	16.5	0.29	0.35	0.35	Figure 59
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) KDB 447498 D01 - Testing of other required channels within the operation mode of a frequency band is not required when the reported 1g SAR for mid-band or highest output power channel is: $\leq 0.8\text{W/kg}$ when the transmission band is $\leq 100\text{MHz}$ $\leq 0.6\text{W/kg}$ when the transmission band is between 100MHz and 200MHz $\leq 0.4\text{W/kg}$ when the transmission band is $\geq 200\text{MHz}$ Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06 KDB248227 D01 v02 - Testing was not required for OFDM as per Section 5.2.2 KDB248227 D01 v02 - Only one position was tested as per Section 5.1.1 KDB248227 D01 v02 - A duty factor scaling was applied to the scaled SAR as per section 2.2									



### 1.4.3 Simultaneous Transmission

Position	GPRS 850MHz 1g SAR (W/kg) CH 189 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Head			
Left Cheek	0.61	0.35	0.96
Left 15°	0.41	-	
Right Cheek	0.69	-	
Right 15°	0.37	-	
Simultaneous Transmission KDB 447498 D01			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.

Position	GPRS 850MHz 1g SAR (W/kg) CH 189 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Body			
Front Facing	0.57	-	
Rear Facing	0.68	0.35	<b>1.03</b>
Left Edge	0.54	-	
Right Edge	0.66	-	
Top Edge	-	-	
Bottom Edge	0.11	-	
Simultaneous Transmission KDB 447498 D01 Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.

Position	WCDMA FDDV 1g SAR (W/kg) CH 4175 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Head			
Left Cheek	0.45	0.35	0.80
Left 15°	0.26	-	
Right Cheek	0.48	-	
Right 15°	0.28	-	
Simultaneous Transmission KDB 447498 D01			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.



Position	WCDMA FDDV 1g SAR (W/kg) CH 4175 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Body			
Front Facing	0.41	-	
Rear Facing	0.46	0.35	0.81
Left Edge	0.36	-	
Right Edge	0.45	-	
Top Edge	-	-	
Bottom Edge	0.09	-	
Simultaneous Transmission KDB 447498 D01 Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.

Position	LTE Band 17, 1RB 1g SAR (W/kg) CH 23780 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Head			
Left Cheek	0.13	0.35	0.48
Left 15°	0.09	-	
Right Cheek	0.12	-	
Right 15°	0.07	-	
Simultaneous Transmission KDB 447498 D01			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.

Position	LTE Band 17, 1RB 1g SAR (W/kg) CH 23780 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Body			
Front Facing	0.16	-	
Rear Facing	0.24	0.35	0.59
Left Edge	0.12	-	
Right Edge	0.11	-	
Top Edge	-	-	
Bottom Edge	0.02	-	
Simultaneous Transmission KDB 447498 D01 Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.



Product Service

Position	GPRS 1900 1g SAR (W/kg) CH 810 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Head			
Left Cheek	0.30	0.35	0.65
Left 15°	0.17	-	
Right Cheek	0.57	-	
Right 15°	0.21	-	
Simultaneous Transmission KDB 447498 D01			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.

Position	GPRS 1900 1g SAR (W/kg) CH 810 (Scaled SAR values)	WLAN 2.4GHz 1g SAR (W/kg) CH 11 (Scaled SAR values)	$\Sigma$ 1g SAR (W/kg)
Body			
Front Facing	0.61	-	
Rear Facing	0.56	0.35	0.91
Left Edge	0.42	-	
Right Edge	-	-	
Top Edge	-	-	
Bottom Edge	0.22	-	
Simultaneous Transmission KDB 447498 D01 Testing was carried out with a 10mm separation distance to meet the requirements of KDB 941225 D06			

Simultaneous SAR measurements were not required as the sum of the 1g SAR measurements did not exceed 1.6 W/kg.

#### 1.4.4 Standalone SAR Estimation

When the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion. The estimated SAR is only used to determine simultaneous transmission SAR test exclusion. When SAR is estimated, it must be applied to determine the sum of 1-g SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas (see KDB 690783).

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / 7.5]$  W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR

when the minimum test separation distance is  $< 5$ mm, a distance of 5mm is applied.



Product Service

## Bluetooth Head SAR Estimation

Frequency (MHz)	Maximum Power (mW)	Distance (mm)	Estimated SAR (W/kg)
2450.0	5.01	5	0.209

## Bluetooth Body SAR Estimation

Frequency (MHz)	Maximum Power (mW)	Distance (mm)	Estimated SAR (W/kg)
2450.0	5.01	10	0.105



## **1.5 PRODUCT INFORMATION**

### **1.5.1 Technical Description**

The equipment under test (EUT) was a Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

### **1.5.2 Test Configuration and Modes of Operation**

The testing was performed with an integral battery manufactured by Sharp Corporation.

For head SAR assessment, testing was performed with the device in the declared normal position of operation for GSM 850MHz, PCS 1900MHz, WCDMA FDDV, LTE Band 17 and WLAN 2.4GHz frequency bands at maximum power. The device was placed against a Specific Anthropomorphic Mannequin (SAM) phantom. The phantom was filled with simulant liquid appropriate to the frequency band. The dielectric properties were measured and found to be in accordance with the requirements for the dielectric properties specified in KDB 865665. Testing was performed at both the left and right ear of the phantom at both handset positions stated in the applied specification.

For body SAR assessment, testing was performed for GSM 850MHz, PCS 1900MHz, WCDMA FDDV, LTE Band 17 and WLAN 2.4GHz frequency bands at maximum power. The device was placed at a distance of 10 mm from the bottom of the flat phantom for all body testing. The Flat Phantom dimensions were 245mm x 195mm x 200mm with a sidewall thickness of 2.00mm. The phantom was filled to a minimum depth of 150mm with the appropriate Body simulant liquid. The dielectric properties were in accordance with the requirements specified in KDB 865665. As the device is capable of hotspot configuration a 10mm separation distance was used to meet the requirements of KDB 941225 D06 Hotspot.

Testing was performed in each position at the frequency that gave the highest output power for each band. For all bands all scaled SAR levels were found to be <0.80 W/kg (KDB 447498 D01) therefore no additional testing was required at the relevant frequencies / channels of the bands. WLAN testing was achieved using the devices internal software, customer supplied software and settings supplied by the customer. The worst case data rate for WLAN testing was determined as per KDB 248227 D01 v02r02 clause 4(b). For 2.4GHz WLAN this was 802.11b 1Mbps. Testing was not required for OFDM transmission configurations as the requirements of KDB 248227 D01v02r02 Section 5.2.2 were met.

Included in this report are descriptions of the test method; the equipment used and an analysis of the test uncertainties applicable and diagrams indicating the locations of maximum SAR for each test position along with photographs indicating the positioning of the handset against the body as appropriate.



## VoLTE Power Measurements

### VoLTE Comparison Measurements

Measurements were made on the worst case channel and resource block configurations to demonstrate that VoLTE carrier power levels were not more than 0.25 dB higher than the RMC configuration.

#### Band 17 – 5 MHz – QPSK

Resource Block Allocation	Resource Block Offset	Channel (MHz)	Carrier Power (dBm)		
			RMC	VoLTE	Difference (dB)
1	Mid	706.5	23.22	23.11	-0.11
12	Low	713.5	22.23	22.23	0
25	-	713.5	22.22	22.22	0

#### Band 17 – 5 MHz – 16QAM

Resource Block Allocation	Resource Block Offset	Channel (MHz)	Carrier Power (dBm)		
			RMC	VoLTE	Difference (dB)
1	Low	713.5	22.12	22.11	-0.01
12	Mid	710.0	21.12	21.11	-0.01
25	-	710.0	21.32	21.19	-0.13

#### Band 17 – 10 MHz – QPSK

Resource Block Allocation	Resource Block Offset	Channel (MHz)	Carrier Power (dBm)		
			RMC	VoLTE	Difference (dB)
1	Low	709.0	23.07	23.04	-0.03
25	Mid	711.0	22.29	22.19	-0.10
50	-	710.0	22.29	22.20	-0.09



Band 17 – 10 MHz – 16QAM

Resource Block Allocation	Resource Block Offset	Channel (MHz)	Carrier Power (dBm)		
			RMC	VoLTE	Difference (dB)
1	High	709.0	22.32	22.26	-0.06
25	Low	709.0	22.31	22.27	-0.04
50	-	711.0	21.22	21.17	-0.05

Temperature: 19.4 °C Humidity: 49.5 %

VoLTE Configuration – AMR 12.2kbps

The following VoLTE configurations were tested to demonstrate that the EUT output power did not vary by more than 0.25 dB across all supported VoLTE codecs.

AMR

Rate	kbit/s	Octet Aligned	Bandwidth Efficient
		Carrier Power (dBm)	
0	4.75	23.15	23.16
1	5.15	23.16	23.12
2	5.90	23.17	23.16
3	6.70	23.15	23.18
4	7.40	23.14	23.14
5	7.95	23.15	23.13
6	10.20	23.16	23.14
7	12.20	23.16	23.15

AMR-WB

Rate	kbit/s	Octet Aligned	Bandwidth Efficient
		Carrier Power (dBm)	
0	6.60	23.14	23.18
1	8.85	23.18	23.16
2	12.85	23.16	23.19
3	14.25	23.14	23.19
4	15.85	23.18	23.16
5	18.25	23.19	23.17
6	19.85	23.17	23.20
7	23.05	23.19	23.22
8	23.85	23.20	23.19



Product Service

EVS Primary

		Carrier Power (dBm)
DTX	Not Present	23.20
	Enable	23.20
	Disable	23.20

EVS-AMR-WB-IO

Rate	kbit/s	Power (dBm)
0	6.60	23.18
1	8.85	23.20
2	12.85	23.19
3	14.25	23.18
4	15.85	23.20
5	18.25	23.21
6	19.85	23.20
7	23.05	23.20
8	23.85	23.19



## 1.6 FCC POWER MEASUREMENTS

### 1.6.1 Method

Conducted power measurements were made using a power meter.

### 1.6.2 Conducted Power Measurements

#### GSM 850

Modulation	Frequency (MHz)	Conducted Carrier Power (dBm)
		Average
GMSK - Voice	824.20	22.81
	836.40	22.83
	848.80	22.61
GMSK - GPRS	824.20	23.94
	836.40	23.98
	848.80	23.85

#### PCS 1900

Modulation	Frequency (MHz)	Conducted Carrier Power (dBm)
		Average
GMSK - Voice	1850.20	19.82
	1880.00	19.77
	1909.80	19.85
GMSK - GPRS	1850.20	21.18
	1880.00	21.13
	1909.80	21.25

**WCDMA FDD V**

Modulation	Frequency (MHz)	Conducted Carrier Power (dBm)
		Average
WCDMA - 12.2kbps RMC	826.4	23.09
	835.0	23.09
	846.6	23.08
WCDMA - 12.2kbps AMR with 3.4kbps SRB*	826.4	22.97
	835.0	23.03
	846.6	22.95
WCDMA - HSDPA (Subtest #1)	826.4	21.94
	835.0	21.95
	846.6	22.00
WCDMA - HSDPA (Subtest #2)	826.4	21.64
	835.0	21.68
	846.6	21.66
WCDMA - HSDPA (Subtest #3)	826.4	21.07
	835.0	21.10
	846.6	21.08
WCDMA - HSDPA (Subtest #4)	826.4	21.13
	835.0	21.11
	846.6	21.07
WCDMA - HSUPA (Subtest #1)	826.4	21.94
	835.0	21.99
	846.6	21.94
WCDMA - HSUPA (Subtest #2)	826.4	21.52
	835.0	21.55
	846.6	21.47
WCDMA - 12.2kbps RMC WCDMA - HSUPA (Subtest #3)	826.4	22.01
	835.0	22.01
	846.6	21.98
WCDMA - HSUPA (Subtest #4)	826.4	21.90
	835.0	22.02
	846.6	21.99
WCDMA - HSUPA (Subtest #5)	826.4	21.98
	835.0	22.00
	846.6	22.05
* The measured Conducted power for 12.2kbps AMR is <0.25dB higher than 12.2kbps RMC, therefore, testing was carried out using 12.2kbps RMC.		

**WLAN**

Modulation	Frequency (MHz)	Conducted Carrier Power (dBm)
		Average Port 0
802.11(b) - 2.4 GHz – 1Mbps	2412	15.40
	2437	15.25
	2462	15.73
802.11(g) - 2.4 GHz - 6Mbps	2412	11.02
	2437	11.00
	2462	11.27
802.11 (n) - 2.4 GHz – 6.5Mbps	2412	11.06
	2437	11.04
	2462	11.31

**LTE Band 17**

Channel Bandwidth (MHz)	Modulation	Resource Block Allocation	Resource Block Offset	Measured Average Output Power (dBm)		
				Low Test Channel (709.0MHz)	Middle Test Channel (710.0 MHz)	High Test Channel (711.0 MHz)
10	QPSK	1	Low	23.33	22.86	22.96
		1	Mid	23.07	23.07	22.80
		1	High	23.05	23.10	23.13
		25	Low	22.16	22.10	22.21
		25	Mid	22.16	22.07	22.25
		25	High	21.96	22.00	22.20
		50	N/A	22.14	22.16	21.96
	16 QAM	1	Low	21.83	21.53	21.88
		1	Mid	22.20	21.75	22.11
		1	High	22.32	21.25	22.03
		25	Low	21.21	20.97	21.15
		25	Mid	20.93	21.04	20.93
		25	High	21.08	20.96	21.09
		50	N/A	21.07	20.83	20.91



### Bluetooth

Modulation	Frequency (MHz)	Conducted Carrier Power (dBm)
		Average
GFSK/DH5	2402	5.25
	2441	4.60
	2480	4.27

### 1.6.3 Standalone SAR Test Exclusion Considerations (KDB 447498 D01)

The 1g SAR Test exclusion thresholds for 100 MHz to 6 GHz *test separation distances*  $\leq 50$  mm are determined by:

$$\left[ \frac{(\text{max power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \sqrt{f \text{ (GHz)}} \leq 3.0, \text{ where}$$

- $f \text{ (GHz)}$  is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison.
- When the maximum test separation distance is  $< 5$  mm, a distance of 5 mm is applied.

Band	Frequency (MHz)	Max Power		Test Position	Distance (mm)	Threshold	Test Exclusion
		(dBm)	(mW)				
GSM 850MHz	836.4	33.4	2187.76	Head	$< 5$	400.2	No
GPRS 850MHz	836.4	28.7	741.31	Head	$< 5$	135.6	No
				Body	10	67.8	No
WCDMA FDD V	835.0	24.2	263.03	Head	$< 5$	48.1	No
				Body	10	24.0	No
LTE Band 17	709.0	24.2	263.03	Head	$< 5$	44.3	No
				Body	10	22.1	No
GSM 1900MHz	1909.8	30.4	1096.48	Head	$< 5$	303.1	No
GPRS 1900MHz	1909.8	25.2	331.13	Head	$< 5$	91.5	No
				Body	10	45.8	No
WLAN 2.4 GHz	2462.0	16.5	44.67	Head	$< 5$	14.0	No
				Body	10	7.0	No
Bluetooth	2450	7	5.01	Head	$< 5$	1.6	Yes
				Body	10	0.8	Yes



Product Service

## **SECTION 2**

### **TEST DETAILS**


Specific Absorption Rate Testing of the  
Sharp Quad-band LTE ( B1/ B3/ B17/ B26 ), Dual-band WCDMA (FDD I / V) , Quad-band GSM  
(850/900/1800/1900) & WiMAX2+ ( TDD41) multi mode Smart phone with Bluetooth, WLAN,  
SRD(NFC,FeliCa) and GPS

## 2.1 SARA-C SAR MEASUREMENT SYSTEM

### 2.1.1 Robot System Specification

The SAR measurement system being used is the IndexSAR SARA-C system, which consists of a cartesian 6-axis robot jig, a dedicated robot controller, a straight IndexSAR probe, an L-shaped IndexSAR probe, a fast amplifier, and two phantoms: an upside-down SAM phantom, and a rectangular box phantom,

**Figure 1.** The L-probe is used in connection with measurements on DUTs held against the SAM phantom, while the straight probe is used exclusively in the box phantom. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain SAR readings from the DUT.

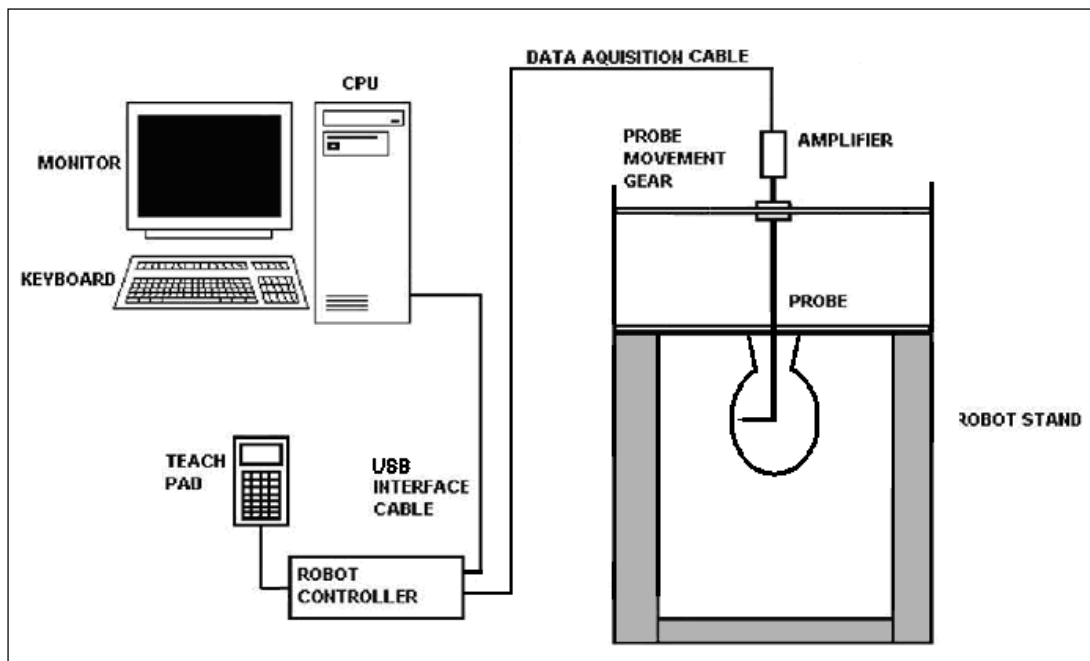

**Figure 1 Schematic diagram of the SARA-C measurement system showing the L-probe and upside-down SAM phantom**

The system is controlled remotely from a PC, which contains the software to drive the robot and data acquisition equipment. The software also displays the data obtained from test scans.

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time. The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.001mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell. Even with this accuracy, registration errors and deformation of the phantom when filled with 7 litres of fluid, can lead to probe placement errors of 1mm or more. For this reason, the L-probes house a 2-axis strain gauge unit, which allow the actual phantom wall position to be sensed to an accuracy of 0.3mm during probe movements.

In operation, the system first does an area (2D) scan within the liquid following the curve of the phantom wall at a fixed distance. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.





### 2.1.2 Probe and Amplifier Specification

#### IndexSAR isotropic immersible straight SAR probes

Straight probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip. The tips come in either 5mm (typically for use up to 3GHz) or 2.5mm (above 3GHz) versions, model types IXP-050 and IXP-025 respectively.

Straight probes are calibrated by NPL in the UK.

Straight probes are used exclusively in the box phantom, to measure SAR from DUTs placed against the phantom base. In SARA2, straight probes were also used in the SAM phantom, but this is forbidden in SARA-C, where L-probes are demanded. NB the reverse is not true: L-probes can be used in the box phantom.

#### IndexSAR L-probes

The L-shaped probe is so designed to ensure the probe tip can remain perpendicular to the SAM phantom wall during scans. To allow for greater probe articulation freedom, the SAM phantom head has been turned upside down and the probe is inserted through the throat aperture, rather than through a small hole at the top of the head in the old SARA2 SAR measurement system.

Like the straight probes, L-probes also come in the same two tip sizes: IXP-020 (5mm) and IXP-021 (2.5mm).

L-probes are calibrated to national standards in-house by IndexSAR.


L-probes can be used either in the SAM head, or against the side wall of the box phantom.



Product Service

### IFA-020 Fast Amplifier

A block diagram of the fast probe amplifier electronics is shown below.

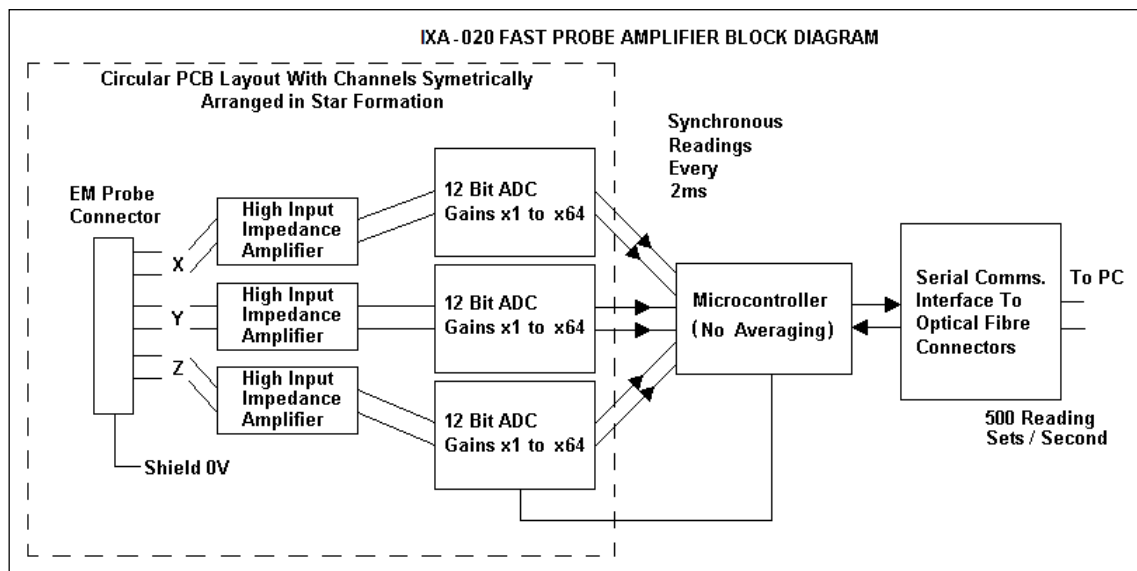

**Figure 2 Schematic diagram of the fast amplifier**

This amplifier has a time constant of approx.  $50\mu\text{s}$ , which is much faster than the SAR probe response time. The overall system time constant is therefore that of the probe ( $<1\text{ms}$ ) and a reading containing data for all three channels is returned to the PC every 2ms. The conversion period is approx.  $1\mu\text{s}$  at the start of each 2ms period. This enables the probe to follow pulse modulated signals of periods  $\gg 2\text{ms}$ . The PC software applies the linearisation procedure separately to each reading, so no linearisation corrections for the averaging of modulated signals are needed in this case.

The fast amplifier sampling rate can be adjusted via the SARA-C user interface from 1.7ms to 2.3ms. When not measuring CW signals, it is important to ensure that this probe reading rate and the modulated signal's pulse repetition rate are not unintentionally synchronised since this can lead to aliasing and a gross reduction in accuracy. For GSM signals, the default amplifier sampling rate of 2ms is entirely satisfactory, whereas changing it to 2.3ms (almost exactly half the GSM frame rate) could mean GSM bursts are always missed.

When aggregating 2ms samples to reduce the stochastic noise, it is equally important to match the number of samples with the longer-term timing structure of the modulation scheme. Taking GSM as an example again, since 120ms is the precise length of a GSM traffic channel multiframe, best practice would dictate that aggregated samples should cover exact multiples of this timescale. In this case, setting the number of samples to be aggregated to 120 (2 multiframe), or 240 samples (4 multiframe) should be ideal. Other signalling protocols would require changing these numbers as appropriate.

### Phantoms

The Flat phantom used is a rectangular Perspex Box IndexSAR item IXB-2HF, dimensions 240 x 190 x 195mm (w x d x h). The base and one side wall are made of FR4 material which has specific dielectric properties and a tightly-controlled thickness. The base is used in tandem with straight probes, measuring either a DUT or a validation dipole, while the side wall is for performing validations with the L-probe. It is also feasible to perform measurements on body-worn devices with the L-probe against the side window, but only if the L-probe is suitably calibrated (ie if the measurement standard demands body and head fluids have the same dielectric properties).

The Specific Anthropomorphic Mannequin (SAM) Upright Phantom is fabricated using moulds generated from the CAD files as specified by CENELEC EN 62209-1: 2006.

### **2.1.3 SAR Measurement Procedure**

Detailed measurement procedures for SARA-C are set out in a separate IndexSAR technical document ("SARA-C Operational Procedures").

A test set and dipole antenna control the handset via an air link and a low-mass phone holder can position the phone at either ear. Graduated scales are provided to set the phone in the 15 degree position. The upright phantom head holds approx. 7 litres of simulant liquid. The phantom is filled and emptied through the 110mm diameter penetration hole in the neck.

An area scan is performed inside the head at a fixed distance of 5mm from the curved surface on the source side. An algorithm presents the user with the location of any local hotspots and allows one to be selected for a follow-up 3D scan, looking at how the signal absorption varies with depth. A comparison between the start and end readings at a fixed distance from the DUT also enables the power drift during measurement to be assessed.

#### SARA-C Interpolation and Extrapolation schemes

SARA-C software contains support for both 2D cubic B-spline interpolation as well as 3D cubic B-spline interpolation. In addition, for extrapolation purposes, a proprietary curve-fitting routine is implemented as a weighted average of 3 different polynomial fits. The polynomial fitting procedures have been extensively tested by comparing the fitting coefficients generated by the SARA-C procedures with those obtained using the polynomial fit functions of Microsoft Excel when applied to the same test input data.

#### Interpolation of 2D area scan

The 2D cubic B-spline interpolation is used after the initial area scan at fixed distance from the phantom shell wall. The initial scan data are collected with approx. 115mm spatial resolution and spline interpolation is used to find the location of the local maximum to within a 1mm resolution for positioning the subsequent 3D scanning.

#### Extrapolation of 3D scan

For the 3D scan, data are collected on a spatially regular, but conformal, 3D grid having (by default) 6.4 mm steps in the lateral dimensions and 3.5 mm steps in the depth direction (away from the source). SARA-C enables full control over the selection of alternative step sizes in all directions.



Product Service

The overall accuracy of the 1g and 10g SAR volume average depends largely on the accuracy with which the probe can be re-positioned in the head. Although the digitised shape of the head is available to the SARA-C software, a better positioning solution is to use strain gauges attached to the L-probe to feel for the actual surface and to base all movements relative to this positive detection. An even more precise, but time-consuming, method is to place the probe tip in positive contact against the phantom wall, then step backwards 0.01mm at a time while monitoring the recorded SAR reading. At the exact moment that the probe detaches from contact, the SAR reading will suddenly fall.

After the data collection, the data are extrapolated up to the shell wall in the depth direction to assign values to points in the 3D array which cannot be measured in practice because of the finite size of the sensor tip. For automated measurements inside the head, the distance of the closest plane from the wall cannot be less than 2.7mm (for 5mm probes) and 1.39mm (for 2.5mm probes), this being the distance of the probe sensors behind the front edge of the probe tip.

#### Interpolation of 3D scan and volume averaging

The procedure used in SARA-C for defining the volumes used in SAR averaging follow the method of adapting the surface of the 'cube' to conform with the curved inner surface of the phantom (see Appendix C.2.2.1 in EN 62209-1: 2006). This is called, here, the conformal scheme.


For each row of data in the depth direction, the data are extrapolated to the phantom wall, and interpolated to less than 1mm spacing and average values are calculated from the phantom surface for the row of data over distances corresponding to the requisite depth for 10g and 1g cubes. This results in two 2D arrays of data, one for 1g and the other for 10g masses, which are then cubic B-spline interpolated to sub mm lateral resolution. A search routine then moves an averaging square around through the 2D array and records the maximum value of the corresponding 1g and 10g volume averages.

The default step size is 3.5mm, but this is under user-control. The compromise is with time of scan, so it is not practical to make it much smaller or scan times become long and power-drop influences become larger.

The robot positioning system specification for the repeatability of the positioning (**dss** in EN 62209-1: 2006) is +/- 0.04mm.

#### 2.1.4 Head Test Positions

This recommended practice specifies exactly two test positions for the handset against the head phantom, the “Cheek” position and the “tilted” position. The handset should be tested in both positions on the left and right sides of the SAM phantom. In each test position the centre of the earpiece of the device is placed directly at the entrance of the auditory canal. The angles mentioned in the test positions used are referenced to the line connecting both auditory canal openings. The plane this line is on is known as the reference plane. Testing is performed on the right and left-hand sides of the generic phantom head.

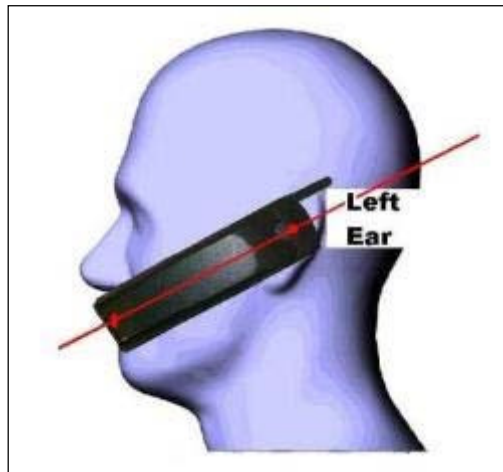


**Figure 3 Side view of mobile next to head showing alignment**

##### The Cheek Position


The Cheek Position is where the mobile is in the reference plane and the line between the mobile and the line connecting both auditory canal openings is reduced until any part of the mobile touches any part of the generic twin phantom head.

##### The 15° Position

The 15° Position is where the mobile is in the reference Cheek position and the phone is kept in contact with the auditory canal at the earpiece; the bottom of the phone is then tilted away from the phantom mouth by 15°.

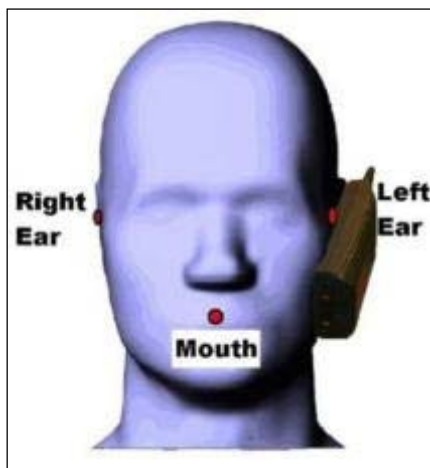

**Figure 4 Cheek position**

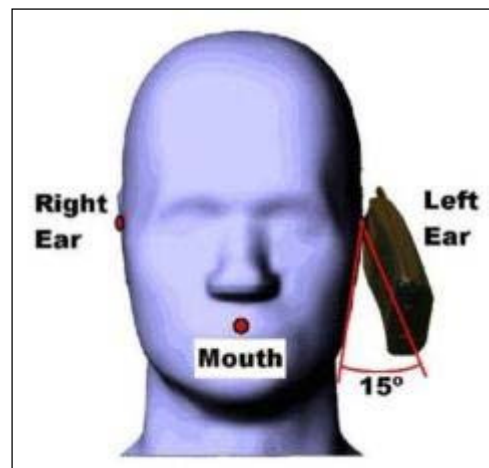

**Figure 5 15° Tilt Position**



## 2.2 GSM 850MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-09:34:19	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	58.60mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-116.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	19.378
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.350 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.376 W/kg
INPUT POWER LEVEL:	33.4dBm	SAR END:	0.377 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	0.300 %

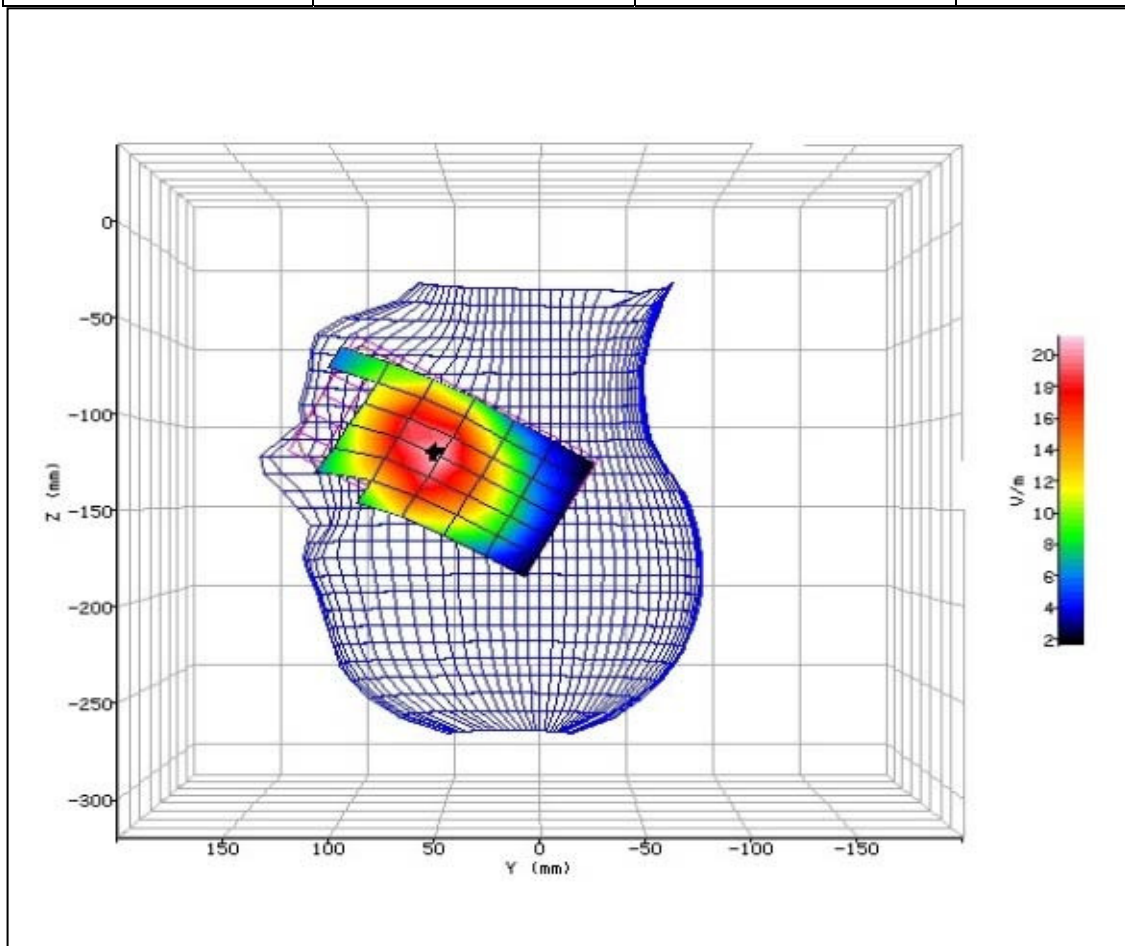


Figure 6: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-09:59:13	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	43.90mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-128.40mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	15.518
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.240 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.243 W/kg
INPUT POWER LEVEL:	33.4dBm	SAR END:	0.244 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	0.400 %

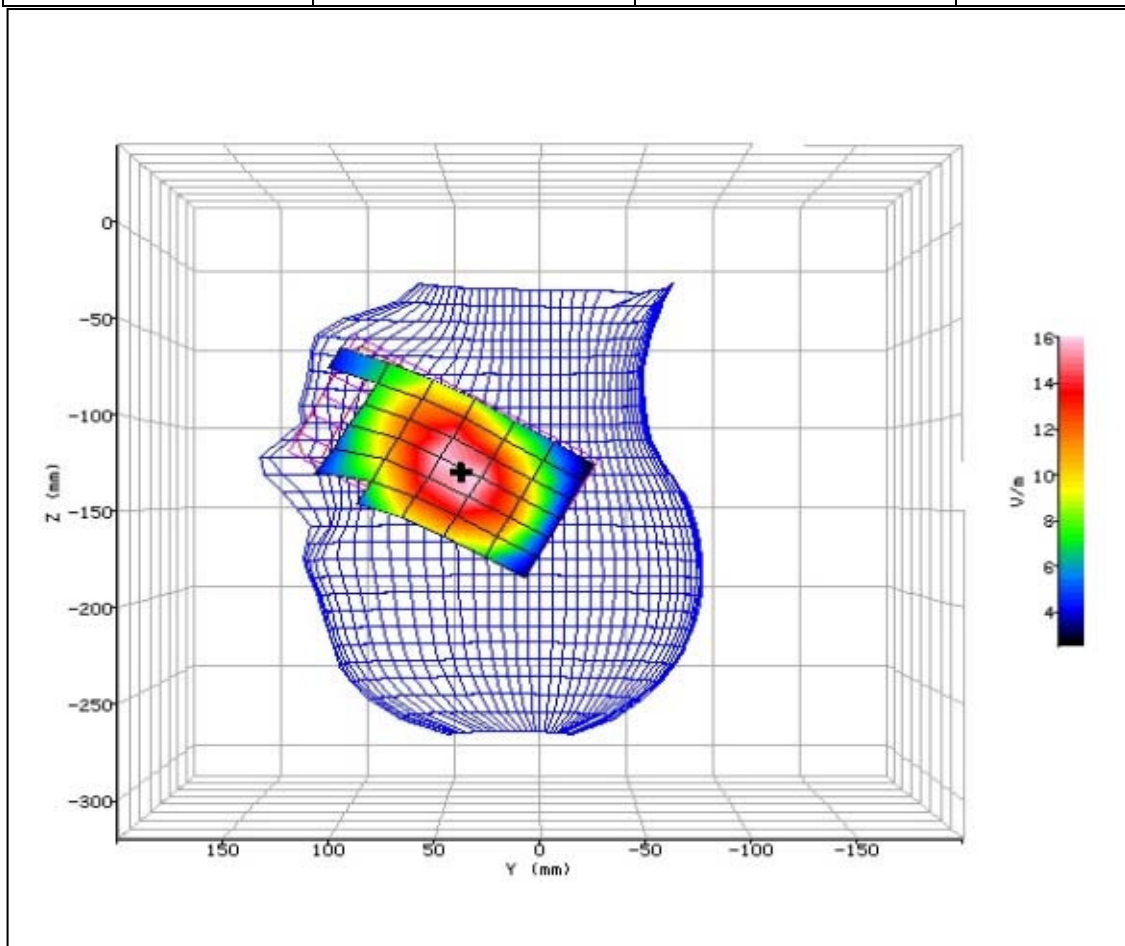


Figure 7: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-10:33:59	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	57.00mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-118.70mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	18.230
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.417 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.327 W/kg
INPUT POWER LEVEL:	33.4dBm	SAR END:	0.351 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	7.200 %

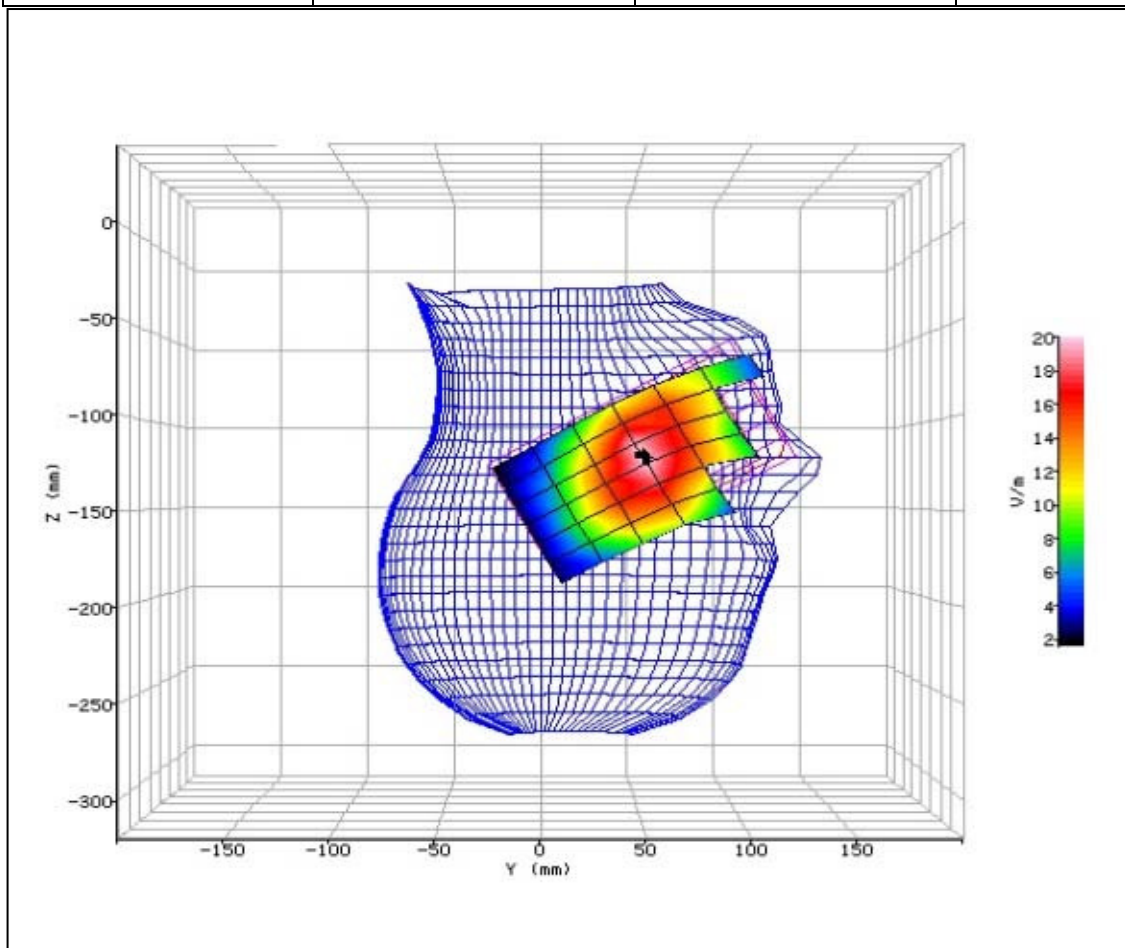


Figure 8: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-11:00:37	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	43.30mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-132.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	14.870
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.252 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.225 W/kg
INPUT POWER LEVEL:	33.4dBm	SAR END:	0.221 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	-1.600 %

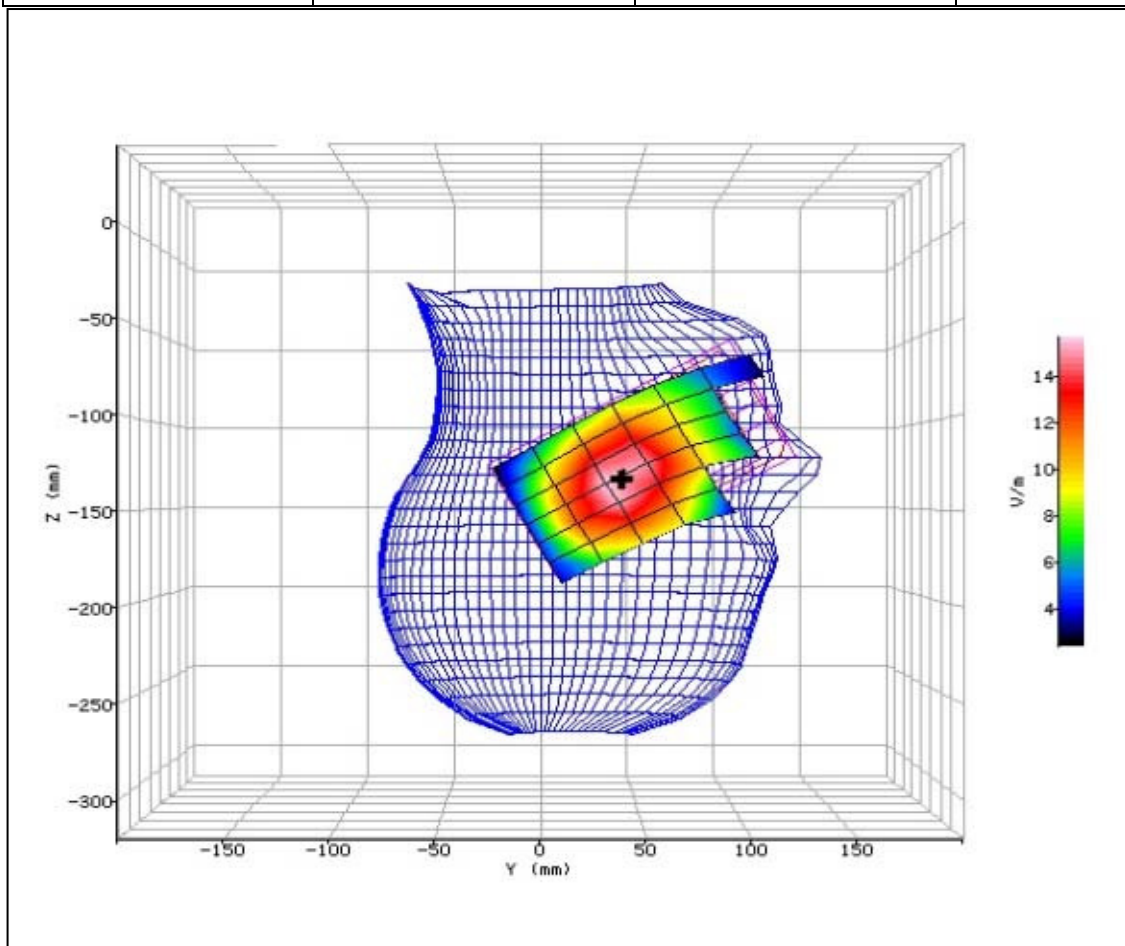


Figure 9: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.



## 2.3 GSM 850MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-11:51:09	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	58.80mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-111.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	21.955
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.458 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.486 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.490 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	0.800 %

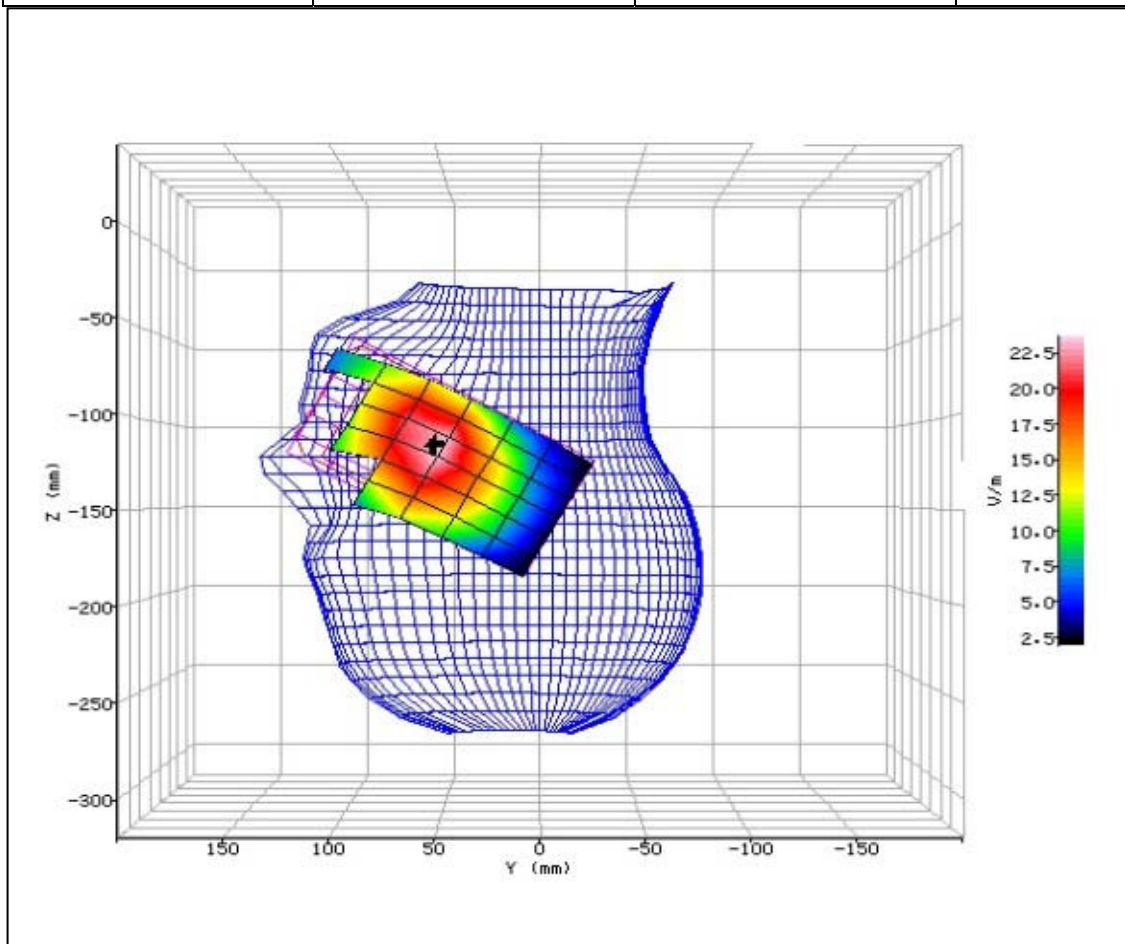


Figure 10: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-12:19:07	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	45.70mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-127.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	17.594
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.306 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.315 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.312 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	-0.700 %

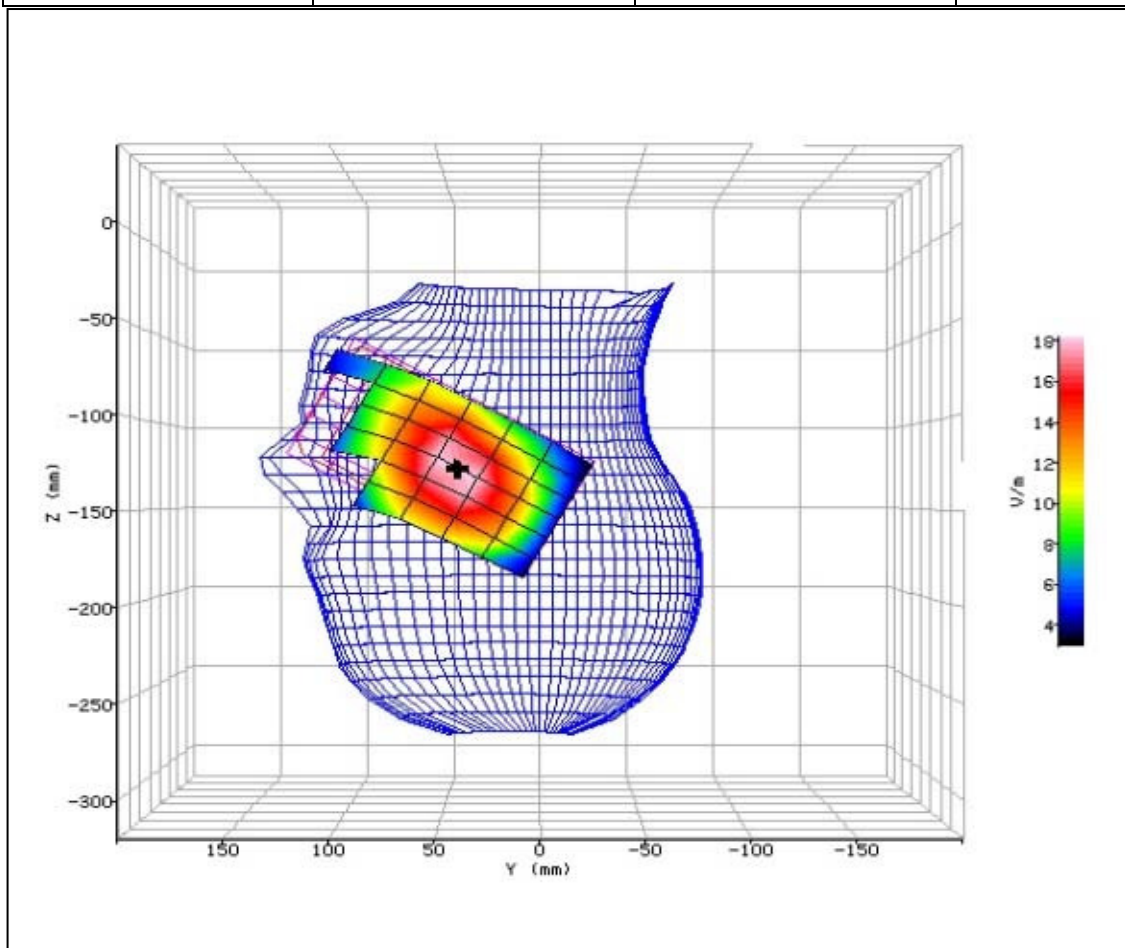


Figure 11: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-13:37:25	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	56.70mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-118.70mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	20.284
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.516 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.428 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.426 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	-0.300 %

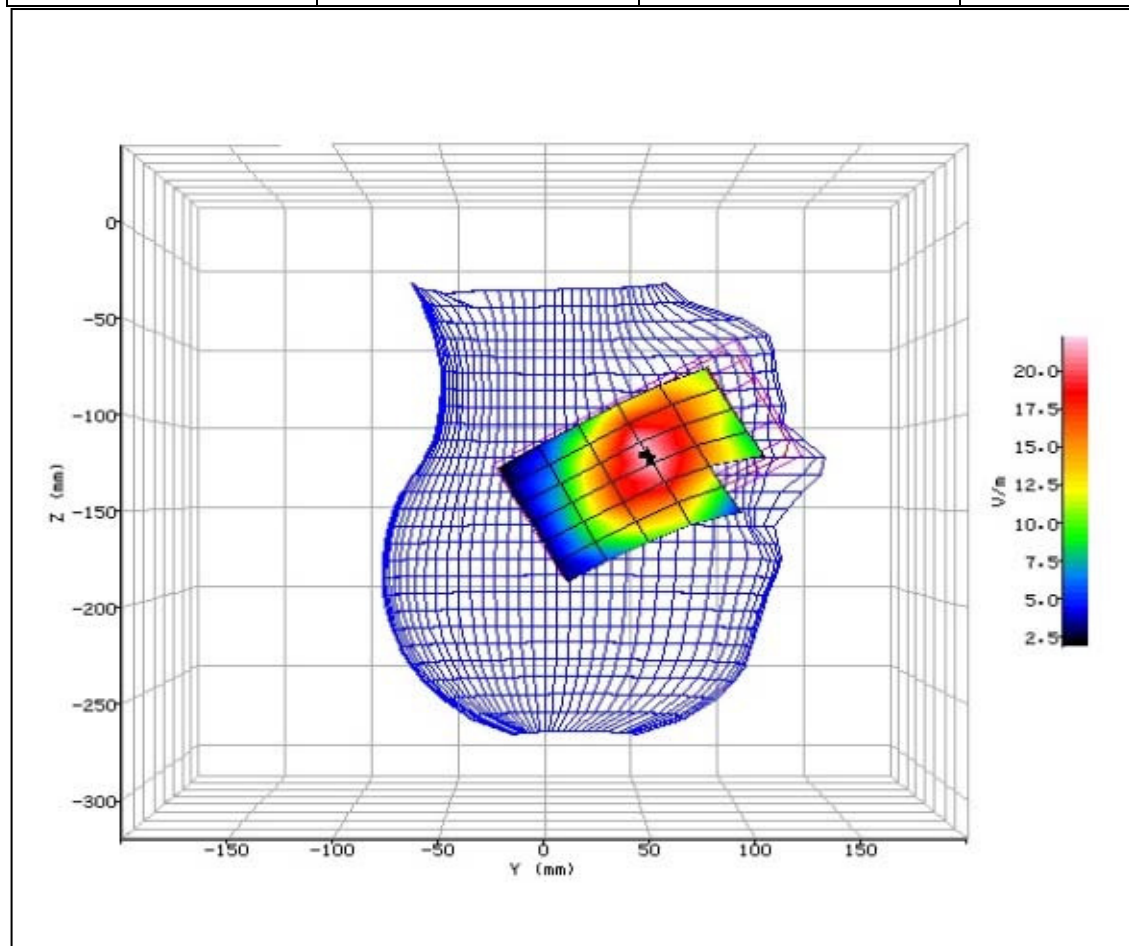


Figure 12: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-14:03:01	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.50°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	32.40%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	44.50mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-132.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	15.704
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.282 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.252 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.249 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	-1.500 %

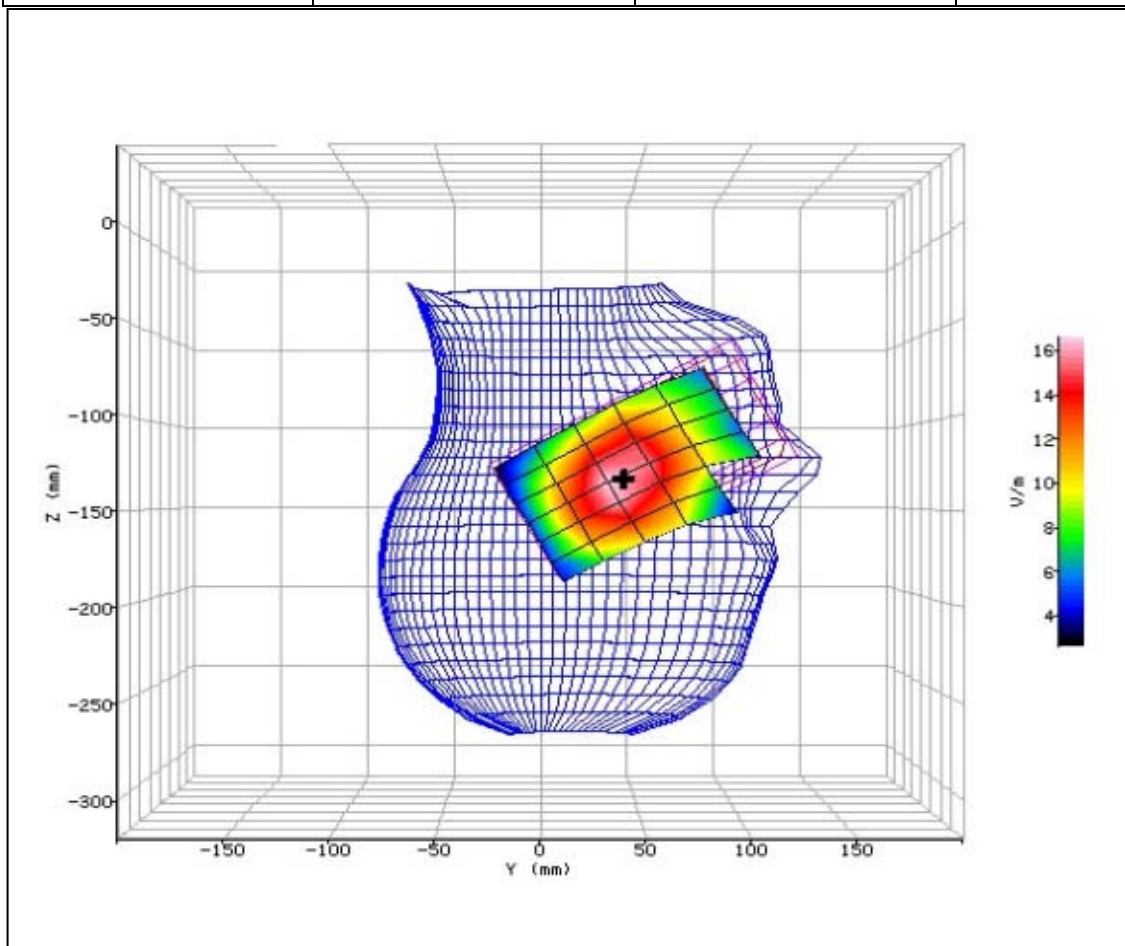


Figure 13: SAR Head Testing Results for the Sharp Smart phone at 836.4MHz.





## 2.4 GSM 850MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-12:38:42	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	7.50mm
DUT POSITION:	10mm-Front Facing	MAX SAR Y-AXIS LOCATION:	-0.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	21.139
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.432 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.439 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.425 W/kg
PROBE BATTERY LAST CHANGED:	16/04/2016	SAR DRIFT DURING SCAN:	-3.200 %

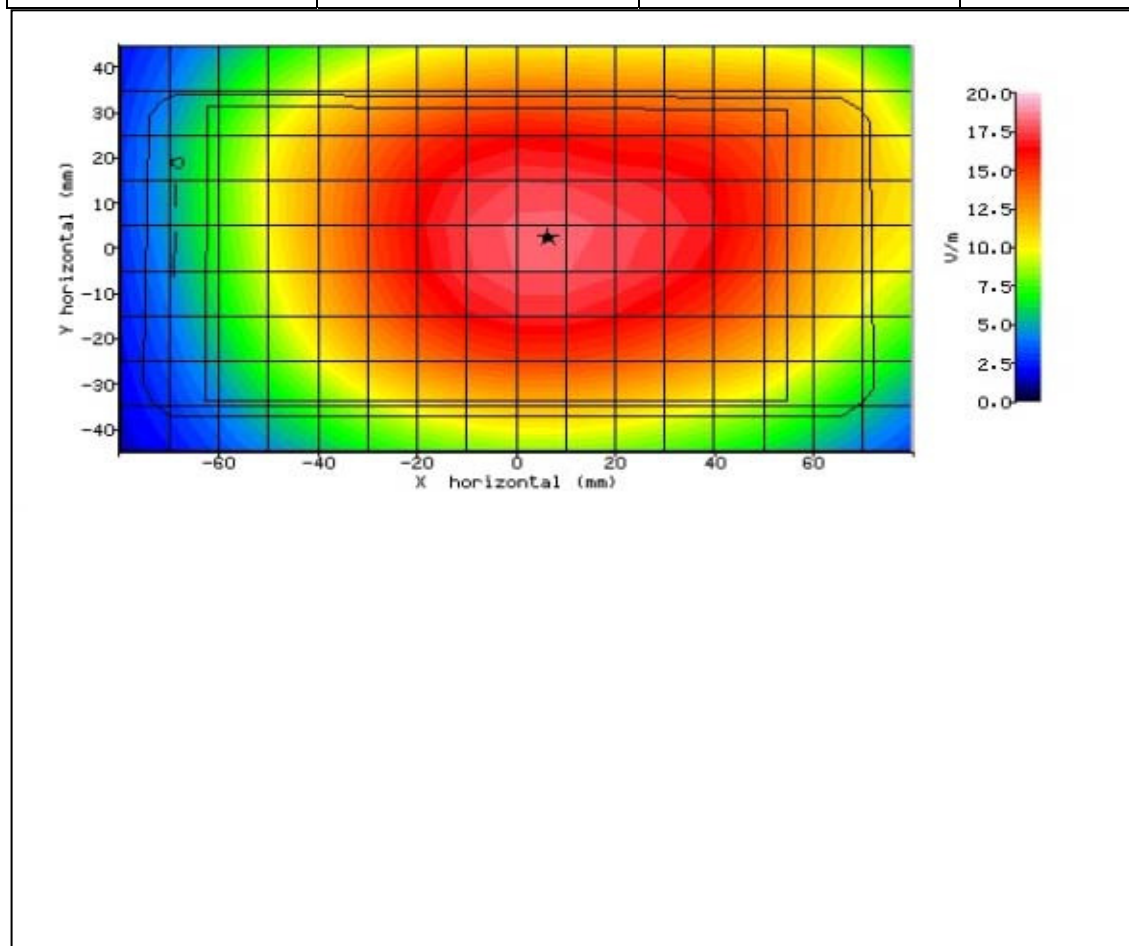


Figure 14: SAR Body Testing Results for the Sharp Smart phone at 836.4MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-12:57:33	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	4.30mm
DUT POSITION:	10mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	2.60mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	22.965
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.513 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.534 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.536 W/kg
PROBE BATTERY LAST CHANGED:	16/04/2016	SAR DRIFT DURING SCAN:	0.400 %

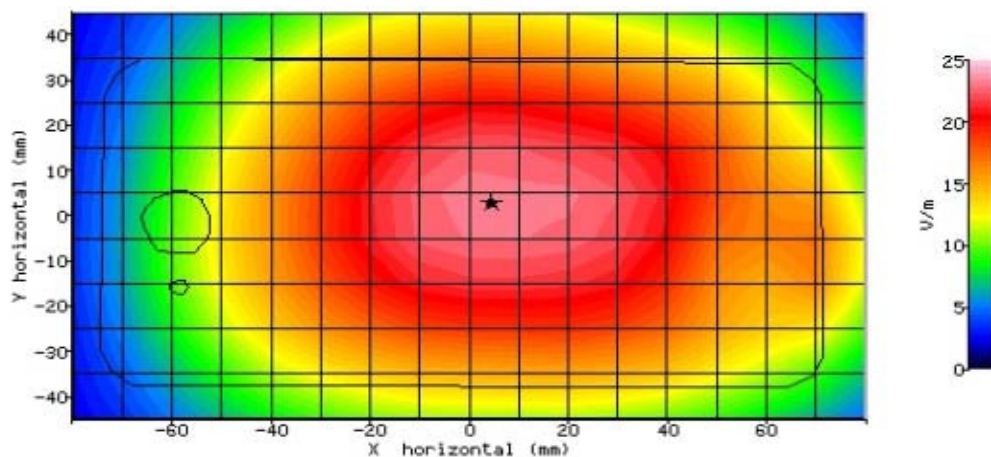


Figure 15: SAR Body Testing Results for the Sharp Smart phone at 836.4MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-13:43:27	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-4.20mm
DUT POSITION:	10mm-Left Edge	MAX SAR Y-AXIS LOCATION:	0.20mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	20.362
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.410 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.431 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.426 W/kg
PROBE BATTERY LAST CHANGED:	16/04/2016	SAR DRIFT DURING SCAN:	-1.300 %

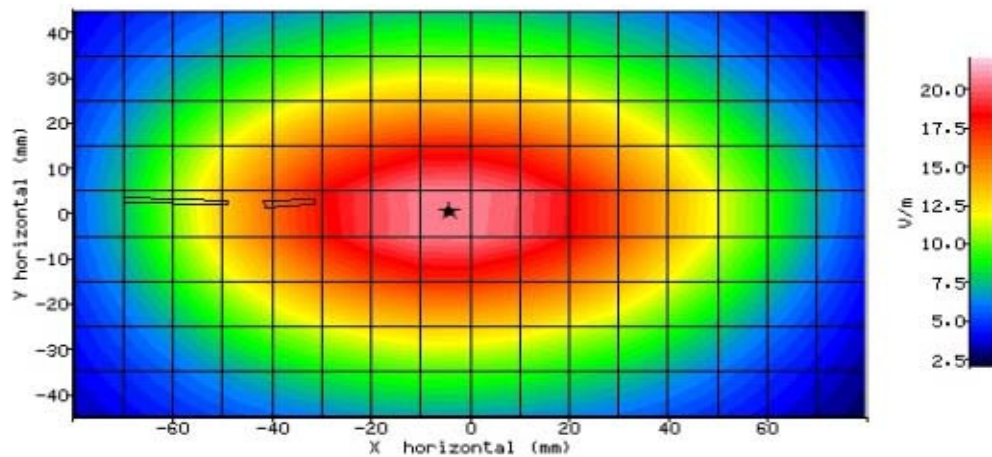


Figure 16: SAR Body Testing Results for the Sharp Smart phone at 836.4MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-14:01:59	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	2.00mm
DUT POSITION:	10mm-Right Edge	MAX SAR Y-AXIS LOCATION:	3.40mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	22.088
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.500 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.514 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.521 W/kg
PROBE BATTERY LAST CHANGED:	16/04/2016	SAR DRIFT DURING SCAN:	1.500 %

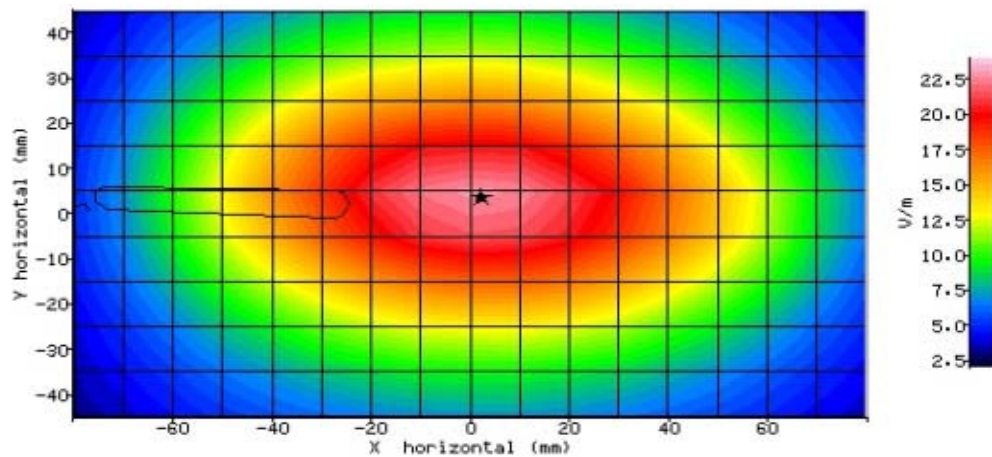


Figure 17: SAR Body Testing Results for the Sharp Smart phone at 836.4MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-14:42:38	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-3.60mm
DUT POSITION:	10mm-Bottom Edge	MAX SAR Y-AXIS LOCATION:	10.70mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	8.110
TEST FREQUENCY:	836.4MHz	SAR 1g:	0.075 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.078 W/kg
INPUT POWER LEVEL:	28.7dBm	SAR END:	0.078 W/kg
PROBE BATTERY LAST CHANGED:	16/04/2016	SAR DRIFT DURING SCAN:	0.200 %

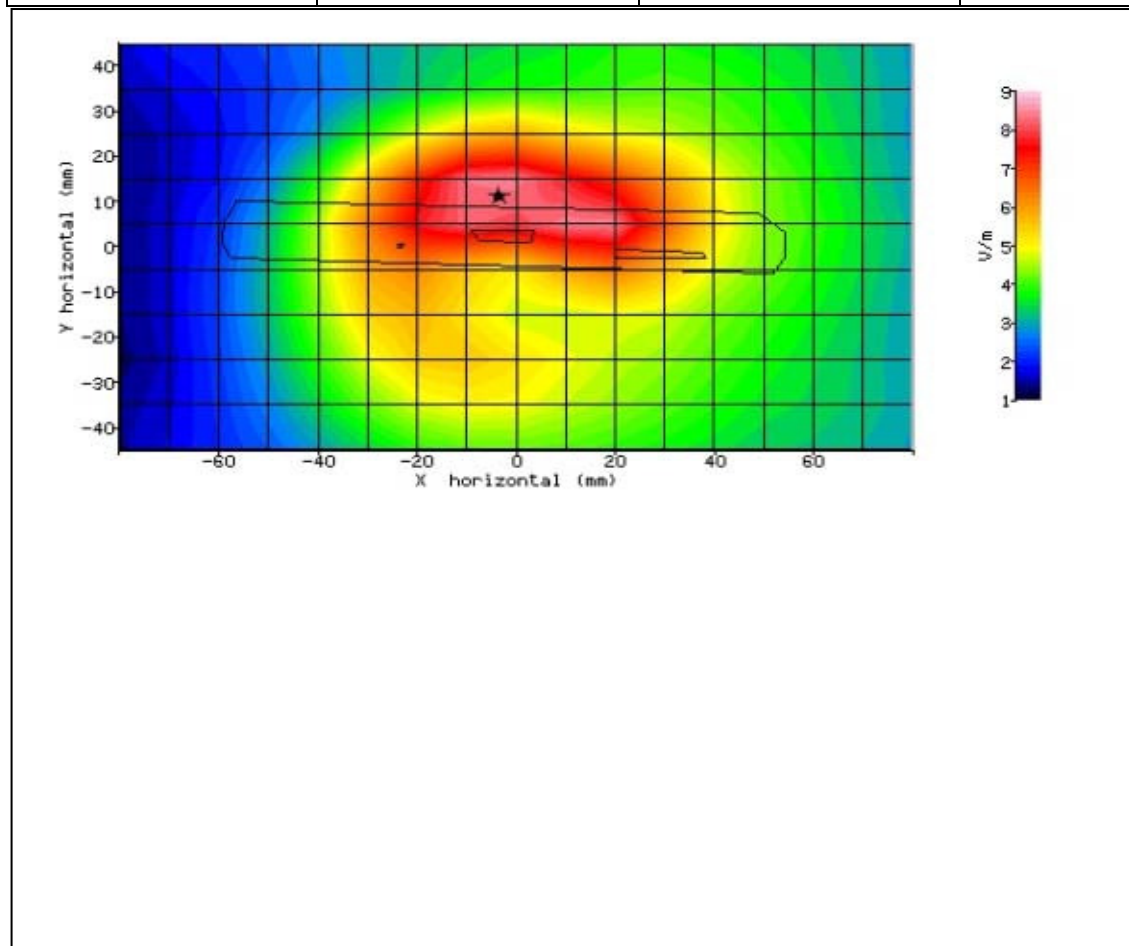


Figure 18: SAR Body Testing Results for the Sharp Smart phone at 836.4MHz.



## 2.5 WCDMA FDDV HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-15:36:49	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.70°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	29.80%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	59.10mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-111.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	18.849
TEST FREQUENCY:	835MHz	SAR 1g:	0.338 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.370 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.378 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	2.000 %

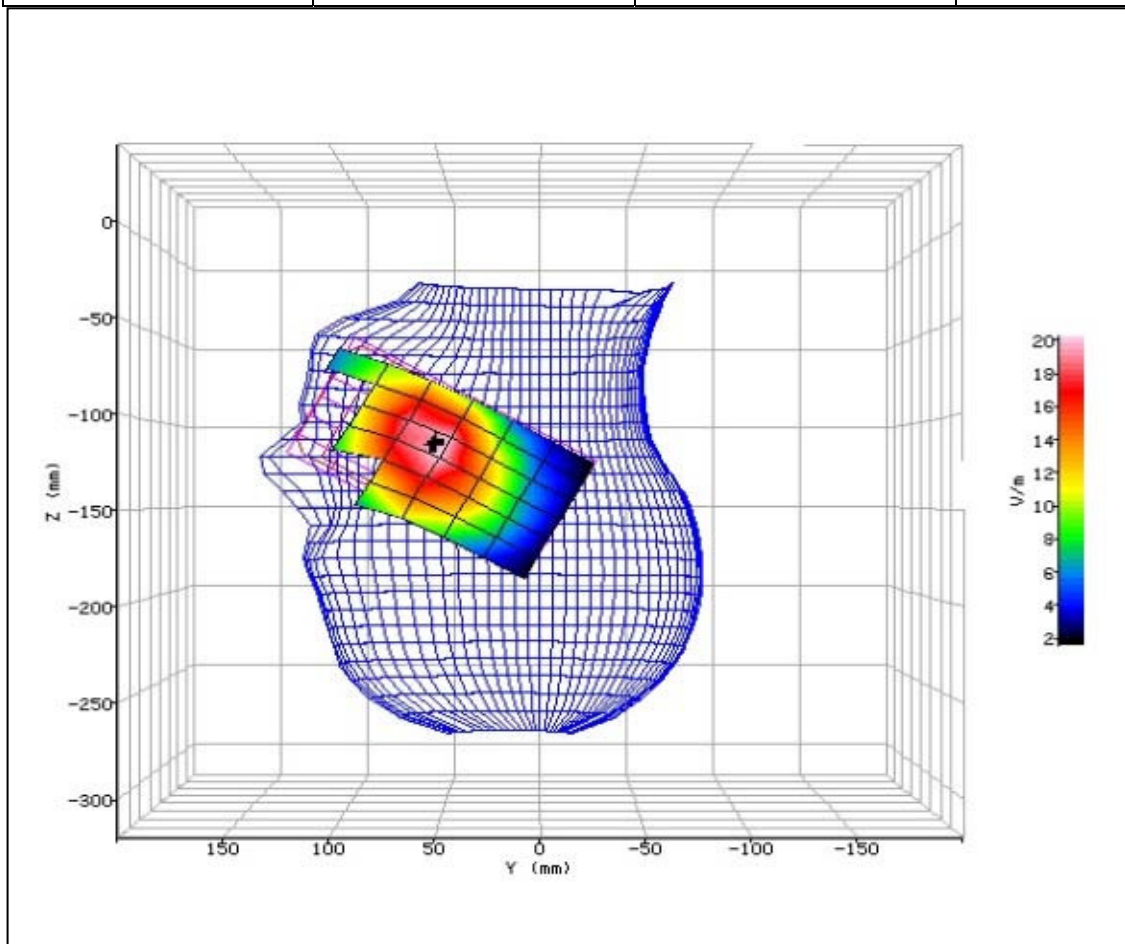


Figure 19: SAR Head Testing Results for the Sharp Smart phone at 835MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-16:01:17	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.70°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	29.80%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	41.90mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-129.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	14.275
TEST FREQUENCY:	835MHz	SAR 1g:	0.201 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.208 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.209 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	0.200 %

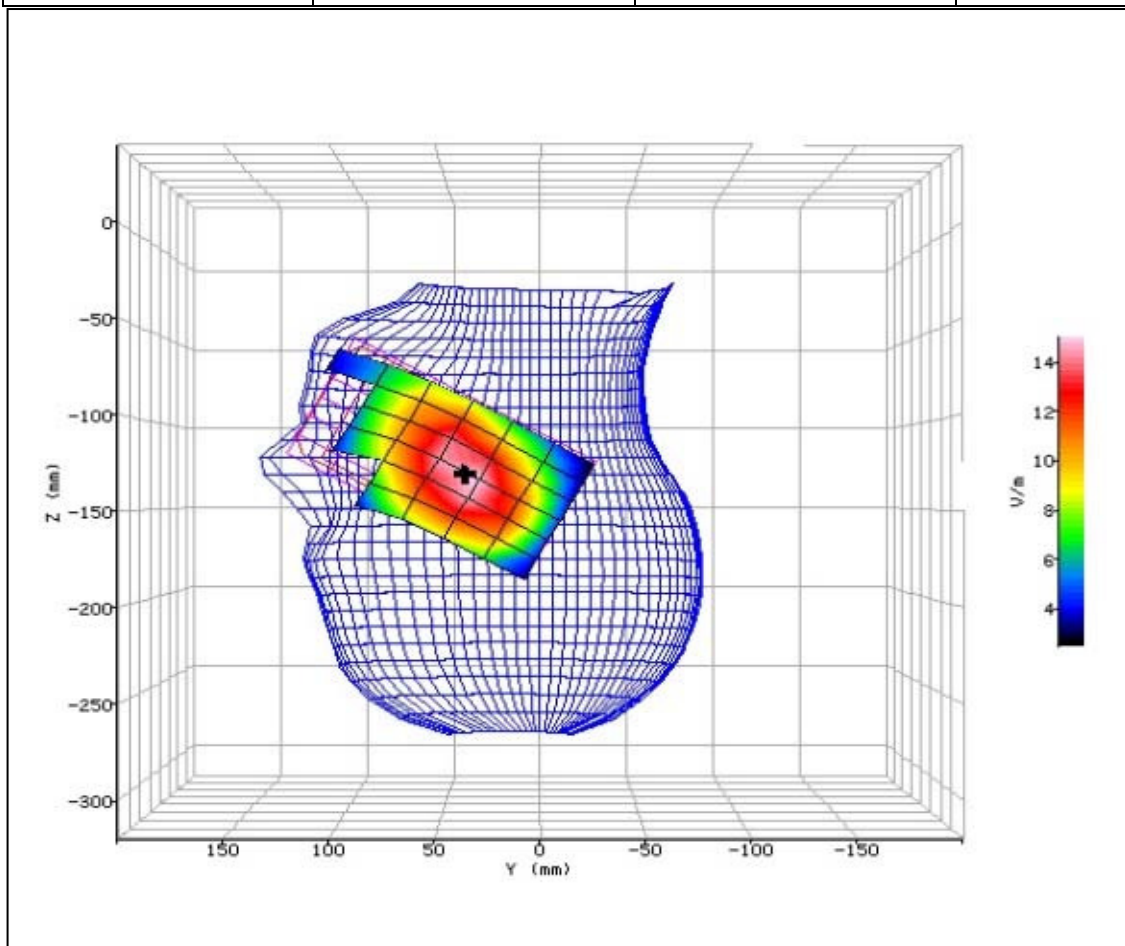


Figure 20: SAR Head Testing Results for the Sharp Smart phone at 835MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-17:00:23	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.70°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	29.80%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	56.30mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-121.60mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	17.308
TEST FREQUENCY:	835MHz	SAR 1g:	0.357 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.312 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.302 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	-3.200 %

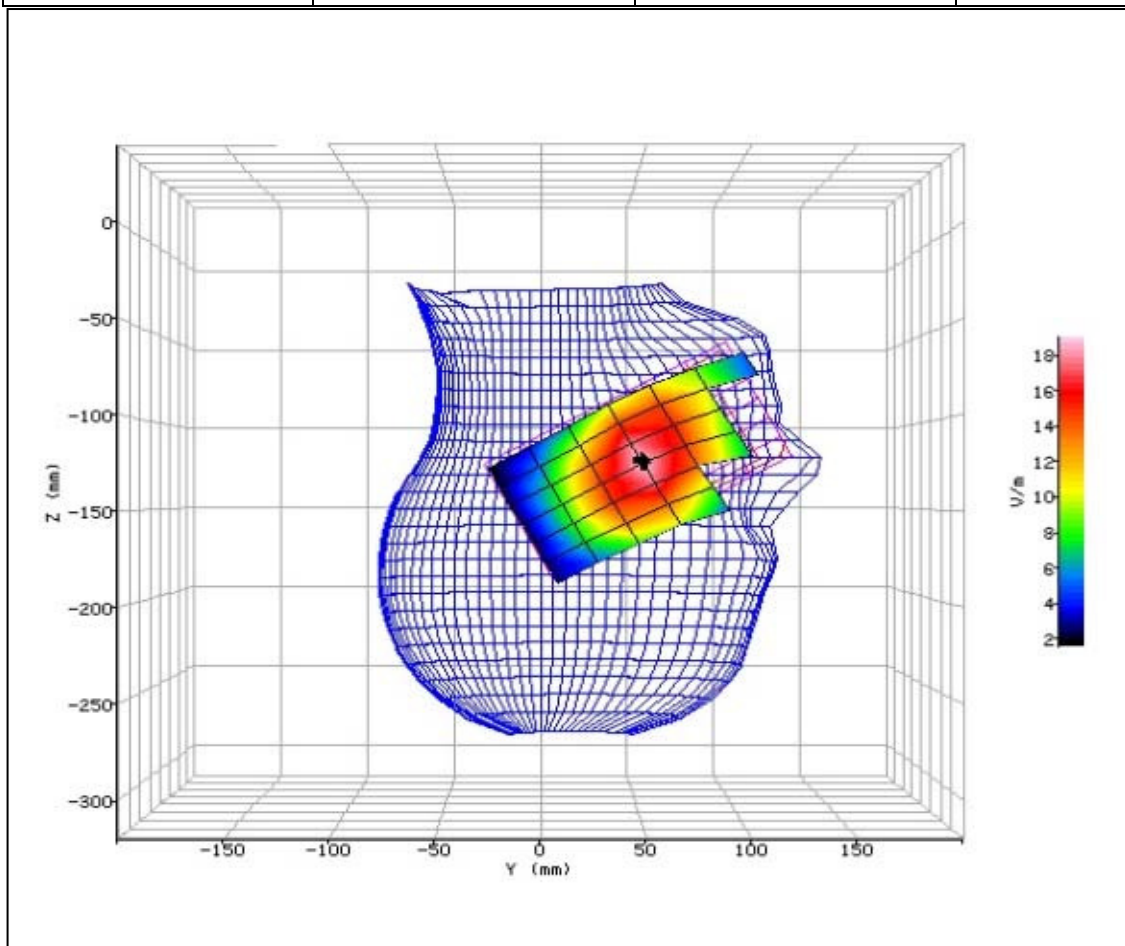


Figure 21: SAR Head Testing Results for the Sharp Smart phone at 835MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	21/04/2016-17:24:25	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.70°C	LIQUID SIMULANT:	850 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	40.53
RELATIVE HUMIDITY:	29.80%	CONDUCTIVITY:	0.879
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	41.70mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-134.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	12.969
TEST FREQUENCY:	835MHz	SAR 1g:	0.208 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.169 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.167 W/kg
PROBE BATTERY LAST CHANGED:	21/04/2016	SAR DRIFT DURING SCAN:	-1.100 %

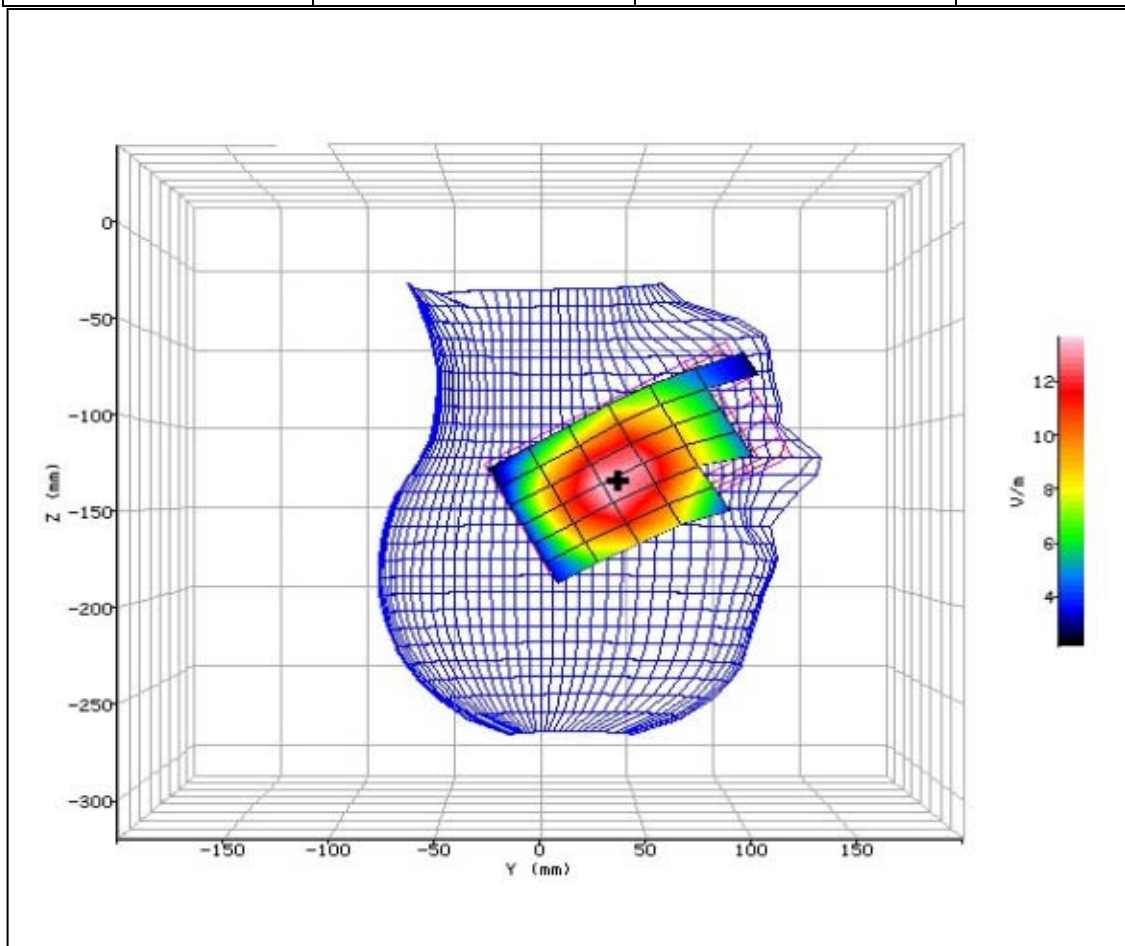


Figure 22: SAR Head Testing Results for the Sharp Smart phone at 835MHz.



## 2.6 WCDMA FDDV BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-17:33:54	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	6.30mm
DUT POSITION:	10mm-Front Facing	MAX SAR Y-AXIS LOCATION:	2.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	17.910
TEST FREQUENCY:	835MHz	SAR 1g:	0.314 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.323 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.320 W/kg
PROBE BATTERY LAST CHANGED:	26/04/2016	SAR DRIFT DURING SCAN:	-0.900 %

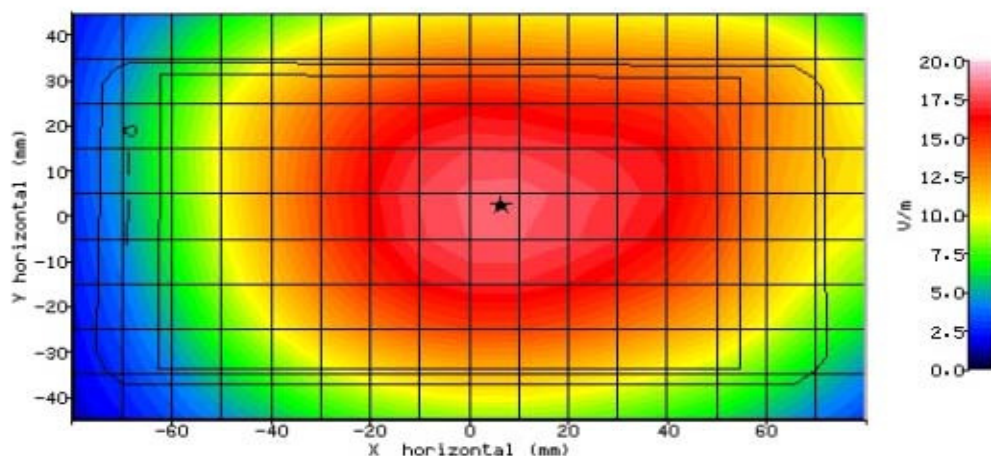


Figure 23: SAR Body Testing Results for the Sharp Smart phone at 835MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-17:53:31	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	2.30mm
DUT POSITION:	10mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	2.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	18.926
TEST FREQUENCY:	835MHz	SAR 1g:	0.350 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.359 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.366 W/kg
PROBE BATTERY LAST CHANGED:	26/04/2016	SAR DRIFT DURING SCAN:	2.000 %

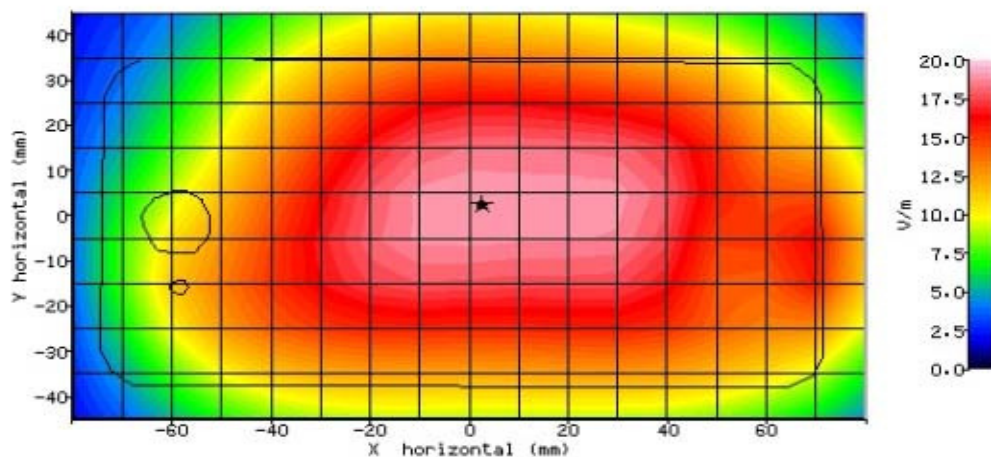


Figure 24: SAR Body Testing Results for the Sharp Smart phone at 835MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-15:33:30	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-8.60mm
DUT POSITION:	10mm-Left Edge	MAX SAR Y-AXIS LOCATION:	1.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	16.291
TEST FREQUENCY:	835MHz	SAR 1g:	0.274 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.283 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.280 W/kg
PROBE BATTERY LAST CHANGED:	26/04/2016	SAR DRIFT DURING SCAN:	-1.100 %

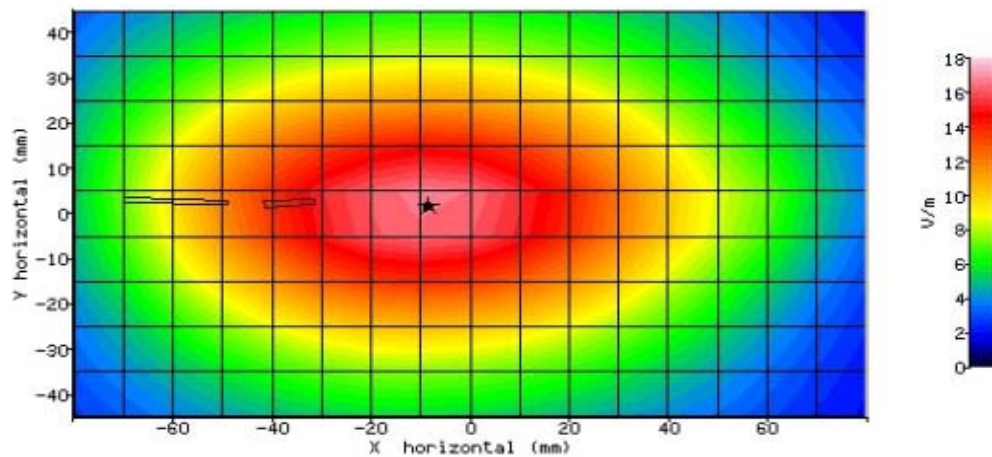


Figure 25: SAR Body Testing Results for the Sharp Smart phone at 835MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-15:52:00	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	2.00mm
DUT POSITION:	10mm-Right Edge	MAX SAR Y-AXIS LOCATION:	3.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	18.285
TEST FREQUENCY:	835MHz	SAR 1g:	0.338 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.351 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.352 W/kg
PROBE BATTERY LAST CHANGED:	26/04/2016	SAR DRIFT DURING SCAN:	0.100 %

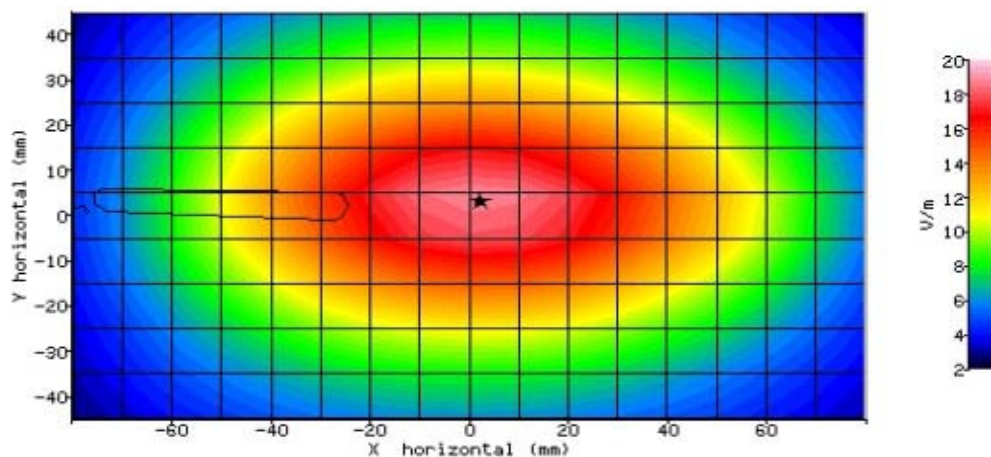


Figure 26: SAR Body Testing Results for the Sharp Smart phone at 835MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-16:39:41	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	850 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.18
RELATIVE HUMIDITY:	43.20%	CONDUCTIVITY:	0.987
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-5.00mm
DUT POSITION:	10mm-Bottom Edge	MAX SAR Y-AXIS LOCATION:	6.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	7.476
TEST FREQUENCY:	835MHz	SAR 1g:	0.065 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.067 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.066 W/kg
PROBE BATTERY LAST CHANGED:	26/04/2016	SAR DRIFT DURING SCAN:	-1.600 %

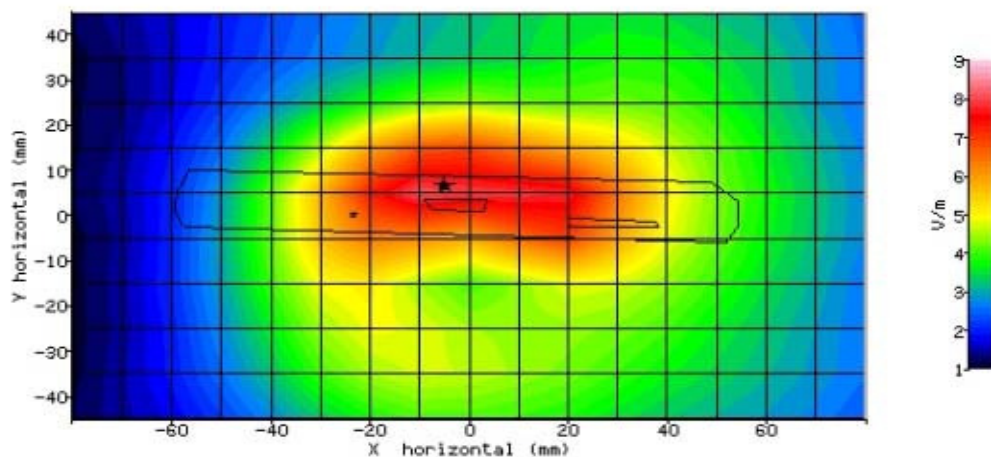


Figure 27: SAR Body Testing Results for the Sharp Smart phone at 835MHz.



## 2.7 LTE BAND 17 HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-12:38:17	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	57.40mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-111.300mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.503
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.108 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.099 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.098 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-0.700 %

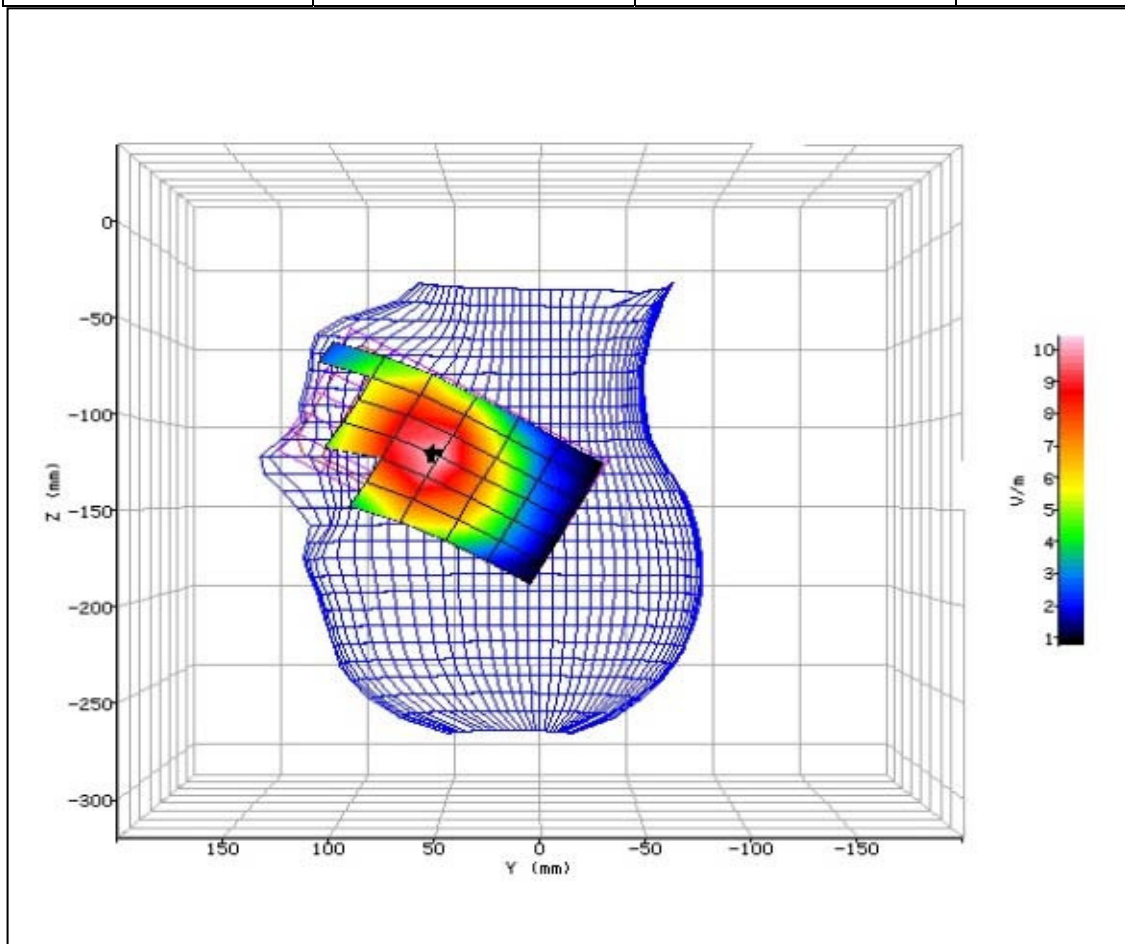


Figure 28: SAR Head Testing Results for the Sharp Smart phone at 709.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-13:02:17	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	45.70mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-120.600mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	7.761
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.070 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.063 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.065 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	3.900 %

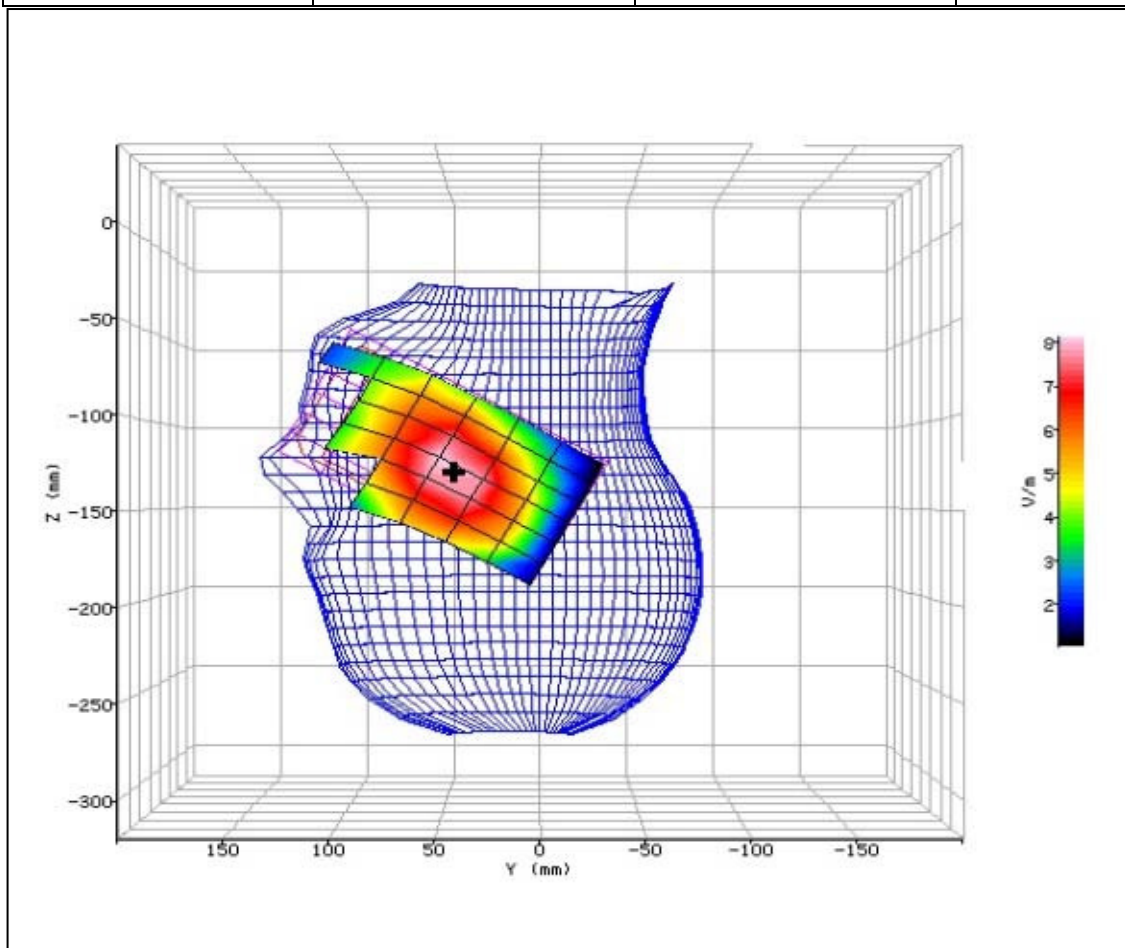


Figure 29: SAR Head Testing Results for the Sharp Smart phone at 709.0MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-14:00:27	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	59.50mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-111.300mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	10.165
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.103 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.121 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.117 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-4.100 %

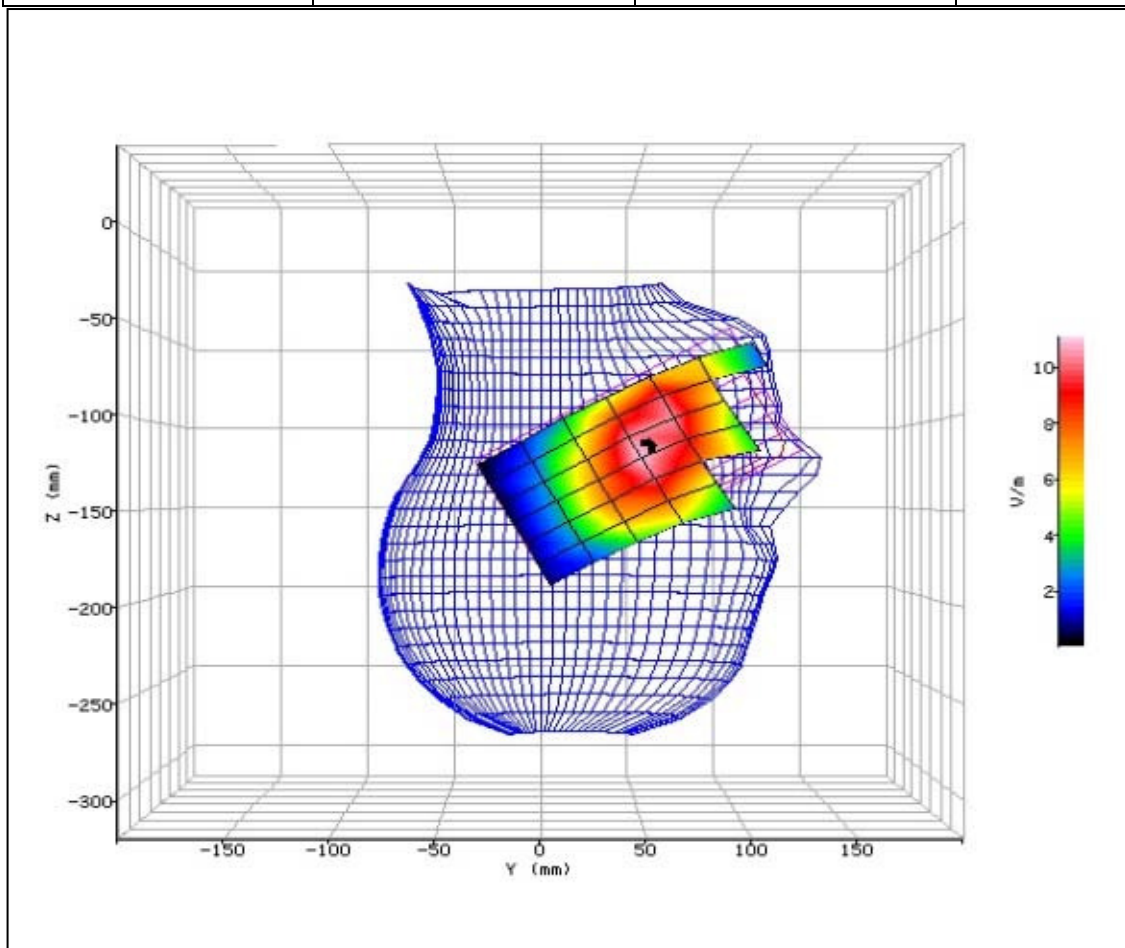


Figure 30: SAR Head Testing Results for the Sharp Smart phone at 709.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-14:25:14	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	49.40mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-123.400mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	8.145
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.064 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.068 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.067 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-0.800 %

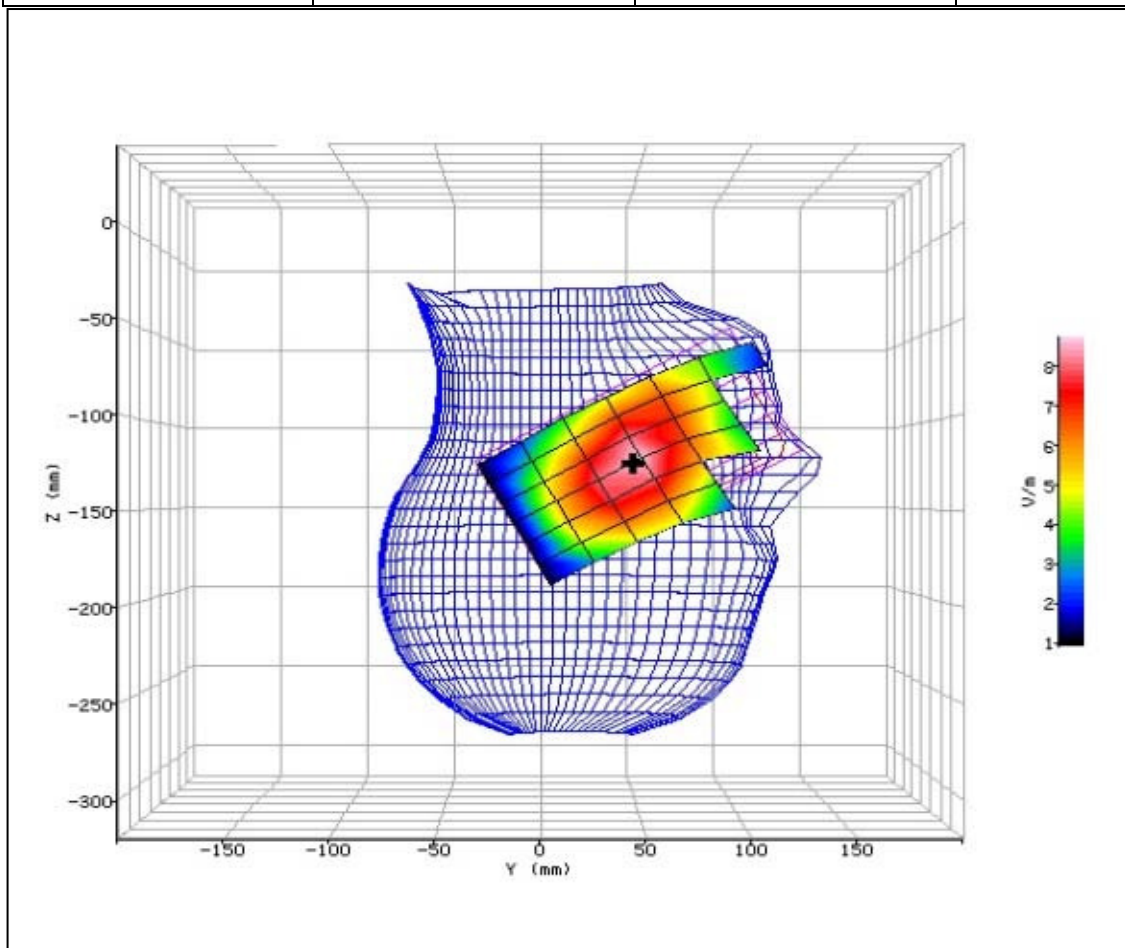


Figure 31: SAR Head Testing Results for the Sharp Smart phone at 709.0MHz.



## 2.8 LTE BAND 17 BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-08:26:25	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	28.70mm
DUT POSITION:	10mm-Front Facing	MAX SAR Y-AXIS LOCATION:	10.800mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	11.492
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.126 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.134 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.138 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	3.300 %

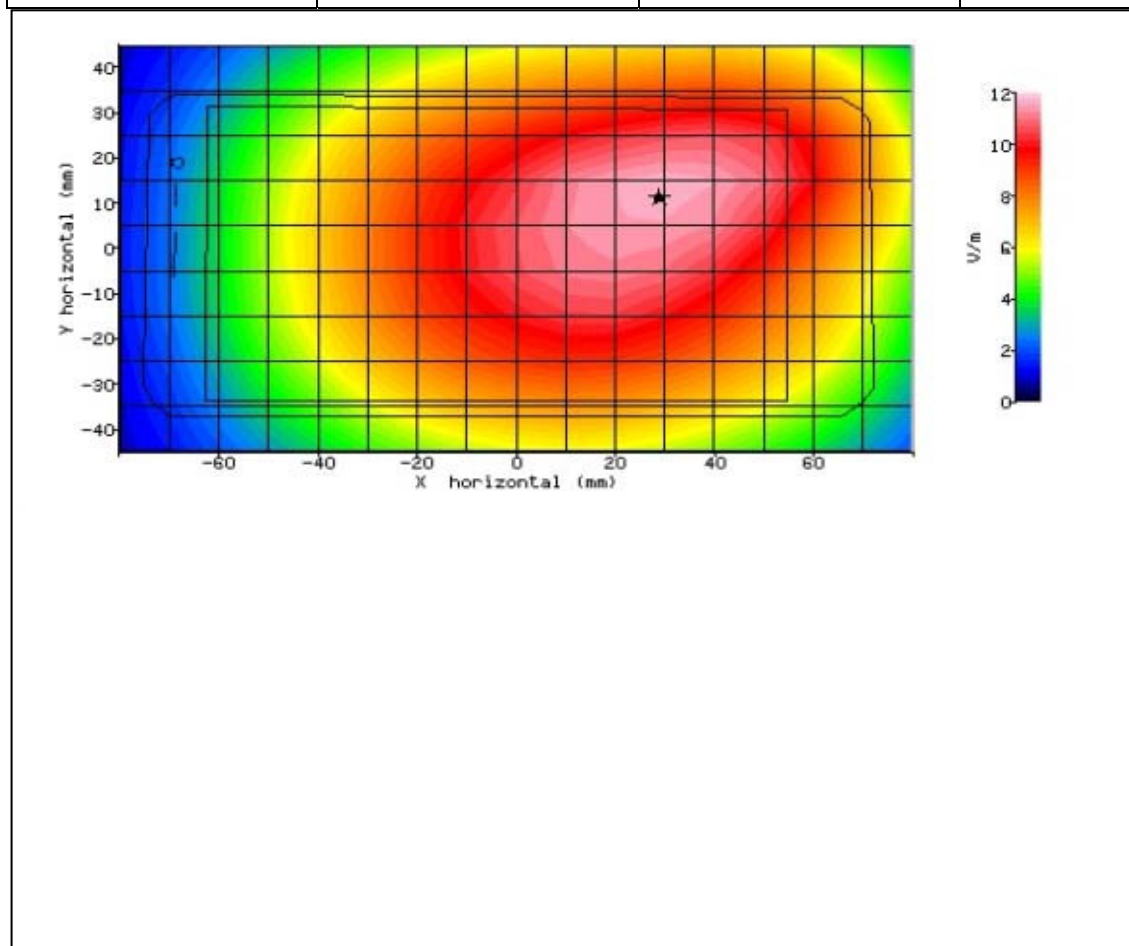


Figure 32: SAR Body Testing Results for the Sharp Smart phone at 709.0MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-08:46:07	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	24.10mm
DUT POSITION:	10mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-12.200mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	14.410
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.199 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.209 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.219 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	4.900 %

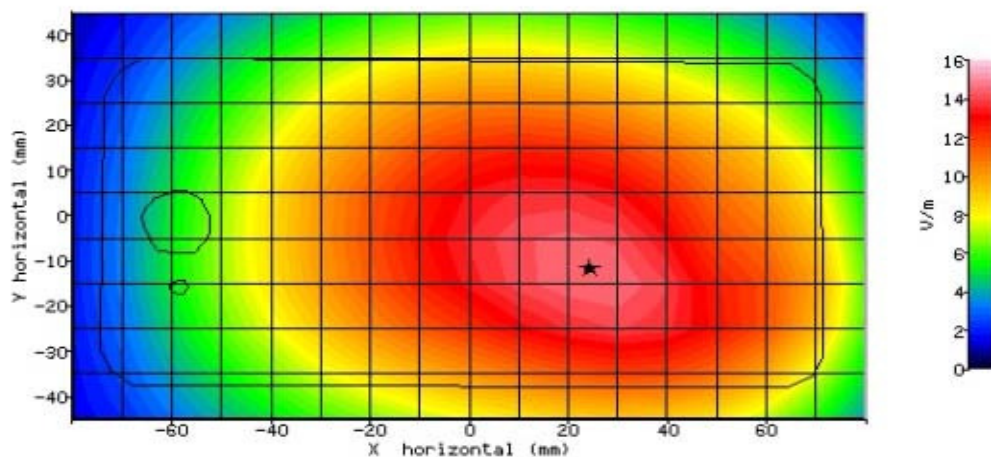


Figure 33: SAR Body Testing Results for the Sharp Smart phone at 709.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-09:17:55	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	11.70mm
DUT POSITION:	10mm-Left Edge	MAX SAR Y-AXIS LOCATION:	-2.600mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.874
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.099 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.104 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.110 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	5.200 %

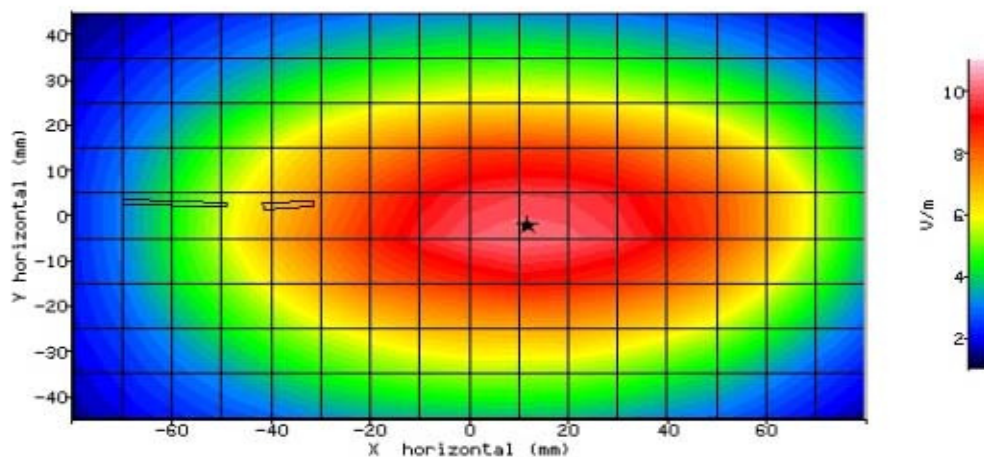


Figure 34: SAR Body Testing Results for the Sharp Smart phone at 709.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-09:36:13	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	9.70mm
DUT POSITION:	10mm-Right Edge	MAX SAR Y-AXIS LOCATION:	-0.900mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.246
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.086 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.092 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.090 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	-1.800 %

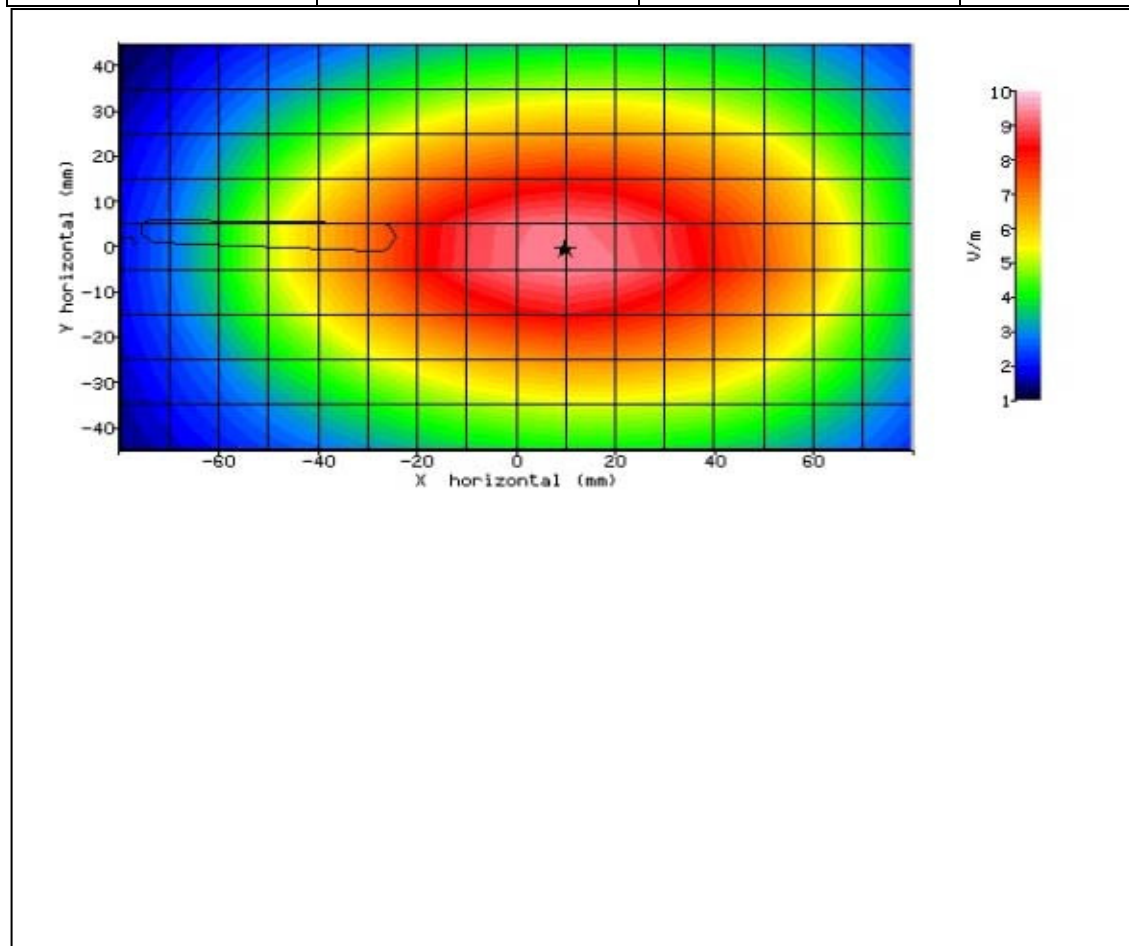


Figure 35: SAR Body Testing Results for the Sharp Smart phone at 709.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-09:56:29	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	18.90mm
DUT POSITION:	10mm-Bottom Edge	MAX SAR Y-AXIS LOCATION:	0.100mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	3.692
TEST FREQUENCY:	709.0MHz	SAR 1g:	0.016 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.017 W/kg
INPUT POWER LEVEL:	24.2dBm	SAR END:	0.017 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	-1.300 %

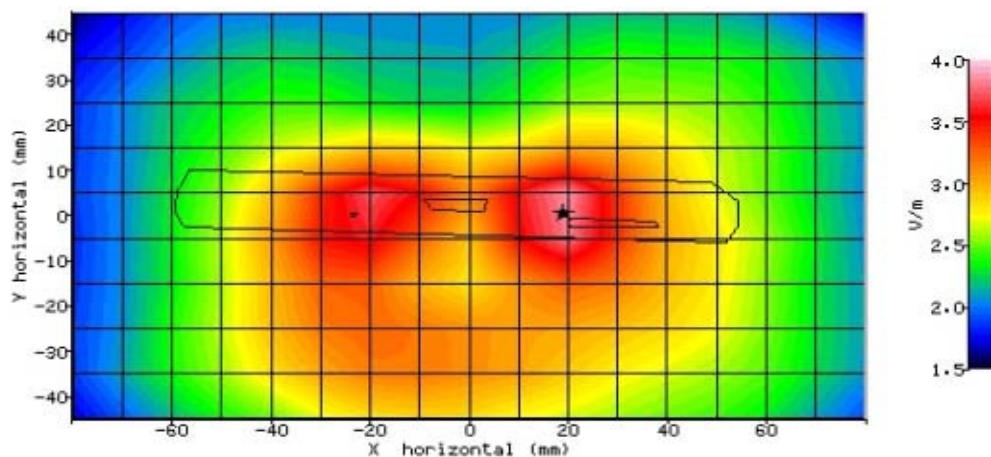


Figure 36: SAR Body Testing Results for the Sharp Smart phone at 709.0MHz.



## 2.9 LTE BAND 17 HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-16:55:18	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	60.10mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-115.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.219
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.099 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.092 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.092 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	0.600 %

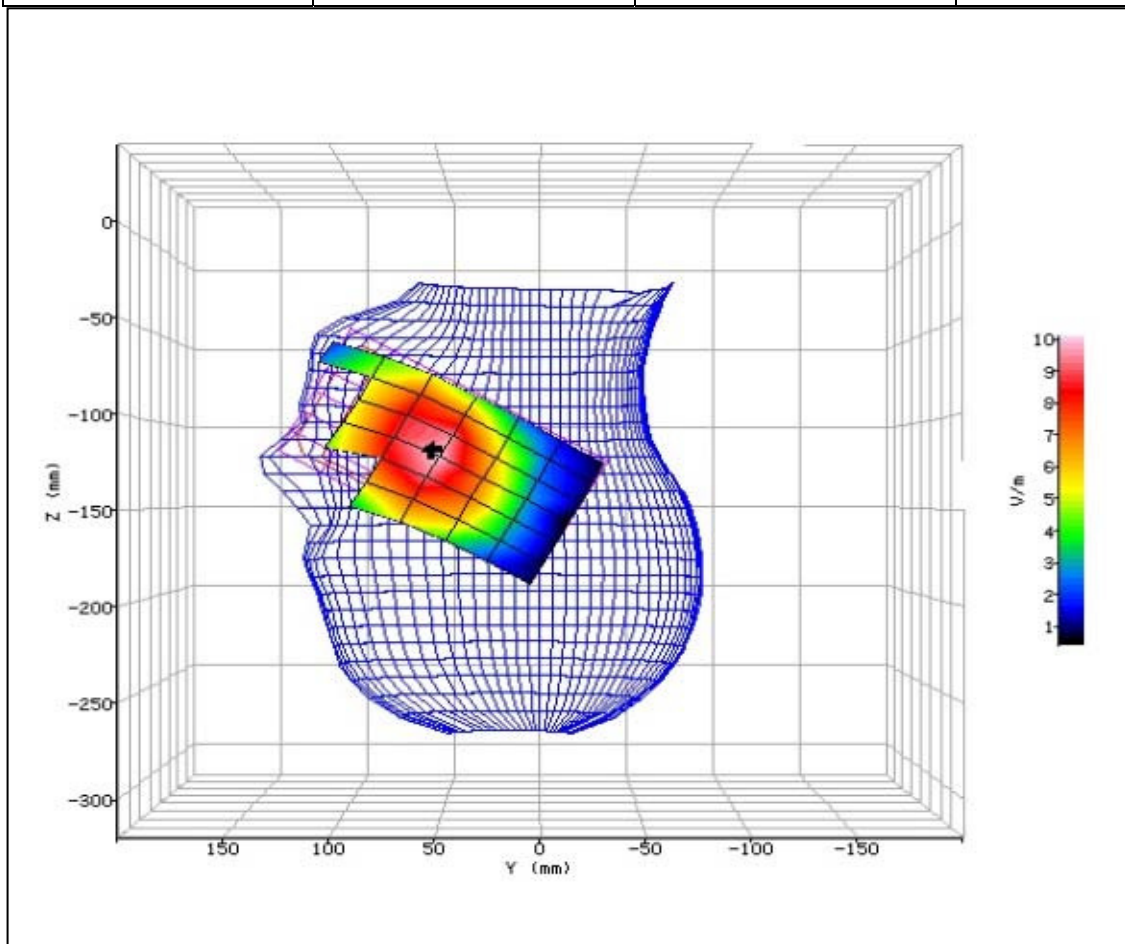


Figure 37: SAR Head Testing Results for the Sharp Smart phone at 711.0MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-17:18:44	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	47.20mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-125.20mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	7.391
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.063 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.057 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.057 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	0.300 %

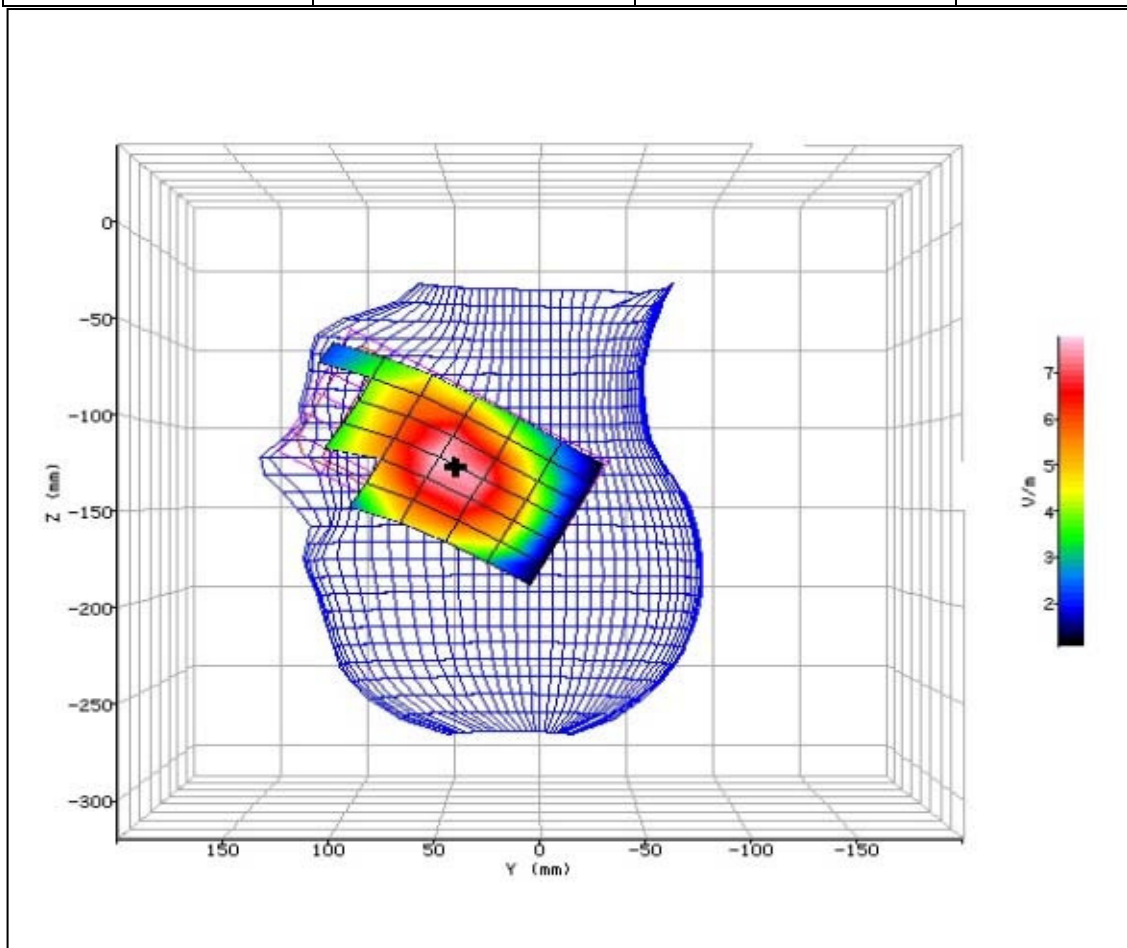


Figure 38: SAR Head Testing Results for the Sharp Smart phone at 711.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-15:29:30	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	60.10mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-109.50mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.429
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.089 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.100 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.101 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	0.900 %

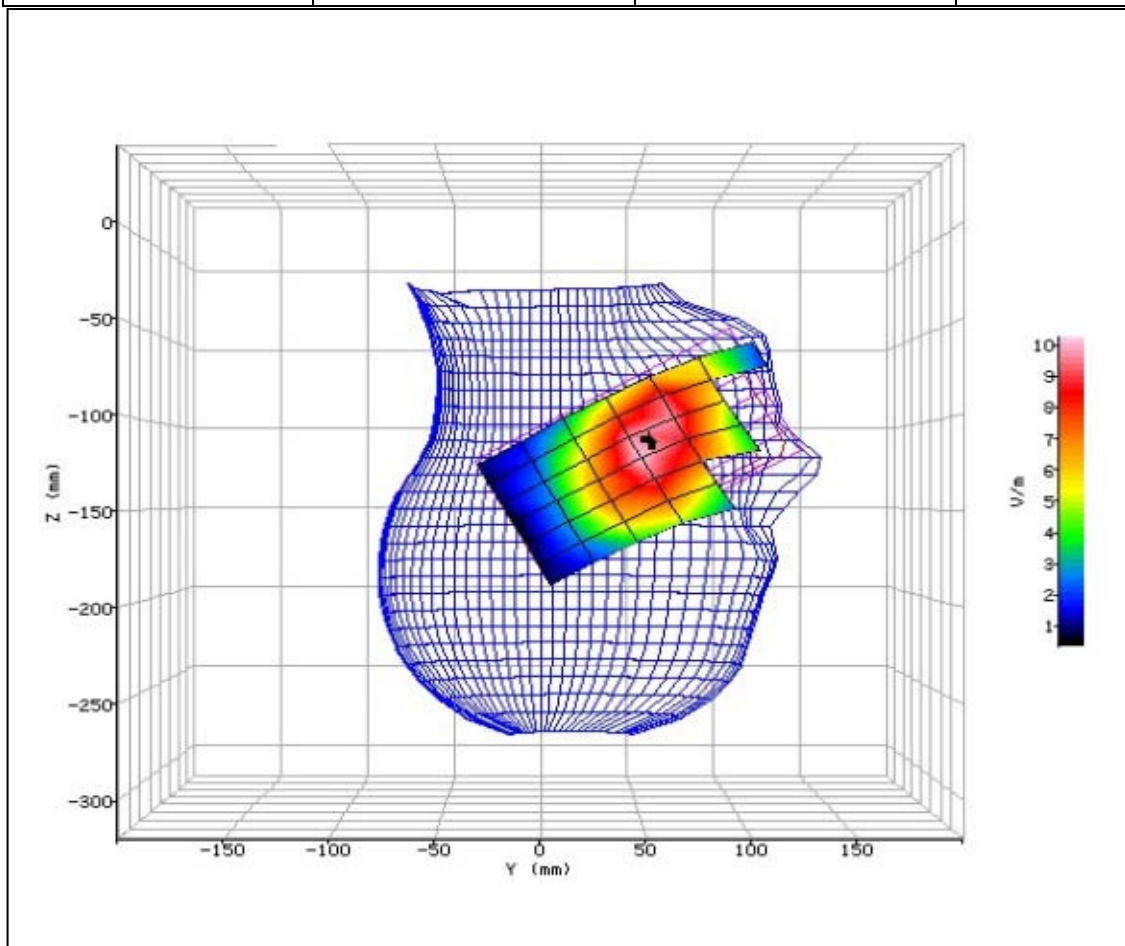


Figure 39: SAR Head Testing Results for the Sharp Smart phone at 711.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-15:53:21	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.80°C	LIQUID SIMULANT:	700 Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	42.80
RELATIVE HUMIDITY:	39.10%	CONDUCTIVITY:	0.903
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	48.20mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-124.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	7.160
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.050 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.053 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.052 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-0.700 %

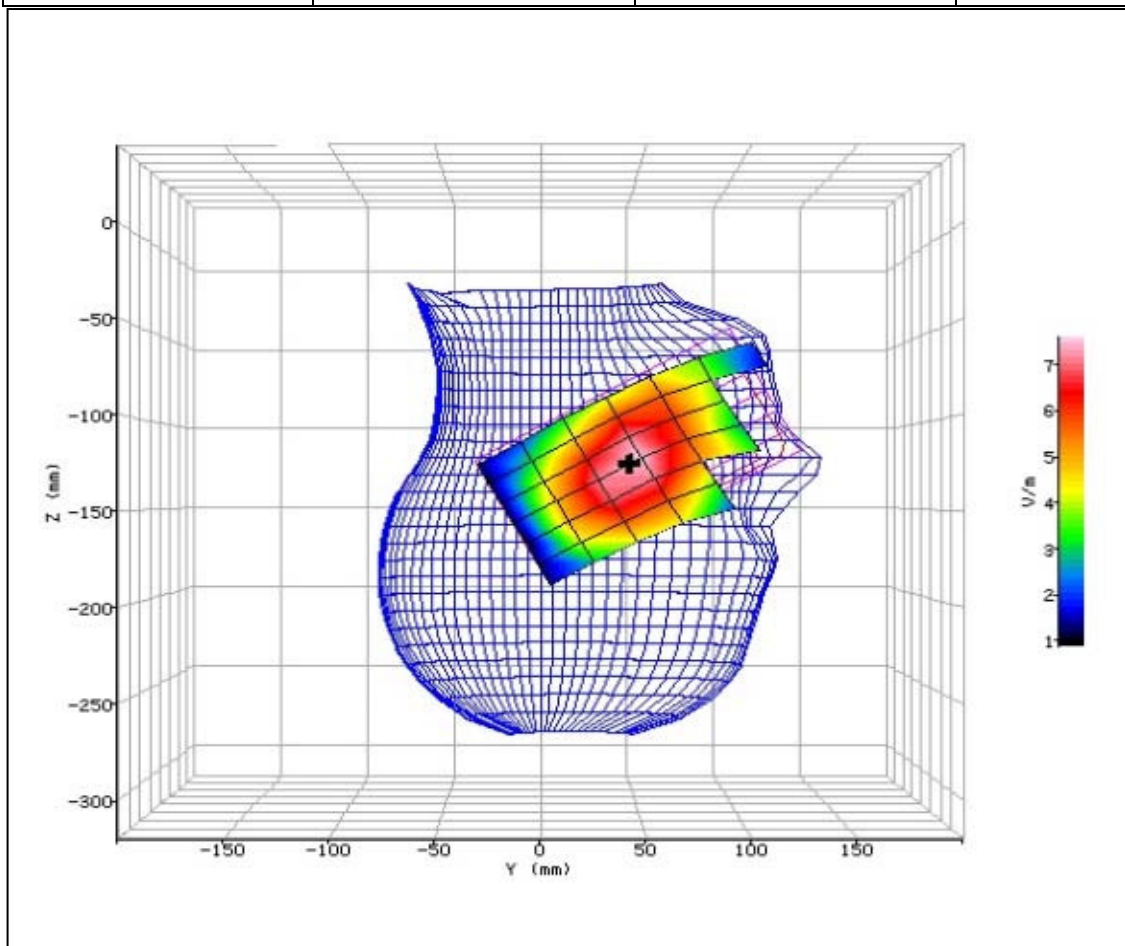


Figure 40: SAR Head Testing Results for the Sharp Smart phone at 711.0MHz.





## 2.10 LTE BAND 17 BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-12:48:30	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	25.00mm
DUT POSITION:	10mm-Front Facing	MAX SAR Y-AXIS LOCATION:	8.40mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	10.747
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.111 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.118 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.122 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	3.300 %

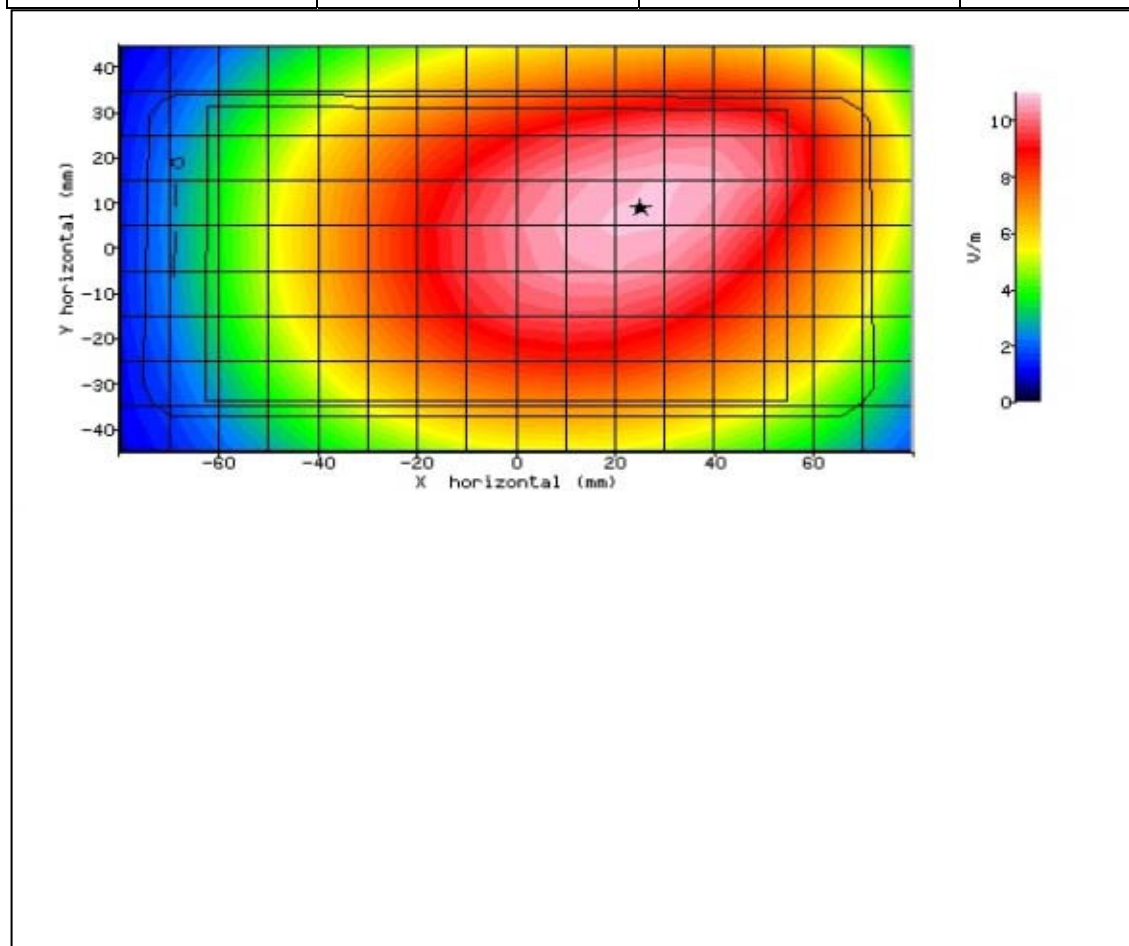


Figure 41: SAR Body Testing Results for the Sharp Smart phone at 711.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-13:08:21	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	23.30mm
DUT POSITION:	10mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-12.40mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	13.493
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.175 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.186 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.188 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	1.100 %

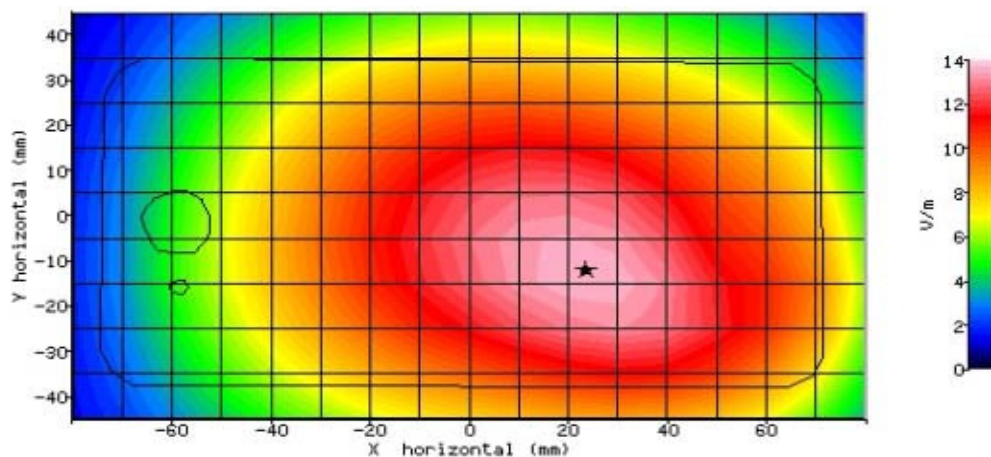


Figure 42: SAR Body Testing Results for the Sharp Smart phone at 711.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-10:55:25	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	12.50mm
DUT POSITION:	10mm-Left Edge	MAX SAR Y-AXIS LOCATION:	-1.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.359
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.087 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.091 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.093 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	2.700 %

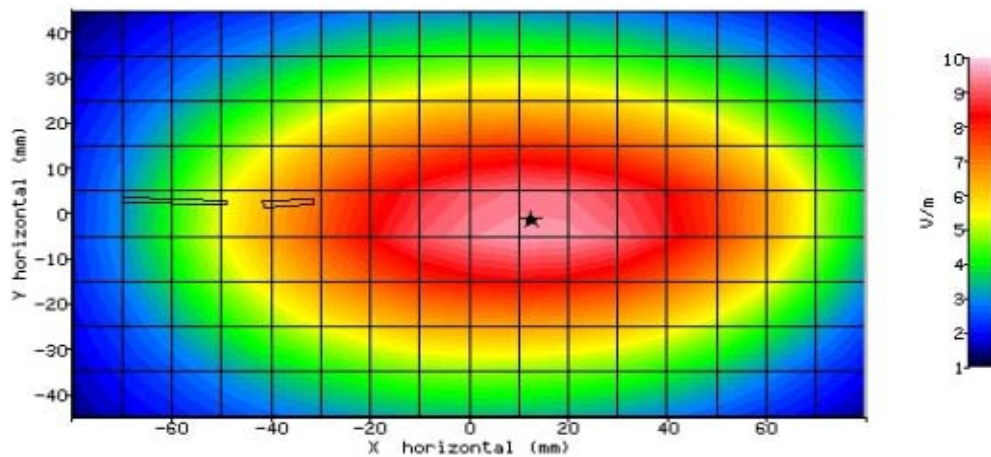


Figure 43: SAR Body Testing Results for the Sharp Smart phone at 711.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-11:13:42	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	10.50mm
DUT POSITION:	10mm-Right Edge	MAX SAR Y-AXIS LOCATION:	-0.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	8.686
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.077 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.082 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.082 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	-0.900 %

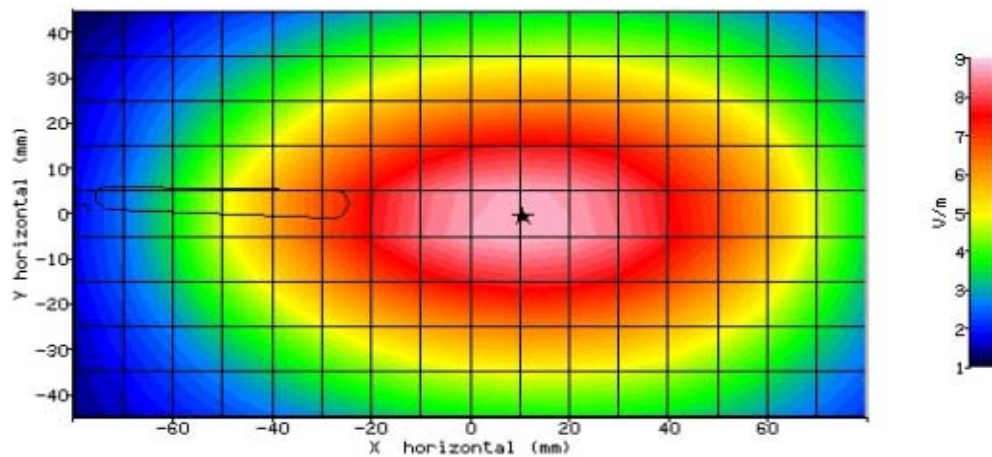


Figure 44: SAR Body Testing Results for the Sharp Smart phone at 711.0MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-11:32:20	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	700 Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	55.17
RELATIVE HUMIDITY:	48.30%	CONDUCTIVITY:	0.999
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	19.00mm
DUT POSITION:	10mm-Bottom Edge	MAX SAR Y-AXIS LOCATION:	-2.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	3.245
TEST FREQUENCY:	711.0MHz	SAR 1g:	0.012 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.012 W/kg
INPUT POWER LEVEL:	23.2dBm	SAR END:	0.013 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	2.600 %

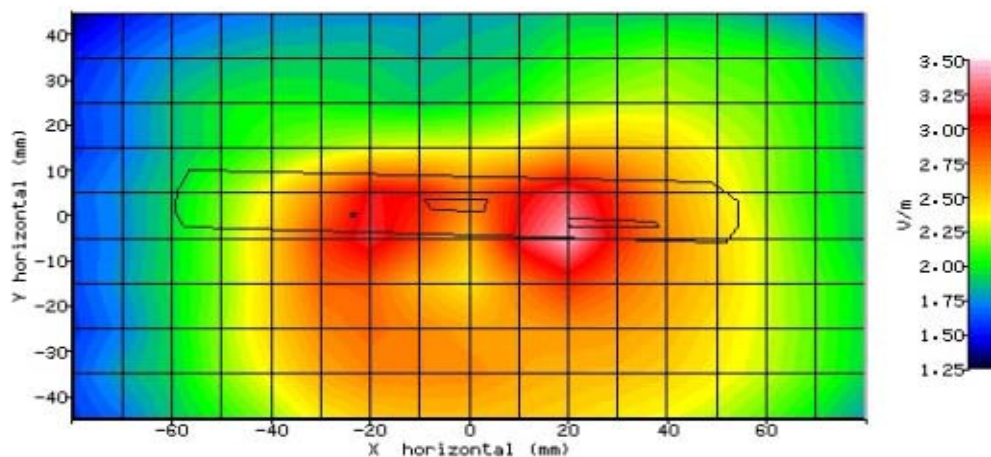


Figure 45: SAR Body Testing Results for the Sharp Smart phone at 711.0MHz.





## 2.11 PCS 1900MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-11:30:34	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	59.40mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-98.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	10.145
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.189 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.206 W/kg
INPUT POWER LEVEL:	30.4dBm	SAR END:	0.210 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	1.700 %

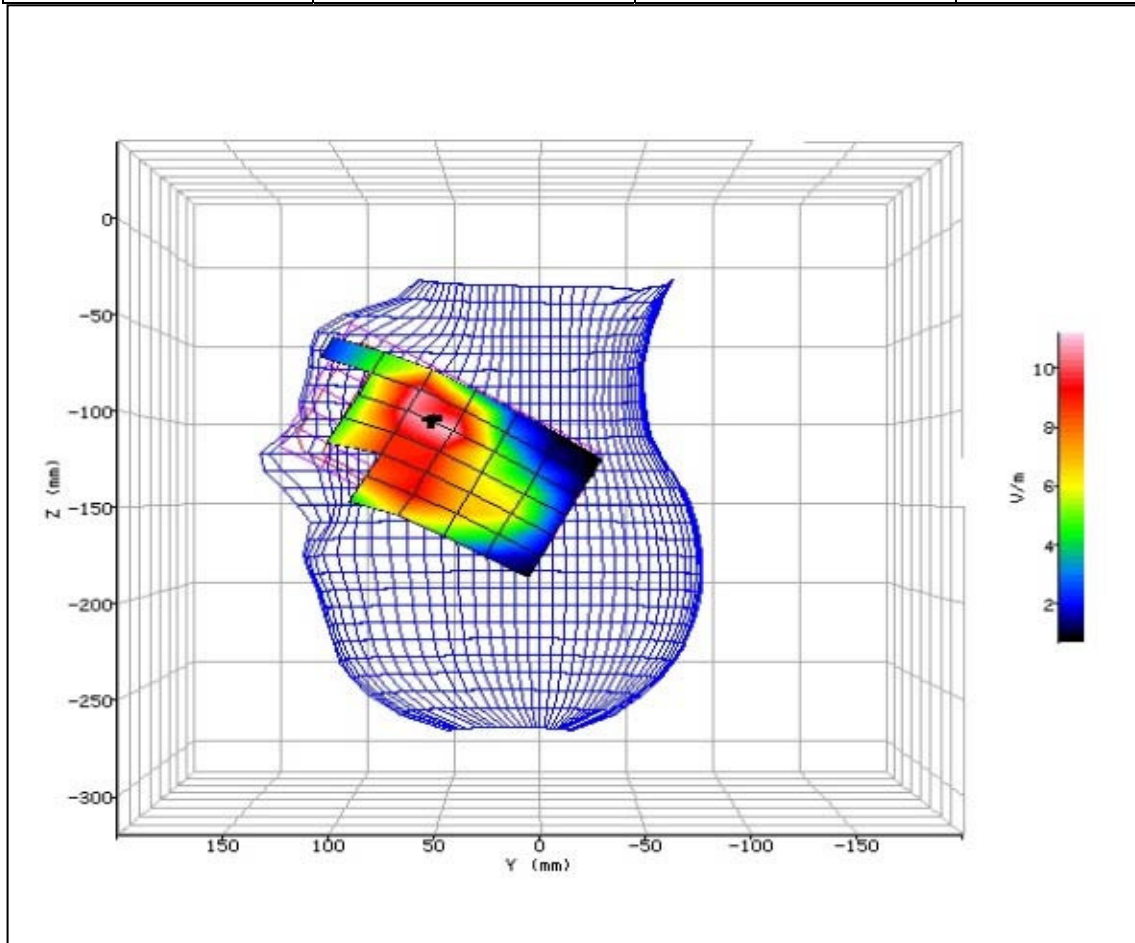


Figure 46: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-11:57:08	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	20.30mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-150.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	7.220
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.126 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.122 W/kg
INPUT POWER LEVEL:	30.4dBm	SAR END:	0.116 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-5.200 %

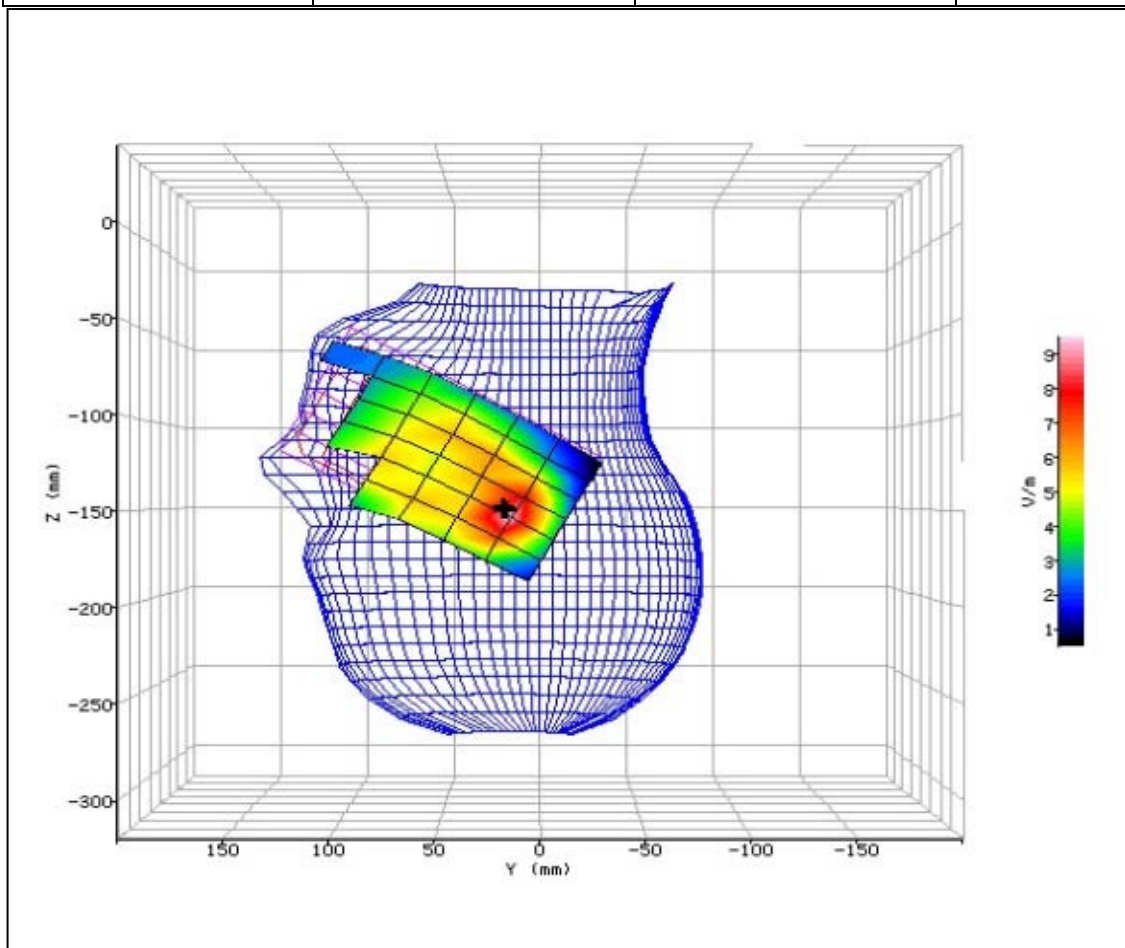


Figure 47: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-12:45:42	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	62.70mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-98.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	12.424
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.359 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.312 W/kg
INPUT POWER LEVEL:	30.4dBm	SAR END:	0.321 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	3.100 %

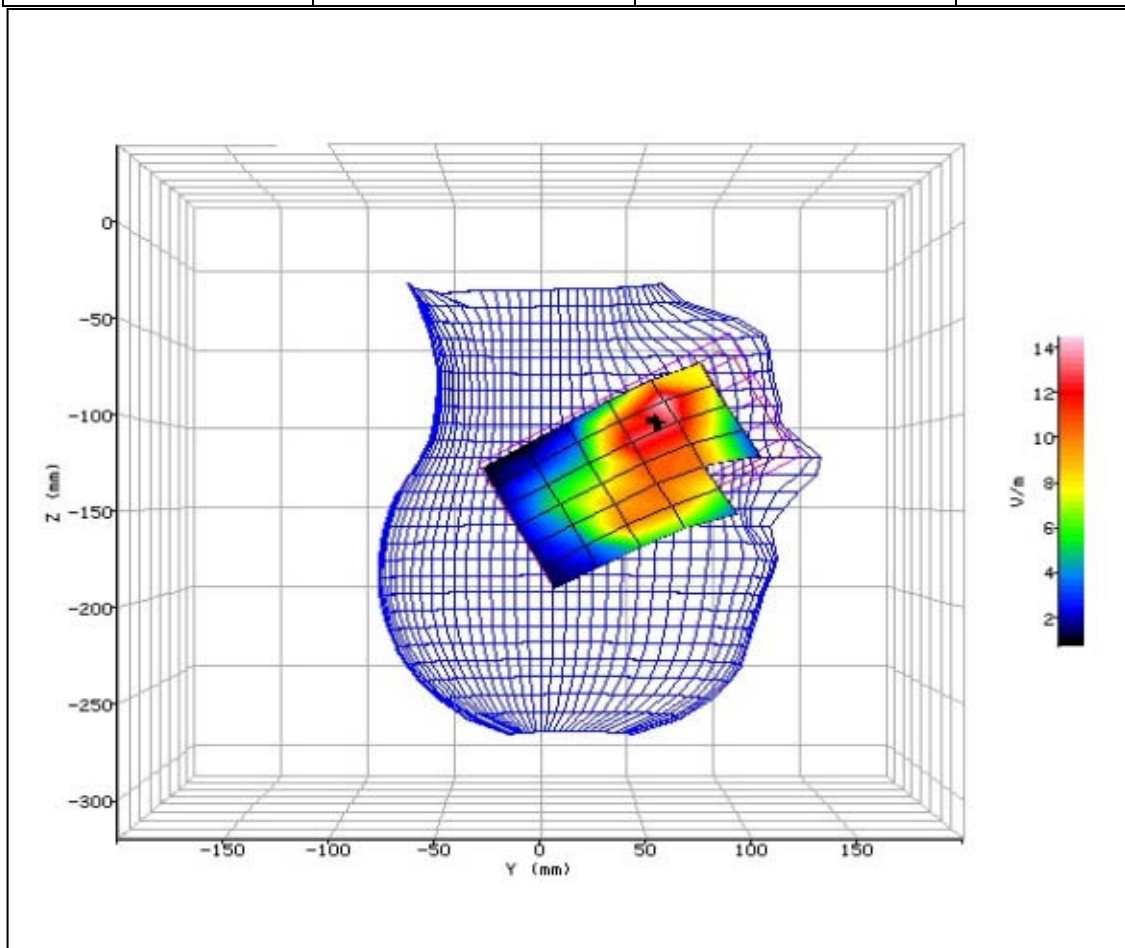


Figure 48: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-13:12:43	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	35.50mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-149.70mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	7.974
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.129 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	12.5%	SAR START:	0.117 W/kg
INPUT POWER LEVEL:	30.4dBm	SAR END:	0.121 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	3.400 %

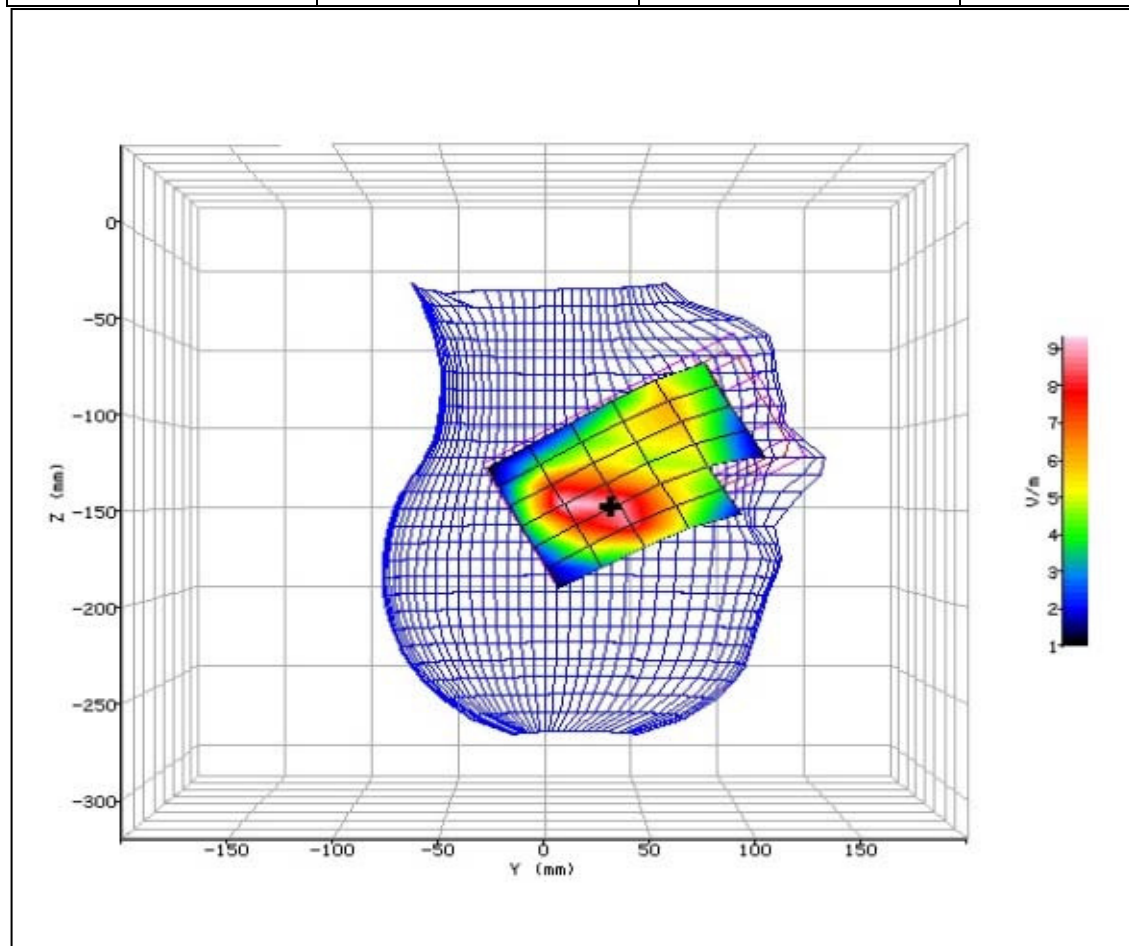


Figure 49: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.



## 2.12 PCS 1900MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-14:20:55	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	59.30mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-100.70mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	11.933
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.260 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.293 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.284 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-3.100 %

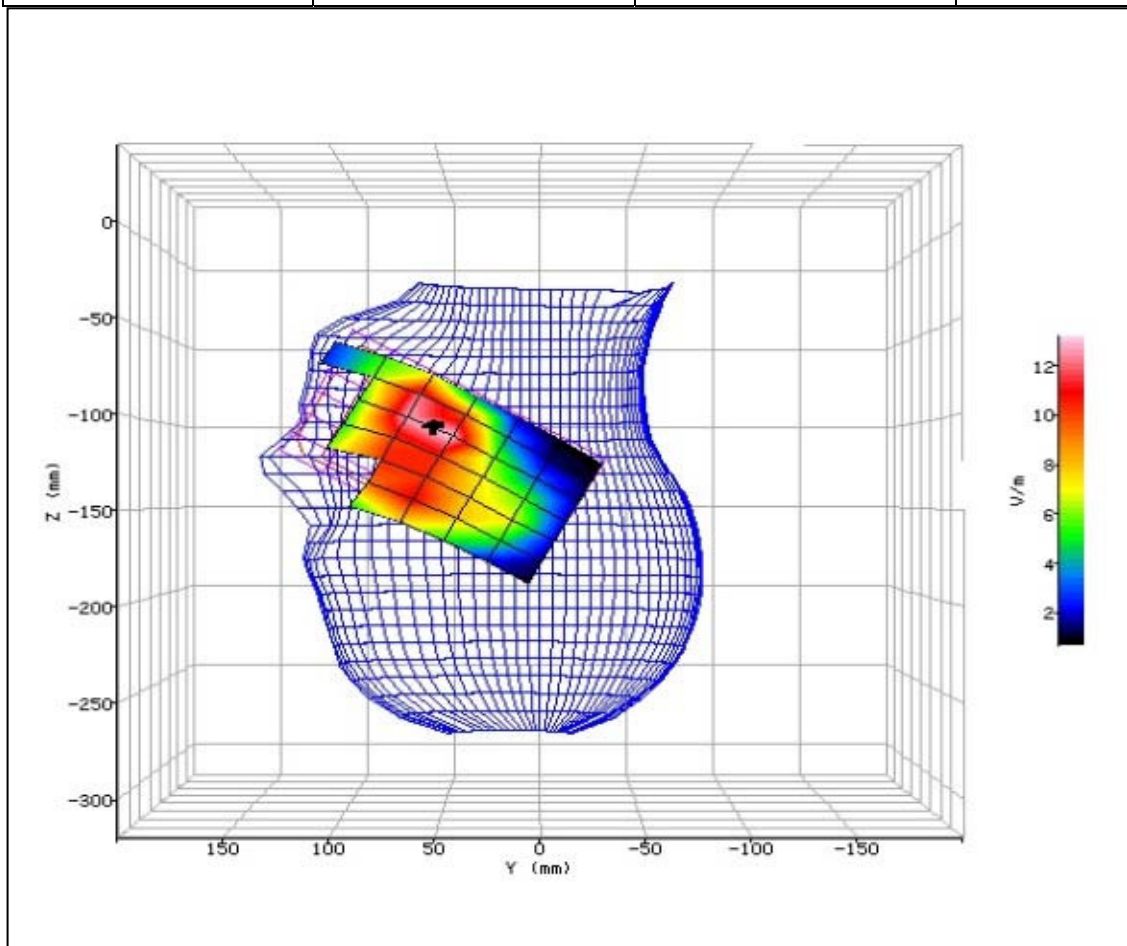


Figure 50: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-14:47:28	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	19.60mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-151.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	8.183
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.154 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.165 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.161 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-2.100 %

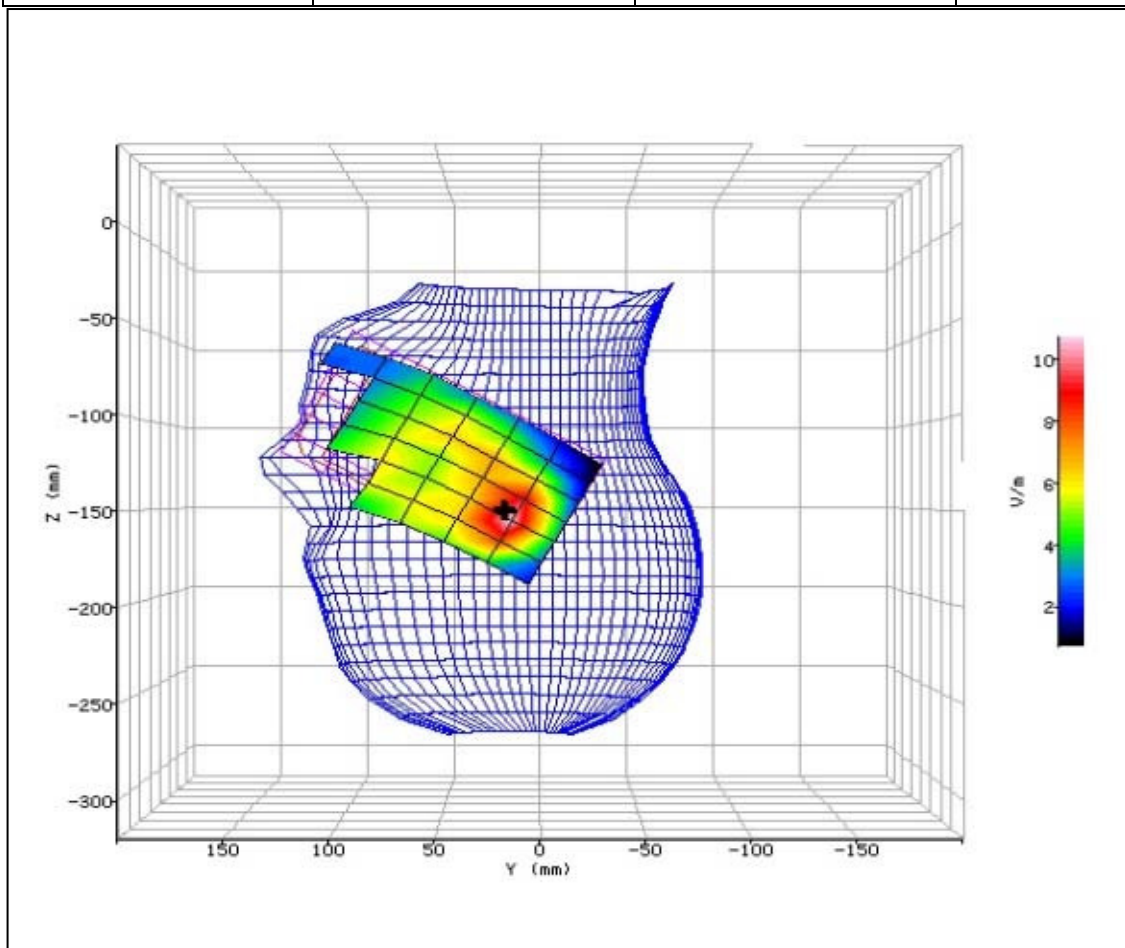


Figure 51: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-15:42:51	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	62.50mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-98.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	14.621
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.499 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.439 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.430 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-2.093 %

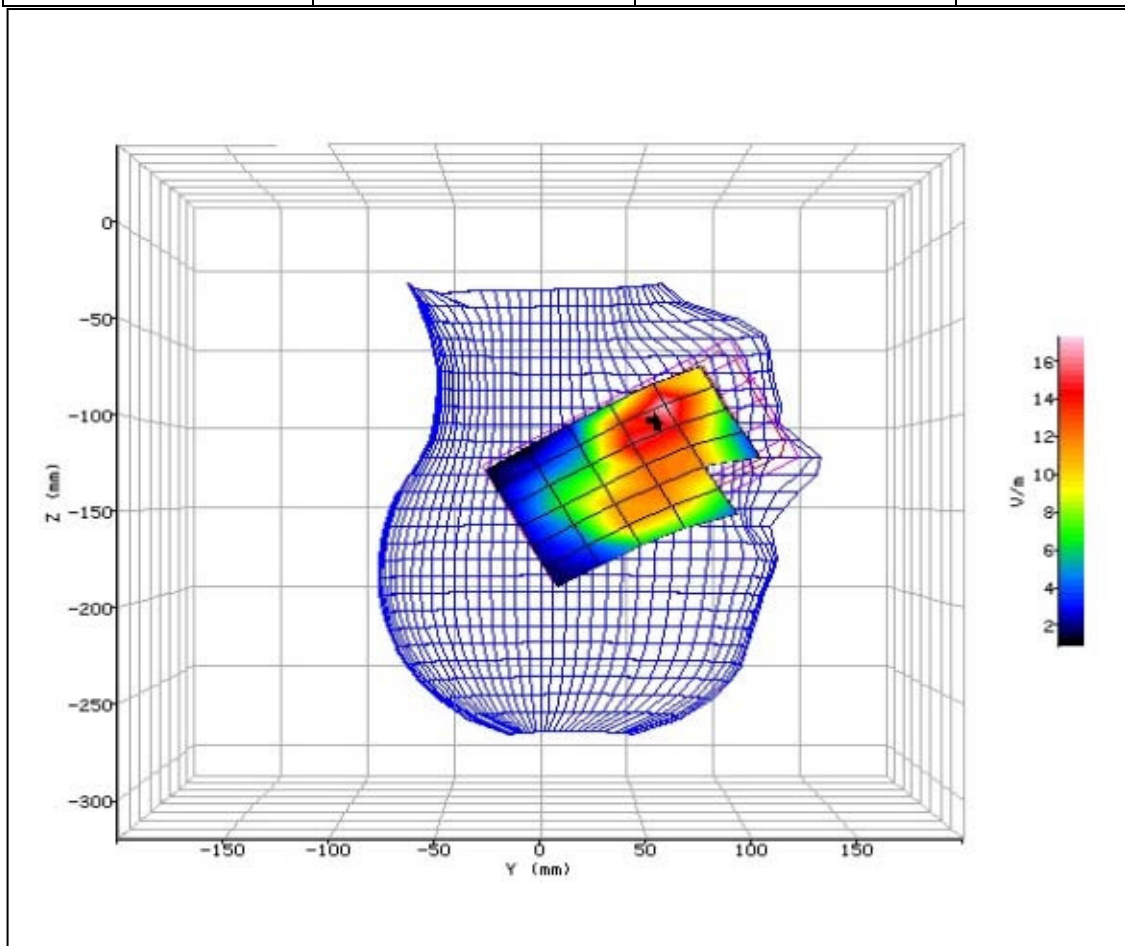


Figure 52: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	25/04/2016-16:48:12	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	39.93
RELATIVE HUMIDITY:	34.60%	CONDUCTIVITY:	1.447
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.20°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	26.50mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-147.60mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.080
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.177 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.158 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.155 W/kg
PROBE BATTERY LAST CHANGED:	25/04/2016	SAR DRIFT DURING SCAN:	-2.500 %

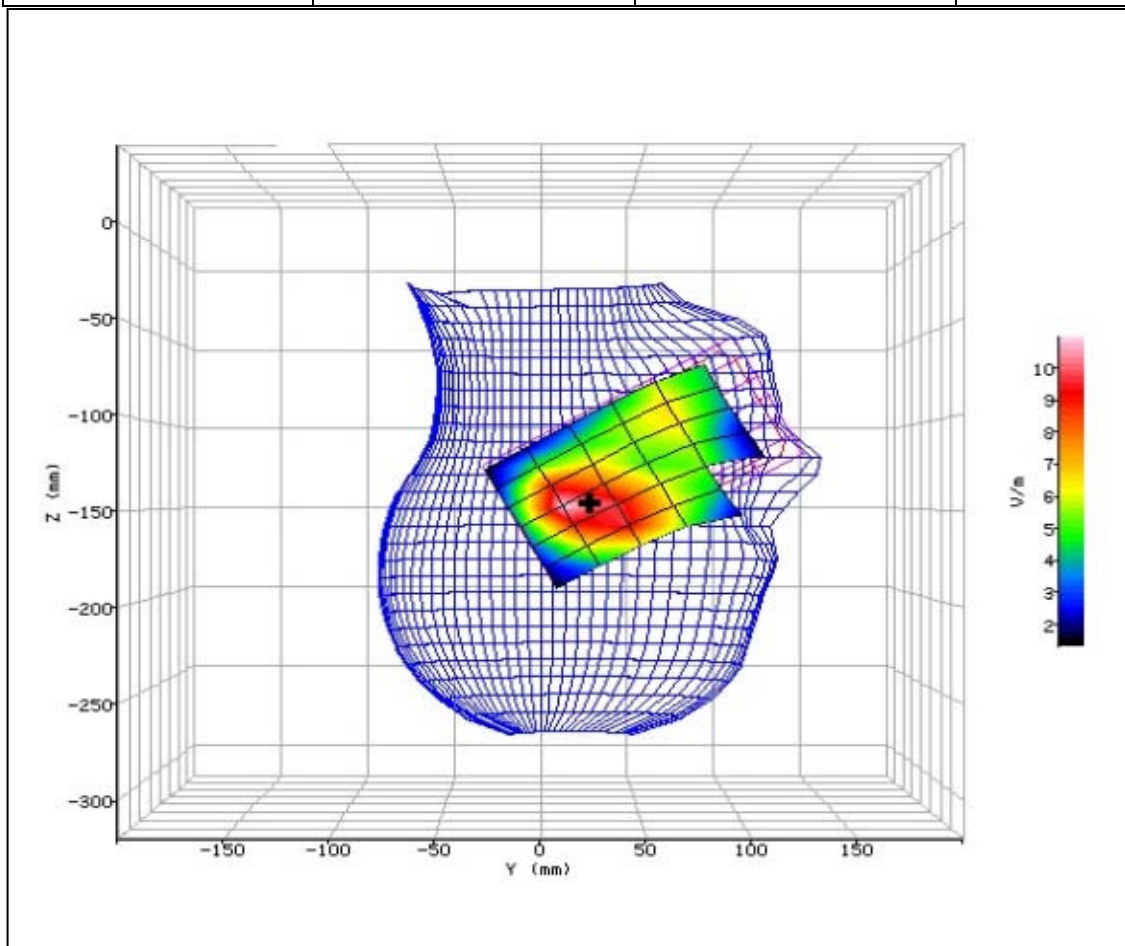


Figure 53: SAR Head Testing Results for the Sharp Smart phone at 1909.8MHz.



## 2.13 PCS 1900MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-16:02:23	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	23.20°C	LIQUID SIMULANT:	1900Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.44
RELATIVE HUMIDITY:	45.30%	CONDUCTIVITY:	1.587
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	48.30mm
DUT POSITION:	10mm-Front Facing	MAX SAR Y-AXIS LOCATION:	-6.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	17.546
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.525 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.553 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.548 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	-0.900 %

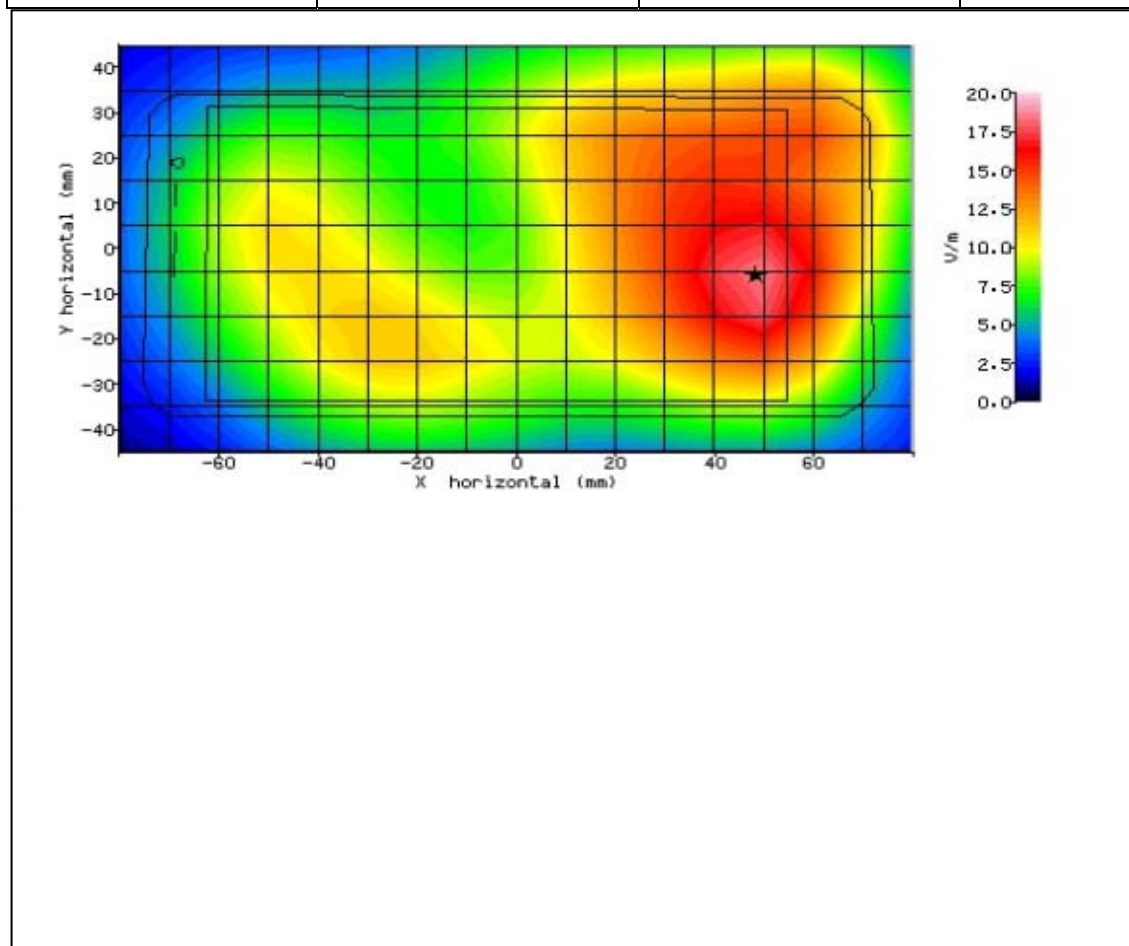


Figure 54: SAR Body Testing Results for the Sharp Smart phone at 1909.8MHz.





SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-16:21:44	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	23.20°C	LIQUID SIMULANT:	1900Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.44
RELATIVE HUMIDITY:	45.30%	CONDUCTIVITY:	1.587
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	42.70mm
DUT POSITION:	10mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	5.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	17.118
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.486 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.515 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.498 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	-3.300 %

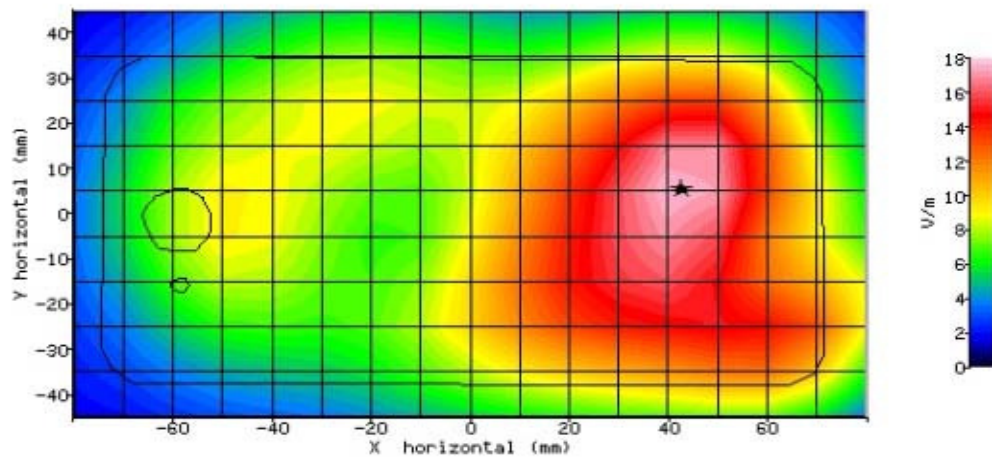


Figure 55: SAR Body Testing Results for the Sharp Smart phone at 1909.8MHz.



SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-15:11:50	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	23.20°C	LIQUID SIMULANT:	1900Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.44
RELATIVE HUMIDITY:	45.30%	CONDUCTIVITY:	1.587
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	43.40mm
DUT POSITION:	10mm-Left Edge	MAX SAR Y-AXIS LOCATION:	1.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	14.565
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.365 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.380 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.377 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	-0.900 %

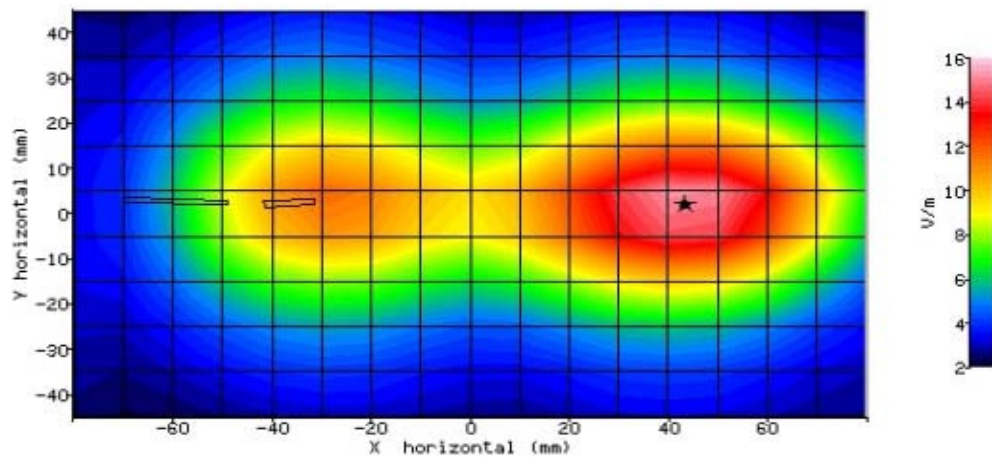


Figure 56: SAR Body Testing Results for the Sharp Smart phone at 1909.8MHz.



Product Service

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	27/04/2016-15:30:50	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	23.20°C	LIQUID SIMULANT:	1900Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	54.44
RELATIVE HUMIDITY:	45.30%	CONDUCTIVITY:	1.587
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.00°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-2.00mm
DUT POSITION:	10mm-Bottom Edge	MAX SAR Y-AXIS LOCATION:	-1.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	10.481
TEST FREQUENCY:	1909.8MHz	SAR 1g:	0.192 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR 10g:	-
MODN. DUTY CYCLE:	50%	SAR START:	0.198 W/kg
INPUT POWER LEVEL:	25.2dBm	SAR END:	0.196 W/kg
PROBE BATTERY LAST CHANGED:	27/04/2016	SAR DRIFT DURING SCAN:	-1.100 %

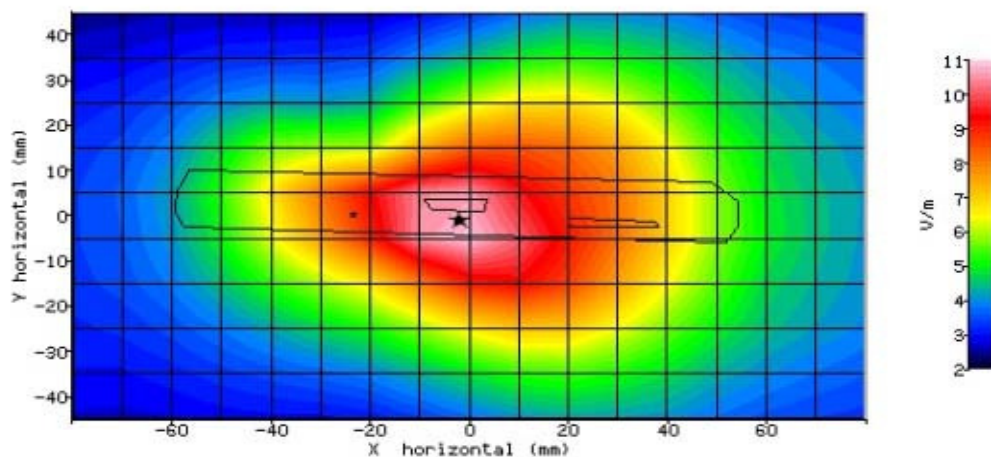


Figure 57: SAR Body Testing Results for the Sharp Smart phone at 1909.8MHz.



## 2.14 WLAN 2450MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	26/04/2016-09:33:03	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	22.90°C	LIQUID SIMULANT:	2450Head
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	38.81
RELATIVE HUMIDITY:	42.30%	CONDUCTIVITY:	1.836
PHANTOM S/NO:	IXB-040	LIQUID TEMPERATURE:	22.80°C
PHANTOM ROTATION:	N/A	MAX SAR Y-AXIS LOCATION:	38.30mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-165.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.492
TEST FREQUENCY:	2462.0MHz	SAR 1g:	0.289 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.196 W/kg
INPUT POWER LEVEL:	16.5dBm	SAR END:	0.188 W/kg
PROBE BATTERY LAST CHANGED:	26/04/2016	SAR DRIFT DURING SCAN:	-3.800 %

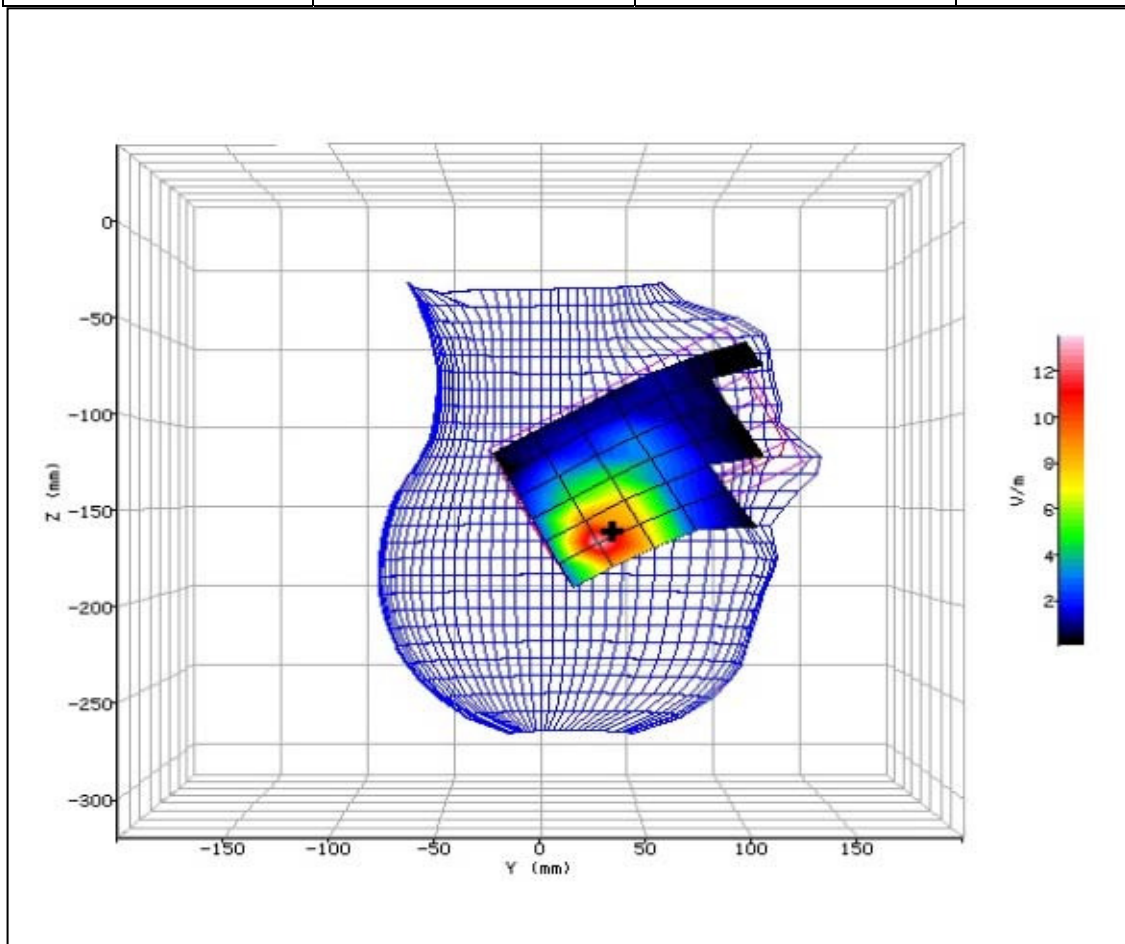


Figure 58: SAR Head Testing Results for the Sharp Smart phone at 2462.0MHz.



## 2.15 WLAN 2450MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.09.22	INPUT POWER DRIFT:	0 dB
DATE / TIME:	28/04/2016-09:40:50	DUT BATTERY MODEL/NO:	Integral
AMBIENT TEMPERATURE:	23.10°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	-	RELATIVE PERMITTIVITY:	52.13
RELATIVE HUMIDITY:	36.60%	CONDUCTIVITY:	1.975
PHANTOM S/NO:	IXB-2HF	LIQUID TEMPERATURE:	23.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-42.50mm
DUT POSITION:	10mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	33.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	10.043
TEST FREQUENCY:	2462.0MHz	SAR 1g:	0.288 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	-
MODN. DUTY CYCLE:	100%	SAR START:	0.314 W/kg
INPUT POWER LEVEL:	16.5dBm	SAR END:	0.307 W/kg
PROBE BATTERY LAST CHANGED:	28/04/2016	SAR DRIFT DURING SCAN:	-2.100 %

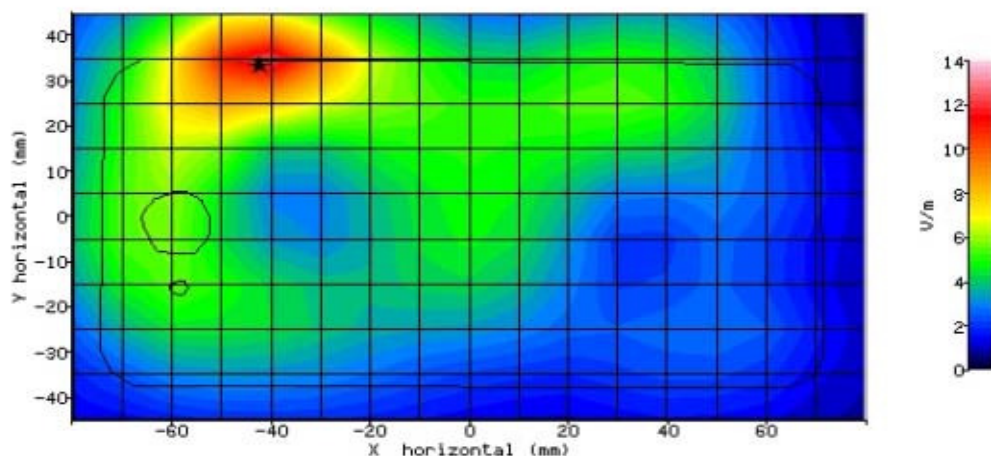


Figure 59: SAR Body Testing Results for the Sharp Smart phone at 2462.0MHz.



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**





### 3.1 TEST EQUIPMENT USED

The following Test equipment used at TÜV SÜD Product Service:

Instrument Description	Manufacturer	Model Type	TE Number	Cal Period (months)	Calibration Due Date
Signal Generator	Hewlett Packard	ESG4000A	38	12	26-May-2016
10MHz - 2.5GHz, 3W, Amplifier	Vectawave Technology	VTL5400	51	-	TU
Directional Coupler	Krytar	1850	58	-	TU
Communications Tester	Rohde & Schwarz	CMU 200	442	-	TU
Attenuator (20dB, 20W)	Narda	766F-20	483	12	3-Jun-2016
Dipole Positioner/Support (plastic)	IndexSar Ltd	IXH-020	1585	-	TU
Bi-directional Coupler	IndexSar Ltd	7401 (VDC0830-20)	2414	-	TU
Antenna (Omnidirectional)	Katherin Scala Division	OG-890/1990/DC	2906	-	TU
Power Meter	Rohde & Schwarz	NRVD	2979	12	19-May-2016
Radio Communications Test Set	Rohde & Schwarz	CMU 200	3035	12	16-Nov-2016
Hygrometer	Rotronic	I-1000	3068	12	20-May-2016
Power Sensor	Rohde & Schwarz	NRV-Z1	3563	12	19-May-2016
Meter & T/C	R.S Components	Meter 615-8206 & Type K T/C	3612	12	06-Oct-2016
SAR 1800 MHz dipole	Speag	D1800V2	3855	36	19-Feb-2017
SAR 835 MHz dipole	Speag	D835V2	3857	36	19-Feb-2017
SAR 700 MHz dipole	IndexSAR	700	4413	36	18-Mar-2017
SAR 2450 MHz dipole	Speag	D2450V2	3875	36	19-Feb-2017
SAR 1900 MHz dipole	Speag	D1900V2	3876	36	19-Feb-2017
Head Phantom	IndexSar Ltd	IXB-040 Inverted SAM phantom	4075	-	TU
Part of SARAC System	IndexSar Ltd	Robot Controller	4076	-	TU
Head Phantom	IndexSar Ltd	IXB-040 Inverted SAM phantom	4254	-	TU
hold handsets against SAM Phantom during testing	IndexSar Ltd	Handset Holder	4257	-	TU
Spacer used to raise body phantom	IndexSar Ltd	Body Phantom Spacer	4258	-	TU
hold handsets against SAM Phantom	IndexSar Ltd	Handset Holder	4265	-	TU
Part of SARAC System	IndexSar Ltd	Wooden Bench	4266	-	TU
Part of SARAC System	IndexSar Ltd	Robot Controller	4267	-	TU
Cartesian 4-axis Robot	IndexSar Ltd	SARAC	4269	-	TU
Part of SARAC System	IndexSar Ltd	White Benchtop	4270	-	TU
Immersible SAR Probe	IndexSar Ltd	IPX-050	4313	24	13-Mar-2017
Flat Phantom	IndexSar Ltd	IXB-2HF 700-6000MHz	4399	-	TU
Flat Phantom	IndexSar Ltd	IXB-2HF 700-6000MHz	4400	-	TU
SAR Probe	IndexSar Ltd	IPX-020	4317	24	20-Mar-2017
700MHz Head Fluid	IndexSar Ltd	Batch 1	N/A	1	15-May-2016
700MHz Body Fluid	IndexSar Ltd	Batch 1	N/A	1	15-May-2016
835MHz Head Fluid	IndexSar Ltd	Batch 21	N/A	1	15-May-2016
835MHz Body Fluid	IndexSar Ltd	Batch 13	N/A	1	15-May-2016
1900MHz Head Fluid	IndexSar Ltd	Batch 9	N/A	1	15-May-2016
1900MHz Body Fluid	IndexSar Ltd	Batch 5	N/A	1	15-May-2016
2450MHz Head Fluid	IndexSar Ltd	Batch 12	N/A	1	15-May-2016
2450MHz Body Fluid	IndexSar Ltd	Batch 8	N/A	1	15-May-2016

TU - Traceability Unscheduled



Product Service

### 3.2 TEST SOFTWARE

The following software was used to control the TÜV SÜD Product Service SARAC System.

Instrument	Version Number	Date
SARA-C system	v.6.09.22	23 Aug 2015
GLP2 Probe amplifier	Version 2	-



### 3.3 DIELECTRIC PROPERTIES OF SIMULANT LIQUIDS

The fluid properties of the simulant fluids used during routine SAR evaluation meet the dielectric properties required KDB 865665.

#### IEEE 1528 Recipes

Frequency (MHz)	300	450		835	900			1450	1800					1900		1950	2000	2100		2450			3000
Recipe#	1	1	3	1	1	2	3	1	1	2	2	3	1	2	4	1	1	2	2	3	2		
Ingredients (% by weight)																							
1, 2-Propanediol						64.81																	
Bactericide	0.19	0.19	0.50	0.10	0.10		0.50														0.50		
Diacetin			48.90				49.20														49.45		
DGBE								45.41	47.00	13.84	44.92			44.94	13.84	45.00	50.00	50.00	7.99	7.99		7.99	
HEC	0.98	0.96		1.00	1.00																		
NaCl	5.95	3.95	1.70	1.45	1.48	0.79	1.10	0.67	0.36	0.35	0.18	0.64	0.18	0.35					0.16	0.16		0.16	
Sucrose	55.32	56.32		57.00	56.50																		
Triton X-100										30.45				30.45					19.97	19.97		19.97	
Water	37.56	38.56	48.90	40.45	40.92	34.40	49.20	53.80	52.64	55.36	54.90	49.43	54.90	55.36	55.00	50.00	50.00	71.88	71.88	49.75	71.88		
Measured dielectric parameters																							
ε <sub>r</sub>	46.00	43.40	44.30	41.60	41.20	41.80	42.70	40.9	39.3	41.00	40.40	39.20	39.90	41.00	40.10	37.00	36.80	41.10	40.30	39.20	37.90		
σ (S/m)	0.86	0.85	0.90	0.90	0.98	0.97	0.99	1.21	1.39	1.38	1.40	1.40	1.42	1.38	1.41	1.40	1.51	1.55	1.88	1.82	2.46		
Temp (°C)	22	22	20	22	22	22	20	22	22	21	22	20	21	21	20	22	22	20	20	20	20		
Target dielectric parameters (Table 2)																							
ε <sub>r</sub>	45.30	43.50		41.5	41.50		40.50	40.00								39.80		39.20		38.50			
σ (S/m)	0.87	0.87		0.9	0.97		1.20	1.40								1.49		1.80		2.40			
NOTE – Multiple columns for any single frequency are optional recipe #, reference: 1 (Kanda et al. [B185]), 2 (Vigneras [B143]), 3 (Peyman and Gabriel [B119]), 4 (Fukunaga et al [B50])																							

NOTE – Multiple columns for any single frequency are optional recipe #, reference: 1 (Kanda et al. [B185]), 2 (Vigneras [B143]), 3 (Peyman and Gabriel [B119]), 4 (Fukunaga et al [B50])

The dielectric properties of the tissue simulant liquids used for the SAR testing at TÜV SÜD Product Service are as follows:-

Fluid Type and Frequency	Relative Permittivity $\epsilon_R$ ( $\epsilon'$ ) Target	Relative Permittivity $\epsilon_R$ ( $\epsilon'$ ) Measured	Conductivity $\sigma$ Target	Conductivity $\sigma$ Measured
700MHz Head	42.2	42.8	0.89	0.90
700MHz Body	55.7	55.2	0.96	0.99
835MHz Head	41.5	40.5	0.90	0.88
835MHz Body	55.2	54.2	0.97	0.98
1900MHz Head	40.0	39.9	1.40	1.44
1900MHz Body	53.3	54.4	1.52	1.58
2450 MHz Head	39.2	38.8	1.80	1.83
2450MHz Body	52.7	52.1	1.95	1.97



### 3.4 TEST CONDITIONS

#### 3.4.1 Test Laboratory Conditions

Ambient temperature: Within +15°C to +35°C.

The actual temperature during the testing ranged from 22.0°C to 23.2°C.

The actual humidity during the testing ranged from 29.8% to 48.3% RH.

#### 3.4.2 Test Fluid Temperature Range

Frequency	Body / Head Fluid	Min Temperature °C	Max Temperature °C
700MHz	Head	22.8	22.8
700MHz	Body	22.9	22.9
835MHz	Head	22.5	22.8
835MHz	Body	22.5	22.7
1900MHz	Head	22.2	22.2
1900MHz	Body	23.2	23.2
2450MHz	Head	22.9	22.9
2450MHz	Body	23.1	23.1

#### 3.4.3 SAR Drift

The SAR Drift was within acceptable limits during scans. The maximum SAR Drift, drift due to the handset electronics, was recorded as 7.2% (0.933 dB) for head and 5.2% (0.951 dB) for body. The measurement uncertainty budget for this assessment includes the maximum SAR Drift figures for Head and/or Body as applicable.



### 3.5 MEASUREMENT UNCERTAINTY

Head SAR Measurements.

Source of Uncertainty	Description	Tolerance / Uncertainty $\pm$ %	Probability distribution	Div	$C_i$ (1g)	Standard Uncertainty $\pm$ % (1g)	$V_i$ or $V_{eff}$
<i>Measurement System</i>							
Probe calibration	7.2.1	8.73	N	1	1	8.73	$\infty$
Isotropy	7.2.1.2	3.18	R	1.73	1	1.84	$\infty$
Probe angle >30deg	additional	12.00	R	1.73	1	6.93	$\infty$
Boundary effect	7.2.1.5	0.49	R	1.73	1	0.28	$\infty$
Linearity	7.2.1.3	1.00	R	1.73	1	0.58	$\infty$
Detection limits	7.2.1.4	0.00	R	1.73	1	0.00	$\infty$
Readout electronics	7.2.1.6	0.30	N	1	1	0.30	$\infty$
Response time	7.2.1.7	0.00	R	1.73	1	0.00	$\infty$
Integration time (equiv.)	7.2.1.8	1.38	R	1.73	1	0.80	$\infty$
RF ambient conditions	7.2.3.6	3.00	R	1.73	1	1.73	$\infty$
Probe positioner mech. restrictions	7.2.2.1	5.35	R	1.73	1	3.09	$\infty$
Probe positioning with respect to phantom shell	7.2.2.3	5.00	R	1.73	1	2.89	$\infty$
Post-processing	7.2.4	7.0	R	1.73	1	5.20	$\infty$
<i>Test sample related</i>							
Test sample positioning	7.2.2.4	1.50	R	1.73	1	0.87	$\infty$
Device holder uncertainty	7.2.2.4.2	1.73	R	1.73	1	1.00	$\infty$
Drift of output power	7.2.3.4	7.2	R	1.73	1	4.16	$\infty$
<i>Phantom and set-up</i>							
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	2.01	R	1.73	1	1.16	$\infty$
Liquid conductivity (target)	7.2.3.3	5.00	R	1.73	0.64	1.85	$\infty$
Liquid conductivity (meas.)	7.2.3.3	5.00	N	1	0.64	3.20	$\infty$
Liquid permittivity (target)	7.2.3.4	5.00	R	1.73	0.6	1.73	$\infty$
Liquid permittivity (meas.)	7.2.3.4	3.00	N	1	0.6	1.80	$\infty$
Combined standard uncertainty			RSS			11.04	
Expanded uncertainty (95% confidence interval)			K=2			22.07	



## Body SAR Measurements.

Source of Uncertainty	Description	Tolerance / Uncertainty $\pm \%$	Probability distribution	Div	$c_i$ (1g)	Standard Uncertainty $\pm \%$ (1g)	$V_i$ or $V_{eff}$
<i>Measurement System</i>							
Probe calibration	7.2.1	8.73	N	1	1	8.73	$\infty$
Isotropy	7.2.1.2	3.18	R	1.73	1	1.84	$\infty$
Boundary effect	7.2.1.5	0.49	R	1.73	1	0.28	$\infty$
Linearity	7.2.1.3	1.00	R	1.73	1	0.58	$\infty$
Detection limits	7.2.1.4	0.00	R	1.73	1	0.00	$\infty$
Readout electronics	7.2.1.6	0.30	N	1	1	0.30	$\infty$
Response time	7.2.1.7	0.00	R	1.73	1	0.00	$\infty$
Integration time (equiv.)	7.2.1.8	1.38	R	1.73	1	0.80	$\infty$
RF ambient conditions	7.2.3.6	3.00	R	1.73	1	1.73	$\infty$
Probe positioner mech. restrictions	7.2.2.1	0.60	R	1.73	1	0.35	$\infty$
Probe positioning with respect to phantom shell	7.2.2.3	2.00	R	1.73	1	1.15	$\infty$
Post-processing	7.2.4	7.00	R	1.73	1	4.04	$\infty$
<i>Test sample related</i>							
Test sample positioning	7.2.2.4	1.50	R	1.73	1	0.87	$\infty$
Device holder uncertainty	7.2.2.4.2	1.73	R	1.73	1	1.00	$\infty$
Drift of output power	7.2.3.4	5.2	R	1.73	1	3.0	$\infty$
<i>Phantom and set-up</i>							
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	2.01	R	1.73	1	1.16	$\infty$
Liquid conductivity (target)	7.2.3.3	5.00	R	1.73	0.64	1.85	$\infty$
Liquid conductivity (meas.)	7.2.3.3	5.00	N	1	0.64	3.20	$\infty$
Liquid permittivity (target)	7.2.3.4	5.00	R	1.73	0.6	1.73	$\infty$
Liquid permittivity (meas.)	7.2.3.4	3.00	N	1	0.6	1.80	$\infty$
Combined standard uncertainty			RSS			10.42	
Expanded uncertainty (95% confidence interval)			K=2			20.84	





Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service



Product Service

## **ANNEX A**

### **PROBE CALIBRATION REPORT**



Product Service




**IMMERSIBLE SAR PROBE**

**CALIBRATION REPORT**

**Part Number: IXP-020**

**S/N L0020**

**March 2015**

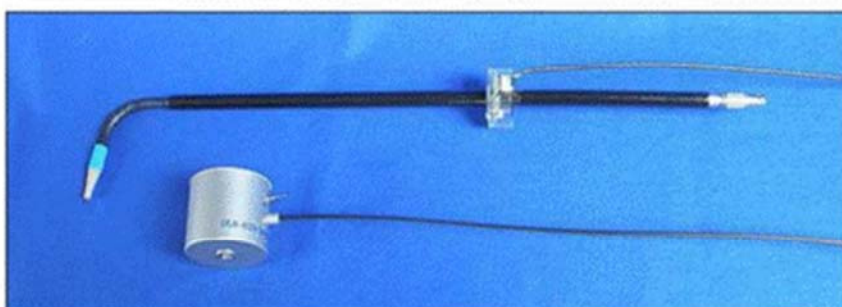

**Indexsar Limited  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey RH5 5BG**

**Tel: +44 (0) 1306 632 870**

**Fax: +44 (0) 1306 631 834**

**e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)**

Reproduction of this report is authorized by Indexsar Ltd provided the report is reproduced in its entirety



Product Service



**Indexsar Limited**  
**Oakfield House**  
**Cudworth Lane**  
**Newdigate**  
**Surrey RH5 5BG**

Tel: +44 (0) 1306 632 870


Fax: +44 (0) 1306 631 834

e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)

**Calibration Certificate 1503/L0020**  
**Date of Issue: 31 March 2015**  
**Immersible SAR Probe**

Type:	IXP-020
Manufacturer:	IndexSAR, UK
Serial Number:	L0020
Place of Calibration:	IndexSAR, UK
Date of Receipt of Probe:	10 February 2015
Calibration Dates:	13 – 20 March 2015
Customer:	TUV Sud

IndexSAR Ltd hereby declares that the IXP-020 Probe named above has been calibrated for conformity to the current versions of IEEE 1528, IEC 62209-1, IEC 62209-2, and FCC SAR standards, or equivalent, using the methods described in this calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated by:		Technical Manager
----------------	---	-------------------

Approved by:		Director
--------------	---	----------

Please keep this certificate with the calibration document. When the probe is sent for a calibration check, please include the calibration document.



## INTRODUCTION

L-shaped probes are optimised for use on the SARA-C SAR-measuring system. They are not designed to work on SARA2 or any other robot-positioning system, but can be positioned manually if software is available to read out SAR measurement values.

This Report presents measured calibration data for a particular Indextsar SAR probe (S/N L0020) only and describes the procedures used for characterisation and calibration.

Indextsar probes are characterised using procedures that, where applicable, follow the recommendations of IEC 62209-1 [Ref 1], IEEE 1528 [Ref 2], IEC 62209-2 [Ref 3] and FCC SAR [Ref 4] standards, or equivalent. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

## CALIBRATION PROCEDURE

### 1. Objectives

The calibration process comprises the following stages:-

- 1) Determination of the relative channel sensitivity factors which optimise the probe's overall axial isotropy in 900MHz brain fluid.
- 2) Measure the incidental spherical isotropy using these derived channel sensitivity factors.
- 3) Since isotropy and channel sensitivity factors are frequency independent, these channel sensitivity factors can be applied to model the exponential decay of SAR in a waveguide fluid cell at each frequency of interest, and hence derive the liquid conversion factors at that frequency.

### 2. Probe output

The probe channel output signals are linearised in the manner set out in Refs [1] - [4]. The following equation is utilized for each channel:

$$U_{lin} = U_{op} + U_{op}^2 / DCP \quad (1)$$

where  $U_{lin}$  is the linearised signal,  $U_{op}$  is the raw output signal in mV and DCP is the diode compression potential, also in mV.





DCP is determined from fitting equation (1) to measurements of  $U_{lin}$  versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the Schottky diodes used as the sensors. For the IXP-020 probes with CW signals the DCP values are typically 100mV.

For this value of DCP, the typical linearity response of IXP-050 probes to CW and to GSM modulation is shown in Figure 7, along with departures of this same dataset from linearity.

In turn, measurements of E-field are determined using the following equation:

$$E_{liq}^2 (V/m) = U_{linx} * Air Factor_x * Liq Factor_x + U_{liny} * Air Factor_y * Liq Factor_y + U_{linz} * Air Factor_z * Liq Factor_z \quad (3)$$

Here, "Air Factor" represents each channel's sensitivity, while "Liq Factor" represents the enhancement in signal level when the probe is immersed in tissue-simulant liquids at each frequency of interest.

### 3. Selecting channel sensitivity factors to optimise isotropic response

Within SARA-C, an L-probe's predominant mode of operation is with the tip pointing directly towards the source of radiation. Consequently, optimising the probe's response to boresight signals ("axial isotropy") is far more important than optimising its spherical isotropy (where the direction, as well as the polarisation angle, of the incoming radiation must be taken into account).

The setup for measuring the probe's axial isotropy is shown in Figure 1, and this allows spherical isotropy to be measured at the same time. Moreover, since isotropy is frequency-independent, measurements are normally made at a frequency of 900MHz as lower frequencies are more tolerant of positional inaccuracies.

A box phantom containing 900MHz head fluid is irradiated by a tuned dipole, mounted at the side of the phantom on the SARA2 robot's seventh axis. Note: although the probe is used on SARA-C, it is actually calibrated on SARA2. The dipole is connected to a signal generator and amplifier via a directional coupler and power meter. The absolute power level is not important as long as it is stable, with stability being monitored using the coupler and power meter.

During calibration, the spherical isotropy response is measured by changing the orientation of the probe sensors with respect to the dipole, while keeping the long shaft of the probe vertical and the probe sensors at precisely the same position in space. Correctly aligning the probe sensors in this way is essential to an accurate measurement of isotropy.

Initially, the short shaft of the probe is positioned parallel to the phantom wall with its sensors at the same vertical height as the centre of the source dipole and the line joining sensors to dipole perpendicular to the phantom wall (see



Figure 1). In this position, the probe is said to be at a position angle of -90 degrees. During the scan, the probe is rotated from -90 to +90 degrees in 10 degree steps, and at each position angle, the dipole polarisation changes from 0 to 360 degrees in 20 degree steps. The short shaft of the probe thereby starts moving increasingly end-on to the dipole, and after passing through perpendicularity, it carries on until facing in the opposite direction from its starting position, all the time with the centroid of the sensors occupying the same position in space.

While all relative probe and dipole orientations contribute to the probe's spherical isotropy response, only the subset of measurements made when the probe is exactly end-on to the dipole, contributes to the calculation of axial isotropy. The relative channel sensitivities can be adjusted either to give the most uniform response to all incoming directions and polarisations (spherical isotropy) or just to boresight signals (axial isotropy). Unfortunately, in practice, the two isotropies are not mutually optimisable by the same relative channel gains, so a choice must be made based on the usual mode of operation. That is why Indexsar optimises for Axial Isotropy.

At each probe position/dipole polarisation pair, an Indexsar 'Fast' amplifier samples the probe channels 500 times per second for 0.4 s. The raw  $U_{\text{op}}$  data from each sample are packed into 10 bytes and transmitted back to the PC controller via an optical cable.  $U_{\text{linx}}$ ,  $U_{\text{liny}}$  and  $U_{\text{linz}}$  are derived from the raw  $U_{\text{op}}$  values and written to an Excel template.

Once a full set of data has been collected, the Air Factors are adjusted using a special Excel Solver routine to equalise the output from each channel and hence minimise the axial isotropy (see Figure 3). This automated approach to optimisation removes the effect of human bias. These optimised channel sensitivity values can then be applied to the entire dataset as a check on the resulting spherical isotropy, as shown in Figure 4.

#### 4. Determination of Conversion ("Liquid") Factors at each frequency of interest

A lookup table of conversion factors for a probe allows a SAR value to be derived at the measured frequencies, and for either brain or body fluid-simulant.

The method by which the conversion factors are assessed is based on the comparison between measured and analytical rates of decay of SAR with perpendicular distance from a dielectric window. This way, not only can the conversion factors for that frequency/fluid combination be determined, but an allowance can also be made for the scale and range of boundary layer effects.

The theoretical relationship between the SAR at the cross-sectional centre of the lossy waveguide as a function of the longitudinal distance ( $z$ ) from the dielectric separator is given by Equation 4:



$$SAR(z) = \frac{4(P_f - P_b)}{\rho ab \delta} e^{-2z/\delta} \quad (4)$$

Here, the density  $\rho$  is conventionally assumed to be  $1000 \text{ kg/m}^3$ ,  $ab$  is the cross-sectional area of the waveguide, and  $P_f$  and  $P_b$  are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth  $\delta$  (which is the reciprocal of the waveguide-mode attenuation coefficient) is a property of the lossy liquid and is given by Equation (5).

$$\delta = \left[ \text{Re} \left\{ \sqrt{(\pi/a)^2 + j\omega\mu_0(\sigma + j\omega\epsilon_0\epsilon_r)} \right\} \right]^{-1} \quad (5)$$

where  $\sigma$  is the conductivity of the tissue-simulant liquid in S/m,  $\epsilon_r$  is its relative permittivity, and  $\omega$  is the radial frequency (rad/s). Values for  $\sigma$  and  $\epsilon_r$  are obtained prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2].  $\sigma$  and  $\epsilon_r$  are both temperature- and fluid-dependent, so are best measured using a sample of the tissue-simulant fluid immediately prior to the actual calibration.

Wherever possible, all DiLine and calibration measurements should be made in the open laboratory at  $22 \pm 2.0^\circ\text{C}$ ; if this is not possible, the values of  $\sigma$  and  $\epsilon_r$  should reflect the actual temperature. Values employed for calibration are listed in the tables below.

Dedicated waveguides have been designed to accommodate the geometry of an L-shaped probe as it traces out the decay profile. Traditional straight probes measure the decay rate of a vertical-travelling signal above a horizontal dielectric window; for the L-shaped probes, the geometry has had to be changed, and the waveguide now lies horizontally and instead of being open at the end, is capped with a metal plate (see Figure 2). A slot is cut in the top ("b") face through which tissue simulant fluid can be poured, and through which the probe can enter the guide and be offered up to the now vertical waveguide window.

During calibration, the probe tip is moved carefully towards the dielectric window until the flat face of the tip is just touching the exact centre of the face. 200 samples are then taken and written to an Excel template file before moving the probe into the liquid away from the waveguide window. This cycle is repeated 150 times at each separation. The spatial separation between readings is determined from practical considerations of the expected SAR decay rate, and range from 0.2mm steps at low frequency, through 0.1mm at 2450MHz, down to 0.05mm at 5GHz.

Once the data collection is complete, a Solver routine is run which optimises the measured-theoretical fit by varying the conversion factor, and the boundary correction size and range.





By ensuring the waveguide cap is at least three penetration depths, reflections are negligible. The power absorbed in the liquid is therefore determined solely from the waveguide forward and reflected power.

Different waveguides are used for 700MHz, 835/900MHz, 1450MHz, 1800/1900MHz, 2100/2450/2600MHz and 5200/5800MHz measurements. Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 20 dB at the most important frequencies used for personal wireless communications, and better than 15dB for frequencies greater than 5GHz. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 5800 MHz because of the waveguide size is not severe in the context of compliance testing.

For calibrations at 450MHz, where waveguide calibrations become unfeasible, a full 3D SAR scan over a tuned dipole is performed, and the conversion factor adjusted to make the measured 1g and 10g volume-averaged SAR values agree with published targets.

#### **CALIBRATION FACTORS MEASURED FOR PROBE S/N L0020**

The probe was calibrated at 835, 900, 1800, 1900, 2100, and 2450 MHz in liquid samples representing brain liquid at these frequencies.

The calibration was for CW signals only, and the horizontal axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation.

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 mm from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software. The distance of 2.7mm for assembled probes has been confirmed by taking X-ray images of the probe tips (see Figure 9).

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

#### **CALIBRATION EQUIPMENT**

The Table on page **Error! Bookmark not defined.** indicates the calibration status of all test equipment used during probe calibration.



## MEASUREMENT UNCERTAINTIES

A complete measurement uncertainty analysis for the SARA-C measurement system has been published in Reference [3]. Table 17 from that document is re-created below, and lists the uncertainty factors associated just with the calibration of probes.

Source of uncertainty	Uncertainty value $\pm$ %	Probability distribution	Divisor	$c_i$	Standard uncertainty $u_i \pm$ %	$v_i$ or $v_{eff}$
Forward power	3.92	N	1.00	1	3.92	=
Reflected power	4.09	N	1.00	1	4.09	=
Liquid conductivity	1.308	N	1.00	1	1.31	=
Liquid permittivity	1.271	N	1.00	1	1.27	=
Field homogeneity	3.0	R	1.73	1	1.73	=
Probe positioning	0.22	R	1.73	1	0.13	=
Field probe linearity	0.2	R	1.73	1	0.12	=
Combined standard uncertainty		RSS			6.20	

At the 95% confidence level, therefore, the expanded uncertainty is 12.4%

## SUMMARY OF CAL FACTORS FOR PROBE IXP-020 S/N L0020

Relative Channel Sensitivities (to optimise Axial Isotropy)				
	X	Y	Z	
Air Factors	80.28	89.04	70.68	$(V/m)^2/mV$
CW DCPs	100	100	100	mV

SAR Conversion Factors/ Boundary Corrections (Head Fluid)				
Frequency* (MHz)	SAR Conv Factor	Boundary Correction $f(0)$	Boundary Correction $d(mm)$	Notes
450	0.272	-	-	3
700	0.272	1.0	1.4	4
835	0.273	0.6	1.7	1,2
900	0.278	0.5	1.8	1,2
1800	0.339	0.6	1.8	1,2
1900	0.355	0.5	2.4	1,2
2100	0.363	0.8	1.6	1,2
2450	0.393	1.3	1.3	1,2
2600	0.416	1.6	1.2	1,2
Notes				
1)	Calibrations done at 22°C $\pm$ 2°C			
2)	Waveguide calibration			
3)	By validation			
4)	By extrapolation			

The valid frequency of SARA-C probe calibrations are  $\pm 100$  MHz ( $F < 300$  MHz) and  $\pm 200$  MHz ( $F > 300$  MHz).

Physical Information	
Sensor offset (mm)	2.7
Elbow – Tip dimension (mm)	84.11

**PROBE SPECIFICATIONS**

Indexsar probe L0020, along with its calibration, is compared with BSEN 62209-1 and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

<b>Dimensions</b>	<b>S/N L0020</b>	<b>BSEN [1]</b>	<b>IEEE [2]</b>
Vertical shaft (mm)	510		
Horizontal shaft (mm)	90		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

<b>Dynamic range</b>	<b>S/N L0020</b>	<b>BSEN [1]</b>	<b>IEEE [2]</b>
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg) N.B. only measured to > 100 W/kg on representative probes	>100	>100	100

<b>Isotropy (measured at 900MHz)</b>		<b>S/N L0020</b>	<b>BSEN [1]</b>	<b>IEEE [2]</b>
Axial	Probe at 0°	0.01	0.5	0.25
	Probe at ±20°	0.16		
Spherical	Probe at ±30°	0.28	N/A	N/A
	Probe at ±60°	0.58		
	Probe at ±90°	0.75		

<b>Construction</b>	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. Outer case materials are PEEK and heat-shrink sleeving.
<b>Chemical resistance</b>	<p>Tested to be resistant to TWEEN and sugar/salt-based simulant liquids but probes should be removed, cleaned and dried when not in use.</p> <p>NOT recommended for use with glycol or soluble oil-based liquids.</p>



**REFERENCES**

References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.

For a specific reference, subsequent revisions do not apply.

For a non-specific reference, the latest version applies.

- [1] IEC 62209-1.  
Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices — Human models, instrumentation, and procedures — Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
- [2] IEEE 1528  
Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- [3] IEC 62209-2  
Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, Instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
- [4] FCC KDB 865664
- [5] Indexsar Report IXS-0300, October 2007.  
Measurement uncertainties for the SARA2 system assessed against the recommendations of BS EN 62209-1:2006
- [6] SARA-C SAR Testing System: Measurement Uncertainty, v1.0.3. October 2011.

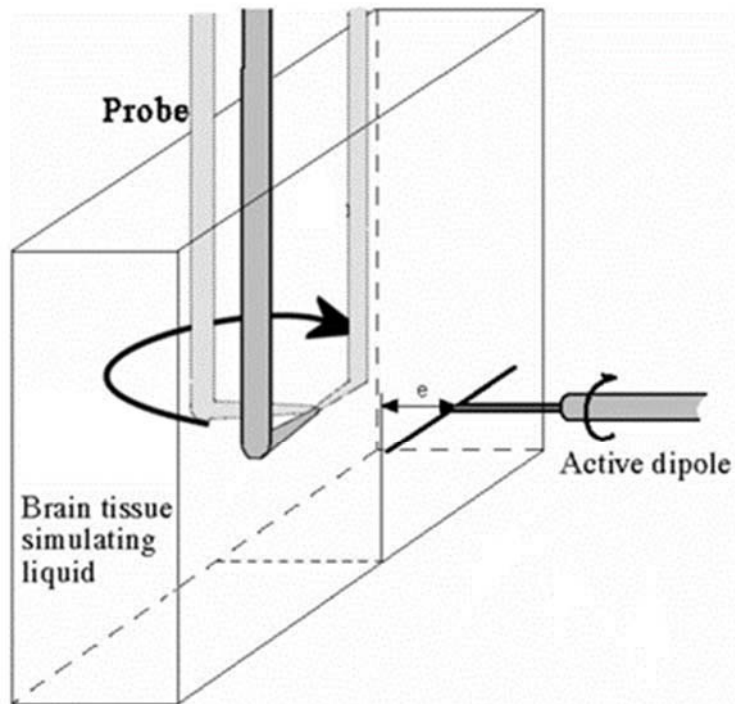


Figure 1 Isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

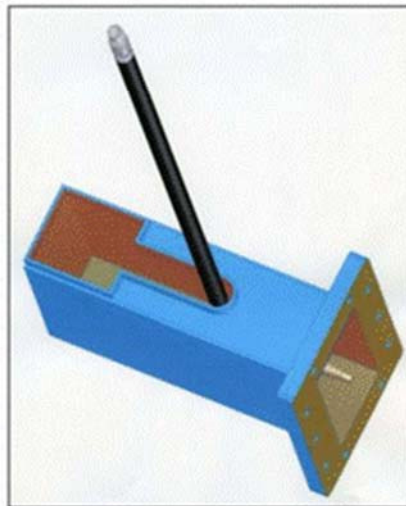


Figure 2 Schematic showing the innovative design of slot in the waveguide termination

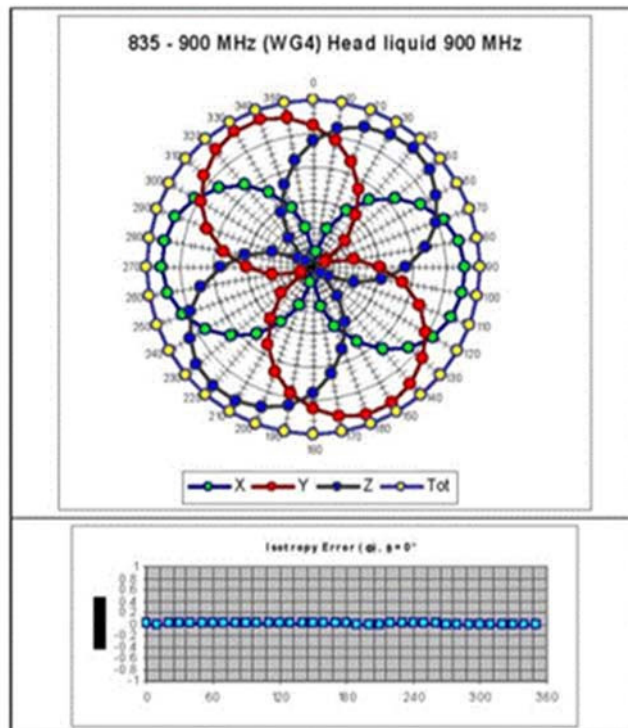


Figure 3 The axial isotropy of probe S/N L0020 obtained by rotating a 900MHz dipole with probe tip aligned with dipole boresight (NB Axial Isotropy is frequency independent)

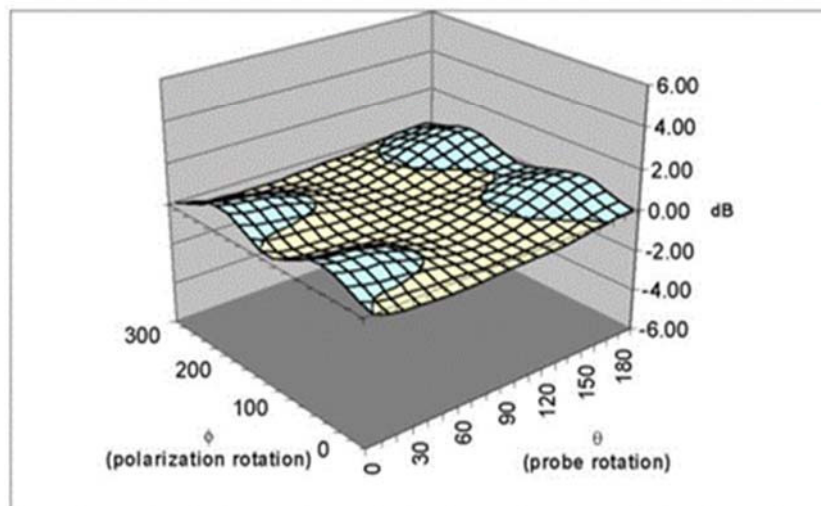


Figure 4 Residual Surface Isotropy at 900 MHz after optimisation for axial isotropy


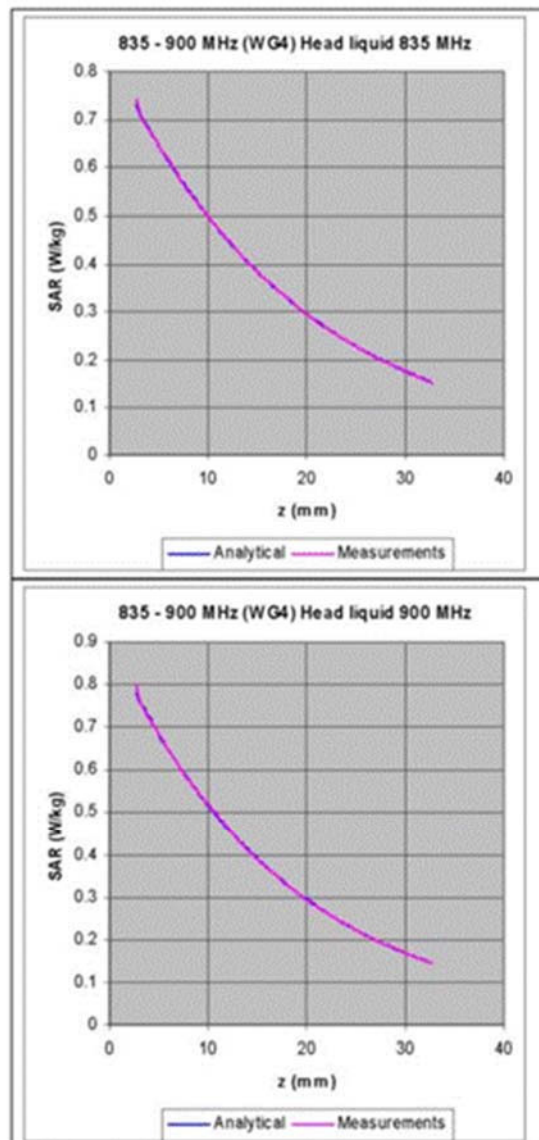


Figure 5 The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

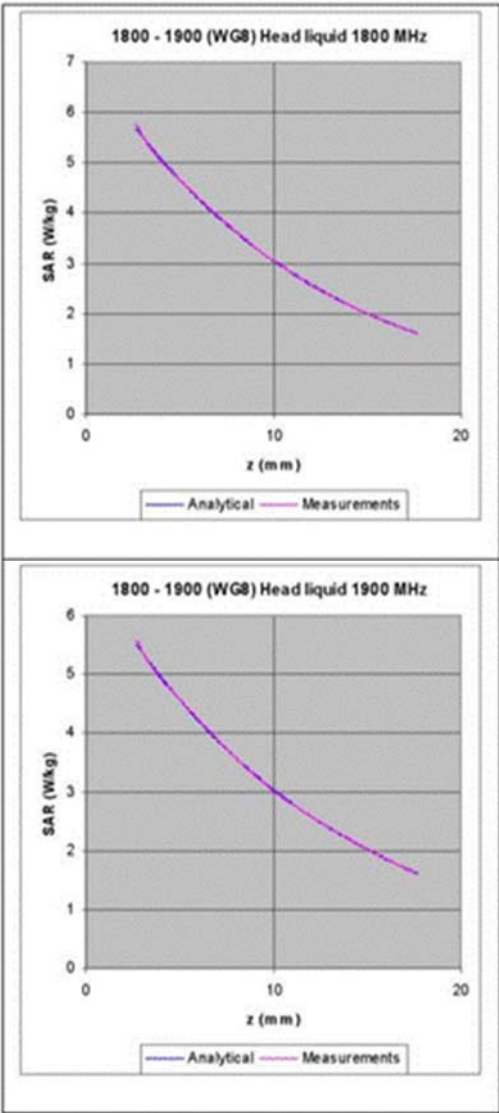

Product Service



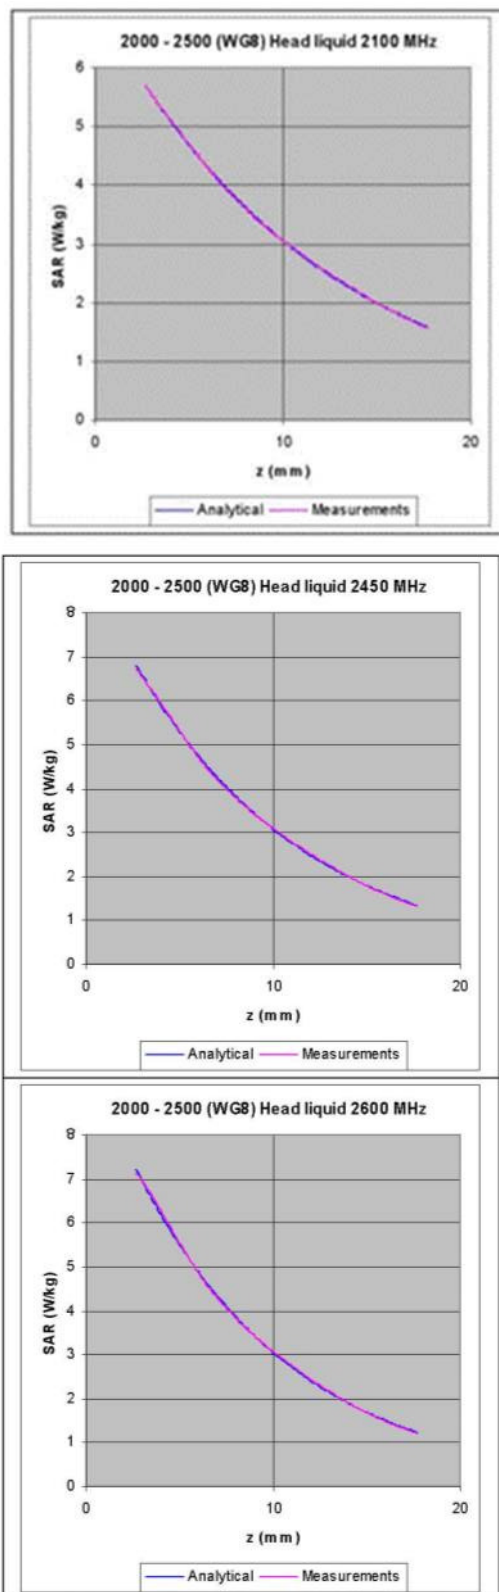


Figure 6. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.



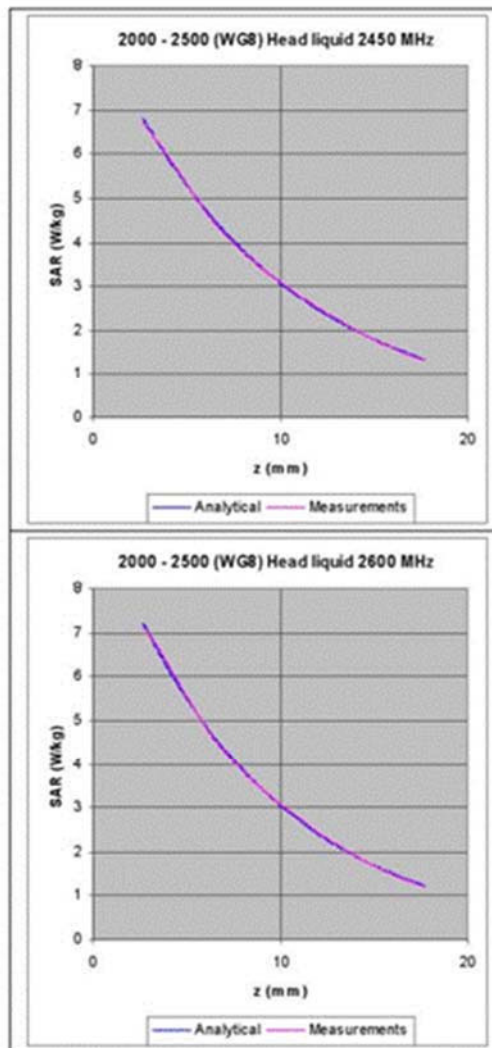


Figure 6. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

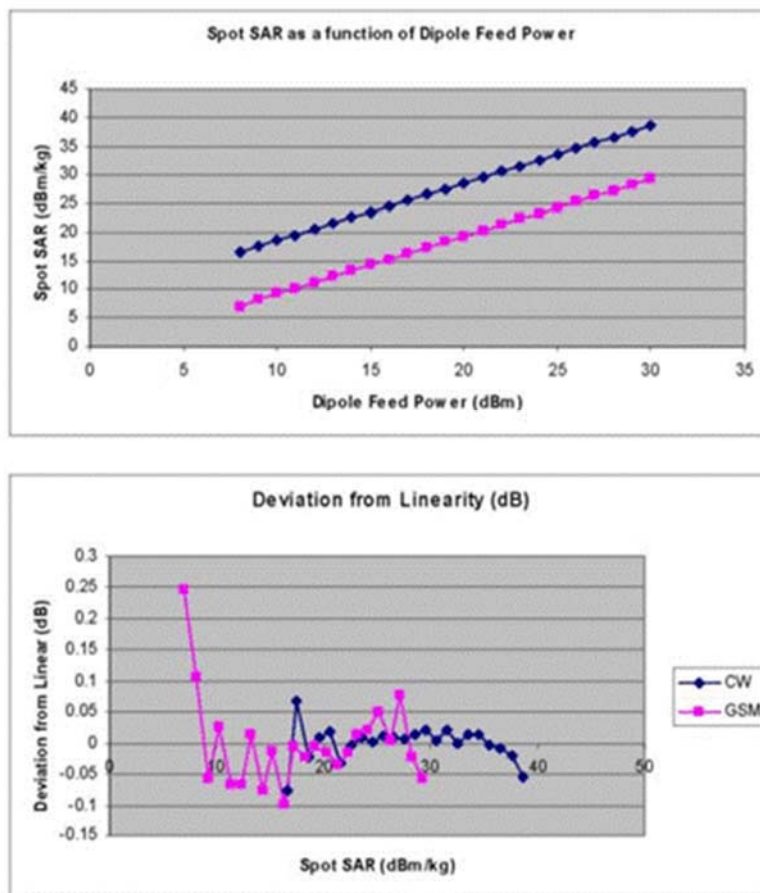


Figure 7: The typical linearity response of 5mm probes to both CW (blue) and GSM (pink) modulation in close proximity to a source dipole. The top diagram shows the SAR reading as a function of dipole feed power, with GSM modulation being approx a factor of 8 (ie 9dB) lower than CW. The lower diagram shows the departure from linearity of the same two datasets.

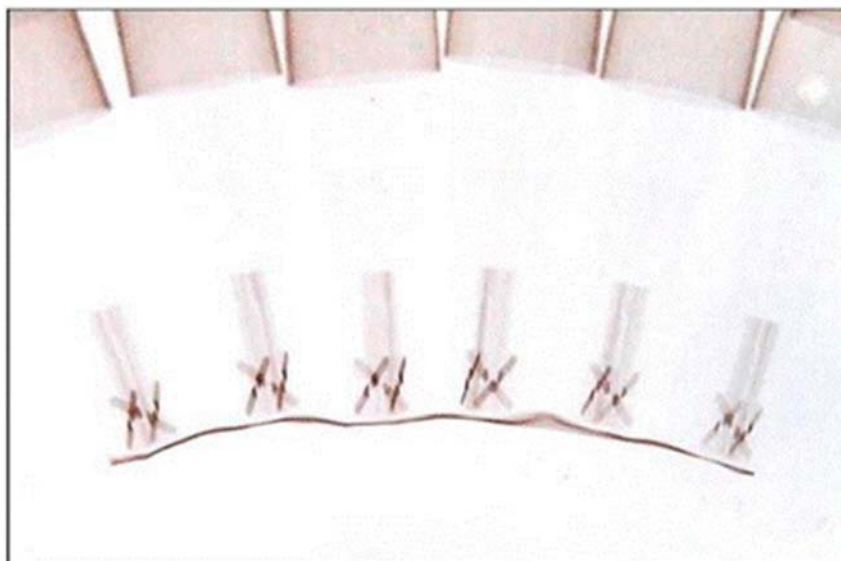


Figure 8 X-ray positive image of 5mm probes



Table indicating the dielectric parameters of the liquids used for calibrations at each frequency

Frequency (MHz)	Fluid Type	Measured		Target		% Deviation		Verdict	
		Relative Permittivity	Conductivity (S/m)	Relative Permittivity	Conductivity (S/m)	Relative Permittivity	Conductivity	Relative Permittivity	Conductivity
450	Head	44.09	0.84	43.5	0.87	1.4	-3.3	Pass	Pass
835		42.14	0.90	41.5	0.90	1.5	0.1	Pass	Pass
900		41.13	0.96	41.5	0.97	-0.9	-0.9	Pass	Pass
1800		39.72	1.43	40.0	1.40	-0.7	2.0	Pass	Pass
1900		39.71	1.41	40.0	1.40	-0.7	0.6	Pass	Pass
2100		40.50	1.48	39.8	1.49	1.8	-0.6	Pass	Pass
2450		39.17	1.85	39.2	1.80	-0.1	2.8	Pass	Pass
2600		38.60	2.01	39.0	1.96	-1.0	2.7	Pass	Pass

Table of test equipment calibration status

Instrument description	Supplier / Manufacturer	Model	Serial No.	Last calibration date	Cal certificate number	See Annex	Calibration due date
Power sensor	Rohde & Schwarz	NRP-Z23	100063	14/08/2013	10-300287035	1	14/08/2015
Power sensor	Rohde & Schwarz	NRP-Z23	100169	06/08/2014	1400-46811	2	06/08/2016
Dielectric property measurement	Indexsar	DiLine (sensor lengths: 160mm, 60mm and 60mm)	N/A	(absolute) – checked against NPL values using reference liquids	N/A		N/A
Vector network analyser	Anritsu	MS6423B	003102	17/02/2015	RMA20027002	3	17/02/2016
SMA autocalibration module	Anritsu	36581KKF/1	001902	22/01/2015	RMA20021769	4	22/01/2016



Product Service

## Annex 1

Calibration Certificate of NRP-Z23 power sensor, S/N 100063

<b>ROHDE &amp; SCHWARZ</b>		
Calibration Certificate		Certificate Number 10-300287035
Kalibrierschein		Zertifikatsnummer
<b>Unit Data</b>		<p>This calibration certificate documents, that the named item is tested and measured against defined specifications.</p> <p>Measurement results are located exactly in the corresponding interval with a probability of approx. 95% (coverage factor <math>k = 2</math>).</p> <p>Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national / international standards, which realize the physical units of measurement according to the International System of Units (SI).</p> <p>In all cases where no standards are available, measurements are referenced to standards of the R&amp;S laboratories.</p> <p>Principles and methods of calibration correspond with EN ISO/IEC 17025. The applied quality system is certified to EN ISO 9001.</p> <p>This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.</p>
Item / Gegenstand	Average power sensor	
Manufacturer / Hersteller	ROHDE & SCHWARZ	
Type / Typ	NRP-Z23	
Material Number / Materialnummer	1137.8002.02	
Asset Number / Inventurnummer		
<b>Order Data</b>		
Customer / Auftraggeber	IndexSAR Ltd	
	Oakfield House, RH5 5BG Newdigate GB	
Order Number / Bestellnummer		
Date of Receipt / Eingangsdatum	2013-08-08	
<b>Performance</b>		
Place and Date of Calibration / Ort und Datum der Kalibrierung	Memmingen, 2013-08-14	
Scope of Calibration / Umfang der Kalibrierung	Standard Calibration	
Statement of Compliance (Receipt) / Konformitätsaussage (Anlieferung)	Measurement results within specifications	
Statement of Compliance (Shipping) / Konformitätsaussage (Auslieferung)	Measurement results within specifications	
Extent of Calibration Documents / Umfang des Kalibrierdokuments	2 Pages Calibration Certificate 17 Pages Outgoing Results 17 Pages Incoming Results	
<b>Rohde &amp; Schwarz GmbH &amp; Co. KG; Service Operations West</b>		
Date of Issue / Ausstellungsdatum	Head of Laboratory / Laborleitung	Person Responsible / Bearbeiter
2013-08-14	 Courage	 Ruprecht Schmid
<small>           ROHDE &amp; SCHWARZ GmbH &amp; Co. KG · Münchenerstraße 15 · D-81871 München, Federal Republic of Germany · Telefon (089) 41 29-0 · Telefax (089) 41 29-132 75            Sitz München · Registerkennz. HRA 18 270 · Persönlich haftender Geschäftsführer: Rüdiger Vorkampff-Greif · Sitz München · Registerkennz. AG München HRB 7 134         </small>		



Product Service

Material Number 1137.8052.82 Serial Number 100043 Certificate Number 10-300287035

Calibration Method  
Kalibrieranweisung NRVC-1109.0930.32Relative Humidity  
Relative Luftfeuchte 20%-60%Ambient Temperature  
Umgebungstemperatur (23  $\pm$  1) °C

Working standards used (having a significant effect on the accuracy) Verwendete Gebrauchsnormen (mit signifikantem Einfluss auf die Genauigkeit)				
Item Gegenstand	Type Typ	Serial Number Seriennummer	Calibration Certificate Number Kalibrierscheinnummer	Cal. Due Kalibr. bis
Dual Channel Powermeter	NRVD	100042	0114 D.K.15195-01-00 2013-08	2014-11-30
Dual Channel Power Meter	NRVD	828583-0023	0113 D.K.15195-01-00 2013-08	2014-11-30
Vector Network Analyzer	ZVM	835228-0020	0102 D.K.15195-01-00 2013-08	2013-09-30
Access Set for Lin. Measurement	NRVC-82	940867-0028	0085 D.K.15195-01-00 2013-01	2014-04-30
Calibration Kit Type-N 50 Ohm	850548	2705A00188	217-dk723 (METAS)	2015-03-31
Power Standard	NRVC	836497-0005	0082 D.K.15195-01-00 2013-01	2014-04-30

Conformity statements take the measurement uncertainties into account.  
Die Konformitätsaussagen berücksichtigen die Messunsicherheiten.

Notes  
Anmerkungen

Installed options are included in calibration. Depending on installed options, numbers of pages of the record are not consecutive.



## Annex 2

Calibration Certificate of NRP-Z23 power sensor, S/N 100169

# ROHDE & SCHWARZ

## Calibration Certificate

### Kalibrierschein

## Certificate Number

## 1400-48811

### Zertifikatsnummer

#### Unit data

Item Gegenstand **AVERAGE POWER SENSOR**

Manufacturer Hersteller **Rohde & Schwarz**

Type Typ **NRP-Z23**

Material number Materialnummer **1137.8002.02**

Serial number ID: **1137.8002.02-100169-aj**  
Ser.: **100169**

Asset number  
Anlagennummer

Recommended Calibration Interval **24 Months**

#### Order data

Customer Auftraggeber **IndexSAR Ltd  
Oakfield House,  
Newdigate RM16 6BG  
  
Great Britain**

On behalf of  
(where applicable)  
In name of  
(Wenn gewünscht)

Order number  
Bestellungsnummer **1024R&S**

Date of receipt  
Eingangdatum **2014-08-06 (yyyy-mm-dd)**

#### Performance

Place and date of calibration  
Ort u. Datum d. Kalibrierung **Fleet; 2014-08-06 (yyyy-mm-dd)**

Scope of calibration  
Umfang der Kalibrierung **Factory Standard Calibration**

Statement of Compliance  
(Incoming)  
Konformitätsaussage  
(Anlieferung) **All measured values are within the data sheet specifications.**

Statement of Compliance  
(Outgoing)  
Konformitätsaussage  
(Auslieferung) **All measured values are within the data sheet specifications.**

Extent of calibration documents  
Umfang der Kalibrierdokumente **2 Pages Calibration Certificate  
40 Pages Calibration Reports  
2 Pages Incoming Report**

Rohde & Schwarz UK

Date of issue  
Ausstellungsdatum

Head of laboratory  
Laborleitung

Person responsible  
Bearbeiter

2014-08-06 (yyyy-mm-dd)

Carol McKenzie

Martin Gill

Page (Seite) 1 of 2

ROHDE & SCHWARZ UK Ltd, Ancoats Business Park, Fleet Hampshire, GU11 2UZ, United Kingdom  
Registered in England No. 539697





Product Service

<b>Material number</b> Materialnummer	<b>1137.8002.02</b>	<b>Certificate Number</b> Zertifikatsnummer	<b>1400-48811</b>
<b>Serial number</b> Seriennummer	<b>ID: 1137.8002.02-100169-aj</b> Ser.: 100169		

<b>Calibration instruction</b> Kalibrieranweisung	See first page of calibration results	<b>Date of receipt</b> Eingangsdatum	<b>2014-08-06</b> (mm-dd-yy)
<b>Ambient temperature</b> Umgebungstemperatur	<b>(23 ± 2) °C</b>	<b>Relative humidity</b> Relative Luftfeuchte	<b>20 % - 60 %</b>

This calibration fulfils the requirements of the standard / guideline  
Diese Kalibrierung entspricht den Forderungen der Norm / Richtlinie

Working standards used (having a significant effect on the accuracy) Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit)				
Item Gegenstand	Type Typ	Serial number Seriennummer	Calibration certificate number Kalibrierschein Nummer	Cal. due Kalibr. bis
See page 2 of calibration results				

**UGB** (Uncertainty guard Band): Measurement uncertainty violates the datasheet limit

**UGB1** A compliance statement may be possible where a confidence level of less than 95 % is acceptable.  
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95% akzeptabel ist.

**UGB2** A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.  
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95% akzeptabel ist.

**Conformity statements take the measurement uncertainties into account.**  
Die Konformitätsaussagen berücksichtigen die Messunsicherheiten.

Ref.: ILAC-G8 1996 'Guidelines on Assessment and Reporting of Compliance with Specification (based on measurements and tests in a laboratory)'

**Notes**  
Anmerkungen



Product Service

**Annex 3**

Calibration certificate of Anritsu MS4623B VNA

Certificate of Calibration		Anritsu
		Discover What's Possible™
<b>Customer:</b> INDEXSAR LTD INDEXSAR LTD OAKFIELD HOUSE NEWINGATE SURREY RH5 5BG UNITED KINGDOM	<b>ANRITSU EMEA LIMITED</b> 200 CAPABILITY GREEN LUTON LU1 3LU UNITED KINGDOM Tel: +44 (0) 1582 433285 Fax: +44 (0) 1582 455575 Email: service.emea@eu.anritsu.com	
<b>Date of Issue:</b>	17/02/2015	<b>Certificate N°:</b> RMA20027002
<b>Customer:</b>	INDEXSAR LTD	<b>Order No:</b> Contract
<b>Manufacturer:</b>	Anritsu Company	
Model	Serial Number	Description
MS4623B	003102	VNA, 10 MHz-6 GHz, ACTIVE
<p>Anritsu EMEA Limited does hereby certify the above listed equipment complies to published or stated specifications at the measured parameters, and has been calibrated to the general requirements of ISO 17025 against instruments whose accuracies are traceable to National or International Standards, where such standards are applicable.</p>		
Repair required before calibration Electrical Safety Laser safety class	( yes ) ( yes ) ( )	 <b>Authorised Signature</b> Murray Coleman Head of Customer Services (EMEA)
<b>Note:</b> Original calibration results are attached and copies held on file at Anritsu EMEA Limited. The attached results relate only to the instrument under calibration. Anritsu EMEA Limited Quality system is certified to ISO9001:2000 (Cert. No. FQA 0353176) This Certificate comprises of: Certificate of Calibration Call Report 25 Page(s) of test results		



Product Service

**Annex 3**

Calibration certificate of Anritsu MS4623B VNA

Certificate of Calibration		Anritsu
		Discover What's Possible™
Customer: INDEXSAR LTD INDEXSAR LTD, OAKFIELD HOUSE NEWGATE SURREY Road SBO UNITED KINGDOM		ANRITSU EMEA LIMITED 200 CAPABILITY GREEN LUTON LU1 3JU UNITED KINGDOM Tel: +44 (0) 1582 433285 Fax: +44 (0) 1582 455675 Email: service_emea@eu.anritsu.com
Date of Issue:	17/02/2015	Certificate N°: RMA20027002
Customer:	INDEXSAR LTD	Order No: Contract
Manufacturer:	Anritsu Company	
Model	Serial Number	Description
MS4623B	003102	VNA, 10 MHz-6 GHz, ACTIVE
<p>Anritsu EMEA Limited does hereby certify the above listed equipment complies to published or stated specifications at the measured parameters, and has been calibrated to the general requirements of ISO 17025 against instruments whose accuracies are traceable to National or International Standards, where such standards are applicable.</p>		
Repair required before calibration	( yes )	 Authorised Signature Murray Coleman Head of Customer Services (EMEA)
Electrical Safety	( yes )	
Laser safety class	( )	
<p>Note: Original calibration results are attached and copies held on file at Anritsu EMEA Limited.            The attached results relate only to the instrument under calibration.            Anritsu EMEA Limited Quality system is certified to ISO9001:2000 (Cert. No. FQA 0353176)            This Certificate comprises of:            Certificate of Calibration            Call Report            25 Page(s) of test results</p>		



Product Service

## Annex 4

Calibration certificate of Anritsu 36581KKF/1 auto-cal kit

Certificate of Calibration		Anritsu Discover What's Possible™
Customer: INDEXSAR LTD INDEXSAR LTD, OAKFIELD HOUSE NEWGATE SURREY RH5 5BG UNITED KINGDOM	ANRITSU EMEA LIMITED 200 CAPABILITY GREEN LUTON LU1 3LU UNITED KINGDOM Tel: +44 (0) 1582 433285 Fax: +44 (0) 1582 455575 Email: service_esc@eu.anritsu.com	
Date of Issue:	22/01/2015	Certificate N°: RMA20026648
Customer:	INDEXSAR LTD	Order No: 1045ANR
Manufacturer:	Anritsu Company	
Model	Serial Number	Description
MS4623B 36581KKF/1	003102 001902	VNA, 10 MHZ-6 GHZ, ACTIVE TESTED & CHARACTERIZED TO 6 GHZ
<p>Anritsu EMEA Limited does hereby certify the above listed equipment complies to published or stated specifications at the measured parameters, and has been calibrated to the general requirements of ISO 17025 against instruments whose accuracies are traceable to National or International Standards, where such standards are applicable.</p>		
Within specification before calibration	( yes )	 Authorised Signature <b>Murray Coleman</b> Head of Customer Services (EMEA)
Repair required before calibration	( no )	
Electrical Safety	( yes )	
Laser safety class	( )	
<p>Note: Original calibration results are attached and copies held on file at Anritsu EMEA Limited.            The attached results relate only to the instrument under calibration.            Anritsu EMEA Limited Quality system is certified to ISO9001:2000 (Cert. No. FQA 0353176)            This Certificate comprises of:            Certificate of Calibration            Call Report            13 Page(s) of test results</p>		



Product Service




**IMMERSIBLE SAR PROBE**

**CALIBRATION REPORT**

**Part Number: IXP – 050**

**S/N 0204**

**March 2015**

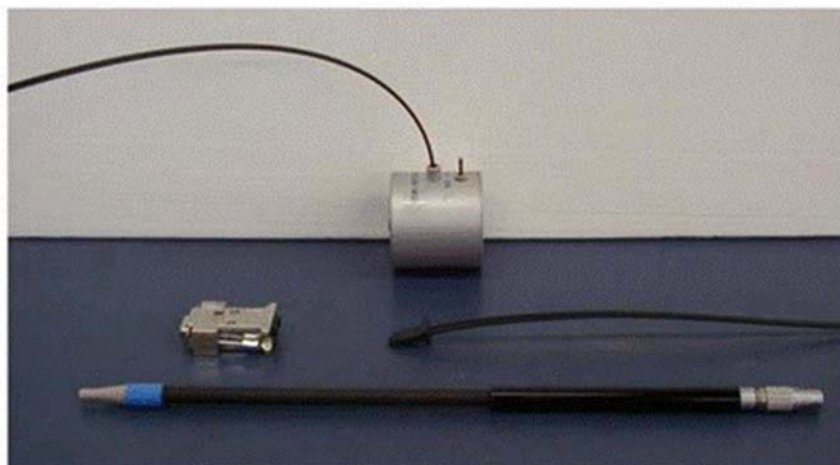

**Indexsar Limited  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey RH5 5BG**

**Tel: +44 (0) 1306 632 870**

**Fax: +44 (0) 1306 631 834**

**e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)**

Reproduction of this report is authorized by Indexsar Ltd provided the report is reproduced in its entirety



Product Service



**Indexsar Limited**  
**Oakfield House**  
**Cudworth Lane**  
**Newdigate**  
**Surrey RH5 5BG**

Tel: +44 (0) 1306 632 870  
 Fax: +44 (0) 1306 631 834  
 e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)

**Calibration Certificate 1503/0204**  
**Date of Issue: 31 March 2015**  
**Immersible SAR Probe**

Type:	IXP-050
Manufacturer:	IndexSAR, UK
Serial Number:	0204
Place of Calibration:	IndexSAR, UK
Date of Receipt of Probe:	10 February 2015
Calibration Dates:	25 February– 13 March 2015
Customer:	TUV Sud

IndexSAR Ltd hereby declares that the IXP-050 Probe named above has been calibrated for conformity to the current versions of IEEE 1528, IEC 62209-1, IEC 62209-2, and FCC SAR standards using the methods described in this calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated by:

Engineer

Approved by:

Director

Please keep this certificate with the calibration document. When the probe is sent for a calibration check, please include the calibration document.





## INTRODUCTION

Straight probes work on either SARA-C (to measure SAR values in flat phantoms containing Body tissue simulant fluid), or on SARA2 (where they, too, can measure in a flat phantom with Body fluid, or in a SAM phantom containing Head fluid).

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N 0204) for use on SARA-C only. **The calibration factors do not apply to, and will not give correct readings on, the IndexSAR SARA2 system.**

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of IEC 62209-1 [Ref 1], IEEE 1528 [Ref 2], IEC 62209-2 [Ref 3] and FCC [Ref 4] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

## CALIBRATION PROCEDURE

### 1. Objectives

The calibration process comprises the following stages

- 1) Determination of the channel sensitivity factors which optimise the probe's overall axial isotropy
- 2) Channel sensitivity factors are largely frequency independent. Consequently, they can be combined to model the exponential decay of SAR in a waveguide fluid cell at each frequency of interest, and hence derive the liquid conversion factors at that frequency.

### 2. Probe output

The probe channel output signals are linearised in the manner set out in Refs [1] - [4]. The following equation is utilized for each channel:

$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where  $U_{lin}$  is the linearised signal,  $U_{o/p}$  is the raw output signal in mV and DCP is the diode compression potential, also in mV.

DCP is determined from fitting equation (1) to measurements of  $U_{lin}$  versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the Schottky diodes used as the sensors. For the IXP-020 probes with CW signals the DCP values are typically 100mV.



For this value of DCP, the typical linearity response of IXP-050 probes to CW and to GSM modulation is shown in Figure 4, along with departures of this same dataset from linearity.

In turn, measurements of E-field are determined using the following equation:

$$E_{\text{liq}}^2 \text{ (V/m)} = U_{\text{linx}} * \text{Air Factor}_x * \text{Liq Factor}_x + U_{\text{liny}} * \text{Air Factor}_y * \text{Liq Factor}_y + U_{\text{linz}} * \text{Air Factor}_z * \text{Liq Factor}_z \quad (3)$$

Here, "Air Factor" represents each channel's sensitivity, while "Liq Factor" represents the enhancement in signal level when the probe is immersed in tissue-simulant liquids at each frequency of interest.

### 3. Selecting channel sensitivity factors to optimise isotropic response

Within SARA-C, an L-probe's predominant mode of operation is with the tip pointing directly towards the source of radiation. Consequently, optimising the probe's response to boresight signals ("axial isotropy") is far more important than optimising its spherical isotropy (where the direction, as well as the polarisation angle, of the incoming radiation must be taken into account).

The setup for measuring the probe's axial isotropy is shown in Figure 1. Since isotropy is frequency-independent, measurements are normally made at a frequency of 900MHz as lower frequencies are more tolerant of positional inaccuracies.

A 900MHz waveguide containing head-fluid simulant is selected. Like all waveguides used during probe calibration, this particular waveguide contains two distinct sections: an air-filled launcher section, and a liquid cell section, separated by a dielectric matching window designed to minimise reflections at the air-liquid interface.

The waveguide stands in an upright position and the liquid cell section is filled with 900MHz brain fluid to within 10 mm of the open end. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects.

During the measurement, a TE<sub>01</sub> mode is launched into the waveguide by means of an N-type-to-waveguide adapter. The probe is then lowered vertically into the liquid until the tip is exactly 10mm above the centre of the dielectric window. This particular separation ensures that the probe is operating in a part of the waveguide where boundary corrections are not necessary.

Care must also be taken that the probe tip is centred while rotating.

The exact power applied to the input of the waveguide during this stage of the probe calibration is immaterial since only relative values are of interest while the probe rotates. However, the power must be sufficiently above the noise floor and free from drift.



The dedicated Indexsar calibration software rotates the probe in 10 degree steps about its axis, and at each position, an Indexsar 'Fast' amplifier samples the probe channels 500 times per second for 0.4 s. The raw  $U_{\text{op}}$  data from each sample are packed into 10 bytes and transmitted back to the PC controller via an optical cable.  $U_{\text{linx}}$ ,  $U_{\text{liny}}$  and  $U_{\text{linz}}$  are derived from the raw  $U_{\text{op}}$  values and written to an Excel template.

Once data have been collected from a full probe rotation, the Air Factors are adjusted using a special Excel Solver routine to equalise the output from each channel and hence minimise the axial isotropy. This automated approach to optimisation removes the effect of human bias.

Figure 2 represents the output from each diode sensor as a function of probe rotation angle.

#### 4. Determination of Conversion ("Liquid") Factors at each frequency of interest

A lookup table of conversion factors for a probe allows a SAR value to be derived at the measured frequencies, and for either brain or body fluid-simulant.

The method by which the conversion factors are assessed is based on the comparison between measured and analytical rates of decay of SAR with height above a dielectric window. This way, not only can the conversion factors for that frequency/fluid combination be determined, but an allowance can also be made for the scale and range of boundary layer effects.

The theoretical relationship between the SAR at the cross-sectional centre of the lossy waveguide as a function of the longitudinal distance ( $z$ ) from the dielectric separator is given by Equation 4:

$$SAR(z) = \frac{4(P_f - P_b)}{\rho ab \delta} e^{-2z/\delta} \quad (4)$$

Here, the density  $\rho$  is conventionally assumed to be  $1000 \text{ kg/m}^3$ ,  $ab$  is the cross-sectional area of the waveguide, and  $P_f$  and  $P_b$  are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth  $\delta$  (which is the reciprocal of the waveguide-mode attenuation coefficient) is a property of the lossy liquid and is given by Equation (5).

$$\delta = \left[ \text{Re} \left\{ \sqrt{(\pi/a)^2 + j\omega\mu_0(\sigma + j\omega\epsilon_0\epsilon_r)} \right\} \right]^{-1} \quad (5)$$

where  $\sigma$  is the conductivity of the tissue-simulant liquid in S/m,  $\epsilon_r$  is its relative permittivity, and  $\omega$  is the radial frequency (rad/s). Values for  $\sigma$  and  $\epsilon_r$  are obtained prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2].  $\sigma$  and  $\epsilon_r$  are both





temperature- and fluid-dependent, so are best measured using a sample of the tissue-simulant fluid immediately prior to the actual calibration.

Wherever possible, all DiLine and calibration measurements should be made in the open laboratory at  $22 \pm 2.0^\circ\text{C}$ ; if this is not possible, the values of  $\sigma$  and  $\epsilon_r$  should reflect the actual temperature. Values employed for calibration are listed in the tables below.

By ensuring the liquid height in the waveguide is at least three penetration depths, reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is therefore determined solely from the waveguide forward and reflected power.

Different waveguides are used for 700MHz, 835/900MHz, 1450MHz, 1800/1900MHz, 2100/2450/2600MHz and 5200/5800MHz measurements. Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 20 dB at the most important frequencies used for personal wireless communications, and better than 15dB for frequencies greater than 5GHz. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 5800 MHz because of the waveguide size is not severe in the context of compliance testing.

During calibration, the probe is lowered carefully until it is just touching the cross-sectional centre of the dielectric window. 240 samples are then taken and written to an Excel template file before moving the probe vertically upwards. This cycle is repeated 150 times. The vertical separation between readings is determined from practical considerations of the expected SAR decay rate, and range from 0.35mm steps below 3GHz, down to 0.05mm at 5GHz.

Once the data collection is complete, a Solver routine is run which optimises the measured-theoretical fit by varying the conversion factor, and the boundary correction size and range.

For calibrations at 450MHz, where waveguide calibrations become unfeasible, a full 3D SAR scan over a tuned dipole is performed, and the conversion factor adjusted to make the measured 1g and 10g volume-averaged SAR values agree with published targets.

#### **CALIBRATION FACTORS MEASURED FOR PROBE S/N 0204**

The probe was calibrated at 700, 835, 900, 1800, 1900, 2100, 2450 and 2600 MHz in liquid samples representing brain and body liquid at these frequencies.



The calibration was for CW signals only, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe was measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 mm from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software. The distance of 2.7mm for assembled probes has been confirmed by taking X-ray images of the probe tips (see Figure 5).

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

#### CALIBRATION EQUIPMENT

The table on page 19 indicates the calibration status of all test equipment used during probe calibration.

#### MEASUREMENT UNCERTAINTIES

A complete measurement uncertainty analysis for the SARA-C measurement system has been published in Reference [6]. Table 17 from that document is re-created below, and lists the uncertainty factors associated just with the calibration of probes.

Source of uncertainty	Uncertainty value $\pm$ %	Probability distribution	Divisor	$c_i$	Standard uncertainty $u_i \pm$ %	$v_i$ or $v_{eff}$
Forward power	3.92	N	1.00	1	3.92	$\infty$
Reflected power	4.09	N	1.00	1	4.09	$\infty$
Liquid conductivity	1.308	N	1.00	1	1.31	$\infty$
Liquid permittivity	1.271	N	1.00	1	1.27	$\infty$
Field homogeneity	3.0	R	1.73	1	1.73	$\infty$
Probe positioning	0.22	R	1.73	1	0.13	$\infty$
Field probe linearity	0.2	R	1.73	1	0.12	$\infty$
Combined standard uncertainty		RSS			6.29	

At the 95% confidence level, therefore, the expanded uncertainty is  $\pm 12.4\%$

#### SUMMARY OF CAL FACTORS FOR PROBE IXP-050 S/N 0204

Relative Channel Sensitivities (to optimise Axial Isotropy)				
	X	Y	Z	
Air Factors*	91.78	66.90	81.32	$(V/m)^2/mV$
DCPs	100	100	100	mV

Measured Isotropy	(+/-) dB
Axial Isotropy*	0.05 $\pm$ 0.01

Physical Information	
Sensor offset (mm)	2.7
Elbow – Tip dimension (mm)	0.0