

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Shenzhen Proscenic Technology Co., Ltd

Robot Vacuum Cleaner

Model Number: D800

Additional Model: LR1, L8050, L8150, L8250, L8650, L8750, L8350,
LDS M7 PRO, LDS M8 PRO, LDS M7(MAX),LDS U6, LDS M8, LDS M8 MAX,
L8450, Lxxxx (xxxx represent number or numeric alphabetic combination)

FCC ID: 2ARZX-LDSM7PRO

Prepared for:	Shenzhen Proscenic Technology Co., Ltd
	8F, Building 5A, Tusincere Park, Intersection of Qingchun Road and Longfei
	Avenue, Longgang District, Shenzhen, Guangdong Province, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
Tel: 86-769-83081888-808	



Report Number:	ESTE-R1912040
Date of Test:	Oct. 19~Dec. 05, 2019
Date of Report:	Dec. 07, 2019

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. Antenna Information	5
1.3. Difference between Model Numbers.....	6
2. SUMMARY OF TEST	7
2.1. Summary of test result.....	7
2.2. Test Facilities.....	8
2.3. Measurement uncertainty	9
2.4. Assistant equipment used for test	9
2.5. Block Diagram.....	9
2.6. Test Mode.....	10
2.7. Power Setting of Test Software	11
2.8. Duty Cycle.....	11
2.9. Channel List.....	14
2.10. Test Equipment List	15
3. 6DB BANDWIDTH	16
3.1. Limit	16
3.2. Test Setup	16
3.3. Spectrum Analyzer Setting.....	16
3.4. Test Procedure.....	16
3.5. Test Result	17
4. MAXIMUM PEAK OUTPUT POWER	26
4.1. Limit	26
4.2. Test Setup	26
4.3. Spectrum Analyzer Setting.....	26
4.4. Test Procedure.....	26
4.5. Test Result	27
5. POWER SPECTRAL DENSITY.....	36
5.1. Limit	36
5.2. Test Setup	36
5.3. Spectrum Analyzer Setting.....	36
5.4. Test Procedure.....	36
5.5. Test Result	37
6. CONDUCTED BAND EDGE	46
6.1. Limit	46
6.2. Test Setup	46
6.3. Spectrum Analyzer Setting.....	46
6.4. Test Procedure.....	46
6.5. Test Result	47
7. CONDUCTED SPURIOUS EMISSIONS	48
7.1. Limit	48
7.2. Test Setup	48
7.3. Spectrum Analyzer Setting.....	48

7.4.	Test Procedure	48
7.5.	Test Result	49
8.	RADIATED SPURIOUS EMISSIONS AND BAND EDGE	51
8.1.	Limit	51
8.2.	Test setup	52
8.3.	Spectrum Analyzer Setting	53
8.4.	Test Procedure	54
8.5.	Test Result	55
9.	AC POWER LINE CONDUCTED EMISSIONS	71
9.1.	Limit	71
9.2.	Test Setup	71
9.3.	Spectrum Analyzer Setting	71
9.4.	Test Procedure	71
9.5.	Test Result	72
10.	ANTENNA REQUIREMENTS	82
10.1.	Limit	82
10.2.	Test Result	82
11.	TEST SETUP PHOTO	83
12.	EUT PHOTO	85

EST Technology Co., Ltd.

Applicant:	Shenzhen Proscenic Technology Co., Ltd		
Address:	8F, Building 5A, Tusincere Park, Intersection of Qingchun Road and Longfei Avenue, Longgang District, Shenzhen, Guangdong Province, China		
Manufacturer:	Shenzhen Proscenic Technology Co., Ltd		
Address:	8F, Building 5A, Tusincere Park, Intersection of Qingchun Road and Longfei Avenue, Longgang District, Shenzhen, Guangdong Province, China		
Factory:	Guangdong joy Intelligent Technology Co., Ltd.		
Address:	No. 10, Zhangwu Street, Qiaoli, Changping Town, 523586 Dongguan, Guangdong, China		
E.U.T:	Robot Vacuum Cleaner		
Model Number:	D800		
Additional Model:	LR1, L8050, L8150, L8250, L8650, L8750, L8350, LDS M7 PRO, LDS M8 PRO, LDS M7(MAX), LDS U6, LDS M8, LDS M8 MAX, L8450, Lxxxx, Please see section 1.3 of the report (xxxx represent number or numeric alphabetic combination)		
Power Supply:	DC 24V From Adapter Input AC 100V-240V 50/60Hz DC 24V From Automatic Dirt Disposal Input AC 100-130V 50/60Hz		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Oct. 19, 2019	Date of Test:	Oct. 19~Dec. 05, 2019
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	Date: Dec. 07, 2019	
 _____ Ring / Assistant	 _____ Shawn / Engineer	Approved by:  _____ Iceman Hu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Robot Vacuum Cleaner
Model Number	:	D800
Operation frequency	:	2412MHz~2462MHz 2422MHz~2452MHz
Number of channel	:	IEEE 802.11b: 11 Channels IEEE 802.11g: 11 Channels IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Max Output Power (PEAK)	:	IEEE 802.11b: 19.25dBm IEEE 802.11g: 18.65dBm IEEE 802.11n HT20: 17.97dBm IEEE 802.11n HT40: 17.51dBm
Modulation Type	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Sample Type	:	Prototype production

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	2

1.3. Difference between Model Numbers

Model	D800, LR1	L8050	L8150	L8250	L8650	L8750	L8350, LDS M7 PRO, LDS M8 PRO, LDS M7(MAX), LDS U6, LDS M8, LDS M8 MAX	L8450
Appearance								
Appearance (back)								
Switch button (key)								
The main board model	DC701	DC701	DC701	DC701	DC701	DC701	DC701	DC701
Algorithm board model WIFI	AC701	AC701	AC701	AC701	AC701	AC701	AC701	AC701
Whether to match collection dust treasure	optional	without	optional	optional	without	without	optional	without
water tank	The external tank	Electric control tank	The external tank	The external tank	Electric control tank	Electric control tank	The external tank	Electric control tank
Appearance of Remote Control	without	without	without	without	without	without	band	band

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth	15.247(a)(2)	PASS
4	Maximum Peak Output Power	15.247(b)(3)	PASS
5	Power Spectral Density	15.247(e)	PASS
6	Conducted Band Edge	15.247(d)	PASS
7	Conducted Spurious Emissions	15.247(d)	PASS
8	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
9	AC Power Line Conducted Emissions	15.207	PASS
10	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
Date of registration: November 13, 2017

Certificated by FCC, USA
Designation Number: CN1215
Test Firm Registration Number: 722932
Date of registration: November 21, 2017

Certificated by A2LA, USA
Registration No.: 4366.01
Date of registration: November 07, 2017

Certificated by Industry Canada
CAB identifier No.: CN0035
Date of registration: January 04, 2019

Certificated by VCCI, Japan
Registration No.: R-13663; C-14103
Date of registration: July 25, 2017
This Certificate is valid until: July 24, 2020

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by TUV/PS, Shenzhen
Registration No.: SCN1017
Date of registration: January 27, 2011

Certificated by Intertek ETL SEMKO
Registration No.: 2011-RTL-L2-64
Date of registration: April 28, 2011

Certificated by Nemko, Hong Kong
Registration No.: 175193
Date of registration: May 4, 2011

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	$\pm 3.48\text{dB}$
Uncertainty for spurious emissions test (30MHz-1GHz)	$\pm 4.60\text{ dB(Polarize: H)}$
	$\pm 4.68\text{ dB(Polarize: V)}$
Uncertainty for spurious emissions test (1GHz to 18GHz)	$\pm 4.96\text{dB}$
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
1	Adapter	-	JQS0361A-U240120	-	-
	Adapter		DBS036A-2401200U	-	-
2	Automatic Dirt Disposal		MS1	-	-

Item	Shielded Type	Ferrite Core	Length	Note
A	NO	NO	1.2m	DC Cable
B	NO	NO	1.2m	AC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was beset into 2.4G WIFI test mode by software before test.



(EUT: Robot Vacuum Cleaner)

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
6dB Bandwidth	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Maximum Peak Output Power	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Power Spectral Density	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Conducted Band Edge	IEEE 802.11b	1Mbps	Low/ High
	IEEE 802.11g	6Mbps	Low/ High
	IEEE 802.11n HT20	MCS0	Low/ High
	IEEE 802.11n HT40	MCS0	Low/ High
Conducted Spurious Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Band Edge	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
AC Power Line Conducted Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Power Setting of Test Software

Software Name	RFTestTool		
Frequency(MHz)	2412	2437	2462
IEEE 802.11b Setting	40	40	40
IEEE 802.11g Setting	40	40	40
IEEE 802.11n HT20 Setting	40	40	40
Frequency(MHz)	2422	2437	2452
IEEE 802.11n HT40 Setting	40	40	40


2.8. Duty Cycle

Temperature	23℃	Relative Humidity	48%	Test Voltage	120V/60Hz
Mode	Fre(MHz)	On time(ms)	Total Time(ms)	Duty Cycle	Duty Factor
IEEE 802.11b	2437	12.49280	12.55070	99.54	0.00
IEEE 802.11g	2437	2.07971	2.21014	94.10	0.26
IEEE 802.11n HT20	2437	1.93478	2.06522	93.68	0.28
IEEE 802.11n HT40	2437	0.95362	1.00000	95.36	0.21


Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle $\geq$ 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor(consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).


IEEE 802.11b 2437MHz

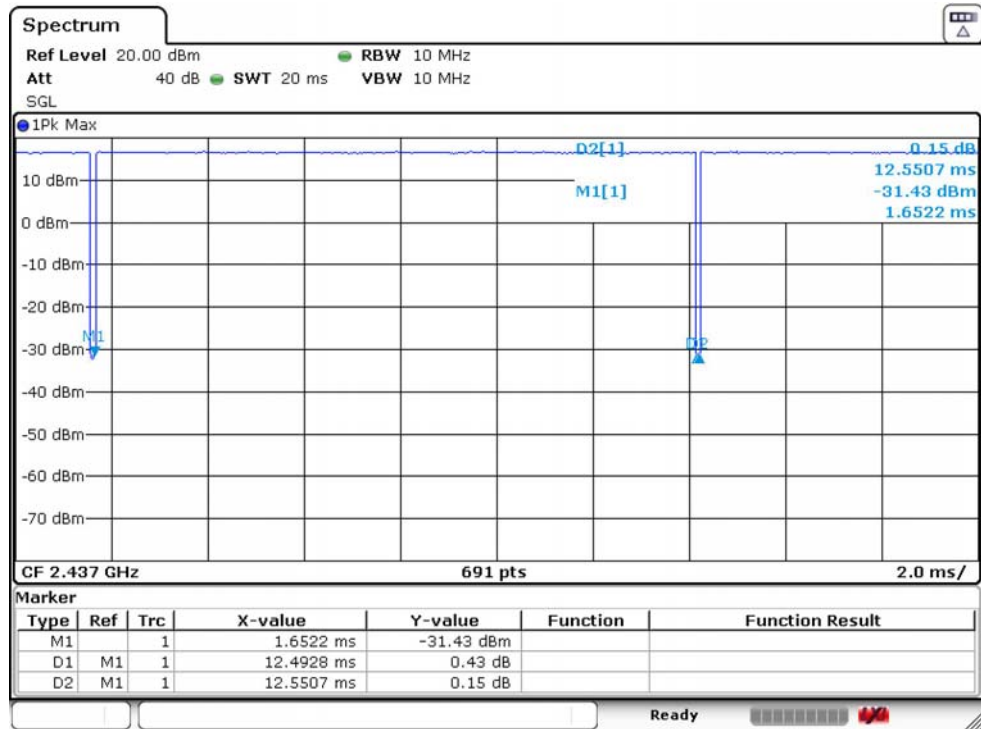


IEEE 802.11g 2437MHz

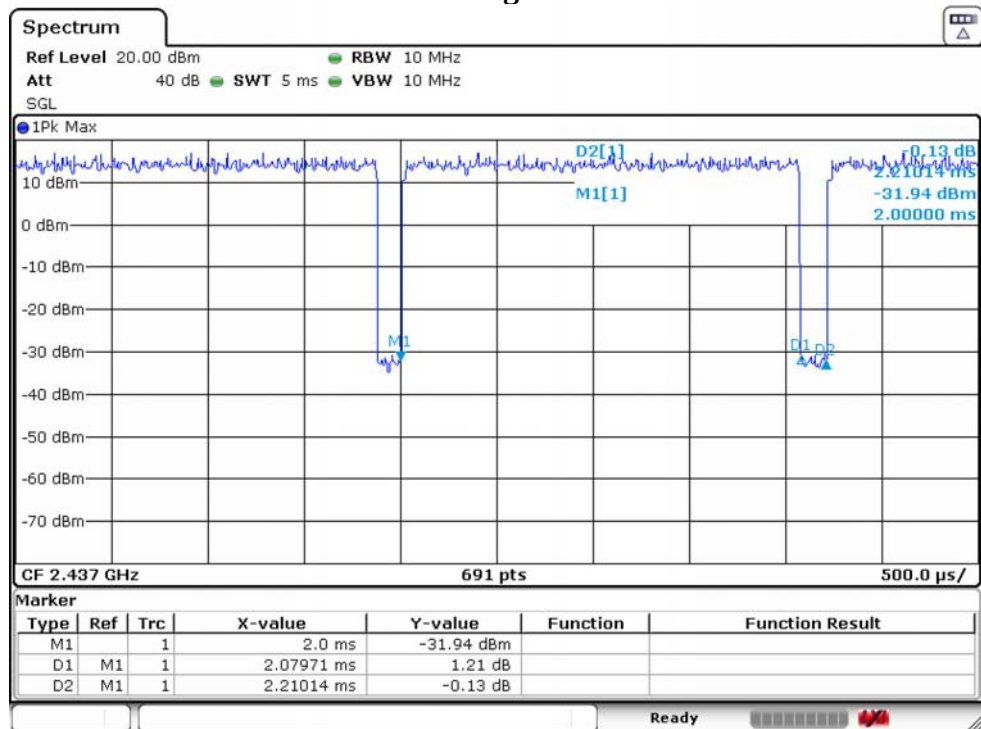

IEEE 802.11n HT20 2437MHz

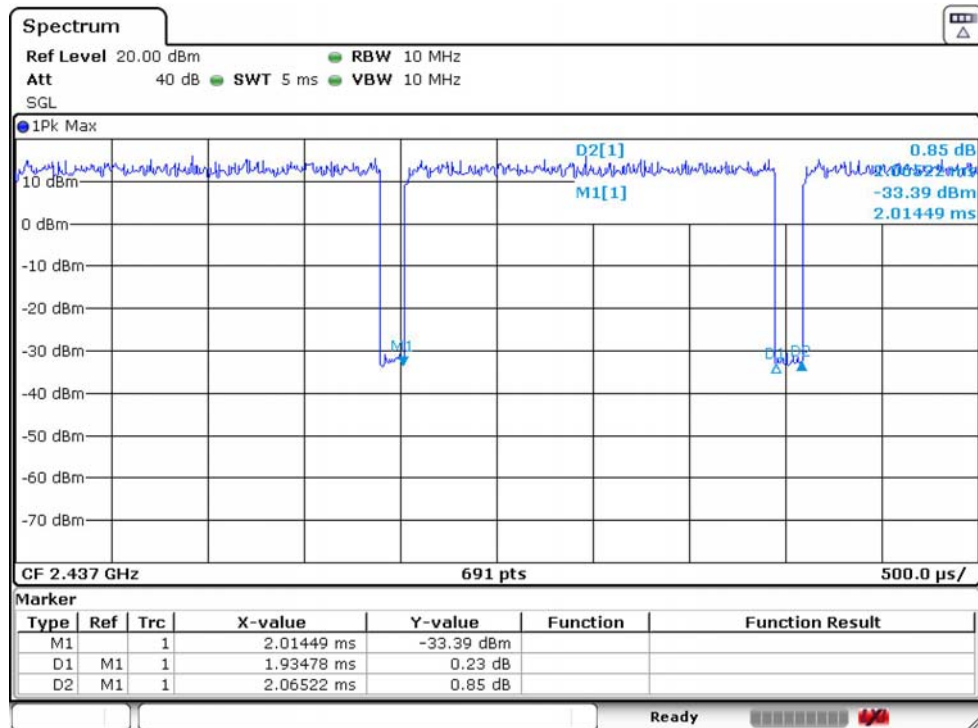

IEEE 802.11n HT40 2437MHz

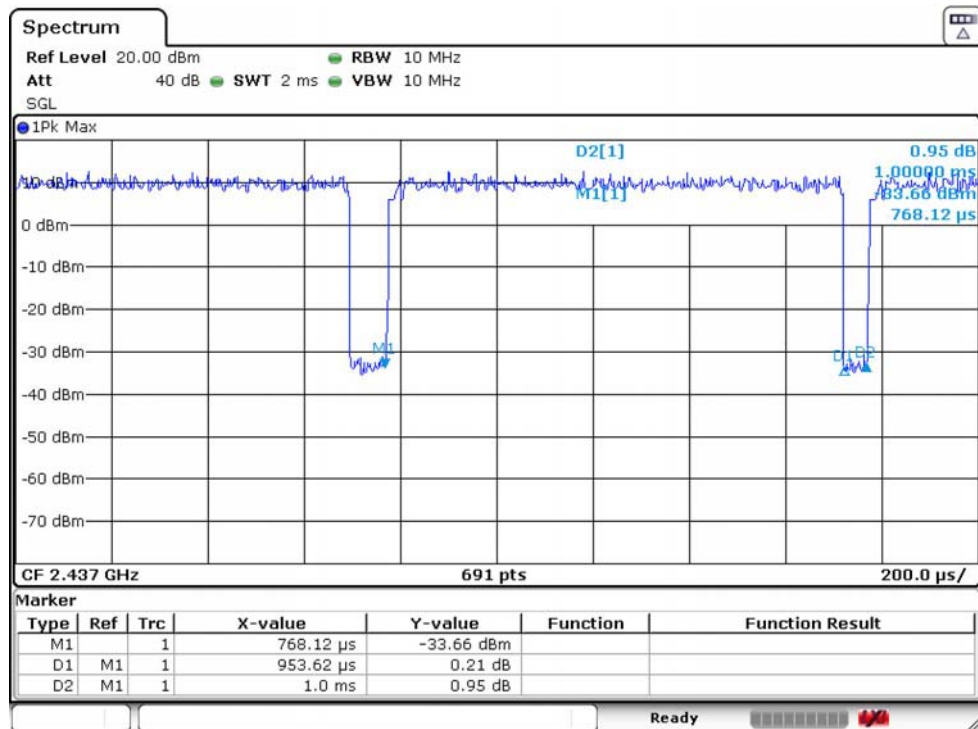

2.9. Channel List

IEEE 802.11b/802.11g/802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 14,19	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 14,19	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 14,19	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 14,19	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 14,19	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 14,19	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 14,19	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Spectrum Analyzer	Rohde&Schwarz	FSV40	EST-E069	LISAI	June 14,19	1 Year

3. 6dB BANDWIDTH

3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


3.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.


3.5. Test Result

Temperature	23℃	Relative Humidity	48%	
Test Voltage	120V/60Hz			
Mode	Freq (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b	2412	8.973	≥0.5	PASS
	2437	8.973	≥0.5	PASS
	2462	8.973	≥0.5	PASS
IEEE 802.11g	2412	16.266	≥0.5	PASS
	2437	16.382	≥0.5	PASS
	2462	16.382	≥0.5	PASS
IEEE 802.11n HT20	2412	17.424	≥0.5	PASS
	2437	17.366	≥0.5	PASS
	2462	17.366	≥0.5	PASS
IEEE 802.11n HT40	2422	36.010	≥0.5	PASS
	2437	36.010	≥0.5	PASS
	2452	35.770	≥0.5	PASS


IEEE 802.11b 2412MHz

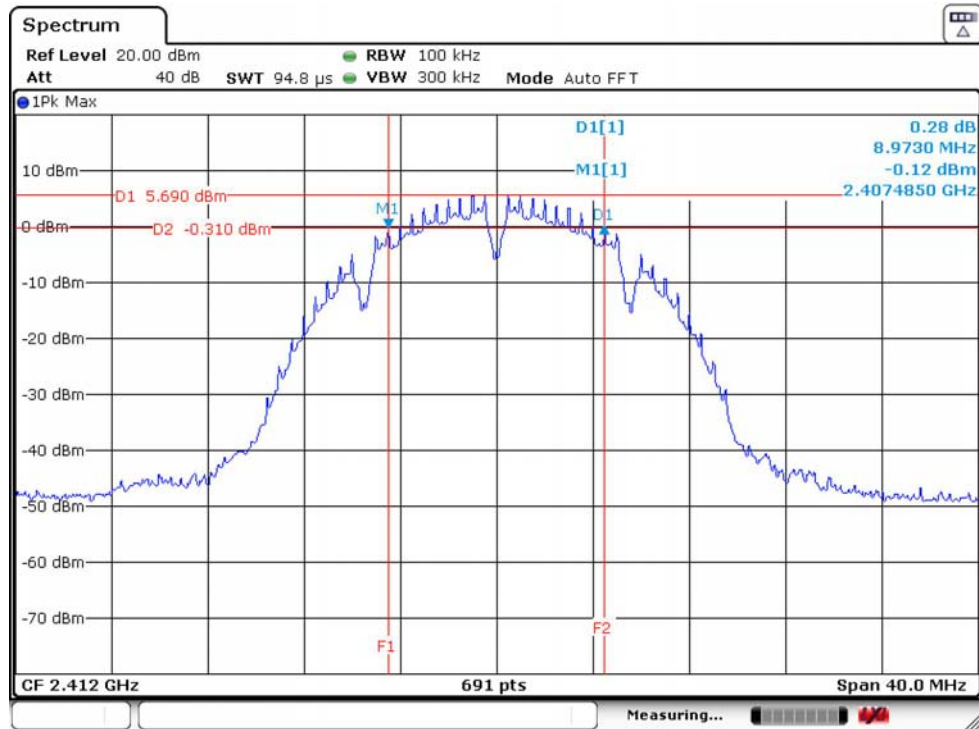


IEEE 802.11b 2437MHz

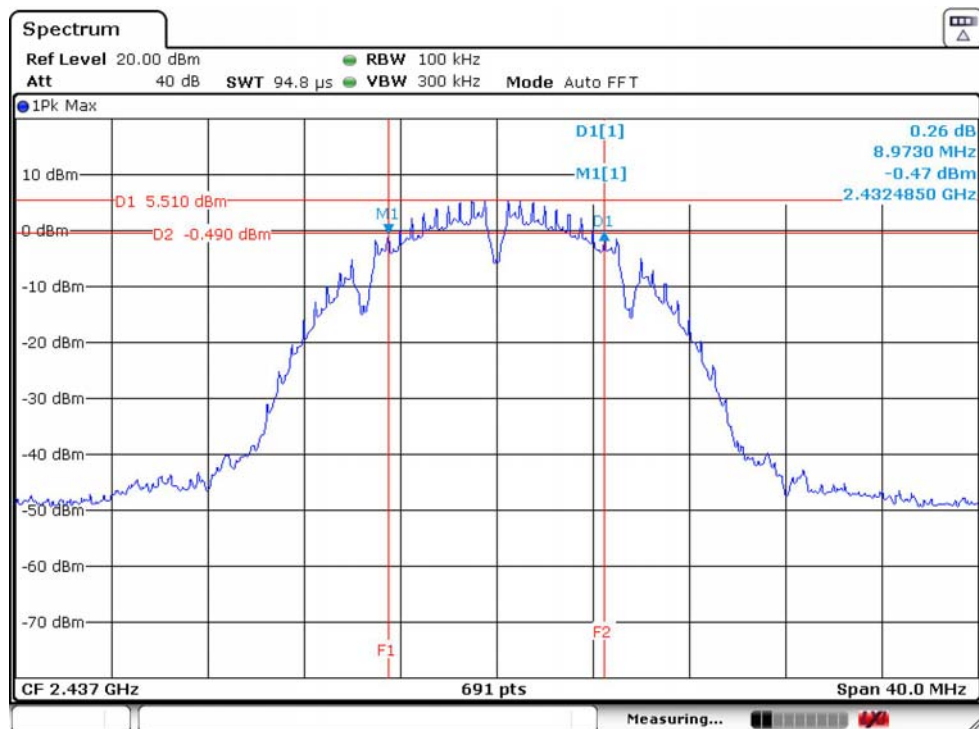


IEEE 802.11b 2462MHz

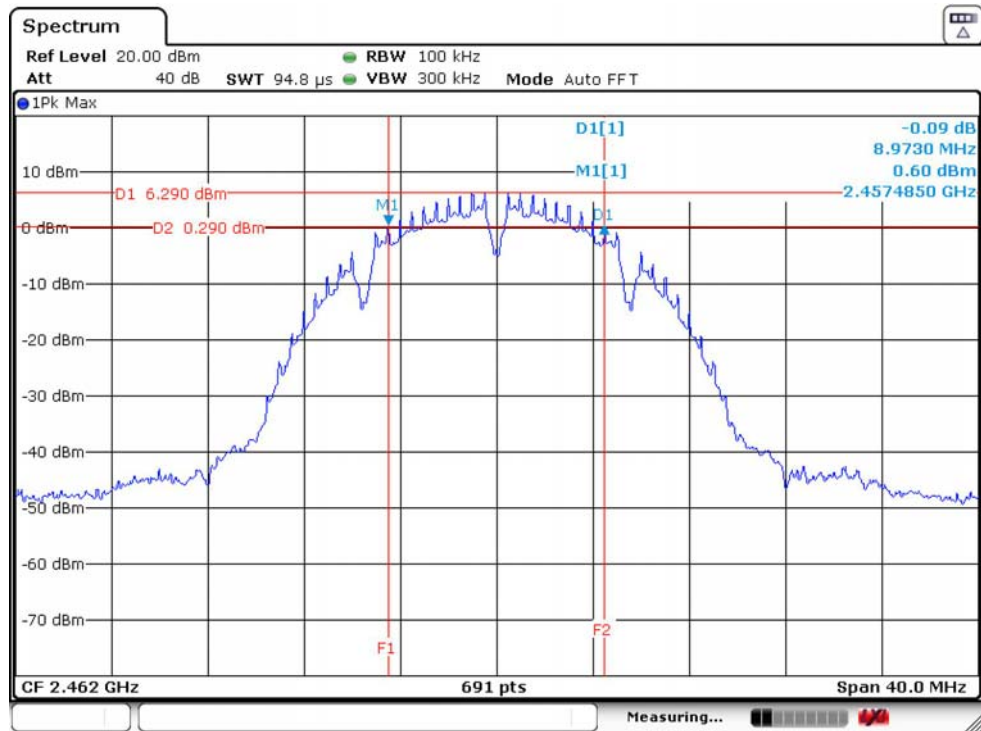


IEEE 802.11g 2412MHz

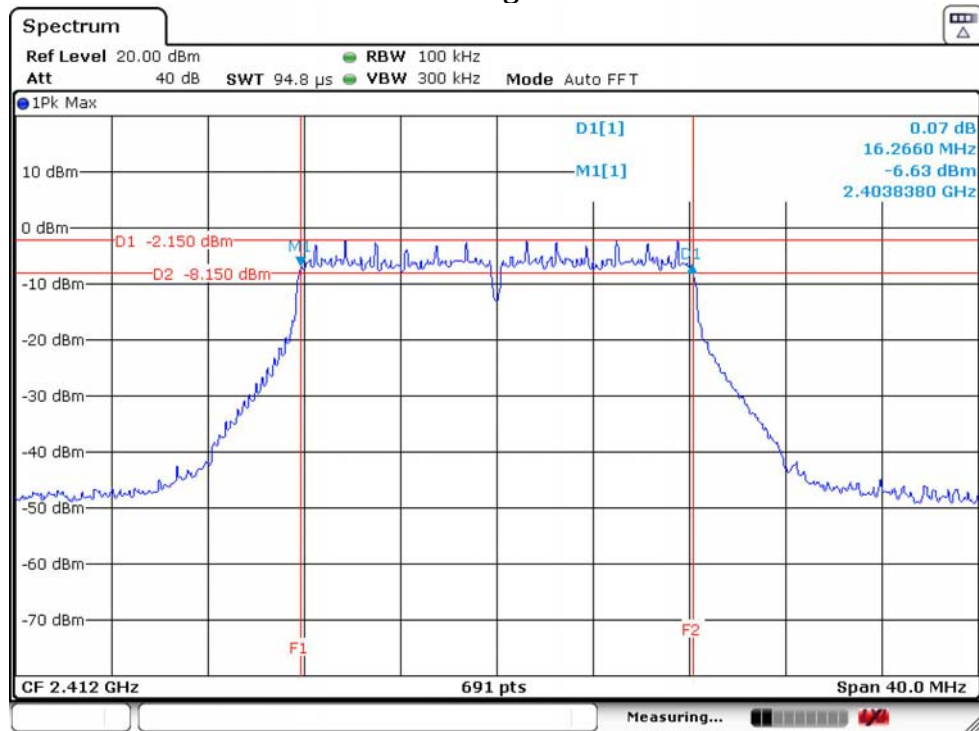


IEEE 802.11g 2437MHz

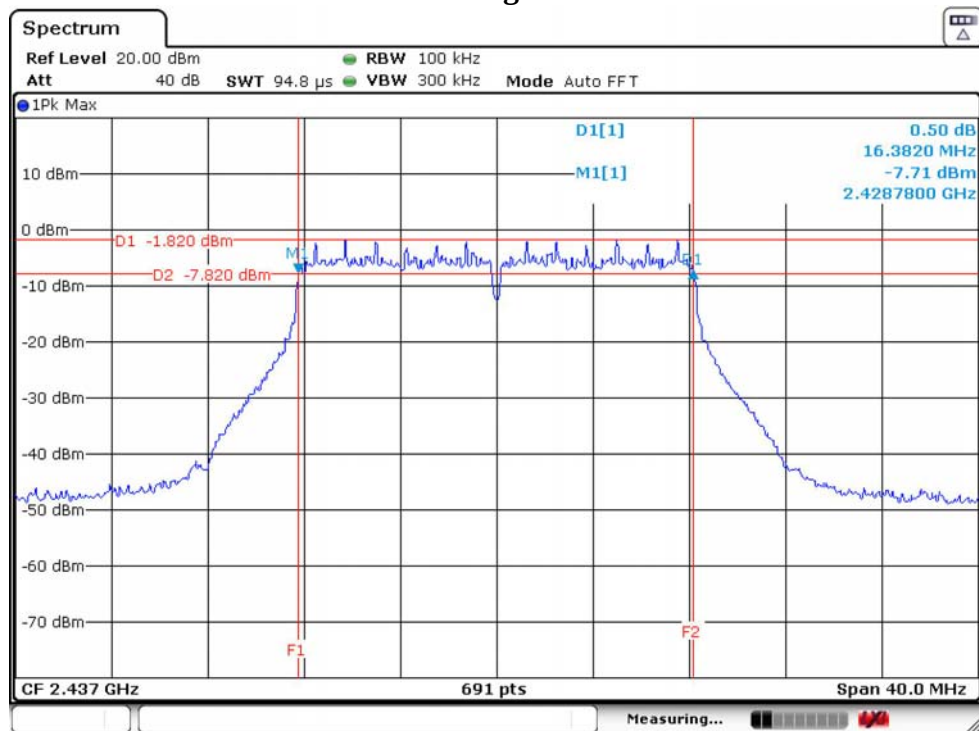


IEEE 802.11g 2462MHz

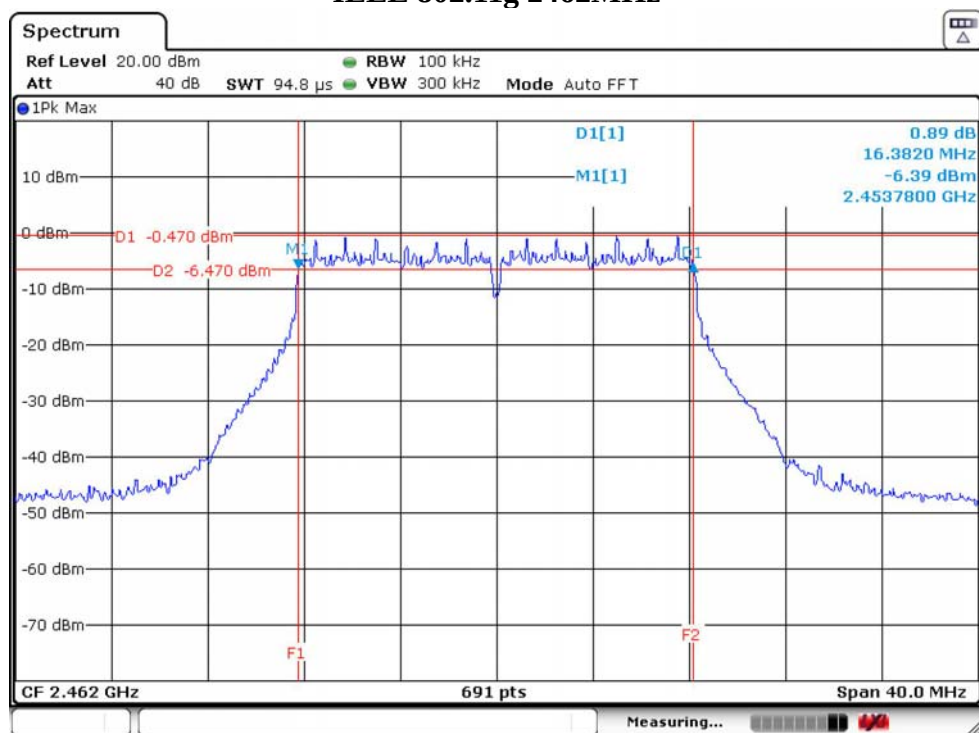


IEEE 802.11n HT20 2412MHz

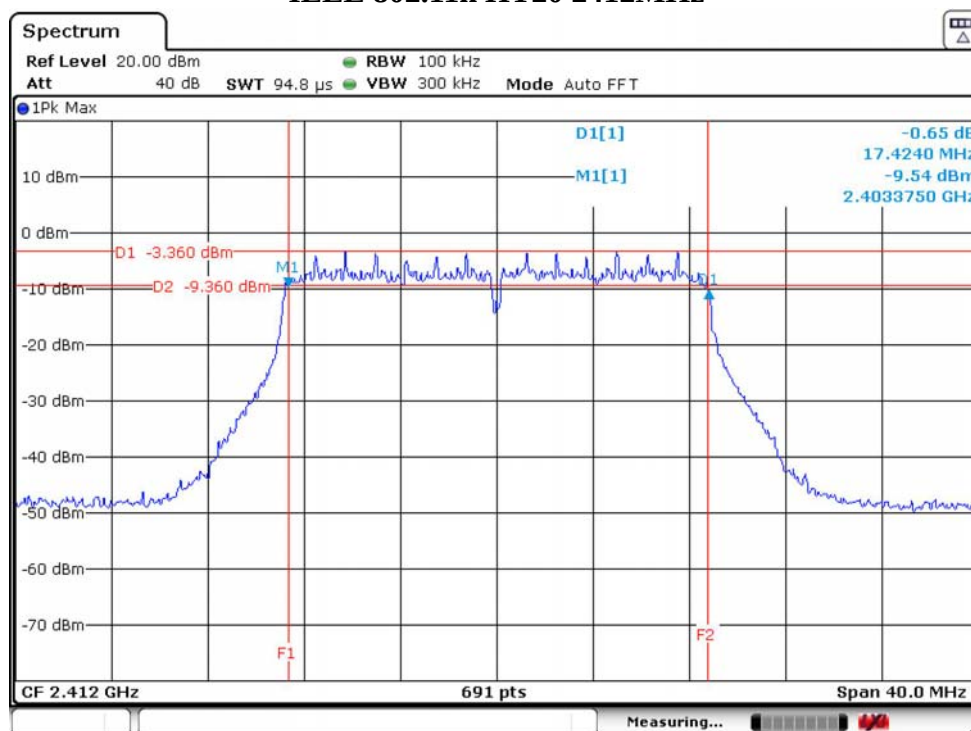


IEEE 802.11n HT20 2437MHz

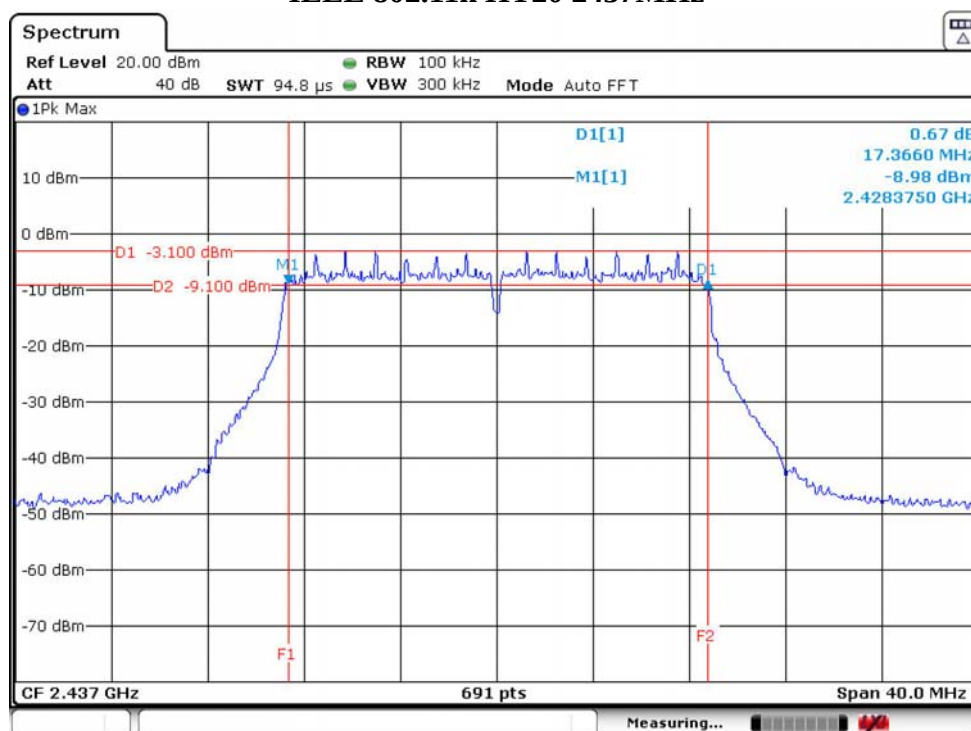


IEEE 802.11n HT20 2462MHz

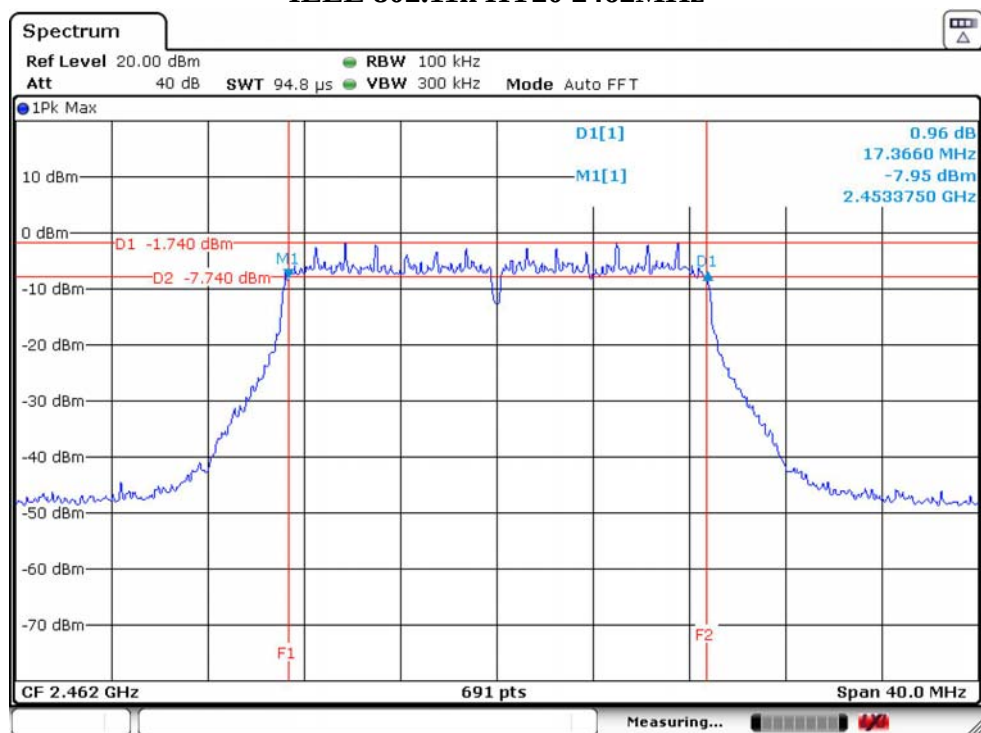


IEEE 802.11n HT40 2422MHz

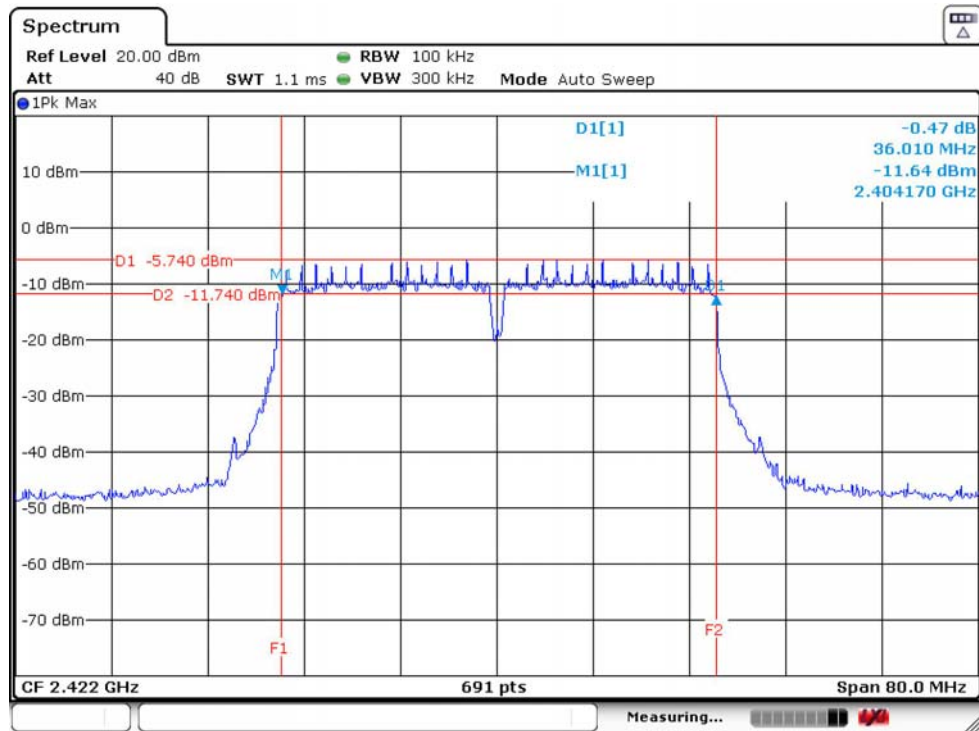

IEEE 802.11n HT40 2437MHz

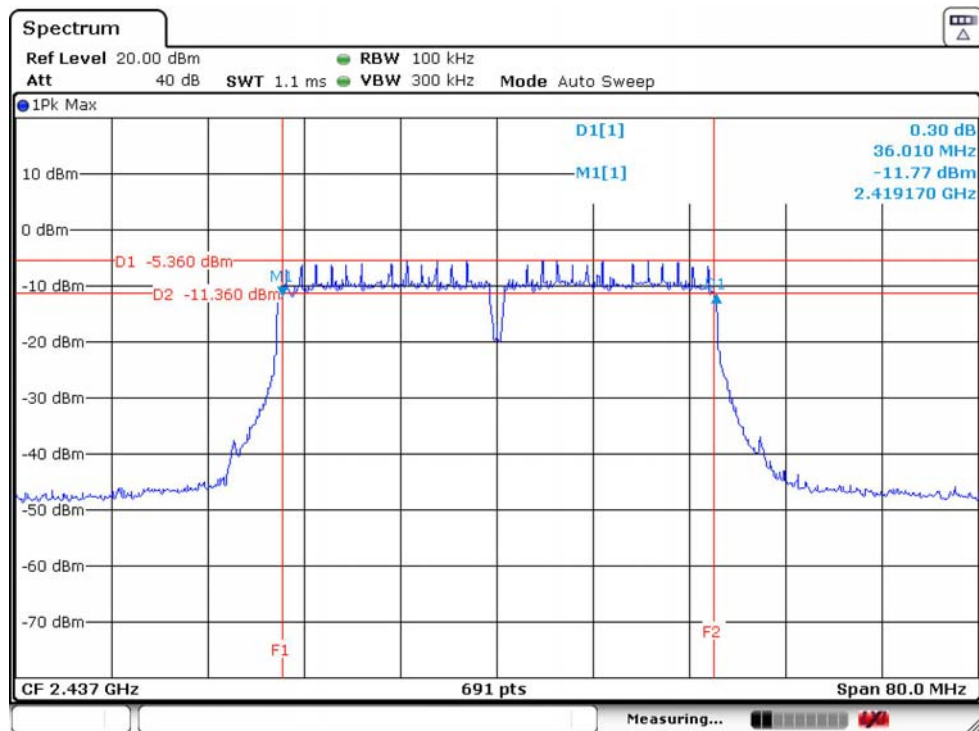

IEEE 802.11n HT40 2452MHz

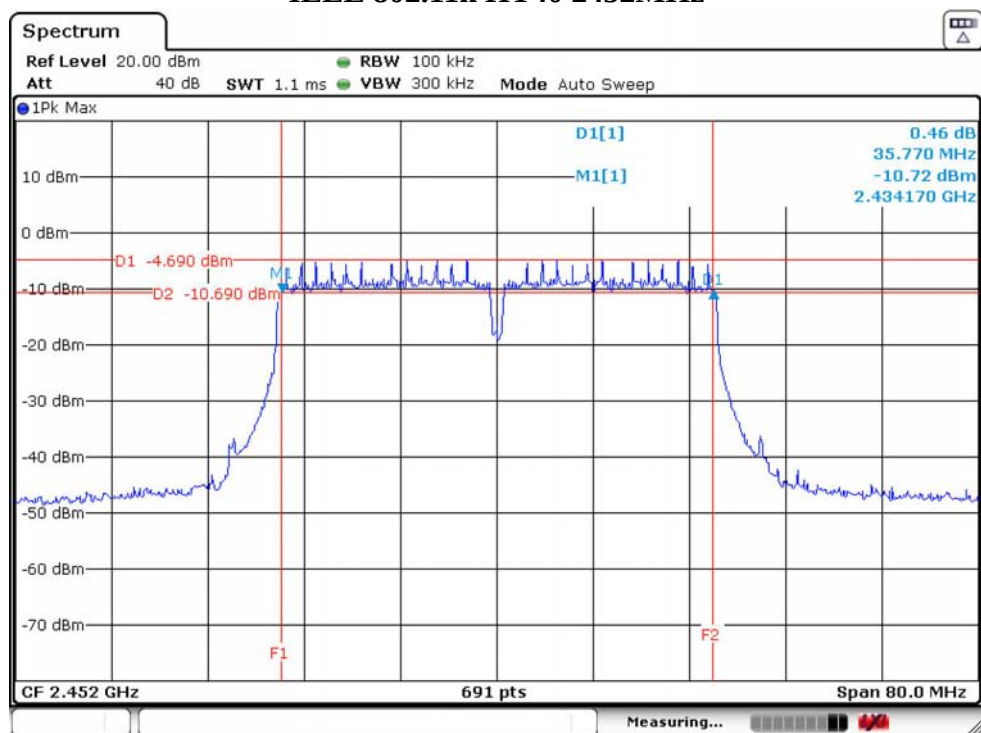

4. MAXIMUM PEAK OUTPUT POWER

4.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum peak output power is 1 Watt(30dBm).

4.2. Test Setup



4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	3MHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


4.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 4.3.
- Set the EUT transmit continuously with maximum output power.
- Use the channel power function to measure maximum peak output power, allow trace to stabilize, save test pictures.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.


4.5. Test Result

Temperature	23℃	Relative Humidity	48%	Test Voltage		120V/60Hz
Mode	Freq (MHz)	Peak Output Power		Limit		Result
		dBm	W	dBm	W	
IEEE 802.11b	2412	17.82	0.0605	30.00	1.0000	PASS
	2437	19.25	0.0841	30.00	1.0000	PASS
	2462	18.62	0.0728	30.00	1.0000	PASS
IEEE 802.11g	2412	17.95	0.0624	30.00	1.0000	PASS
	2437	18.65	0.0733	30.00	1.0000	PASS
	2462	18.57	0.0719	30.00	1.0000	PASS
IEEE 802.11n HT20	2412	16.39	0.0436	30.00	1.0000	PASS
	2437	17.35	0.0543	30.00	1.0000	PASS
	2462	17.97	0.0627	30.00	1.0000	PASS
IEEE 802.11n HT40	2422	16.57	0.0454	30.00	1.0000	PASS
	2437	17.22	0.0527	30.00	1.0000	PASS
	2452	17.51	0.0564	30.00	1.0000	PASS


IEEE 802.11b 2412MHz

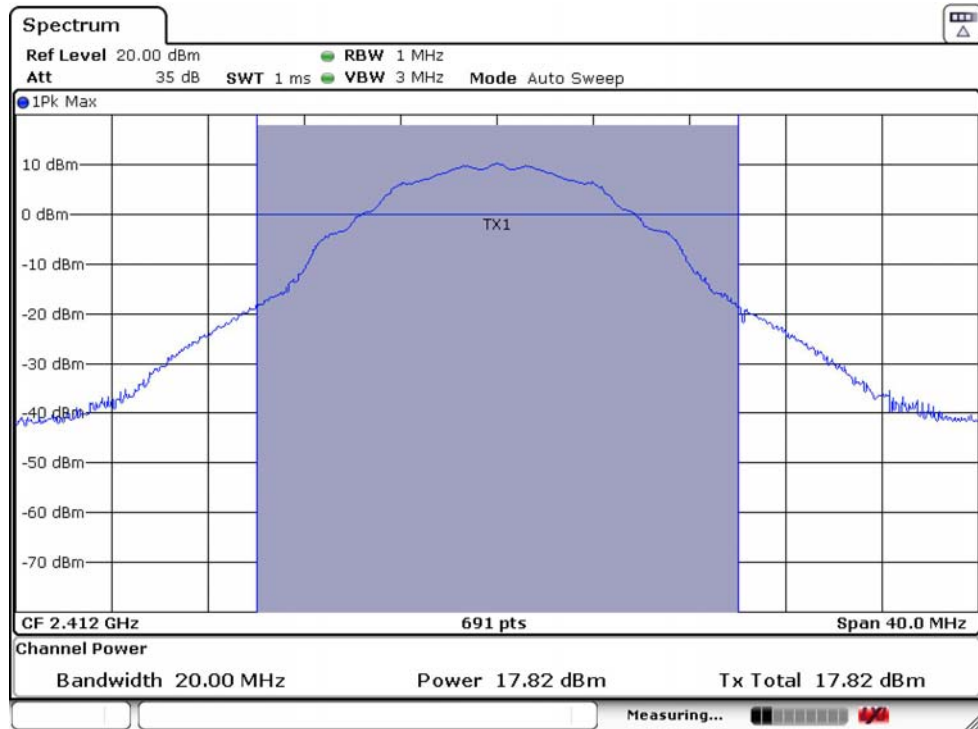


IEEE 802.11b 2437MHz

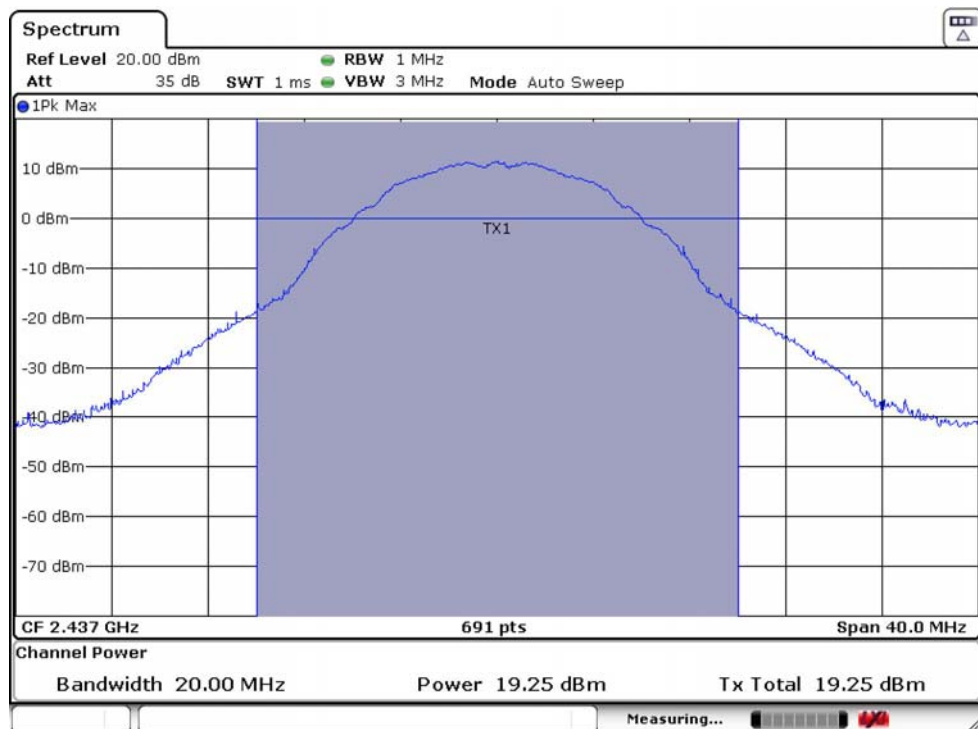


IEEE 802.11b 2462MHz

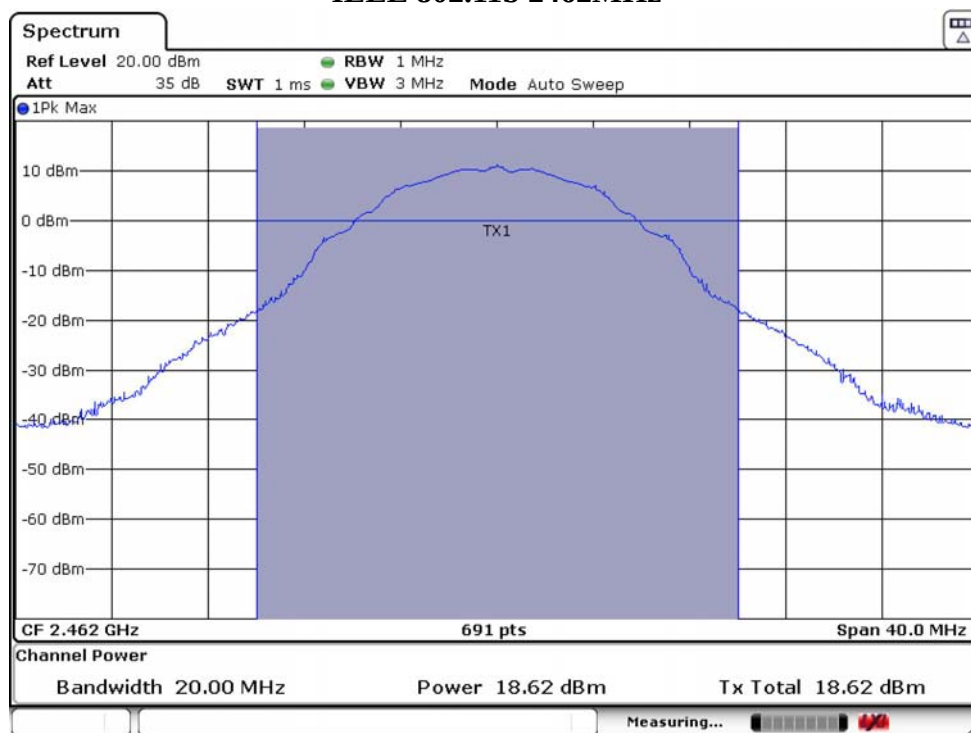


IEEE 802.11g 2412MHz

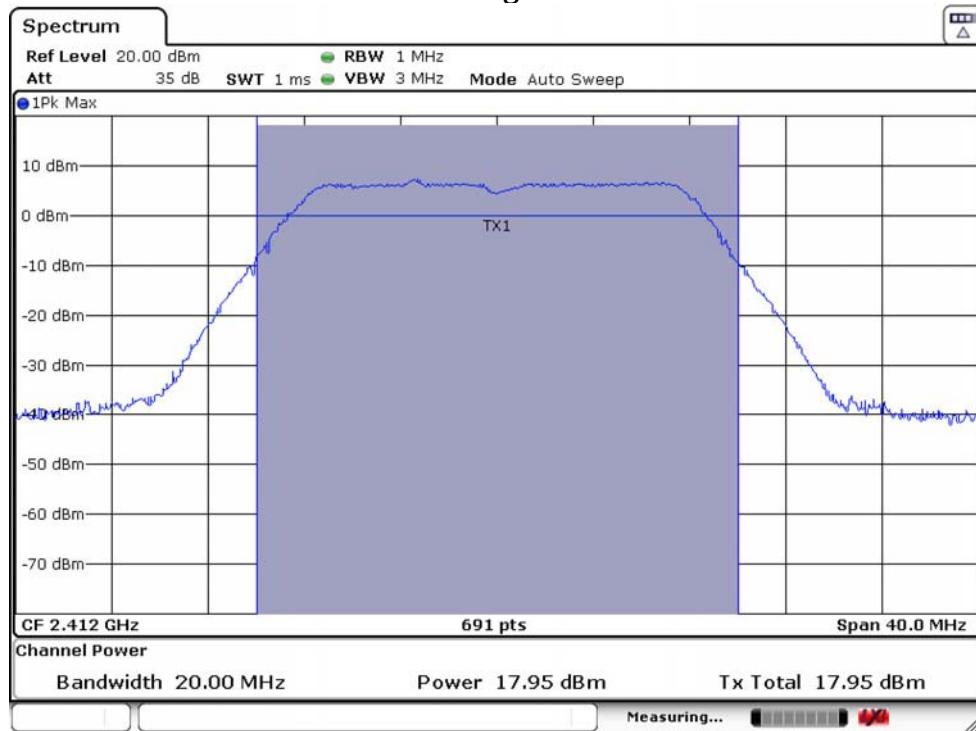


IEEE 802.11g 2437MHz

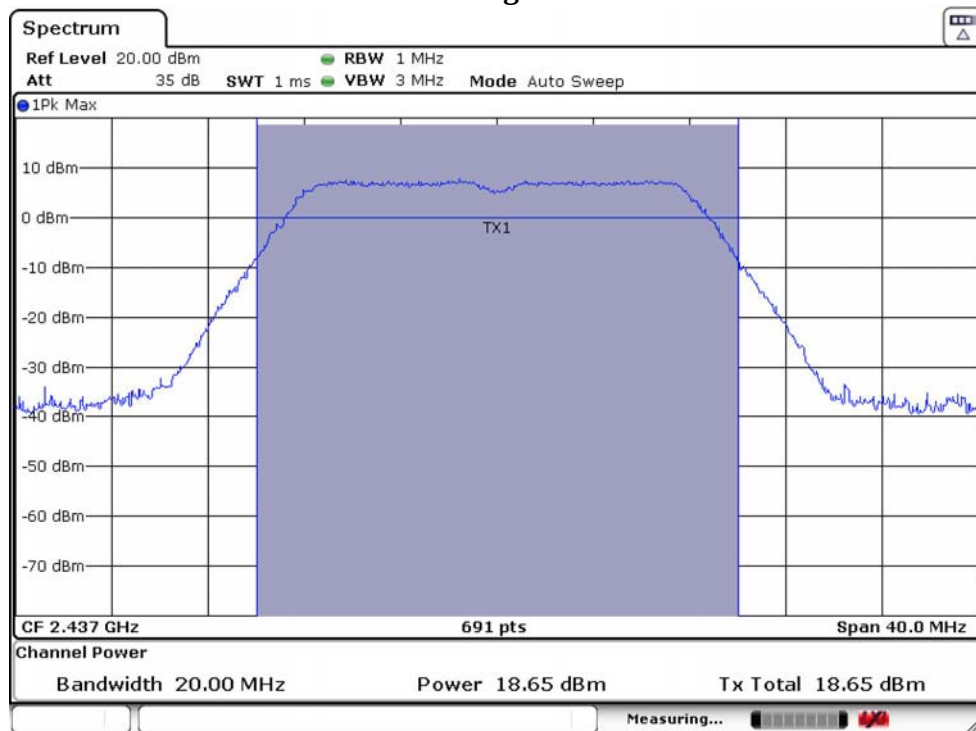


IEEE 802.11g 2462MHz

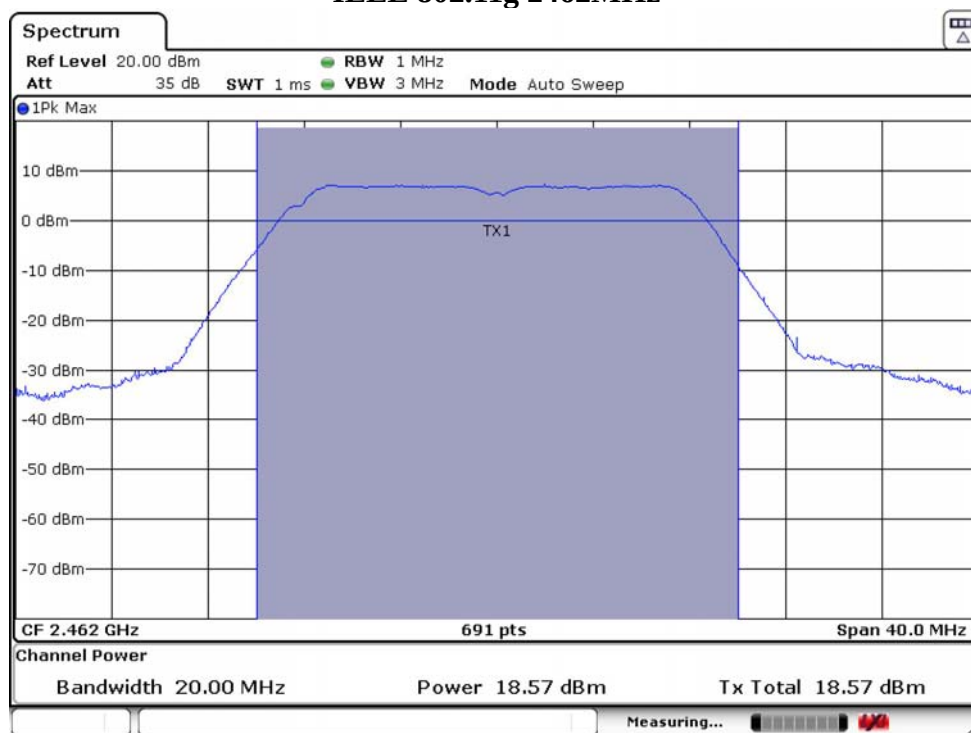


IEEE 802.11n HT20 2412MHz

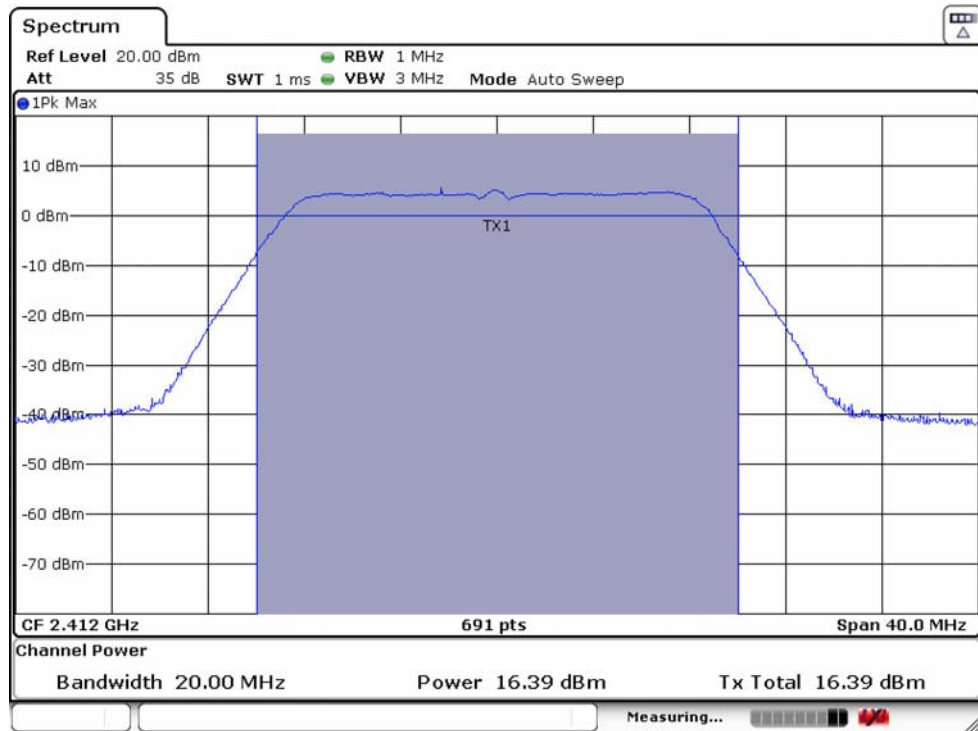


IEEE 802.11n HT20 2437MHz

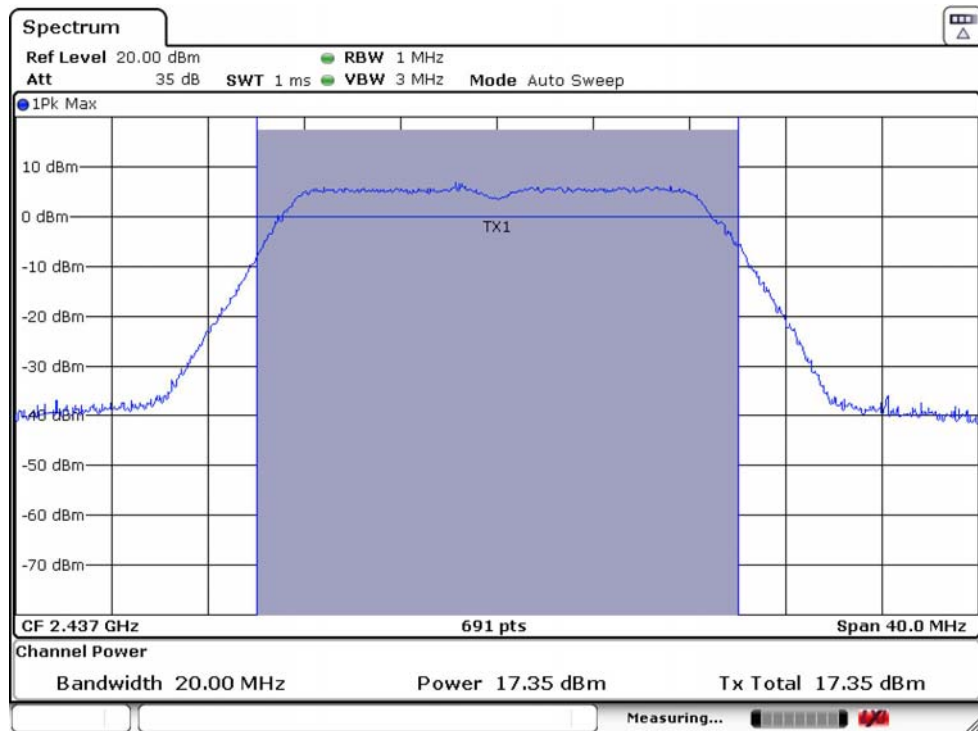


IEEE 802.11n HT20 2462MHz

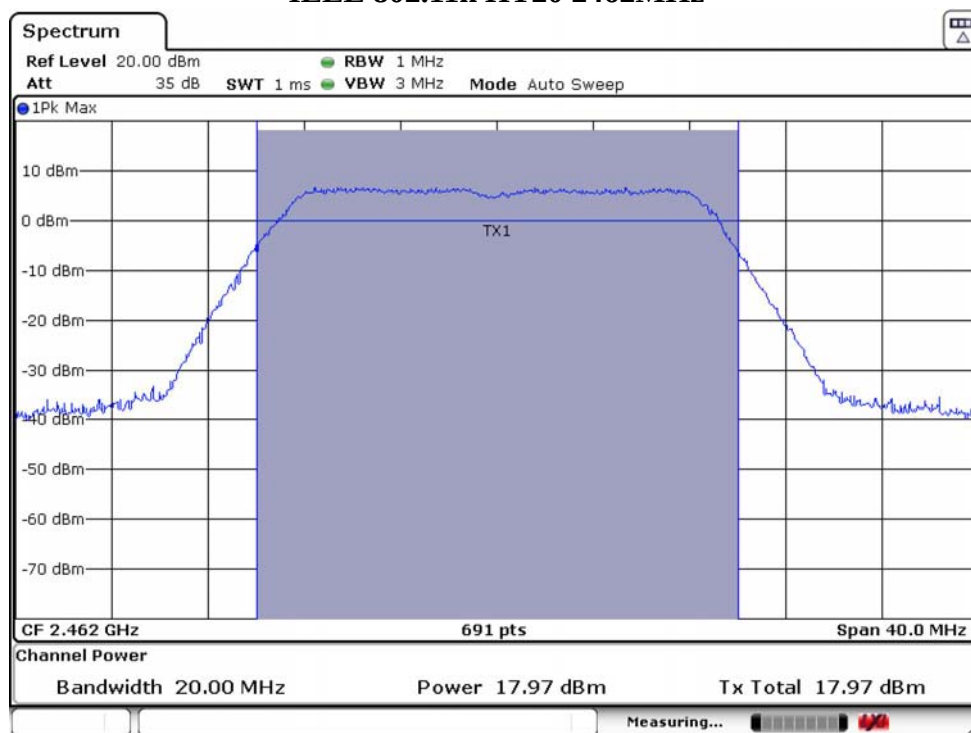


IEEE 802.11n HT40 2422MHz

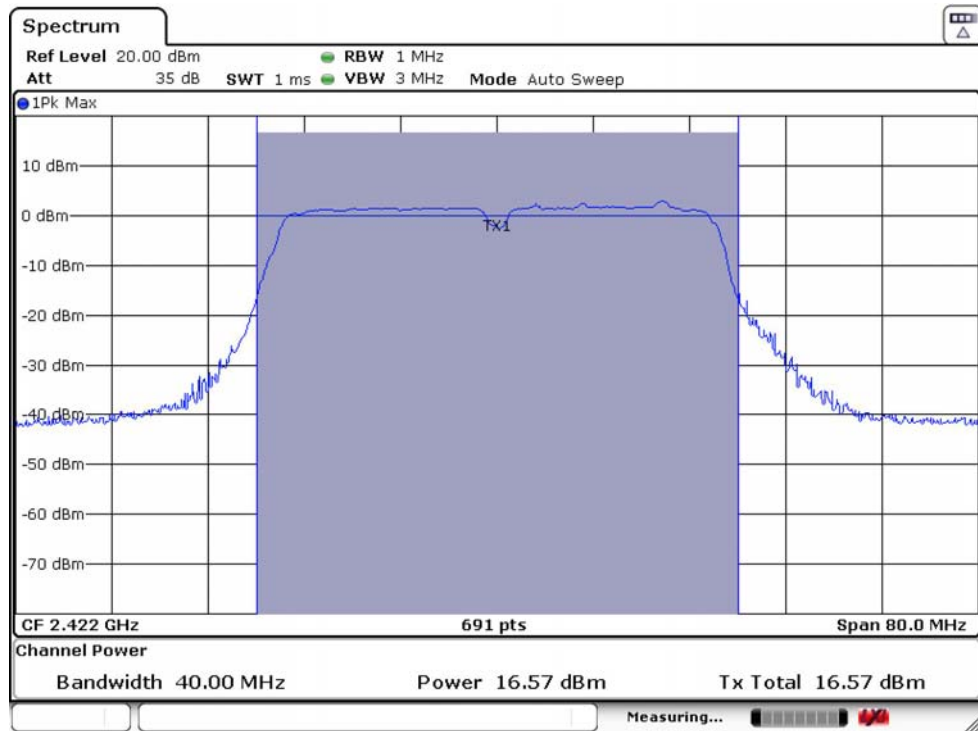

IEEE 802.11n HT40 2437MHz

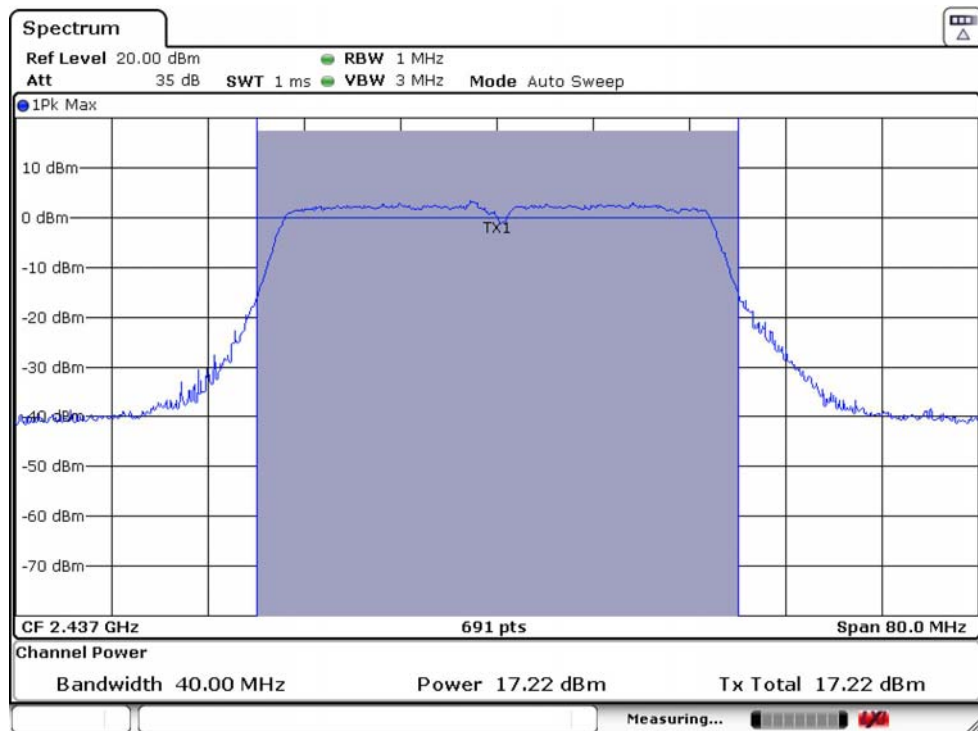

IEEE 802.11n HT40 2452MHz

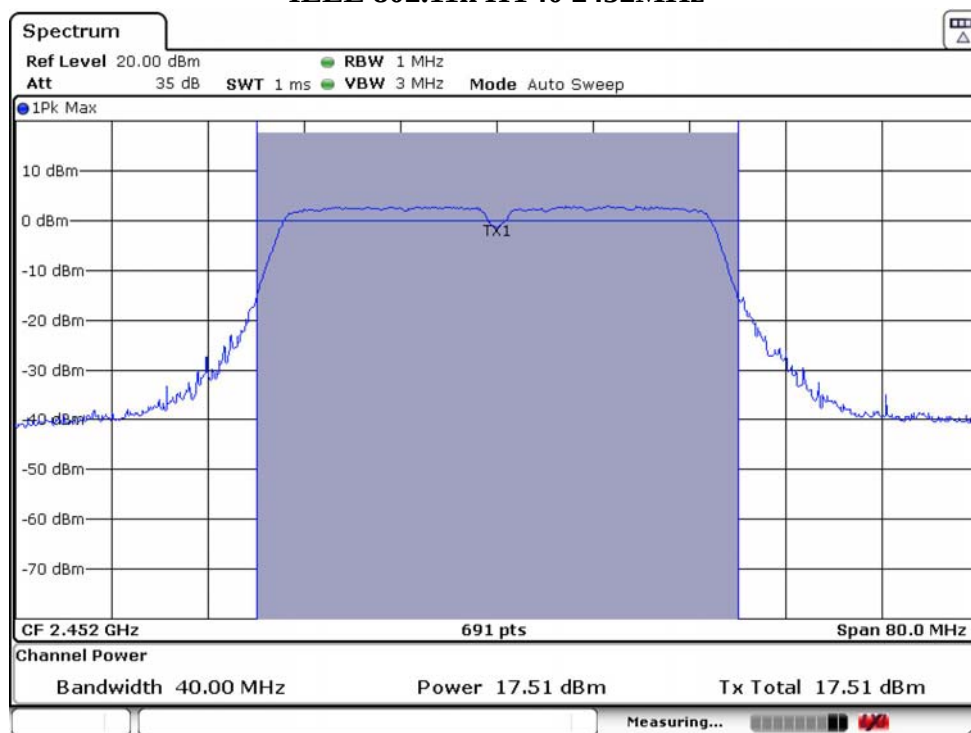

5. POWER SPECTRAL DENSITY

5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2. Test Setup



5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.


5.5. Test Result

Temperature	23℃	Relative Humidity	48%	Test Voltage	120V/60Hz
Mode	Freq (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result	
IEEE 802.11b	2412	-7.63	8.00	PASS	
	2437	-6.73	8.00	PASS	
	2462	-5.62	8.00	PASS	
IEEE 802.11g	2412	-15.99	8.00	PASS	
	2437	-14.10	8.00	PASS	
	2462	-13.61	8.00	PASS	
IEEE 802.11n HT20	2412	-16.59	8.00	PASS	
	2437	-14.63	8.00	PASS	
	2462	-15.79	8.00	PASS	
IEEE 802.11n HT40	2422	-16.74	8.00	PASS	
	2437	-18.42	8.00	PASS	
	2452	-18.50	8.00	PASS	


IEEE 802.11b 2412MHz




IEEE 802.11b 2437MHz

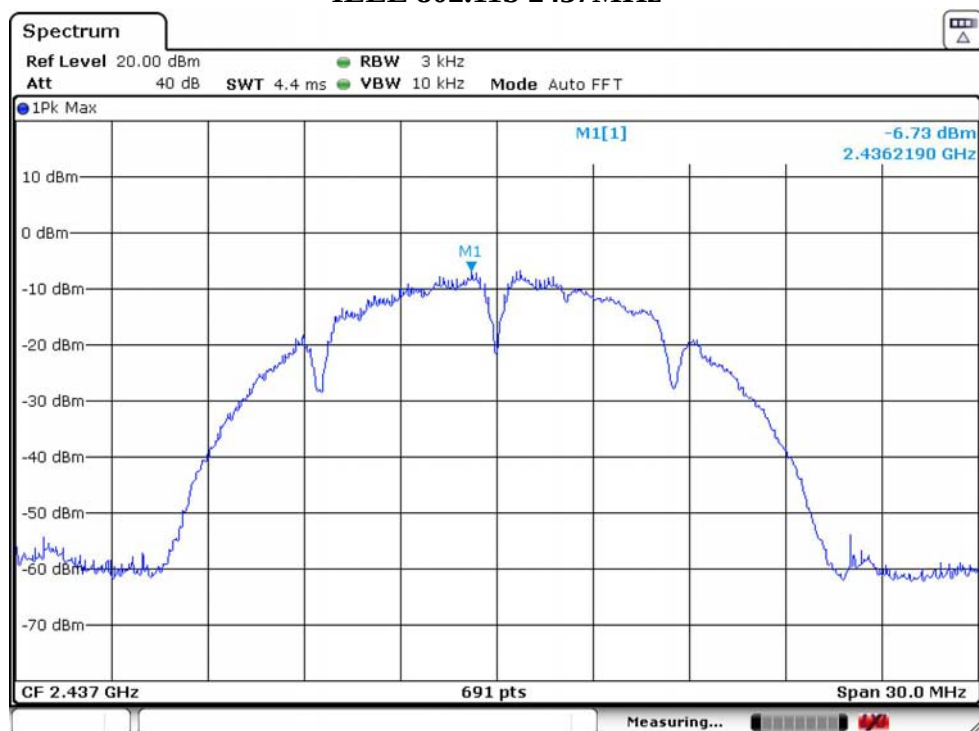


IEEE 802.11b 2462MHz

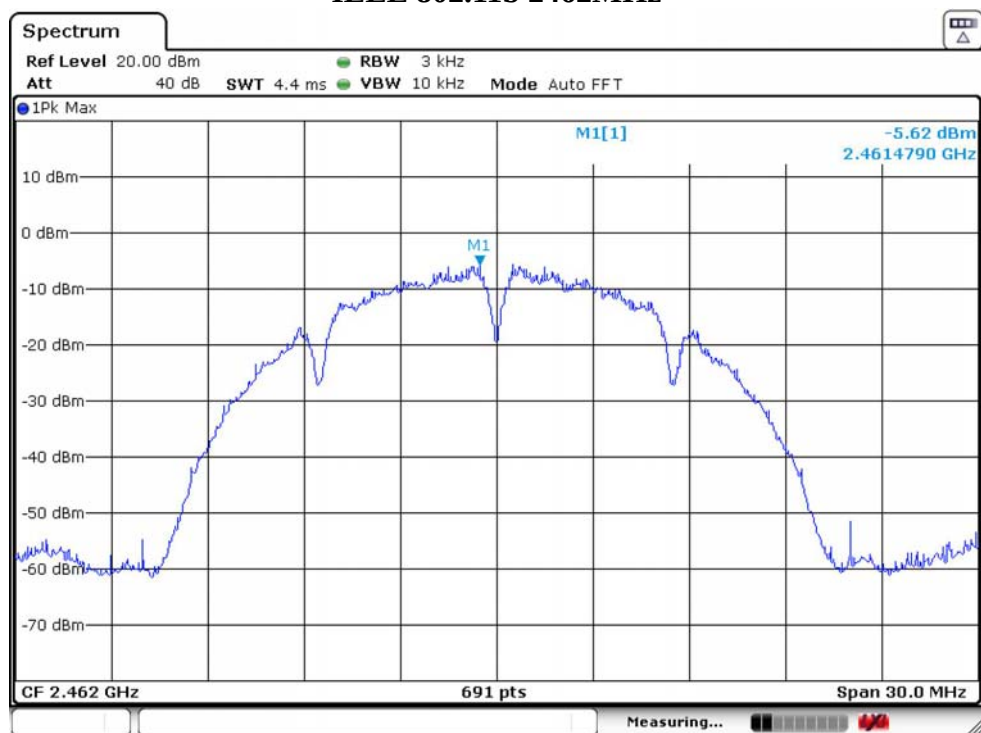


IEEE 802.11g 2412MHz

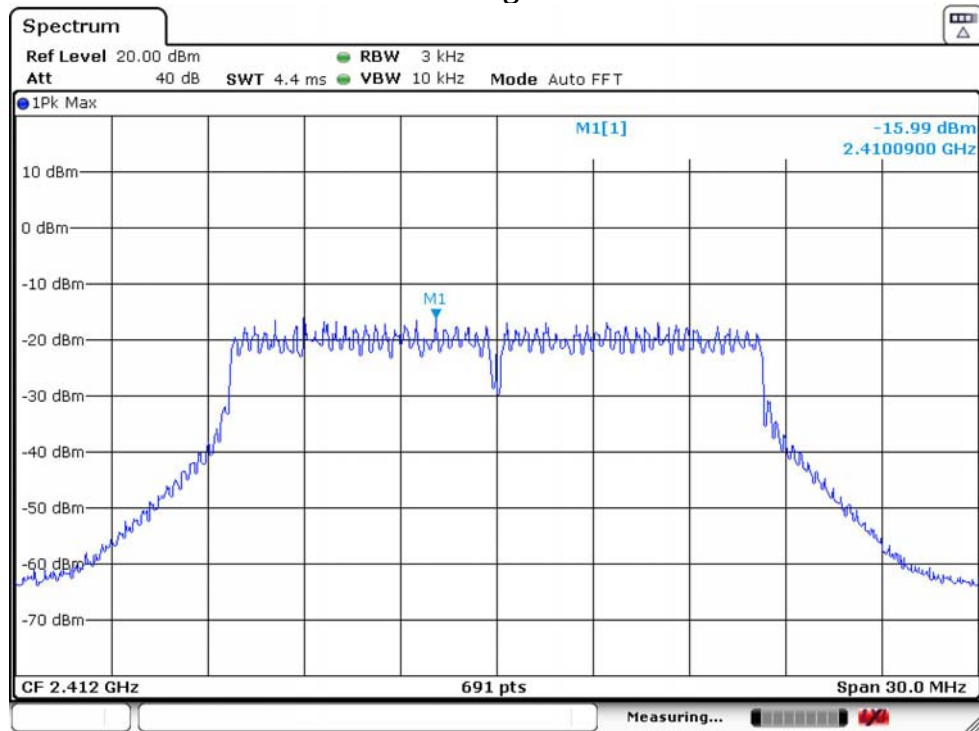


IEEE 802.11g 2437MHz

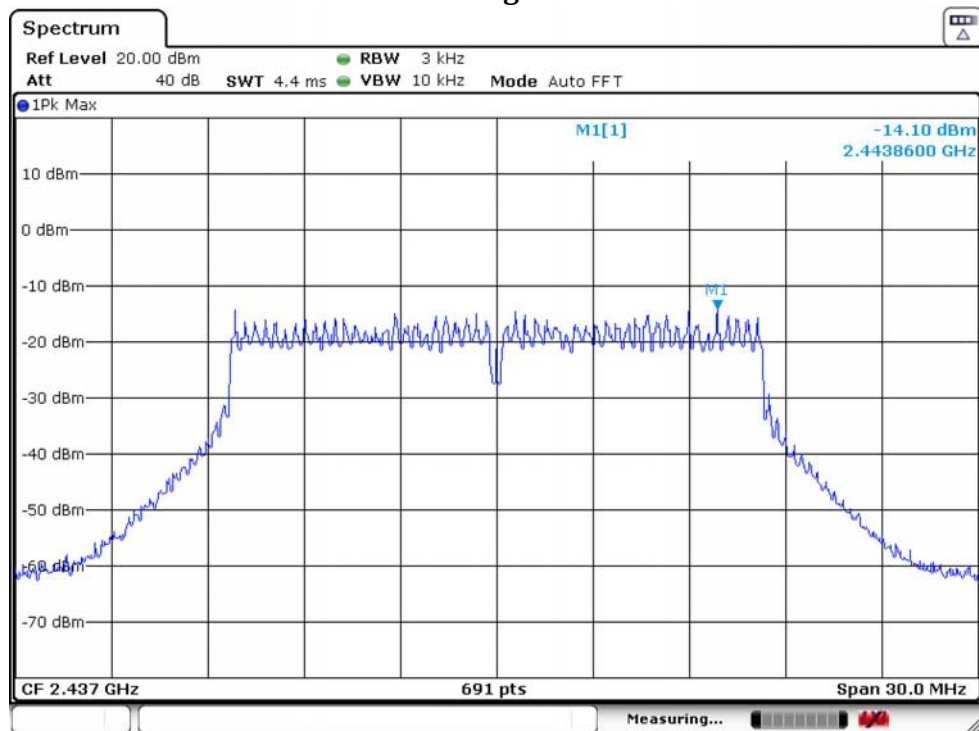


IEEE 802.11g 2462MHz

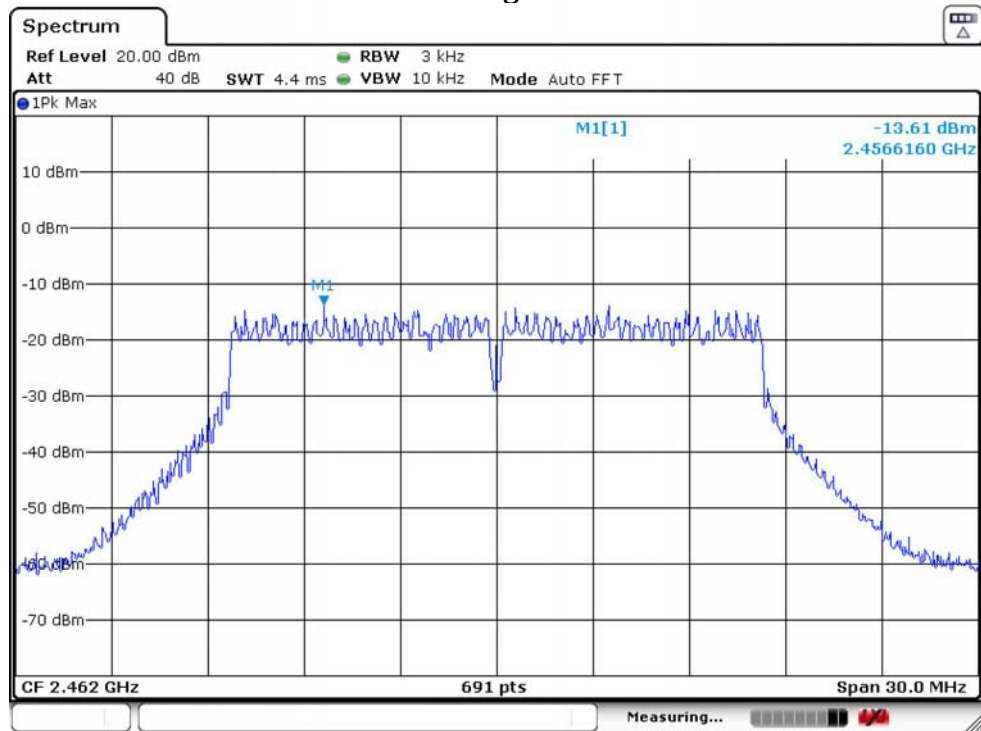


IEEE 802.11n HT20 2412MHz

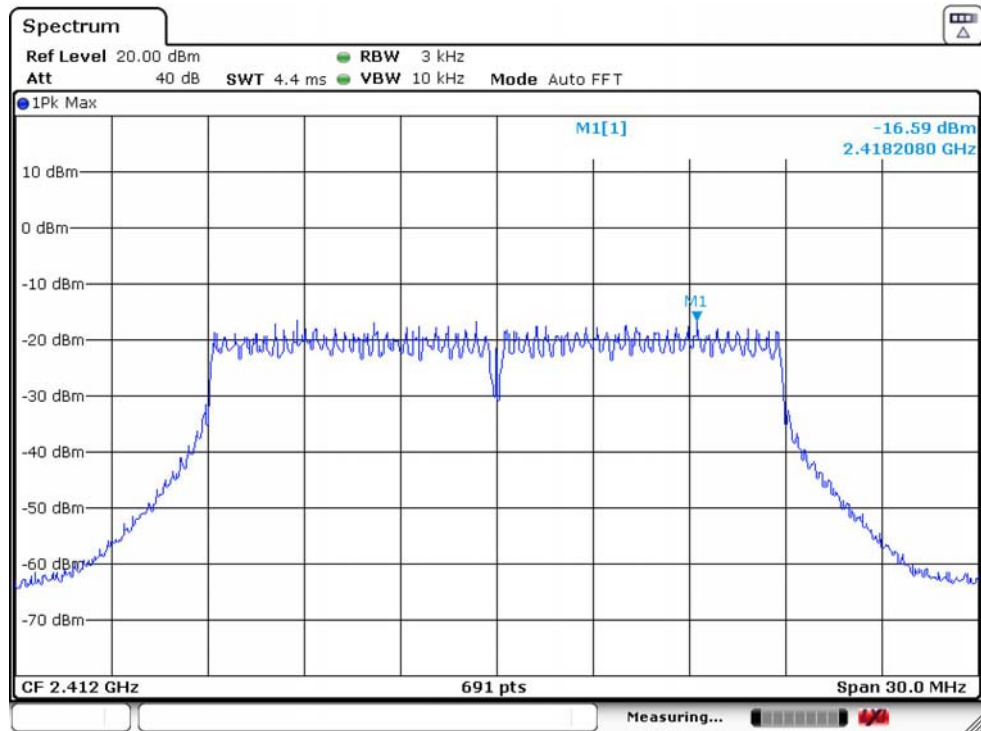


IEEE 802.11n HT20 2437MHz

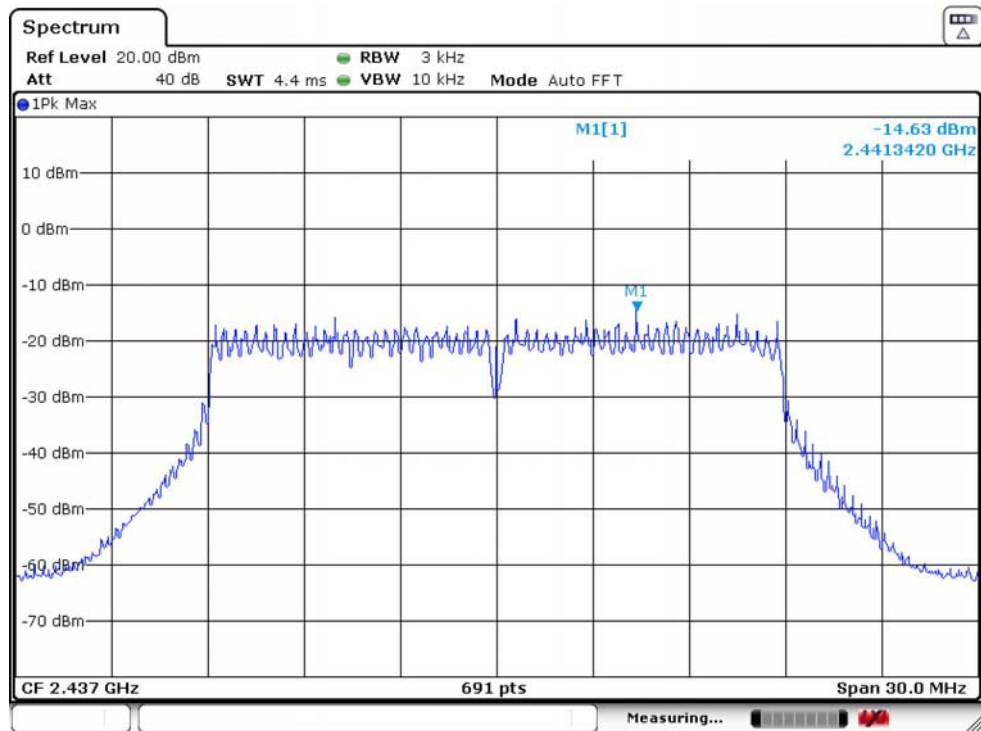


IEEE 802.11n HT20 2462MHz

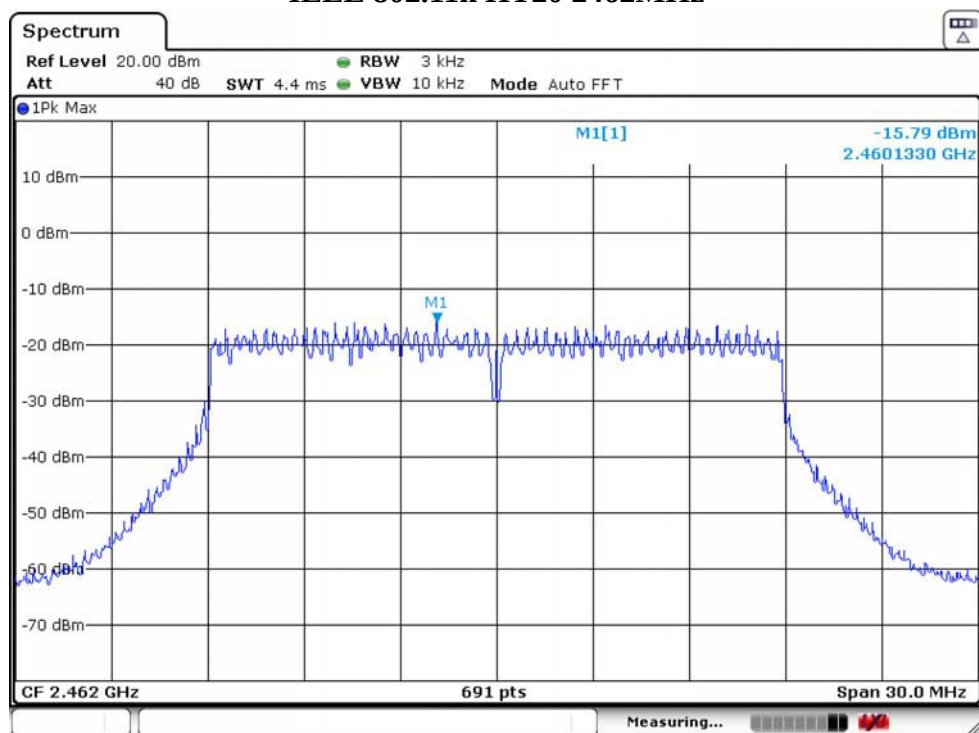


IEEE 802.11n HT40 2422MHz

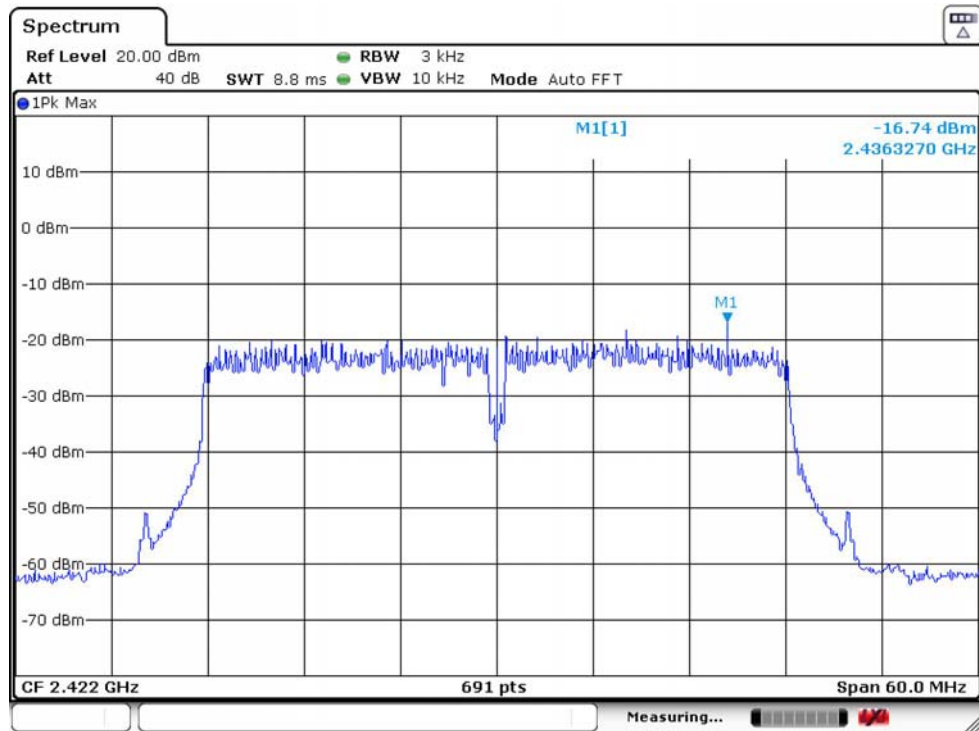

IEEE 802.11n HT40 2437MHz

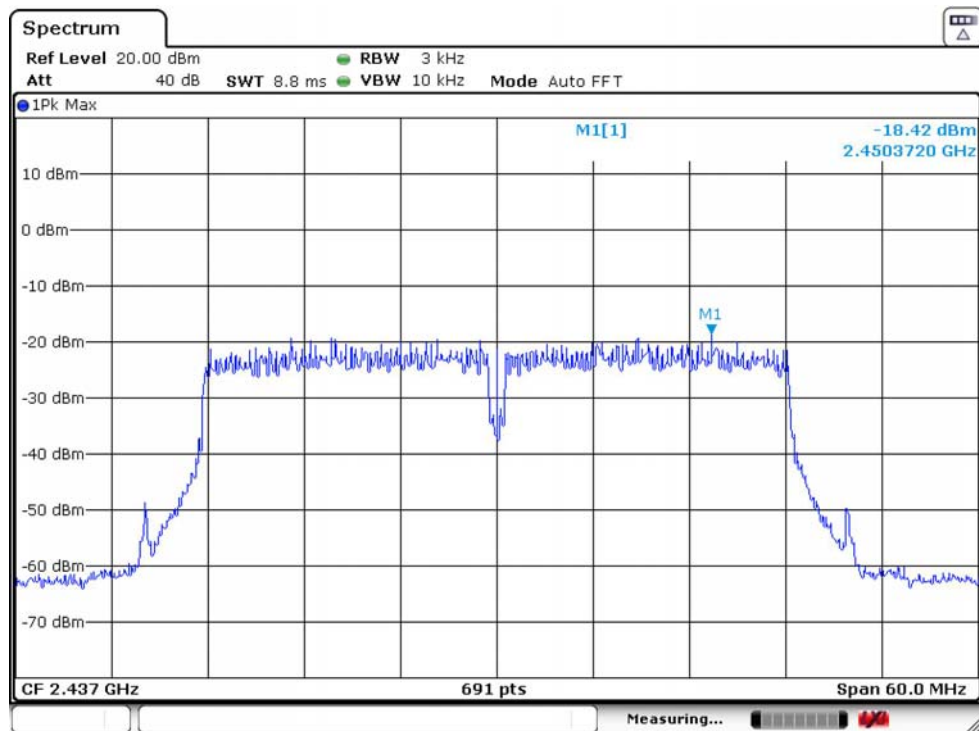

IEEE 802.11n HT40 2452MHz

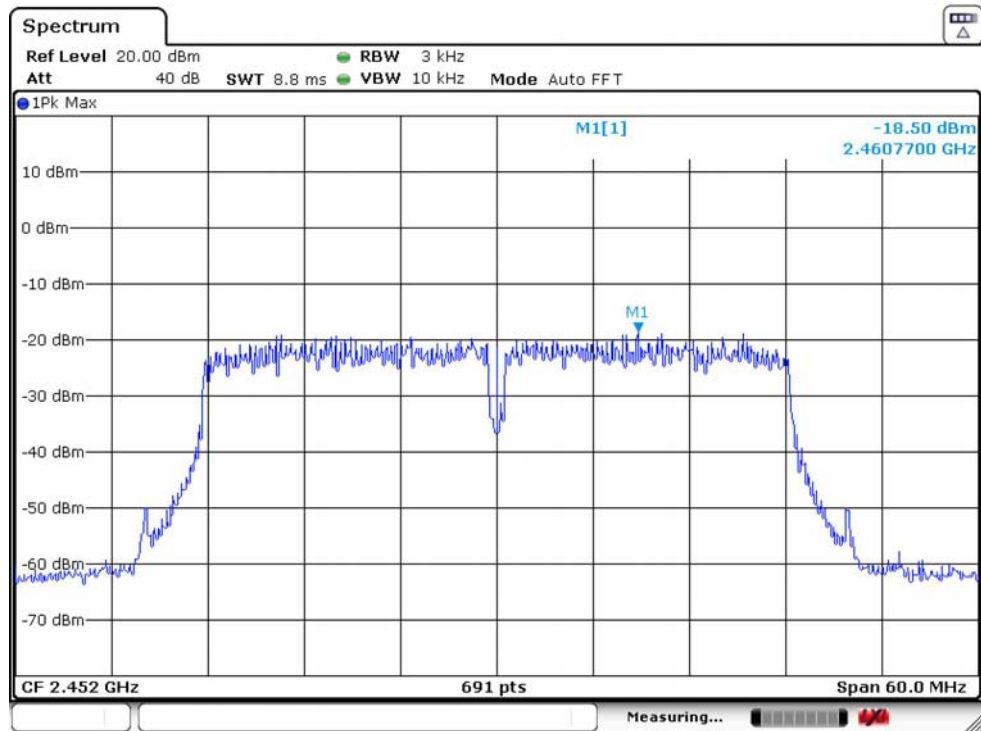


6. CONDUCTED BAND EDGE

6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2. Test Setup

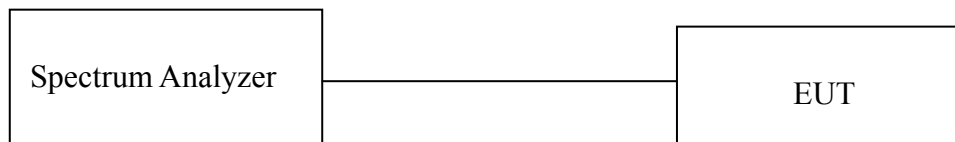

6.3. Spectrum Analyzer Setting



Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

6.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 6.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

6.5. Test Result

Temperature	23℃	Relative Humidity	48%	Test Voltage	120V/60Hz
Result	PASS				

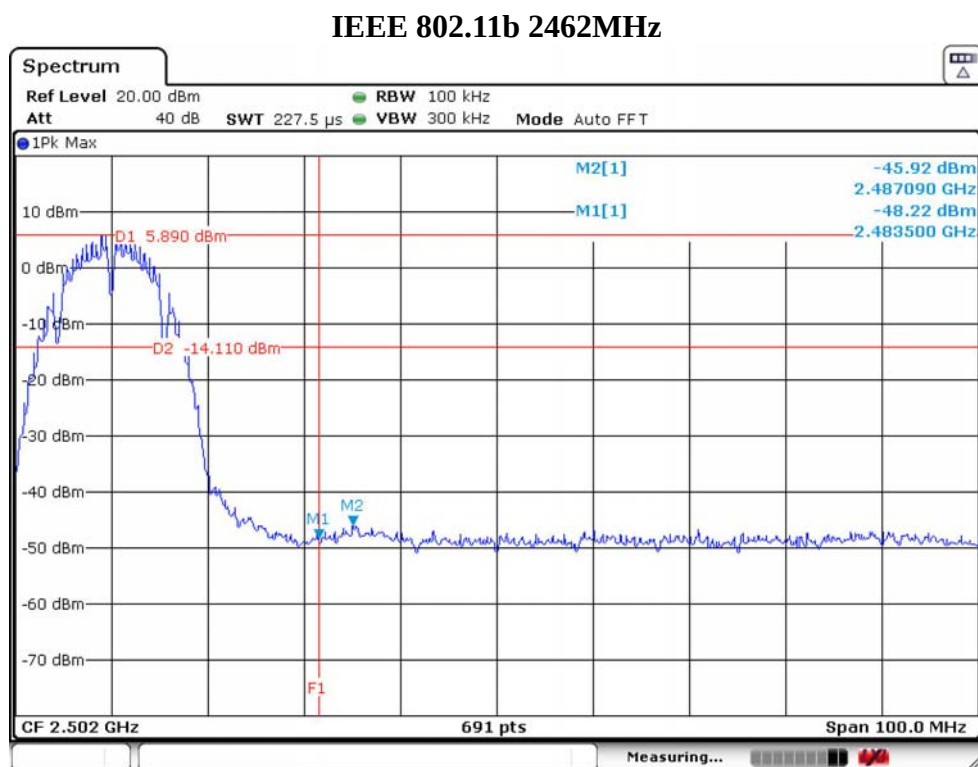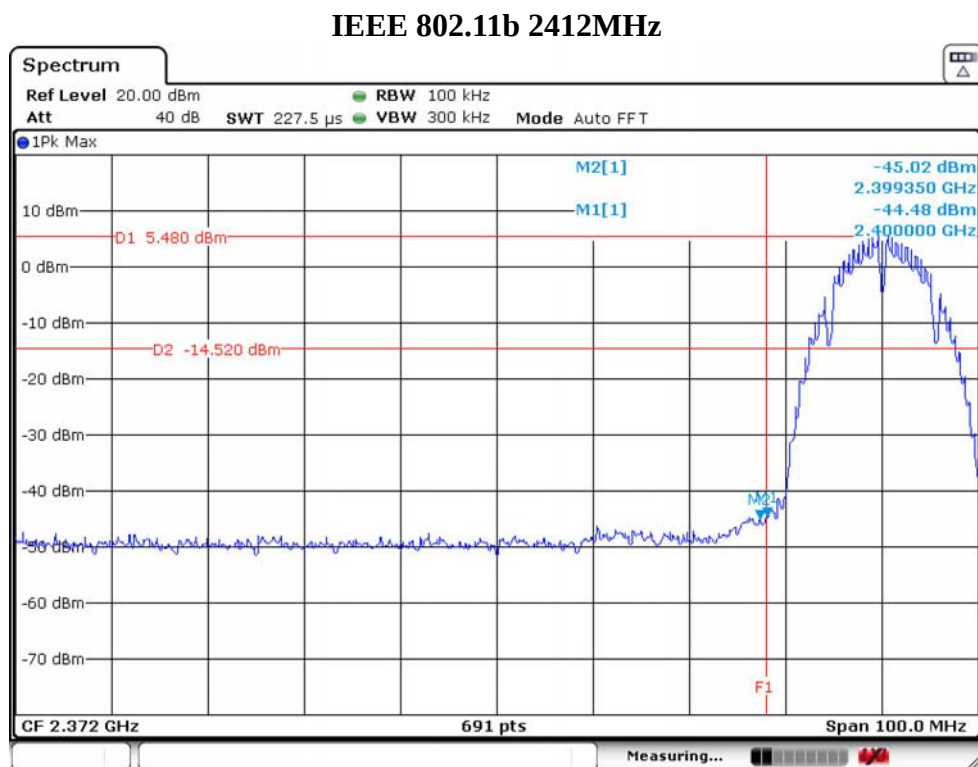


All modulations are all tested ,only worse case is reported

7. CONDUCTED SPURIOUS EMISSIONS

7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2. Test Setup

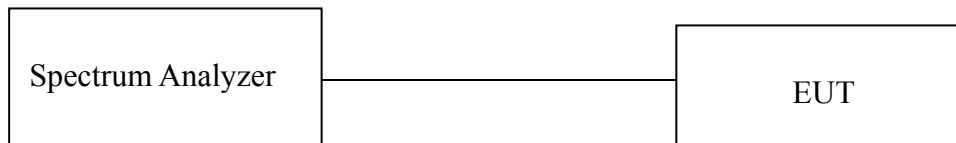

7.3. Spectrum Analyzer Setting


Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	25GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

7.4. Test Procedure


- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 7.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

7.5. Test Result


Temperature	23°C	Relative Humidity	48%	Test Voltage	120V/60Hz
Result	PASS				

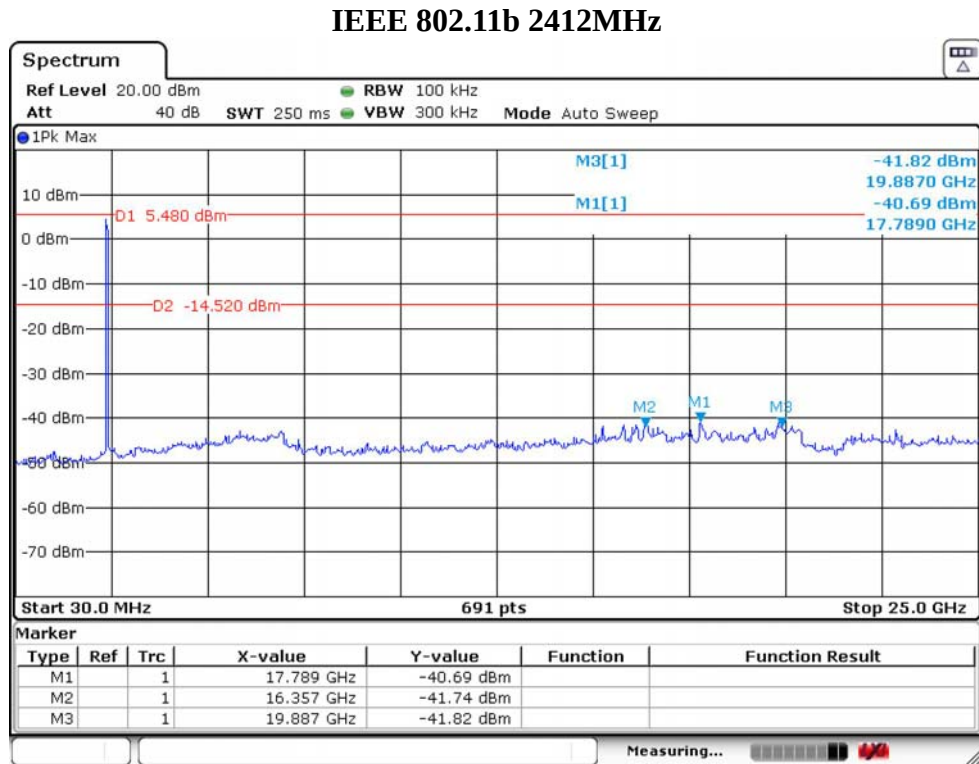

IEEE 802.11b 2437MHz

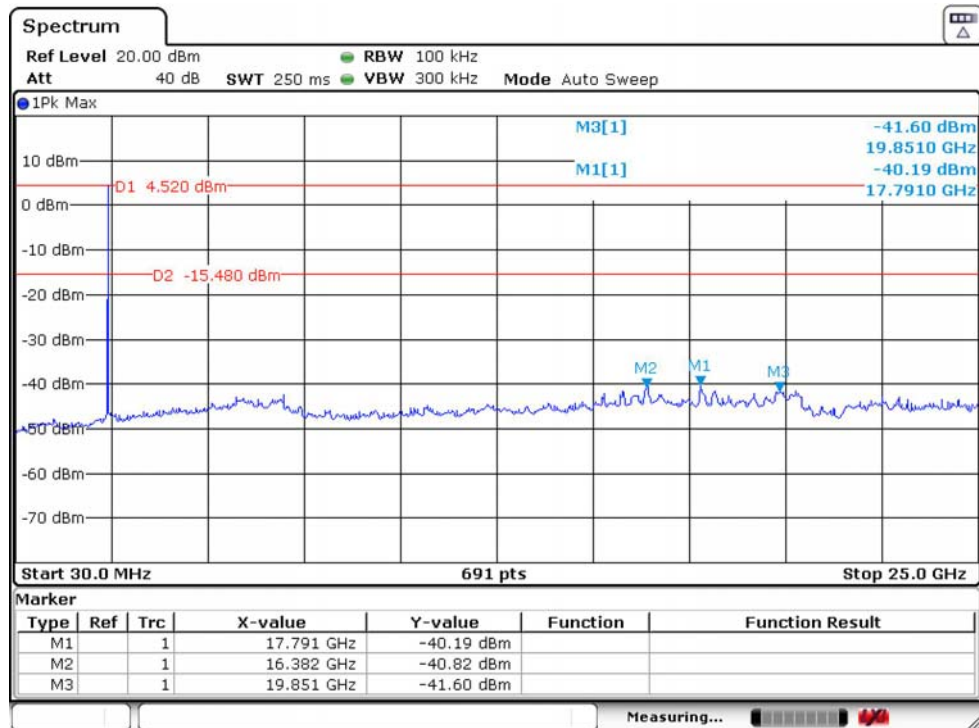

IEEE 802.11b 2462MHz

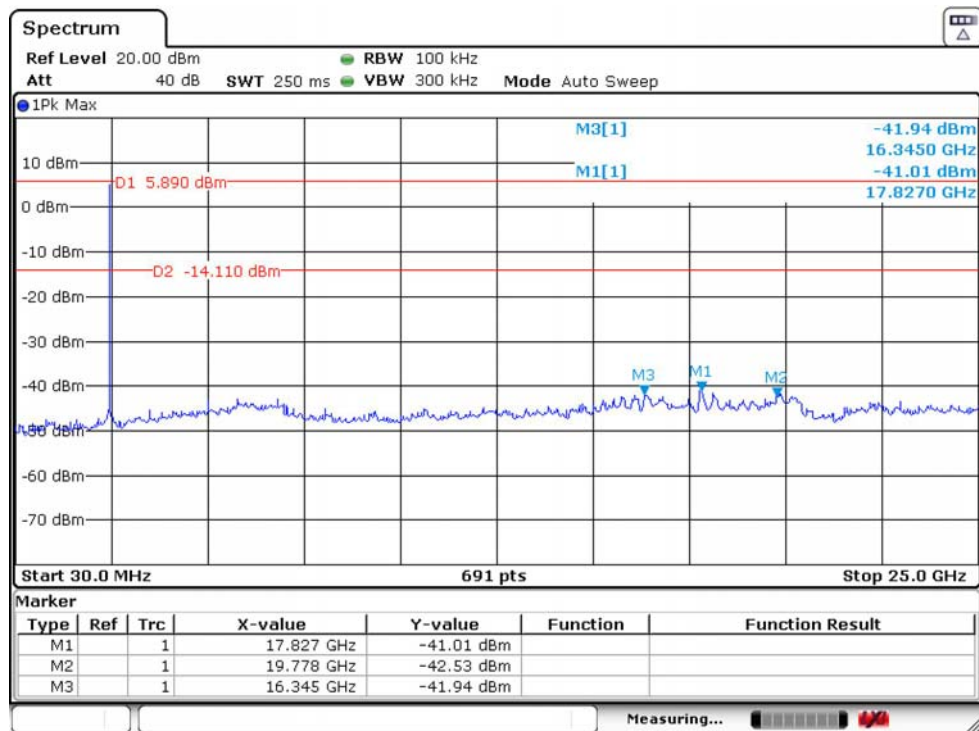

All modulations are all tested ,only worse case is reported

8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:


- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Test setup


9kHz~30MHz

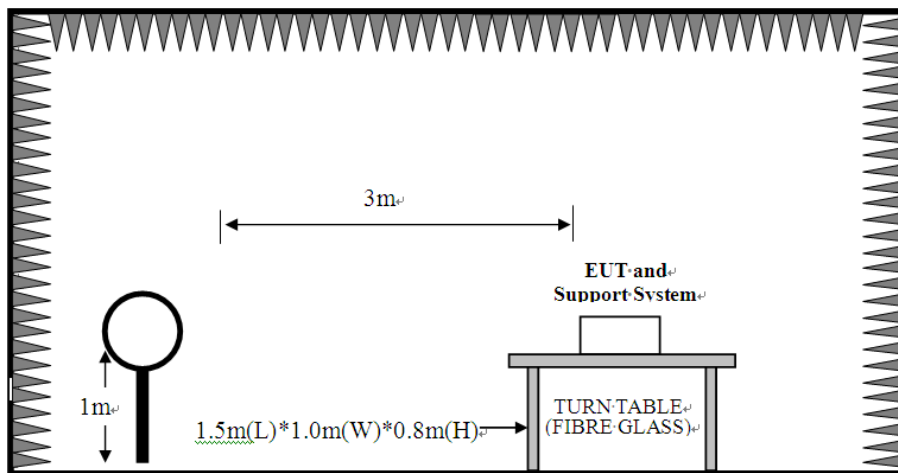

30~1000MHz

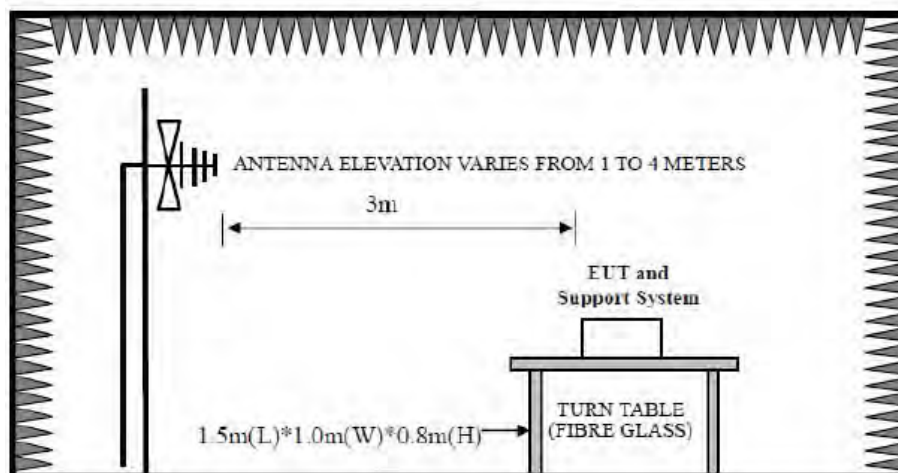

Above 1GHz

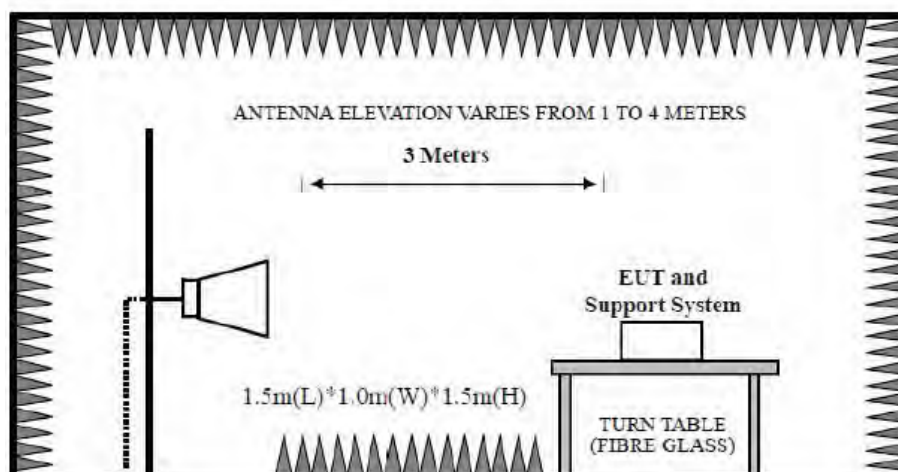

8.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$, VBW=10Hz
		Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :

1. T is the on-time time of the duty cycle, when EUT transmit continuously with maximum output power, unit is seconds. reference section 2.8 for the on-time time.

8.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2412MHz/2422MHz/2437MHz/2452MHz/2462MHz are fundamental frequency, which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

8.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

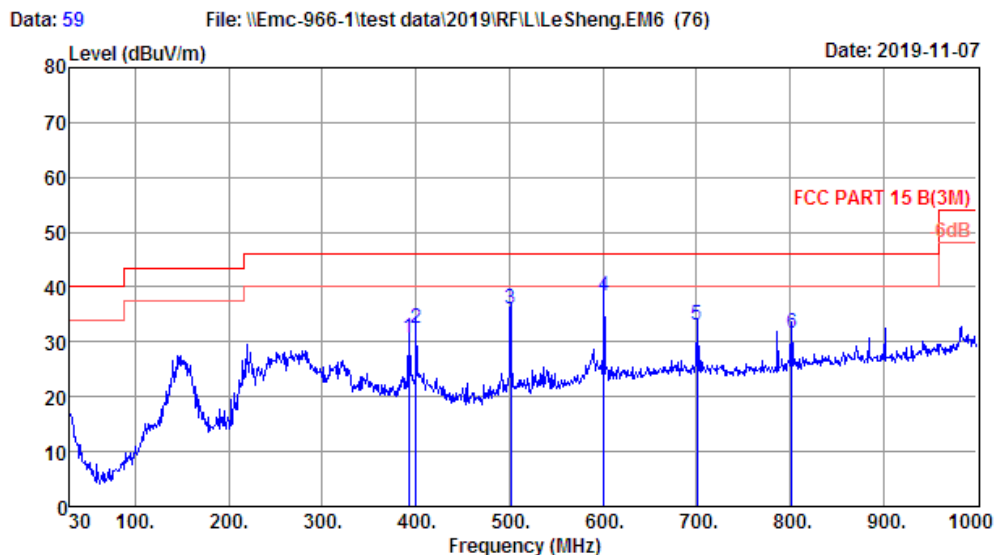

Site no. : 1# 966 Chamber Data no. : 59
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:26.3';Humi:44%;Press:101.42kPa
 Engineer : Pablo
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 JQS0361A-U240120

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	392.78	16.20	2.13	12.23	30.56	46.00	15.44	QP
2	400.54	16.22	2.14	14.10	32.46	46.00	13.54	QP
3	501.42	18.32	2.67	14.93	35.92	46.00	10.08	QP
4	601.33	20.42	2.99	14.87	38.28	46.00	7.72	QP
5	701.24	21.70	3.26	8.06	33.02	46.00	12.98	QP
6	802.12	22.96	3.59	5.16	31.71	46.00	14.29	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 60

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-11-07

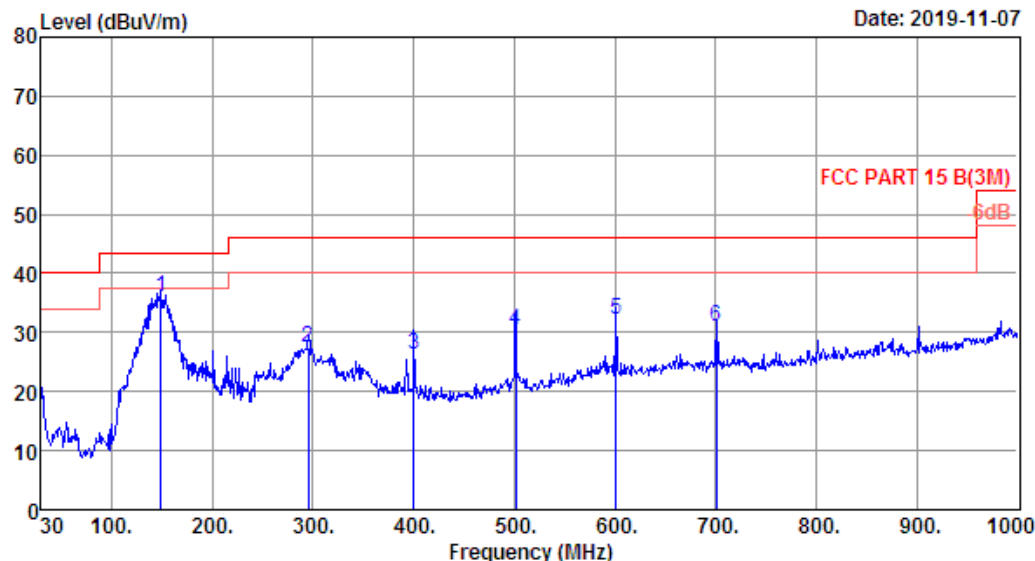

Site no. : 1# 966 Chamber Data no. : 60
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:26.3'; Humi:44%; Press:101.42kPa
 Engineer : Pablo
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 JQS0361A-U240120

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	149.31	11.62	1.09	23.39	36.10	43.50	7.40	QP
2	295.78	13.56	1.83	12.09	27.48	46.00	18.52	QP
3	400.54	16.22	2.14	7.99	26.35	46.00	19.65	QP
4	501.42	18.32	2.67	9.48	30.47	46.00	15.53	QP
5	601.33	20.42	2.99	8.84	32.25	46.00	13.75	QP
6	701.24	21.70	3.26	6.12	31.08	46.00	14.92	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 61

File: \\Emc-966-1\test data\2019\RF\LeSheng.EM6 (76)

Date: 2019-11-07

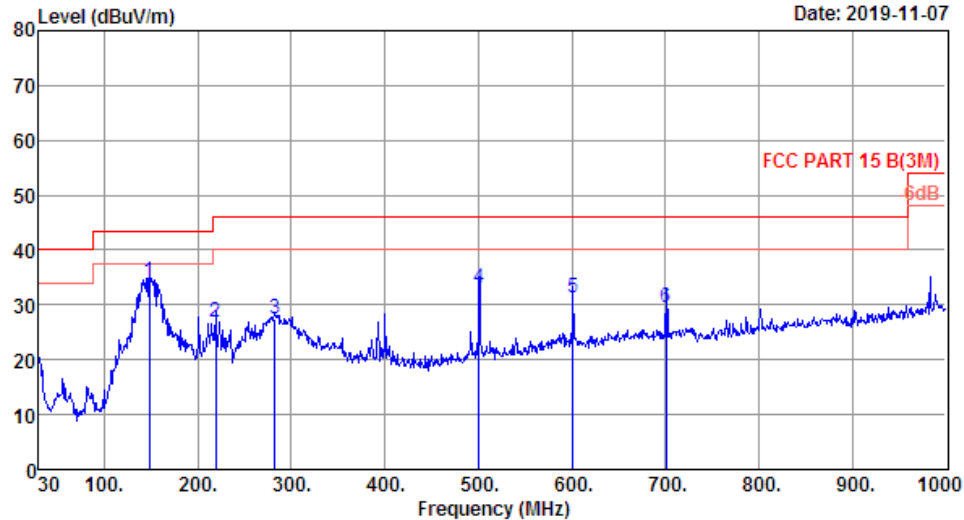

Site no. : 1# 966 Chamber Data no. : 61
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:26.3';Humi:44%;Press:101.42kPa
 Engineer : Pablo
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 DBS036A-2401200U

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	148.34	11.64	1.08	21.44	34.16	43.50	9.34	QP
2	219.15	9.56	1.41	15.88	26.85	46.00	19.15	QP
3	282.20	12.72	1.76	13.06	27.54	46.00	18.46	QP
4	500.45	18.30	2.67	12.23	33.20	46.00	12.80	QP
5	601.33	20.42	2.99	7.97	31.38	46.00	14.62	QP
6	701.24	21.70	3.26	4.68	29.64	46.00	16.36	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 62

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-11-07

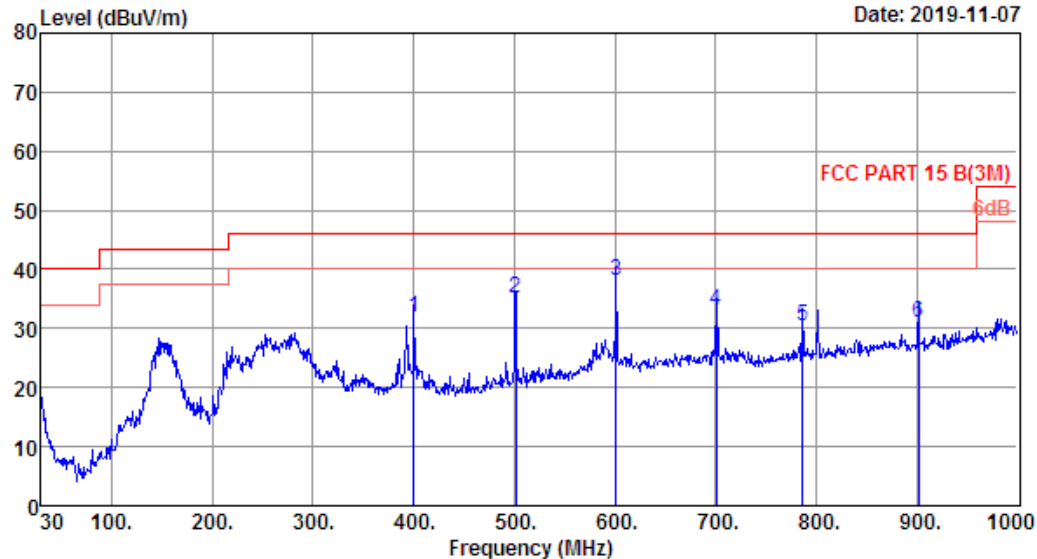

Site no. : 1# 966 Chamber Data no. : 62
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:26.3'; Humi:44%; Press:101.42kPa
 Engineer : Pablo
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 DBS036A-2401200U

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	400.54	16.22	2.14	13.53	31.89	46.00	14.11	QP
2	501.42	18.32	2.67	14.29	35.28	46.00	10.72	QP
3	601.33	20.42	2.99	14.80	38.21	46.00	7.79	QP
4	701.24	21.70	3.26	8.12	33.08	46.00	12.92	QP
5	786.60	22.66	3.51	4.23	30.40	46.00	15.60	QP
6	902.03	23.92	3.89	3.32	31.13	46.00	14.87	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 63

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-11-07

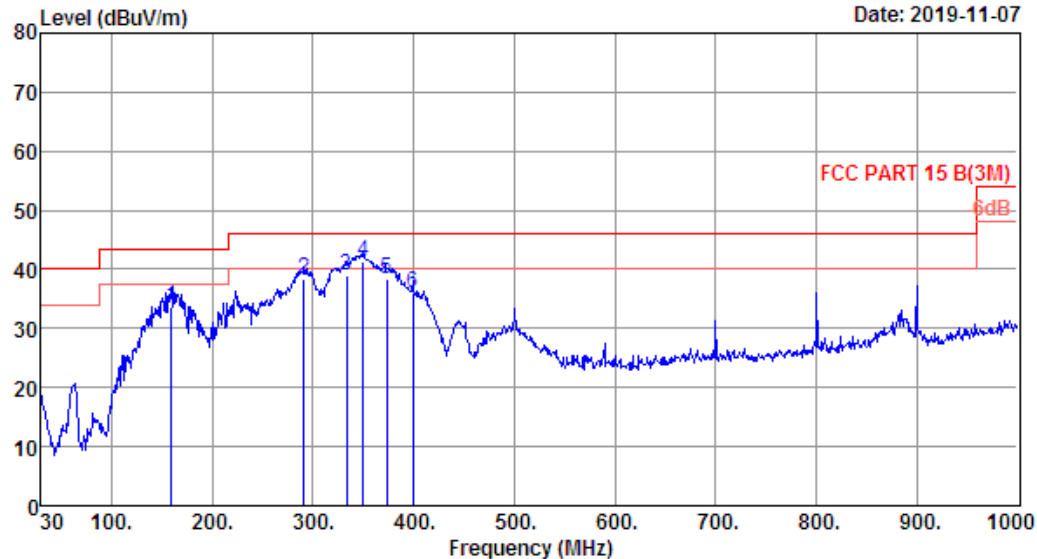


Site no. : 1# 966 Chamber Data no. : 63
 Dis. / Ant. : 3m 37062 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:26.3'; Humi:44%; Press:101.42kPa
 Engineer : Pablo
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 MS1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.01	11.30	1.14	21.15	33.59	43.50	9.91	QP
2	290.93	13.26	1.83	23.43	38.52	46.00	7.48	QP
3	333.61	14.64	2.02	22.39	39.05	46.00	6.95	QP
4	350.10	15.40	2.11	23.68	41.19	46.00	4.81	QP
5	373.38	15.52	2.18	20.56	38.26	46.00	7.74	QP
6	399.57	16.20	2.14	17.75	36.09	46.00	9.91	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

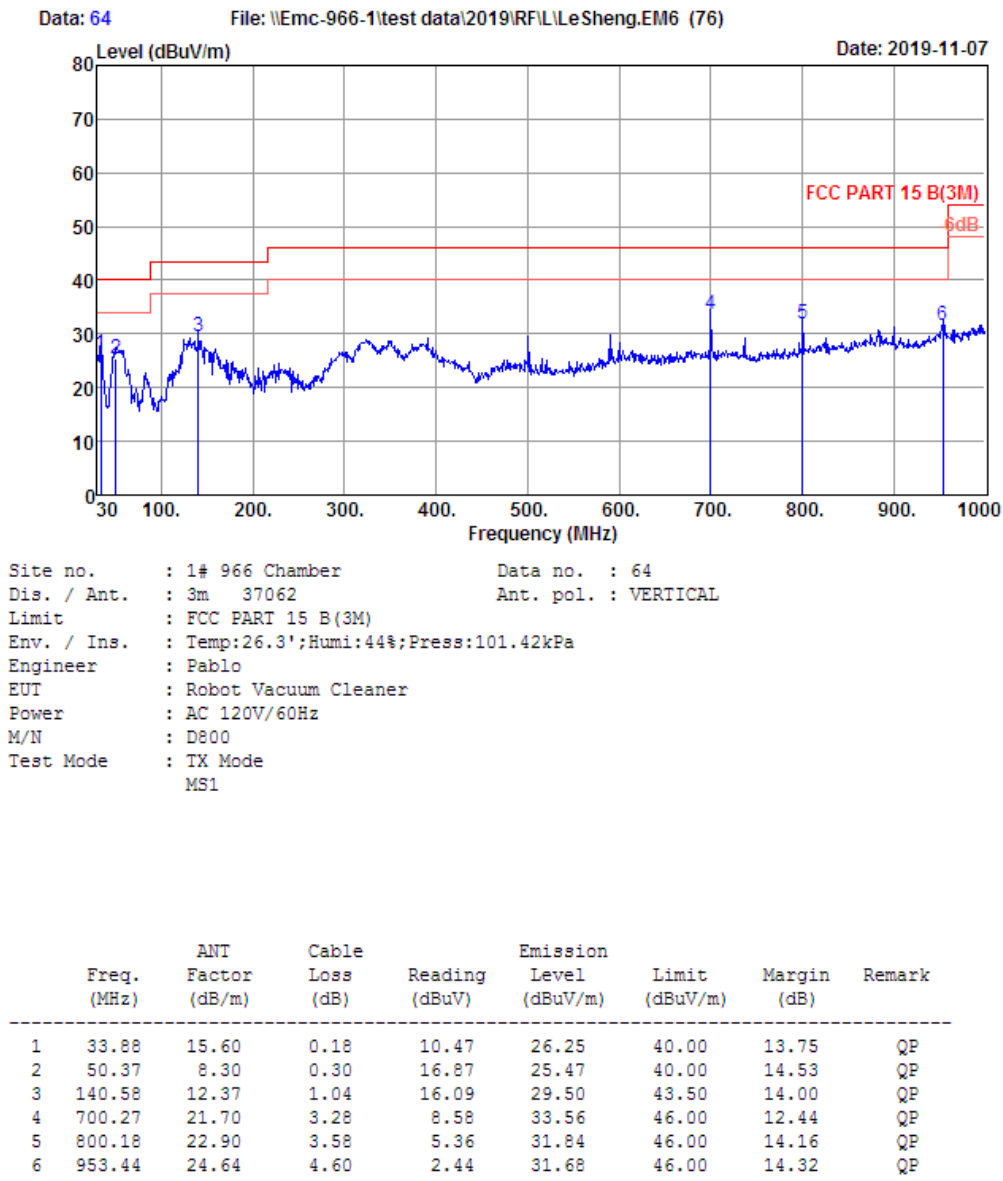

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.

Radiated Emissions Above 1G


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 49

File: \\Emc-966-1\test data\2019\RF\IL\LeSheng.EM6 (76)

Date: 2019-10-26

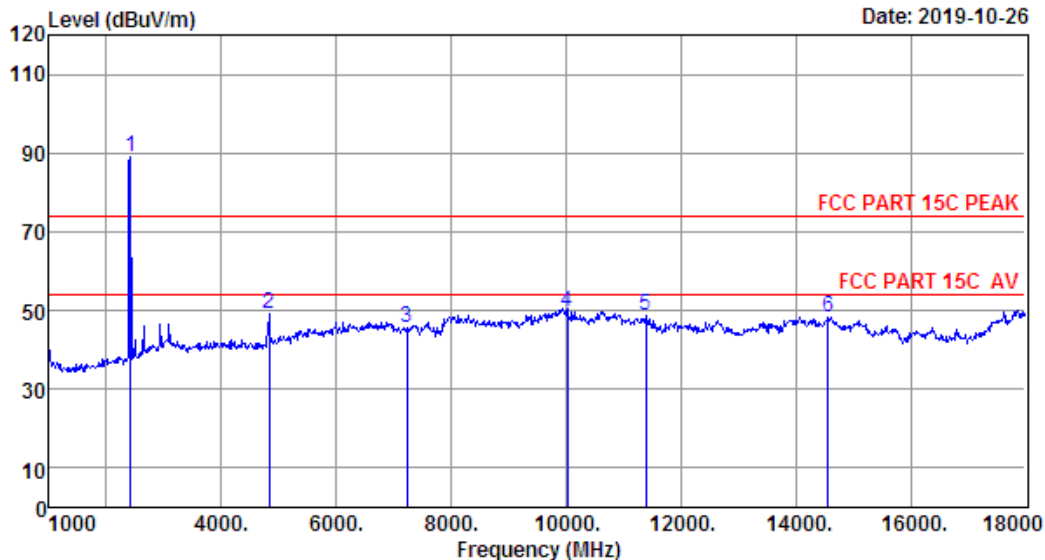

Site no. : 1# 966 Chamber Data no. : 49
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.28	1.46	34.64	94.87	88.97	74.00	-14.97	Peak
2	4824.00	31.18	3.26	34.67	49.37	49.14	74.00	24.86	Peak
3	7236.00	36.28	5.20	34.82	38.92	45.58	74.00	28.42	Peak
4	10027.00	38.93	5.90	34.21	39.02	49.64	74.00	24.36	Peak
5	11387.00	39.90	6.14	34.62	37.35	48.77	74.00	25.23	Peak
6	14566.00	40.99	6.89	34.47	34.82	48.23	74.00	25.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 50

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-10-26

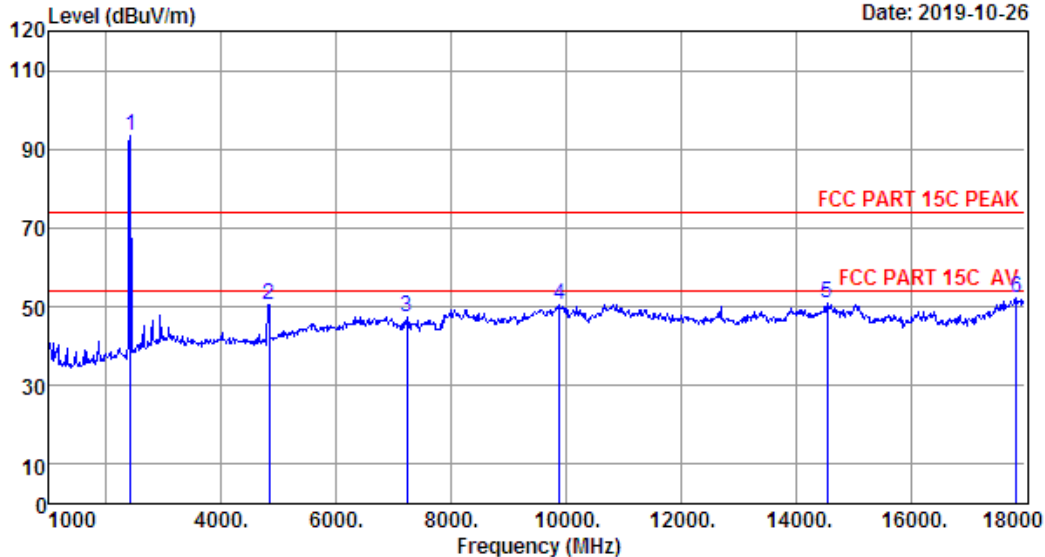

Site no. : 1# 966 Chamber Data no. : 50
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.28	1.46	34.64	99.24	93.34	74.00	-19.34	Peak
2	4824.00	31.18	3.26	34.67	50.50	50.27	74.00	23.73	Peak
3	7236.00	36.28	5.20	34.82	40.92	47.58	74.00	26.42	Peak
4	9891.00	38.69	5.81	34.22	40.34	50.62	74.00	23.38	Peak
5	14549.00	40.99	6.89	34.46	37.35	50.77	74.00	23.23	Peak
6	17847.00	47.68	8.14	34.32	30.75	52.25	74.00	21.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 51

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-10-26

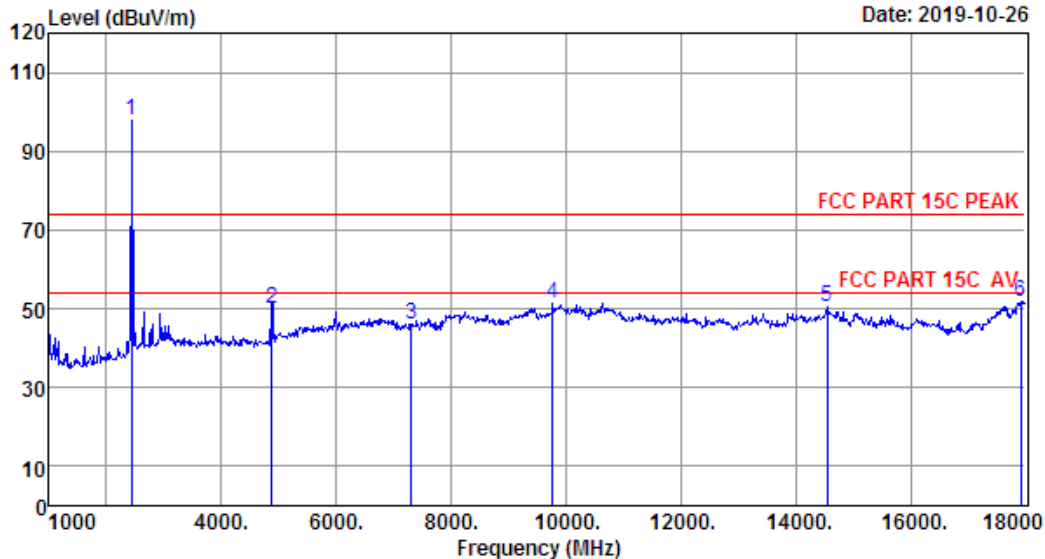

Site no. : 1# 966 Chamber Data no. : 51
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.33	1.47	34.62	103.89	98.07	74.00	-24.07	Peak
2	4874.00	31.37	3.31	34.68	50.25	50.25	74.00	23.75	Peak
3	7311.00	36.42	5.22	34.83	39.15	45.96	74.00	28.04	Peak
4	9772.00	38.45	5.72	34.24	41.43	51.36	74.00	22.64	Peak
5	14549.00	40.99	6.89	34.46	36.85	50.27	74.00	23.73	Peak
6	17915.00	48.22	8.18	34.31	29.82	51.91	74.00	22.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 52

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-10-26

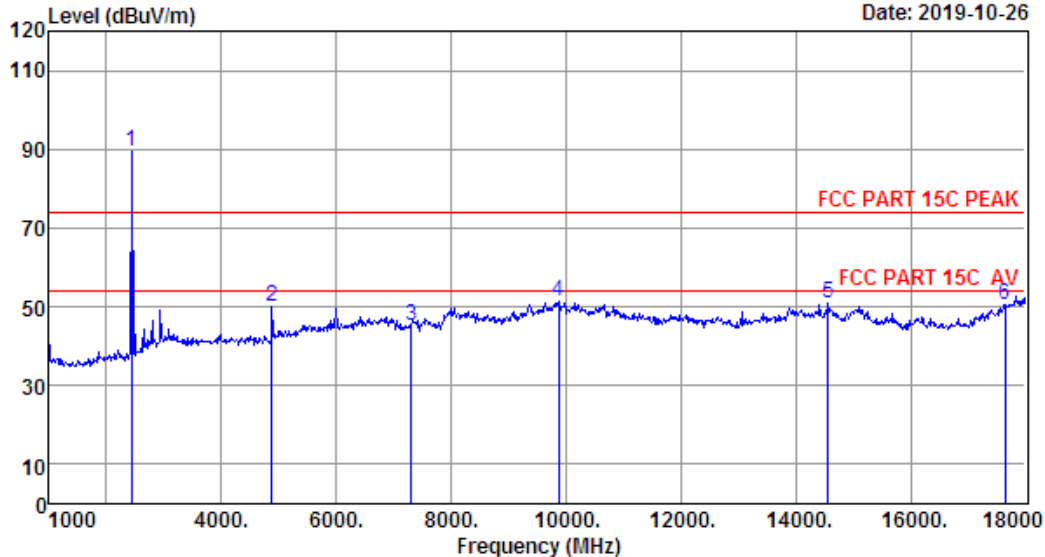

Site no. : 1# 966 Chamber Data no. : 52
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2437MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.33	1.47	34.62	95.23	89.41	74.00	-15.41	Peak
2	4874.00	31.37	3.31	34.68	50.03	50.03	74.00	23.97	Peak
3	7311.00	36.42	5.22	34.83	38.47	45.28	74.00	28.72	Peak
4	9874.00	38.66	5.80	34.22	41.30	51.54	74.00	22.46	Peak
5	14566.00	40.99	6.89	34.47	37.33	50.74	74.00	23.26	Peak
6	17643.00	46.05	8.01	34.34	30.76	50.48	74.00	23.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 53

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-10-26

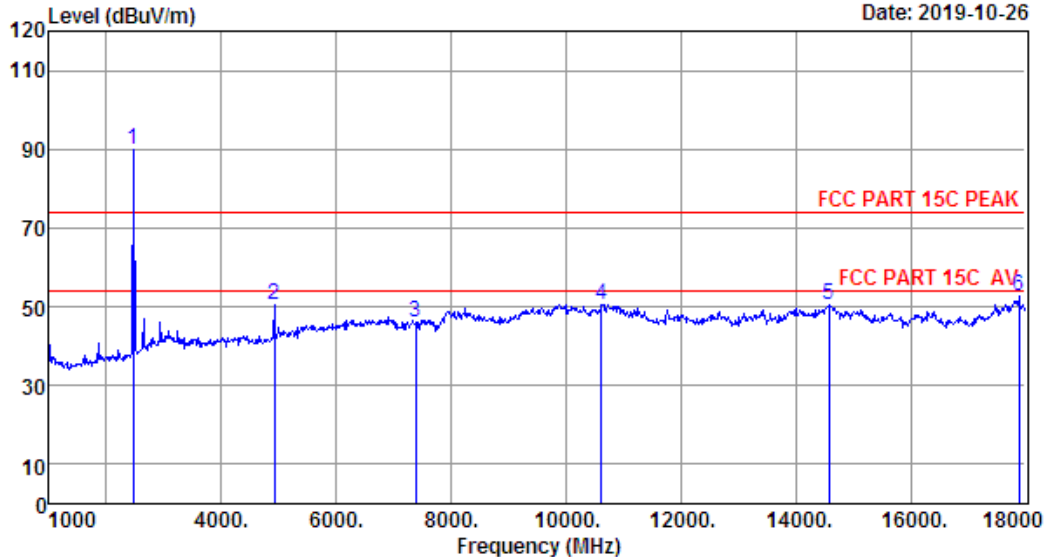


Site no. : 1# 966 Chamber Data no. : 53
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.35	1.48	34.62	95.63	89.84	74.00	-15.84	Peak
2	4924.00	31.55	3.35	34.69	50.32	50.53	74.00	23.47	Peak
3	7386.00	36.59	5.24	34.84	39.08	46.07	74.00	27.93	Peak
4	10622.00	39.53	6.04	34.39	39.45	50.63	74.00	23.37	Peak
5	14583.00	40.98	6.89	34.47	36.86	50.26	74.00	23.74	Peak
6	17881.00	47.95	8.16	34.31	30.95	52.75	74.00	21.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

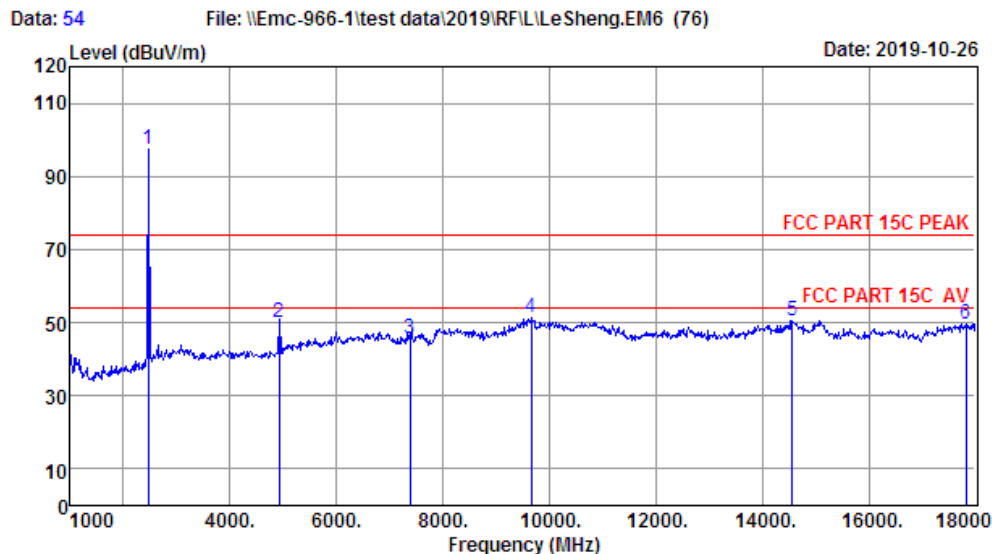

Site no. : 1# 966 Chamber Data no. : 54
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.35	1.48	34.62	103.31	97.52	74.00	-23.52	Peak
2	4924.00	31.55	3.35	34.69	49.72	49.93	74.00	24.07	Peak
3	7386.00	36.59	5.24	34.84	38.43	45.42	74.00	28.58	Peak
4	9653.00	38.21	5.62	34.27	41.68	51.24	74.00	22.76	Peak
5	14566.00	40.99	6.89	34.47	37.27	50.68	74.00	23.32	Peak
6	17830.00	47.54	8.13	34.32	28.40	49.75	74.00	24.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All modulations are all tested ,only worse case is reported

Radiated Band Edge


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 55

File: \\Emc-966-1\test data\2019\RF\IL\LeSheng.EM6 (76)

Date: 2019-10-26

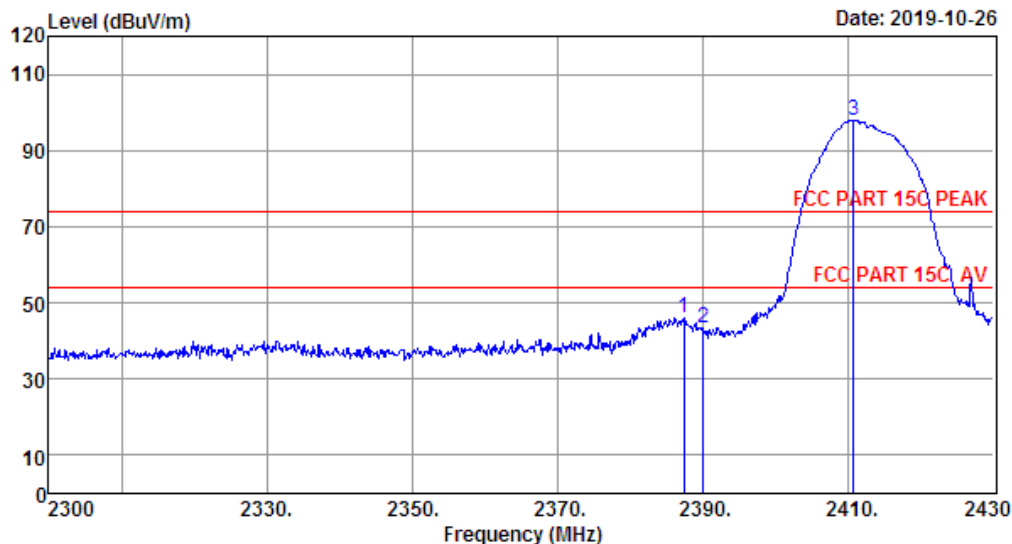

Site no. : 1# 966 Chamber Data no. : 55
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3';Humi:54%;Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.36	27.26	1.45	34.64	52.20	46.27	74.00	27.73	Peak
2	2390.00	27.26	1.45	34.64	49.43	43.50	74.00	30.50	Peak
3	2410.63	27.28	1.46	34.64	103.80	97.90	74.00	-23.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 56

File: \\Emc-966-1\\test data\\2019\\RFIL\\LeSheng.EM6 (76)

Date: 2019-10-26

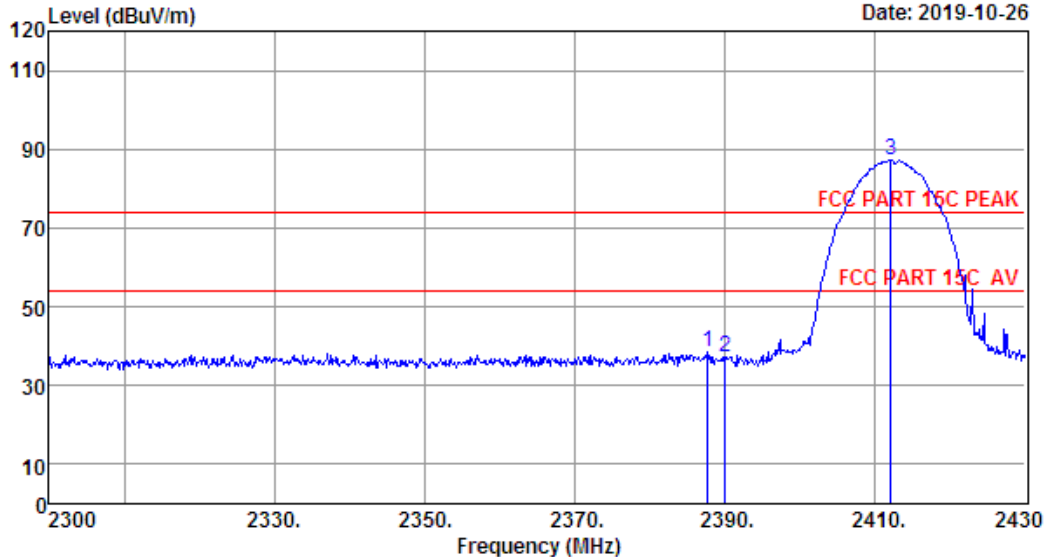

Site no. : 1# 966 Chamber Data no. : 56
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.75	27.26	1.45	34.64	44.49	38.56	74.00	35.44	Peak
2	2390.00	27.26	1.45	34.64	43.10	37.17	74.00	36.83	Peak
3	2412.06	27.28	1.46	34.64	93.24	87.34	74.00	-13.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 89

File: \\Emc-966-1\test data\2019\RFIL\LeSheng.EM6 (90)

Date: 2019-10-26

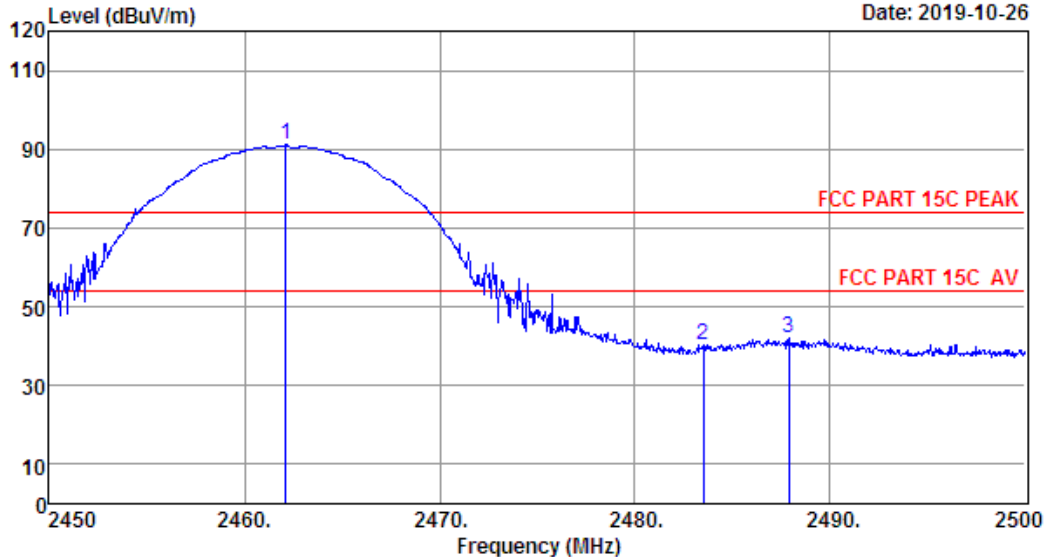

Site no. : 1# 966 Chamber Data no. : 89
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2462.10	27.35	1.48	34.62	96.80	91.01	74.00	-17.01	Peak
2	2483.50	27.38	1.48	34.61	46.05	40.30	74.00	33.70	Peak
3	2487.90	27.40	1.49	34.60	47.81	42.10	74.00	31.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 90

File: \\Emc-966-1\\test data\\2019\\RF\\IL\\LeSheng.EM6 (90)

Date: 2019-10-26

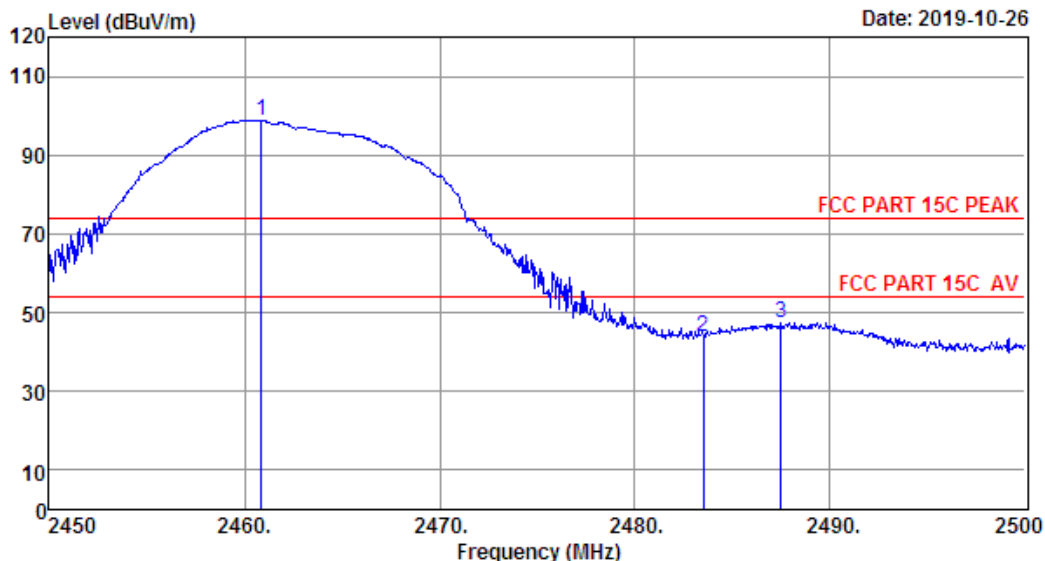

Site no. : 1# 966 Chamber Data no. : 90
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:27.3'; Humi:54%; Press:101.52kPa
 Engineer : Viking
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : IEEE 802.11b TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.85	27.35	1.48	34.62	104.59	98.80	74.00	-24.80	Peak
2	2483.50	27.38	1.48	34.61	49.68	43.93	74.00	30.07	Peak
3	2487.50	27.40	1.49	34.60	53.20	47.49	74.00	26.51	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All channels had been pre-test, only of the worst case channels were reported.

9. AC POWER LINE CONDUCTED EMISSIONS


9.1. Limit

Frequency			Maximum RF Line Voltage	
			Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz	~	500kHz	66 ~ 56*	56 ~ 46*
500kHz	~	5MHz	56	46
5MHz	~	30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

9.2. Test Setup

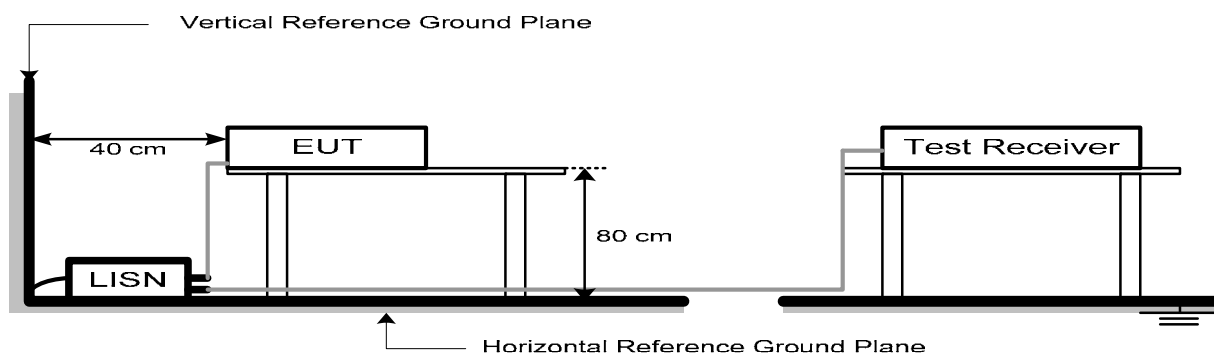

9.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


9.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 9.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

9.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

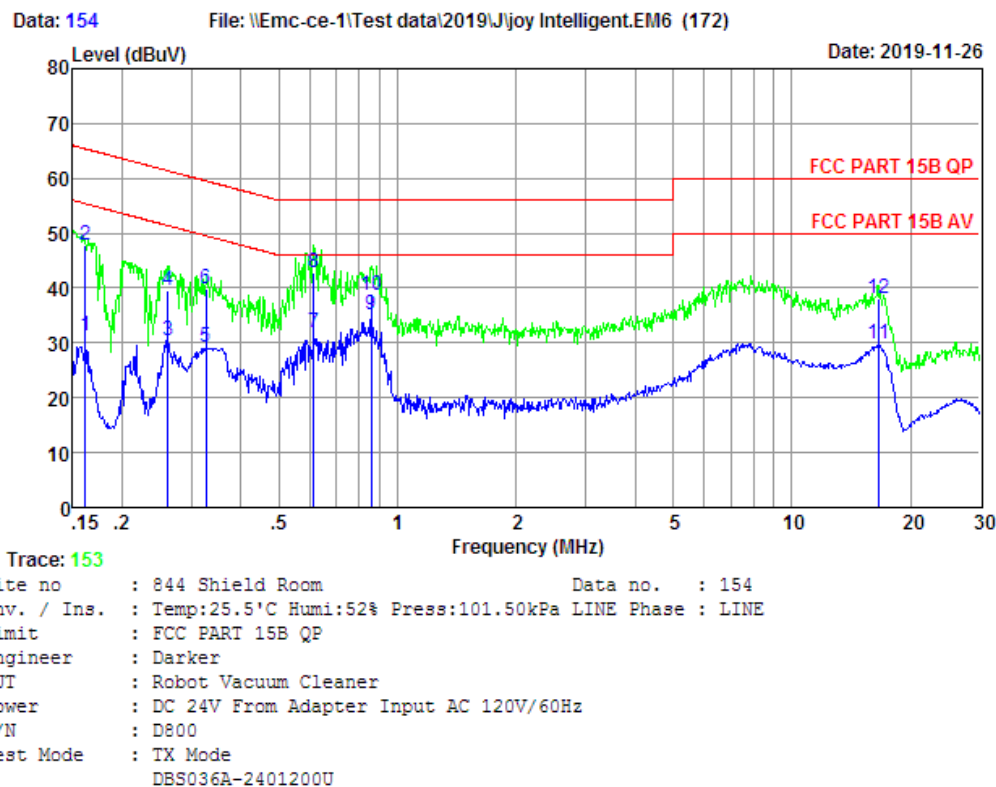

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.162	9.79	9.69	11.74	31.22	55.38	24.16	Average
2	0.162	9.79	9.69	28.20	47.68	65.38	17.70	QP
3	0.262	9.70	9.92	10.72	30.34	51.38	21.04	Average
4	0.262	9.70	9.92	20.00	39.62	61.38	21.76	QP
5	0.327	9.68	9.92	9.50	29.10	49.53	20.43	Average
6	0.327	9.68	9.92	20.20	39.80	59.53	19.73	QP
7	0.614	9.86	9.92	12.16	31.94	46.00	14.06	Average
8	0.614	9.86	9.92	23.00	42.78	56.00	13.22	QP
9	0.857	9.80	9.93	15.36	35.09	46.00	10.91	Average
10	0.857	9.80	9.93	18.99	38.72	56.00	17.28	QP
11	16.573	9.87	10.13	9.80	29.80	50.00	20.20	Average
12	16.573	9.87	10.13	18.00	38.00	60.00	22.00	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 156

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

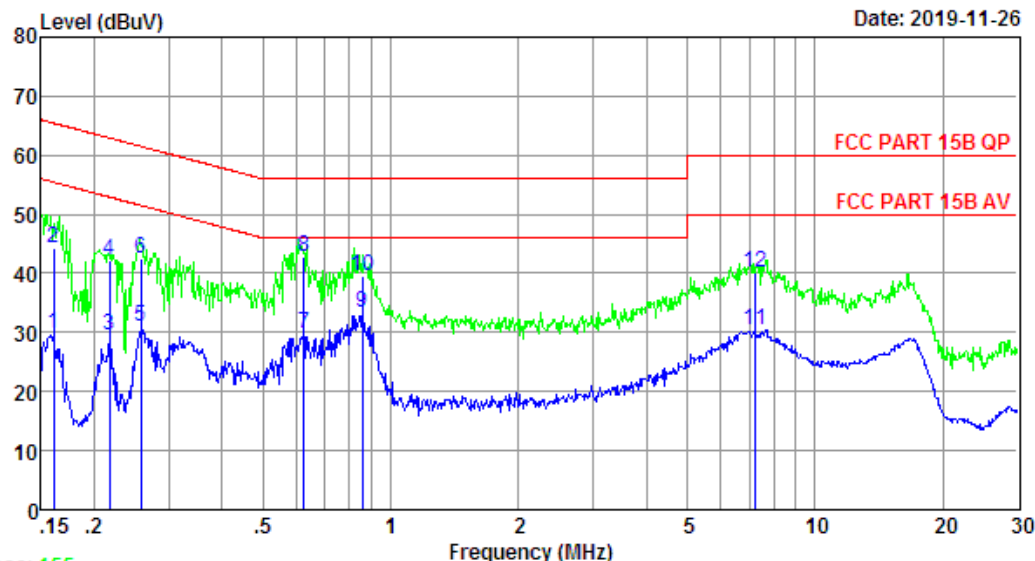

Trace: 155

Site no : 844 Shield Room Data no. : 156
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.161	9.62	9.69	10.52	29.83	55.43	25.60	Average
2	0.161	9.62	9.69	25.00	44.31	65.43	21.12	QP
3	0.217	9.70	9.84	10.08	29.62	52.92	23.30	Average
4	0.217	9.70	9.84	22.67	42.21	62.92	20.71	QP
5	0.258	9.71	9.92	11.47	31.10	51.51	20.41	Average
6	0.258	9.71	9.92	23.00	42.63	61.51	18.88	QP
7	0.624	9.76	9.92	10.21	29.89	46.00	16.11	Average
8	0.624	9.76	9.92	23.09	42.77	56.00	13.23	QP
9	0.857	9.71	9.93	13.69	33.33	46.00	12.67	Average
10	0.857	9.71	9.93	20.00	39.64	56.00	16.36	QP
11	7.252	9.86	10.04	10.62	30.52	50.00	19.48	Average
12	7.252	9.86	10.04	20.20	40.10	60.00	19.90	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 158

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

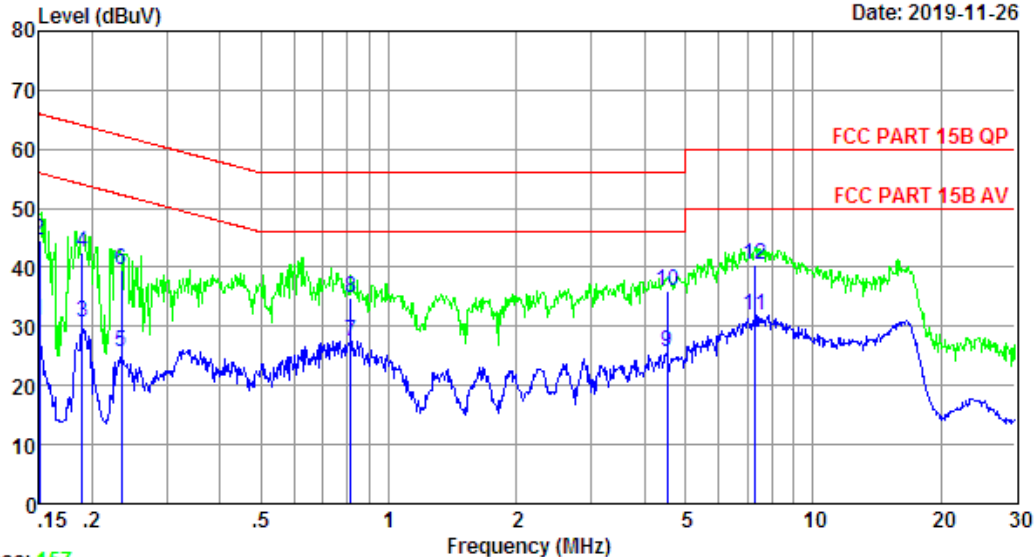

Trace: 157

Site no : 844 Shield Room Data no. : 158
Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : LINE
Limit : FCC PART 15B QP
Engineer : Darker
EUT : Robot Vacuum Cleaner
Power : DC 24V From Adapter Input AC 240V/60Hz
M/N : D800
Test Mode : TX Mode
DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.79	9.69	11.37	30.85	56.00	25.15	Average
2	0.150	9.79	9.69	25.00	44.48	66.00	21.52	QP
3	0.189	9.80	9.77	11.17	30.74	54.06	23.32	Average
4	0.189	9.80	9.77	23.00	42.57	64.06	21.49	QP
5	0.234	9.70	9.92	6.19	25.81	52.30	26.49	Average
6	0.234	9.70	9.92	20.00	39.62	62.30	22.68	QP
7	0.813	9.80	9.93	7.86	27.59	46.00	18.41	Average
8	0.813	9.80	9.93	15.00	34.73	56.00	21.27	QP
9	4.525	9.86	10.00	5.71	25.57	46.00	20.43	Average
10	4.525	9.86	10.00	16.25	36.11	56.00	19.89	QP
11	7.290	9.86	10.04	12.02	31.92	50.00	18.08	Average
12	7.290	9.86	10.04	20.43	40.33	60.00	19.67	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 160

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

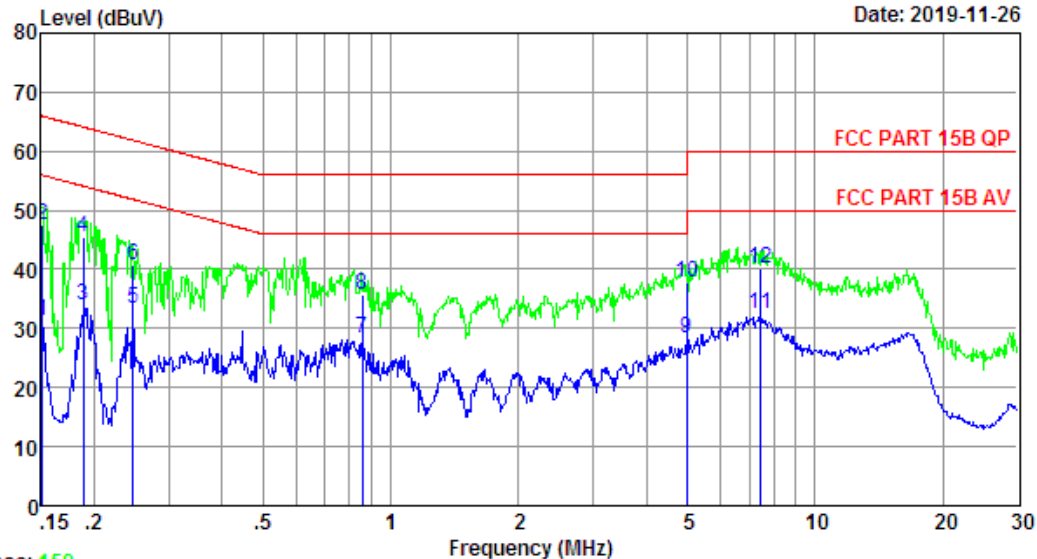

Trace: 159

Site no : 844 Shield Room Data no. : 160
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : D800
 Test Mode : TX Mode
 DBS036A-2401200U

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.151	9.62	9.69	12.06	31.37	55.96	24.59	Average
2	0.151	9.62	9.69	28.20	47.51	65.96	18.45	QP
3	0.188	9.69	9.77	14.44	33.90	54.11	20.21	Average
4	0.188	9.69	9.77	26.00	45.46	64.11	18.65	QP
5	0.247	9.71	9.92	13.60	33.23	51.86	18.63	Average
6	0.247	9.71	9.92	21.00	40.63	61.86	21.23	QP
7	0.857	9.71	9.93	8.66	28.30	46.00	17.70	Average
8	0.857	9.71	9.93	16.00	35.64	56.00	20.36	QP
9	4.978	9.86	10.00	8.49	28.35	46.00	17.65	Average
10	4.978	9.86	10.00	18.00	37.86	56.00	18.14	QP
11	7.407	9.86	10.04	12.45	32.35	50.00	17.65	Average
12	7.407	9.86	10.04	20.32	40.22	60.00	19.78	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 162

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

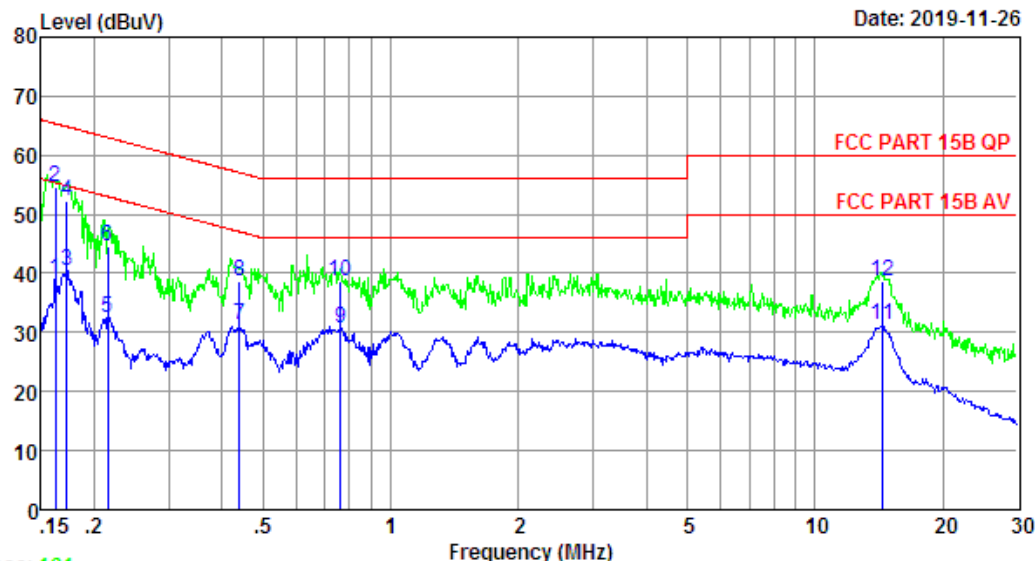

Trace: 161

Site no : 844 Shield Room Data no. : 162
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : D800
 Test Mode : TX Mode
 JQS0361A-U240120

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.162	9.62	9.69	19.76	39.07	55.34	16.27	Average
2	0.162	9.62	9.69	35.20	54.51	65.34	10.83	QP
3	0.172	9.62	9.69	21.06	40.37	54.86	14.49	Average
4	0.172	9.62	9.69	33.00	52.31	64.86	12.55	QP
5	0.215	9.70	9.84	13.02	32.56	53.01	20.45	Average
6	0.215	9.70	9.84	25.00	44.54	63.01	18.47	QP
7	0.440	9.77	9.92	11.74	31.43	47.07	15.64	Average
8	0.440	9.77	9.92	19.00	38.69	57.07	18.38	QP
9	0.763	9.73	9.93	11.13	30.79	46.00	15.21	Average
10	0.763	9.73	9.93	19.00	38.66	56.00	17.34	QP
11	14.364	9.86	10.12	11.36	31.34	50.00	18.66	Average
12	14.364	9.86	10.12	18.63	38.61	60.00	21.39	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 164

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

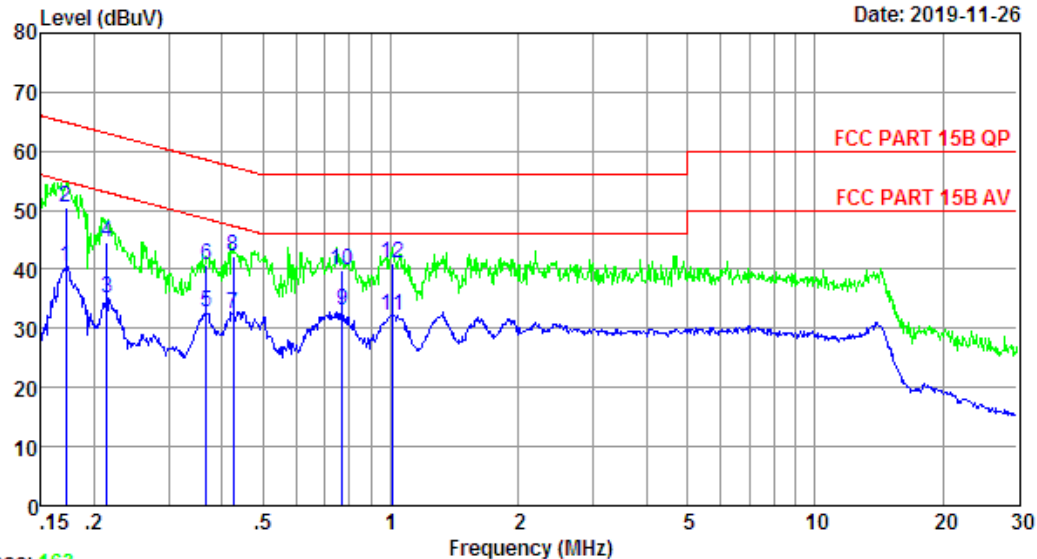

Trace: 163

Site no : 844 Shield Room Data no. : 164
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 240V/60Hz
 M/N : D800
 Test Mode : TX Mode
 JQS0361A-U240120

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.171	9.79	9.69	21.05	40.53	54.90	14.37	Average
2	0.171	9.79	9.69	31.00	50.48	64.90	14.42	QP
3	0.214	9.75	9.84	15.49	35.08	53.05	17.97	Average
4	0.214	9.75	9.84	25.00	44.59	63.05	18.46	QP
5	0.367	9.76	9.92	13.05	32.73	48.56	15.83	Average
6	0.367	9.76	9.92	21.10	40.78	58.56	17.78	QP
7	0.426	9.88	9.92	12.66	32.46	47.33	14.87	Average
8	0.426	9.88	9.92	22.50	42.30	57.33	15.03	QP
9	0.767	9.80	9.93	13.24	32.97	46.00	13.03	Average
10	0.767	9.80	9.93	20.00	39.73	56.00	16.27	QP
11	1.010	9.79	9.94	12.41	32.14	46.00	13.86	Average
12	1.010	9.79	9.94	21.20	40.93	56.00	15.07	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 166

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

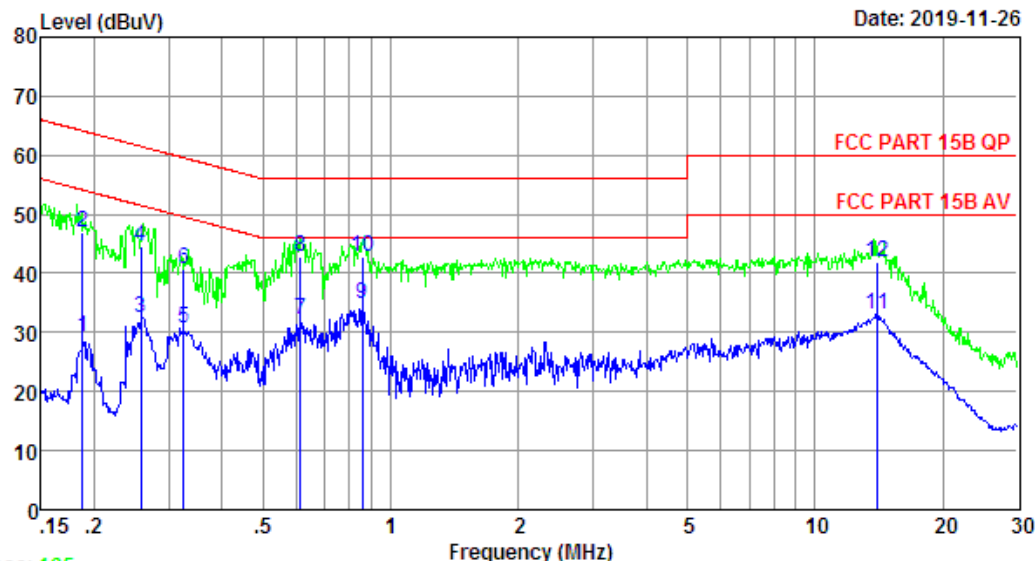

Trace: 165

Site no : 844 Shield Room Data no. : 166
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 JQS0361A-U240120

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.187	9.80	9.77	9.70	29.27	54.15	24.88	Average
2	0.187	9.80	9.77	27.33	46.90	64.15	17.25	QP
3	0.258	9.70	9.92	12.94	32.56	51.51	18.95	Average
4	0.258	9.70	9.92	25.00	44.62	61.51	16.89	QP
5	0.325	9.68	9.92	11.14	30.74	49.57	18.83	Average
6	0.325	9.68	9.92	21.20	40.80	59.57	18.77	QP
7	0.614	9.86	9.92	12.50	32.28	46.00	13.72	Average
8	0.614	9.86	9.92	23.00	42.78	56.00	13.22	QP
9	0.857	9.80	9.93	15.20	34.93	46.00	11.07	Average
10	0.857	9.80	9.93	22.99	42.72	56.00	13.28	QP
11	14.063	9.87	10.11	13.06	33.04	50.00	16.96	Average
12	14.063	9.87	10.11	21.86	41.84	60.00	18.16	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 168

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

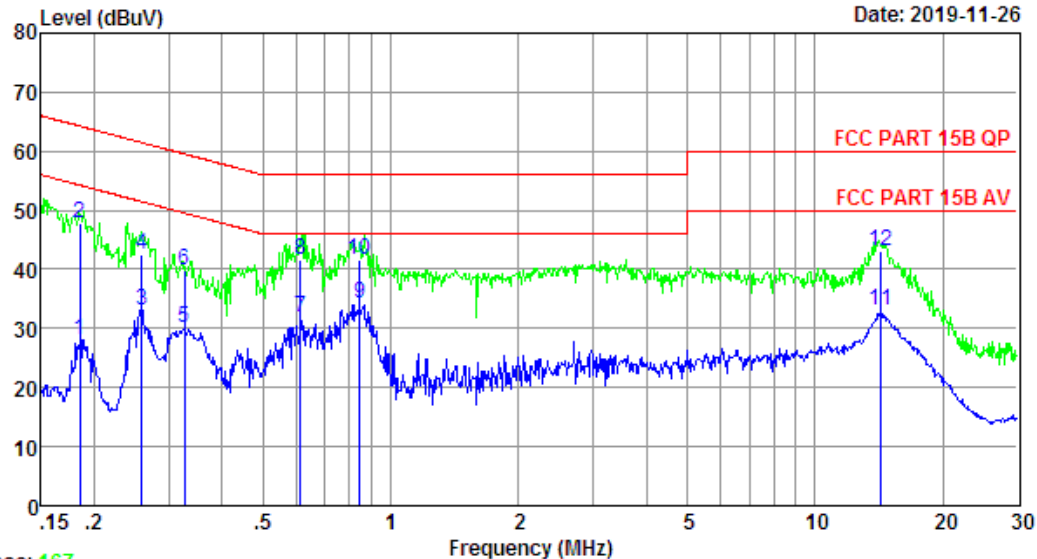

Trace: 167

Site no : 844 Shield Room Data no. : 168
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : DC 24V From Adapter Input AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 JQS0361A-U240120

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.185	9.69	9.77	8.52	27.98	54.24	26.26	Average
2	0.185	9.69	9.77	28.33	47.79	64.24	16.45	QP
3	0.259	9.71	9.92	13.53	33.16	51.47	18.31	Average
4	0.259	9.71	9.92	23.00	42.63	61.47	18.84	QP
5	0.327	9.74	9.92	10.49	30.15	49.53	19.38	Average
6	0.327	9.74	9.92	20.20	39.86	59.53	19.67	QP
7	0.614	9.76	9.92	12.15	31.83	46.00	14.17	Average
8	0.614	9.76	9.92	22.00	41.68	56.00	14.32	QP
9	0.844	9.71	9.93	14.73	34.37	46.00	11.63	Average
10	0.844	9.71	9.93	22.00	41.64	56.00	14.36	QP
11	14.288	9.86	10.12	12.99	32.97	50.00	17.03	Average
12	14.288	9.86	10.12	23.03	43.01	60.00	16.99	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 170

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

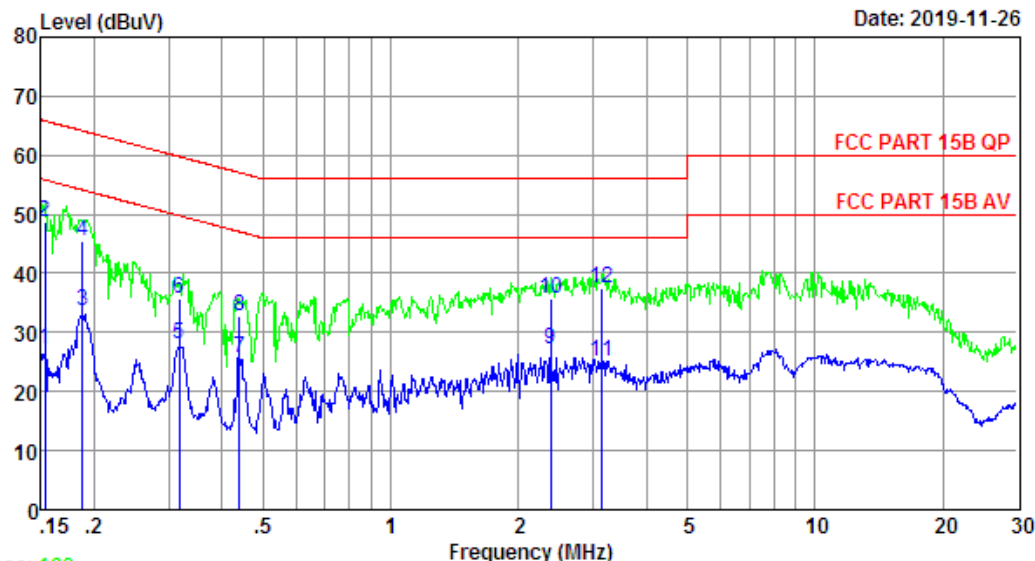

Trace: 169

Site no : 844 Shield Room Data no. : 170
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 MS1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.153	9.79	9.69	7.74	27.22	55.82	28.60	Average
2	0.153	9.79	9.69	29.20	48.68	65.82	17.14	QP
3	0.187	9.73	9.77	14.08	33.58	54.15	20.57	Average
4	0.187	9.73	9.77	26.00	45.50	64.15	18.65	QP
5	0.317	9.72	9.92	8.38	28.02	49.80	21.78	Average
6	0.317	9.72	9.92	16.00	35.64	59.80	24.16	QP
7	0.440	9.72	9.92	6.19	25.83	47.07	21.24	Average
8	0.440	9.72	9.92	13.00	32.64	57.07	24.43	QP
9	2.384	9.82	9.96	7.39	27.17	46.00	18.83	Average
10	2.384	9.82	9.96	16.06	35.84	56.00	20.16	QP
11	3.140	9.86	9.98	5.36	25.20	46.00	20.80	Average
12	3.140	9.86	9.98	17.67	37.51	56.00	18.49	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 172

File: \\Emc-ce-1\Test data\2019\J\joy Intelligent.EM6 (172)

Date: 2019-11-26

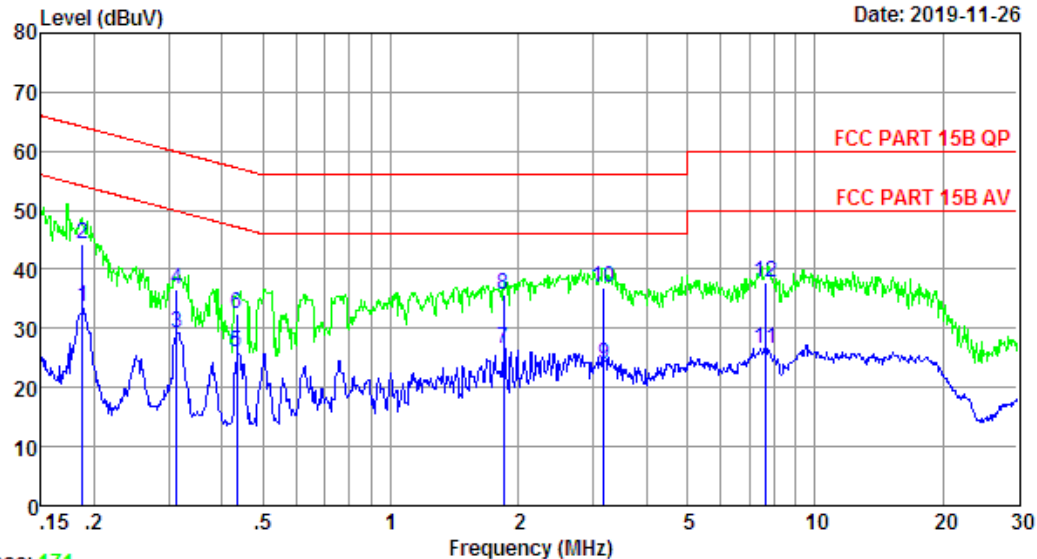

Trace: 171

Site no : 844 Shield Room Data no. : 172
 Env. / Ins. : Temp:25.5'C Humi:52% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Darker
 EUT : Robot Vacuum Cleaner
 Power : AC 120V/60Hz
 M/N : D800
 Test Mode : TX Mode
 MS1

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.187	9.62	9.77	14.32	33.71	54.15	20.44	Average
2	0.187	9.62	9.77	25.00	44.39	64.15	19.76	QP
3	0.313	9.63	9.92	9.74	29.29	49.88	20.59	Average
4	0.313	9.63	9.92	17.00	36.55	59.88	23.33	QP
5	0.433	9.64	9.92	6.53	26.09	47.20	21.11	Average
6	0.433	9.64	9.92	13.00	32.56	57.20	24.64	QP
7	1.848	9.68	9.95	6.93	26.56	46.00	19.44	Average
8	1.848	9.68	9.95	16.02	35.65	56.00	20.35	QP
9	3.173	9.87	9.98	4.15	24.00	46.00	22.00	Average
10	3.173	9.87	9.98	16.96	36.81	56.00	19.19	QP
11	7.646	9.86	10.04	6.67	26.57	50.00	23.43	Average
12	7.646	9.86	10.04	17.80	37.70	60.00	22.30	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

10. ANTENNA REQUIREMENTS

10.1. Limit


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

10.2. Test Result


The antennas used for this product is integral antenna ,so compliance with antenna requirements.
(Please refer to the EUT photo for details)

11. TEST SETUP PHOTO


Conducted Test

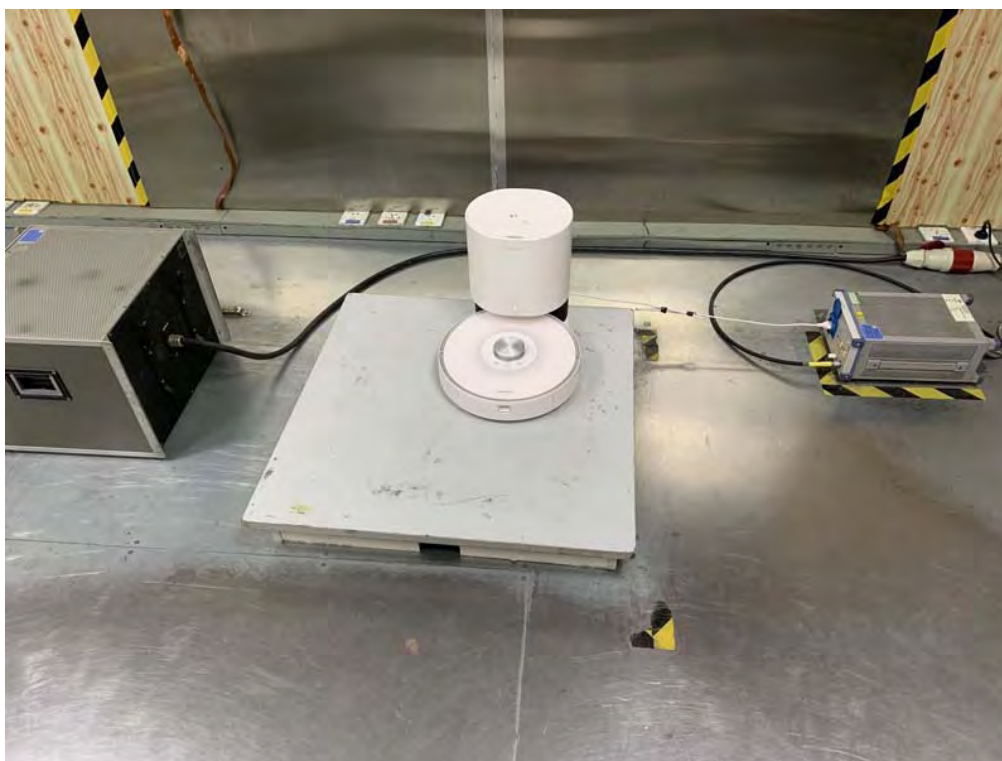

Radiated Test (Below 1GHz)

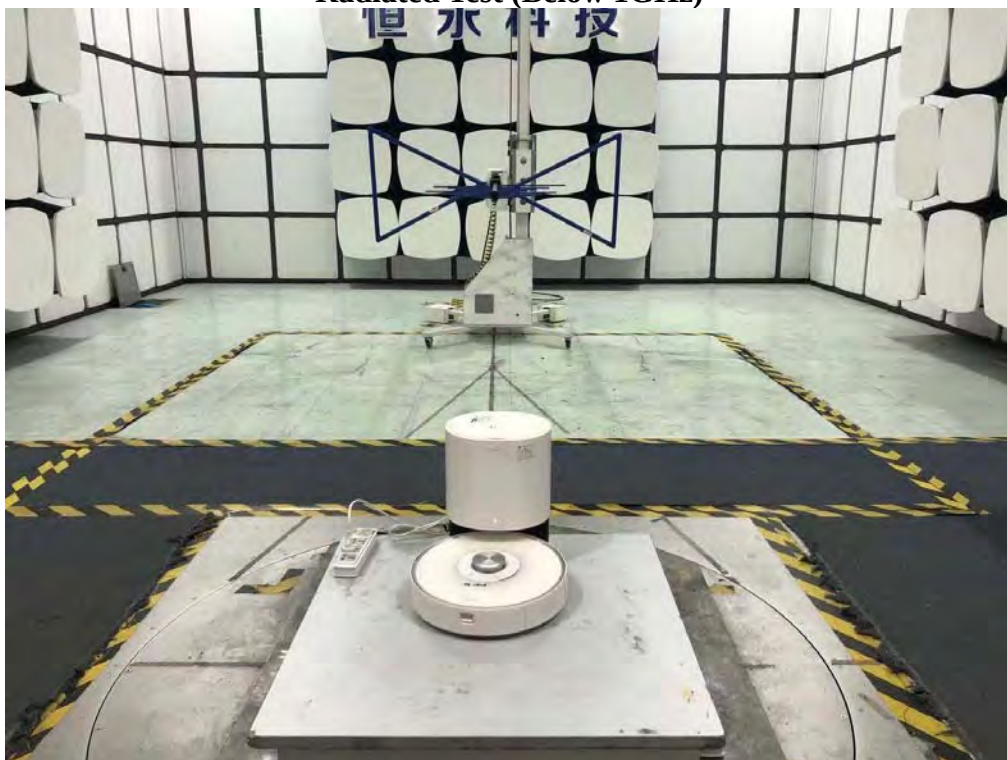

Radiated Test (Above 1GHz)

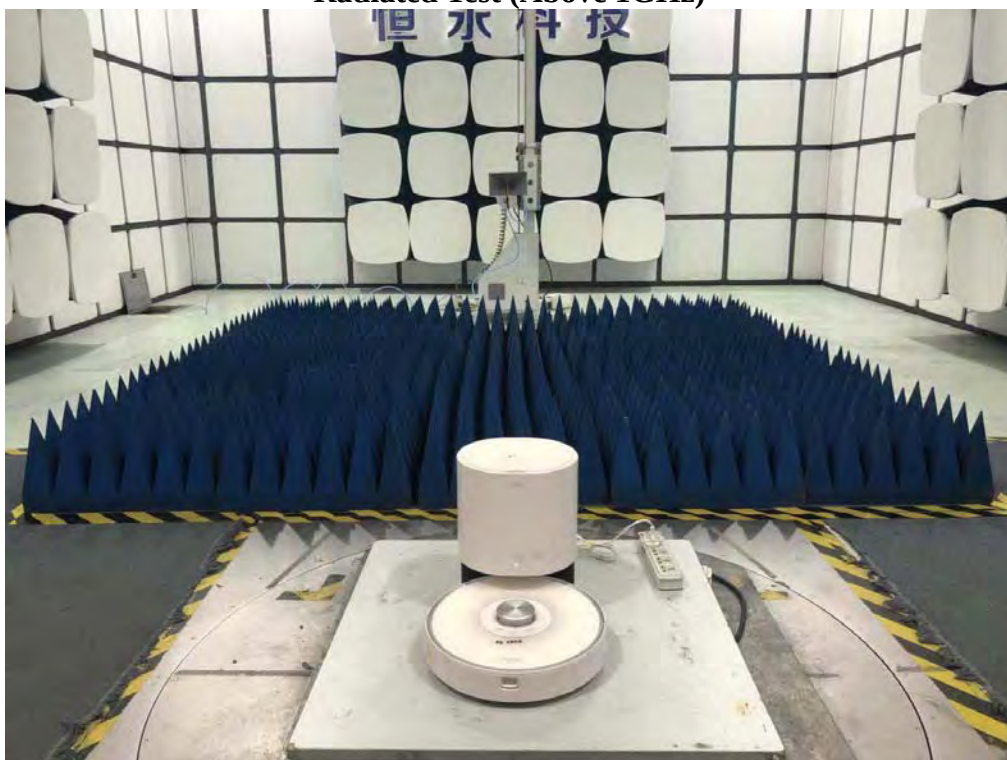


12. EUT PHOTO

External Photos



M/N: D800



External Photos
M/N: D800

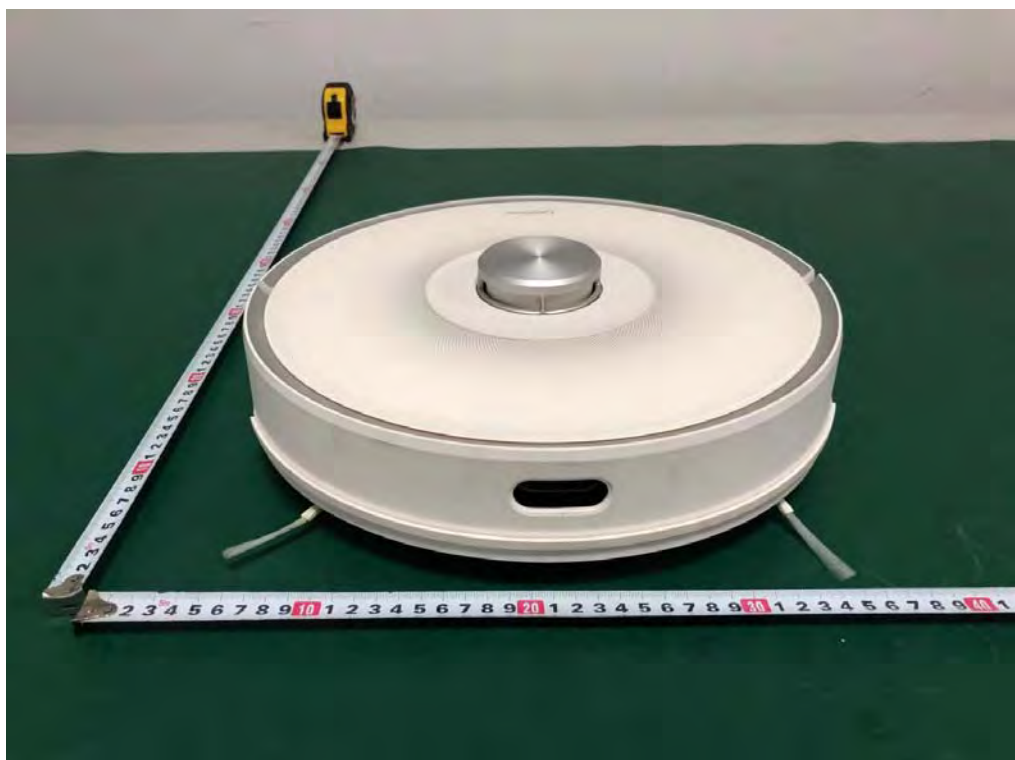

External Photos
M/N: D800

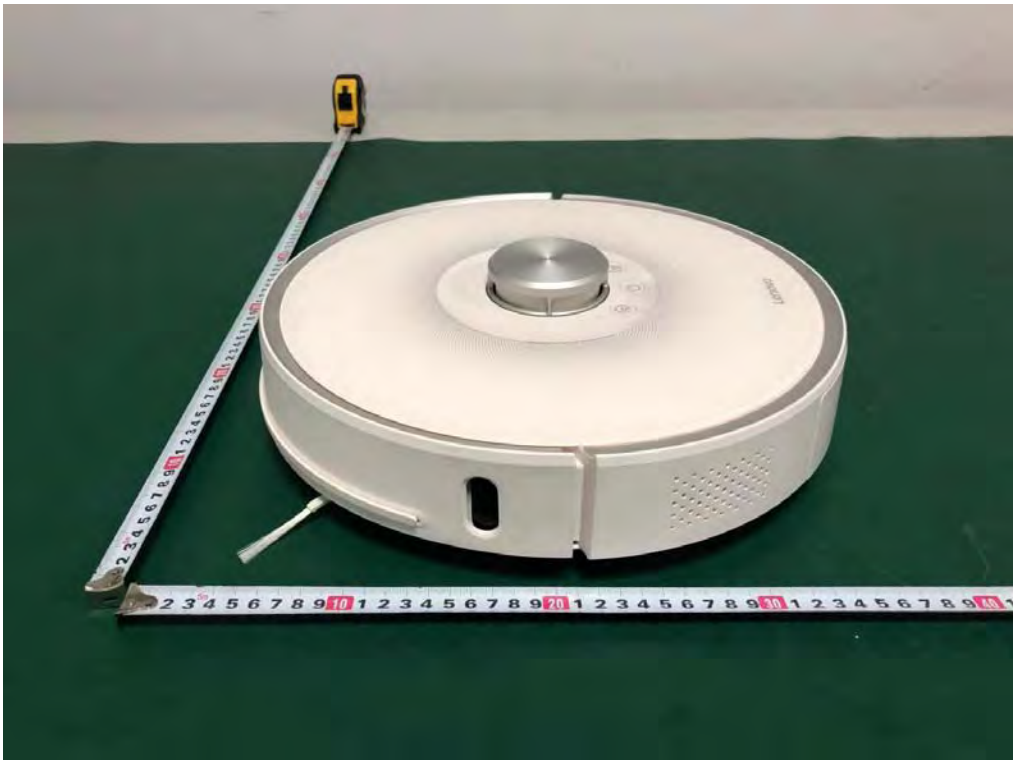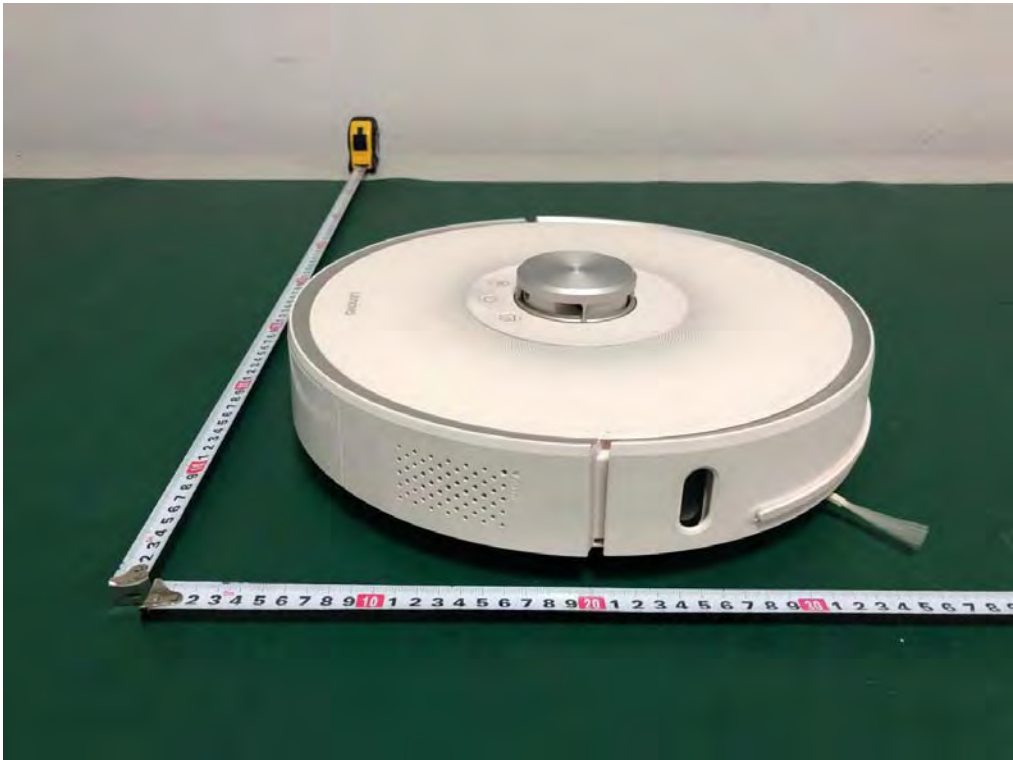

External Photos
M/N: D800




External Photos
M/N: D800





External Photos
M/N: D800





Internal Photos
M/N: D800

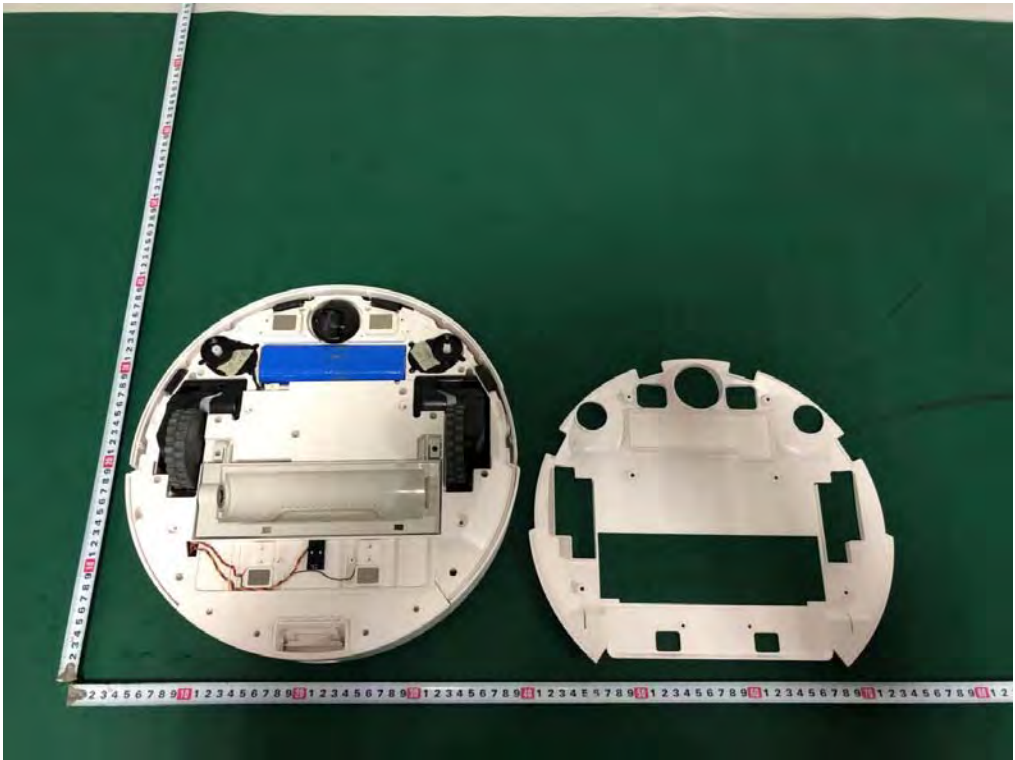

Internal Photos
M/N: D800

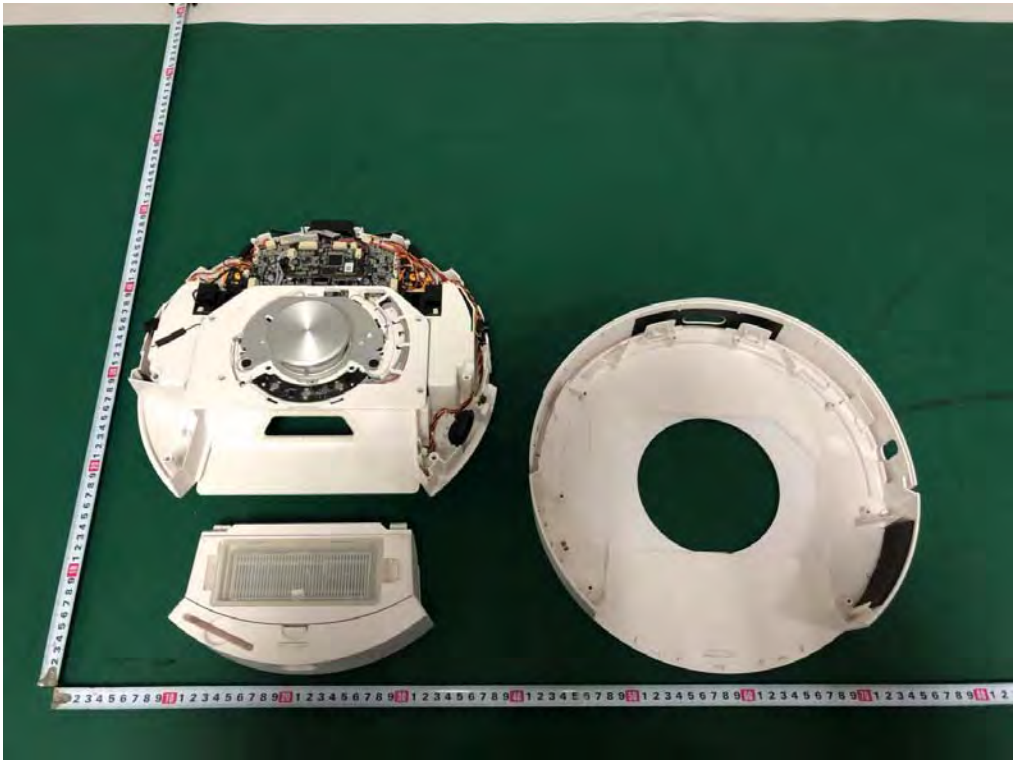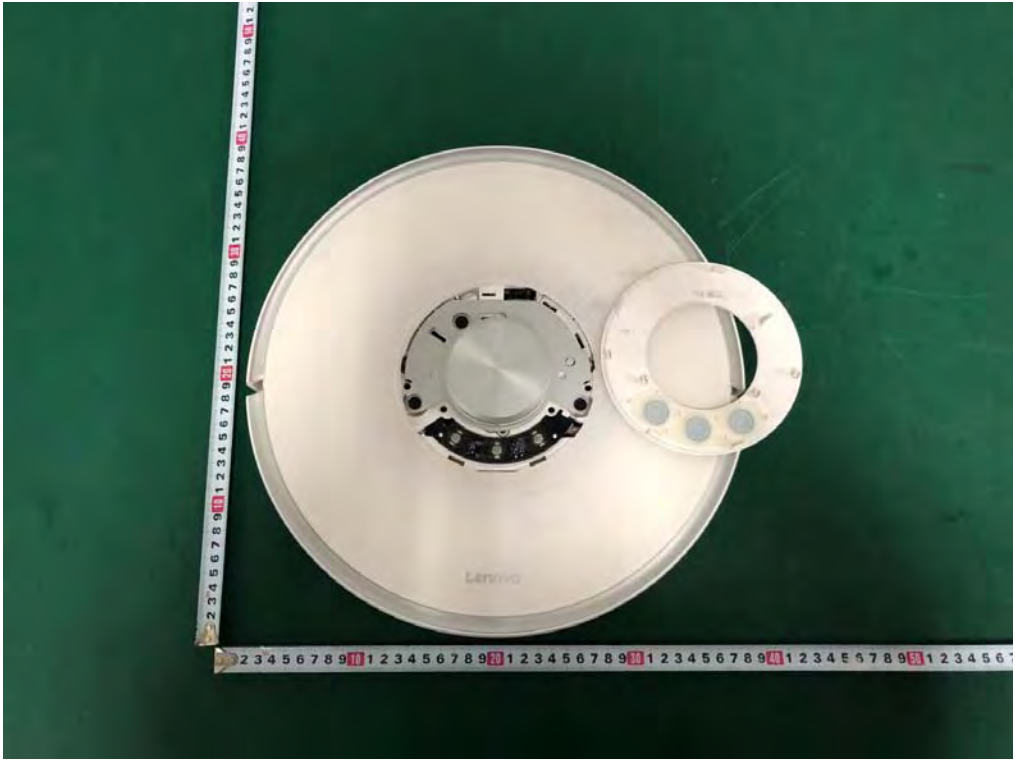


Internal Photos
M/N: D800

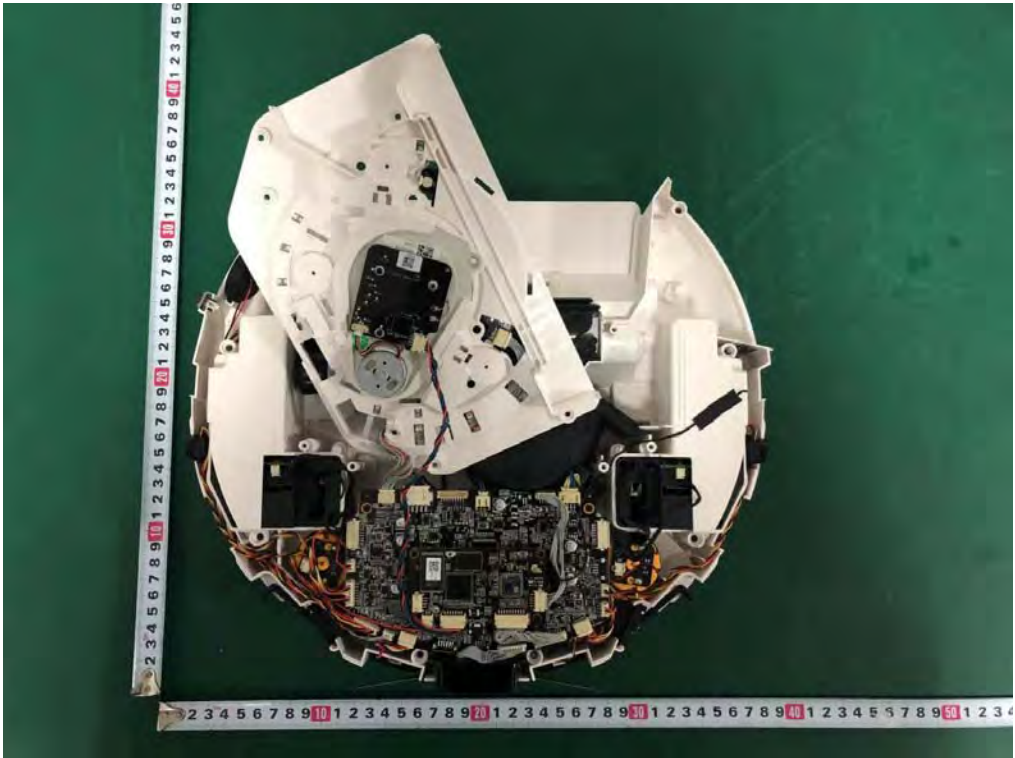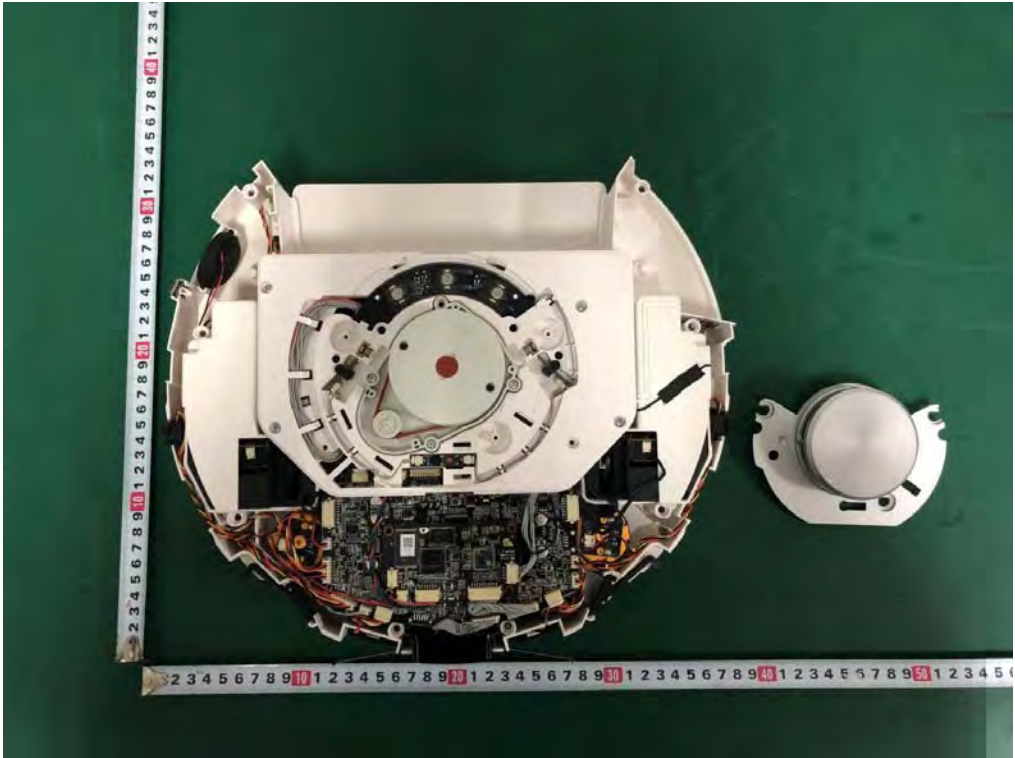



Internal Photos
M/N: D800





Internal Photos
M/N: D800

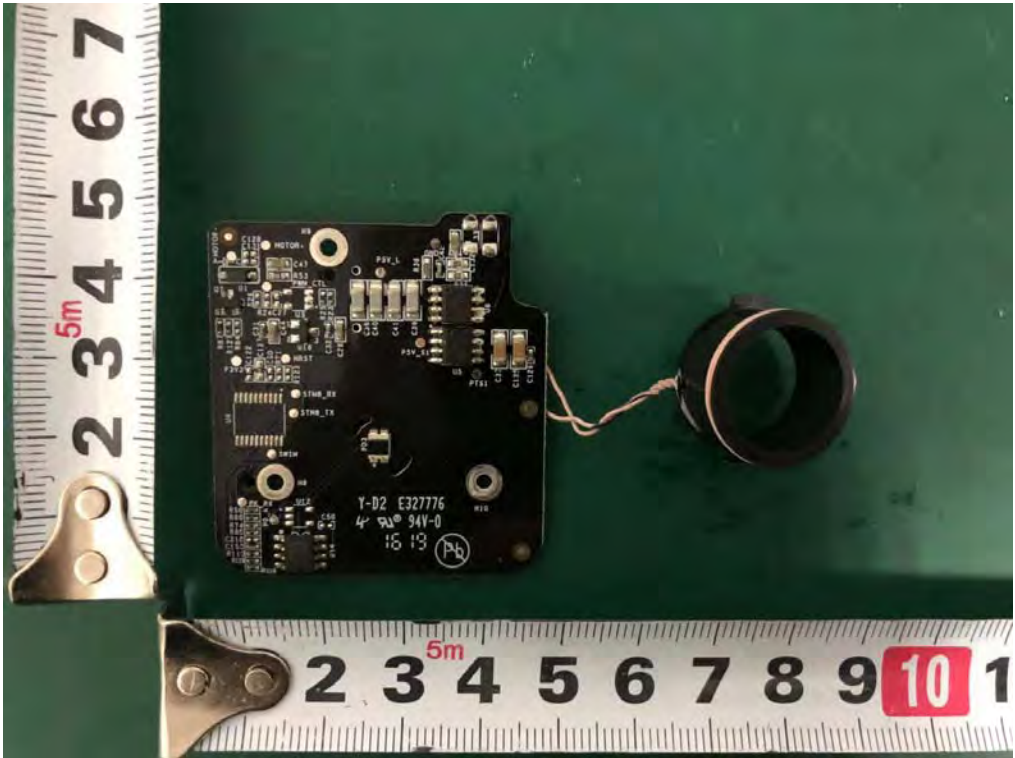

Internal Photos
M/N: D800

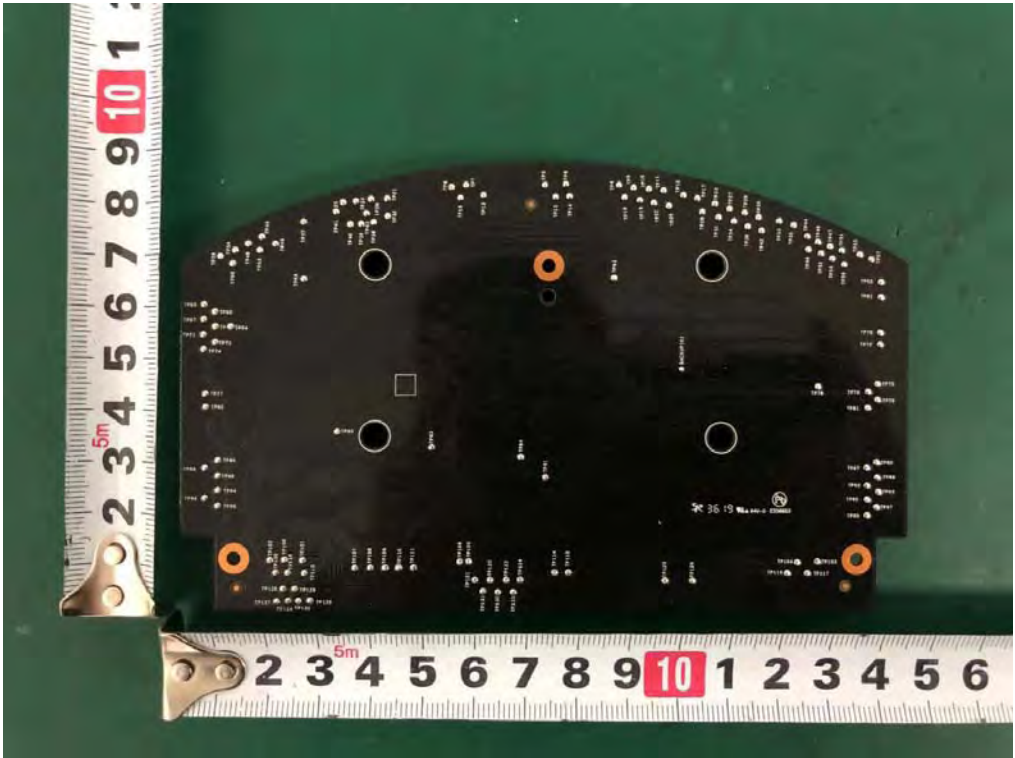
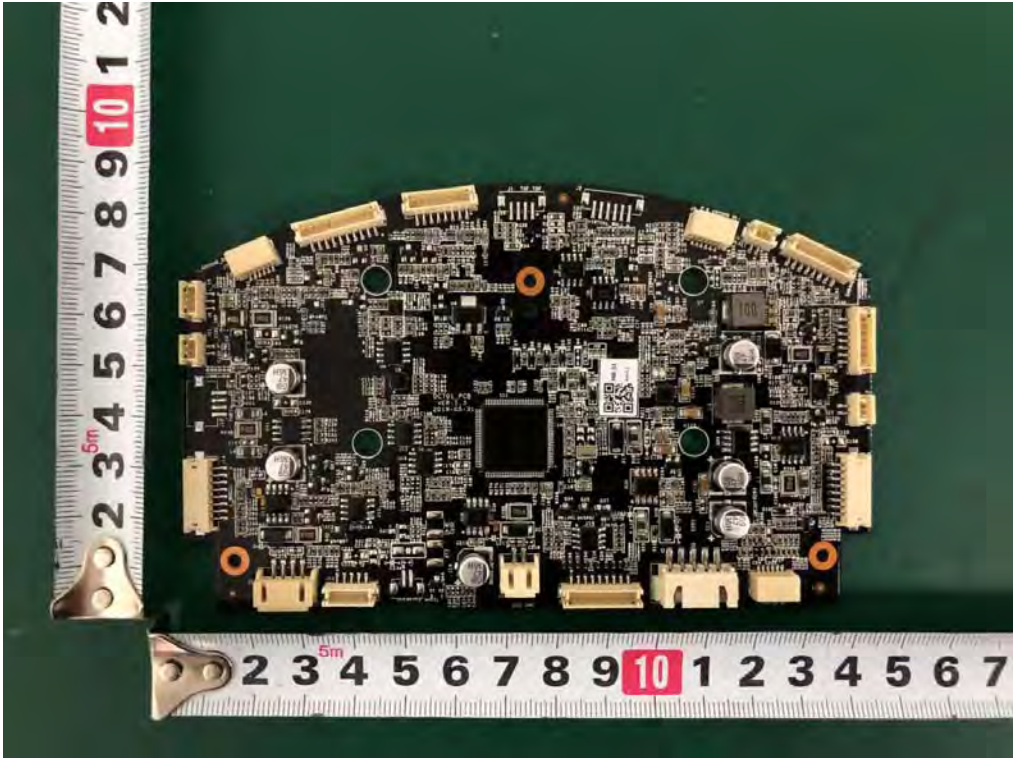


Internal Photos
M/N: D800

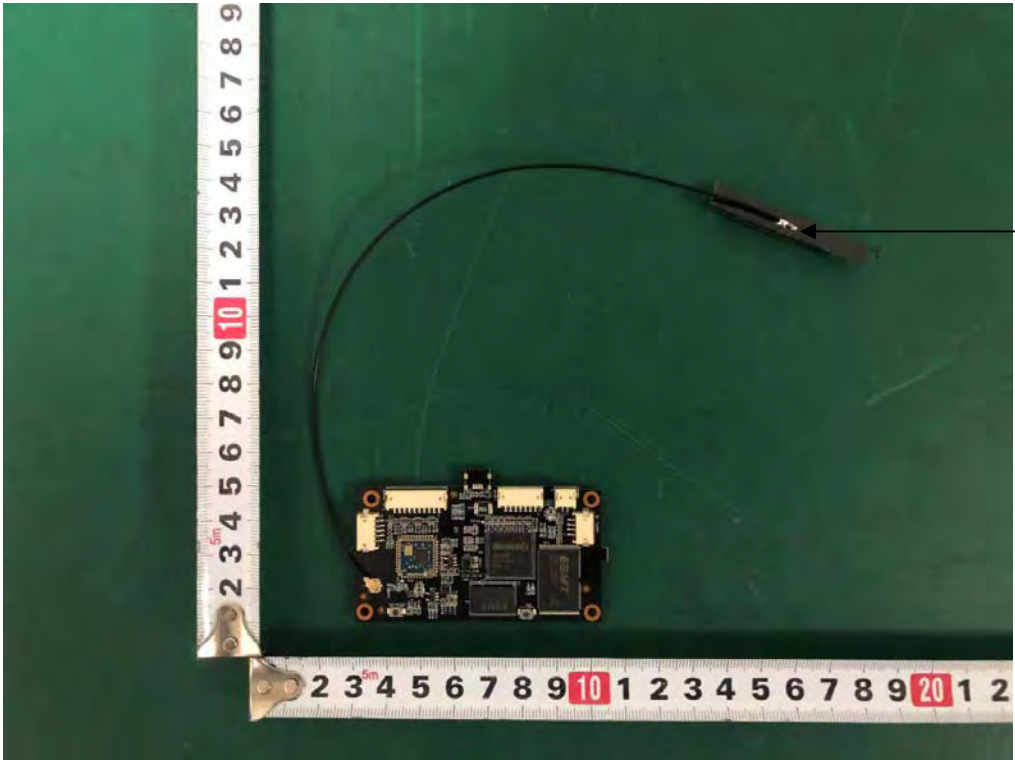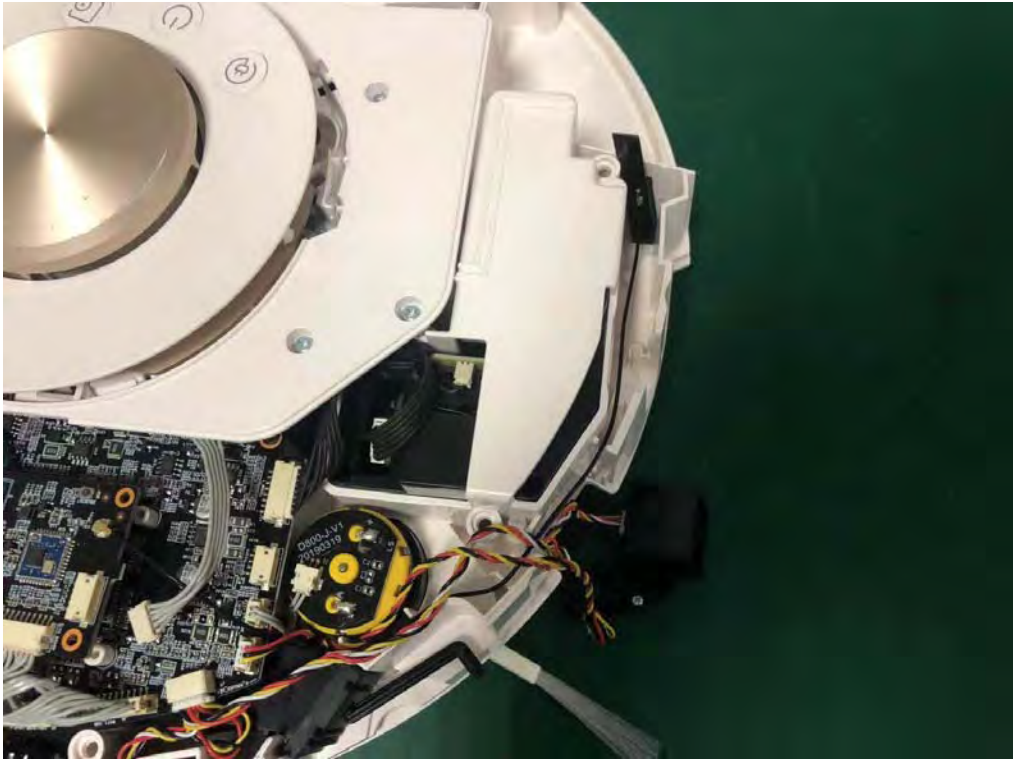


Wi-Fi
Antenna

Internal Photos
M/N: D800

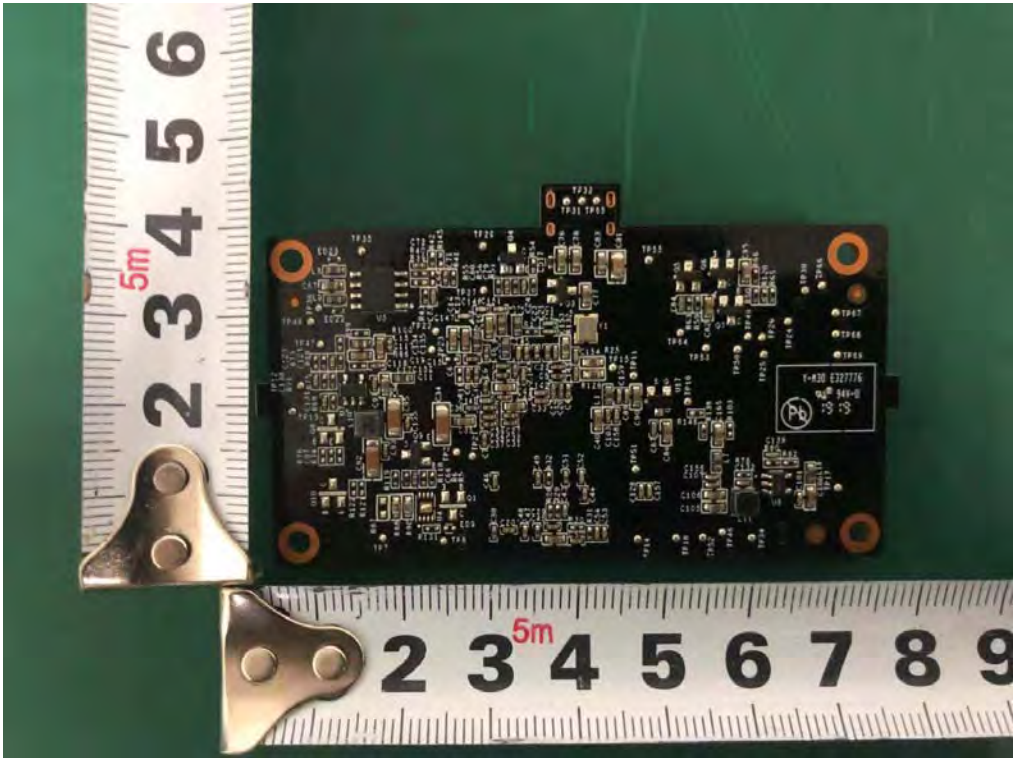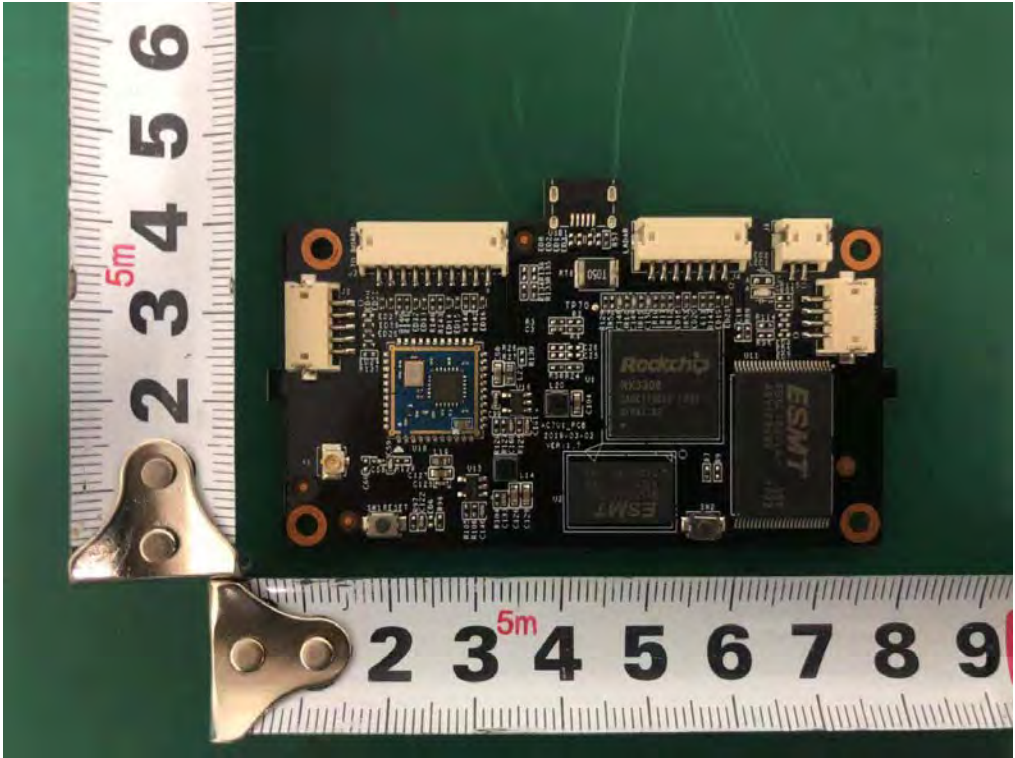


Internal Photos
M/N: D800

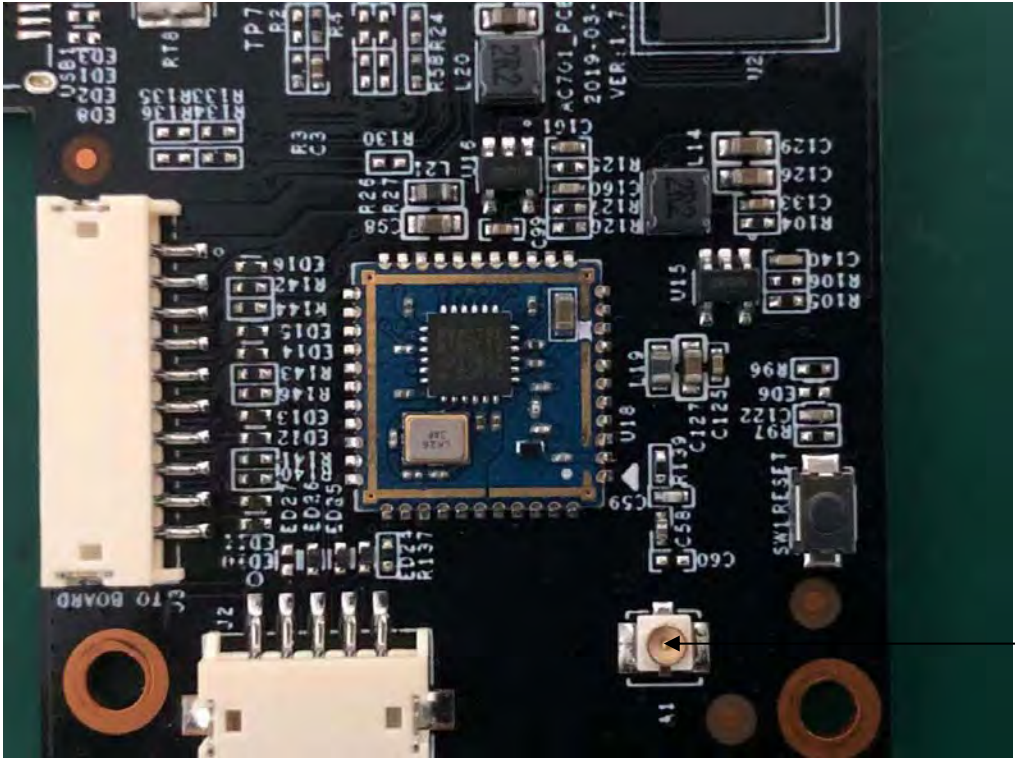


Wi-Fi
Antenna

External Photos
M/N: D800

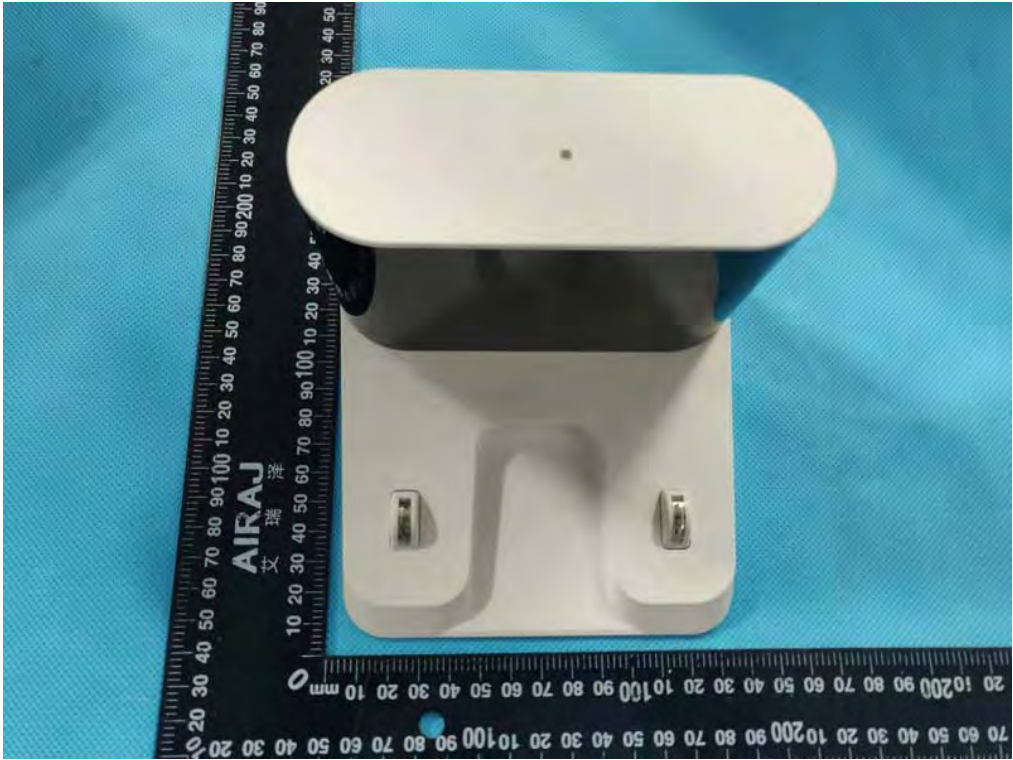

Internal Photos
M/N: D800

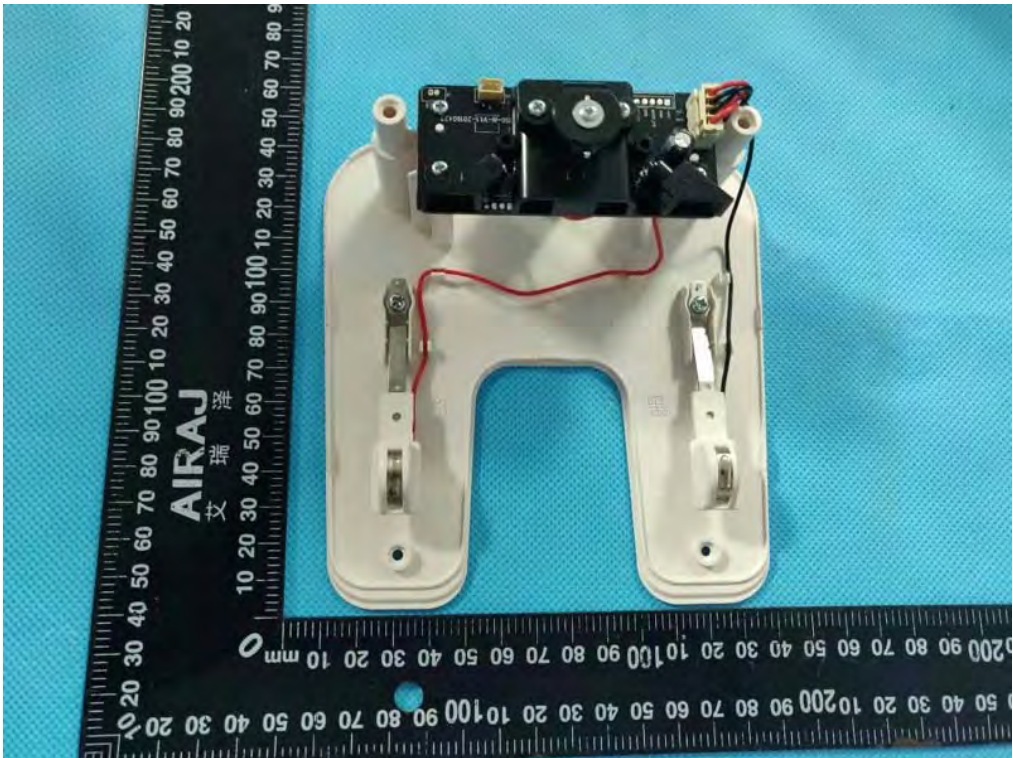


External Photos
M/N: D800




External Photos
M/N: D800




Internal Photos
M/N: D800

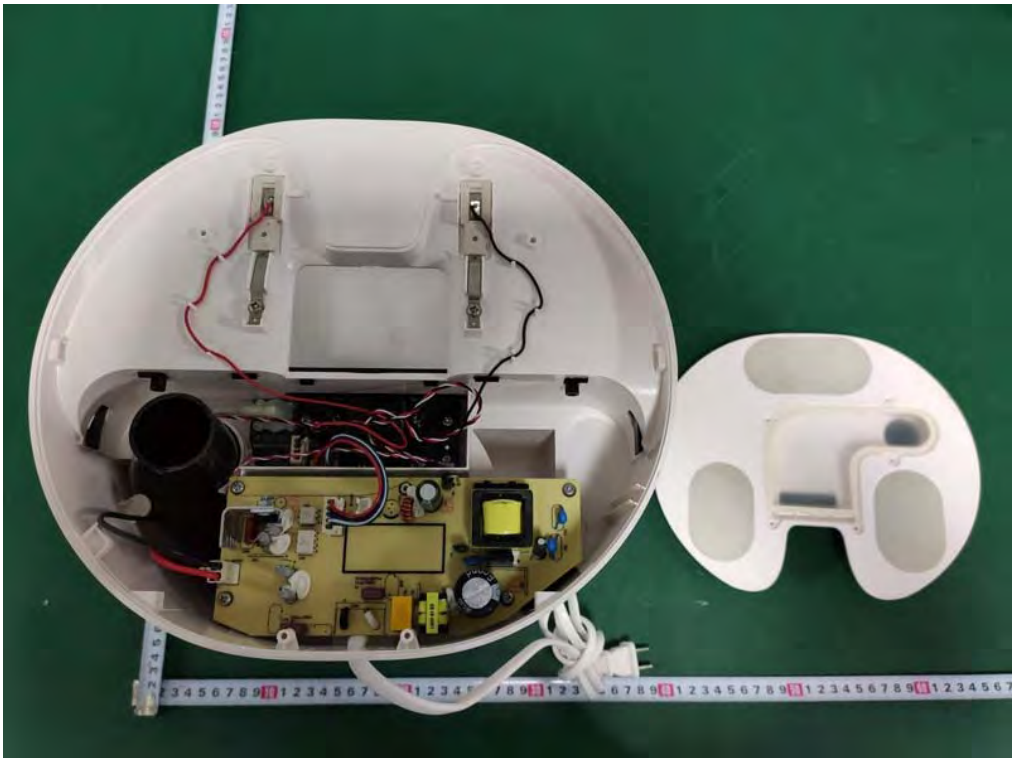



Internal Photos
M/N: D800

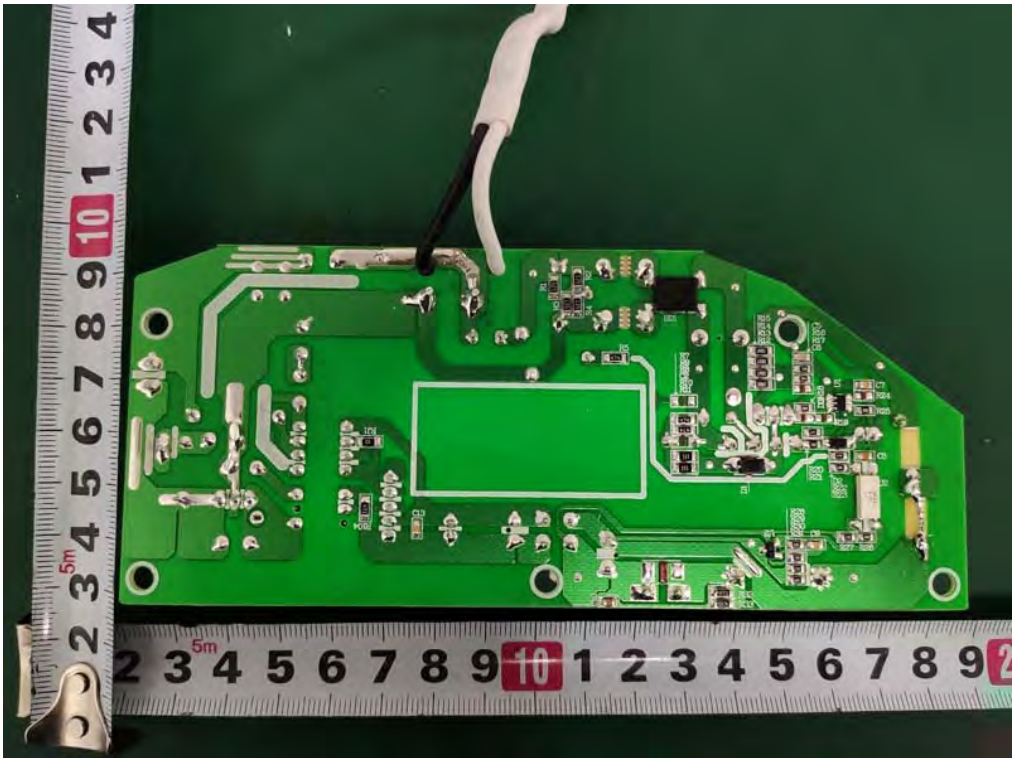


Internal Photos
M/N: D800

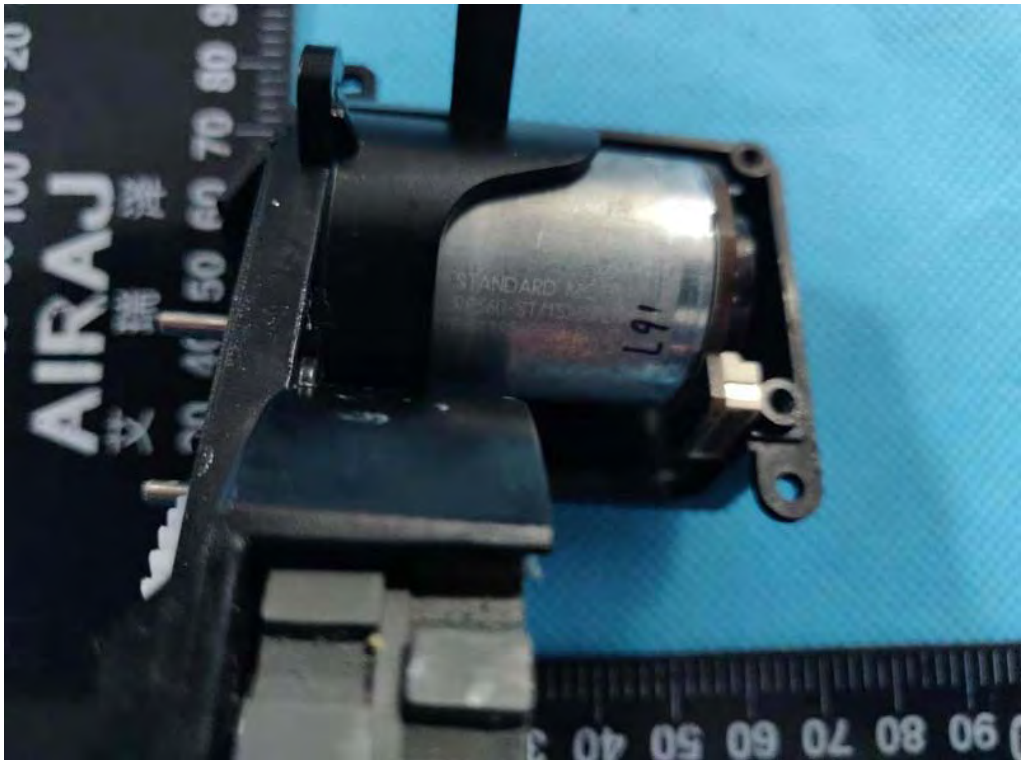


Internal Photos
M/N: D800

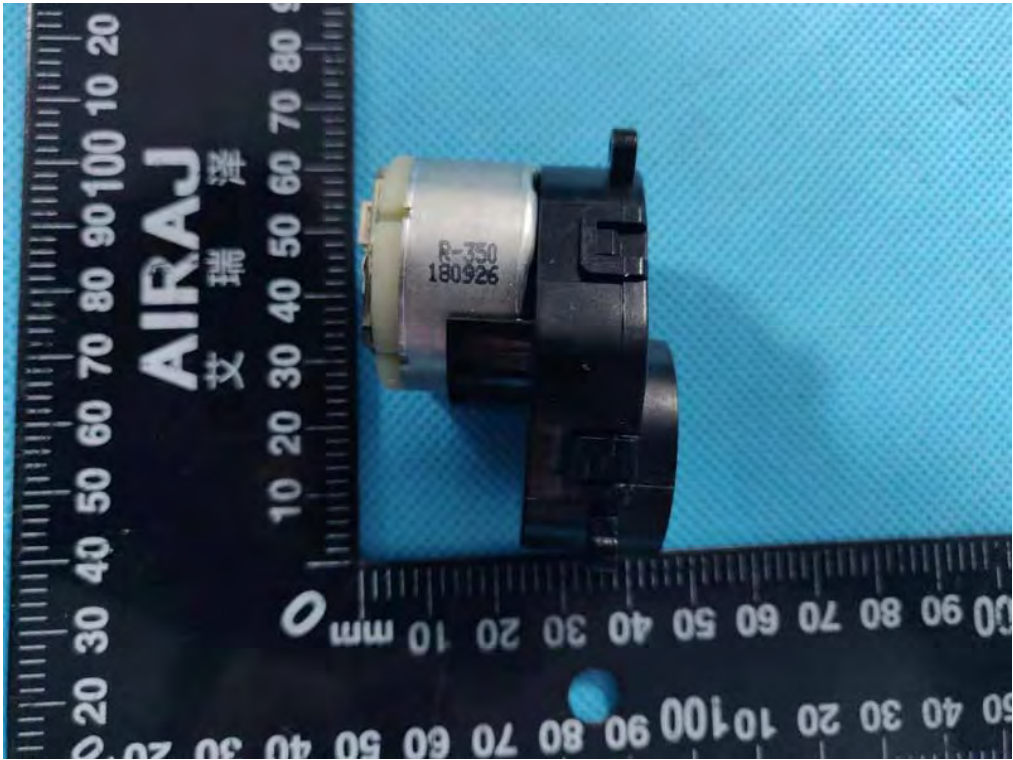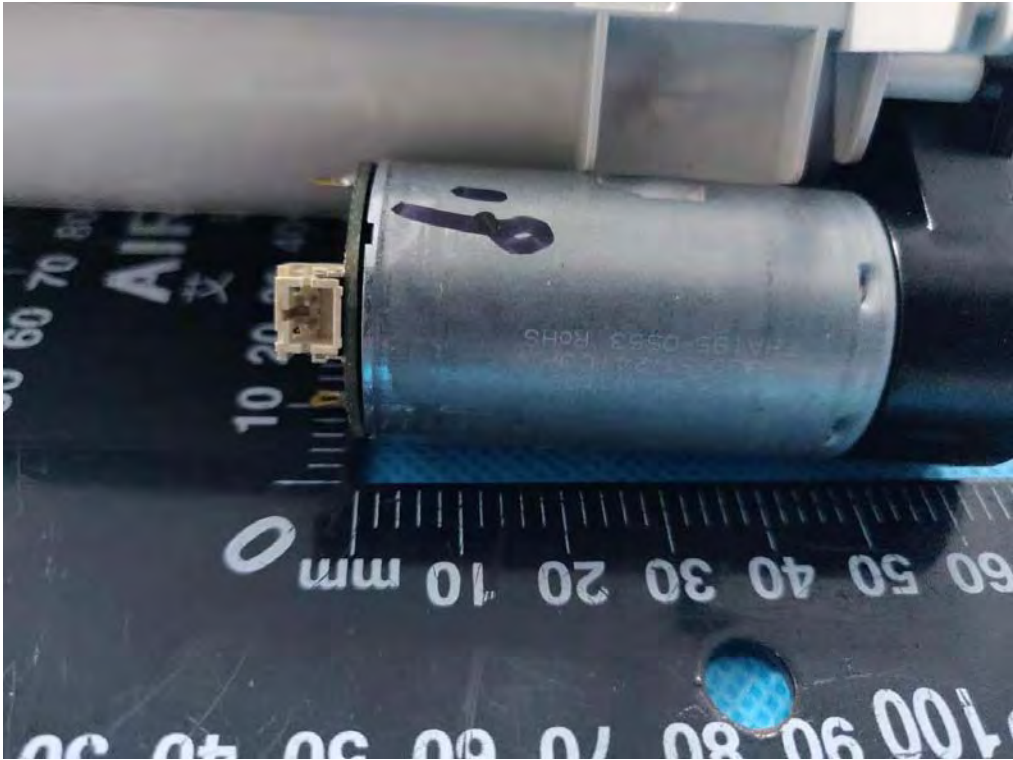

Internal Photos
M/N: D800

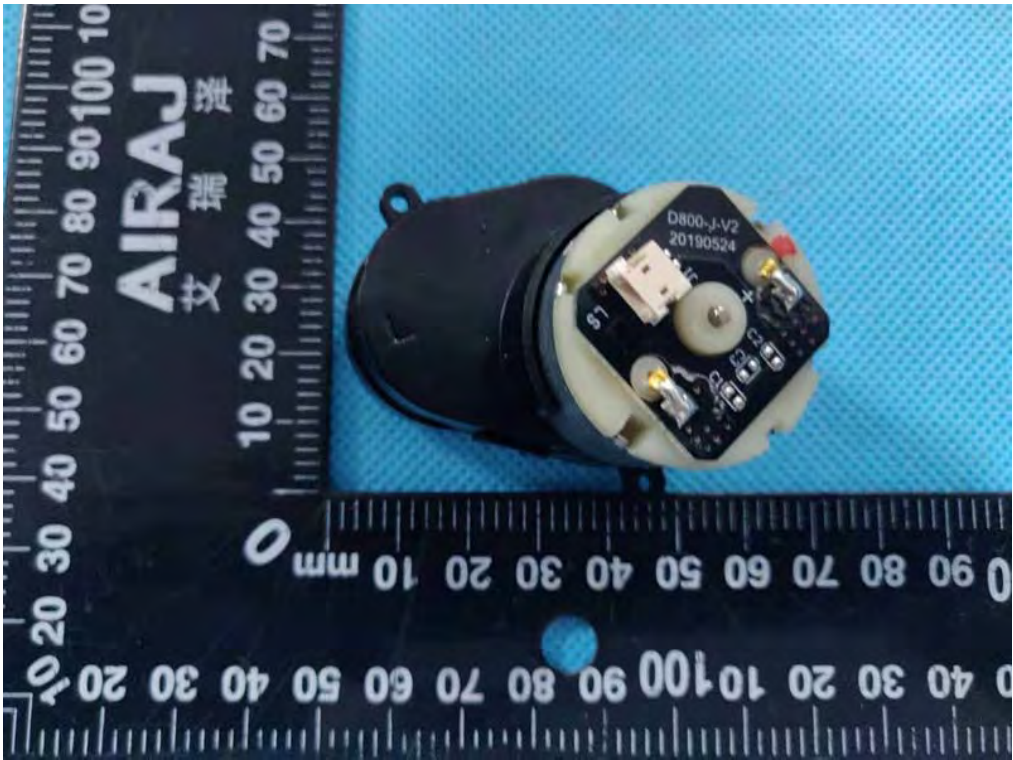

Internal Photos
M/N: D800

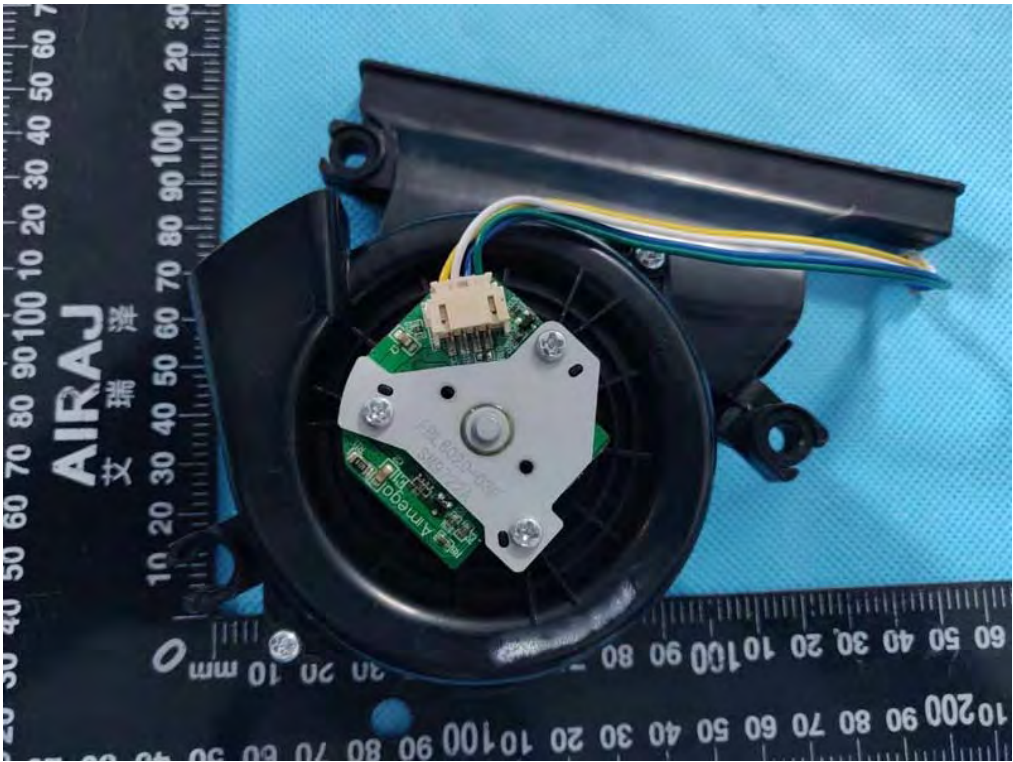

Internal Photos
M/N: D800



End of Test Report