



## ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

**Test report file number** : E014R-010

**Applicant** : SAROTECH CO., LTD.  
**Address** : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea

**Manufacturer** : SAROTECH CO., LTD.  
**Address** : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea

**Type of Equipment** : External Slim Drive

**FCC ID** : PBCNOTE-CD

**Model / Type No.** : NOTE-CD

**Serial number** : N/A

**Total page of Report** : 13 pages (including this page)

**Date of Incoming** : March 18, 2001

**Date of issuing** : March 12, 2001


### SUMMARY

The equipment complies with the regulation; FCC PART 15 SUBPART B §15.101


This test report contains only the result of a single test of the sample supplied for the examination.

It is not a general valid assessment of the features of the respective products of the mass-production

Reviewed by:

  
G. W. Lee / Chief Engineer  
EMC Dept.  
ONETECH Corp.

Approved by:

  
S. S. Hong / Managing Director  
EMC Dept.  
ONETECH Corp.



## CONTENTS

Page

<b>1. VERIFICATION OF COMPLIANCE.....</b>	<b>3</b>
<b>2. GENERAL INFORMATION .....</b>	<b>4</b>
2.1 PRODUCT DESCRIPTION.....	4
2.2 RELATED SUBMITTAL(S) / GRANT(S) .....	4
2.3 TEST SYSTEM DETAILS .....	5
2.4 TEST METHODOLOGY .....	5
2.5 TEST FACILITY .....	5
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
3.1 JUSTIFICATION .....	6
3.2 EUT EXERCISE SOFTWARE .....	6
3.3 CABLE DESCRIPTION.....	6
3.4 NOISE SUPPRESSION PARTS ON CABLE .....	7
3.5 EQUIPMENT MODIFICATIONS.....	7
3.6 CONFIGURATION OF TEST SYSTEM.....	7
<b>4. PRELIMINARY TEST .....</b>	<b>8</b>
4.1 AC POWER LINE CONDUCTED EMISSION TEST.....	8
4.2 RADIATED EMISSION TEST.....	8
<b>5. FINAL RESULT OF MEASUREMENT .....</b>	<b>9</b>
5.1 CONDUCTED EMISSION TEST.....	9
5.2 RADIATED EMISSION TEST.....	11
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>12</b>
<b>7. LIST OF TEST EQUIPMENT.....</b>	<b>13</b>



## 1. VERIFICATION OF COMPLIANCE

APPLICANT : SAROTECH CO., LTD.  
ADDRESS : Hangang Bldg. 1549-7, Seocho-Dong, Seocho-Ku, Seoul, 137-070, Korea  
CONTACT PERSON : Mr. Chung-Young, So / Manager  
TELEPHONE NO : +82-2-585-4501  
FCC ID : PBCNOTE-CD  
MODEL NO/NAME : NOTE-CD  
SERIAL NUMBER : N/A  
DATE : March 12, 2001

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	External Slim Drive
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC CFR 47 PART 15 §15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



## 2. GENERAL INFORMATION

### 2.1 Product Description

The SAROTECH CO., LTD., Model NOTE-CD (referred to as the EUT in this report) is an External Slim Drive which is connected to the PC via PCMCIA interface. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	N/A
DATA TRANSFER RATE	Max. 3.6 MB/sec
NUMBER OF LAYERS	Connector Board: 4 Layers, Audio Board: 2Layers
ELECTRICAL RATING	DC 5V supplied by a personal computer
DIMENSION(W X H X D)	150 X 22 X 182 mm
EXTERNAL TERMINALS	36 Pin Connector for PCMCIA Card, Speaker Connector

### Model Differences

None

### 2.2 Related Submittal(s) / Grant(s)

Original submittal only

## 2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
NOTE-CD	SAROTECH CO., LTD.	PBCNOTE-CD	External Slim Drive (EUT)	PC
DCM	DEL Computer	DoC	PC	-
AV-5T	KDS	EVOKD-1510T	MONITOR	PC
Flex PCMCIA Card	N/A	KFN-PCM-PERL05	PCMCIA CARD	PC
LC-693	N/A	N/A	SPEAKER	PC and EUT
3500U	BTC	DoC	USB KEYBOARD	PC
OK-720	A4-TECH	DoC	MOUSE	PC
2225C	HP	DSI6XU2225	PRINTER	PC
020-0470	CARDINAL	GDE0196	MODEM	PC

## 2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

## 2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 12, 1999. (Registration Number: 92819)

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
CD PLAYER	LG ELECTRONICS INC.	CRN-8241B	DoC
CONNECTOR BOARD	SAROTECH CO., LTD.	N/A	N/A
AUDIO BOARD	SAROTECH CO., LTD.	N/A	N/A

#### 3.2 EUT exercise Software

Amplifying speaker was connected to the Audio Line Out at the back of the EUT and then the EUT was continuously operated by the music CD

#### 3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
External Slim Drive (EUT)	-	-	-
PC	N	-	1.5(P)
MONITOR	N	Y	1.5(P), 1.8(D)
PCMCIA CARD	N	Y	0.4(D)
SPEAKER	N/A	N	1.8(D)
USB KEYBOARD	N/A	Y	1.5(D)
MOUSE	N/A	N	1.5(D)
PRINTER	N	Y	1.5(P), 1.5(D)
MODEM	N	Y	1.5(P), 1.5 (D)

\* The marked “(P)” means the Power Cable and “(D)” means Signal Cable.



### 3.4 Noise Suppression Parts on Cable

	<b>Ferrite Bead (Y/N)</b>	<b>Location</b>	<b>Metal Hood (Y/N)</b>	<b>Location</b>
External Slim Drive (EUT)	N/A	N/A	N/A	N/A
PC	-	-	-	-
MONITOR	Y	BOTH END	Y	BOTH END
PCMCIA CARD	Y	EUT END	Y	BOTH END
SPEAKER	N	N/A	Y	EUT and PC END
USB KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END
PRINTER	N	N/A	Y	BOTH END
MODEM	N	N/A	Y	BOTH END

### 3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There was no Modified items during EMI test”

### 3.6 Configuration of Test System

**Line Conducted Test:** The EUT was connected to PC, and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.



## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The EUT was continuously operated by the music CD.	X

### 4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
The EUT was continuously operated by the music CD.	X



## 5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

### 5.1 Conducted Emission Test

Humidity Level : 42%

Temperature : 22.0

Limits apply to : FCC CFR 47, PART 15, SUBPART B

Type of Test : CLASS B

Result : PASSED BY -5.39 dB at 1.12 MHz

EUT : External Slim Drive

Date: March 13, 2001

Operating Condition : The EUT was continuously operated by the music CD.


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.63	40.67	NEUTRAL	48.00	-7.33
0.70	38.94	NEUTRAL	48.00	-9.06
0.98	39.29	NEUTRAL	48.00	-8.71
1.12	42.61	NEUTRAL	48.00	-5.39
1.19	41.23	NEUTRAL	48.00	-6.77
1.33	38.79	NEUTRAL	48.00	-9.21


Line Conducted Emission Tabulated Data



Measuring by: Young Min, Choi / Test Engineer

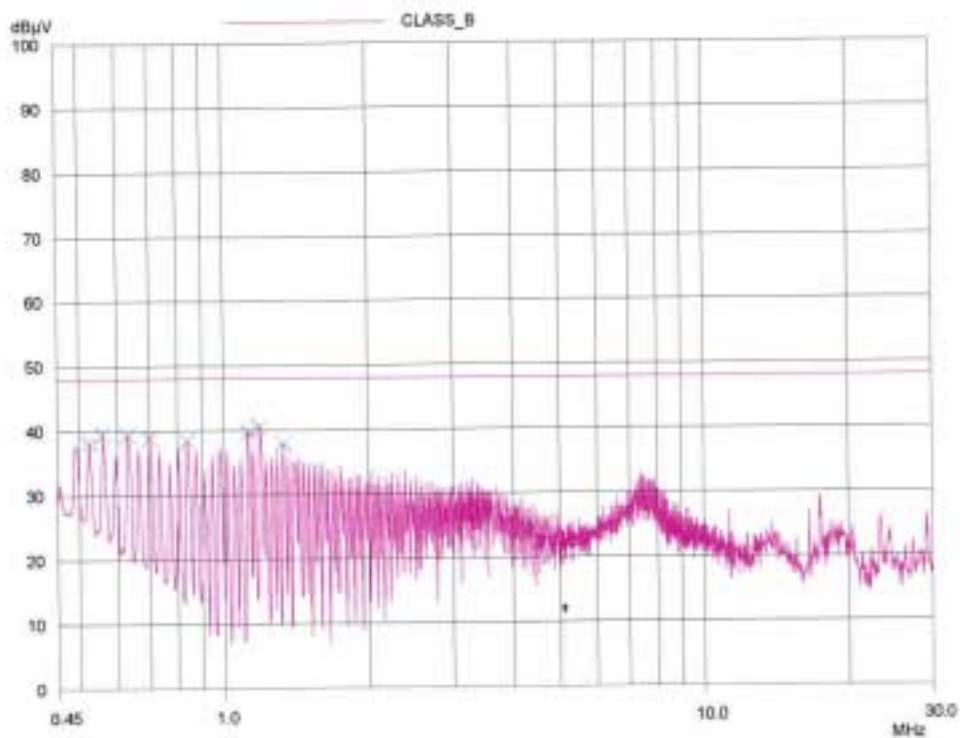

HOT LINE

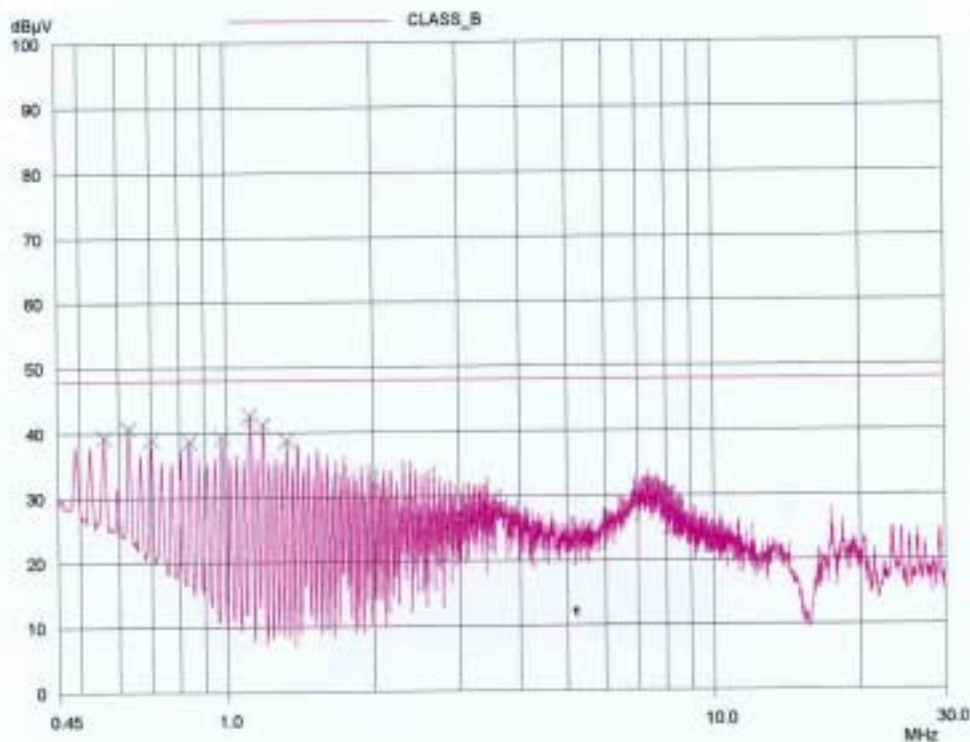

NEUTRAL LINE

This report shall not be reproduced except in full without our written approval.

EMC-004 (Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-860 Korea. (TEL: 82-31-765-8289 FAX: 82-31-766-2904)



## 5.2 Radiated Emission Test

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 40 % Temperature : 18•  
 Limits apply to : FCC CFR 47, PART 15, SUBPART B  
 Type of Test : CLASS B  
 Result : PASSED BY -2.67 dB at 320.2 MHz

EUT : External Slim Drive Date: March 15, 2001  
 Operating Condition : The EUT was continuously operated by the music CD.  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)  
 Distance : 3 Meter

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
46.65	18.40	V	11.35	0.90	30.65	40.00	-9.35
80.63	25.30	H	6.45	1.01	32.76	40.00	-7.24
135.50	20.20	V	12.81	1.29	34.30	43.50	-9.20
140.55	21.70	V	12.70	1.31	35.71	43.50	-7.79
211.20	20.10	H	11.72	1.63	33.45	43.50	-10.05
253.80	21.30	H	12.64	1.84	35.78	46.00	-10.22
265.00	21.40	H	13.43	1.87	36.70	46.00	-9.30
280.00	22.80	H	14.35	1.91	39.06	46.00	-6.94
320.20	26.00	H	15.21	2.12	43.33	46.00	-2.67
360.40	22.90	H	15.32	2.33	40.55	46.00	-5.45

Radiated Emission Tabulated Data

Measuring by: Young Min, Choi / Test Engineer



## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	SEP/00	12MONTH	■
2.	Test receiver	R/S	ESHS10	834467/007	APRIL/00	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3026A0226	SEP/00	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	SEP/00	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	SEP/00	12MONTH	■
6.	Dipole Antenna	EMCO	3121C	9107-745	JUN/00	12MONTH	
7.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	MAR/01	12MONTH	■
8.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	MAR/01	12MONTH	■
9.	Horn Antenna	EMCO	3115	9509-4563	MAR/01	12MONTH	■
10.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUN/00	12MONTH	■
11.	RF Amplifier	HP	8447F	3113A04554	JUN/00	N/A	
12.	Spectrum Analyzer	HP	8591A	3131A02312	APR/00	12MONTH	
13.	Spectrum Analyzer	HP	8561E	3350A00546	SEP/00	12MONTH	■
14.	Computer System	HP	98581C	98543A	N/A	N/A	■
	Hard disk drive		9153C	CMC762Z9153	N/A	N/A	■
15.	Plotter	HP	7475A	30052 22986	N/A	N/A	■
16.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
17.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
18.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■