



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 27 TEST REPORT

FCC Part 27

Report Reference No.: CTL1507031826-WF-11

Compiled by:
(position+printed name+signature)

Jacky Chen
(File administrators)

Jacky Chen

Tested by:
(position+printed name+signature)

Allen Wang
(Test Engineer)

Allen Wang

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name.....: LTE WiFi Router

Model/Type reference.....: T-N100

List Model(s).....: /

Trade Mark.....: /

FCC ID.....: XYOT-N100

Applicant's name.....: Asiatelco Technologies Co.

Address of applicant.....: #289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech Park,
Pudong, Shanghai 201204, China

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm.....: Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road, Nanshan
District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC CFR Title 47 Part 2, Part 27

EIA/TIA 603-D: 2010

KDB 971168 D01/ KDB 971168 D02

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of Receipt.....: July. 05, 2015

Date of Test Date.....: July. 07, 2015 - Aug. 11, 2015

Data of Issue.....: Aug. 11, 2015

Result.....: Positive

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : CTL1507031826-WF-11	Aug. 11, 2015 Date of issue
--	--------------------------------

Equipment under Test : LTE WiFi Router

Model /Type : T-N100

Listed Models : /

Applicant : **Asiatelco Technologies Co.**

Address : #289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China

Manufacturer : **Asiatelco Technologies Co.**

Address : #289 Bisheng Road, Building-8, 3F, Zhangjiang Hi-Tech Park, Pudong, Shanghai 201204, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

[illegible]

Contents

<u>1</u>	<u>SUMMARY</u>	<u>5</u>
1.1	TEST STANDARDS	5
1.2	Test Description	5
1.3	Test Facility	6
1.4	Statement of the measurement uncertainty	6
<u>2</u>	<u>GENERAL INFORMATION</u>	<u>7</u>
2.1	Environmental conditions	7
2.2	General Description of EUT	7
2.3	Description of Test Modes	8
2.4	Equipments Used during the Test	8
2.5	Related Submittal(s) / Grant (s)	8
2.6	Modifications	8
<u>3</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
3.1	Output Power	9
3.3	Peak-to-Average Ratio (PAR)	14
3.4	Occupied Bandwidth and Emission Bandwidth	15
3.5	Band Edge compliance	20
3.7	Spurious Emission	25
3.8	Frequency Stability under Temperature & Voltage Variations	43
<u>4</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>45</u>
<u>5</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>46</u>

1 SUMMARY

1.1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 27 : MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

TIA/EIA 603 D June 2010:Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

FCC Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

KDB971168 D01: v02r02 MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

KDB971168 D02: v01 EXAMPLE EMISSION MEASUREMENTS GUIDANCE FOR SPECIFIC SERVICE RULES

ANSI C63.4:2009: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 27.50(h)(2)	Pass
Peak-to-Average Ratio	Part 27.50(a)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(m)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(m)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(m)	Pass
Out of band emission, Band Edge	Part 2.1051 Part 27.53(m)	Pass
Frequency stability	Part 2.1055 Part 27.54	Pass

1.3 Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 General Description of EUT

Product Name:	LTE WiFi Router
Model/Type reference:	T-N100
Power supply:	DC 3.7V from battery or DC 12V from adapter
Serial number:	Prototype
Adapter information:	Model:C1000 Input: 100-240V, 50/60Hz 0.45A Output:12V ---1.0A
Hardware version:	725-0335-001-01
Software version:	V1.1
WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	PCB Antenna : 2*TX 2*RX
Antenna gain:	2.0dBi
3G	
Operation Band:	BC0 TX: 824.70 MHz ~ 848.31 MHz BC1 TX:1851.25 MHz ~ 1908.75 MHz
	BC0 RX: 869.70 MHz ~ 893.31 MHz BC1 RX: 1931.25 MHz ~ 1988.75 MHz
Supported Type:	CDMA2000 1xRTT/ CDMA2000 1xEv-DO-Release 0/ CDMA2000 1xEv-DO-Revision A
Modulation Type:	QPSK
Antenna Type:	External omni-antenna: 1*TX 2*RX
Antenna Gain:	2dBi
LTE	
Operation Band:	TD-LTE: Band 41 FDD-LTE: Band 2/4/5/12/13/25/26
Modulation Type:	QPSK, 16QAM
Release Version:	Release 9
Category:	Cat 3
Antenna Type:	External Omni-antenna: 1*TX 2*RX
Antenna gain:	2.0dBi

Note: For more details, refer to the user's manual of the EUT.

2.3 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. All tests performed with alternate AC power supply and DC power supply , recorded the worst case at AC mode except frequency stability test.
2. Test method and refer to 3GPP TS136521.

2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061714	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Spectrum Analyzer	Agilent	N9030A	MY51380383	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062014	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
Radio Communication Tester	R&S	CMU200	115419	2015/05/22	2016/05/21
Wideband Radio Communication Tester	R&S	CMW500	101814	2014/11/23	2015/11/22
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2015/05/20	2016/05/19
Climate Chamber	ESPEC	EL-10KA	A20120523	2015/05/20	2016/05/19
SIGNAL GENERATOR	Agilent	E4421B	US40051744	2015/05/20	2016/05/19
Directional Coupler	Agilent	87300B	3116A03638	2015/05/20	2016/05/19

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: XYOT-N100 filing to comply with of the FCC Part 27 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.


3 TEST CONDITIONS AND RESULTS

3.1 Output Power

LIMIT

According to §27.50 (h) (2): Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST CONFIGURATION

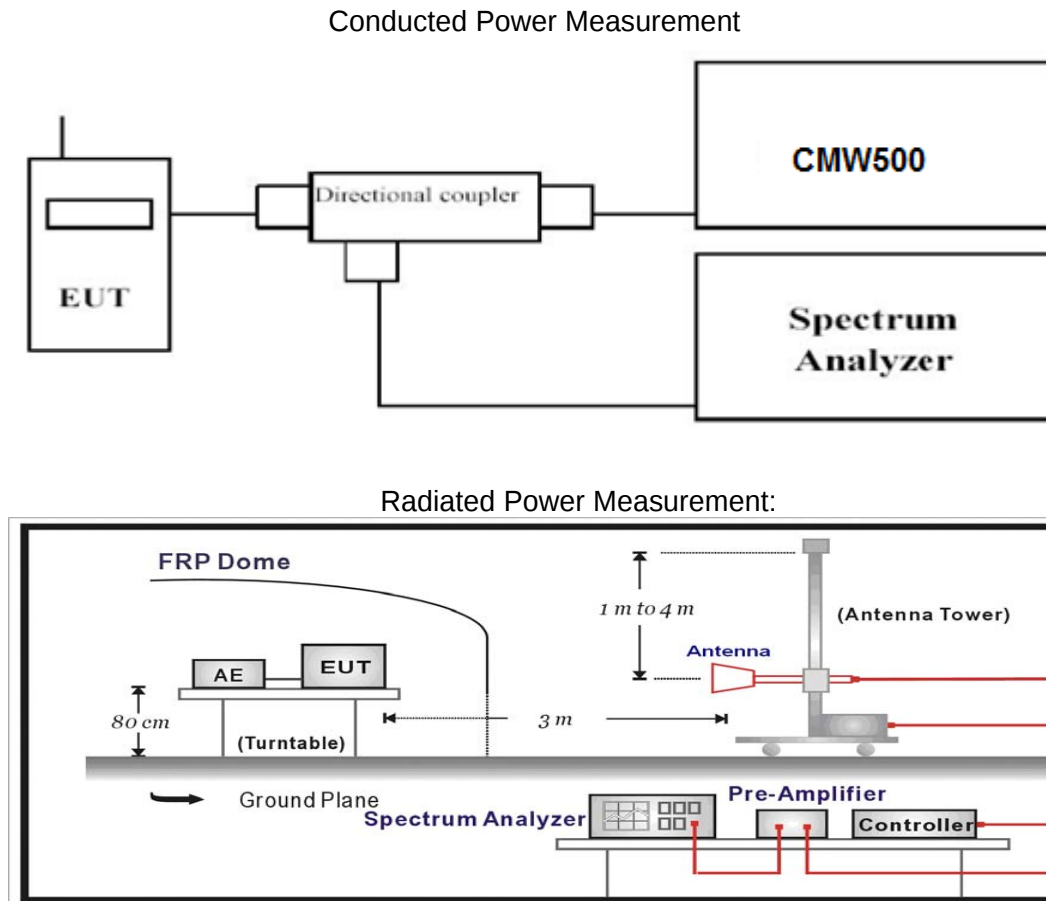

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.

- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4:2009.

TEST RESULTS

Conducted Measurement:

<i>LTE FDD Band 41</i>				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
5 MHz	1 RB low	2498.5	22.67	21.72
		2593.0	23.70	22.66
		2687.5	23.84	22.81
	1 RB high	2498.5	22.13	21.25
		2593.0	23.91	22.91
		2687.5	23.59	22.54
	50% RB mid	2498.5	22.07	21.07
		2593.0	22.87	22.01
		2687.5	22.77	21.93
	100% RB	2498.5	21.96	20.98
		2593.0	22.78	21.74
		2687.5	22.67	21.65
10 MHz	1 RB low	2501.0	22.52	21.54
		2593.0	23.70	22.65
		2685.0	23.98	22.99
	1 RB high	2501.0	22.90	21.77
		2593.0	23.66	22.86
		2685.0	23.60	22.07
	50% RB mid	2501.0	21.68	20.87
		2593.0	23.56	21.76
		2685.0	22.80	21.81
	100% RB	2501.0	21.49	20.60
		2593.0	22.64	21.19
		2685.0	22.66	21.75
15 MHz	1 RB low	2503.5	22.41	21.49
		2593.0	23.55	22.57
		2682.5	23.96	22.91
	1 RB high	2503.5	22.01	21.93
		2593.0	22.92	21.91
		2682.5	23.57	22.66
	50% RB mid	2503.5	21.63	20.66
		2593.0	22.69	21.69
		2682.5	22.88	21.90
	100% RB	2503.5	21.51	20.58
		2593.0	22.60	21.69
		2682.5	22.73	21.81

20 MHz	1 RB low	2506.0	22.57	21.49
		2593.0	23.59	22.63
		2680.0	23.95	23.04
	1 RB high	2506.0	22.13	21.03
		2593.0	22.98	21.90
		2680.0	23.58	22.62
	50% RB mid	2506.0	21.66	20.81
		2593.0	22.70	21.77
		2680.0	22.75	21.86
	100% RB	2506.0	21.69	20.88
		2593.0	22.72	21.82
		2680.0	22.75	21.90

Radiated Measurement:

Remark:

1. We were tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 41; recorded worst case for each Channel Bandwidth of LTE FDD Band 41.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$

LTE FDD Band 41_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2498.5	-19.86	3.65	10.77	34.50	21.76	33.01	11.25	H
2593.0	-17.98	3.71	11.10	34.44	23.85	33.01	9.16	H
2687.5	-18.73	3.78	11.05	34.40	22.94	33.01	10.07	H

LTE FDD Band 41_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501.0	-20.07	3.65	10.77	34.50	21.55	33.01	11.46	H
2593.0	-17.89	3.71	11.10	34.44	23.94	33.01	9.07	H
2685.0	-18.79	3.78	11.05	34.40	22.88	33.01	10.13	H

LTE FDD Band 41_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.5	-19.73	3.65	10.77	34.50	21.89	33.01	11.12	H
2593.0	-17.72	3.71	11.10	34.44	24.11	33.01	8.90	H
2682.5	-18.63	3.78	11.05	34.40	23.04	33.01	9.97	H

LTE FDD Band 41_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506.0	-19.56	3.65	10.77	34.50	22.06	33.01	10.95	H
2593.0	-17.48	3.71	11.10	34.44	24.35	33.01	8.66	H
2680.0	-18.30	3.78	11.05	34.40	23.37	33.01	9.64	H

LTE FDD Band 41_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2498.5	-21.09	3.65	10.77	34.50	20.53	33.01	12.48	H
2593.0	-19.22	3.71	11.10	34.44	22.61	33.01	10.40	H
2687.5	-19.89	3.78	11.05	34.40	21.78	33.01	11.23	H

LTE FDD Band 41_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2501.0	-21.30	3.65	10.77	34.50	20.32	33.01	12.69	H
2593.0	-19.04	3.71	11.10	34.44	22.79	33.01	10.22	H
2685.0	-19.87	3.78	11.05	34.40	21.80	33.01	11.21	H

LTE FDD Band 41_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2503.5	-20.95	3.65	10.77	34.50	20.67	33.01	12.34	H
2593.0	-18.82	3.71	11.10	34.44	23.01	33.01	10.00	H
2682.5	-19.68	3.78	11.05	34.40	21.99	33.01	11.02	H

LTE FDD Band 41_Channel Bandwidth 20MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2506.0	-20.80	3.65	10.77	34.50	20.82	33.01	12.19	H
2593.0	-18.49	3.71	11.10	34.44	23.34	33.01	9.67	H
2680.0	-19.50	3.78	11.05	34.40	22.17	33.01	10.84	H

3.3 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

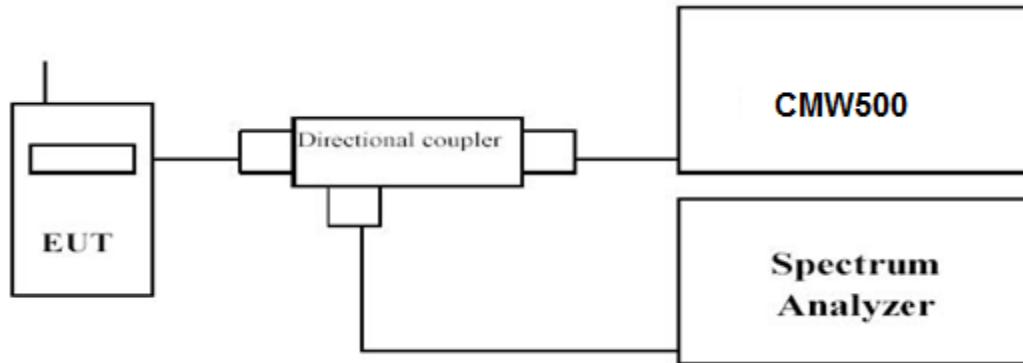

TEST PROCEDURE

According to KDB971168 D01 Power Meas License Digital Systems v02r02: Use one of the procedures presented in 4.1 to measure the total peak power and record as P_{Pk}. Use one of the applicable procedures presented 4.2 to measure the total average power and record as P_{Avg}. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:
 $PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm)$.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 41; recorded worst case for each Channel Bandwidth of LTE FDD Band 41.


LTE FDD Band 41				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
5 MHz	2498.5	100% RB	6.56	7.65
	2593.0		7.82	8.44
	2687.5		7.22	7.96
10 MHz	2501.0	100% RB	6.14	7.80
	2593.0		7.02	8.31
	2685.0		8.47	10.01
15 MHz	2503.5	100% RB	5.55	7.49
	2593.0		6.34	7.33
	2682.5		5.10	6.99
20 MHz	2506.0	100% RB	6.06	6.58
	2593.0		7.77	8.82
	2680.0		6.94	7.40

3.4 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

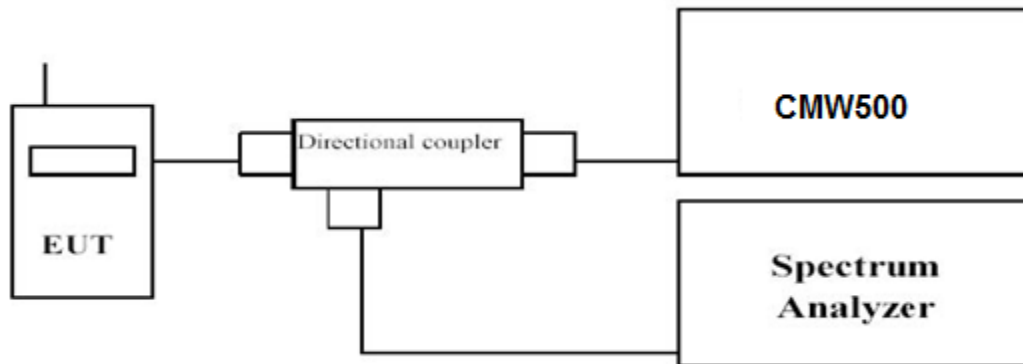

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS


Remark:

1. We were tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 41; recorded worst case for each Channel Bandwidth of LTE FDD Band 41.


LTE FDD Band 41						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	25RB#0	2498.5	4.8140	4.8580	4.4819	4.4923
		2593.0	4.7450	4.8000	4.4774	4.4906
		2687.5	4.8030	4.8200	4.4726	4.4915
10 MHz	50RB#0	2501.0	9.4140	9.4280	8.9212	8.9420
		2593.0	9.3670	9.4250	8.8980	8.9277
		2685.0	9.4490	9.4120	8.9118	8.9278
15 MHz	75RB#0	2503.5	14.090	14.040	13.416	13.391
		2593.0	14.040	13.980	13.388	13.384
		2682.5	14.000	13.960	13.380	13.377
20 MHz	100RB#0	2506.0	18.650	18.580	17.817	17.820
		2593.0	18.560	18.530	17.797	17.784
		2680.0	18.660	18.550	17.793	17.784

LTE FDD Band 41-5MHz Channel Bandwidth

QPSK

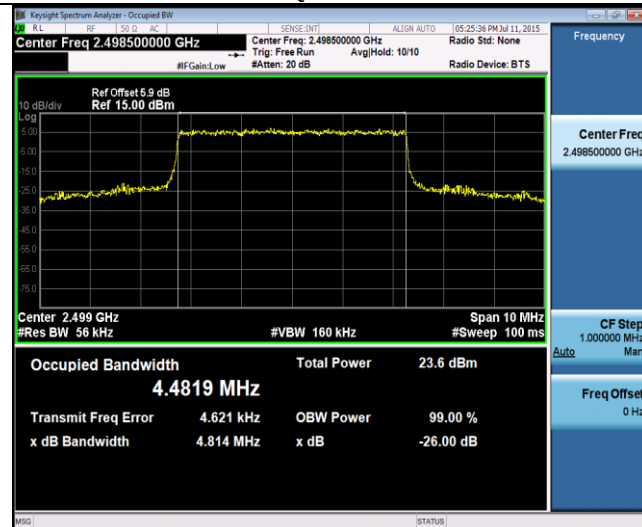



16QAM

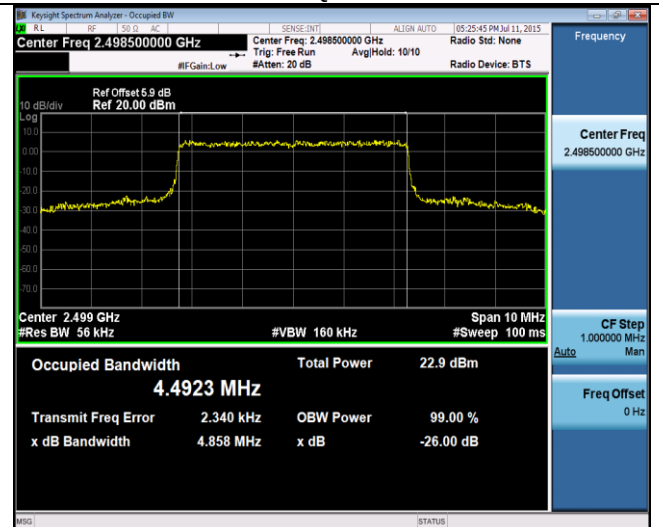

25RB#0

25RB#0



Low Channel

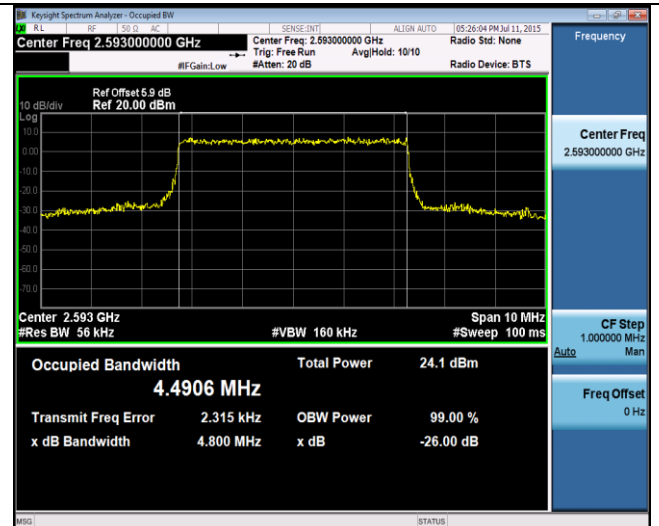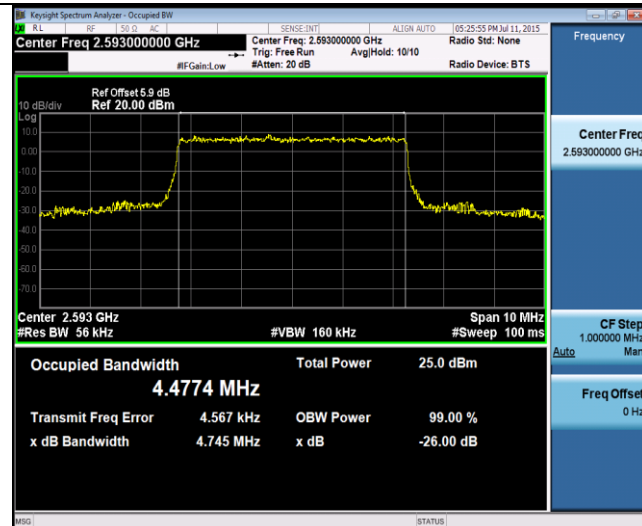

25RB#0

25RB#0

Middle Channel

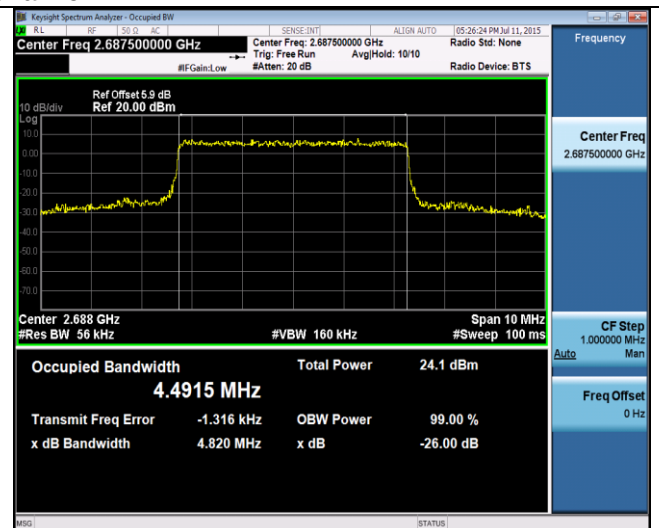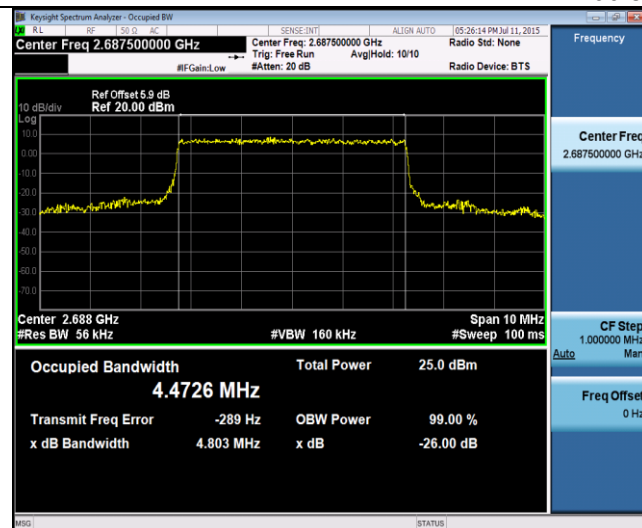


25RB#0

25RB#0


High Channel

LTE FDD Band 41-10MHz Channel Bandwidth

QPSK

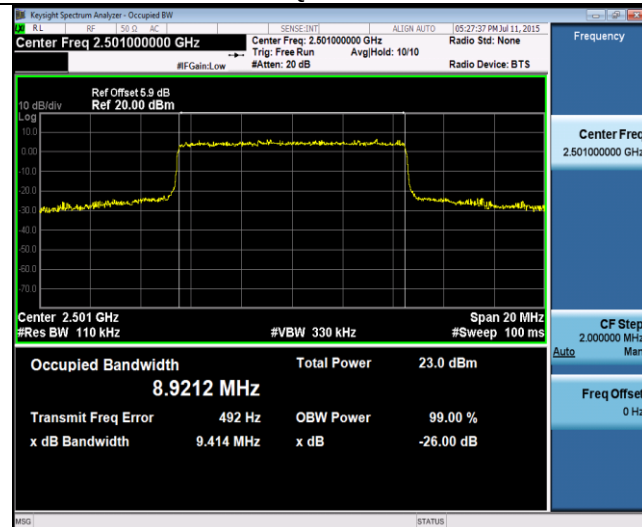



16QAM

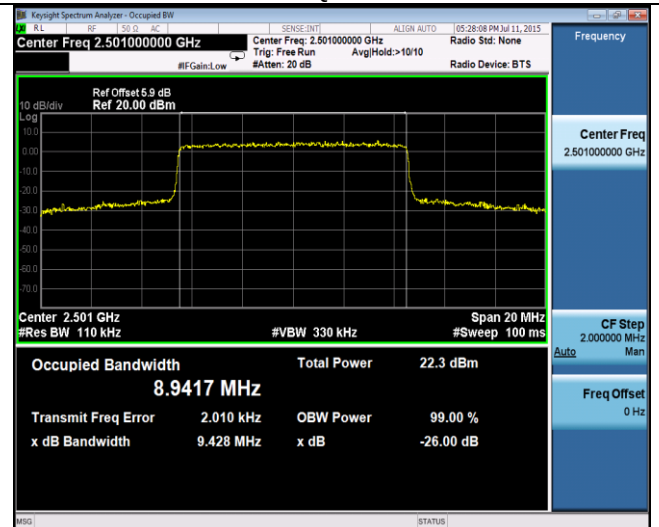

50RB#0

50RB#0


Low Channel

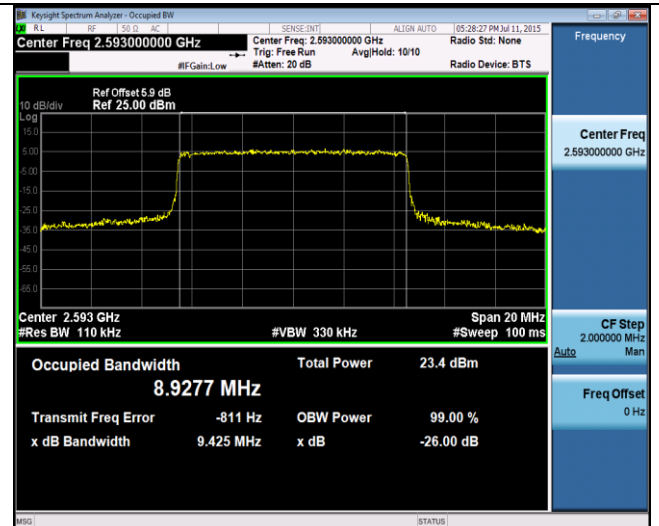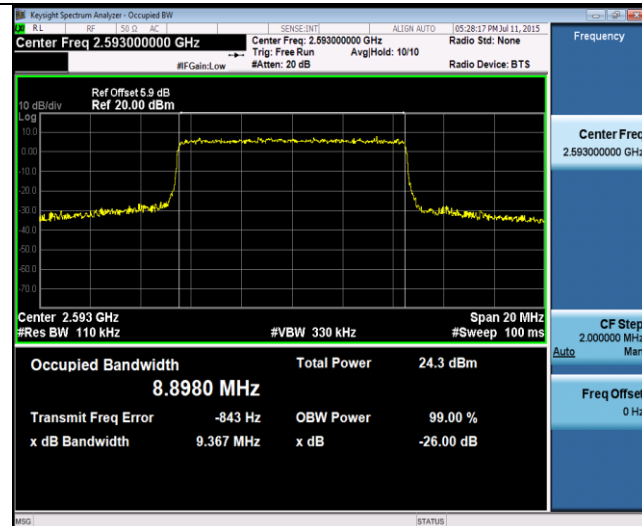

50RB#0

50RB#0

Middle Channel

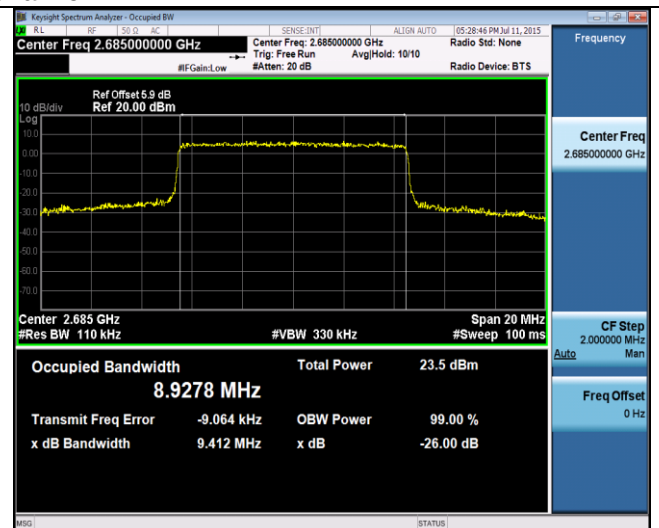


50RB#0

50RB#0


High Channel

LTE FDD Band 41-15MHz Channel Bandwidth

QPSK

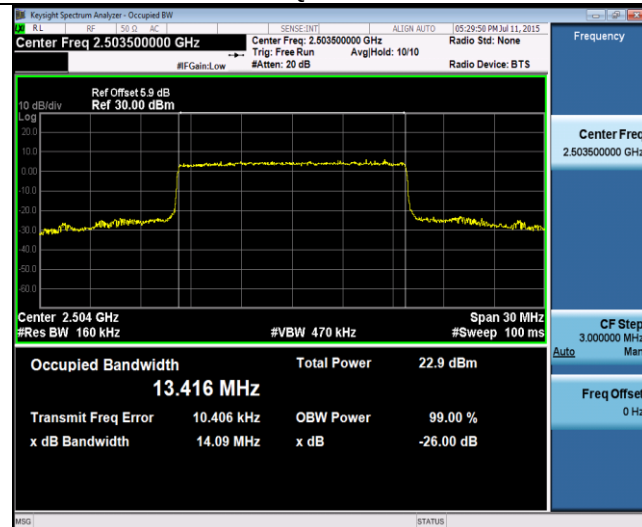


16QAM

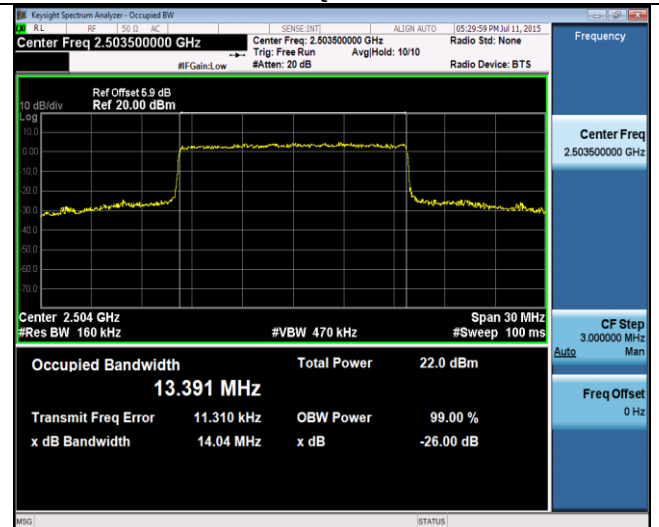


75RB#0

75RB#0

Low Channel

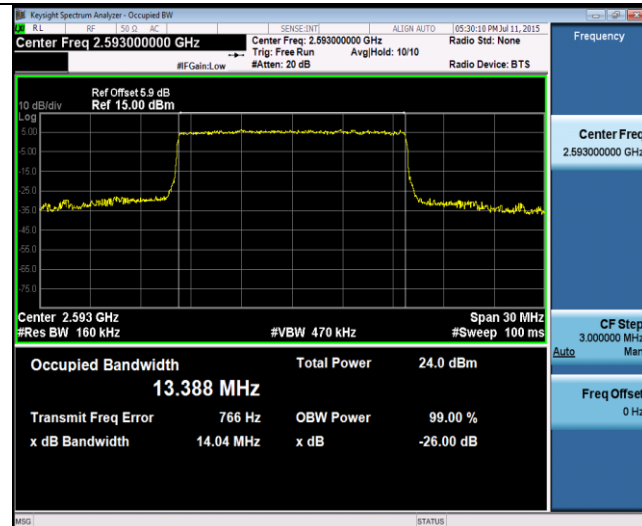


75RB#0

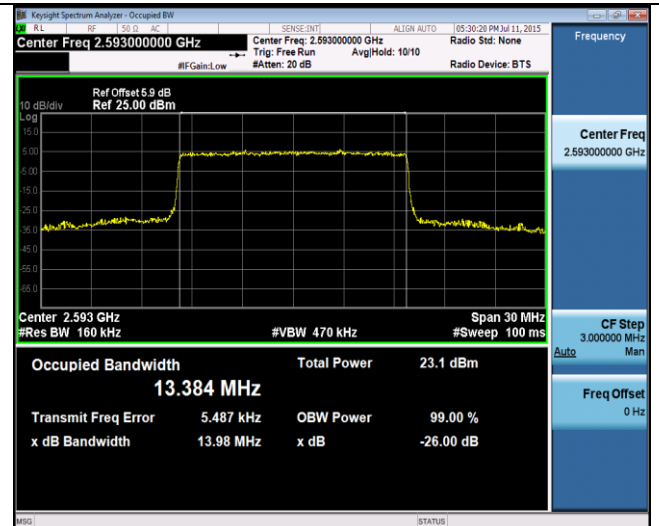


75RB#0

Middle Channel

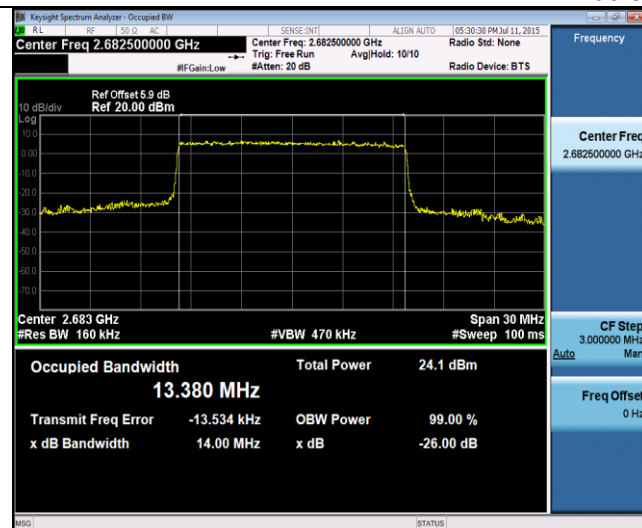

75RB#0

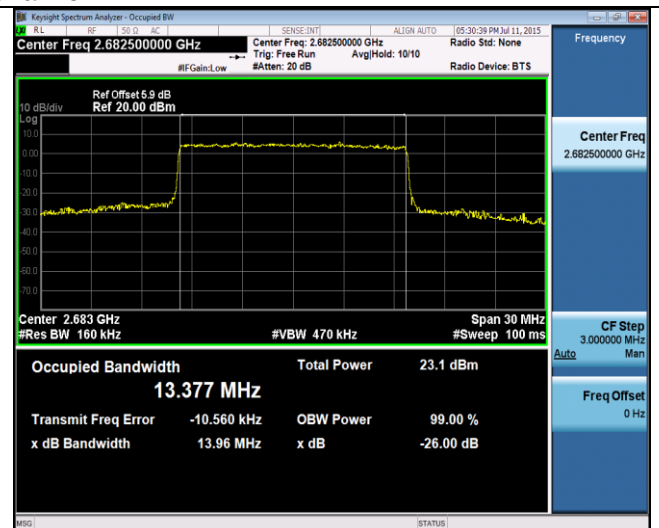


75RB#0


High Channel

LTE FDD Band 41-20MHz Channel Bandwidth

QPSK

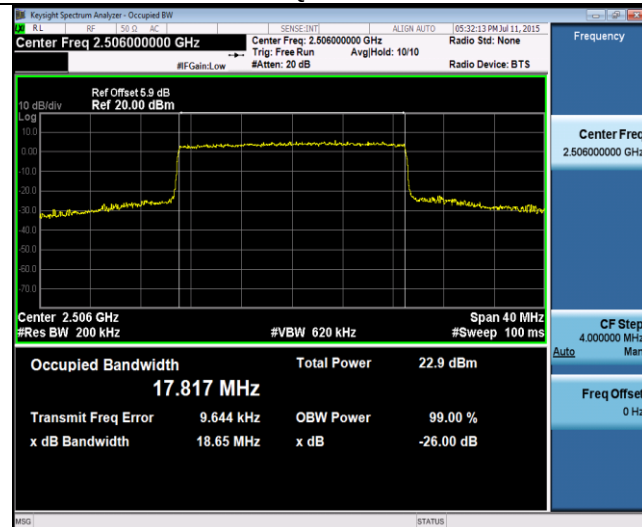


16QAM

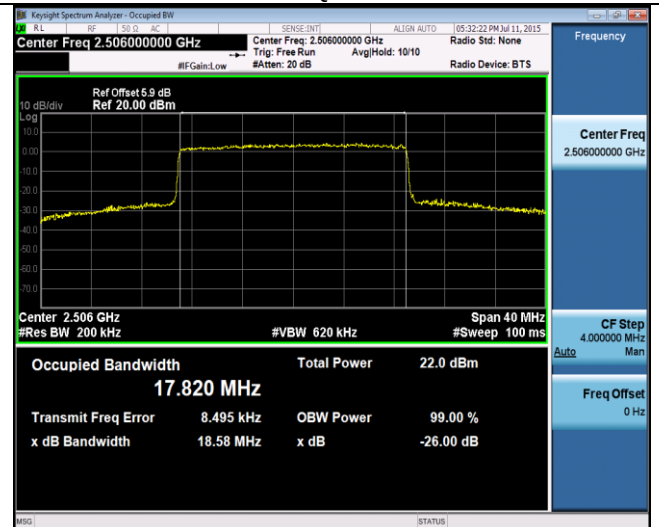


100RB#0

100RB#0

Low Channel

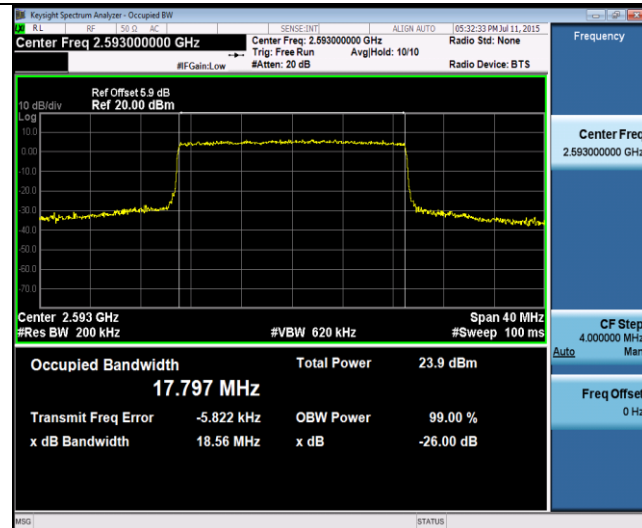

100RB#0

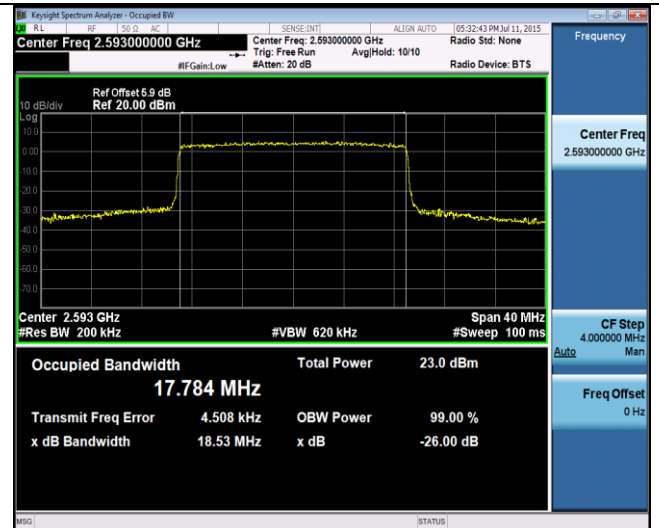

100RB#0

Middle Channel



100RB#0



100RB#0

High Channel

3.5 Band Edge compliance

LIMIT

According to Part §27.53

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Emission mask plot has limit line to demonstrate the out of band emission lower than -25dBm/MHz.

Therefore, in order to show compliance, following formula has been applied on each emission mask plots.


RBW integration method is applied when RBW less than 1MHz. Emission mask display line formula = $-25\text{dBm} + 10\log(\text{RBW}/1\text{MHz})$

For example: if RBW = 100KHz. Then display line limit will be $-25\text{dBm} + 10\log(100/1000) = -35\text{dBm}$;

m(4) For mobile digital stations, the attenuation factor shall not less than $43 + 10\log (P)$ dB at channel edge and $55 + 10\log (P)$ at 5.5 megahertz from the channel edges. (Channel edges are defined under §27.5 (i). Frequency assignment for the BRS/EBS band).

m(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

TEST CONFIGURATION

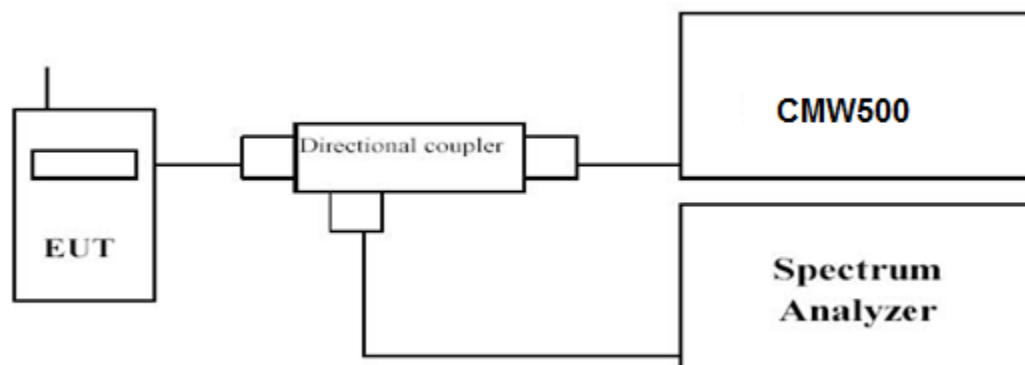





TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS


Remark:

1. We were tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 41; recorded worst case for each Channel Bandwidth of LTE FDD Band 41.

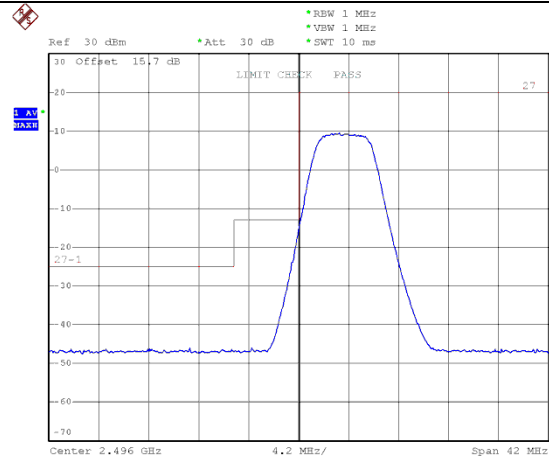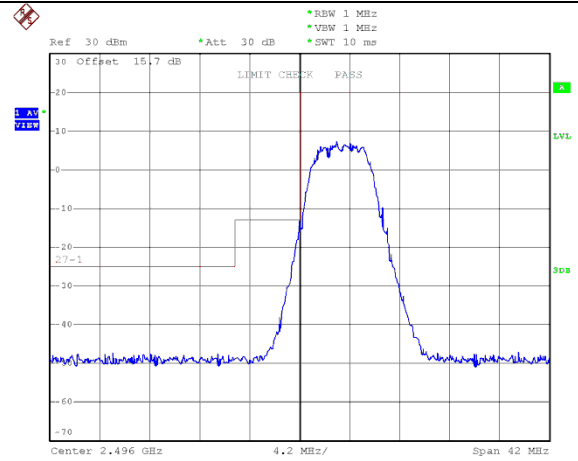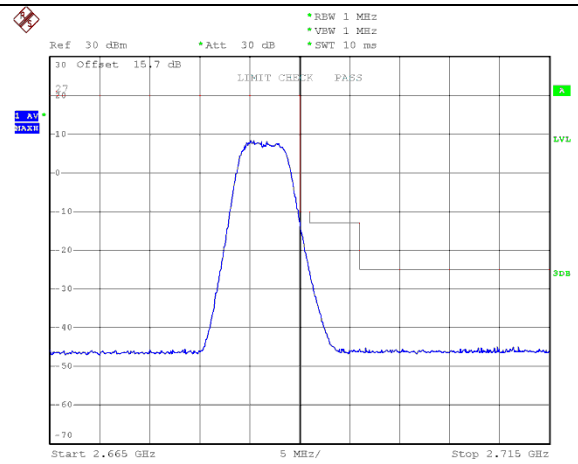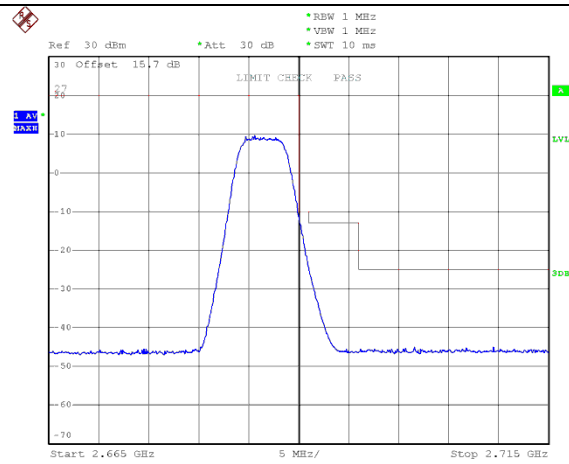
LTE FDD Band 41-5MHz Channel Bandwidth Band Edge Compliance**QPSK****16QAM****25RB#0****25RB#0****Low Channel****25RB#0****25RB#0****High Channel**

LTE FDD Band 41-10MHz Channel Bandwidth Band Edge Compliance

QPSK

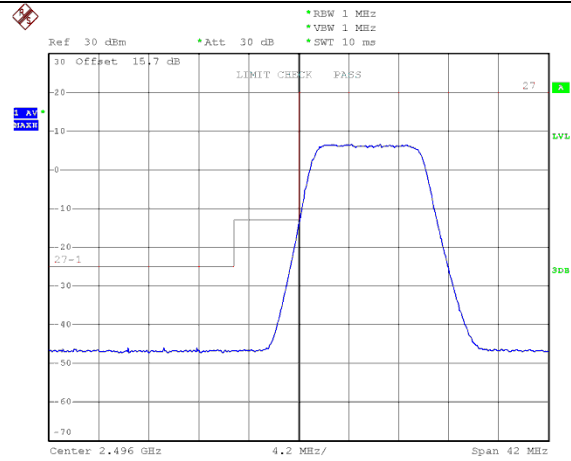

16QAM

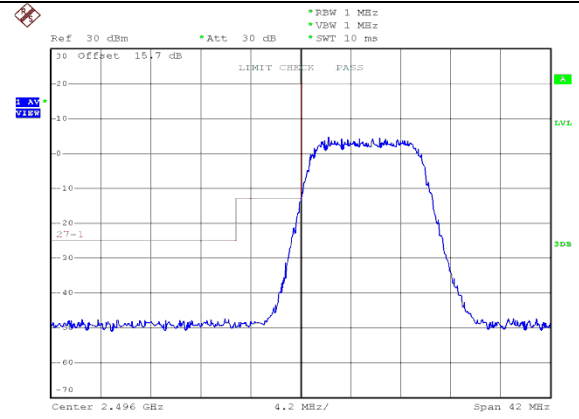



LL

Date: 1.JAN.2003 01:28:12

50RB#0

50RB#0

Low Channel

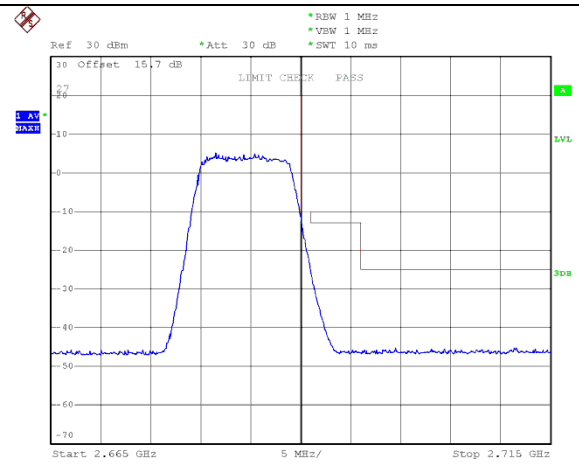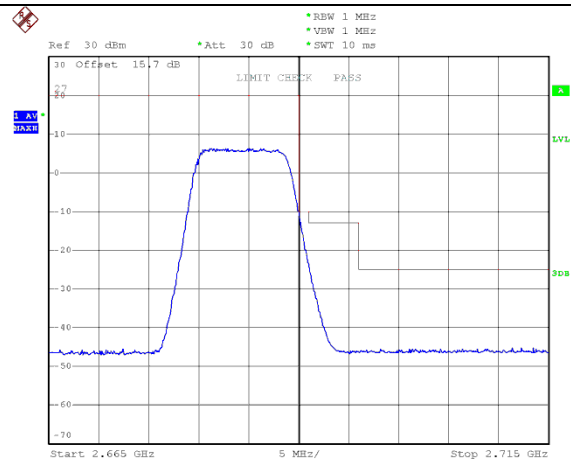


50RB#0

50RB#0


High Channel

LTE FDD Band 41-15MHz Channel Bandwidth Band Edge Compliance

QPSK

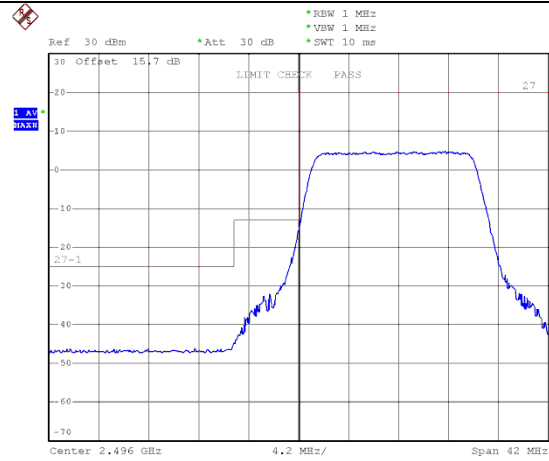



16QAM

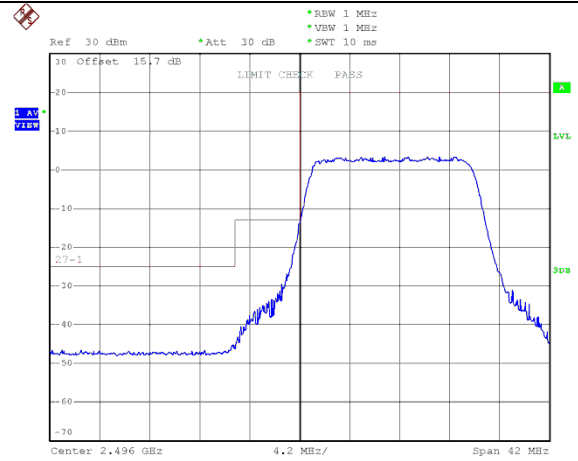

75RB#0

75RB#0

Low Channel

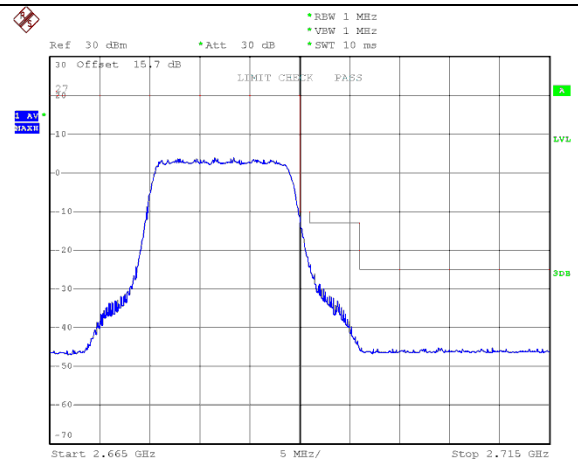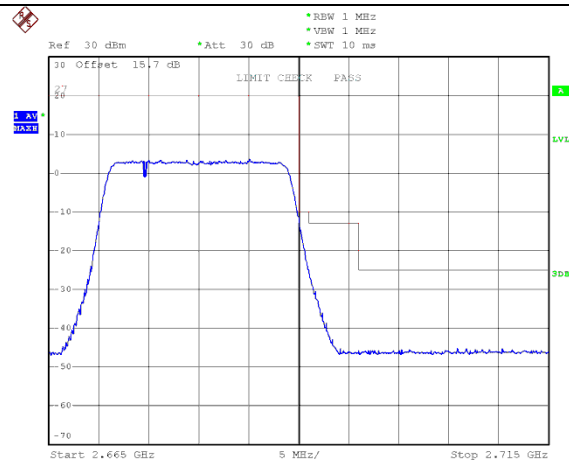


75RB#0

75RB#0


High Channel

LTE FDD Band 41-20MHz Channel Bandwidth Band Edge Compliance

QPSK

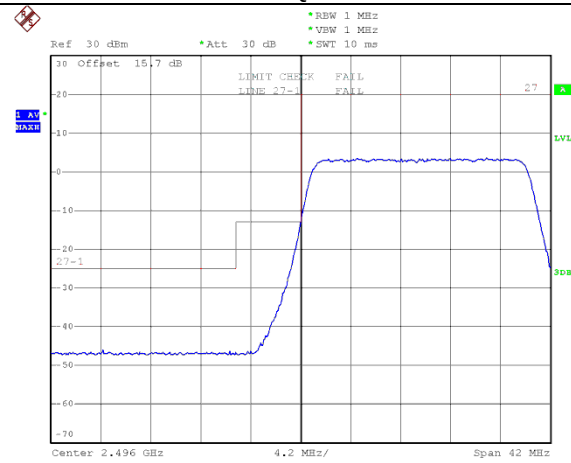



16QAM

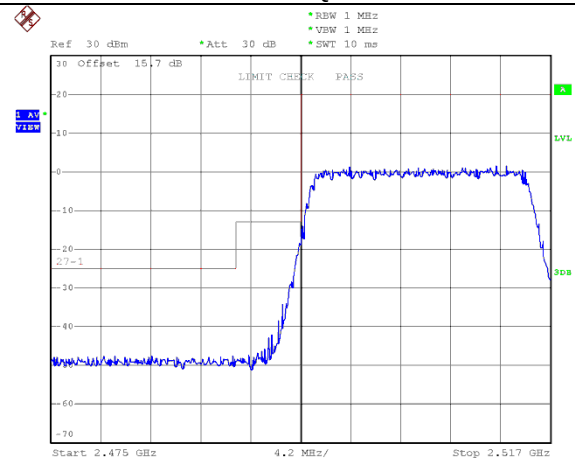

100RB#0

100RB#0

Low Channel

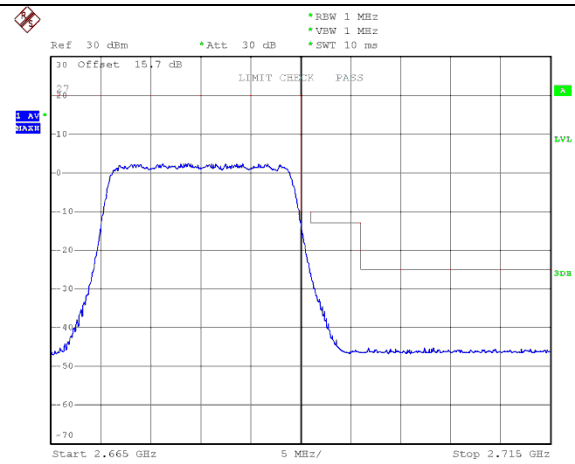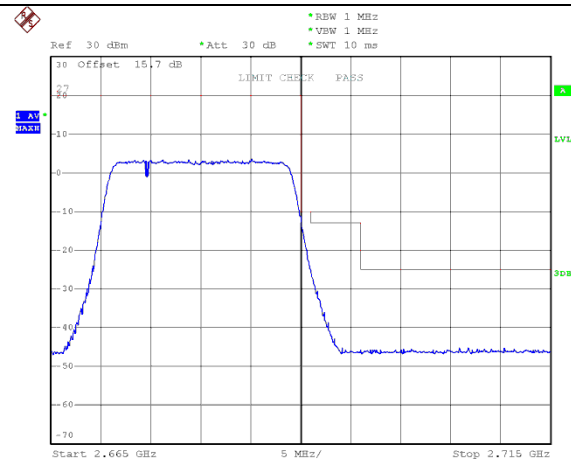

100RB#0

100RB#0

High Channel

3.7 Spurious Emission

LIMIT


According to Part §27.53

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


M (6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

TEST CONFIGURATION

Conducted Spurious Measurement:

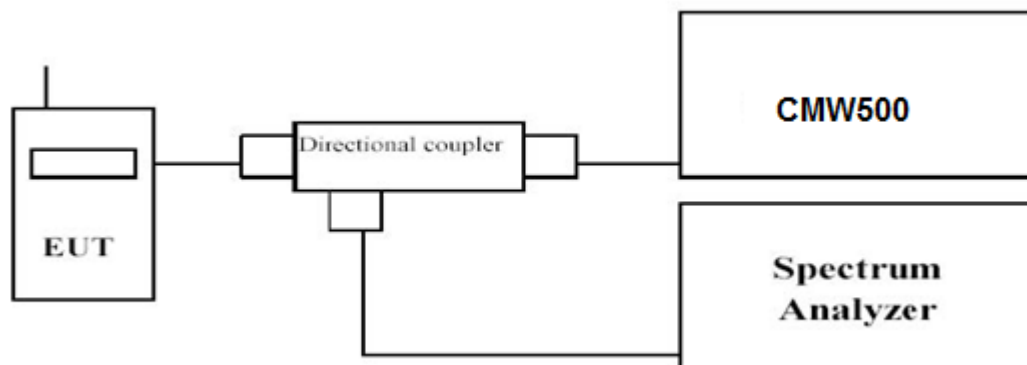

Radiated Spurious Measurement:

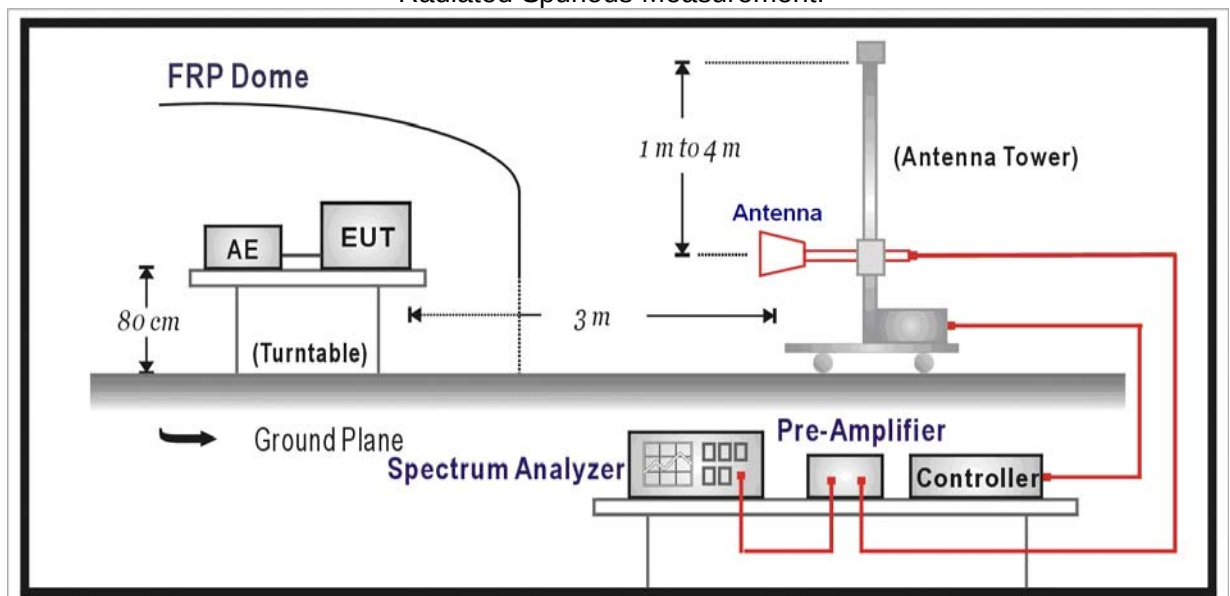

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Spurious Measurement:

- a. Place the EUT on a bench and set it in transmitting mode.

- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- c. EUT Communicate with CMW500, then select a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.
- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- f. Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 41	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~27.0*	1 MHz	3 MHz	Auto

Radiated Spurious Measurement:


- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.4: 2009.

TEST RESULTS

Remark:


1. We were tested all RB and RB offset Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 41; recorded worst case for each Channel Bandwidth of LTE FDD Band 41.
2. We tested from 9KHz to 27GHz and recorded 9KHz at 26.5GHz as the emission values from 26.5GHz to 27GHz to lower.

Conducted Measurement:

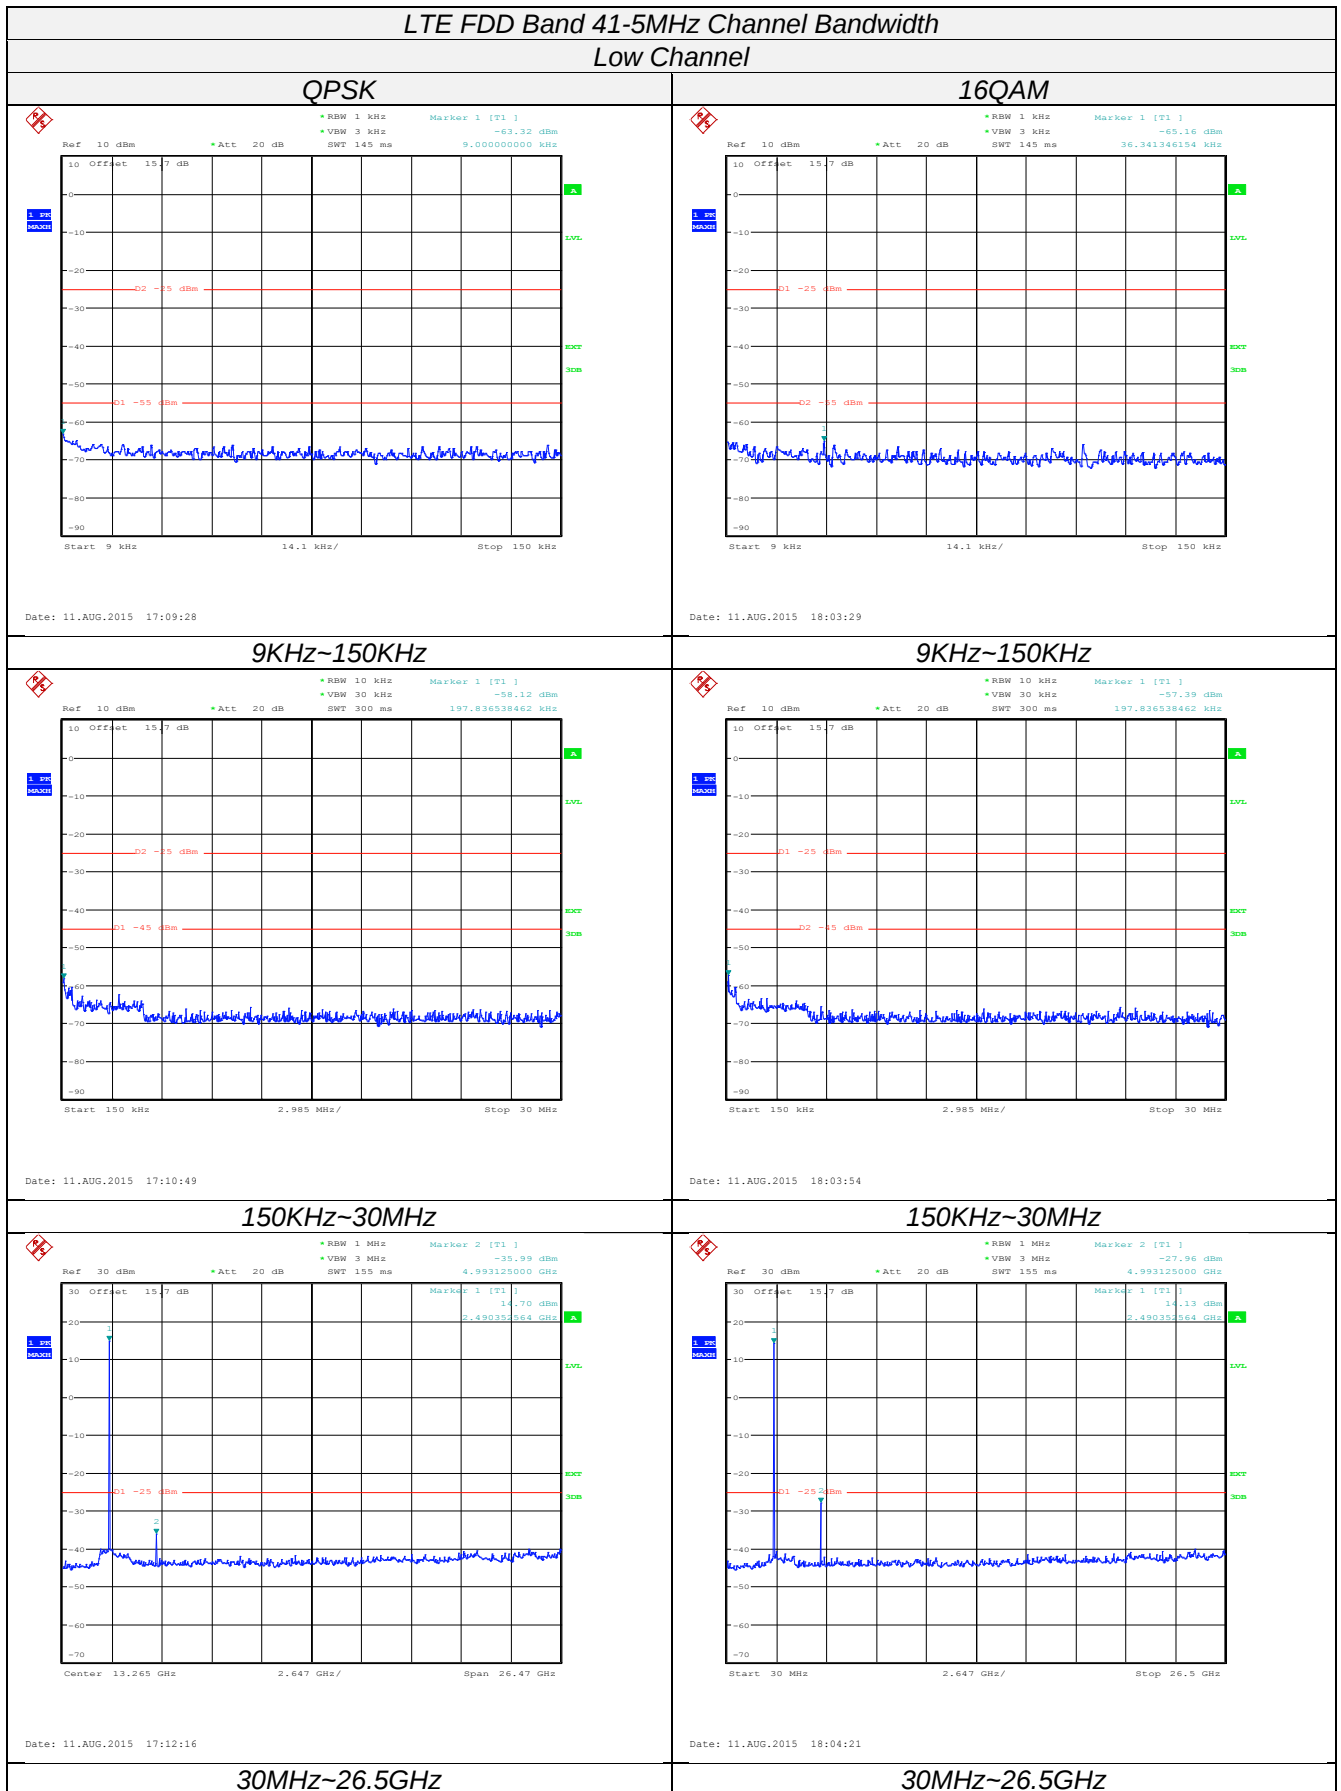


LTE FDD Band 41-5MHz Channel Bandwidth
Middle Channel

QPSK

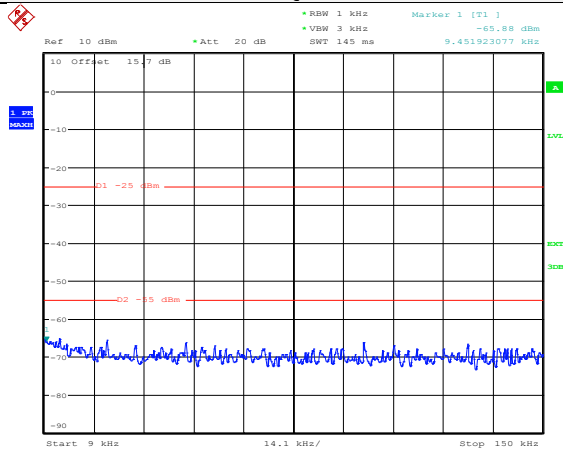


Date: 11.AUG.2015 17:15:10

16QAM

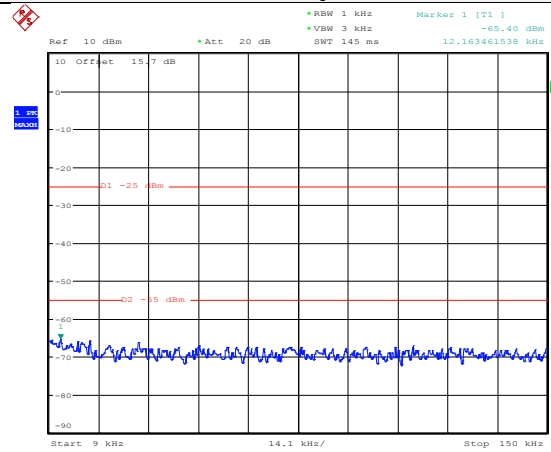


Date: 11.AUG.2015 18:06:42

9KHz~150KHz

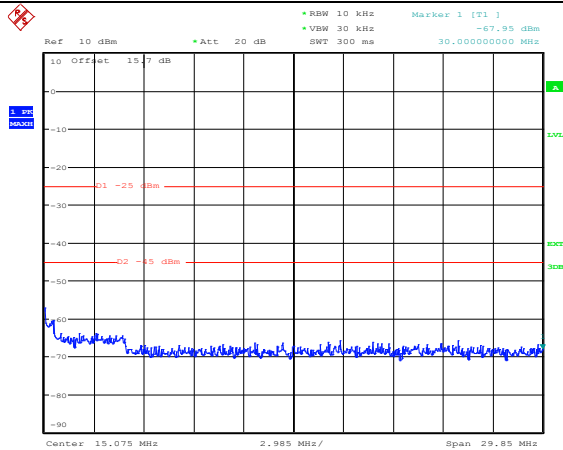


Date: 11.AUG.2015 17:15:49

9KHz~150KHz

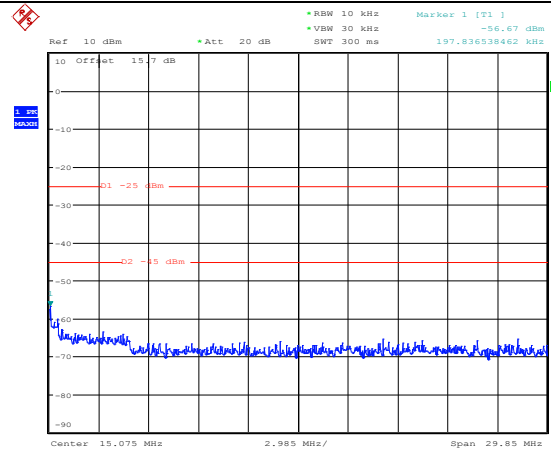


Date: 11.AUG.2015 18:06:08

150KHz~30MHz

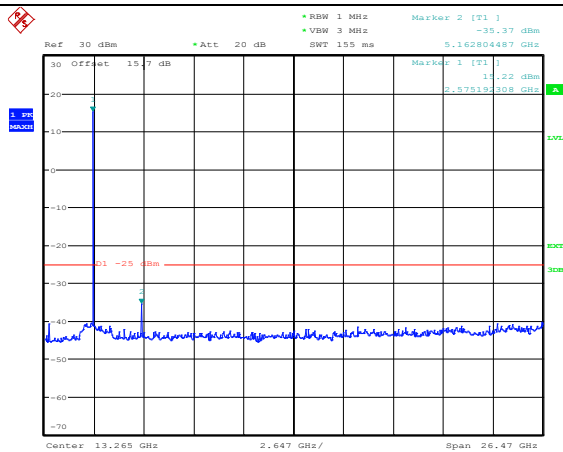

Date: 11.AUG.2015 17:14:03

150KHz~30MHz

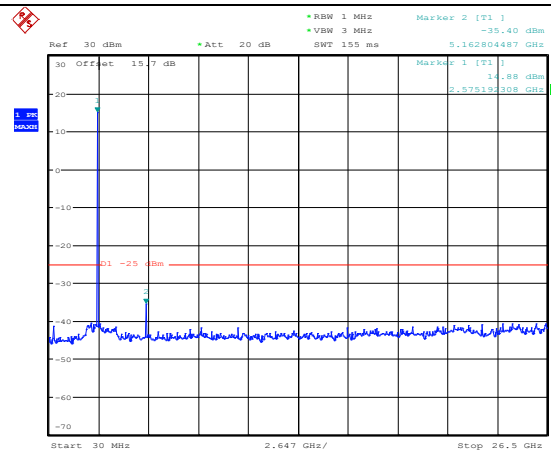

Date: 11.AUG.2015 18:05:21


30MHz~26.5GHz

30MHz~26.5GHz


LTE FDD Band 41-5MHz Channel Bandwidth

High Channel


QPSK

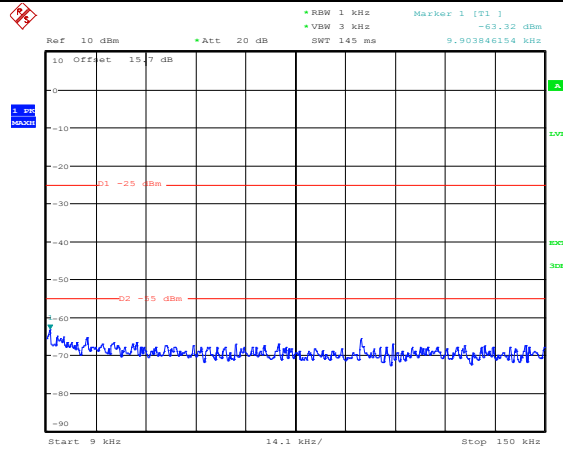


16QAM

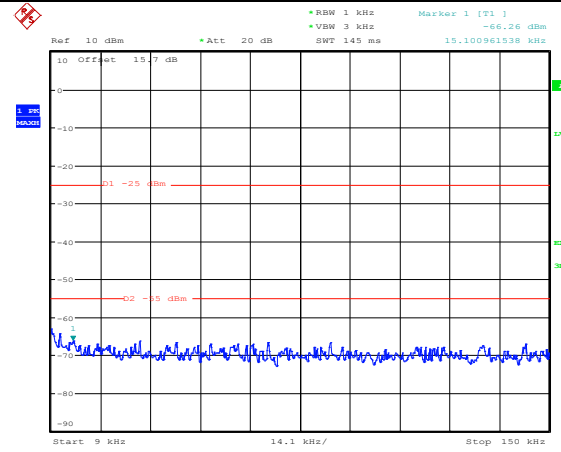


9KHz~150KHz

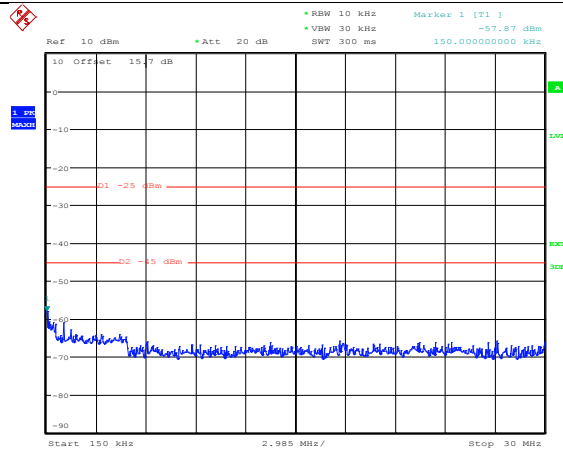


9KHz~150KHz

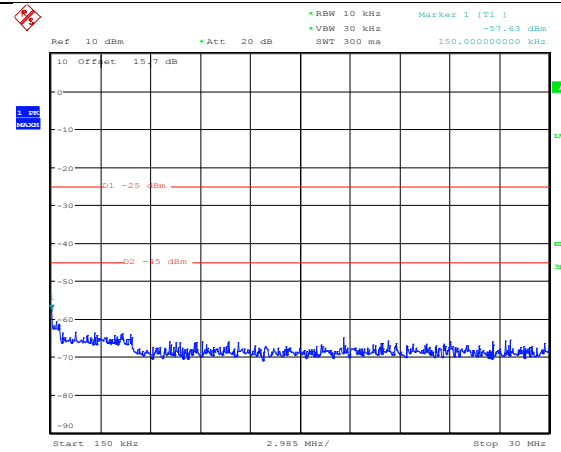

150KHz~30MHz

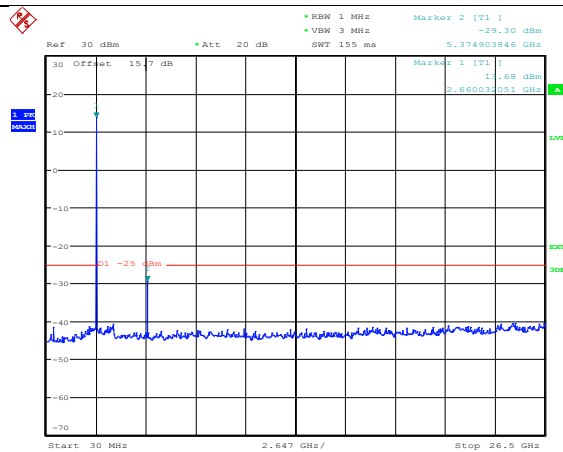

150KHz~30MHz

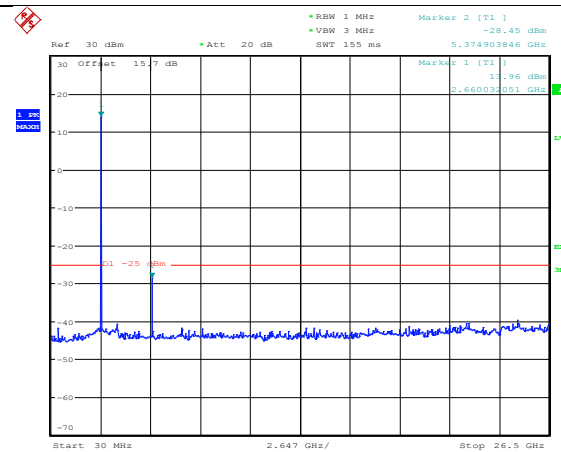


30MHz~26.5GHz

30MHz~26.5GHz


LTE FDD Band 41-10MHz Channel Bandwidth
Low Channel

QPSK

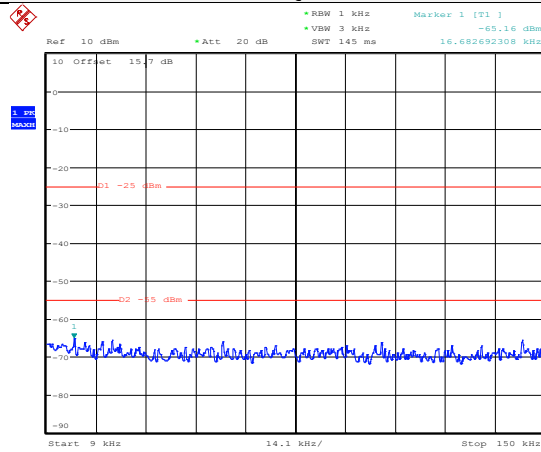


Date: 11.AUG.2015 17:20:15

16QAM

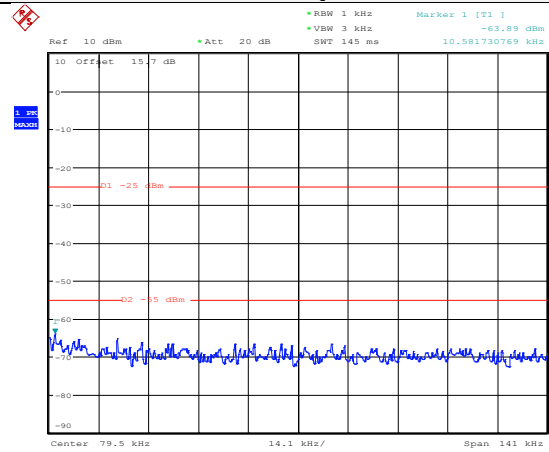


Date: 11.AUG.2015 17:56:44

9KHz~150KHz

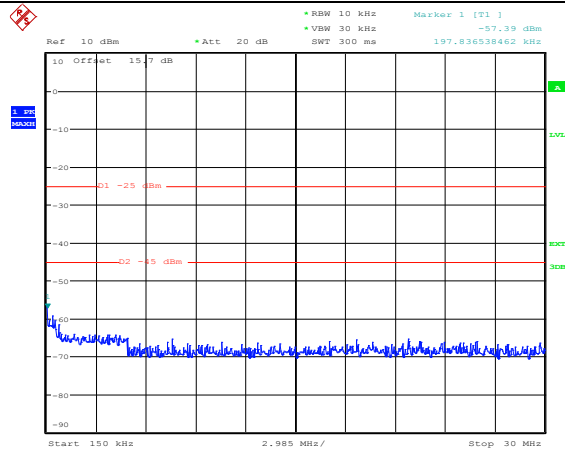


Date: 11.AUG.2015 17:20:44

9KHz~150KHz

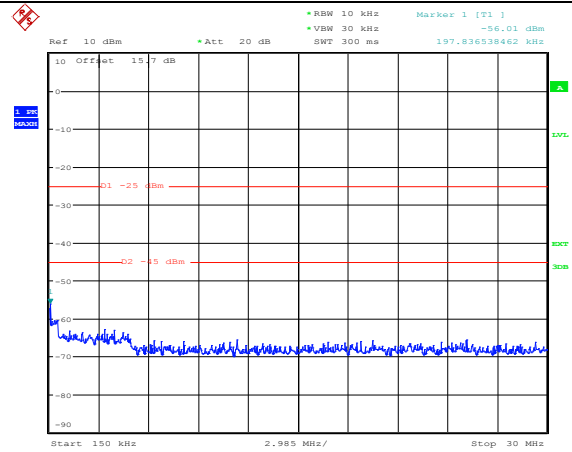


Date: 11.AUG.2015 17:57:19

150KHz~30MHz

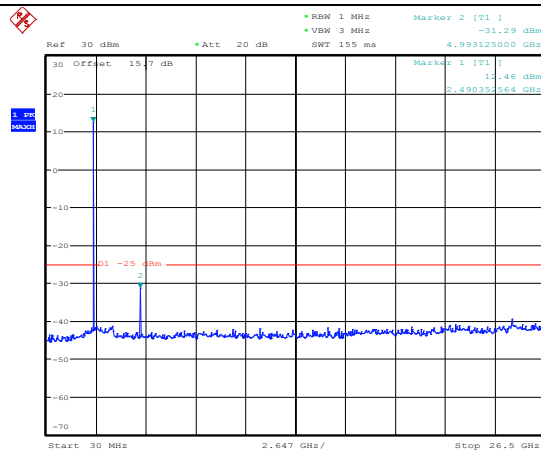

Date: 11.AUG.2015 17:21:25

150KHz~30MHz

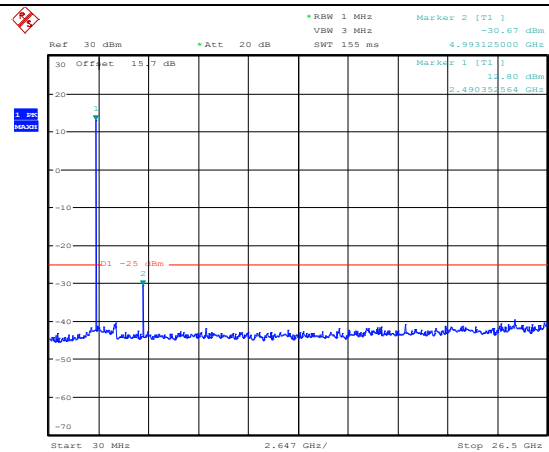


Date: 11.AUG.2015 17:58:24


30MHz~26.5GHz

30MHz~26.5GHz


LTE FDD Band 41-10MHz Channel Bandwidth
Middle Channel

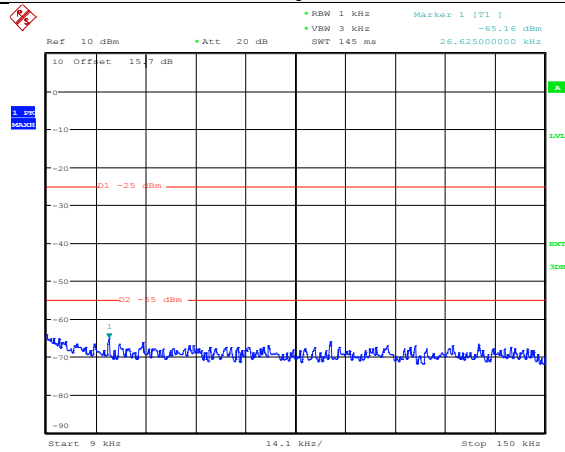QPSK


Date: 11.AUG.2015 17:23:47

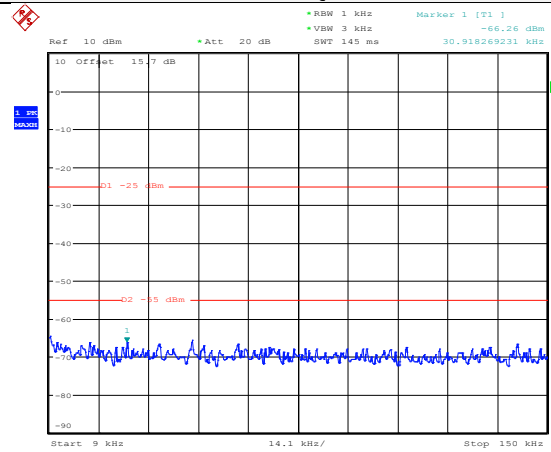16QAM


Date: 11.AUG.2015 18:00:08

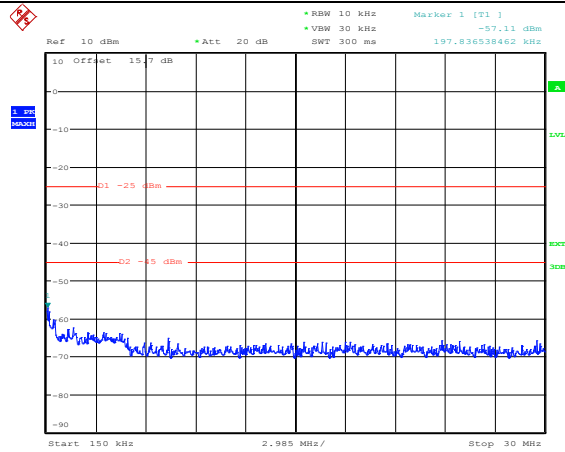9KHz~150KHz


Date: 11.AUG.2015 17:22:59

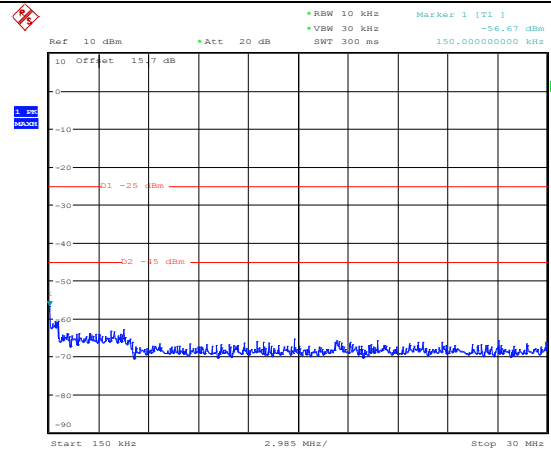9KHz~150KHz

Date: 11.AUG.2015 17:59:38

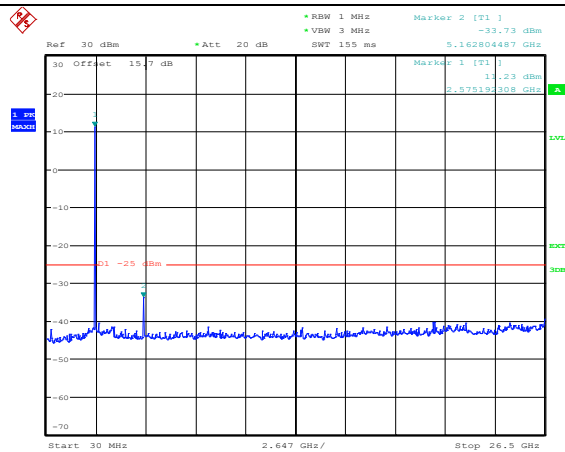150KHz~30MHz

Date: 11.AUG.2015 17:22:21

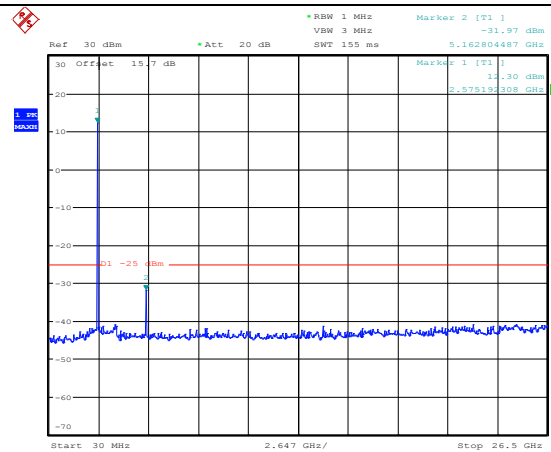
150KHz~30MHz

Date: 11.AUG.2015 17:59:02

30MHz~26.5GHz**30MHz~26.5GHz**


LTE FDD Band 41-10MHz Channel Bandwidth
High Channel

QPSK

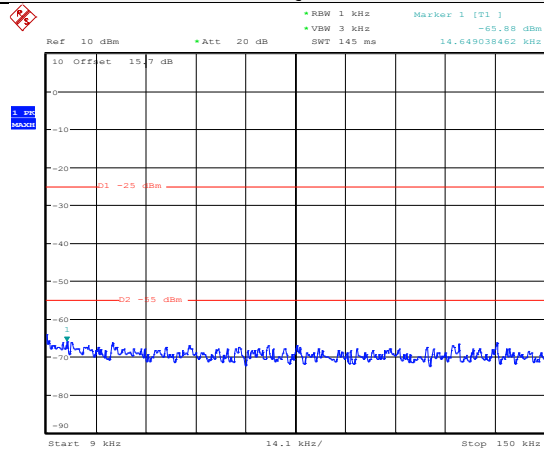


Date: 11.AUG.2015 17:25:03

16QAM

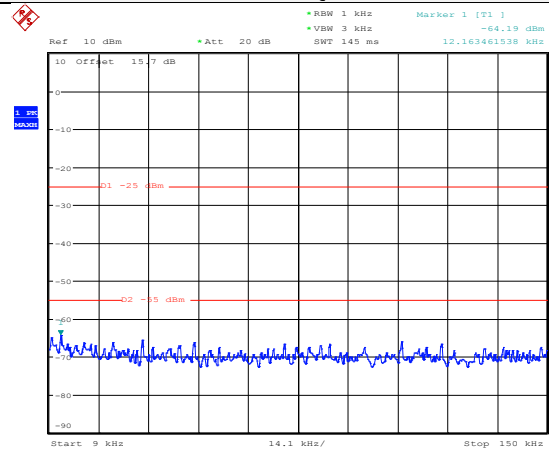


Date: 11.AUG.2015 18:00:56

9KHz~150KHz

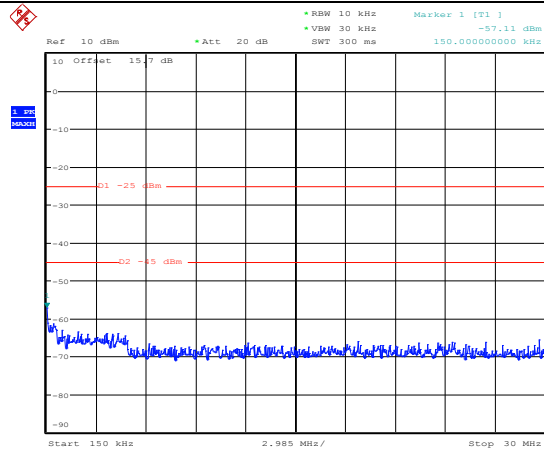


Date: 11.AUG.2015 17:25:38

9KHz~150KHz

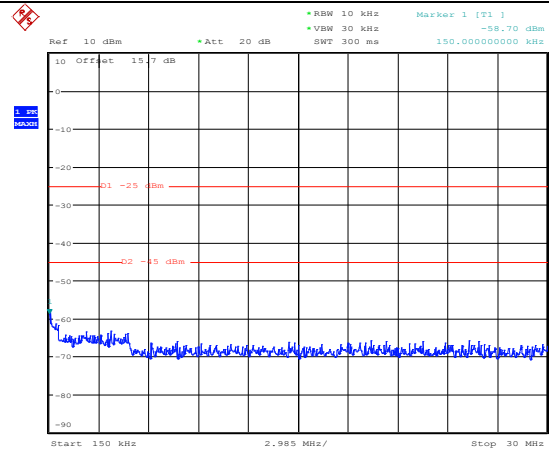


Date: 11.AUG.2015 18:01:24

150KHz~30MHz

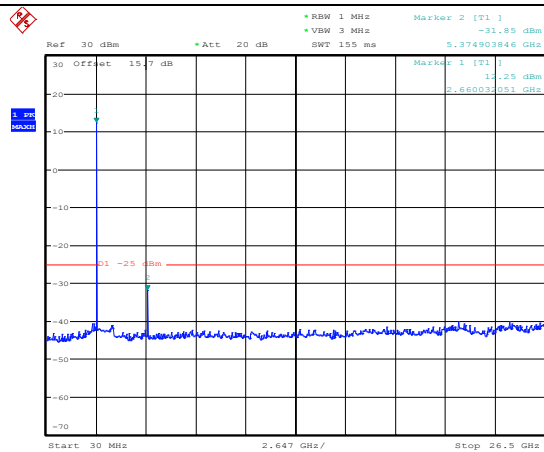

Date: 11.AUG.2015 17:26:17

150KHz~30MHz

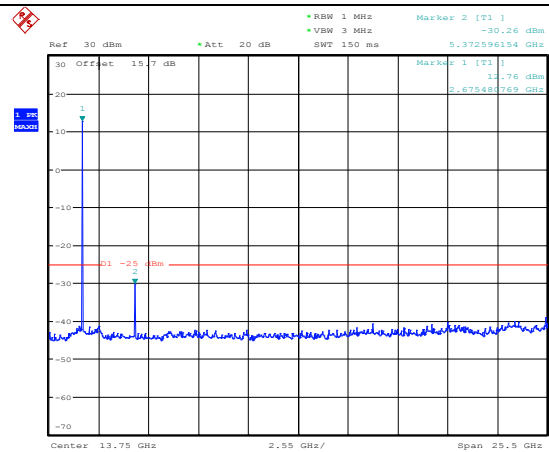


Date: 11.AUG.2015 18:01:57

30MHz~26.5GHz

30MHz~26.5GHz


LTE FDD Band 41-15MHz Channel Bandwidth
Low Channel

QPSK

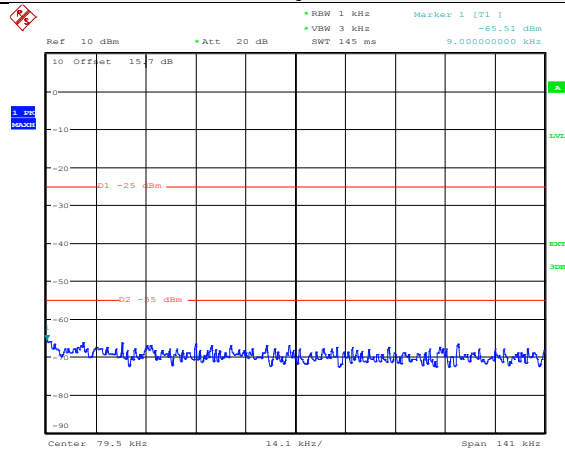


Date: 11.AUG.2015 17:28:00

16QAM

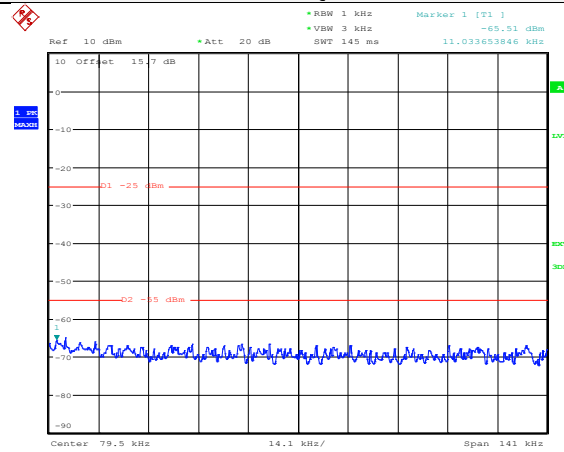


Date: 11.AUG.2015 17:50:20

9KHz~150KHz

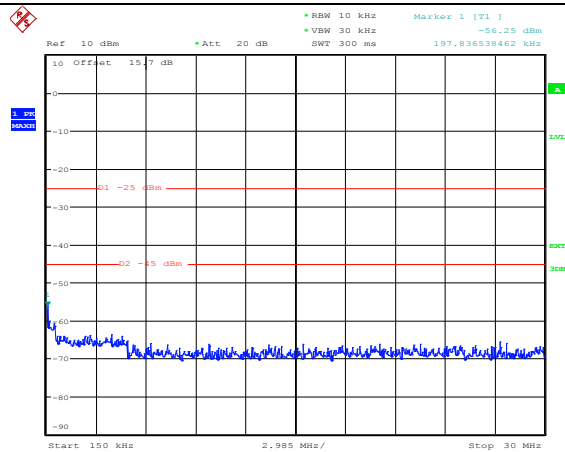


Date: 11.AUG.2015 17:28:33

9KHz~150KHz

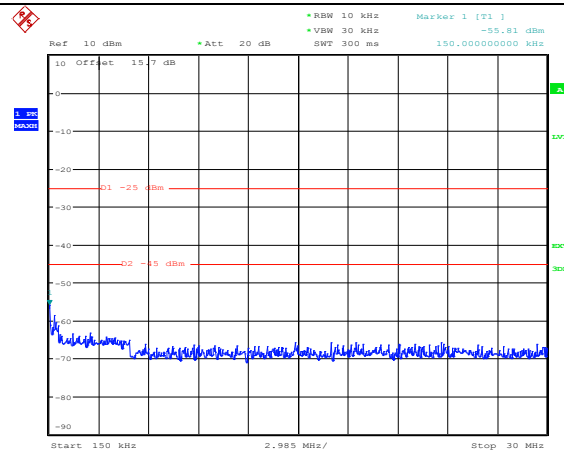


Date: 11.AUG.2015 17:50:57

150KHz~30MHz

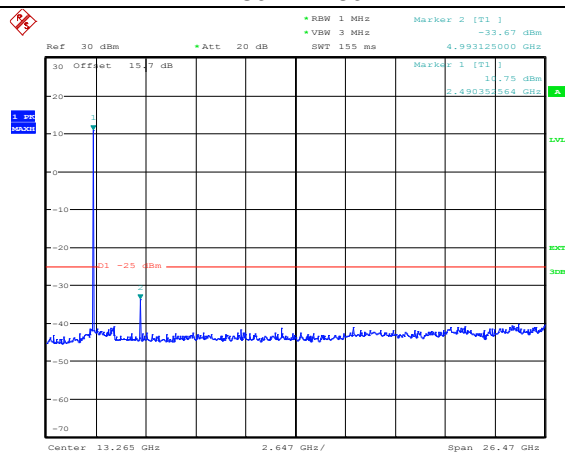

Date: 11.AUG.2015 17:29:10

150KHz~30MHz






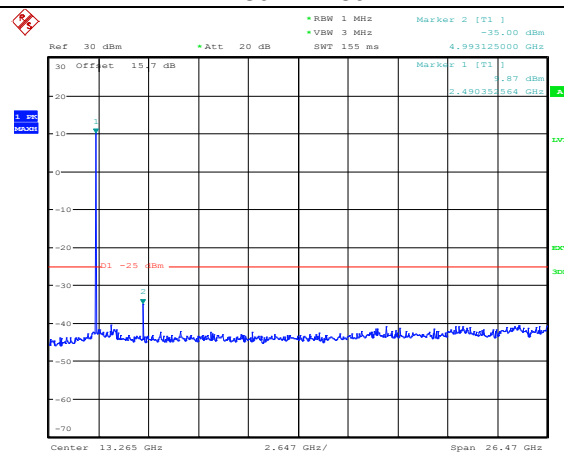


Date: 11.AUG.2015 17:51:26

30MHz~26.5GHz


30MHz~26.5GHz

LTE FDD Band 41-15MHz Channel Bandwidth
Middle Channel

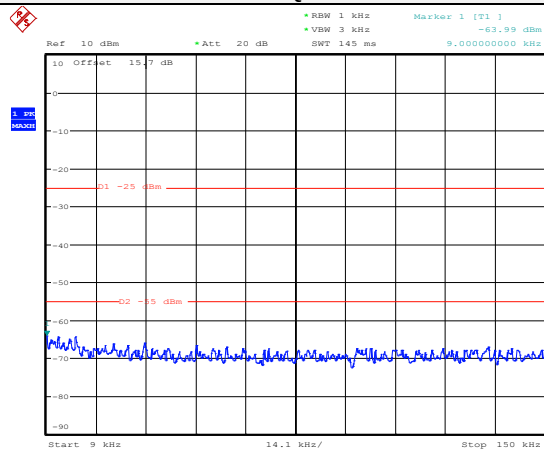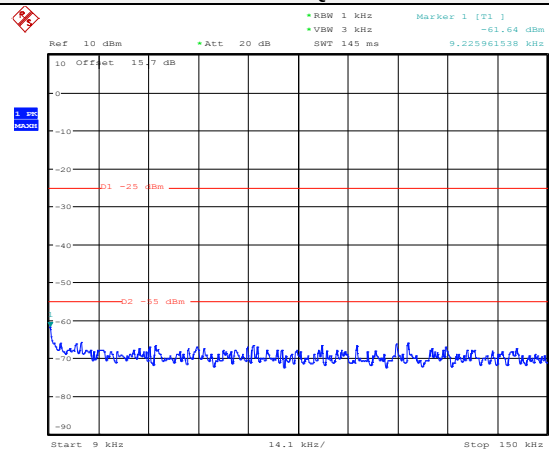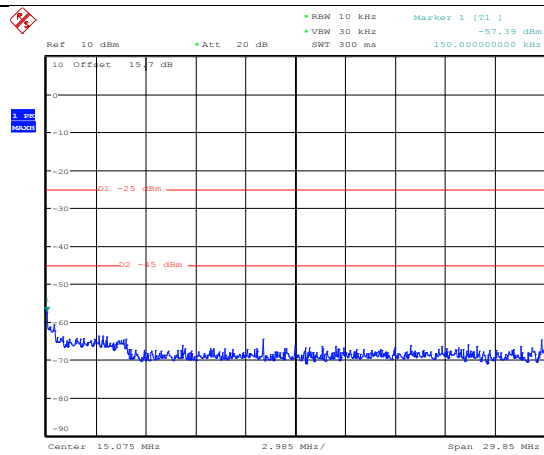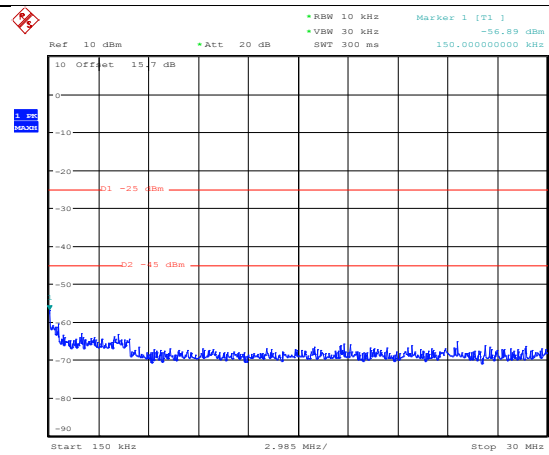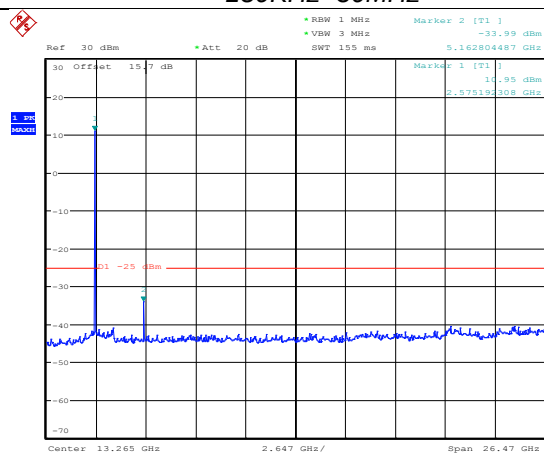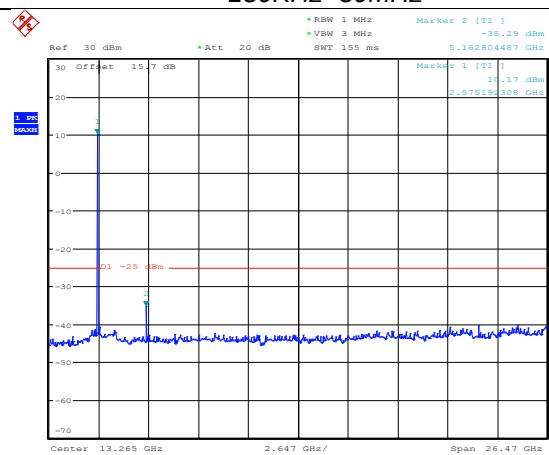QPSK**16QAM****9KHz~150KHz****9KHz~150KHz****150KHz~30MHz****150KHz~30MHz****30MHz~26.5GHz****30MHz~26.5GHz**


LTE FDD Band 41-15MHz Channel Bandwidth
High Channel

QPSK

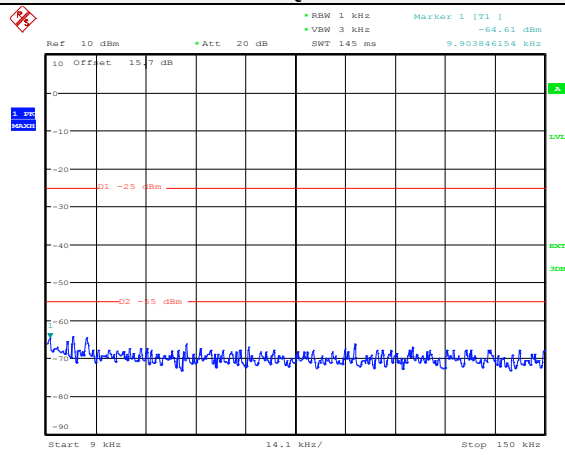


Date: 11.AUG.2015 17:33:08

16QAM

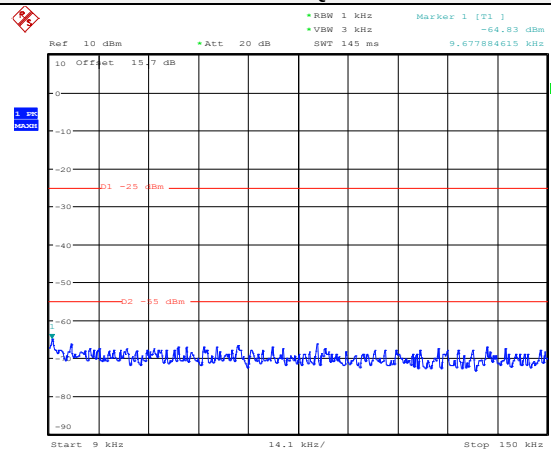


Date: 11.AUG.2015 17:54:07

9KHz~150KHz

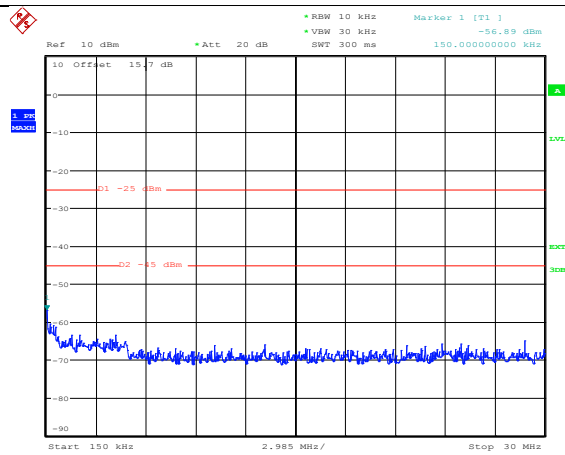


Date: 11.AUG.2015 17:33:44

9KHz~150KHz

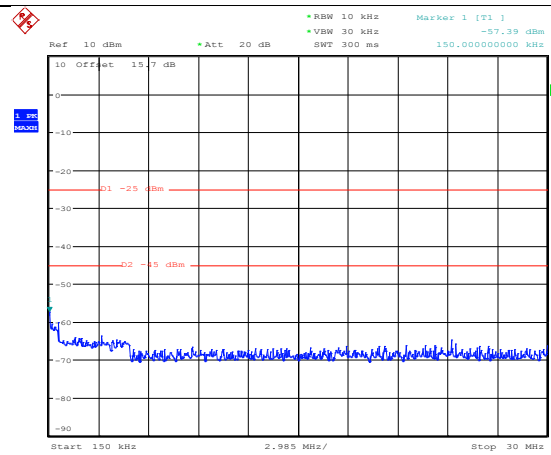


Date: 11.AUG.2015 17:54:32

150KHz~30MHz

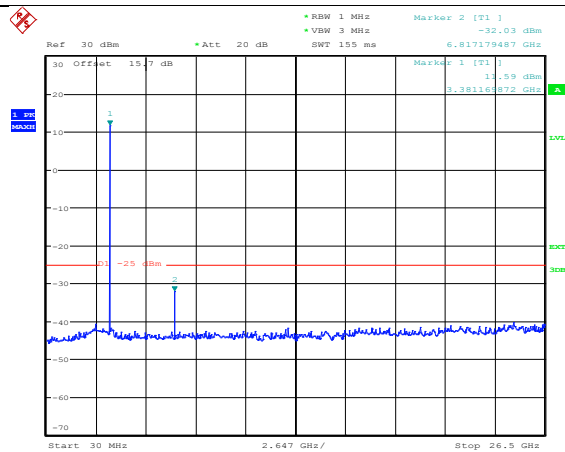

Date: 11.AUG.2015 17:34:17

150KHz~30MHz

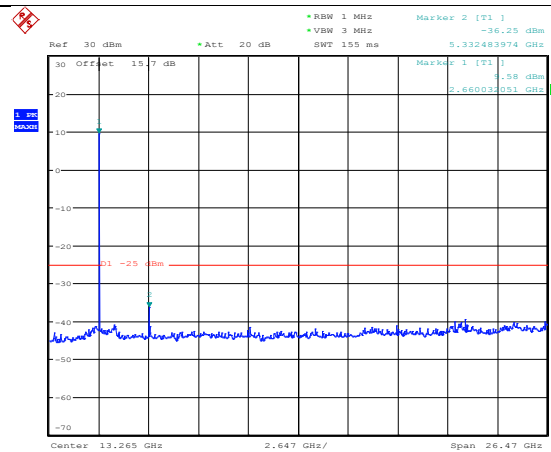


Date: 11.AUG.2015 17:55:15

30MHz~26.5GHz

30MHz~26.5GHz


LTE FDD Band 41-20MHz Channel Bandwidth
Low Channel

QPSK

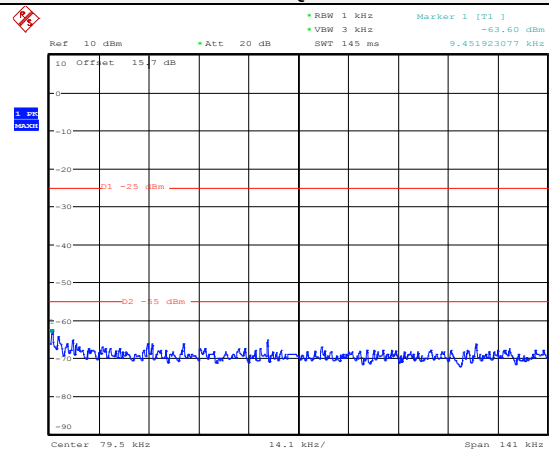


Date: 11.AUG.2015 17:35:43

16QAM

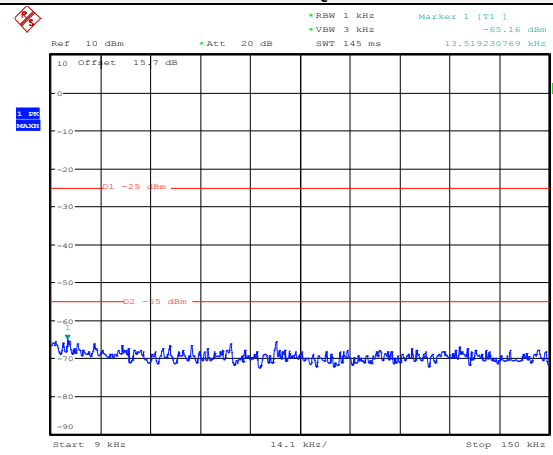


Date: 11.AUG.2015 17:42:31

9KHz~150KHz

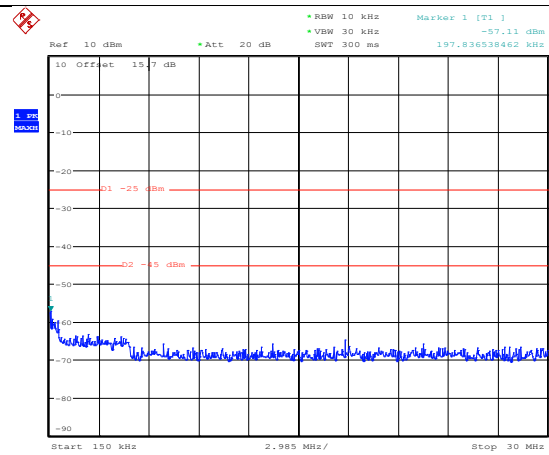


Date: 11.AUG.2015 17:36:11

9KHz~150KHz

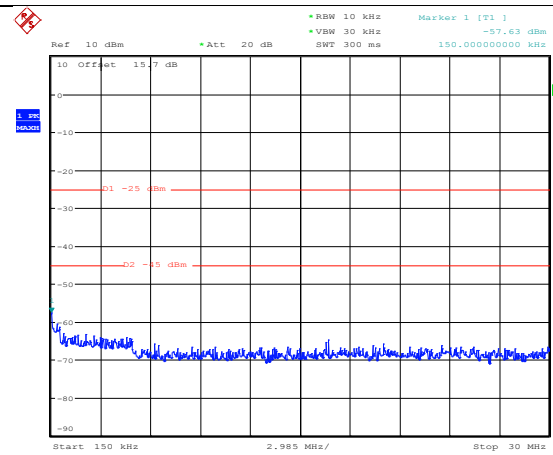


Date: 11.AUG.2015 17:42:56

150KHz~30MHz

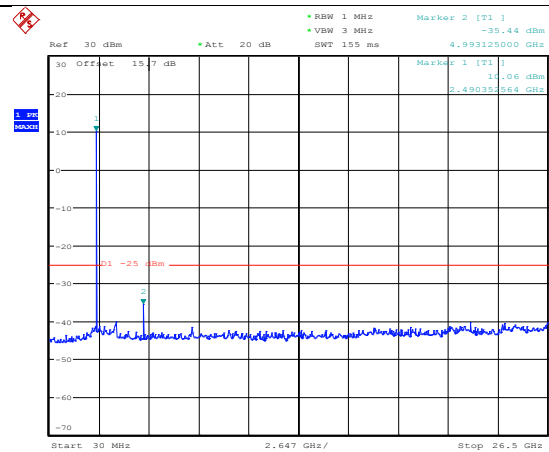

Date: 11.AUG.2015 17:36:46

150KHz~30MHz






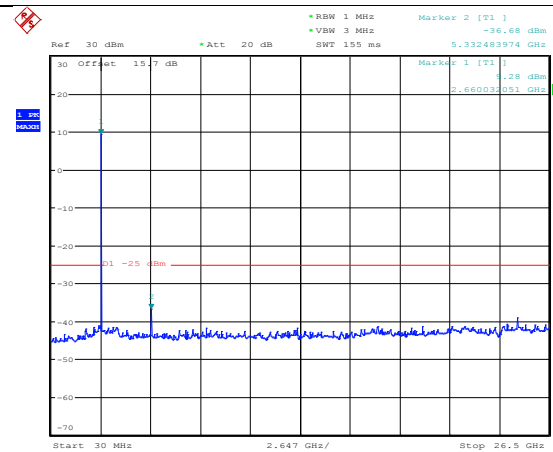


Date: 11.AUG.2015 17:43:25

30MHz~26.5GHz


30MHz~26.5GHz

LTE FDD Band 41-20MHz Channel Bandwidth
Middle Channel

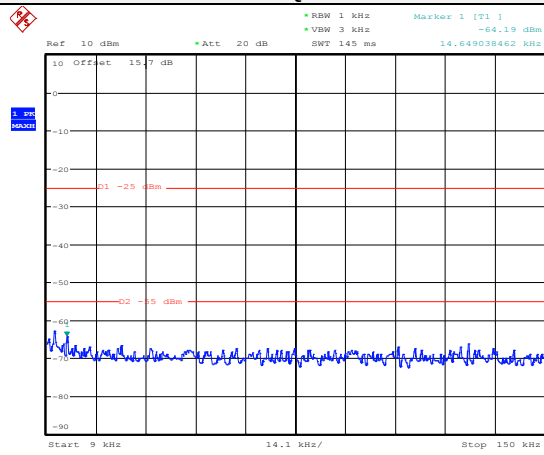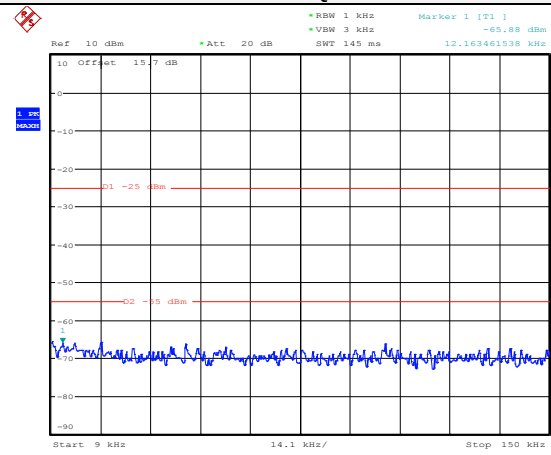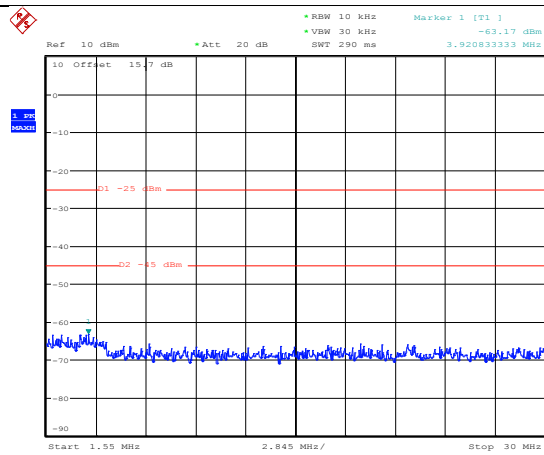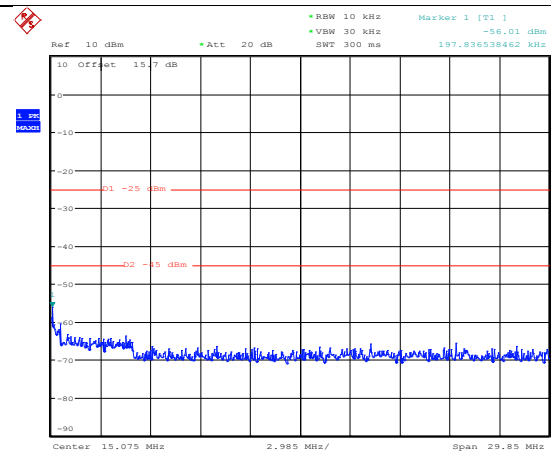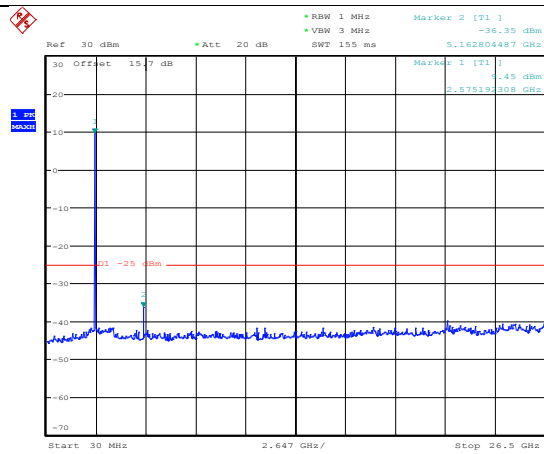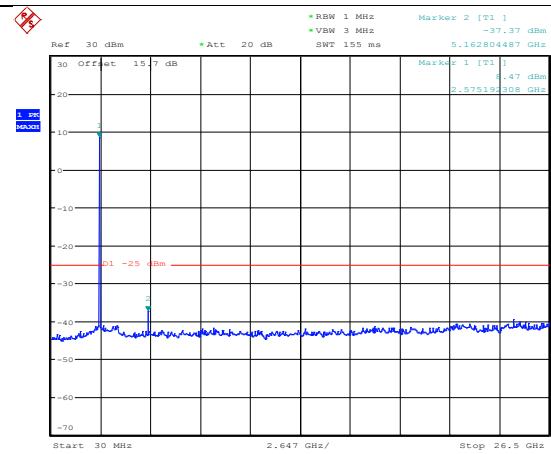QPSK**16QAM****9KHz~150KHz****9KHz~150KHz****150KHz~30MHz****150KHz~30MHz****30MHz~26.5GHz****30MHz~26.5GHz**


LTE FDD Band 41-20MHz Channel Bandwidth
High Channel

QPSK

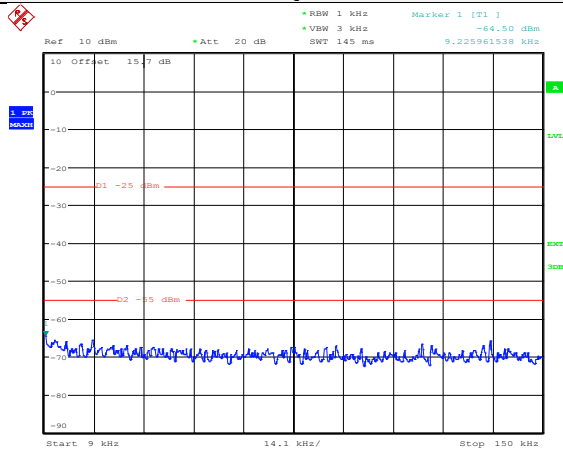


Date: 11.AUG.2015 17:39:07

16QAM

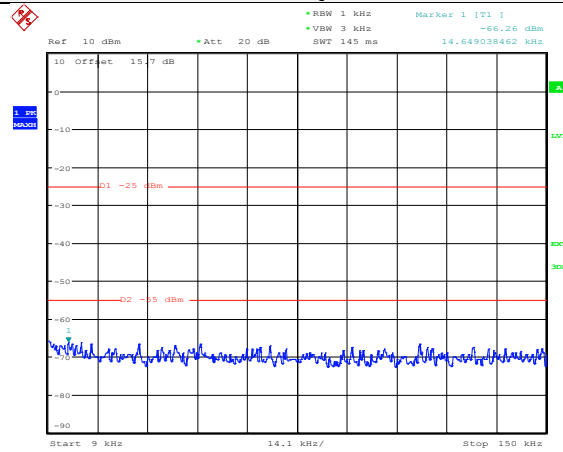


Date: 11.AUG.2015 17:47:04

9KHz~150KHz

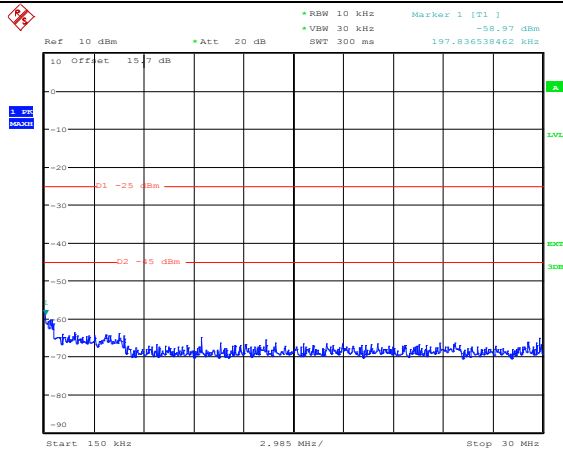


Date: 11.AUG.2015 17:39:39

9KHz~150KHz

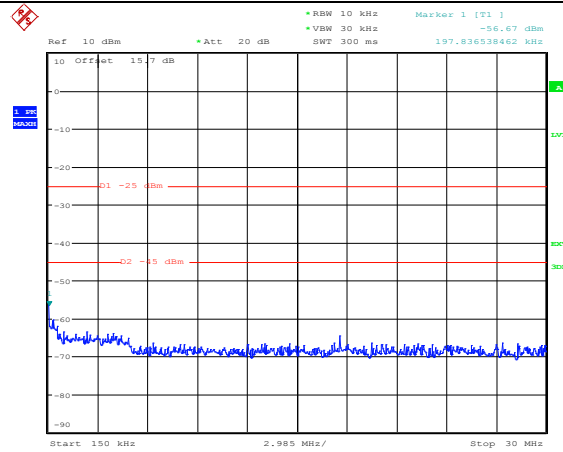


Date: 11.AUG.2015 17:47:30

150KHz~30MHz

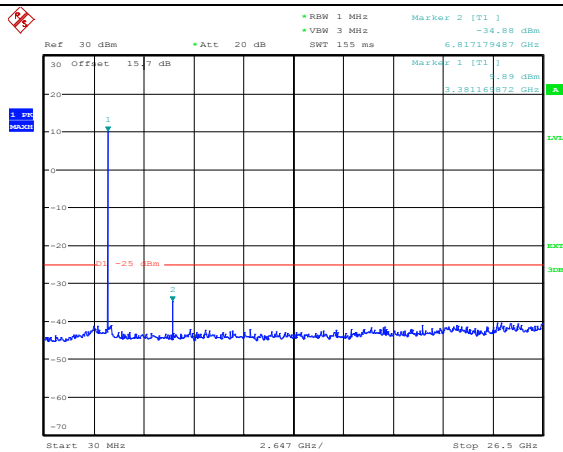

Date: 11.AUG.2015 17:40:26

150KHz~30MHz

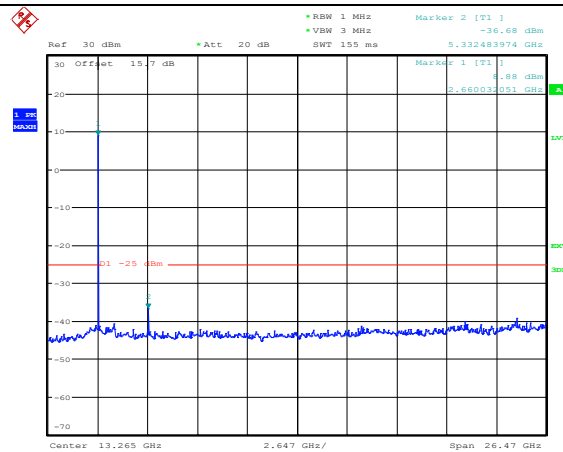

Date: 11.AUG.2015 17:48:07

30MHz~26.5GHz

30MHz~26.5GHz

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 41; recorded worst case for each Channel Bandwidth of LTE FDD Band 41.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

LTE FDD Band 41_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
4997.0	-34.84	6.86	3.00	12.88	-28.82	-25.00	3.82	H
7495.5	-40.28	7.01	3.00	11.73	-35.56	-25.00	10.56	H
4997.0	-42.78	6.86	3.00	12.88	-36.76	-25.00	11.76	V
7495.5	-45.89	7.01	3.00	11.73	-41.17	-25.00	16.17	V

LTE FDD Band 41_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-32.30	6.70	3.00	13.21	-25.79	-25.00	0.79	H
7779.0	-34.94	7.28	3.00	12.10	-30.12	-25.00	5.12	H
5186.0	-40.97	6.70	3.00	13.21	-34.46	-25.00	9.46	V
7779.0	-44.79	7.28	3.00	12.10	-39.97	-25.00	14.97	V

LTE FDD Band 41_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5375.0	-42.14	6.77	3.00	13.49	-35.42	-25.00	10.42	H
8062.5	-43.06	7.52	3.00	11.61	-38.97	-25.00	13.97	H
5375.0	-46.76	6.77	3.00	13.49	-40.04	-25.00	15.04	V
8062.5	-47.75	7.52	3.00	11.61	-43.66	-25.00	18.66	V

LTE FDD Band 41_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5002.0	-37.33	6.86	3.00	12.88	-31.31	-25.00	6.31	H
7503.0	-41.41	7.01	3.00	11.73	-36.69	-25.00	11.69	H
5002.0	-43.72	6.86	3.00	12.88	-37.70	-25.00	12.70	V
7503.0	-46.94	7.01	3.00	11.73	-42.22	-25.00	17.22	V

LTE FDD Band 41_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-33.68	6.70	3.00	13.21	-27.17	-25.00	2.17	H
7779.0	-37.15	7.28	3.00	12.10	-32.33	-25.00	7.33	H
5186.0	-42.46	6.70	3.00	13.21	-35.95	-25.00	10.95	V
7779.0	-44.90	7.28	3.00	12.10	-40.08	-25.00	15.08	V

LTE FDD Band 41_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.0	-41.77	6.77	3.00	13.49	-35.05	-25.00	10.05	H
8055.0	-41.86	7.52	3.00	11.61	-37.77	-25.00	12.77	H
5370.0	-47.93	6.77	3.00	13.49	-41.21	-25.00	16.21	V
8055.0	-47.75	7.52	3.00	11.61	-43.66	-25.00	18.66	V

LTE FDD Band 41_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.0	-36.46	6.86	3.00	12.88	-30.44	-25.00	5.44	H
7510.5	-43.49	7.01	3.00	11.73	-38.77	-25.00	13.77	H
5007.0	-44.65	6.86	3.00	12.88	-38.63	-25.00	13.63	V
7510.5	-48.04	7.01	3.00	11.73	-43.32	-25.00	18.32	V

LTE FDD Band 41_Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-35.40	6.70	3.00	13.21	-28.89	-25.00	3.89	H
7779.0	-40.47	7.28	3.00	12.10	-35.65	-25.00	10.65	H
5186.0	-42.68	6.70	3.00	13.21	-36.17	-25.00	11.17	V
7779.0	-46.06	7.28	3.00	12.10	-41.24	-25.00	16.24	V

LTE FDD Band 41_Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5365.0	-41.13	6.77	3.00	13.49	-34.41	-25.00	9.41	H
8047.5	-48.61	7.52	3.00	11.61	-44.52	-25.00	19.52	H
5365.0	-46.70	6.77	3.00	13.49	-39.98	-25.00	14.98	V
8047.5	-52.94	7.52	3.00	11.61	-48.85	-25.00	23.85	V

LTE FDD Band 41_Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5012.0	-34.30	6.86	3.00	12.88	-28.28	-25.00	3.28	H
7518.0	-38.06	7.01	3.00	11.73	-33.34	-25.00	8.34	H
5012.0	-42.63	6.86	3.00	12.88	-36.61	-25.00	11.61	V
7518.0	-48.92	7.01	3.00	11.73	-44.20	-25.00	19.20	V

LTE FDD Band 41_Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-33.57	6.70	3.00	13.21	-27.06	-25.00	2.06	H
7779.0	-35.93	7.28	3.00	12.10	-31.11	-25.00	6.11	H
5186.0	-41.21	6.70	3.00	13.21	-34.70	-25.00	9.70	V
7779.0	-45.15	7.28	3.00	12.10	-40.33	-25.00	15.33	V

LTE FDD Band 41_Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5360.0	-40.79	6.77	3.00	13.49	-34.07	-25.00	9.07	H
8040.0	-51.83	7.52	3.00	11.61	-47.74	-25.00	22.74	H
5360.0	-47.04	6.77	3.00	13.49	-40.32	-25.00	15.32	V
8040.0	-52.25	7.52	3.00	11.61	-48.16	-25.00	23.16	V

LTE FDD Band 41_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
4997.0	-35.43	6.86	3.00	12.88	-29.41	-25.00	4.41	H
7495.5	-40.27	7.01	3.00	11.73	-35.55	-25.00	10.55	H
4997.0	-43.29	6.86	3.00	12.88	-37.27	-25.00	12.27	V
7495.5	-46.74	7.01	3.00	11.73	-42.02	-25.00	17.02	V

LTE FDD Band 41_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-33.12	6.70	3.00	13.21	-26.61	-25.00	1.61	H
7779.0	-38.09	7.28	3.00	12.10	-33.27	-25.00	8.27	H
5186.0	-42.01	6.70	3.00	13.21	-35.50	-25.00	10.50	V
7779.0	-44.59	7.28	3.00	12.10	-39.77	-25.00	14.77	V

LTE FDD Band 41_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5375.0	-42.71	6.77	3.00	13.49	-35.99	-25.00	10.99	H
8062.5	-44.10	7.52	3.00	11.61	-40.01	-25.00	15.01	H
5375.0	-47.28	6.77	3.00	13.49	-40.56	-25.00	15.56	V
8062.5	-47.81	7.52	3.00	11.61	-43.72	-25.00	18.72	V

LTE FDD Band 41_Channel Bandwidth 10MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5002.0	-38.54	6.86	3.00	12.88	-32.52	-25.00	7.52	H
7503.0	-42.44	7.01	3.00	11.73	-37.72	-25.00	12.72	H
5002.0	-44.91	6.86	3.00	12.88	-38.89	-25.00	13.89	V
7503.0	-46.98	7.01	3.00	11.73	-42.26	-25.00	17.26	V

LTE FDD Band 41_Channel Bandwidth 10MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-34.17	6.70	3.00	13.21	-27.66	-25.00	2.66	H
7779.0	-36.82	7.28	3.00	12.10	-32.00	-25.00	7.00	H
5186.0	-42.00	6.70	3.00	13.21	-35.49	-25.00	10.49	V
7779.0	-45.98	7.28	3.00	12.10	-41.16	-25.00	16.16	V

LTE FDD Band 41_Channel Bandwidth 10MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.0	-41.39	6.77	3.00	13.49	-34.67	-25.00	9.67	H
8055.0	-41.99	7.52	3.00	11.61	-37.90	-25.00	12.90	H
5370.0	-47.57	6.77	3.00	13.49	-40.85	-25.00	15.85	V
8055.0	-47.43	7.52	3.00	11.61	-43.34	-25.00	18.34	V

LTE FDD Band 41_Channel Bandwidth 15MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.0	-36.93	6.86	3.00	12.88	-30.91	-25.00	5.91	H
7510.5	-42.85	7.01	3.00	11.73	-38.13	-25.00	13.13	H
5007.0	-45.48	6.86	3.00	12.88	-39.46	-25.00	14.46	V
7510.5	-48.60	7.01	3.00	11.73	-43.88	-25.00	18.88	V

LTE FDD Band 41_Channel Bandwidth 15MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-34.76	6.70	3.00	13.21	-28.25	-25.00	3.25	H
7779.0	-41.74	7.28	3.00	12.10	-36.92	-25.00	11.92	H
5186.0	-44.63	6.70	3.00	13.21	-38.12	-25.00	13.12	V
7779.0	-45.48	7.28	3.00	12.10	-40.66	-25.00	15.66	V

LTE FDD Band 41_Channel Bandwidth 15MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5365.0	-40.39	6.77	3.00	13.49	-33.67	-25.00	8.67	H
8047.5	-48.21	7.52	3.00	11.61	-44.12	-25.00	19.12	H
5365.0	-48.07	6.77	3.00	13.49	-41.35	-25.00	16.35	V
8047.5	-52.27	7.52	3.00	11.61	-48.18	-25.00	23.18	V

LTE FDD Band 41_Channel Bandwidth 20MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5012.0	-35.81	6.86	3.00	12.88	-29.79	-25.00	4.79	H
7518.0	-40.23	7.01	3.00	11.73	-35.51	-25.00	10.51	H
5012.0	-43.49	6.86	3.00	12.88	-37.47	-25.00	12.47	V
7518.0	-49.40	7.01	3.00	11.73	-44.68	-25.00	19.68	V

LTE FDD Band 41_Channel Bandwidth 20MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5186.0	-33.04	6.70	3.00	13.21	-26.53	-25.00	1.53	H
7779.0	-36.71	7.28	3.00	12.10	-31.89	-25.00	6.89	H
5186.0	-41.67	6.70	3.00	13.21	-35.16	-25.00	10.16	V
7779.0	-45.95	7.28	3.00	12.10	-41.13	-25.00	16.13	V

LTE FDD Band 41_Channel Bandwidth 20MHz_16QAM_High Channel


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5360.0	-41.53	6.77	3.00	13.49	-34.81	-25.00	9.81	H
8040.0	-51.07	7.52	3.00	11.61	-46.98	-25.00	21.98	H
5360.0	-48.07	6.77	3.00	13.49	-41.35	-25.00	16.35	V
8040.0	-51.62	7.52	3.00	11.61	-47.53	-25.00	22.53	V

3.8 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §27.50(a), §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

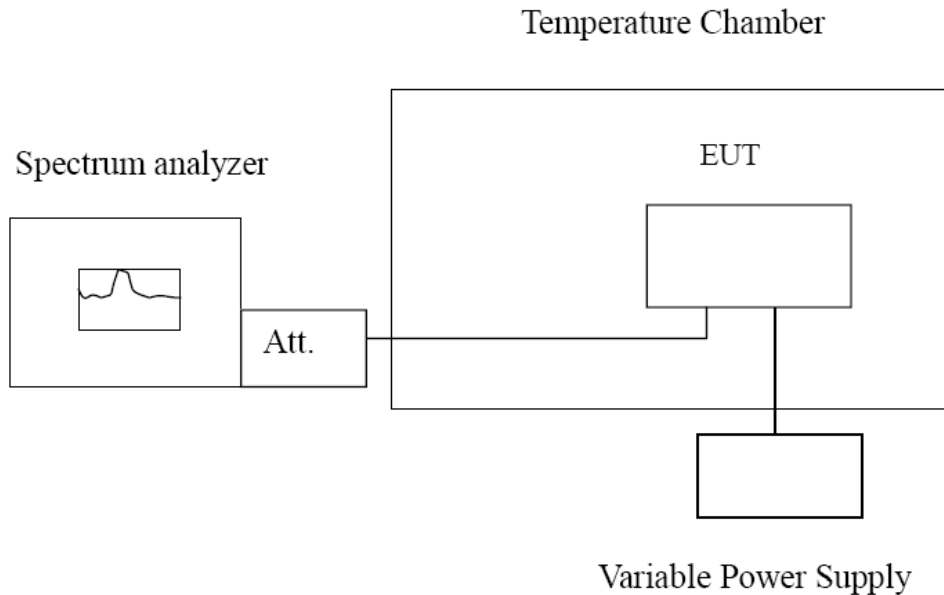

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 4, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.

TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 41; recorded worst case.

LTE Band 41, 5MHz bandwidth (worst case of all bandwidths)


Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
3.50	-8.00	-9.20	0.003	0.004	2.50
3.70	0.10	-4.00	0.000	0.002	2.50
4.20	3.30	-1.70	0.001	0.001	2.50

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	-3.70	1.90	0.001	0.001	2.50
-20°	-9.40	-5.90	0.004	0.002	2.50
-10°	0.60	3.10	0.000	0.001	2.50
0°	-10.60	-3.00	0.004	0.001	2.50
10°	0.90	-10.90	0.000	0.004	2.50
20°	-9.90	1.50	0.004	0.001	2.50
30°	-2.90	-9.40	0.001	0.004	2.50
40°	2.10	-0.40	0.001	0.000	2.50
50°	-5.80	-12.70	0.002	0.005	2.50

4 Test Setup Photos of the EUT

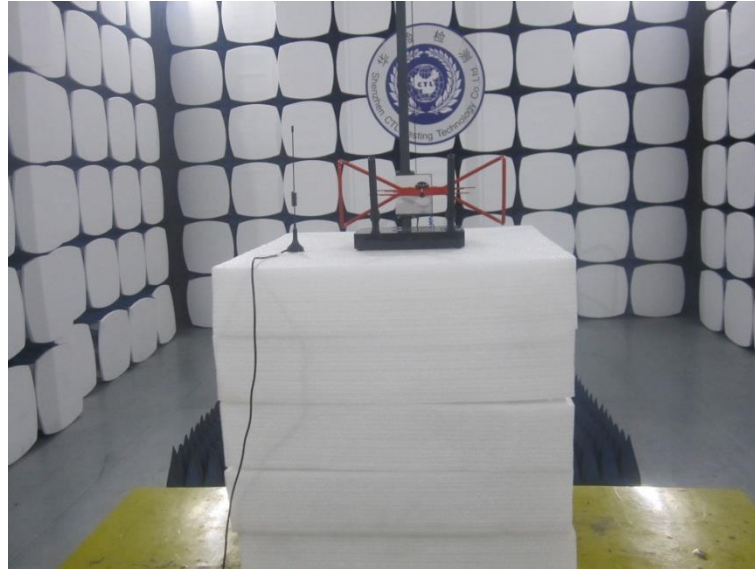

5 External and Internal Photos of the EUT

Please reference to the test report No.: CTL1507031826-WF-1

******* End of Report *******