


FCC Test Report

FCC ID : NKR-DHURAZ53
Equipment : 11a/b/g/n/ac 1x1 module
Model No. : DHUR-AZ53
Brand Name : Amazon
Applicant : Wistron NeWeb Corporation
Address : 20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308,Taiwan,R.O.C.
Standard : 47 CFR FCC Part 15.247
Received Date : Dec. 16, 2021
Tested Date : Jan. 24 ~ Feb. 17, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	Test Equipment List and Calibration Data.....	9
1.5	Test Standards	10
1.6	Reference Guidance	10
1.7	Deviation from Test Standard and Measurement Procedure.....	10
1.8	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Facility.....	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth	15
3.3	RF Output Power	23
3.4	Power Spectral Density	26
3.5	Emissions in Restricted Frequency Bands.....	34
3.6	Emissions in non-restricted Frequency Bands.....	64
4	TEST LABORATORY INFORMATION	71

Release Record

Report No.	Version	Description	Issued Date
FR1D1601AE	Rev. 01	Initial issue	Mar. 21, 2022

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.546MHz 31.50 (Margin -14.50dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 347.95MHz 42.67 (Margin -333dB) - PK	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 11.02	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.0 LE	2402-2480	0-39 [40]	125 kbps
				500 kbps
				1 Mbps
				2 Mbps
Note: Bluetooth LE (Low energy) uses GFSK modulation.				

1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Gain (dBi)	Connector	Remark
1	WNC	BT_ANT	PIFA	2.79	NA	onboard
2	WNC	81.EK615.GAM	PIFA	4.04	IPEX	---
3	WNC	81.EK615.GAV	PIFA	4.87	IPEX	---
4	WNC	81.EK615.G90	PIFA	0.75	IPEX	---

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host
-------------------	----------------

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	WCn Combo Tool, Version: V2.1749.00	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
GFSK-125kbps	84.78%	0.72
GFSK-500kbps	59.26%	2.27
GFSK-1Mbps	64.19%	1.93
GFSK-2Mbps	33.65%	4.73


1.1.7 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
GFSK/125kbps	137=77,138=06	137=77,138=06	137=77,138=06
GFSK/500kbps	137=77,138=06	137=77,138=06	137=77,138=06
GFSK/1Mbps	137=77,138=06	137=77,138=06	137=77,138=06
GFSK/2Mbps	137=77,138=06	137=77,138=06	137=77,138=06

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	---	---
2	USB Cable	ICC	extension	---	
3	Extension Board	---	---	---	Provided by applicant.

1.3 Test Setup Chart

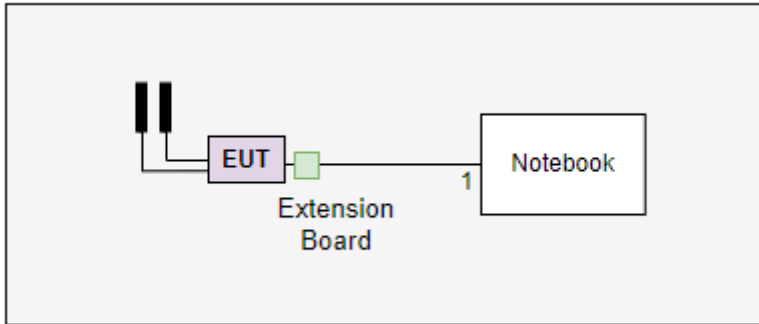Test Setup Diagram (Bluetooth: External antenna + Wi-Fi External antenna)	
 The diagram shows a test setup within a light gray rectangular area. On the left, there are two vertical black rectangles representing external antennas. A line connects them to a purple box labeled 'EUT'. From the 'EUT' box, a line goes to a small green square labeled 'Extension Board'. From the 'Extension Board', a line goes to a white box labeled 'Notebook'. The number '1' is placed near the connection between the 'Extension Board' and the 'Notebook'.	
No.	Signal cable / Length (m)
1	USB, 1m shielded.

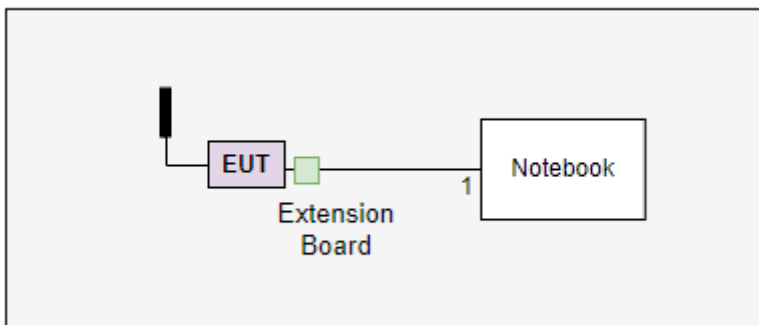Test Setup Diagram (Bluetooth: Onboard antenna + Wi-Fi External antenna)	
 The diagram shows a test setup within a light gray rectangular area. On the left, there is a single vertical black rectangle representing an onboard antenna. A line connects it to a purple box labeled 'EUT'. From the 'EUT' box, a line goes to a small green square labeled 'Extension Board'. From the 'Extension Board', a line goes to a white box labeled 'Notebook'. The number '1' is placed near the connection between the 'Extension Board' and the 'Notebook'.	
No.	Signal cable / Length (m)
1	USB, 1m shielded.

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Feb. 15, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
LISN	R&S	ENV216	101579	Mar. 17, 2021	Mar. 16, 2022
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127477	Feb. 25, 2021	Feb. 24, 2022
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Jan. 24 ~ Jan. 28, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 12, 2021	Mar. 11, 2022
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jun. 30, 2021	Jun. 29, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 03, 2021	Dec. 02, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2021	Nov. 03, 2022
Preamplifier	EMC	EMC02325	980225	Jun. 29, 2021	Jun. 28, 2022
Preamplifier	Agilent	83017A	MY39501308	Sep. 28, 2021	Sep. 27, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 05, 2021	Oct. 04, 2022
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 05, 2021	Oct. 04, 2022
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 05, 2021	Oct. 04, 2022
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 05, 2021	Oct. 04, 2022
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 05, 2021	Oct. 04, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Feb. 17, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Nov. 29, 2021	Nov. 28, 2022
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_FS	V5.10.7.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2480	1Mbps	1
Radiated Emissions $\leq$ 1GHz	BT LE	2480	1Mbps	1, 2
Radiated Emissions $>$ 1GHz	BT LE BT LE	2402, 2440, 2480 2402, 2440, 2480	1Mbps 2Mbps	1, 2
Maximum Output Power	BT LE	2402, 2440, 2480	125kbps	1
6dB bandwidth	BT LE	2402, 2440, 2480	500kbps	
Power spectral density	BT LE	2402, 2440, 2480	1Mbps	
	BT LE	2402, 2440, 2480	2Mbps	

NOTE:

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.
- The EUT had been tested by following test configurations.
 Test Configuration 1: BT external antenna (model: 81.EK615.GAV) + WiFi external antenna (model: 81.EK615.GAA)
 Test Configuration 2: BT onboard (model: BT_ANT) + WiFi external antenna (model: 81.EK615.GAA)

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions


Modulation Mode	BT LE-1Mbps	Test Freq. (MHz)	2480																																																																																																																																																						
Power Phase	Line																																																																																																																																																								
Test by : Joe Liao Temperature: 16°C Humidity: 60%																																																																																																																																																									
Level (dBUV) Frequency (MHz)																																																																																																																																																									
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuA</th><th>Line</th><th>Limit</th><th>Level</th><th></th><th>loss</th><th></th><th></th></tr><tr><th></th><th></th><th></th><th>dBuA</th><th>dB</th><th>dBuA</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>0.152</td><td>26.86</td><td>55.87</td><td>-29.01</td><td>17.12</td><td>9.66</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.152</td><td>43.73</td><td>65.87</td><td>-22.14</td><td>33.99</td><td>9.66</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.195</td><td>26.61</td><td>53.80</td><td>-27.19</td><td>16.88</td><td>9.65</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.195</td><td>39.30</td><td>63.80</td><td>-24.50</td><td>29.57</td><td>9.65</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>0.285</td><td>22.97</td><td>50.68</td><td>-27.71</td><td>13.25</td><td>9.64</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.285</td><td>29.56</td><td>60.68</td><td>-31.12</td><td>19.84</td><td>9.64</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>7*</td><td>0.546</td><td>31.50</td><td>46.00</td><td>-14.50</td><td>21.75</td><td>9.64</td><td>0.11</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>0.546</td><td>39.40</td><td>56.00</td><td>-16.60</td><td>29.65</td><td>9.64</td><td>0.11</td><td>0.00</td><td>QP</td></tr><tr><td>9</td><td>1.535</td><td>23.14</td><td>46.00</td><td>-22.86</td><td>13.30</td><td>9.66</td><td>0.18</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>1.535</td><td>30.18</td><td>56.00</td><td>-25.82</td><td>20.34</td><td>9.66</td><td>0.18</td><td>0.00</td><td>QP</td></tr><tr><td>11</td><td>15.552</td><td>22.03</td><td>50.00</td><td>-27.97</td><td>11.77</td><td>9.69</td><td>0.57</td><td>0.00</td><td>Average</td></tr><tr><td>12</td><td>15.552</td><td>26.95</td><td>60.00</td><td>-33.05</td><td>16.69</td><td>9.69</td><td>0.57</td><td>0.00</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark		MHz	dBuA	Line	Limit	Level		loss						dBuA	dB	dBuA	dB	dB	dB		1	0.152	26.86	55.87	-29.01	17.12	9.66	0.08	0.00	Average	2	0.152	43.73	65.87	-22.14	33.99	9.66	0.08	0.00	QP	3	0.195	26.61	53.80	-27.19	16.88	9.65	0.08	0.00	Average	4	0.195	39.30	63.80	-24.50	29.57	9.65	0.08	0.00	QP	5	0.285	22.97	50.68	-27.71	13.25	9.64	0.08	0.00	Average	6	0.285	29.56	60.68	-31.12	19.84	9.64	0.08	0.00	QP	7*	0.546	31.50	46.00	-14.50	21.75	9.64	0.11	0.00	Average	8	0.546	39.40	56.00	-16.60	29.65	9.64	0.11	0.00	QP	9	1.535	23.14	46.00	-22.86	13.30	9.66	0.18	0.00	Average	10	1.535	30.18	56.00	-25.82	20.34	9.66	0.18	0.00	QP	11	15.552	22.03	50.00	-27.97	11.77	9.69	0.57	0.00	Average	12	15.552	26.95	60.00	-33.05	16.69	9.69	0.57	0.00	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																																
	MHz	dBuA	Line	Limit	Level		loss																																																																																																																																																		
			dBuA	dB	dBuA	dB	dB	dB																																																																																																																																																	
1	0.152	26.86	55.87	-29.01	17.12	9.66	0.08	0.00	Average																																																																																																																																																
2	0.152	43.73	65.87	-22.14	33.99	9.66	0.08	0.00	QP																																																																																																																																																
3	0.195	26.61	53.80	-27.19	16.88	9.65	0.08	0.00	Average																																																																																																																																																
4	0.195	39.30	63.80	-24.50	29.57	9.65	0.08	0.00	QP																																																																																																																																																
5	0.285	22.97	50.68	-27.71	13.25	9.64	0.08	0.00	Average																																																																																																																																																
6	0.285	29.56	60.68	-31.12	19.84	9.64	0.08	0.00	QP																																																																																																																																																
7*	0.546	31.50	46.00	-14.50	21.75	9.64	0.11	0.00	Average																																																																																																																																																
8	0.546	39.40	56.00	-16.60	29.65	9.64	0.11	0.00	QP																																																																																																																																																
9	1.535	23.14	46.00	-22.86	13.30	9.66	0.18	0.00	Average																																																																																																																																																
10	1.535	30.18	56.00	-25.82	20.34	9.66	0.18	0.00	QP																																																																																																																																																
11	15.552	22.03	50.00	-27.97	11.77	9.69	0.57	0.00	Average																																																																																																																																																
12	15.552	26.95	60.00	-33.05	16.69	9.69	0.57	0.00	QP																																																																																																																																																
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																																									

Modulation Mode	BT LE-1Mbps	Test Freq. (MHz)	2480
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 16°C

Humidity: 60%

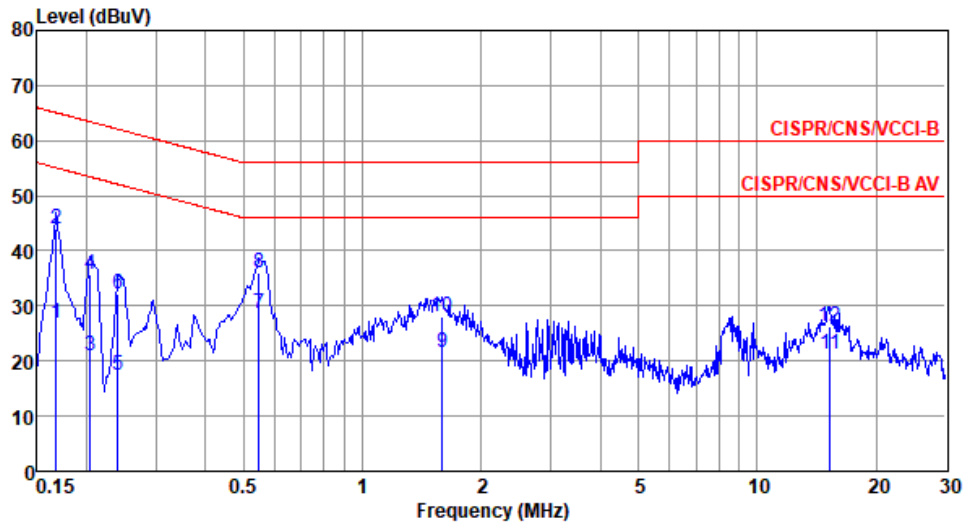

	Freq MHz	Level dBUA	Limit Line dBUA	Over Limit dB	Read Level dBUA	Factor dB	Cable loss dB	Aux dB	Remark
1	0.168	26.96	55.08	-28.12	17.19	9.69	0.08	0.00	Average
2	0.168	44.07	65.08	-21.01	34.30	9.69	0.08	0.00	QP
3	0.204	21.09	53.45	-32.36	11.33	9.68	0.08	0.00	Average
4	0.204	35.59	63.45	-27.86	25.83	9.68	0.08	0.00	QP
5	0.240	17.50	52.08	-34.58	7.74	9.68	0.08	0.00	Average
6	0.240	32.26	62.08	-29.82	22.50	9.68	0.08	0.00	QP
7*	0.546	28.63	46.00	-17.37	18.85	9.67	0.11	0.00	Average
8	0.546	36.01	56.00	-19.99	26.23	9.67	0.11	0.00	QP
9	1.593	21.54	46.00	-24.46	11.66	9.69	0.19	0.00	Average
10	1.593	27.98	56.00	-28.02	18.10	9.69	0.19	0.00	QP
11	15.310	21.38	50.00	-28.62	11.00	9.81	0.57	0.00	Average
12	15.310	26.35	60.00	-33.65	15.97	9.81	0.57	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup



3.2.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	21°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(125kbps)	692.029k	1.06M	1M06F1D	692.029k	1.056M
BT-LE(500kbps)	659.42k	1.027M	1M03F1D	659.42k	1.024M
BT-LE(1Mbps)	692.029k	1.035M	1M04F1D	681.159k	1.031M
BT-LE(2Mbps)	1.159M	2.069M	2M07F1D	1.152M	2.062M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	500k	692.029k	1.056M
2440MHz	Pass	500k	692.029k	1.06M
2480MHz	Pass	500k	692.029k	1.056M
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	500k	659.42k	1.027M
2440MHz	Pass	500k	659.42k	1.027M
2480MHz	Pass	500k	659.42k	1.024M
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	681.159k	1.031M
2440MHz	Pass	500k	681.159k	1.031M
2480MHz	Pass	500k	692.029k	1.035M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.152M	2.062M
2440MHz	Pass	500k	1.152M	2.062M
2480MHz	Pass	500k	1.159M	2.069M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth


BT-LE(125kbps)

2402MHz

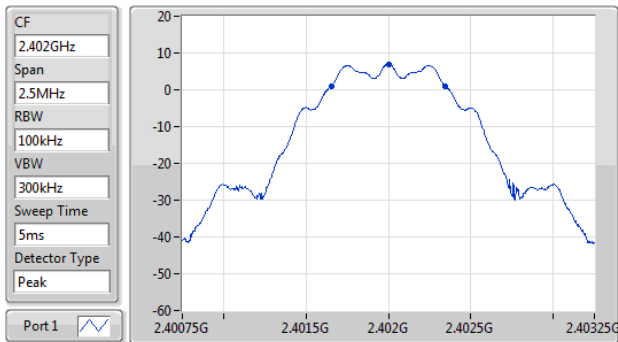


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
692.029k	2.401652G	2.402344G	1.056M	2.401468G	2.402525G	500k	1

EBW-DTS

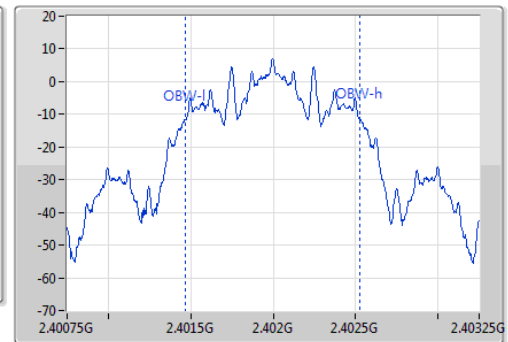


BT-LE(125kbps)

2440MHz

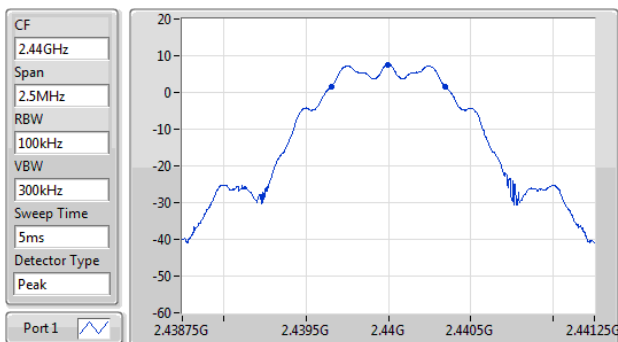


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
692.029k	2.439652G	2.440344G	1.06M	2.439468G	2.440528G	500k	1

EBW-DTS

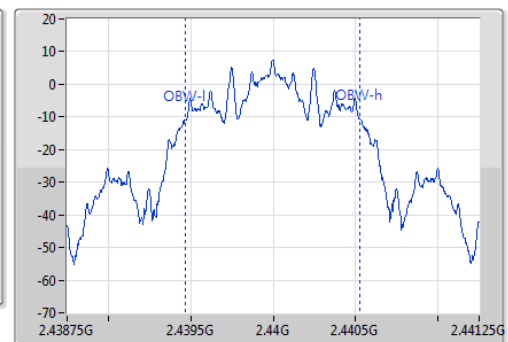


BT-LE(125kbps)

2480MHz

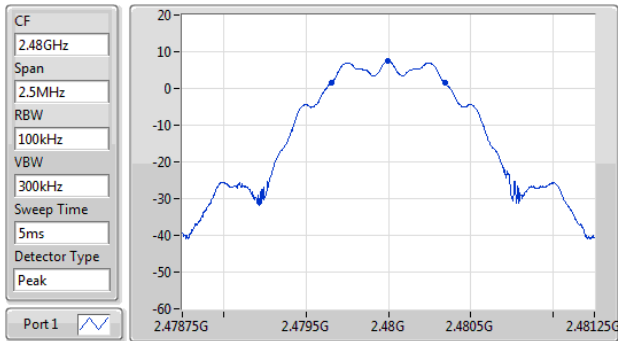


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
692.029k	2.479652G	2.480344G	1.056M	2.479468G	2.480525G	500k	1

EBW-DTS

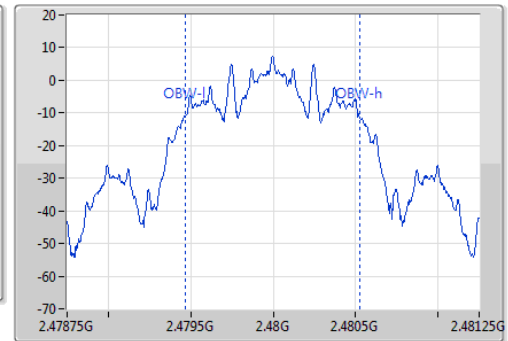


BT-LE(500kbps)

2402MHz

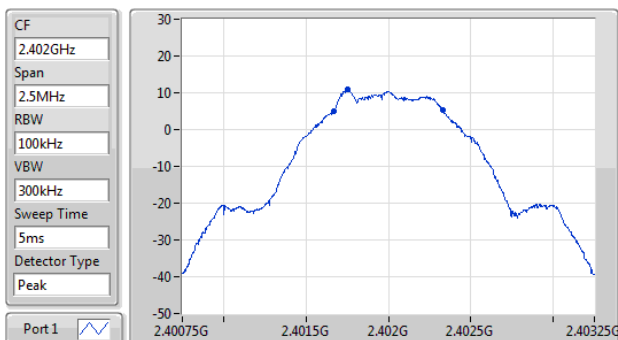


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
659.42k	2.40167G	2.40233G	1.027M	2.401486G	2.402514G	500k	1

EBW-DTS

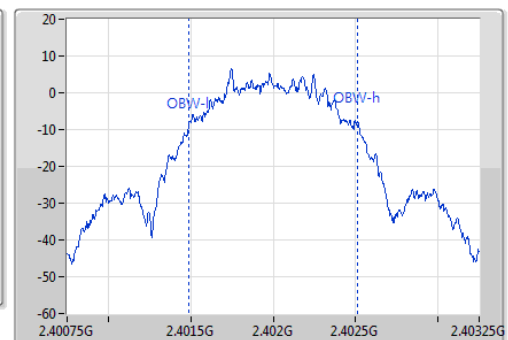


BT-LE(500kbps)

2440MHz

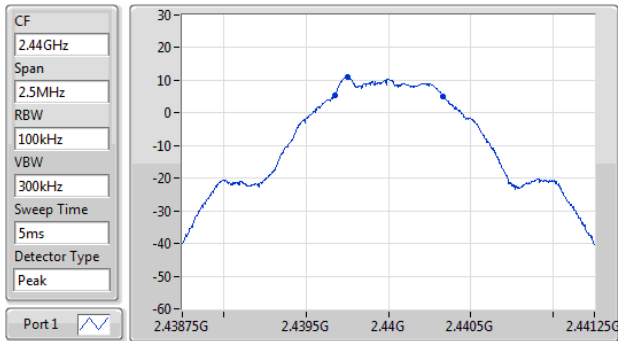


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
659.42k	2.439674G	2.440333G	1.027M	2.43949G	2.440517G	500k	1

EBW-DTS

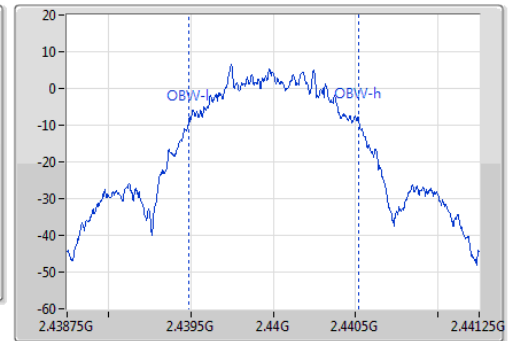


BT-LE(500kbps)

2480MHz

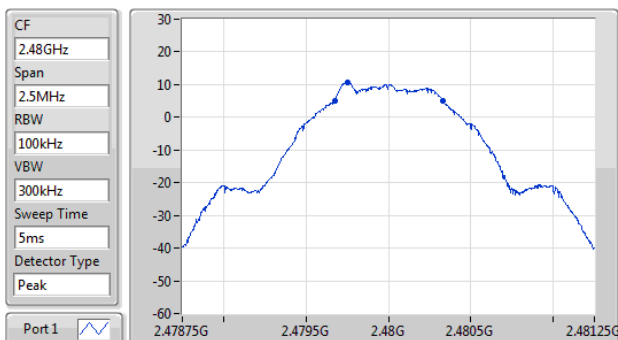


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
659.42k	2.479674G	2.480333G	1.024M	2.47949G	2.480514G	500k	1

EBW-DTS

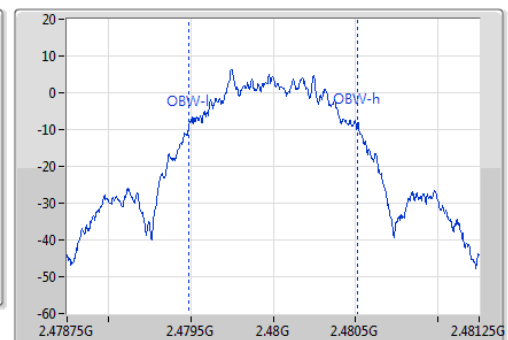


BT-LE(1Mbps)

2402MHz

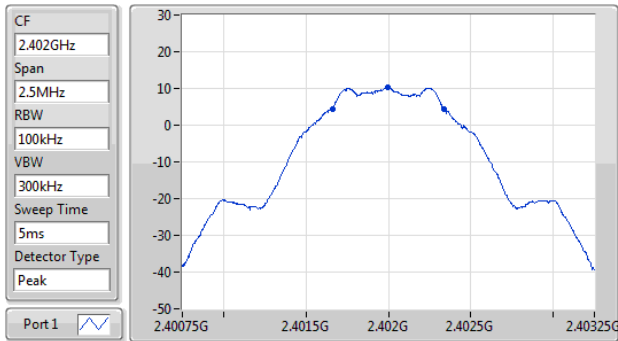


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
681.159k	2.401659G	2.402341G	1.031M	2.401493G	2.402525G	500k	1

EBW-DTS

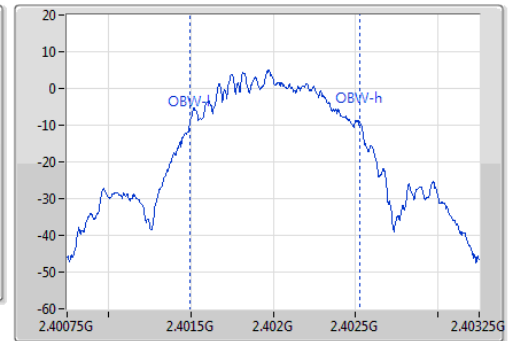


BT-LE(1Mbps)

2440MHz

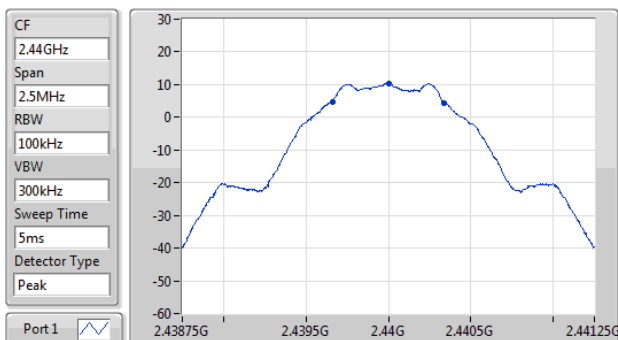


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
681.159k	2.439659G	2.440341G	1.031M	2.439493G	2.440525G	500k	1

EBW-DTS

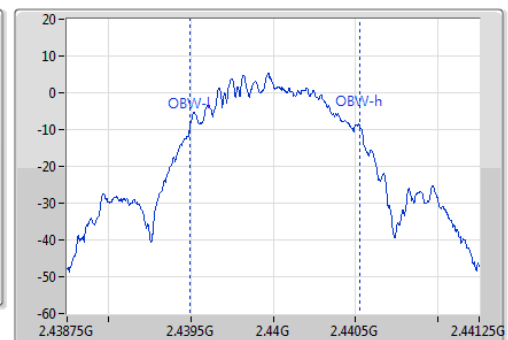


BT-LE(1Mbps)

2480MHz

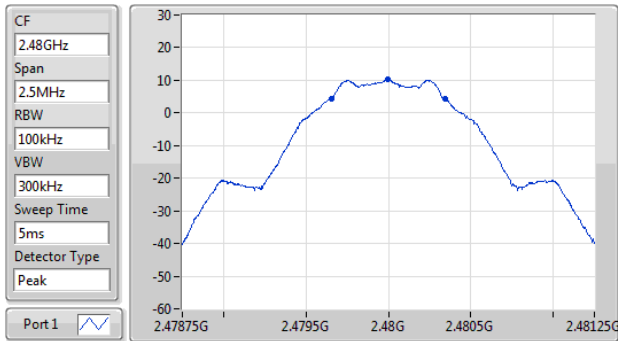


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
692.029k	2.479652G	2.480344G	1.035M	2.47949G	2.480525G	500k	1

EBW-DTS

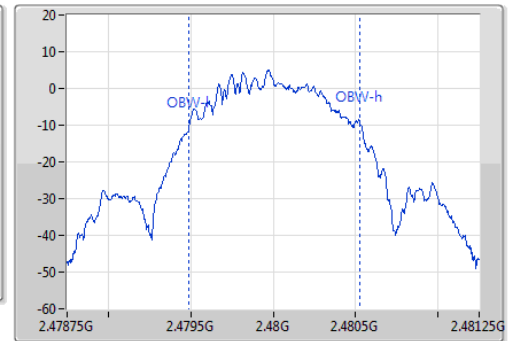


BT-LE(2Mbps)

2402MHz

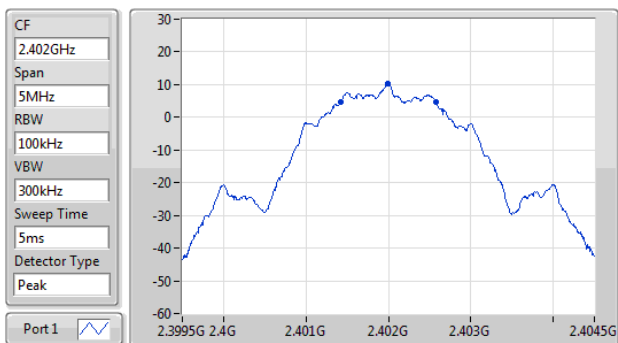


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
1.152M	2.401428G	2.40258G	2.062M	2.40098G	2.403042G	500k	1

EBW-DTS

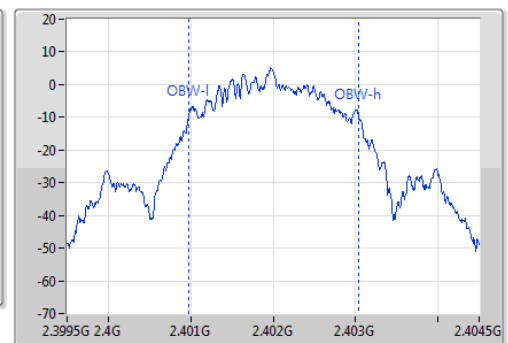

BT-LE(2Mbps)


2440MHz

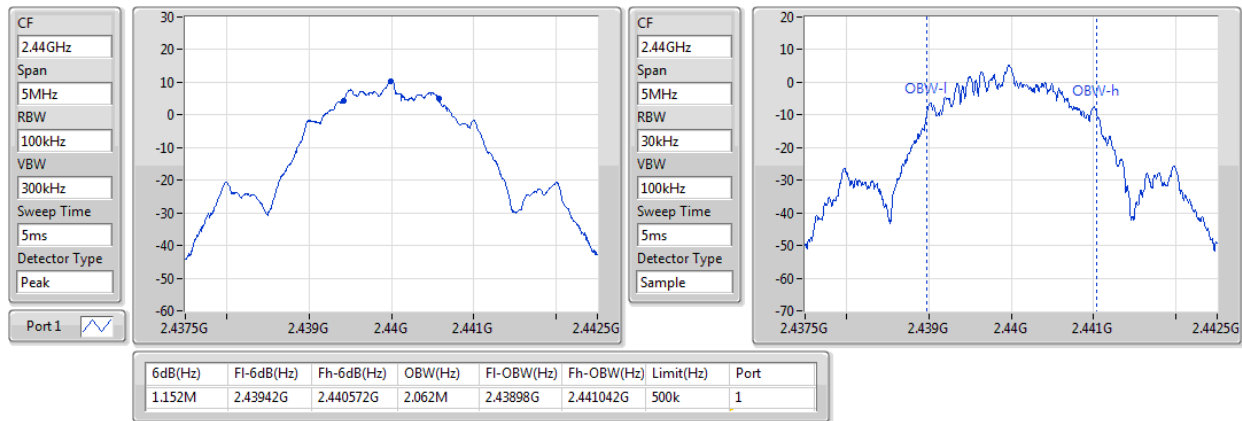

EBW-DTS

BT-LE(2Mbps)

2480MHz

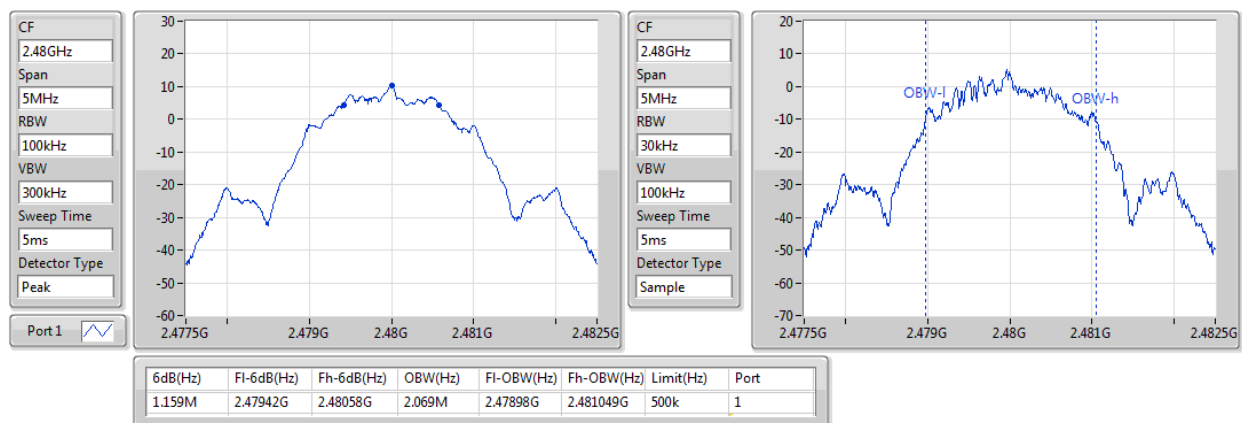

EBW-DTS

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



3.3.4 Test Result of Maximum Output Power

Ambient Condition	21°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	10.93	0.01239
BT-LE(500kbps)	10.94	0.01242
BT-LE(1Mbps)	11.02	0.01265
BT-LE(2Mbps)	10.95	0.01245

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	4.87	10.79	30.00
2440MHz	Pass	4.87	10.93	30.00
2480MHz	Pass	4.87	10.91	30.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	4.87	10.79	30.00
2440MHz	Pass	4.87	10.94	30.00
2480MHz	Pass	4.87	10.92	30.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.87	10.85	30.00
2440MHz	Pass	4.87	10.99	30.00
2480MHz	Pass	4.87	11.02	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	4.87	10.81	30.00
2440MHz	Pass	4.87	10.95	30.00
2480MHz	Pass	4.87	10.93	30.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(125kbps)	10.84	0.01213
BT-LE(500kbps)	10.85	0.01216
BT-LE(1Mbps)	10.90	0.01230
BT-LE(2Mbps)	10.86	0.01219

Result

Mode	Result	Antenna Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	4.87	10.63	-
2440MHz	Pass	4.87	10.84	-
2480MHz	Pass	4.87	10.80	-
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	4.87	10.63	-
2440MHz	Pass	4.87	10.85	-
2480MHz	Pass	4.87	10.81	-
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.87	10.71	-
2440MHz	Pass	4.87	10.88	-
2480MHz	Pass	4.87	10.90	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	4.87	10.64	-
2440MHz	Pass	4.87	10.86	-
2480MHz	Pass	4.87	10.82	-

Note: Average power is for reference only.

3.4 Power Spectral Density

3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle $< 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
2. Set the sweep time to: ≥ 10 (number of measurement points in sweep) $\times$ (total on/off period of the transmitted signal).
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log (1/x)$, where x is the duty cycle.

3.4.3 Test Setup



3.4.4 Test Result of Power Spectral Density

Ambient Condition	21°C / 67%	Tested By	Aska Huang
--------------------------	------------	------------------	------------

Summary

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(125kbps)	4.80
BT-LE(500kbps)	4.68
BT-LE(1Mbps)	-3.99
BT-LE(2Mbps)	-6.45


Result

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(125kbps)	-	-	-	-
2402MHz	Pass	4.87	4.18	8.00
2440MHz	Pass	4.87	4.80	8.00
2480MHz	Pass	4.87	4.60	8.00
BT-LE(500kbps)	-	-	-	-
2402MHz	Pass	4.87	4.57	8.00
2440MHz	Pass	4.87	4.68	8.00
2480MHz	Pass	4.87	4.49	8.00
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.87	-4.03	8.00
2440MHz	Pass	4.87	-3.99	8.00
2480MHz	Pass	4.87	-4.17	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	4.87	-6.55	8.00
2440MHz	Pass	4.87	-6.45	8.00
2480MHz	Pass	4.87	-6.65	8.00

BT-LE(125kbps)

PSD


2402MHz

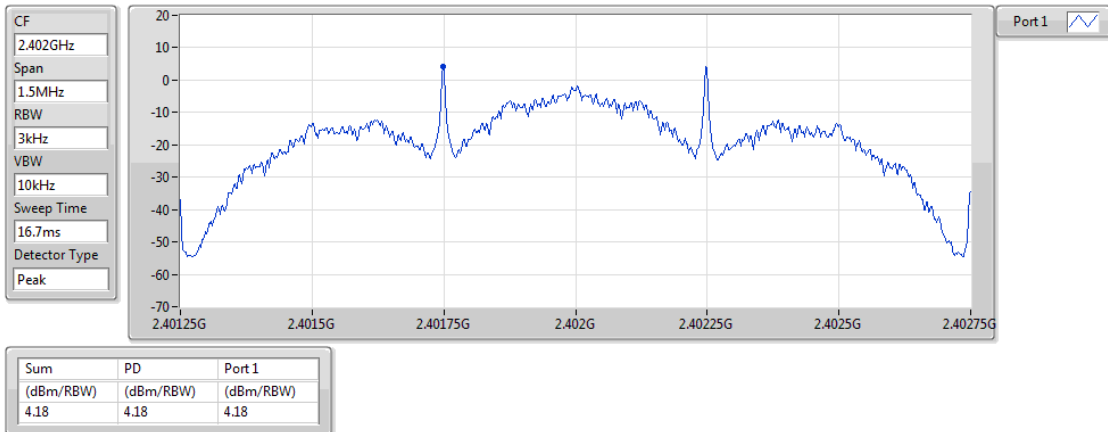

BT-LE(125kbps)

PSD


2440MHz

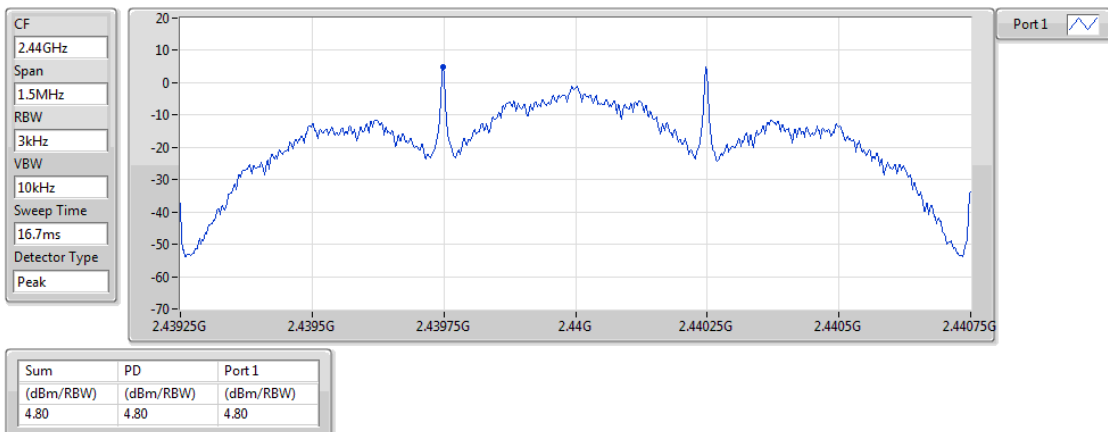

BT-LE(125kbps)

PSD


2480MHz

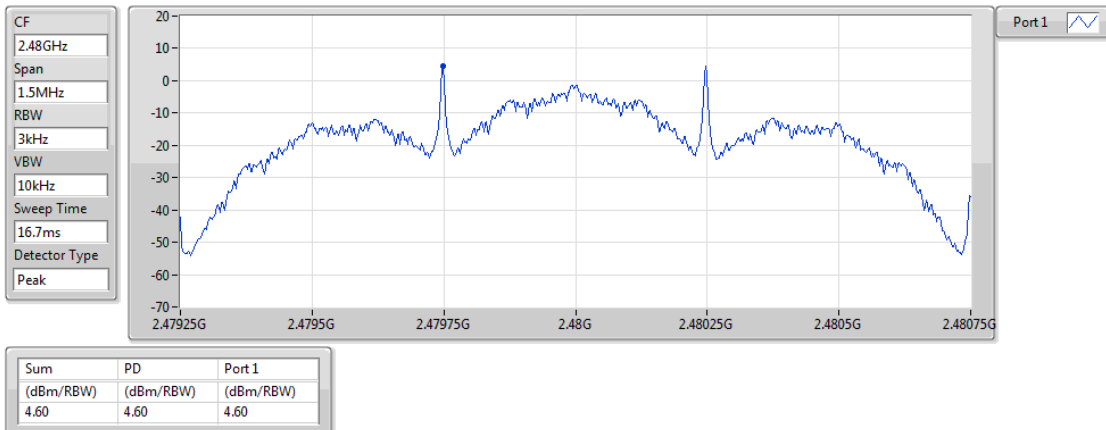

BT-LE(500kbps)

PSD


2402MHz

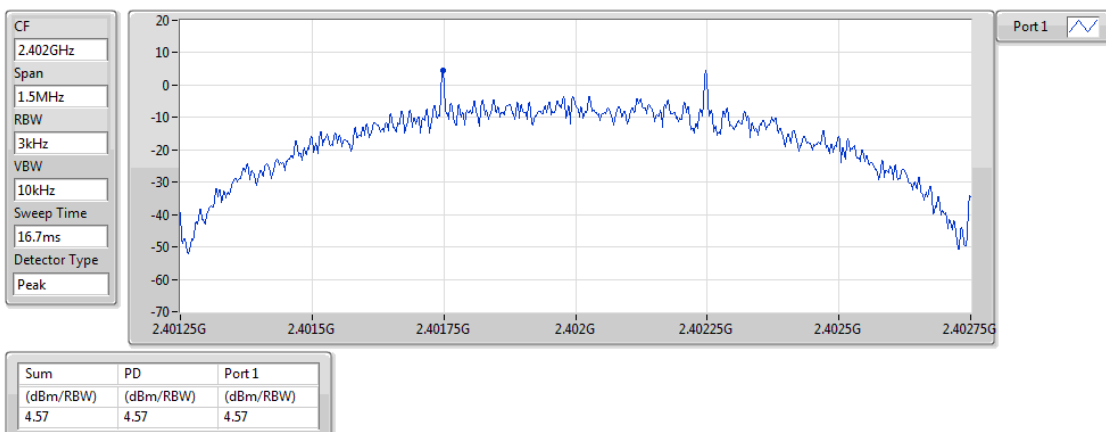

BT-LE(500kbps)

PSD


2440MHz

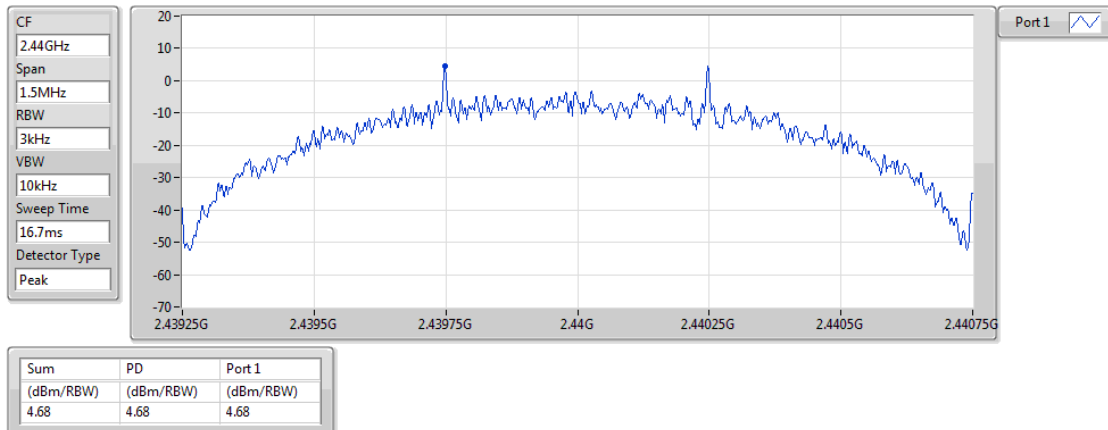

BT-LE(500kbps)

PSD


2480MHz

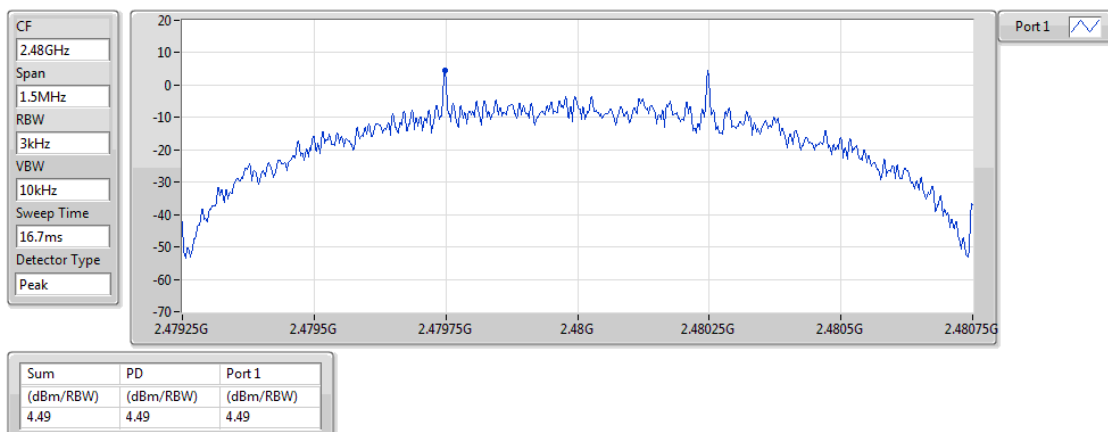

BT-LE(1Mbps)

PSD


2402MHz

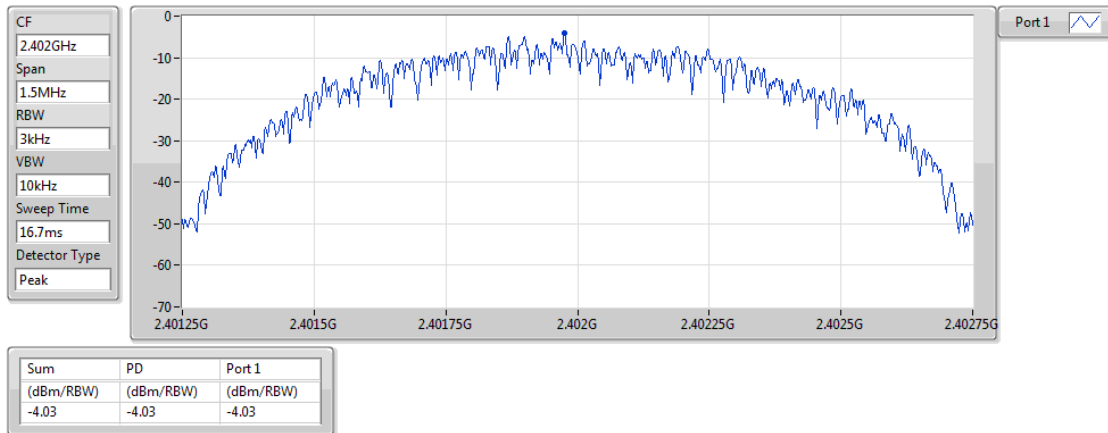

BT-LE(1Mbps)

PSD


2440MHz

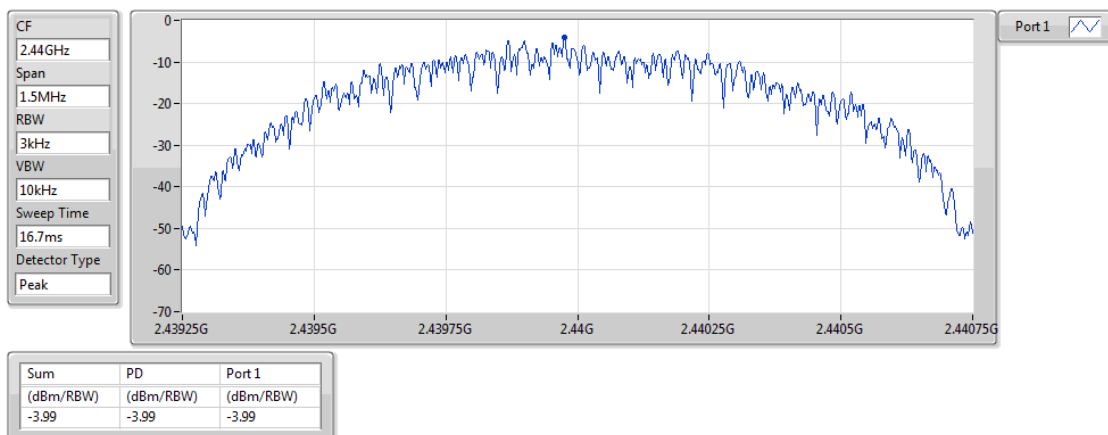

BT-LE(1Mbps)

PSD


2480MHz

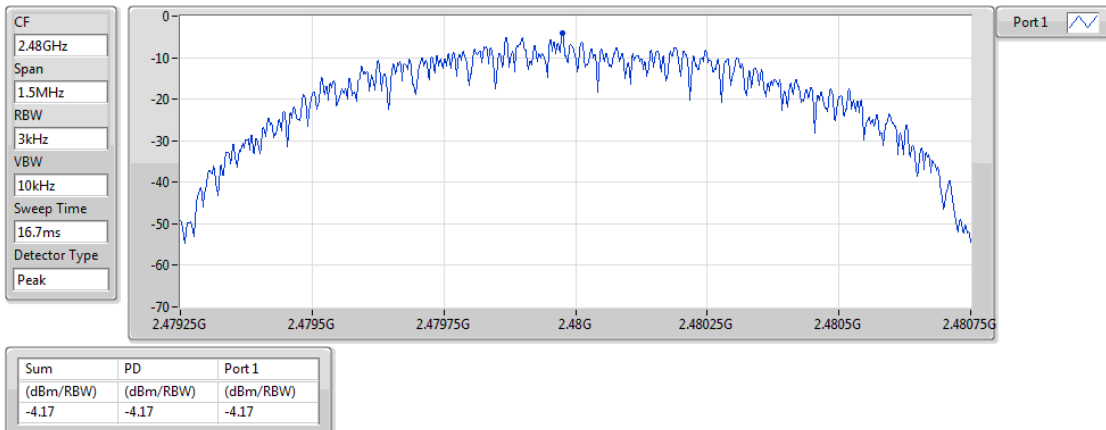

BT-LE(2Mbps)

PSD


2402MHz

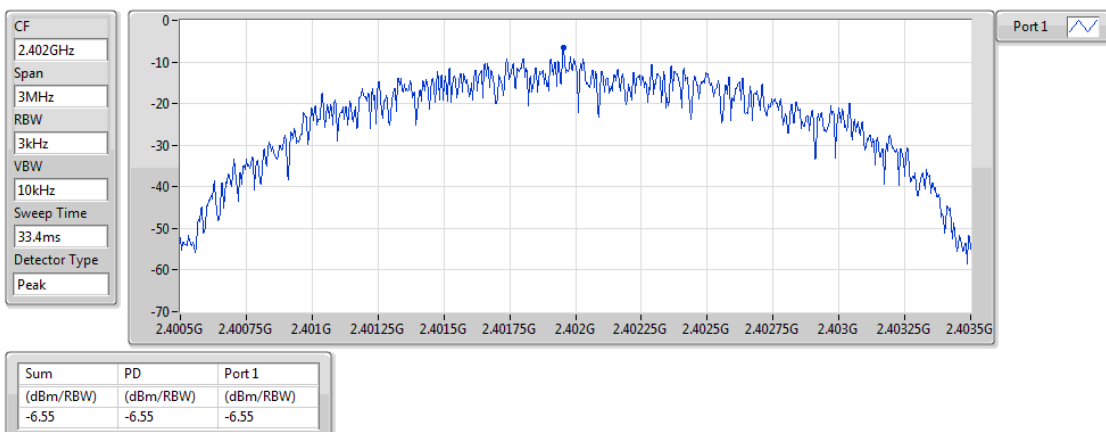

BT-LE(2Mbps)

PSD


2440MHz

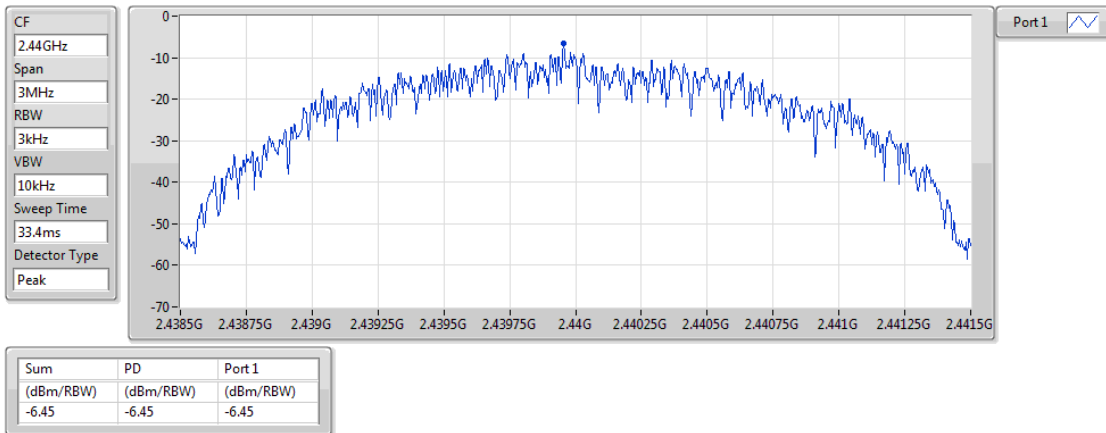

BT-LE(2Mbps)

PSD

2480MHz

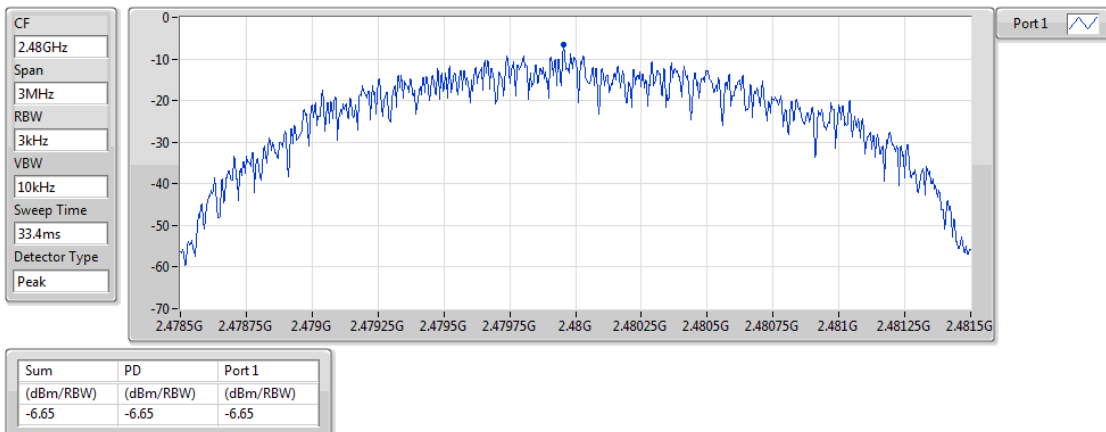

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9~90 kHz, 110~490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

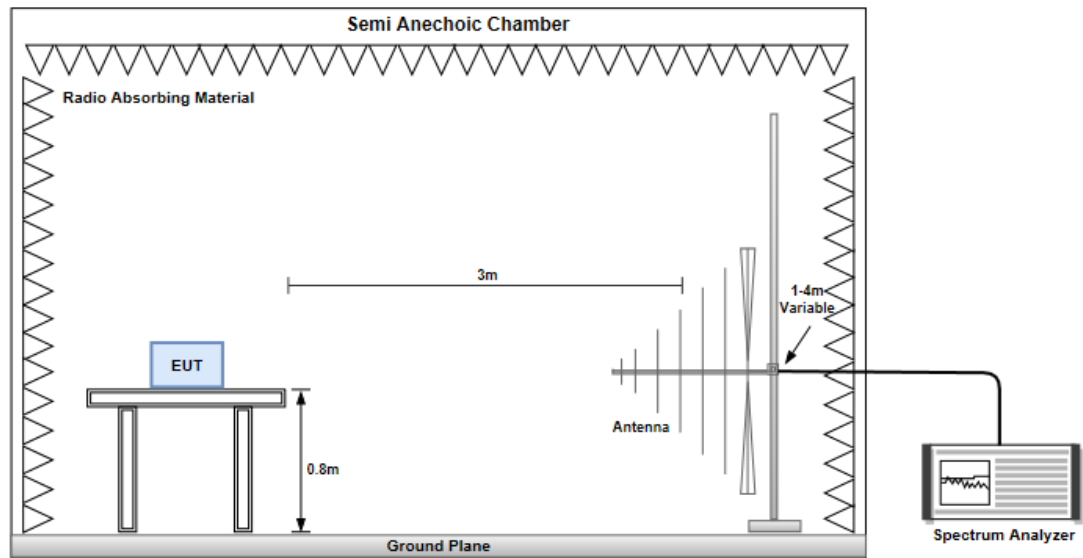

Radiated Emissions above 1 GHz

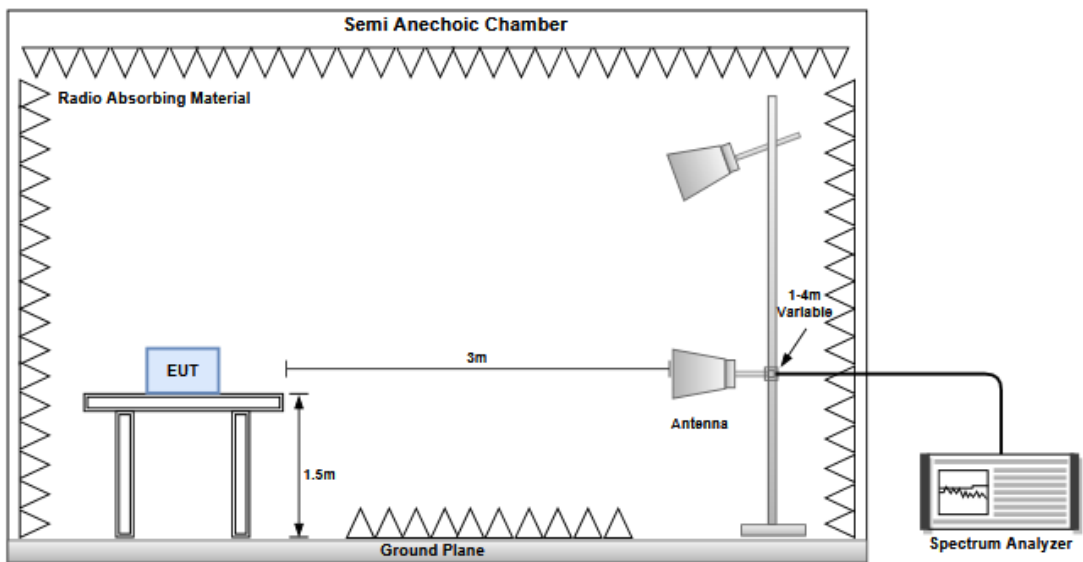

Test Configuration 1

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) <			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBuV/m)			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBUV/m)			

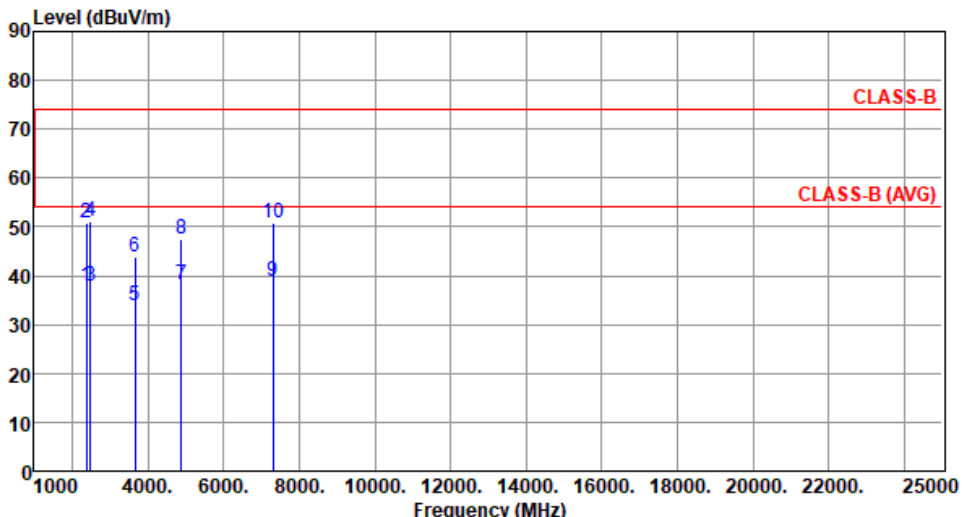Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):68									
Level (dBuV/m) 									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	37.81	54.00	-16.19	40.56	-2.75	Average	155	176
2	2390.00	50.93	74.00	-23.07	53.68	-2.75	Peak	155	176
3	2483.50	37.98	54.00	-16.02	40.68	-2.70	Average	155	176
4	2483.50	51.15	74.00	-22.85	53.85	-2.70	Peak	155	176
5	3660.00	33.86	54.00	-20.14	33.16	0.70	Average	195	85
6	3660.00	43.80	74.00	-30.20	43.10	0.70	Peak	195	85
7	4880.00	38.03	54.00	-15.97	33.91	4.12	Average	100	138
8	4880.00	47.58	74.00	-26.42	43.46	4.12	Peak	100	138
9	7320.00	38.70	54.00	-15.30	29.42	9.28	Average	100	40
10	7320.00	50.87	74.00	-23.13	41.59	9.28	Peak	100	40
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBuV/m)			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBuV/m) </			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBUV/m)			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBUV/m) </			

Modulation	BT-LE (2Mbps)		Test Freq. (MHz)		2402		
Polarization	Vertical						
Test By		:Roger Lu		Temperature(°C):21		Humidity(%):68	
Level (dBUV/m) <							

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBuV/m) </			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBuV/m) <			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBUV/m) </			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):21 Humidity(%):68			
Level (dBuV/m)			

Test Configuration 2

3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			

Modulation	BT-LE (1Mbps)		Test Freq. (MHz)		2480	
Polarization	Vertical					
Test By :Brad Wu Temperature(°C):24 Humidity(%):65						
Level (dBUV/m) <						

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation	BT-LE (1Mbps)		Test Freq. (MHz)		2402				
Polarization	Horizontal								
Test By :Roger Lu			Temperature(°C):23			Humidity(%):65			
Level (dBUV/m)									

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) </			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			

Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2480
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) </			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2402
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m)			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2440
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			

Modulation	BT-LE (2Mbps)	Test Freq. (MHz)	2480
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			

Modulation	BT-LE (2Mbps)		Test Freq. (MHz)		2480				
Polarization	Vertical								
Test By :Roger Lu			Temperature(°C):23			Humidity(%):65			
Level (dBUV/m) </									

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup




3.6.4 Test Result of Emissions in non-restricted Frequency Bands

Ambient Condition	21°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

BT-LE(125kbps)

CSEndB-DTS


2402MHz

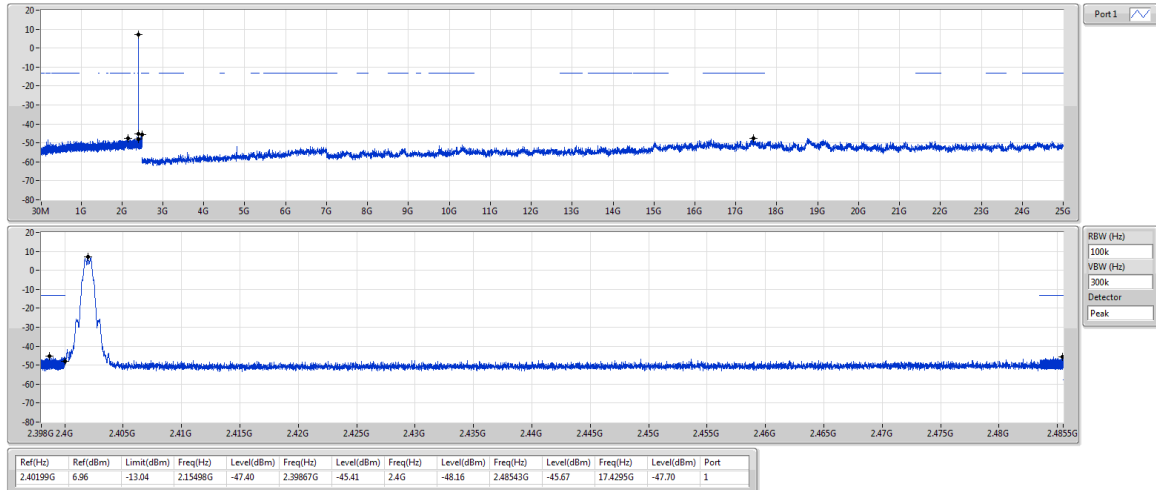

BT-LE(125kbps)

CSEndB-DTS


2440MHz

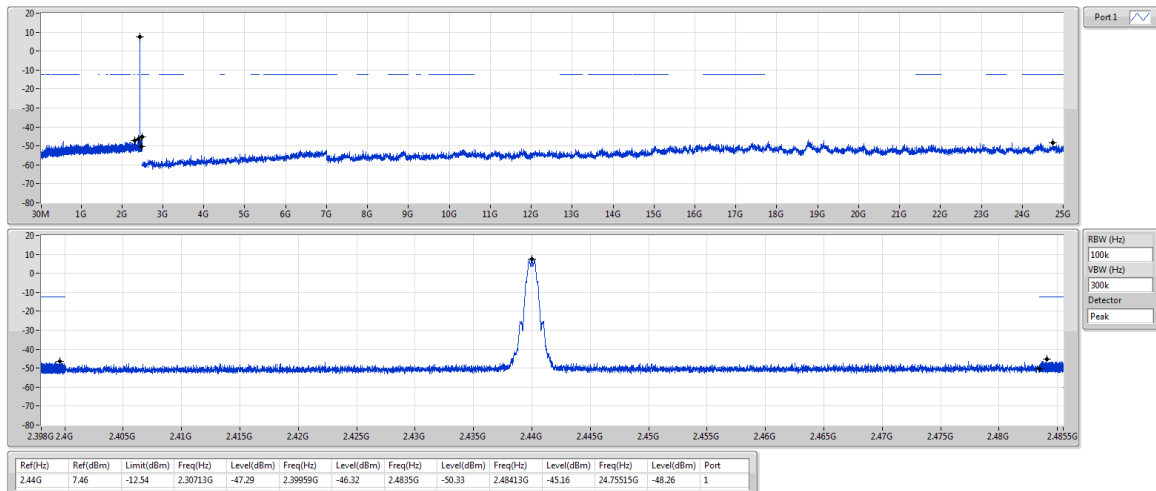

BT-LE(125kbps)

CSENdB-DTS


2480MHz

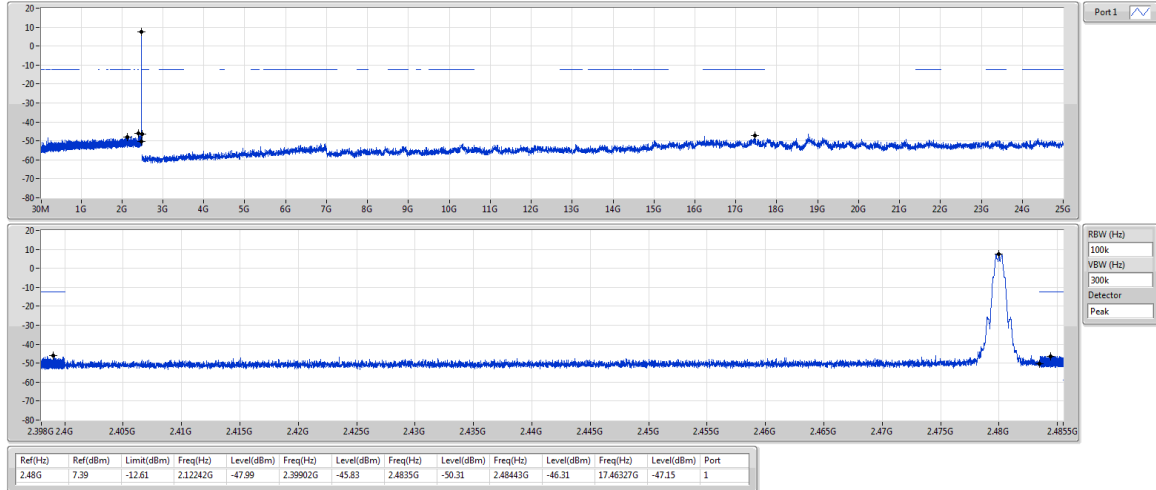

BT-LE(500kbps)

CSENdB-DTS


2402MHz

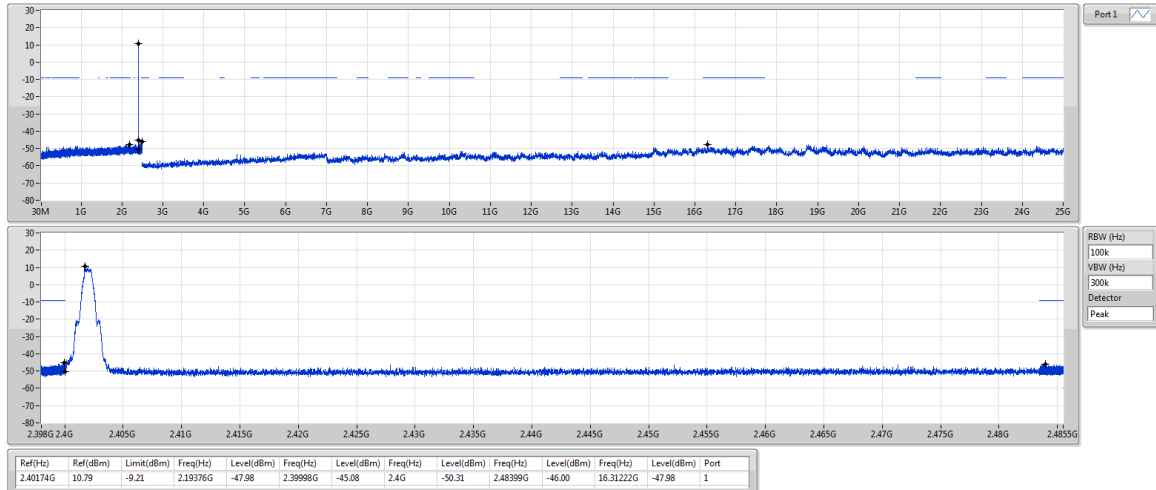

BT-LE(500kbps)

CSENdB-DTS


2440MHz

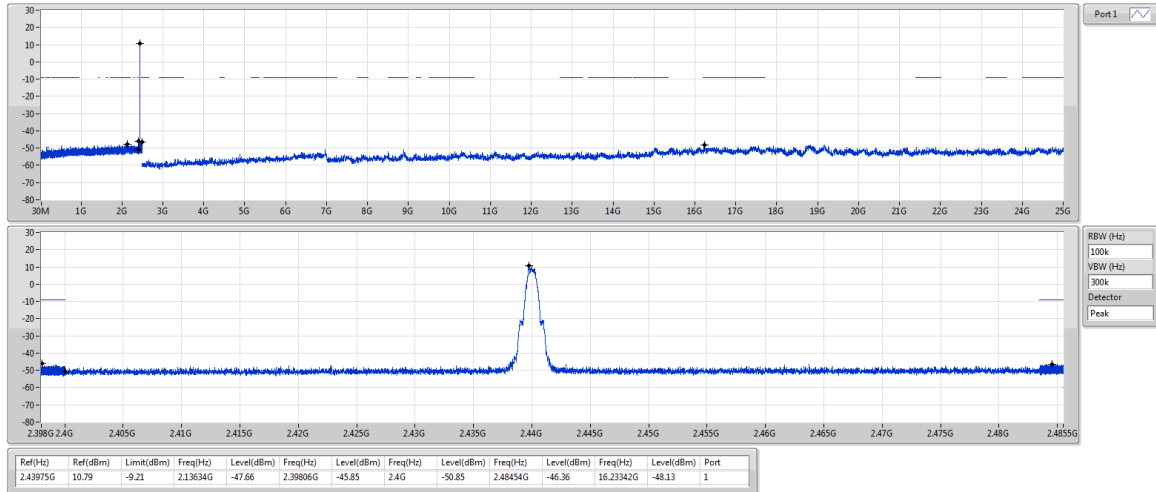

BT-LE(500kbps)

CSENdB-DTS


2480MHz

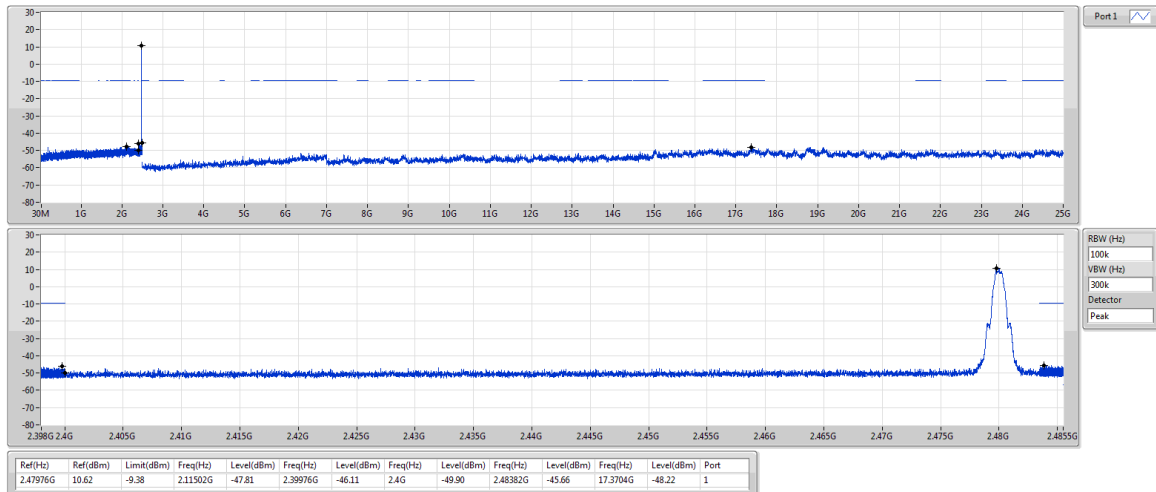

BT-LE(1Mbps)

CSEndB-DTS


2402MHz

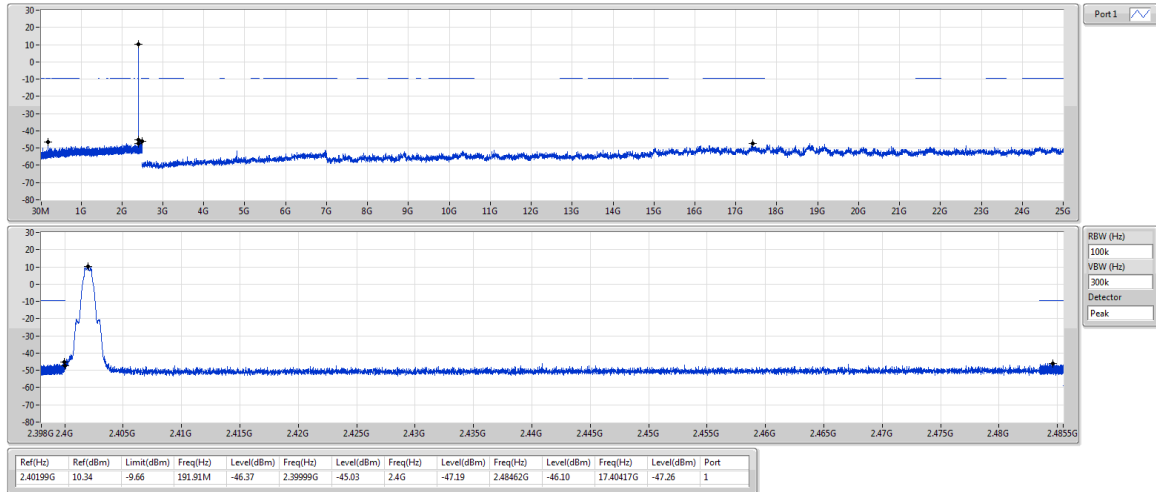

BT-LE(1Mbps)

CSEndB-DTS


2440MHz

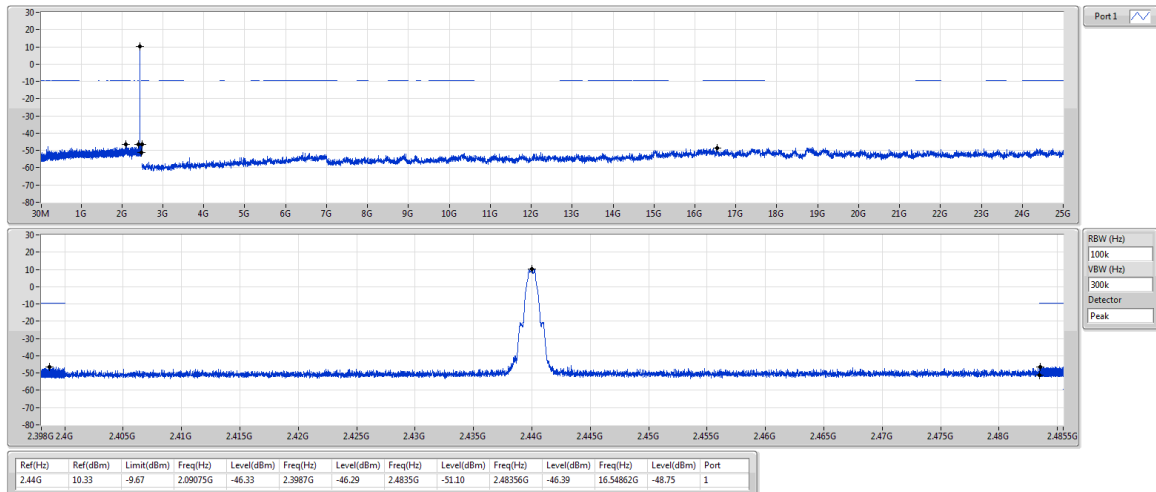

BT-LE(1Mbps)

CSENdB-DTS


2480MHz

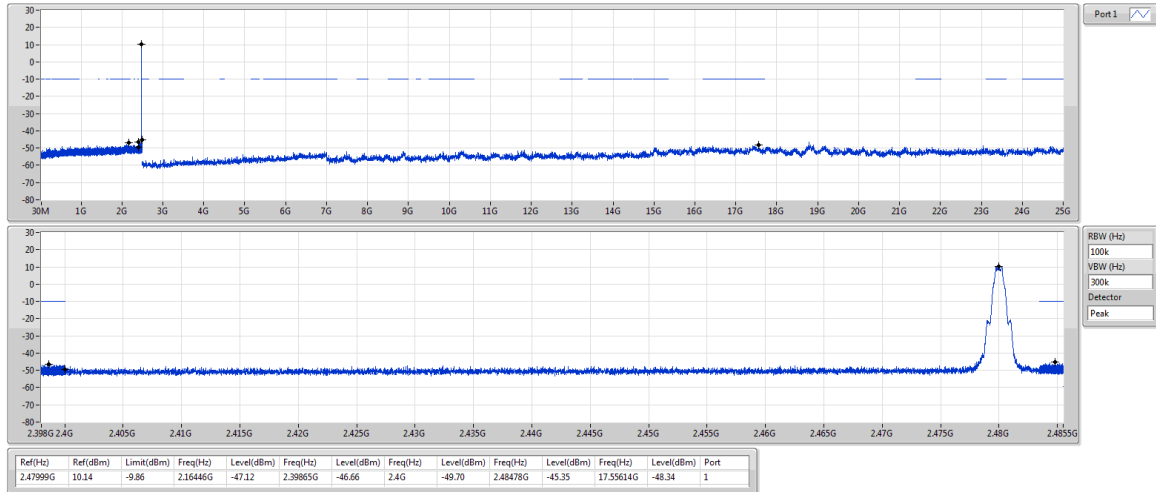

BT-LE(2Mbps)

CSENdB-DTS


2402MHz

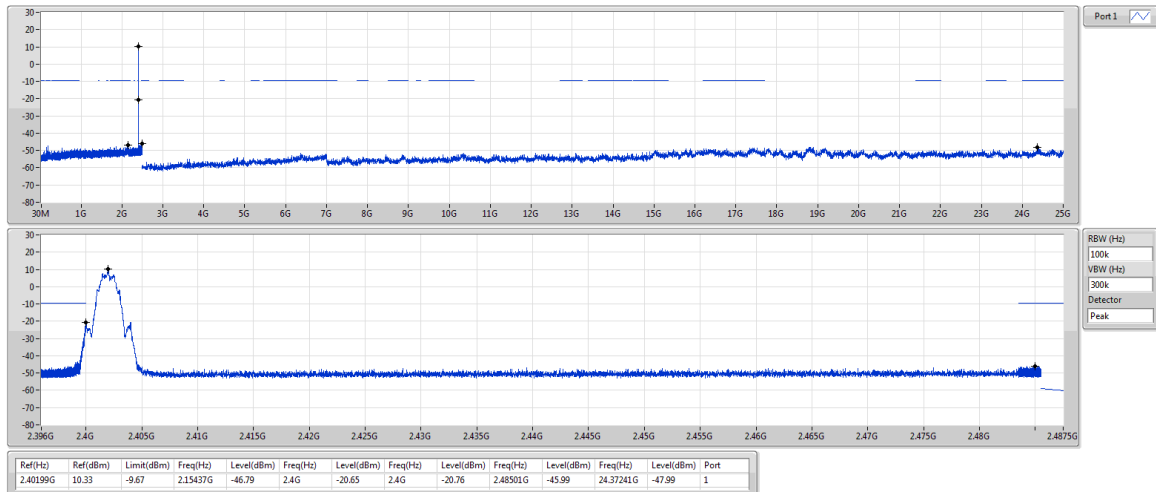

BT-LE(2Mbps)

CSEndB-DTS


2440MHz

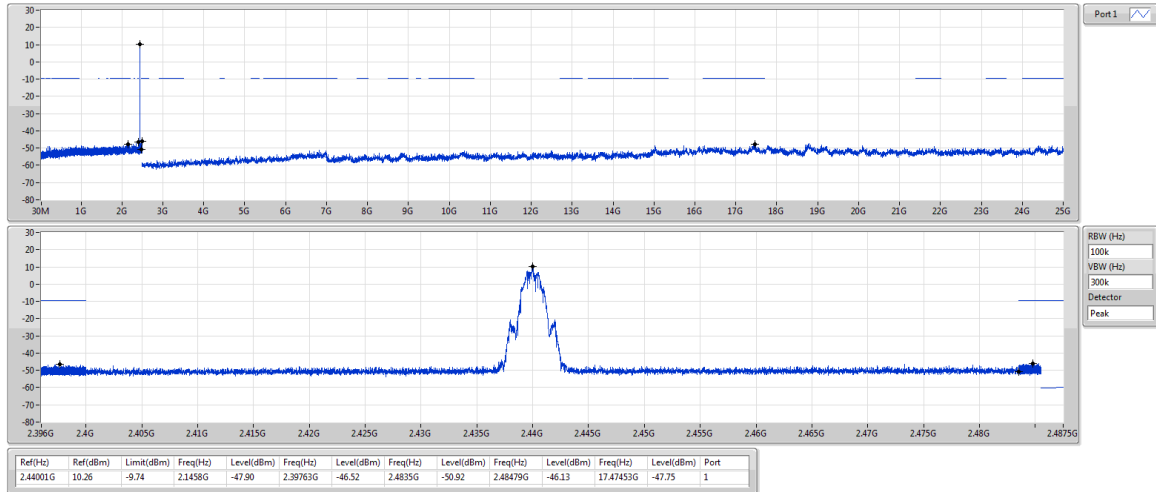

BT-LE(2Mbps)

CSEndB-DTS

2480MHz

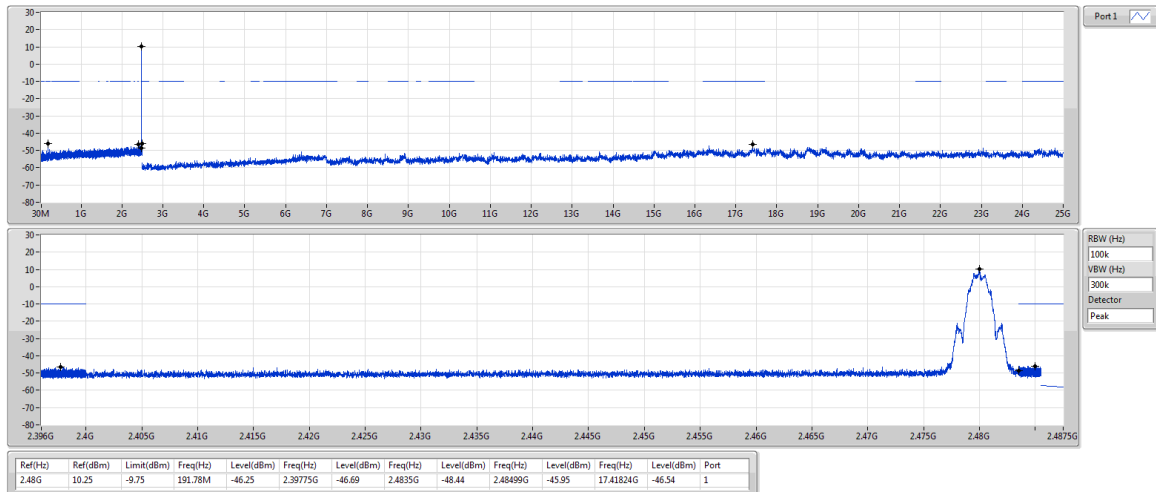

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==