

FCC Test Report

Report No.: AGC01741230703FR02

FCC ID : 2AYT3-AC180P

APPLICATION PURPOSE Original Equipment

PRODUCT DESIGNATION: Portable Power Station

BRAND NAME : BLUETTI

MODEL NAME : AC180P

APPLICANT: SHENZHEN POWEROAK NEWENER CO., LTD

DATE OF ISSUE : Aug. 23, 2023

STANDARD(S) : FCC Part 15 Subpart C

REPORT VERSION: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 30

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 23, 2023	Valid	Initial Release




TABLE OF CONTENTS

1. GENERAL INFORMATION	_
2. PRODUCT INFORMATION	5
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	6
2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.4 TEST METHODOLOGY	7
2.5 SPECIAL ACCESSORIES	7
2.6 EQUIPMENT MODIFICATIONS	7
2.7 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	8
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	9
3.5 LIST OF EQUIPMENTS USED	10
4.SYSTEM TEST CONFIGURATION	11
4.1 EUT CONFIGURATION	11
4.2 EUT EXERCISE	11
4.3 CONFIGURATION OF TESTED SYSTEM	11
4.4 EQUIPMENT USED IN TESTED SYSTEM	11
4.5 SUMMARY OF TEST RESULTS	12
5. DESCRIPTION OF TEST MODES	13
6. FIELD STRENGTH OF FUNDAMENTAL	14
6.1 PROVISIONS APPLICABLE	14
6.3 FIELD STRENGTH CALCULATION	16
6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	17
6.5 MEASUREMENT RESULTS	18
7. 20 DB BANDWIDTH	24
7.1 PROVISIONS APPLICABLE	24
7.2 MEASUREMENT PROCEDURE	24
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	24
7.4 MEASUREMENT RESULTS	25
8. AC POWER LINE CONDUCTED EMISSION TEST	26
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	26



Page 4 of 30

APPEND	DIX II: PHOTOGRAPHS OF TEST EUT	3(
APPEND	DIX I: PHOTOGRAPHS OF TEST SETUP	30
8.5 N	MEASUREMENT RESULTS	28
8.4 F	FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	27
8.3 F	PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	27
8.2 N	MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	26





1. GENERAL INFORMATION

Applicant	SHENZHEN POWEROAK NEWENER CO., LTD		
Address	F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China		
Manufacturer	SHENZHEN POWEROAK NEWENER CO., LTD		
Address	F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China		
Factory	Huizhou PowerOak Innovation Co., Ltd		
Address	(No.1 Workshop)Longsheng 5th Road, Laoshe Village, Dayawan West Zone, Huizhou, Guangdong, China		
Product Designation	Portable Power Station		
Brand Name	BLUETTI		
Test Model	AC180P		
Deviation from Standard	No any deviation from the test method		
Date of receipt of test item	Jul. 18, 2023		
Date of Test:	Jul. 19, 2023~Aug. 23, 2023		
Test Result	Pass		
Test Report Form No	AGCTR-ER-FCC-WPTV1.0		

Alan Duan
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Aug. 23, 2023



Page 6 of 30

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	AC180_U2 V6.0			
Software Version	V2073			
Frequency Band	110.5kHz-205kHz			
Operation Frequency	130kHz			
Modulation Type	ASK			
Number of channels	1			
Field Strength of Fundamental	74.40dBuV/m (Max) at 3m distance			
Antenna Designation	Coil Antenna			
Antenna Gain	0dBi			
Input Rating	 AC: 120V~50/60Hz, 15A Max DC/PV:12V-60V=10A, 500W Max 			
Output Rating	 AC: 120V~50/60Hz, 1800W/1800VA Max. USB-A: 5V=3A, 15W Total x2 USB-C: 5/9/12/15/20V=3A; 20V=5A(With E-Marker chip built-in) Cigarette Lighter Socket: 12V=10A Wireless Charge: 5/7.5/10/15W AC and DC output: 1800W Total 			

2.2 TEST FREQUENCY LIST

Frequency Band	Channel Number	Frequency
110.5kHz-205kHz	01	130kHz



Page 7 of 30

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AYT3-AC180P**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title	
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations	
2	FCC 47 CFR Part 15	Radio Frequency Devices	
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices	

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0 dBi.



Page 8 of 30

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 9 of 30

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS	
Temperature range (°C)	15 - 35	-20 - 50	
Relative humidty range	20 % - 75 %	20 % - 75 %	
Pressure range (kPa)	86 - 106	86 - 106	
Power supply			

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 4.2 \text{ dB}$
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.8 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



Page 10 of 30

3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test Software	R&S	Ver.V1.71	N/A	N/A	N/A
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test Software	FARA	Ver.RA-03A	N/A	N/A	N/A



Page 11 of 30

4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

Item	Equipment	Model No.	Identifier	Note
1	wireless charging load	Huawei	-	Accessories

☐ Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	Portable Power Station	AC180P	2AYT3-AC180P	EUT



Page 12 of 30

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Radiated Spurious Emission	Pass
3	§15.215(c)	20dB Bandwidth	Pass
4	§15.205(a)	Restricted Bands of Operation	Pass
5	§15.207	AC Power Line Conducted Emission	Pass



Page 13 of 30

5. DESCRIPTION OF TEST MODES

Summary table of Test Cases				
Test Item	Equipment type / Modulation			
rest item	WPT_ASK			
Radiated & Conducted Test Cases	Mode 1: Battery powered or AC input + EUT + Wireless load (Full Load) Mode 2: Battery powered or AC input + EUT + Wireless load (Half Load) Mode 3: Battery powered or AC input + EUT + Wireless load (Null Load) Mode 4: Battery powered or AC input + EUT (Null Load)			
AC Conducted Emission	Mode 1: AC input + EUT + Wireless load (Full Load) Mode 2: AC input + EUT + Wireless load (Half Load) Mode 3: AC input + EUT + Wireless load (Null Load) Mode 4: AC input + EUT (Null Load)			

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.



Page 14 of 30

6. FIELD STRENGTH OF FUNDAMENTAL

6.1 PROVISIONS APPLICABLE

Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	9kHz to 1GHz						
Test site:	Measurement Distance: 3m						
	Frequency	Detector	RBW	VBW	Value		
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak		
Receiver setup:	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak		
ixeceivei selup.	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak		
	Above 4CUz	Peak	1MHz	3MHz	Peak		
	Above 1GHz	Peak	1MHz	10Hz	Average		
		_			_		

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 4CLIz	54.00	Average Value
Above 1GHz	74.00	Peak Value

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 15 of 30

6.2 MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC01741230703FR02 Page 16 of 30

6.3 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where $FS = Field Strength in dB\mu V/m$

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m AG = Amplifier Gain in dB AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF where FS = Field Strength in $dB\mu V/m$ RR = RA - AG - AV in $dB\mu V$ LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m.

This value in dBµV/m was converted to its corresponding level in µV/m.

 $RA = 52.0 dB\mu V/m$

AF = 7.4 dB/m $RR = 18.0 \text{ dB}\mu\text{V}$ CF = 1.6 dB LF = 9.0 dB

CF = 1.6 dB AG = 29.0 dB

AV = 5.0 dB

FS = RR + LF

 $FS = 18 + 9 = 27 dB\mu V/m$

Level in $\mu V/m = Common Antilogarithm [(27 dB<math>\mu V/m)/20] = 22.4 \mu V/m$

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFH[dB(S/m)]$

Where,

H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

LC is the cable loss,

GPA is the gain of the preamplifier (if used), and

AFH is the magnetic antenna factor.

If the "electrical" antenna factor is used instead, the above equation becomes:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFE[dB(m-1)] - 51.5[dB\Omega]$

where AFE is the "electric" antenna factor, as provided by the antenna calibration laboratory.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

RADIATED EMISSION TEST SETUP 9kHz-30MHz

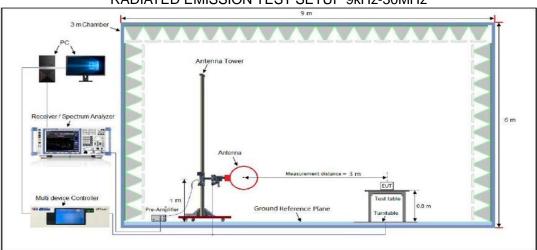

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

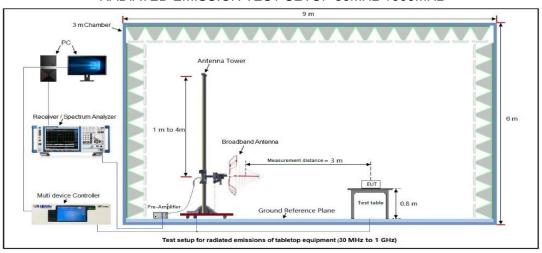

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



6.5 MEASUREMENT RESULTS


ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz

EUT	Portable Power Station	Model Name	AC180P
Temperature	22° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	AC120V, 50Hz
Test Mode	Mode 1	Antenna	Face



No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	0.0094	8.59	28.38	36.97	127.9	-90.96	peak
2	0.0120	7.41	28.19	35.60	125.8	-90.22	peak
3	0.0235	5.80	27.33	33.13	120.0	-86.89	peak
4	0.0316	8.10	26.73	34.83	117.4	-82.63	peak
5	0.0781	7.64	23.26	30.90	109.6	-78.75	peak
6 *	0.1479	52.87	21.53	74.40	104.4	-29.74	peak


RESULT: PASS






ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz

EUT	Portable Power Station	Model Name	AC180P
Temperature	22° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	AC120V, 50Hz
Test Mode	Mode 1	Antenna	Side

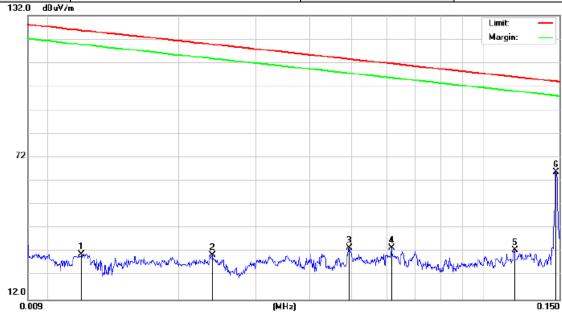

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	0.0120	2.99	28.19	31.18	125.8	-94.64	peak
2	0.0239	3.56	27.30	30.86	119.8	-89.01	peak
3	0.0492	8.25	25.41	33.66	113.6	-79.98	peak
4	0.0616	9.23	24.49	33.72	111.7	-77.98	peak
5	0.1184	11.19	21.59	32.78	106.0	-73.28	peak
6 *	0.1474	44.34	21.53	65.87	104.7	-38.30	peak


RESULT: PASS






ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz

EUT	Portable Power Station	Model Name	AC180P
Temperature	22° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	AC120V, 50Hz
Test Mode	Mode 1	Antenna	Face

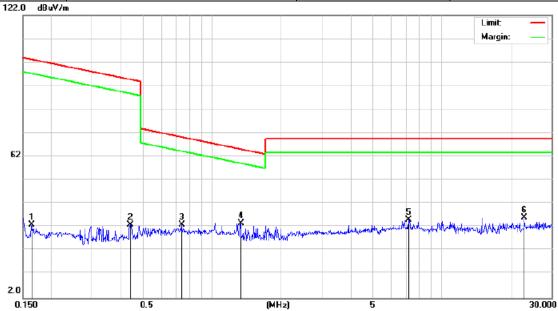

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	0.1633	11.45	21.50	32.95	103.2	-70.33	peak
2	0.4395	12.00	20.99	32.99	94.74	-61.75	peak
3	0.7349	11.93	21.07	33.00	70.28	-37.28	peak
4 *	1.3306	12.01	21.56	33.57	65.12	-31.55	peak
5	7.1753	11.53	23.61	35.14	69.54	-34.40	peak
6	22.8963	11.21	24.82	36.03	69.54	-33.51	peak


RESULT: PASS





ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz

EUT	Portable Power Station	Model Name	AC180P
Temperature	22° C	Relative Humidity	55%
Pressure	960hPa	Test Voltage	AC120V, 50Hz
Test Mode	Mode 1	Antenna	Side

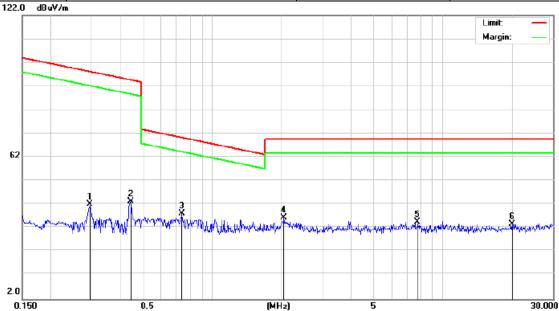


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		0.2938	20.88	21.26	42.14	98.21	-56.07	peak
2		0.4420	22.21	20.99	43.20	94.69	-51.49	peak
3	*	0.7389	16.97	21.08	38.05	70.23	-32.18	peak
4		2.0440	14.15	22.12	36.27	69.54	-33.27	peak
5		7.7689	10.90	23.77	34.67	69.54	-34.87	peak
6		19.9496	8.67	25.11	33.78	69.54	-35.76	peak

RESULT: PASS

NOTES:


- 1. Peak detector is used for frequency below 30MHz.
- 2. Negative value in the margin column shows emission below limit.
- 3. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
- 4. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)
- 5. Loop antenna is used for the emission under 30MHz.





						RAI	DIATE	ED EMISSIO	N BELOW	/ 1GHz				
EUT			ı	Port	able	e Pov	ver St	tation	Mode	el Name		AC1	80P	
Temperature	е		2	22°	С				Relat	tive Hum	idity	55%)	
Pressure			9	960ŀ	nPa	l			Test	Voltage		AC1	20V, 5	50Hz
Test Mode			I	Mod	le 1				Ante	nna		Hori	zontal	
72.0	dBuV₄	/m			_									
												Limit: Margir	n: _	
32 /u	de material acida	jiht ardina,	- Netro (more gle)	the standards		singed broken to	1 X Maribbaryon,		3 Marine Marine		, many many many many many many many many	5	C C C C C C C C C C C C C C C C C C C	1 1 1 1 1 1 1 1 1 1
30.0	000	40	50	60	70		ading	(MHz) Correct	Measure	300 40	0 500 6	00 70	0 10	00.000 -
	No.	Mk		Free	q.		evel	Factor	ment	Limit	Ove			
				MHz	Z	dl	BuV	dB	dBuV/m	dB/m	dB	D	etector	-
	1		93.	.113	32	ę	9.00	15.13	24.13	43.50	-19.3	7	peak	-
	2		136.	.459	98	8	3.93	15.41	24.34	43.50	-19.1	6	peak	_
	3		196.	.509	98	18	3.17	14.10	32.27	43.50	-11.2	3	peak	_
	4		446.	.414	11	Ę	5.66	24.88	30.54	46.00	-15.4	6	peak	_
	5		614.	.214	2	6	3.30	25.17	31.47	46.00	-14.5	3	peak	_
	6	*	903.	.309)4	6	6.80	31.34	38.14	46.00	-7.86	6	peak	-

RESULT: PASS





RADIATED EMISSION BELOW 1GHz

	RADIATED EMISSIO	N BELOW 1GHz	
EUT	Portable Power Station	Model Name AG	C180P
Temperature	22° C	Relative Humidity 55	5%
Pressure	960hPa	Test Voltage A0	C120V, 50Hz
Test Mode	Mode 1	Antenna Ve	ertical
72.0 dBuV/m			
			mit — largin: —
			5 \$
32 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	and white the same of the same	Medicon and the second state of the second s	
-8	and which the contract of the second of the		700 1000.000
-8 30.000 40 5	50 60 70 80 (MH ₂) Reading Correct	300 400 500 600 Measure-	
-8	Freq. Level Factor	300 400 500 600 Measure- ment Limit Over	700 1000.000
-8 30.000 40 5	50 60 70 80 (MH ₂) Reading Correct	300 400 500 600 Measure-	
-8 30.000 40 5 No. Mk.	Freq. Level Factor	300 400 500 600 Measure- ment Limit Over	700 1000.000
-8 30.000 40 5 No. Mk.	Reading Correct Freq. Level Factor MHz dBuV dB	300 400 500 600 Measure- ment Limit Over dBuV/m dB/m dB	700 1000.000 Detector
No. Mk.	Reading Correct Freq. Level Factor MHz dBuV dB 40.9881 9.88 16.91	300 400 500 600 Measurement Limit Over dBuV/m dB/m dB 26.79 40.00 -13.21	700 1000.000 Detector peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

6.92

6.19

699.3046

938.8325

2. All testing modes have undergone pre testing. Mode 1 AC input operation is the worst-case scenario and documented in the report.

35.01

37.03

46.00

46.00

-10.99

-8.97

peak

peak

3. The "Factor" value can be calculated automatically by software of measurement system.

28.09

30.84



Page 24 of 30

7. 20 dB BANDWIDTH

7.1 PROVISIONS APPLICABLE


N/A

7.2 MEASUREMENT PROCEDURE

Set the parameters of SPA as below:

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 300 Hz and the video bandwidth of 1 kHz were used.
- 4. Span: 3kHz, Sweep time: Auto
- 5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and Reported.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

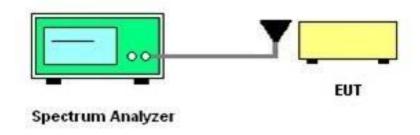



Page 25 of 30

7.4 MEASUREMENT RESULTS

	Tes	t Data of Occupied Bandwi	dth and -20dB Bandwid	ith	
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (MHz)	Pass or Fail
ASK	0.130	0.838	0.922	N/A	Pass

Test Graphs of Occupied Bandwidth #IFGain:Low #Atten: 10 dB Frequency Center Freq 130.000 kHz Avg|Hold:>10/10 Radio Device: BTS Ref 10.00 dBm Center Freq 130.000 kHz Span 3 kHz Sweep 40.87 ms Center 130 kHz #Res BW 300 Hz CF Step 300 Hz Man #VBW 1 kHz <u>Auto</u> Occupied Bandwidth **Total Power** -12.5 dBm 838 Hz Freq Offset 162 Hz 0 Hz Transmit Freq Error **OBW Power** 99.00 % x dB Bandwidth 922 Hz x dB -20.00 dB



8. AC POWER LINE CONDUCTED EMISSION TEST


8.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBμV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

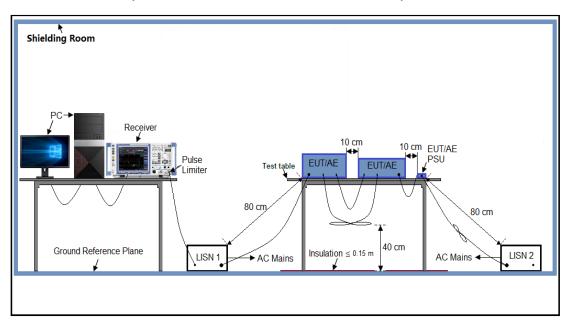



Report No.: AGC01741230703FR02 Page 27 of 30

8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 24V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



8.5 MEASUREMENT RESULTS


		AC LINE	CONDUCT	ED EMIS	SION TEST		
Mode	Mode 1			LIS	SN line	Hot S	Side
Level	[dBµ∨]						
80							
70			 				
60	 -	<u> </u>		<u> </u>	<u></u>	1 1 1 1	- i - i
50		+	<u> </u>	 	·¦	1 1 1 1	+ +
40	·	+	 !			-	
30		**	L			{ 	
20	~ ~~~~	14-1X+-	X X	A STATE OF THE STA	POWERUM		
10	·	+	L !	-	~		And the same
0		+	! 			 -	
-10 150k	k 300k 400k	600k 800k 1	i	2M 3M	4M 5M 6M	8M 10M	20M 30M
				iency [Hz]			
x x x MES	S agc_fin						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	MHz	dΒμV	dB	dΒμV	dB		Line L1
					_	Detector QP QP	
	MHz 0.154000 0.518000 0.834000	dBμV 34.00 28.10 22.20	dB 6.1 6.2 6.2	dВµV 66 56 56	dB 31.8 27.9 33.8	QP QP QP	L1
	MHz 0.154000 0.518000 0.834000 1.242000	dBμV 34.00 28.10 22.20 21.40	dB 6.1 6.2 6.2 6.2	dBμV 66 56 56	31.8 27.9 33.8 34.6	QP QP QP QP	L1 L1 L1 L1
	MHz 0.154000 0.518000 0.834000 1.242000 1.738000	dBμV 34.00 28.10 22.20 21.40 18.00	dB 6.1 6.2 6.2 6.2 6.2	dBμV 66 56 56 56	31.8 27.9 33.8 34.6 38.0	QP QP QP QP QP	L1 L1 L1 L1 L1
	MHz 0.154000 0.518000 0.834000 1.242000	dBμV 34.00 28.10 22.20 21.40	dB 6.1 6.2 6.2 6.2	dBμV 66 56 56	31.8 27.9 33.8 34.6	QP QP QP QP	L1 L1 L1 L1
MI	MHz 0.154000 0.518000 0.834000 1.242000 1.738000	dBμV 34.00 28.10 22.20 21.40 18.00 16.20	dB 6.1 6.2 6.2 6.2 6.2 6.2	dBµV 66 56 56 56 56 56	31.8 27.9 33.8 34.6 38.0	QP QP QP QP QP	L1 L1 L1 L1 L1
MI	MHz 0.154000 0.518000 0.834000 1.242000 1.738000 2.106000	dBµV 34.00 28.10 22.20 21.40 18.00 16.20 RESULT	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2	dBμV 66 56 56 56 56 56	31.8 27.9 33.8 34.6 38.0 39.8	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
M	MHz 0.154000 0.518000 0.834000 1.242000 1.738000 2.106000 EASUREMENT Frequency MHz	dBμV 34.00 28.10 22.20 21.40 18.00 16.20 RESULT Level dBμV	dB 6.1 6.2 6.2 6.2 6.2 6.2 : "agc_	dBµV 66 56 56 56 56 56 4 fin2" Limit dBµV	31.8 27.9 33.8 34.6 38.0 39.8 Margin dB	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1
M	MHz 0.154000 0.518000 0.834000 1.242000 1.738000 2.106000 EASUREMENT Frequency MHz 0.358000	dBμV 34.00 28.10 22.20 21.40 18.00 16.20 RESULT Level dBμV 17.50	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 6.2	dBµV 66 56 56 56 56 56 56 49	31.8 27.9 33.8 34.6 38.0 39.8 Margin dB	QP QP QP QP QP QP	L1 L1 L1 L1 L1 L1 L1
M	MHz 0.154000 0.518000 0.834000 1.242000 1.738000 2.106000 EASUREMENT Frequency MHz 0.358000 0.518000	dBμV 34.00 28.10 22.20 21.40 18.00 16.20 RESULT Level dBμV 17.50 20.20	dB 6.1 6.2 6.2 6.2 6.2 6.2 Transd dB 6.1 6.2	dBµV 66 56 56 56 56 56 40 Limit dBµV 49 46	31.8 27.9 33.8 34.6 38.0 39.8 Margin dB	QP QP QP QP QP QP AV	L1 L1 L1 L1 L1 L1 L1 L1
МІ	MHz 0.154000 0.518000 0.834000 1.242000 1.738000 2.106000 EASUREMENT Frequency MHz 0.358000 0.518000 1.086000	dBμV 34.00 28.10 22.20 21.40 18.00 16.20 RESULT Level dBμV 17.50	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 Transd dB 6.1 6.2 6.2	dBµV 66 56 56 56 56 56 56 49 49 46 46	31.8 27.9 33.8 34.6 38.0 39.8 Margin dB	QP QP QP QP QP QP AV AV	L1 L1 L1 L1 L1 L1 L1
MI	MHz 0.154000 0.518000 0.834000 1.242000 1.738000 2.106000 EASUREMENT Frequency MHz 0.358000 0.518000 1.086000	dBμV 34.00 28.10 22.20 21.40 18.00 16.20 RESULT Level dBμV 17.50 20.20 16.00 11.50	dB 6.1 6.2 6.2 6.2 6.2 6.2 6.2 Transd dB 6.1 6.2 6.2 6.3	dBµV 66 56 56 56 56 56 56 49 49 46 46 46	31.8 27.9 33.8 34.6 38.0 39.8 Margin dB 31.3 25.8 30.0	QP QP QP QP QP QP AV AV AV	L1

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



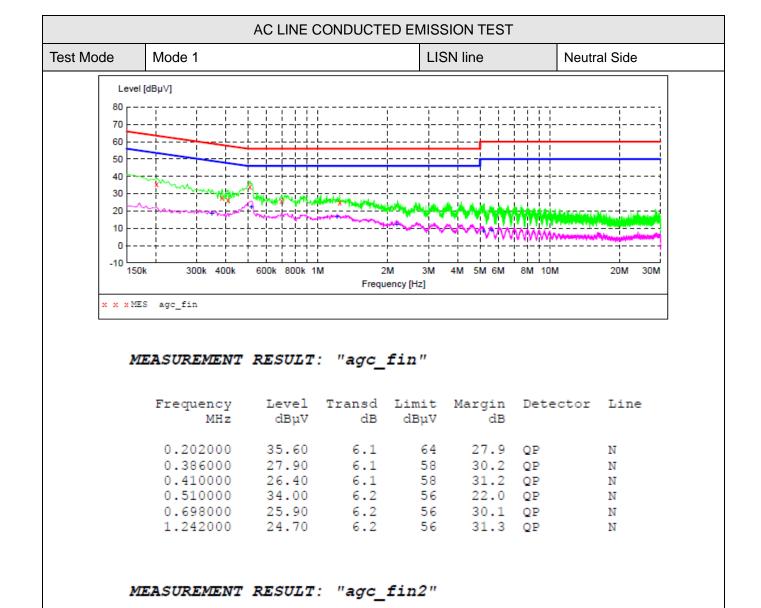

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

dB

6.1

6.2

6.2

6.3

6.4

6.4

dBuV

49

46

46

46

50

50

Transd Limit Margin Detector Line

dB

23.6

29.3

33.7

41.1

30.3 AV

41.3 AV

ΑV

ΑV

ΑV

AV

N

Ν

Ν

Ν

Ν

Ν

Frequency

0.350000

0.518000

1.210000

2.190000

5.174000

5.598000

MHz

Level

18.70

22.40

16.70

12.30

8.70

8.90

dBuV

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 30 of 30

APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC01741230703AP02

APPENDIX II: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC01741230703AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.