


# FCC RADIO TEST REPORT

FCC ID : UZ7CC600  
Equipment : Customer Concierge  
Brand Name : ZEBRA  
Model Name : CC600  
Applicant : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Manufacturer : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jul. 31, 2019 and testing was started from Aug. 21, 2019 and completed on Oct. 23, 2019. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Reviewed by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system .....	11
2.5 EUT Operation Test Setup .....	11
<b>3 Test Result.....</b>	<b>12</b>
3.1 Output Power Measurement.....	12
3.2 Radiated Band Edges and Spurious Emission Measurement .....	14
3.3 Antenna Requirements.....	18
<b>4 List of Measuring Equipment .....</b>	<b>19</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>20</b>
<b>Appendix A. Radiated Spurious Emission</b>	
<b>Appendix B. Radiated Spurious Emission Plots</b>	
<b>Appendix C. Duty Cycle Plots</b>	
<b>Appendix D. Setup Photographs</b>	



## History of this test report

Report No.	Version	Description	Issued Date
FR911110-03A	01	Initial issue of report	Nov. 14, 2019

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(1)	Number of Channels	Not Required	-
-	15.247(a)(1)	Hopping Channel Separation	Not Required	-
-	15.247(a)(1)	Dwell Time of Each Channel	Not Required	-
-	15.247(a)(1)	20dB Bandwidth	Not Required	-
-	2.1049	99% Occupied Bandwidth	Not Required	-
3.1	15.247(b)(1)	Peak Output Power	Pass	-
-	15.247(d)	Conducted Band Edges	Not Required	-
-	15.247(d)	Conducted Spurious Emission	Not Required	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 6.54 dB at 36.790 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.3	15.203 & 15.247(b)	Antenna Requirement	Pass	-

**Remark:**

- Not required means after assessing, test items are not necessary to carry out.
- This is a variant report by changing antenna to external dipole antenna. All the test cases were performed on original report which can be referred to Sporton Report Number FR911110A. Based on the original report, the test cases were verified.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Ruby Zou**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Customer Concierge
Brand Name	ZEBRA
Model Name	CC600
FCC ID	UZ7CC600
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DV
SW Version	01-18-02.00-OG-U00-STD
FW Version	01-18-02.00-OG-U00-STD
MFD	30JUL19
EUT Stage	Engineering Sample

**Remark:** The above EUT's information was declared by manufacturer.

Specification of Accessories				
AC Adaptor	Brand Name	ZEBRA	Model Name	PWR-BUA5V16W0WW
DC cable	Brand Name	ZEBRA	Model Name	CBL-DC-383A1-01
AC Cable	Brand Name	ZEBRA	Model Name	50-16000-182R

Support Unit Used in Test Configuration and System				
POE	Brand Name	Microsemi	Part Number	PD-9501GR/AC

## 1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 0.22 dBm (0.0011 W) Bluetooth EDR (2Mbps) : -0.55 dBm (0.0009 W) Bluetooth EDR (3Mbps) : -0.15 dBm (0.0010 W)
Antenna Type / Gain	External Dipole Antenna with gain 2.30 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.4 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	03CH13-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

## 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

## 2.2 Test Mode

Channel	Frequency	Bluetooth Average Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	-0.37 dBm	-0.38 dBm	-0.43 dBm
Ch39	2441MHz	-0.87 dBm	-0.88 dBm	-0.89 dBm
Ch78	2480MHz	<b>-0.29 dBm</b>	-0.31 dBm	-0.34 dBm

Channel	Frequency	Bluetooth Average Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	-3.97 dBm	-4.07 dBm	-4.08 dBm
Ch39	2441MHz	-4.64 dBm	-4.78 dBm	-4.80 dBm
Ch78	2480MHz	<b>-3.30 dBm</b>	-3.46 dBm	-3.50 dBm

Channel	Frequency	Bluetooth Average Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	-3.94 dBm	-4.05 dBm	-4.06 dBm
Ch39	2441MHz	-4.63 dBm	-4.77 dBm	-4.79 dBm
Ch78	2480MHz	<b>-3.28 dBm</b>	-3.44 dBm	-3.48 dBm



Channel	Frequency	Bluetooth Peak Output Power		
		GFSK / 1Mbps		
		DH1	DH3	DH5
Ch00	2402MHz	0.20 dBm	0.19 dBm	0.18 dBm
Ch39	2441MHz	-0.26 dBm	-0.27 dBm	-0.28 dBm
Ch78	2480MHz	<b>0.22 dBm</b>	0.21 dBm	0.20 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		$\pi/4$ -DQPSK / 2Mbps		
		2DH1	2DH3	2DH5
Ch00	2402MHz	-0.68 dBm	-0.70 dBm	-0.72 dBm
Ch39	2441MHz	-1.40 dBm	-1.47 dBm	-1.48 dBm
Ch78	2480MHz	<b>-0.55 dBm</b>	-0.57 dBm	-0.59 dBm

Channel	Frequency	Bluetooth Peak Output Power		
		8-DPSK / 3Mbps		
		3DH1	3DH3	3DH5
Ch00	2402MHz	-0.26 dBm	-0.28 dBm	-0.30 dBm
Ch39	2441MHz	-0.40 dBm	-0.57 dBm	-0.64 dBm
Ch78	2480MHz	<b>-0.15 dBm</b>	-0.18 dBm	-0.22 dBm

**Remark:** The data rate was set in 1Mbps for all the test items due to the highest RF output power.


The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). And the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi$ /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
<b>Remark:</b> For radiated test cases, the worst mode data rate 1Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 1Mbps, and no other significantly frequencies found in conducted spurious emission.			

## 2.3 Connection Diagram of Test System

<Bluetooth – Tx Mode>

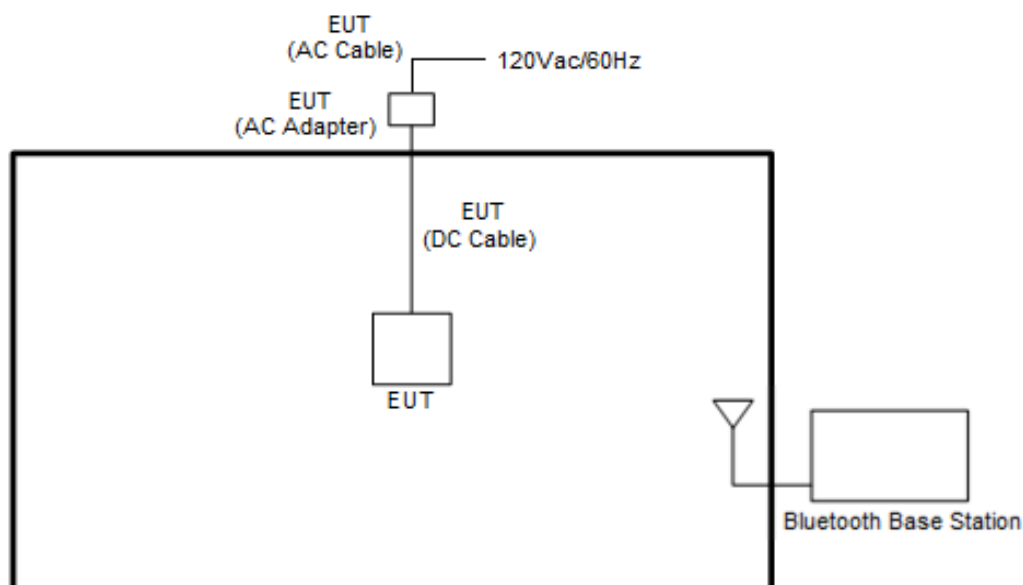

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude E3340	FCC DoC/ Contains FCC ID: PD97260NGU	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	NoteBook	Lenovo	E335	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Base Station	R&S	CBT32	N/A	N/A	Unshielded, 1.8 m

## 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v3.0.271.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to contact with base station to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

### 3 Test Result

#### 3.1 Output Power Measurement

##### 3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:  
For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

##### 3.1.4 Test Setup

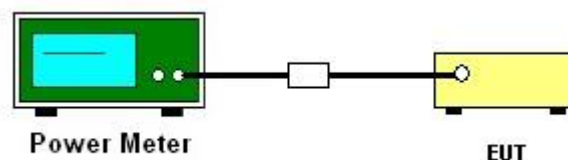

**3.1.5 Test Result of Peak Output Power**

Test Engineer :	Nick Yu			Temperature :	21~25℃
				Relative Humidity :	51~54%
DH	CH.	N <sub>TX</sub>	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	0.20	20.97	Pass
	39	1	-0.26	20.97	Pass
	78	1	0.22	20.97	Pass
2DH	CH.	N <sub>TX</sub>	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	-0.68	20.97	Pass
	39	1	-1.40	20.97	Pass
	78	1	-0.55	20.97	Pass
3DH	CH.	N <sub>TX</sub>	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	-0.26	20.97	Pass
	39	1	-0.40	20.97	Pass
	78	1	-0.15	20.97	Pass

**3.1.6 Test Result of Average Output Power (Reporting Only)**

Test Engineer :	Nick Yu		Temperature :	21~25℃
			Relative Humidity :	51~54%
DH	CH.	N <sub>TX</sub>	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	-0.37	5.16
	39	1	-0.87	5.16
	78	1	-0.29	5.16
2DH	CH.	N <sub>TX</sub>	Average Power (dBm)	Duty Factor (dB)
2DH1	0	1	-3.97	5.07
	39	1	-4.64	5.07
	78	1	-3.30	5.07
3DH	CH.	N <sub>TX</sub>	Average Power (dBm)	Duty Factor (dB)
3DH1	0	1	-3.94	5.07
	39	1	-4.63	5.07
	78	1	-3.28	5.07



## **3.2 Radiated Band Edges and Spurious Emission Measurement**

### **3.2.1 Limit of Radiated Band Edges and Spurious Emission**

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

<b>Frequency (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### **3.2.2 Measuring Instruments**

See list of measuring equipment of this test report.


### 3.2.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz, RBW=1MHz for  $f > 1$ GHz ; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
  - (3) For average measurement: use duty cycle correction factor method per 15.35(c).  
Duty cycle = On time/100 milliseconds  
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$
  
Where  $N_1$  is number of type 1 pulses,  $L_1$  is length of type 1 pulses, etc.  
Average Emission Level = Peak Emission Level +  $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from  $20 \log(\text{dwell time}/100\text{ms})$ . This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

### 3.2.4 Test Setup

For radiated emissions below 30MHz

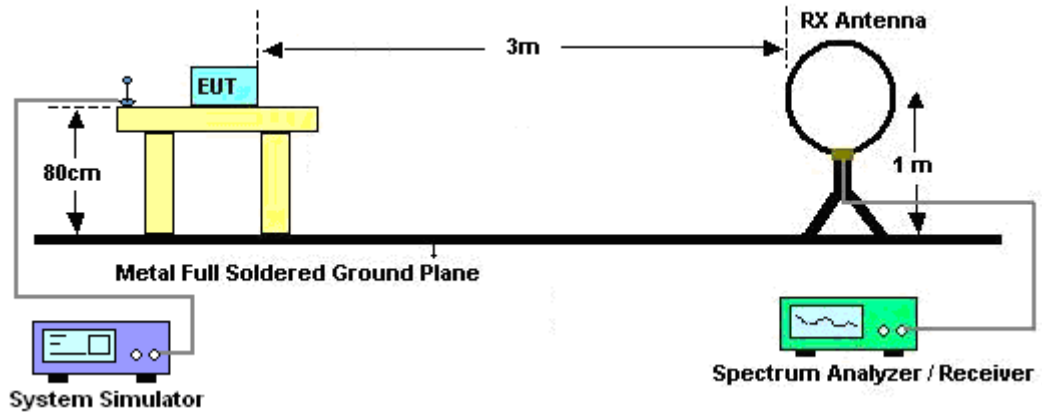


For radiated emissions from 30MHz to 1GHz

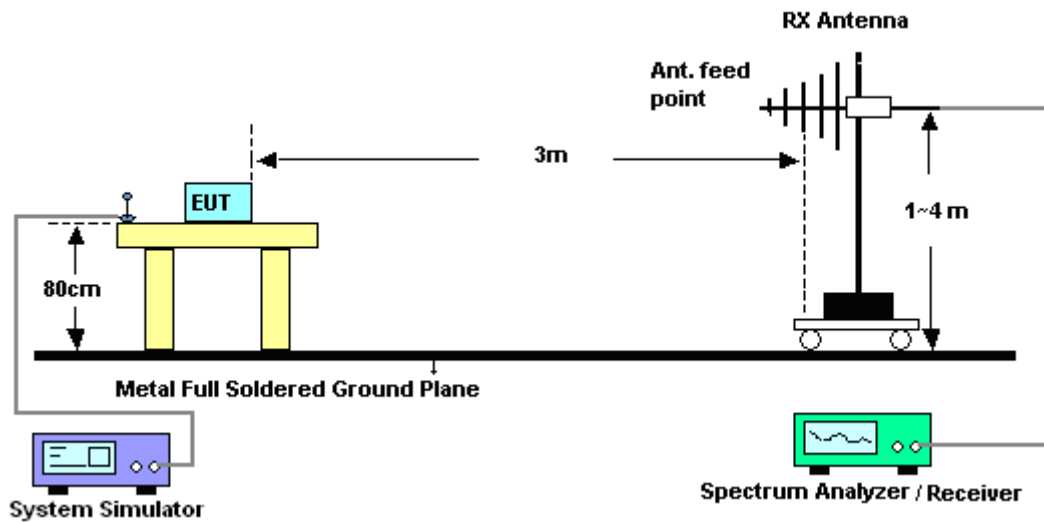



For radiated emissions above 1GHz

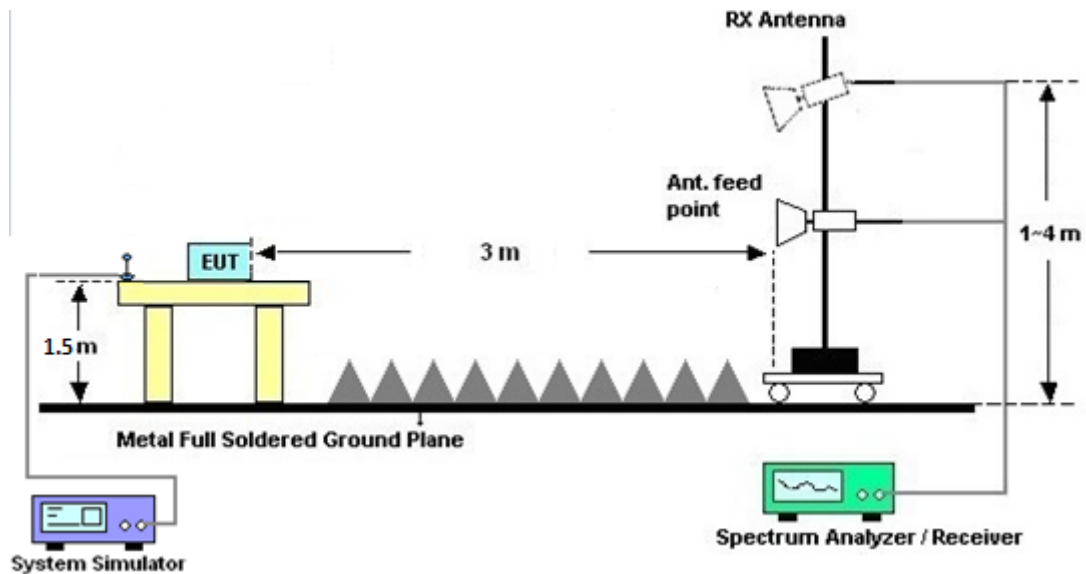

### 3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A and B.

### 3.2.7 Duty Cycle

Please refer to Appendix C.

### 3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix A and B.



### **3.3 Antenna Requirements**

#### **3.3.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### **3.3.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

#### **3.3.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 27, 2018	Aug. 21, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 27, 2018	Aug. 21, 2019	Dec. 26, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 21, 2018	Aug. 21, 2019	Nov. 20, 2019	Conducted (TH05-HY)
BT Base Station(Measure)	Rohde & Schwarz	CBT	101136	BT 3.0	Sep. 26, 2018	Aug. 21, 2019	Sep. 25, 2019	Conducted (TH05-HY)
Switch Box & RF Cable	EM	EMSW18	SW1070903	N/A	Dec. 19, 2018	Aug. 21, 2019	Dec. 18, 2019	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Jan. 06, 2020	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D& 00800N1D01 N-06	40103 & 07	30MHz~1GHz	Apr. 30, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Apr. 29, 2020	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1GHz~18GHz	Jul. 02, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Jul. 01, 2020	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 20, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	May 19, 2020	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Mar. 15, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 14, 2020	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 18, 2018	Sep. 22, 2019 ~ Oct. 23, 2019	Dec. 17, 2019	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 06, 2018	Sep. 22, 2019 ~ Oct. 23, 2019	Dec. 05, 2019	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 19, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 18, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30M-18G	Feb. 13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30M-18G	Feb. 13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30M-18G	Feb. 13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Feb. 12, 2020	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 19, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 18, 2020	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Sep. 22, 2019 ~ Oct. 23, 2019	N/A	Radiation (03CH13-HY)
Software	AUDIX	E3 6.2009-8-24c	RK-001124	N/A	N/A	Sep. 22, 2019 ~ Oct. 23, 2019	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 22, 2019 ~ Oct. 23, 2019	N/A	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY54130085	20Hz ~ 8.4GHz	Nov. 01, 2018	Sep. 22, 2019 ~ Oct. 23, 2019	Oct. 31, 2019	Radiation (03CH13-HY)
Filter	Wainwright	WLKS1200-1 2SS	SN2	1.2GHz Low Pass Filter	Mar. 22, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 21, 2020	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN2	3GHz High Pass Filter	Jul. 14, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Jul. 13, 2020	Radiation (03CH13-HY)
Filter	Woken	WHKX8-5272. 5-6750-18000 -40ST	SN5	6.75G Highpass	Mar.13, 2019	Sep. 22, 2019 ~ Oct. 23, 2019	Mar. 12, 2020	Radiation (03CH13-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9
--	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.4
--	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.3
--	-----



## Appendix A. Radiated Spurious Emission

Test Engineer :	Ryan Lin 、 JC Linag 、 Wilson Wu	Temperature :	21.5~23.5°C
		Relative Humidity :	46.5~49.5%

## 2.4GHz 2400~2483.5MHz

## BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH00 2402MHz		2388.015	43.08	-30.92	74	41.02	27.65	3.99	29.58	109	133	P	H
		2388.015	18.29	-35.71	54	-	-	-	-	-	-	A	H
	*	2402	92.84	-	-	90.82	27.6	4	29.58	109	133	P	H
	*	2402	68.05	-	-	-	-	-	-	-	-	A	H
													H
		2338.875	42.45	-31.55	74	40.27	27.82	3.95	29.59	388	217	P	V
		2338.875	17.66	-36.34	54	-	-	-	-	-	-	A	V
	*	2402	93.81	-	-	91.79	27.6	4	29.58	388	217	P	V
	*	2402	69.02	-	-	-	-	-	-	-	-	A	V
													V
BT CH 39 2441MHz		2330.58	42.86	-31.14	74	40.67	27.84	3.94	29.59	113	135	P	H
		2330.58	18.07	-35.93	54	-	-	-	-	-	-	A	H
	*	2441	93.41	-	-	91.44	27.52	4.03	29.58	113	135	P	H
	*	2441	68.62	-	-	-	-	-	-	-	-	A	H
		2487.68	42.85	-31.15	74	40.85	27.5	4.07	29.57	113	135	P	H
		2487.68	18.06	-35.94	54	-	-	-	-	-	-	A	H
		2312.52	43.01	-30.99	74	40.8	27.87	3.93	29.59	400	214	P	V
		2312.52	18.22	-35.78	54	-	-	-	-	-	-	A	V
	*	2441	94.81	-	-	92.84	27.52	4.03	29.58	400	214	P	V
	*	2441	70.02	-	-	-	-	-	-	-	-	A	V
		2485.51	43.23	-30.77	74	41.23	27.5	4.07	29.57	400	214	P	V
		2485.51	18.44	-35.56	54	-	-	-	-	-	-	A	V



<b>BT CH 78 2480MHz</b>	*	2480	95.75	-	-	93.75	27.5	4.07	29.57	127	151	P	H
	*	2480	70.96	-	-	-	-	-	-	-	-	A	H
		2495.92	43.06	-30.94	74	41.05	27.5	4.08	29.57	127	151	P	H
		2495.92	18.27	-35.73	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	97.25	-	-	95.25	27.5	4.07	29.57	397	214	P	V
	*	2480	72.46	-	-	-	-	-	-	-	-	A	V
		2483.64	43.99	-30.01	74	41.99	27.5	4.07	29.57	397	214	P	V
		2483.64	19.2	-34.8	54	-	-	-	-	-	-	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BT (Harmonic @ 3m)

BT	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BT CH 00 2402MHz		4804	36	-38	74	56.1	31.11	6.38	57.59	100	0	P	H
													H
		4804	36.04	-37.96	74	56.14	31.11	6.38	57.59	100	0	P	V
													V
													V
BT CH 39 2441MHz		4882	37.47	-36.53	74	57.11	31.2	6.6	57.44	100	0	P	H
		7323	42.5	-31.5	74	54.81	36.75	8.23	57.29	100	0	P	H
													H
													H
		4882	36.34	-37.66	74	55.98	31.2	6.6	57.44	100	0	P	V
		7323	42.9	-31.1	74	55.21	36.75	8.23	57.29	100	0	P	V
													V
													V
BT CH 78 2480MHz		4960	36.52	-37.48	74	55.62	31.36	6.82	57.28	100	0	P	H
		7440	42.93	-31.07	74	55.48	36.68	8.2	57.43	100	0	P	H
													H
													H
		4960	38.17	-35.83	74	57.27	31.36	6.82	57.28	100	0	P	V
		7440	43.28	-30.72	74	55.83	36.68	8.2	57.43	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## Emission below 1GHz

## 2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz BT LF		66.86	30.72	-9.28	40	50.47	11.86	0.65	32.26	-	-	P	H
		118.27	35.64	-7.86	43.5	49.87	17.03	0.94	32.2	100	0	P	H
		135.73	34.91	-8.59	43.5	48.85	17.23	1.01	32.18	-	-	P	H
		212.36	35.8	-7.7	43.5	52.01	14.66	1.27	32.14	-	-	P	H
		878.75	31.76	-14.24	46	32.03	28.62	2.62	31.51	-	-	P	H
		958.29	33.7	-12.3	46	31.26	30.67	2.68	30.91	-	-	P	H
													H
													H
		36.79	33.46	-6.54	40	44.13	21.13	0.49	32.29	100	0	P	V
		66.86	33.12	-6.88	40	52.87	11.86	0.65	32.26	-	-	P	V
		122.15	28.93	-14.57	43.5	42.97	17.19	0.96	32.19	-	-	P	V
		165.8	30.44	-13.06	43.5	45.88	15.62	1.1	32.16	-	-	P	V
		222.06	28.23	-17.77	46	43.97	15.12	1.28	32.14	-	-	P	V
		950.53	33.73	-12.27	46	31.54	30.51	2.66	30.98	-	-	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical

**A calculation example for radiated spurious emission is shown as below:**

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix B. Radiated Spurious Emission Plots

<b>Test Engineer :</b>	Ryan Lin 、 JC Linag 、 Wilson Wu	<b>Temperature :</b>	21.5~23.5°C
		<b>Relative Humidity :</b>	46.5~49.5%



### Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

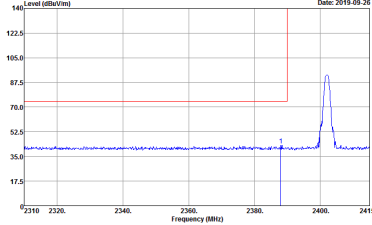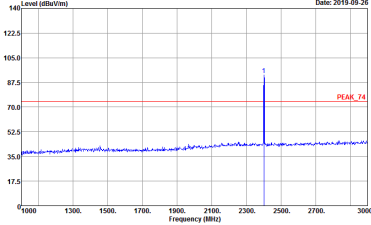BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH13-1FV Condition : PEAK_BE_74 3m HORN_9120D_1241 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Deflector : Peak Project : 911110-03 Mode : 1</p></div>	<div><p>Site : 03CH13-1FV Condition : PEAK_74 3m HORN_9120D_1241 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Deflector : Peak Project : 911110-03 Mode : 1</p></div>


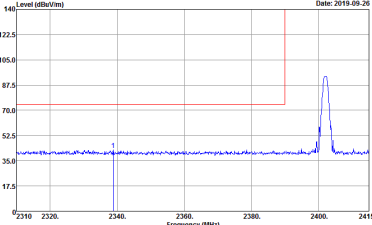
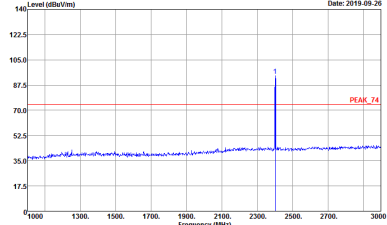


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH00 2402MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH13-HV Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 1</p></div>	<div><p>Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 1</p></div>

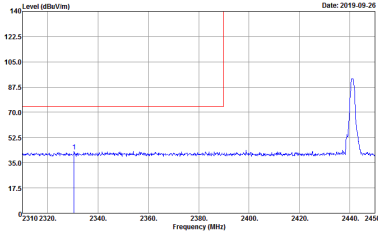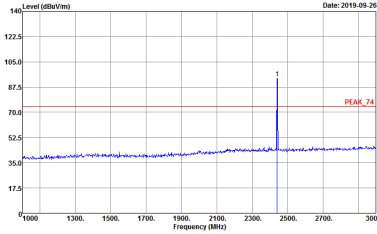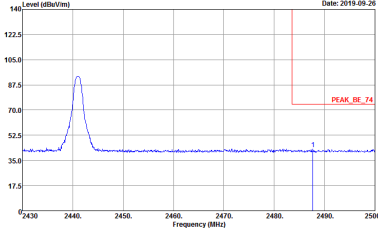

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 2</p></div>	<div><p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 2</p></div>
Peak	<div><p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 2</p></div>	Left blank

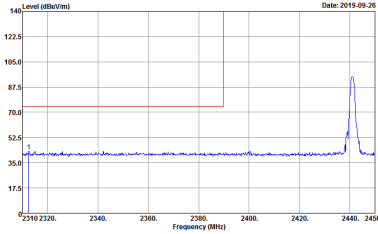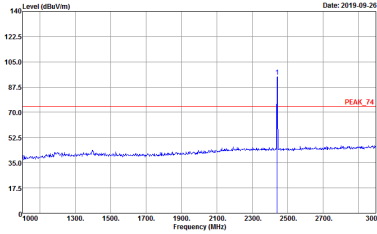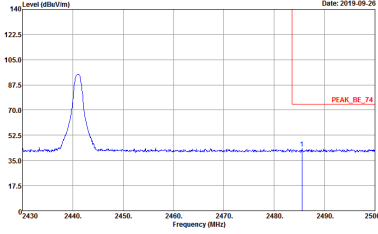



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH39 2441MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 2</p></div>	<div><p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 2</p></div>
Peak	<div><p>Site : 03CH13-HY Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 2</p></div>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Horizontal	Fundamental
Peak	<div><p>Site : 03CH13-HV Condition : PEAK_BE_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 3</p></div>	<div><p>Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 3</p></div>



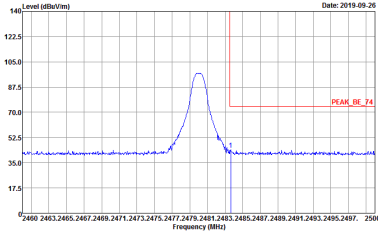
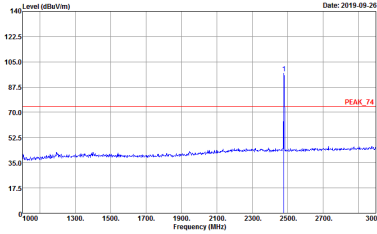


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BT CH78 2480MHz	
	Vertical	Fundamental
Peak	<div><p>Site : 03CH13-HV Condition : PEAK_BE_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 3</p></div>	<div><p>Site : 03CH13-HV Condition : PEAK_74 3m HORN_91200_1241 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 911110-03 Mode : 3</p></div>



2.4GHz 2400~2483.5MHz



BT (Harmonic @ 3m)

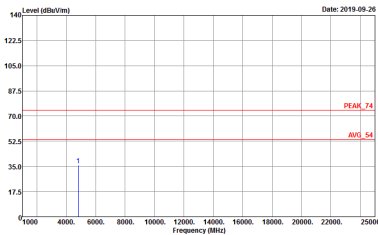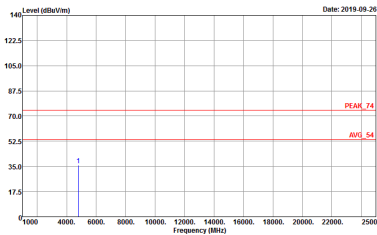BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 911110-03 Mode : 1</p></div>	<div><p>Site : 03CH13-HY Condition : PEAK_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110-03 Mode : 1</p></div>



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH39 2441MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Site : 03CH13-4V Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 911110-03 Mode : 2</p></div>	<div><p>Site : 03CH13-4V Condition : PEAK_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110-03 Mode : 2</p></div>

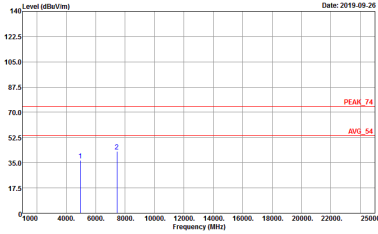
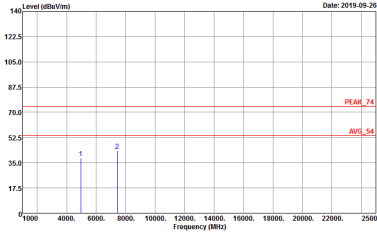


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BT CH78 2480MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Site : 03CH13-4V Condition : PEAK_74 3m HORN_91200_1241 HORIZONTAL Detector : Peak Project : 911110-03 Mode : 3</p></div>	<div><p>Site : 03CH13-4V Condition : PEAK_74 3m HORN_91200_1241 VERTICAL Detector : Peak Project : 911110-03 Mode : 3</p></div>





Emission below 1GHz

2.4GHz BT (LF)

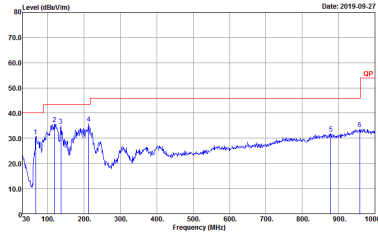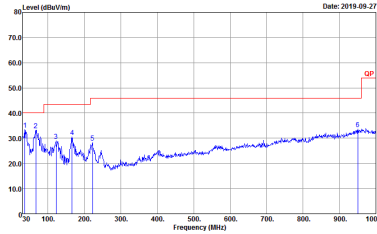BT	2.4GHz 2400~2483.5MHz	
	BT LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH13-HY Condition : QP 3m BTLOG_40103 HORIZONTAL Detector : Peak Project : 911110-03 Mode : 53</p>	 <p>Site : 03CH13-HY Condition : QP 3m BTLOG_40103 VERTICAL Detector : Peak Project : 911110-03 Mode : 53</p>

## Appendix C. Duty Cycle Plots

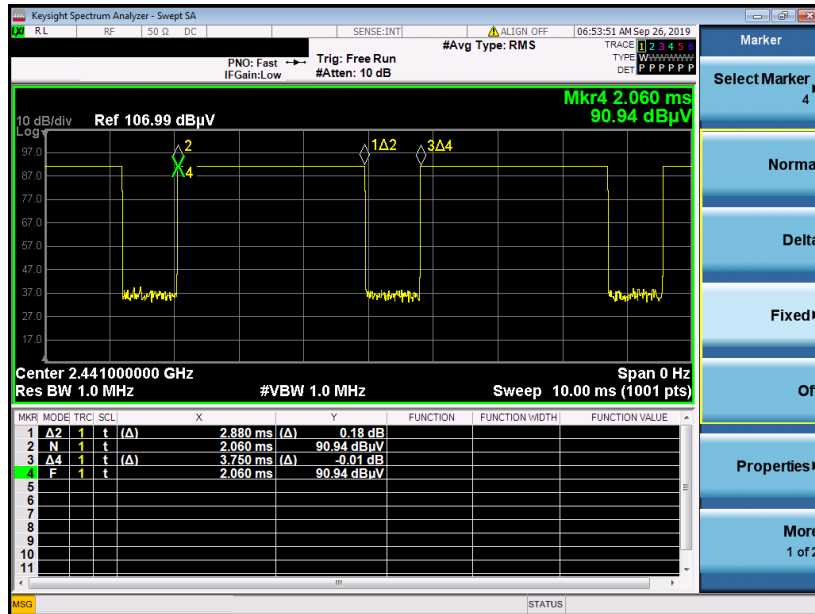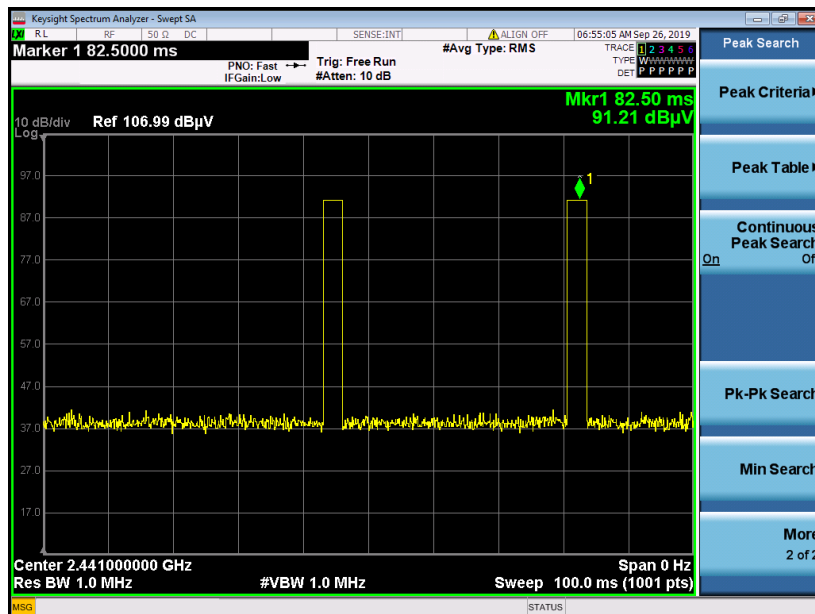**DH5 on time (One Pulse) Plot on Channel 39**

**on time (Count Pulses) Plot on Channel 39**

**Note:**

1. Worst case Duty cycle = on time/100 milliseconds =  $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor =  $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

**Duty Cycle Correction Factor Consideration for AFH mode:**

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$