



FCC TEST REPORT

FCC ID: 2ABGJ-CG-11

On Behalf of

Portal 724, LLC

RPM Hub

Model No.: CG-11

Prepared for : Portal 724, LLC
Address : 275 Hartz Way:: 105, Secaucus, New Jersey, United States, 07094

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2503167-C01-R03
Date of Receipt : December 4, 2024
Date of Test : December 4, 2024-March 25, 2025
Date of Report : April 10, 2025
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of Connection Between EUT and Simulators	8
2.5. Test Mode Description	9
2.6. Software test version and power setting information	10
2.7. Test Conditions	10
2.8. Test Facility	11
2.9. Measurement Uncertainty	11
2.10. Test Equipment List	12
3. Spurious Emission	13
3.1. Test Limits	13
3.2. Block Diagram of Test setup	16
3.3. Test Procedure	17
3.4. Test Results	18
4. Power Line Conducted Emission	29
4.1. Test Limits	29
4.2. Test Procedure	29
4.3. Test Setup	29
4.4. Test Results	30
5. Out-of-band Emissions	33
5.1. Test Limits	33
5.2. Test Procedure	33
5.3. Test Setup	33
5.4. Test Results	33
6. Conducted Maximum Output Power	79
6.1. Test limits	79
6.2. Test Procedure	79
6.3. Test Setup	79
6.4. Test Results	79
7. Peak Power Spectral Density	80
7.1. Test limits	80
7.2. Test Procedure	80
7.3. Test Setup	80
7.4. Test Results	81
8. Bandwidth	91
8.1. Test limits	91
8.2. Test Procedure	91
8.3. Test Setup	91
8.4. Test Results	91

9. DUTY CYCLE	111
10. Band Edge Test	121
10.1. Block Diagram of Test Setup	121
10.2. Test Limit	121
10.3. Test Procedure	121
10.4. Test Results	122
11. Frequency stability	128
11.1. Test limit	128
11.2. Test Procedure	128
11.3. Test Setup	128
11.4. Test Results	128
12. Antenna Requirement	129
12.1. Standard Requirement	129
12.2. Antenna Connected Construction	129
12.3. Results	129
13. Photos of test setup	130
14. Photos of EUT	130

TEST REPORT DECLARATION

Applicant : Portal 724, LLC
Address : 275 Hartz Way:: 105, Secaucus, New Jersey, United States, 07094
Manufacturer : Shenzhen Jinwu Technologies Co., Ltd.
4th Floor, Building R3-A, Gaoxin Industrial Park of No. 018 of Gaoxin
Address : South 7th Road, Gaoxin District Community, Yuehai Street, Nanshan
District, Shenzhen
EUT Description : RPM Hub
(A) Model No. : CG-11
(B) Trademark : CAREdotGLOBAL

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
Test Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....:

April 10, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	April 9, 2025	Initial released Issue	Felix Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 RSS-GEN(8.8), ANSI C63.10 :2013	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) RSS-247(5.2 a), ANSI C63.10 :2013	P
Output Power	FCC Part 15: 15.247(b)(3) RSS-247(5.4 d), ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2013	P
Power Spectral Density	FCC PART 15:15.247(e) RSS-247(5.2 b), ANSI C63.10 :2013	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) RSS-GEN(6.13), ANSI C63.10 :2013	P
Frequency stability	RSS-GEN(6.11)	N/A
Antenna Requirement	FCC Part 15: 15.203 RSS-GEN(6.8)	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty. 5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.		

2. General Information

2.1. Description of Device (EUT)

Product Name	: RPM Hub
Model	: CG-11
Diff	: /
Test Voltage	: Input: 5 V $\pm$ 3 A or DC 7.74 V powered by battery
Adapter	: /
Radio technology	: 2.4G WiFi
Operation frequency	: 2412-2462MHz for 802.11b/g/n20/ax20; 2422-2452MHz for 802.11n40/ax40;
Channel No.	: 11 channels for 802.11b/g/n20/ax20; 7 channels for 802.11n40/ax40;
Modulation type	: 802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20)/ ax(20)/ ax(40)n(40): DSSS (CCK, DQPSK,DBPSK)+OFDM+OFAMA (QPSK, BPSK, 16-QAM, 64-QAM)
Antenna Type	: FPC Antenna, maximum gain is 1.9 dBi.
PMN	: N/A
HVIN	: N/A
Software version	: V1.0
Hardware version/FVIN	: V1.0
Note	: Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information.


2.2. Accessories of Device (EUT)

Accessories 1 : /
Manufacturer : /
Model : /
Rating : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	/	M20-C020AUS	/

2.4. Block Diagram of Connection Between EUT and Simulators

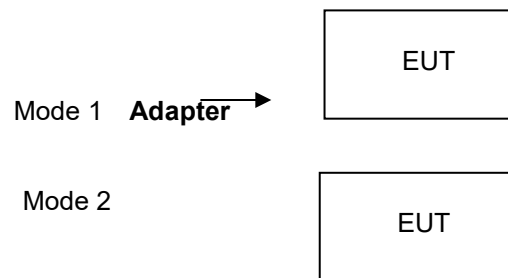

2.5. Test Mode Description

Keeping TX			
Mode	Data rate (Mbps)	Channel	Frequency(MHz)
IEEE 802.11 b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11 g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n, ax/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n, ax/HT40	13.5	Low :CH1	2422
	13.5	Middle:CH4	2437
	13.5	High:CH7	2452
Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.			

Channel list:

For IEEE 802.11b, g, n, ax/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

For IEEE 802.11 n, ax/HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2422	CH5	2442		
CH2	2427	CH6	2447		
CH3	2432	CH7	2452		
CH4	2437				

2.6. Software test version and power setting information

Software testing version	Realtek 11n 8723B USB WLAN MP.exe		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
IEEE 802.11b/g/n/ax20	Low :CH1	2412	TX level is set as defaults value.
	Middle: CH6	2437	TX level is set as defaults value.
	High: CH11	2462	TX level is set as defaults value.
IEEE 802.11n/ax40	Low :CH1	2422	TX level is set as defaults value.
	Middle:CH4	2437	TX level is set as defaults value.
	High:CH7	2452	TX level is set as defaults value.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz

2.10.Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G1 8G-45dB	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118 G-45	SK20200108 01	/	2024.12.18	1 Year
12	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.0 2-1111533-Fz	/	2024.12.18	1 Year
13	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38		2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

3. Spurious Emission

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0

6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSS.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/F(\text{KHz})$	/
0.490-1.705	30	$24000/F(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

3.2. Block Diagram of Test setup


3.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

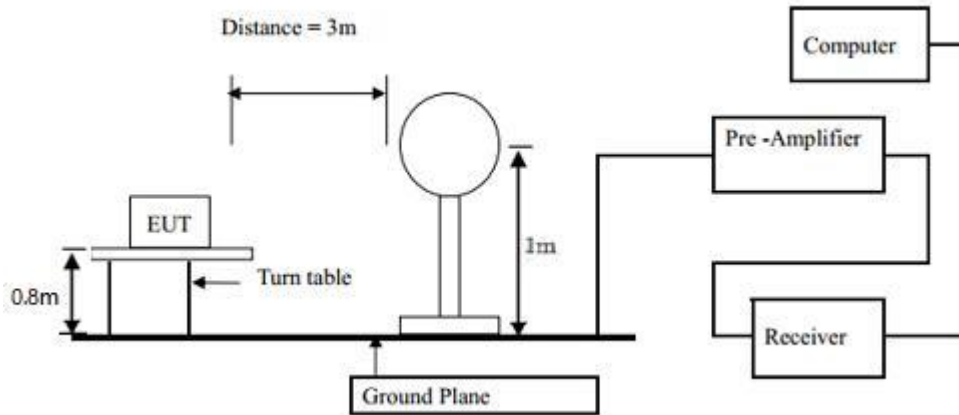

3.2.2 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

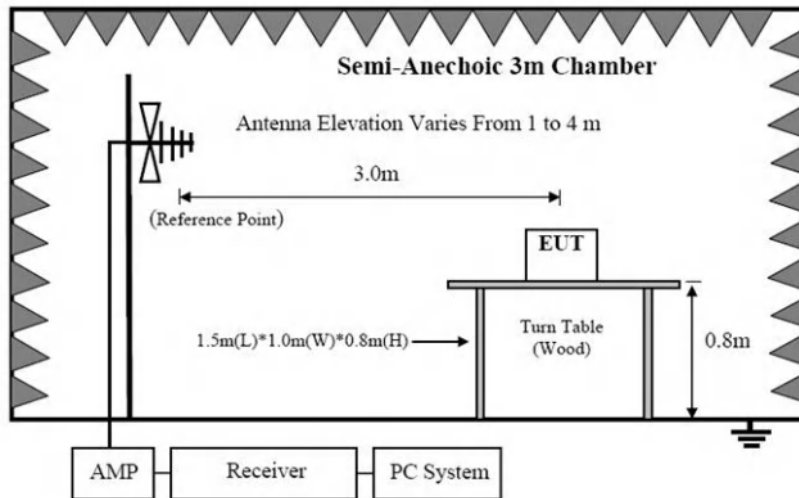

3.2.3 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

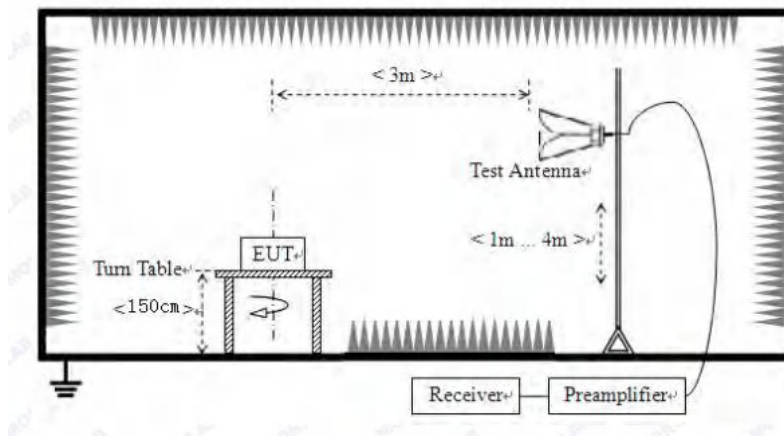

3.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

Test setup information:


9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHZ~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

3.4. Test Results

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz:	
Test Date : 2024.12.10	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : IEEE 802.11ax mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of IEEE 802.11b mode, Channel 2412MHz was listed in this report.

Polarization: Horizontal

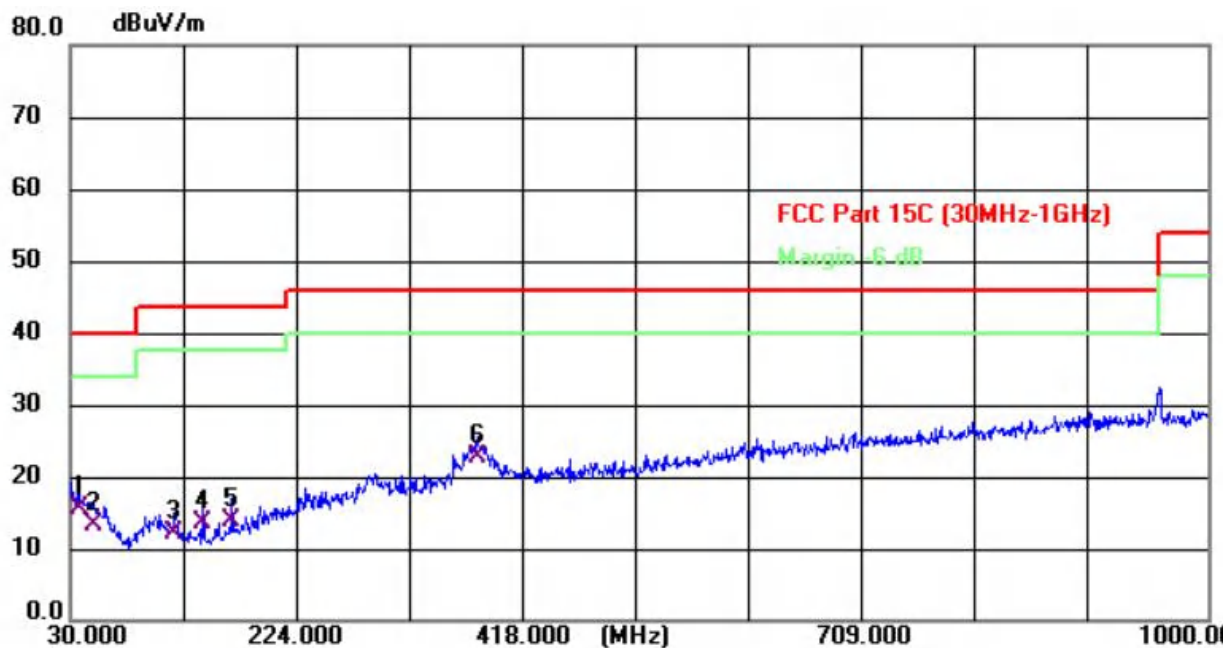

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.760	23.99	-8.47	15.52	40.00	-24.48	QP
2	50.370	22.69	-9.40	13.29	40.00	-26.71	QP
3	119.240	24.90	-12.85	12.05	43.50	-31.45	QP
4	143.490	27.59	-13.88	13.71	43.50	-29.79	QP
5	167.740	27.02	-13.16	13.86	43.50	-29.64	QP
6 *	377.260	29.19	-6.48	22.71	46.00	-23.29	QP

Level = Reading + Factor Margin = Level - Limit

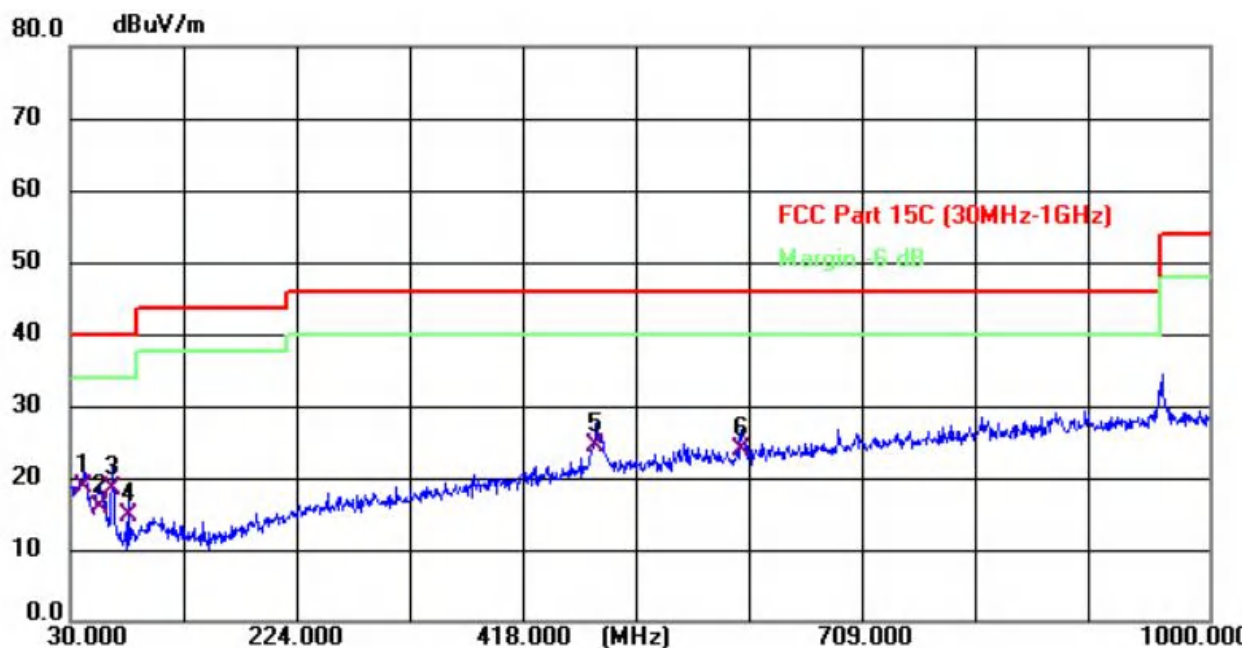Polarization: Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	41.640	27.40	-8.67	18.73	40.00	-21.27	QP
2	56.190	26.13	-10.18	15.95	40.00	-24.05	QP
3	65.890	30.75	-12.24	18.51	40.00	-21.49	QP
4	79.470	28.94	-14.31	14.63	40.00	-25.37	QP
5	478.140	29.07	-4.54	24.53	46.00	-21.47	QP
6	601.330	25.93	-2.19	23.74	46.00	-22.26	QP

Level = Reading + Factor Margin = Level - Limit

From 1GHz to 25GHz:	
Test Date : 2024.12.10	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : WiFi mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Mode : IEEE 802.11b TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	59.43	-13.25	46.18	74	-27.82	Peak
2	4824	V	48.33	-13.25	35.08	54	-18.92	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	58.52	-13.25	45.27	74	-28.73	Peak
6	4824	H	47.13	-13.25	33.88	54	-20.12	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX Mid								
1	4874	V	58.05	-12.98	45.07	74	-28.93	Peak
2	4874	V	48.58	-12.98	35.6	54	-18.4	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	58.88	-12.98	45.9	74	-28.1	Peak
6	4874	H	48.37	-12.98	35.39	54	-18.61	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX High								
1	4924	V	58.26	-12.7	45.56	74	-28.44	Peak
2	4924	V	47.57	-12.7	34.87	54	-19.13	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	57.17	-12.7	44.47	74	-29.53	Peak
6	4924	H	48.58	-12.7	35.88	54	-18.12	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11g TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	57.67	-13.25	44.42	74	-29.58	Peak
2	4824	V	48.17	-13.25	34.92	54	-19.08	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	59.17	-13.25	45.92	74	-28.08	Peak
6	4824	H	48.06	-13.25	34.81	54	-19.19	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX Mid								
1	4874	V	58.72	-12.98	45.74	74	-28.26	Peak
2	4874	V	48.39	-12.98	35.41	54	-18.59	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	57.26	-12.98	44.28	74	-29.72	Peak
6	4874	H	48.34	-12.98	35.36	54	-18.64	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX High								
1	4924	V	57.81	-12.7	45.11	74	-28.89	Peak
2	4924	V	47.67	-12.7	34.97	54	-19.03	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	58.33	-12.7	45.63	74	-28.37	Peak
6	4924	H	47.74	-12.7	35.04	54	-18.96	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11n/HT20 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	57.67	-13.25	44.42	74	-29.58	Peak
2	4824	V	47.31	-13.25	34.06	54	-19.94	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	58.8	-13.25	45.55	74	-28.45	Peak
6	4824	H	48.67	-13.25	35.42	54	-18.58	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX Mid								
1	4874	V	57.37	-12.98	44.39	74	-29.61	Peak
2	4874	V	48.38	-12.98	35.4	54	-18.6	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	57.55	-12.98	44.57	74	-29.43	Peak
6	4874	H	47.24	-12.98	34.26	54	-19.74	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX High								
1	4924	V	58.54	-12.7	45.84	74	-28.16	Peak
2	4924	V	47.44	-12.7	34.74	54	-19.26	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	57.41	-12.7	44.71	74	-29.29	Peak
6	4924	H	48.48	-12.7	35.78	54	-18.22	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11ax/HT20 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	57.34	-13.25	44.09	74	-29.91	Peak
2	4824	V	48.93	-13.25	35.68	54	-18.32	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	59.89	-13.25	46.64	74	-27.36	Peak
6	4824	H	47.34	-13.25	34.09	54	-19.91	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11ax/HT20 TX Mid								
1	4874	V	59.52	-12.98	46.54	74	-27.46	Peak
2	4874	V	48.82	-12.98	35.84	54	-18.16	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	58.78	-12.98	45.8	74	-28.2	Peak
6	4874	H	48.83	-12.98	35.85	54	-18.15	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11ax/HT20 TX High								
1	4924	V	59.95	-12.7	47.25	74	-26.75	Peak
2	4924	V	47.84	-12.7	35.14	54	-18.86	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	58.05	-12.7	46.5	74	-27.5	Peak
6	4924	H	47.48	-12.7	34.82	54	-19.18	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11n/HT40 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4844	V	57.85	-13.25	44.6	74	-29.4	Peak
2	4844	V	47.96	-13.25	34.71	54	-19.29	Avg
3	7266	--	--	--	--	--	--	--
4	9688	--	--	--	--	--	--	--
5	4844	H	58.19	-13.25	44.94	74	-29.06	Peak
6	4844	H	48.03	-13.25	34.78	54	-19.22	Avg
7	7266	--	--	--	--	--	--	--
8	9688	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT40 TX Mid								
1	4874	V	58.41	-12.98	45.43	74	-28.57	Peak
2	4874	V	47.19	-12.98	34.21	54	-19.79	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	58.57	-12.98	45.59	74	-28.41	Peak
6	4874	H	48.23	-12.98	35.25	54	-18.75	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT40 TX High								
1	4904	V	58.34	-12.7	45.64	74	-28.36	Peak
2	4904	V	47.44	-12.7	34.74	54	-19.26	Avg
3	7356	--	--	--	--	--	--	--
4	9808	--	--	--	--	--	--	--
5	4904	H	59.96	-12.7	47.26	74	-26.74	Peak
6	4904	H	48.09	-12.7	35.39	54	-18.61	Avg
7	7356	--	--	--	--	--	--	--
8	9808	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

Test Mode : IEEE 802.11ax/HT40 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4844	V	58.89	-13.25	45.64	74	-28.36	Peak
2	4844	V	47.57	-13.25	34.32	54	-19.68	Avg
3	7266	--	--	--	--	--	--	--
4	9688	--	--	--	--	--	--	--
5	4844	H	59.96	-13.25	46.71	74	-27.29	Peak
6	4844	H	47.28	-13.25	34.03	54	-19.97	Avg
7	7266	--	--	--	--	--	--	--
8	9688	--	--	--	--	--	--	--
Test Mode : IEEE 802.11ax/HT40 TX Mid								
1	4874	V	57.75	-12.98	44.77	74	-29.23	Peak
2	4874	V	47.33	-12.98	34.35	54	-19.65	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	58.68	-12.98	45.7	74	-28.3	Peak
6	4874	H	47.4	-12.98	34.42	54	-19.58	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11ax/HT40 TX High								
1	4904	V	58.48	-12.7	45.78	74	-28.22	Peak
2	4904	V	47.83	-12.7	35.13	54	-18.87	Avg
3	7356	--	--	--	--	--	--	--
4	9808	--	--	--	--	--	--	--
5	4904	H	58.18	-12.7	46.5	74	-27.5	Peak
6	4904	H	47.1	-12.7	34.82	54	-19.18	Avg
7	7356	--	--	--	--	--	--	--
8	9808	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

4. Power Line Conducted Emission

4.1. Test Limits

Frequency (MHz)	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

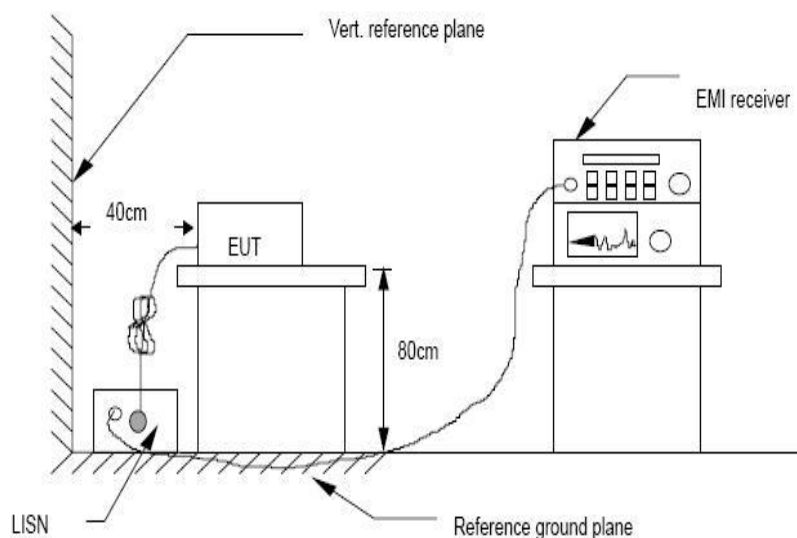


4.4. Test Results

Test Date	: 2024.12.09	Temperature	: 26℃
Test Engineer	: Felix Pang	Humidity	: 54%
Test Mode	: WIFI mode		
Test Results	: PASS		

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.
3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.
4. All modes have been tested, and only worst data of b mode, Channel 2412MHz (AC 120V/ 60Hz) was listed in this report.


Polarization: L

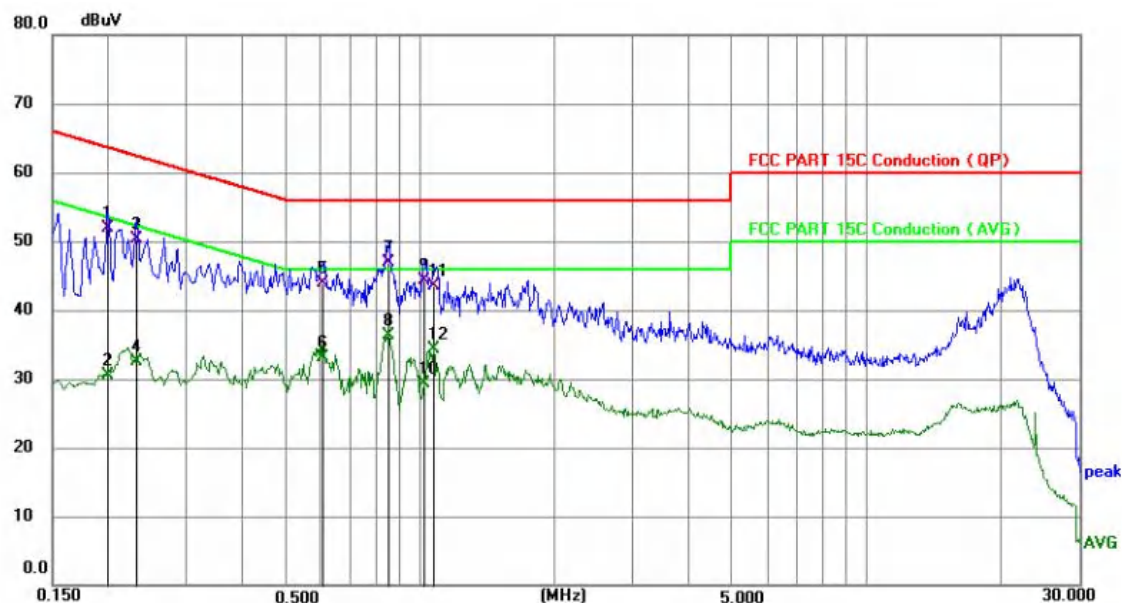

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1997	41.93	9.91	51.84	63.62	-11.78	QP	P	
2	0.1997	20.57	9.91	30.48	53.62	-23.14	AVG	P	
3	0.2316	40.32	9.92	50.24	62.39	-12.15	QP	P	
4	0.2316	22.64	9.92	32.56	52.39	-19.83	AVG	P	
5	0.6043	33.96	10.03	43.99	56.00	-12.01	QP	P	
6	0.6043	23.17	10.03	33.20	46.00	-12.80	AVG	P	
7 *	0.8483	36.81	10.05	46.86	56.00	-9.14	QP	P	
8	0.8483	26.30	10.05	36.35	46.00	-9.65	AVG	P	
9	1.0211	34.23	10.06	44.29	56.00	-11.71	QP	P	
10	1.0211	19.21	10.06	29.27	46.00	-16.73	AVG	P	
11	1.0710	33.42	10.06	43.48	56.00	-12.52	QP	P	
12	1.0710	24.34	10.06	34.40	46.00	-11.60	AVG	P	

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: N

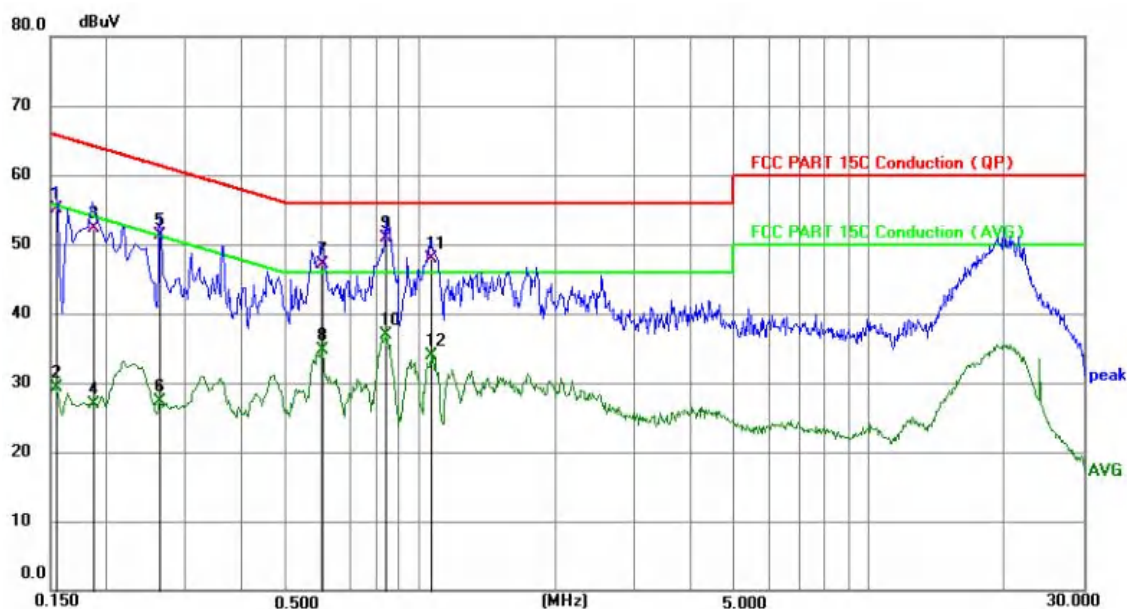

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1544	45.31	9.89	55.20	65.76	-10.56	QP	P	
2	0.1544	19.32	9.89	29.21	55.76	-26.55	AVG	P	
3	0.1873	42.39	9.90	52.29	64.16	-11.87	QP	P	
4	0.1873	16.99	9.90	26.89	54.16	-27.27	AVG	P	
5	0.2625	41.32	9.94	51.26	61.35	-10.09	QP	P	
6	0.2625	17.38	9.94	27.32	51.35	-24.03	AVG	P	
7	0.6045	36.98	10.03	47.01	56.00	-8.99	QP	P	
8	0.6045	24.60	10.03	34.63	46.00	-11.37	AVG	P	
9 *	0.8385	40.92	10.05	50.97	56.00	-5.03	QP	P	
10	0.8385	26.84	10.05	36.89	46.00	-9.11	AVG	P	
11	1.0590	37.93	10.06	47.99	56.00	-8.01	QP	P	
12	1.0590	23.81	10.06	33.87	46.00	-12.13	AVG	P	

Note: Level = Reading + Factor Margin = Level - Limit

5. Out-of-band Emissions


5.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required. Please refer section 15.247.

5.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

5.3. Test Setup




5.4. Test Results


PASS.


The test results are listed in next pages.


Band Edge: Pass.


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-42.32	-20	Pass
NVNT	b	2462	Ant1	-60.09	-20	Pass
NVNT	g	2412	Ant1	-29.43	-20	Pass
NVNT	g	2462	Ant1	-41.18	-20	Pass
NVNT	n20	2412	Ant1	-29.54	-20	Pass
NVNT	n20	2462	Ant1	-40.39	-20	Pass
NVNT	n40	2422	Ant1	-31.51	-20	Pass
NVNT	n40	2452	Ant1	-38.15	-20	Pass
NVNT	ax20	2412	Ant1	-27.65	-20	Pass
NVNT	ax20	2462	Ant1	-39.02	-20	Pass
NVNT	ax40	2422	Ant1	-33.08	-20	Pass
NVNT	ax40	2452	Ant1	-37.17	-20	Pass

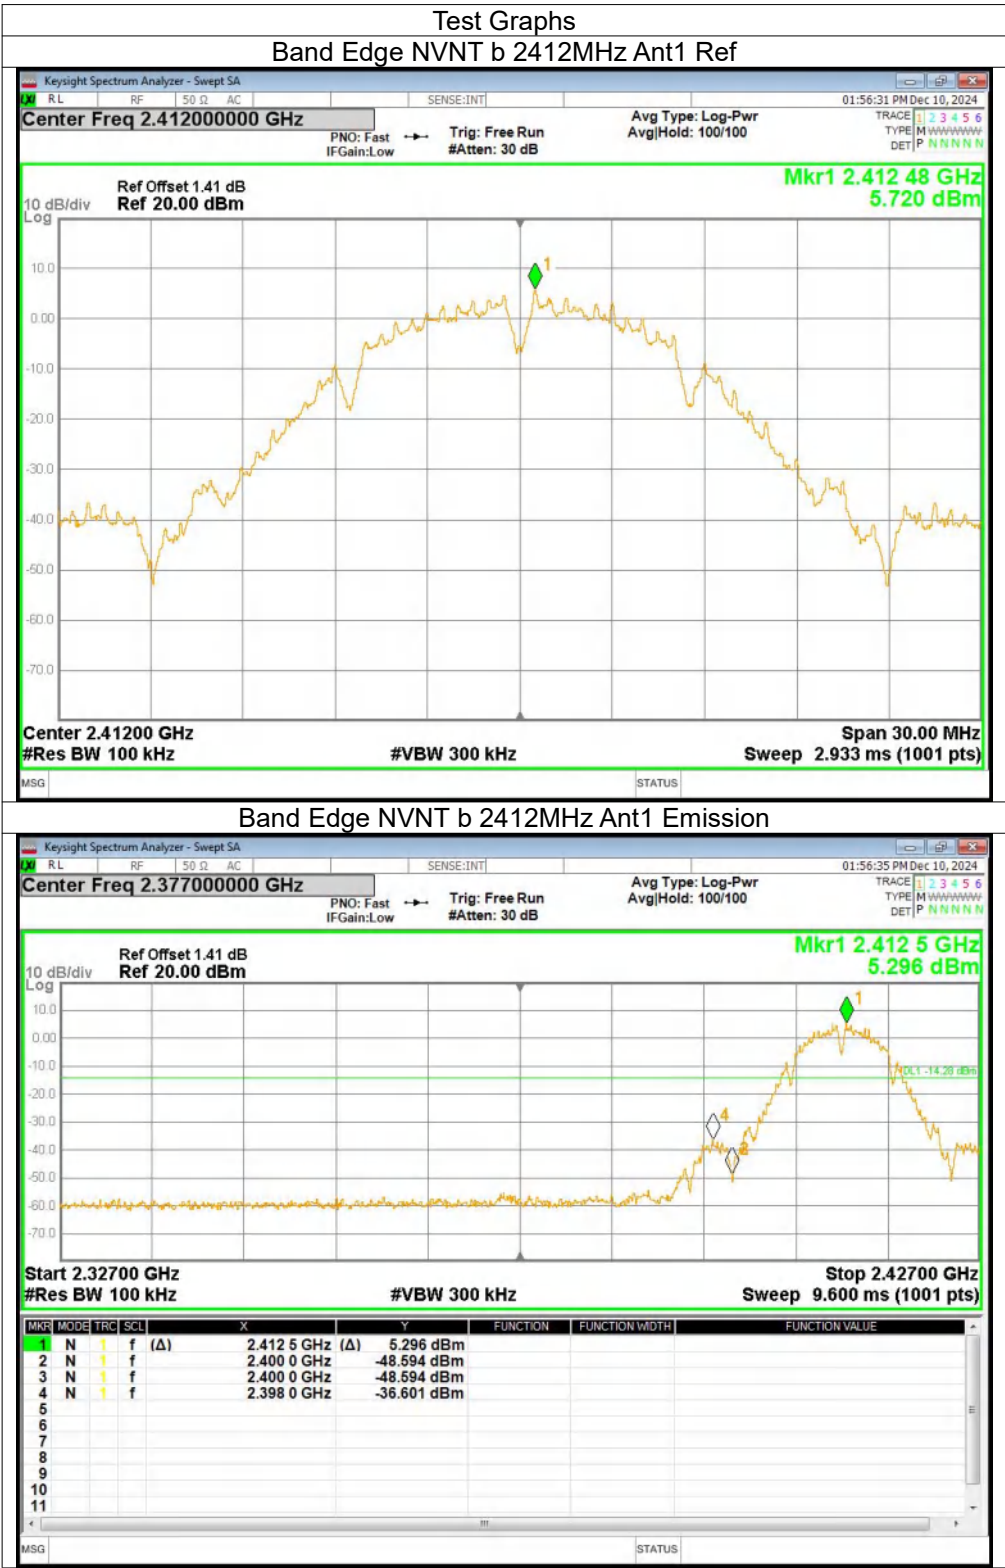


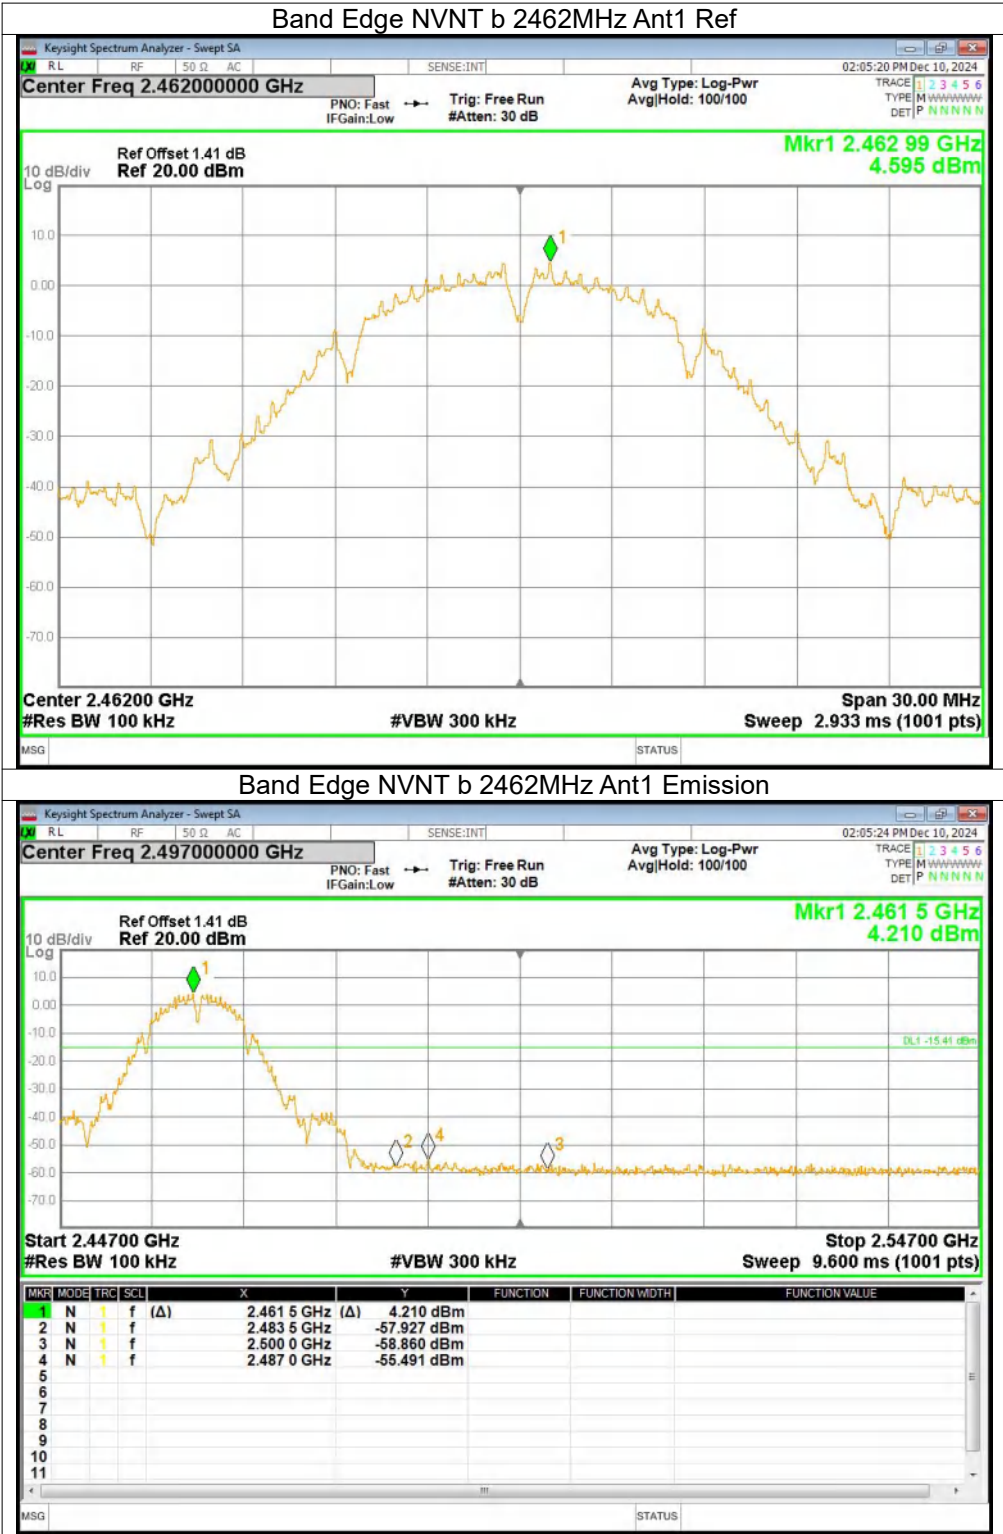


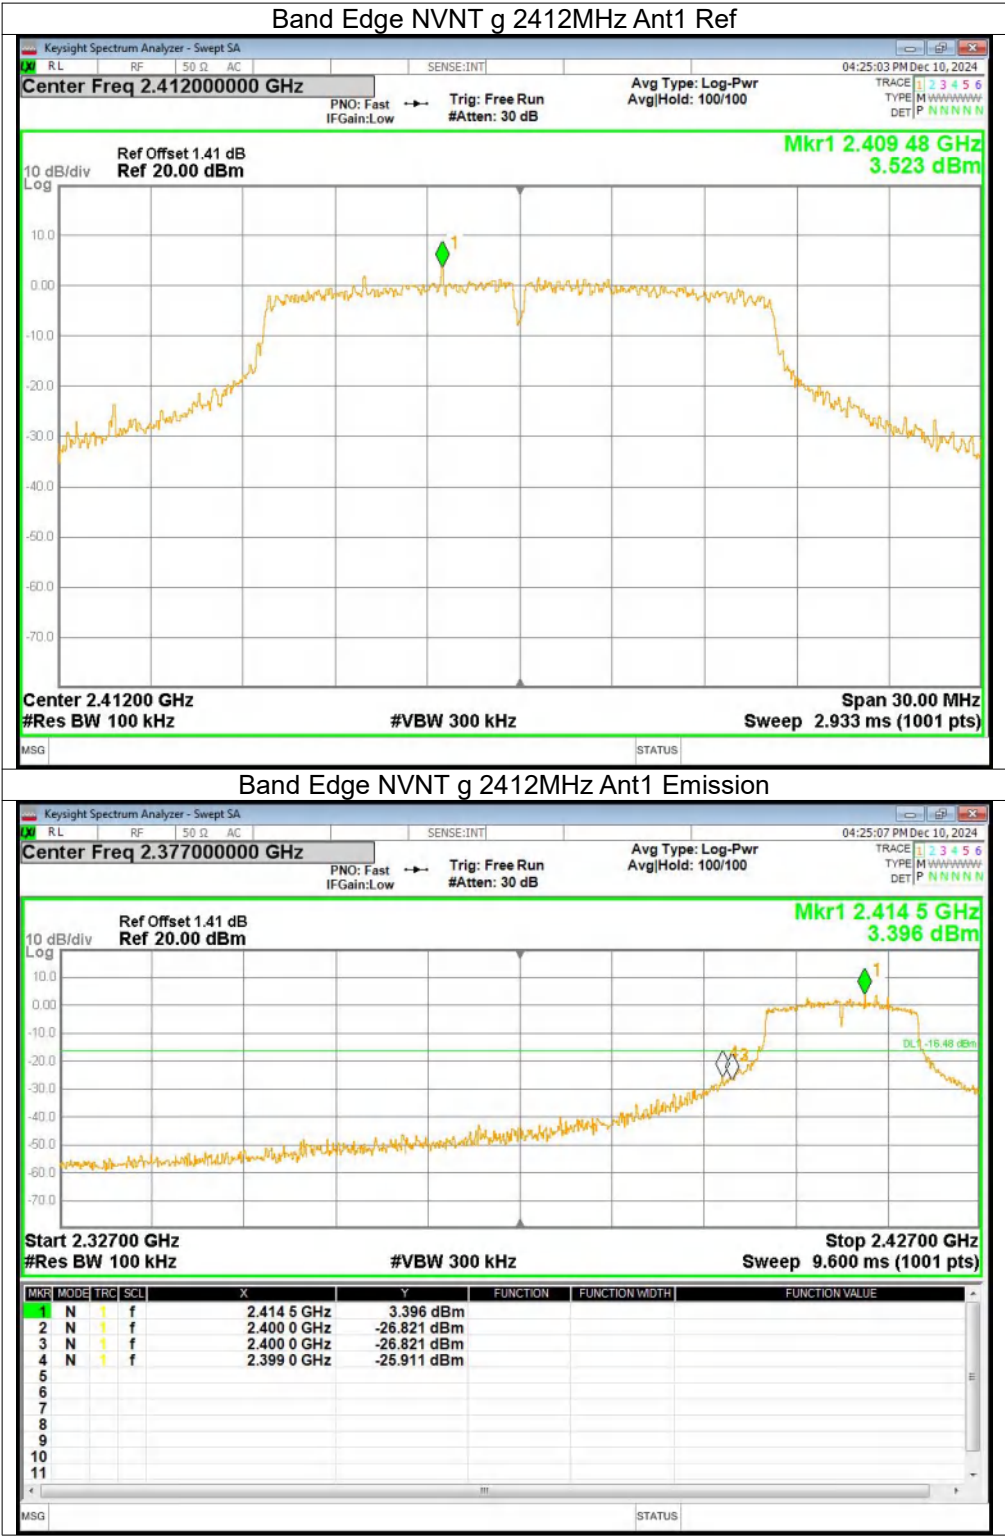


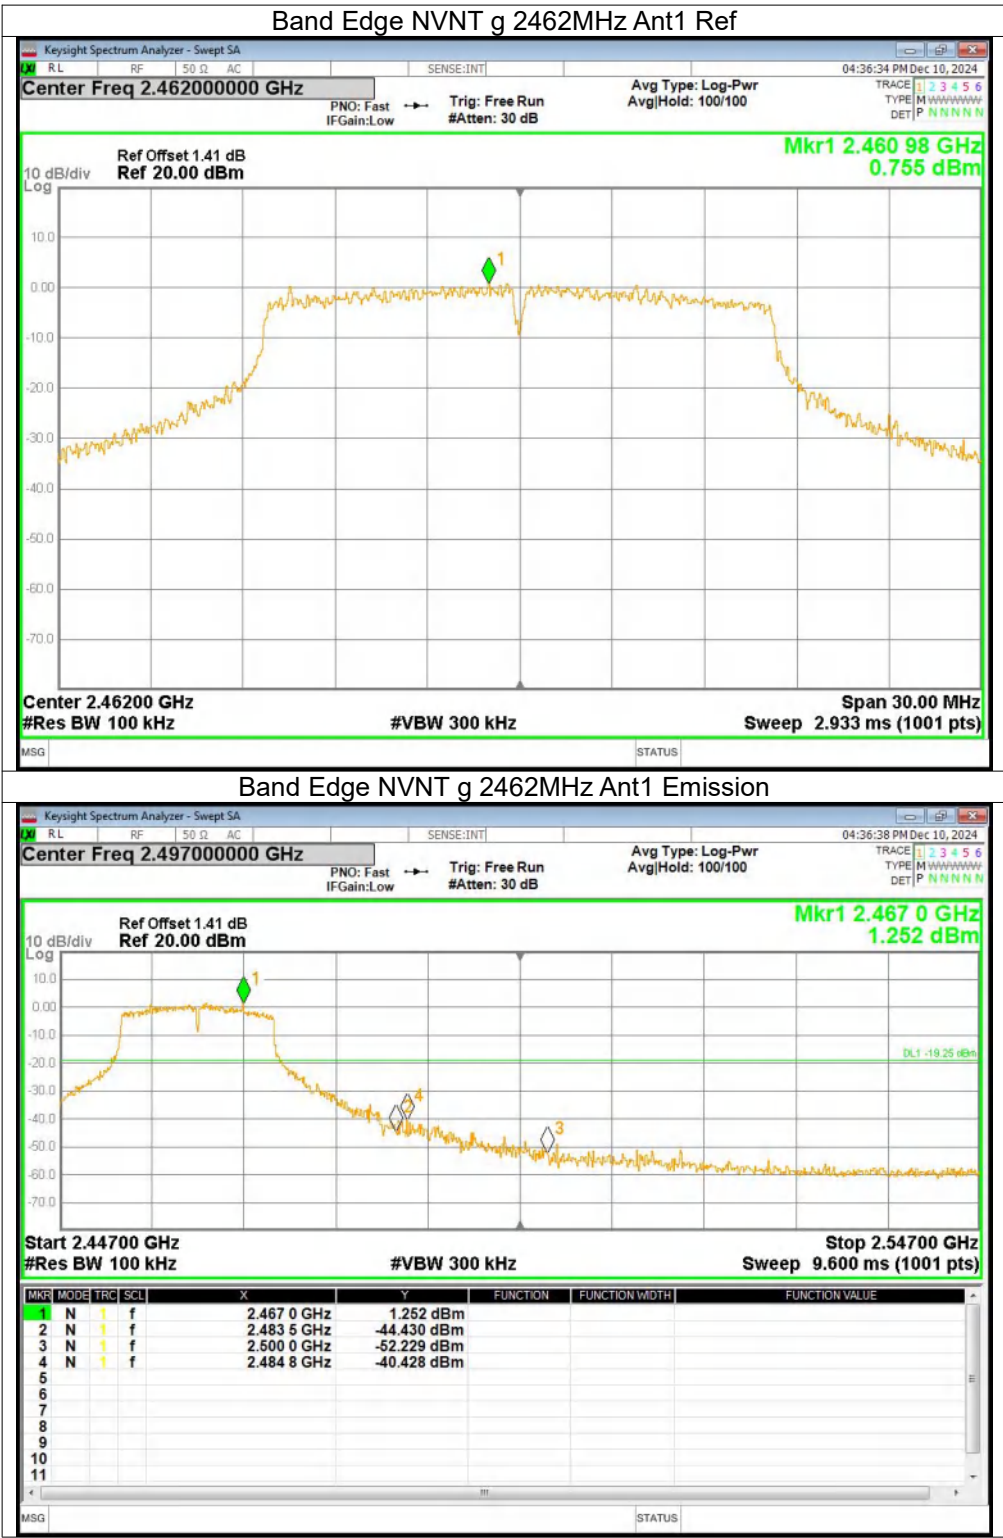


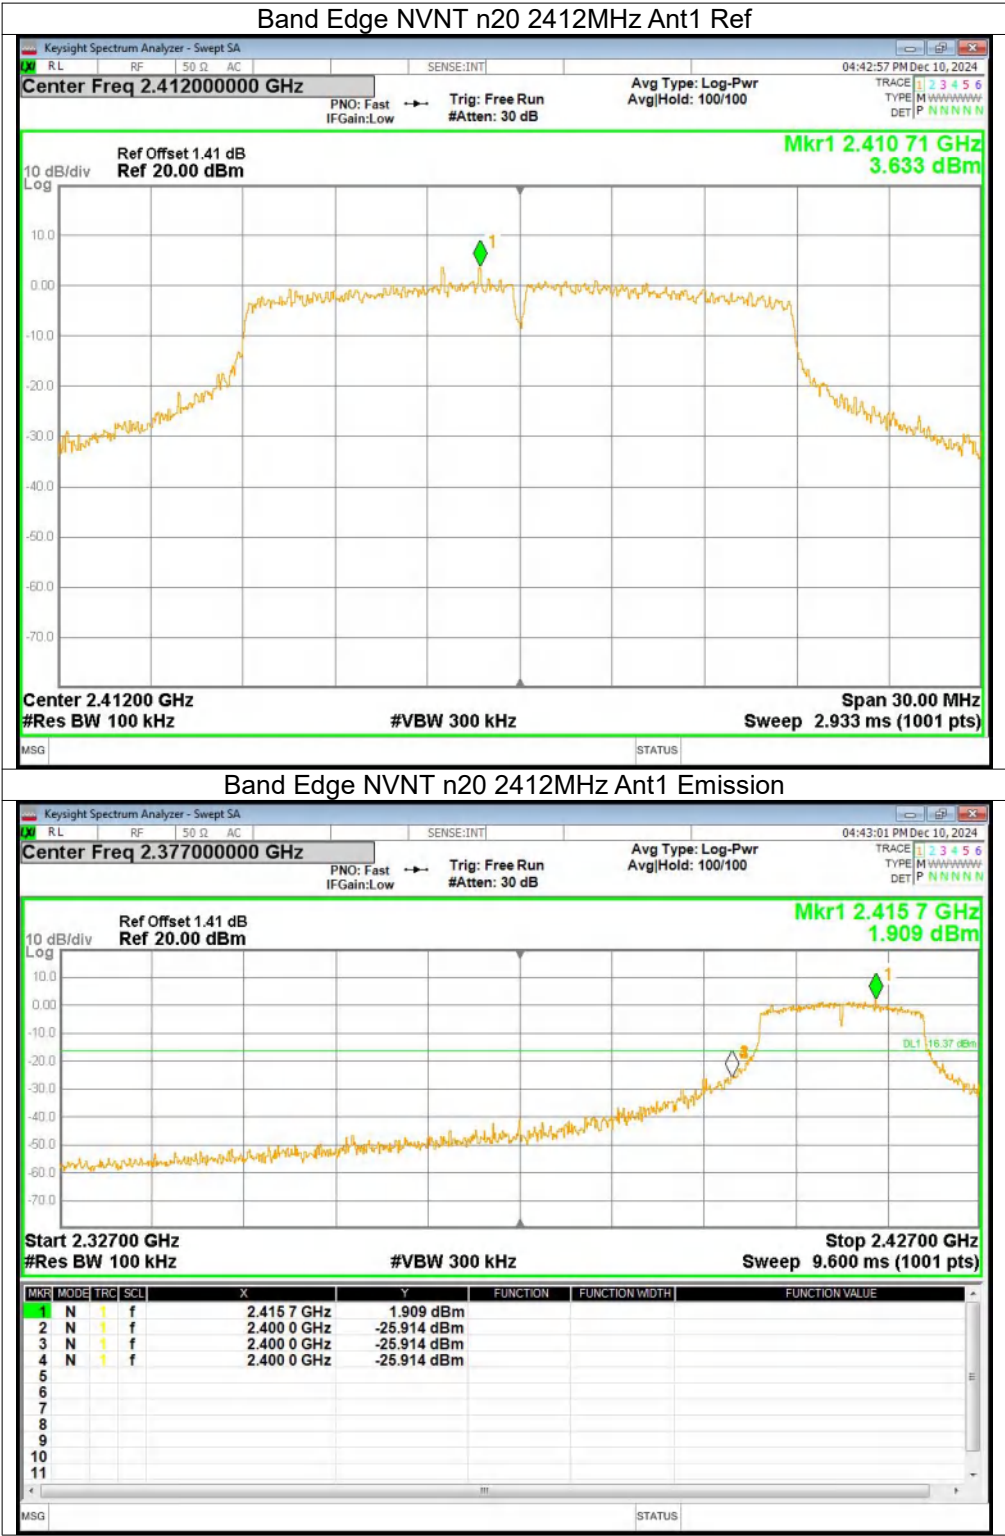


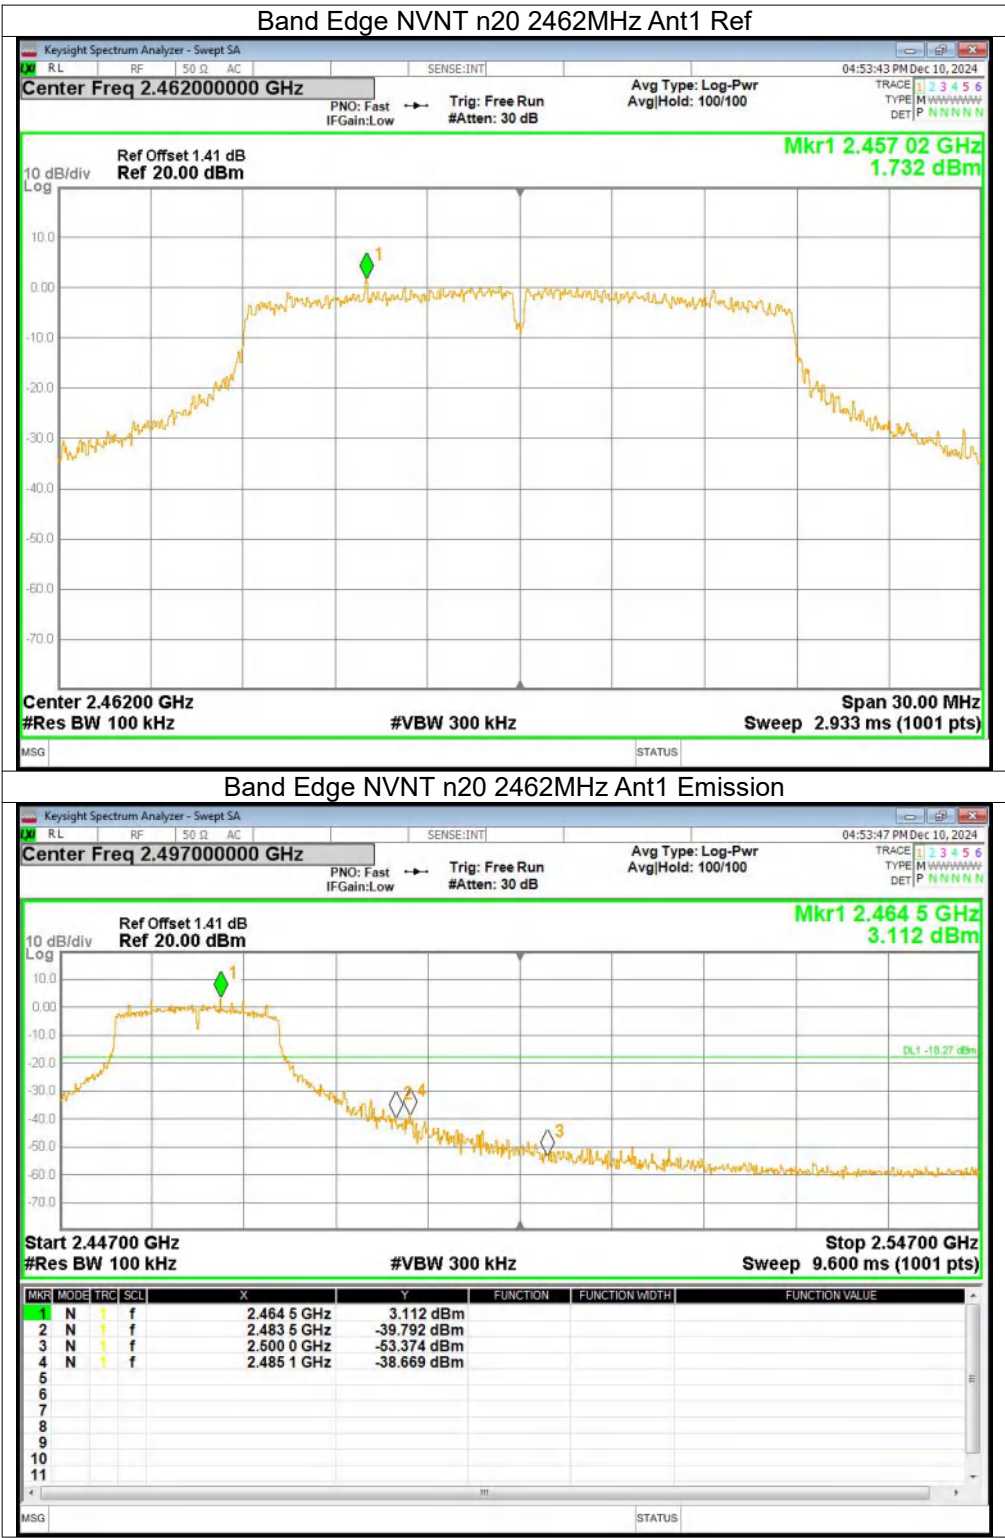


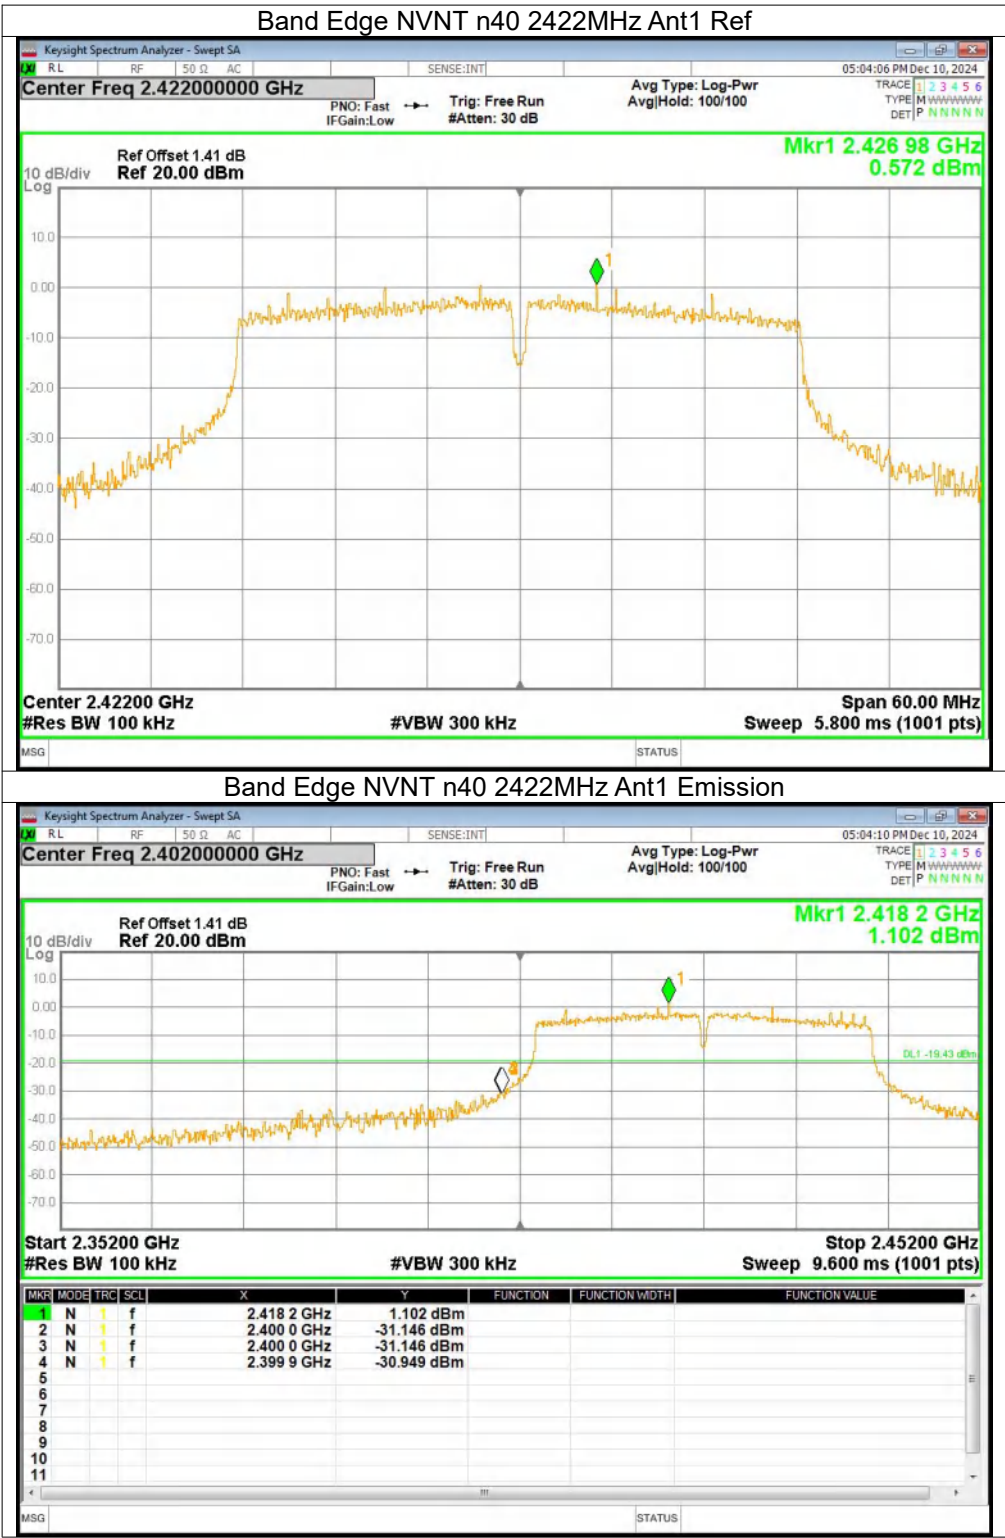


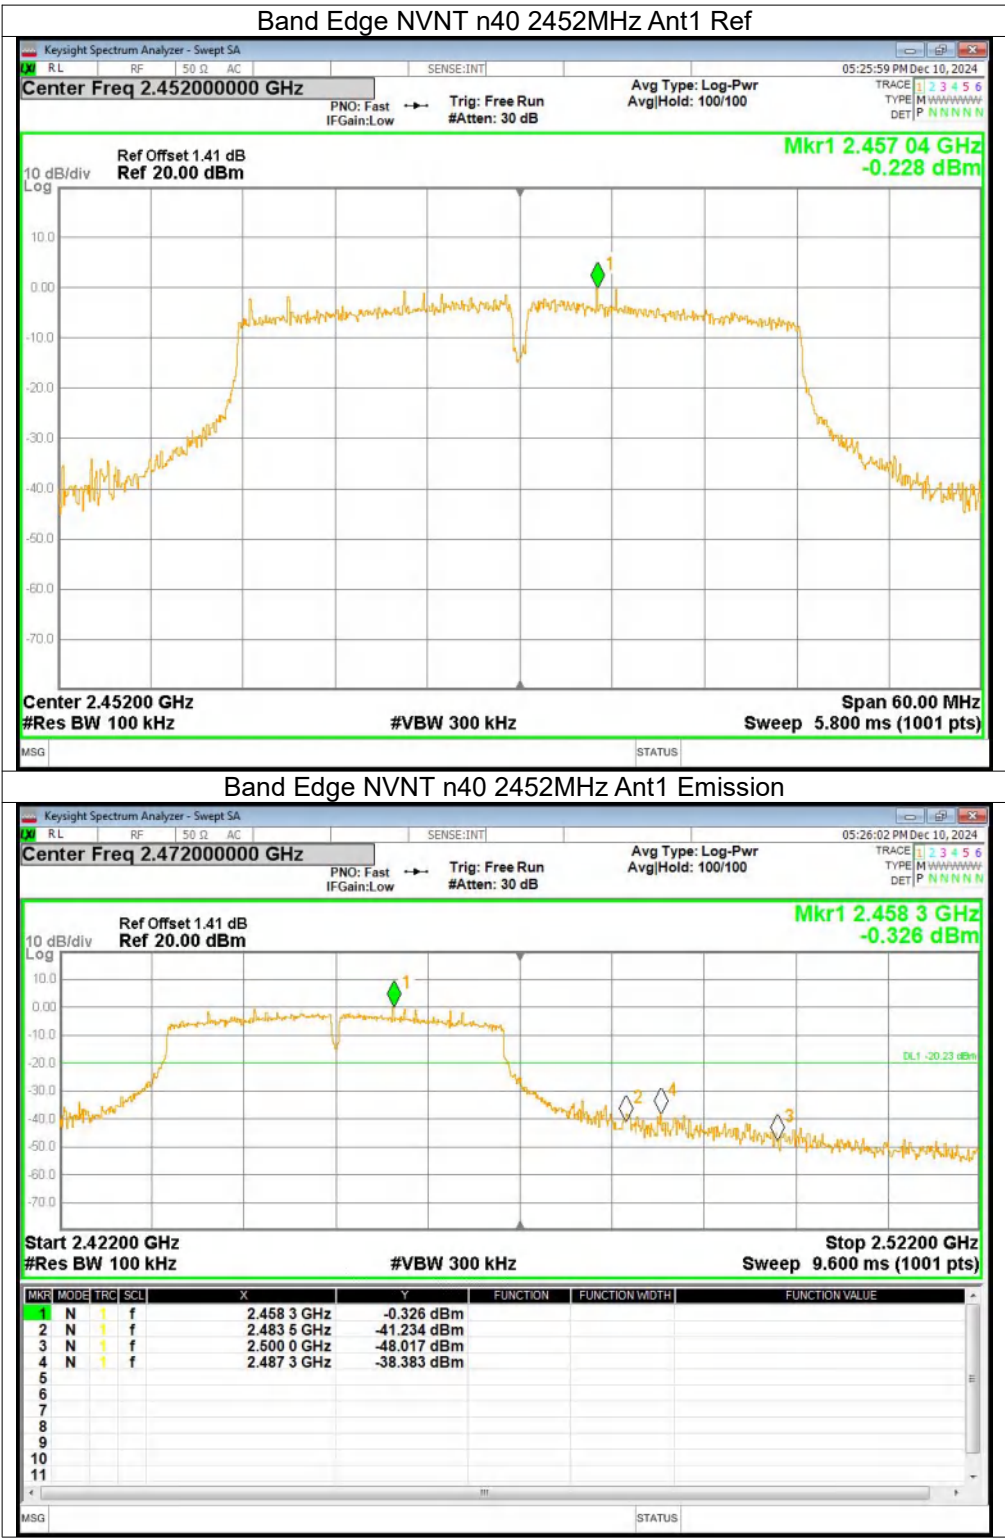

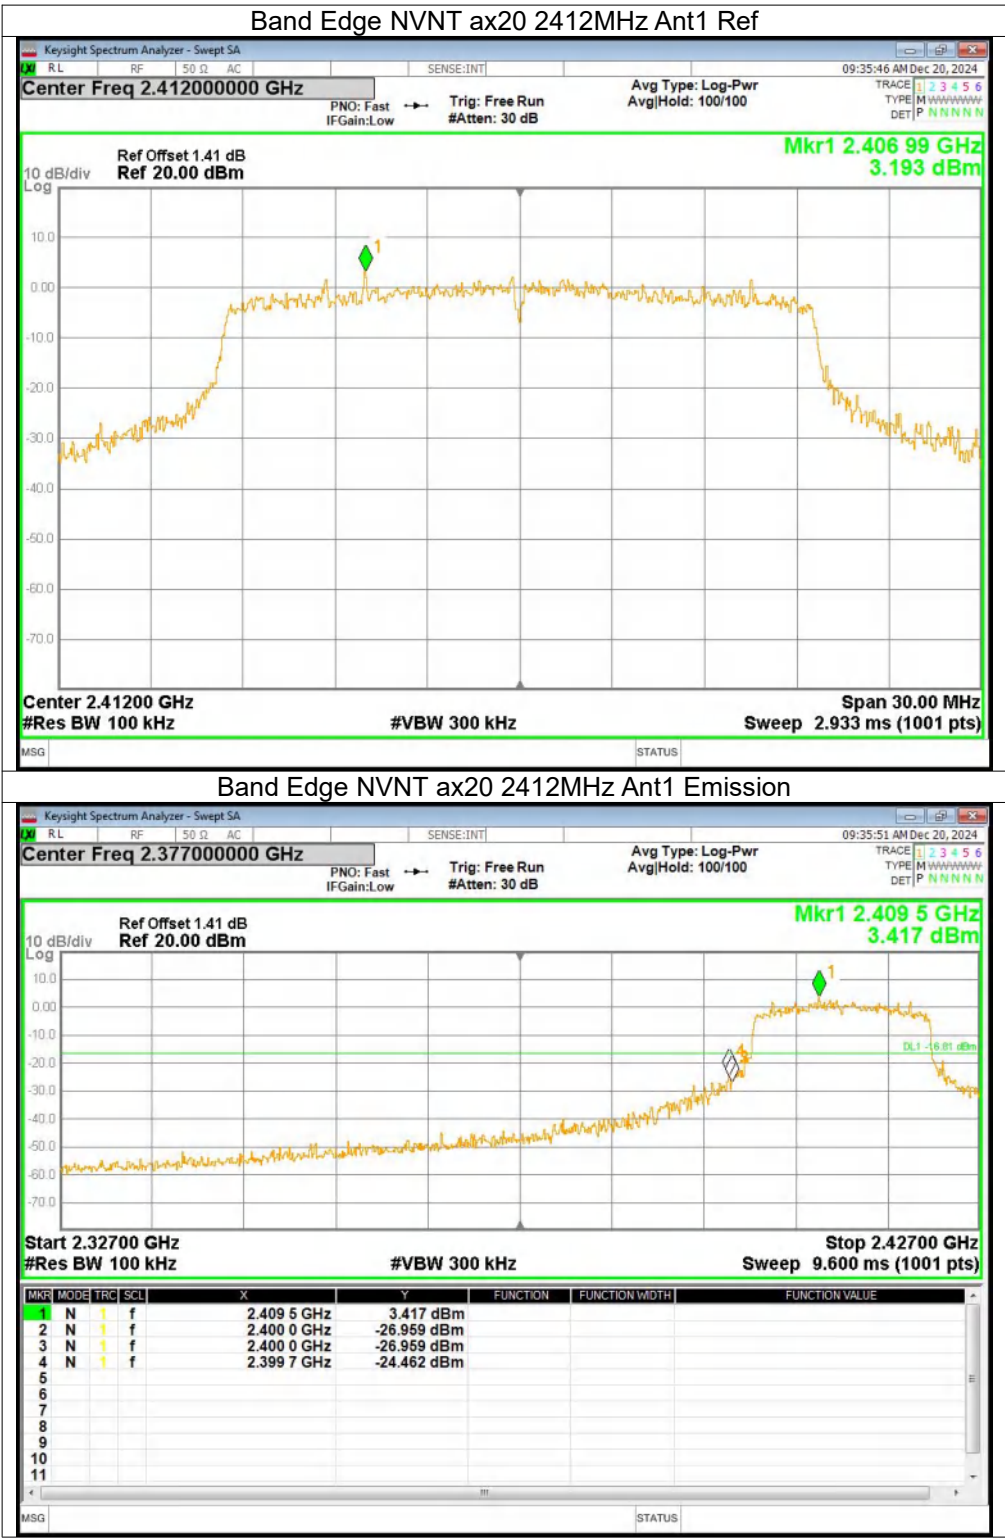

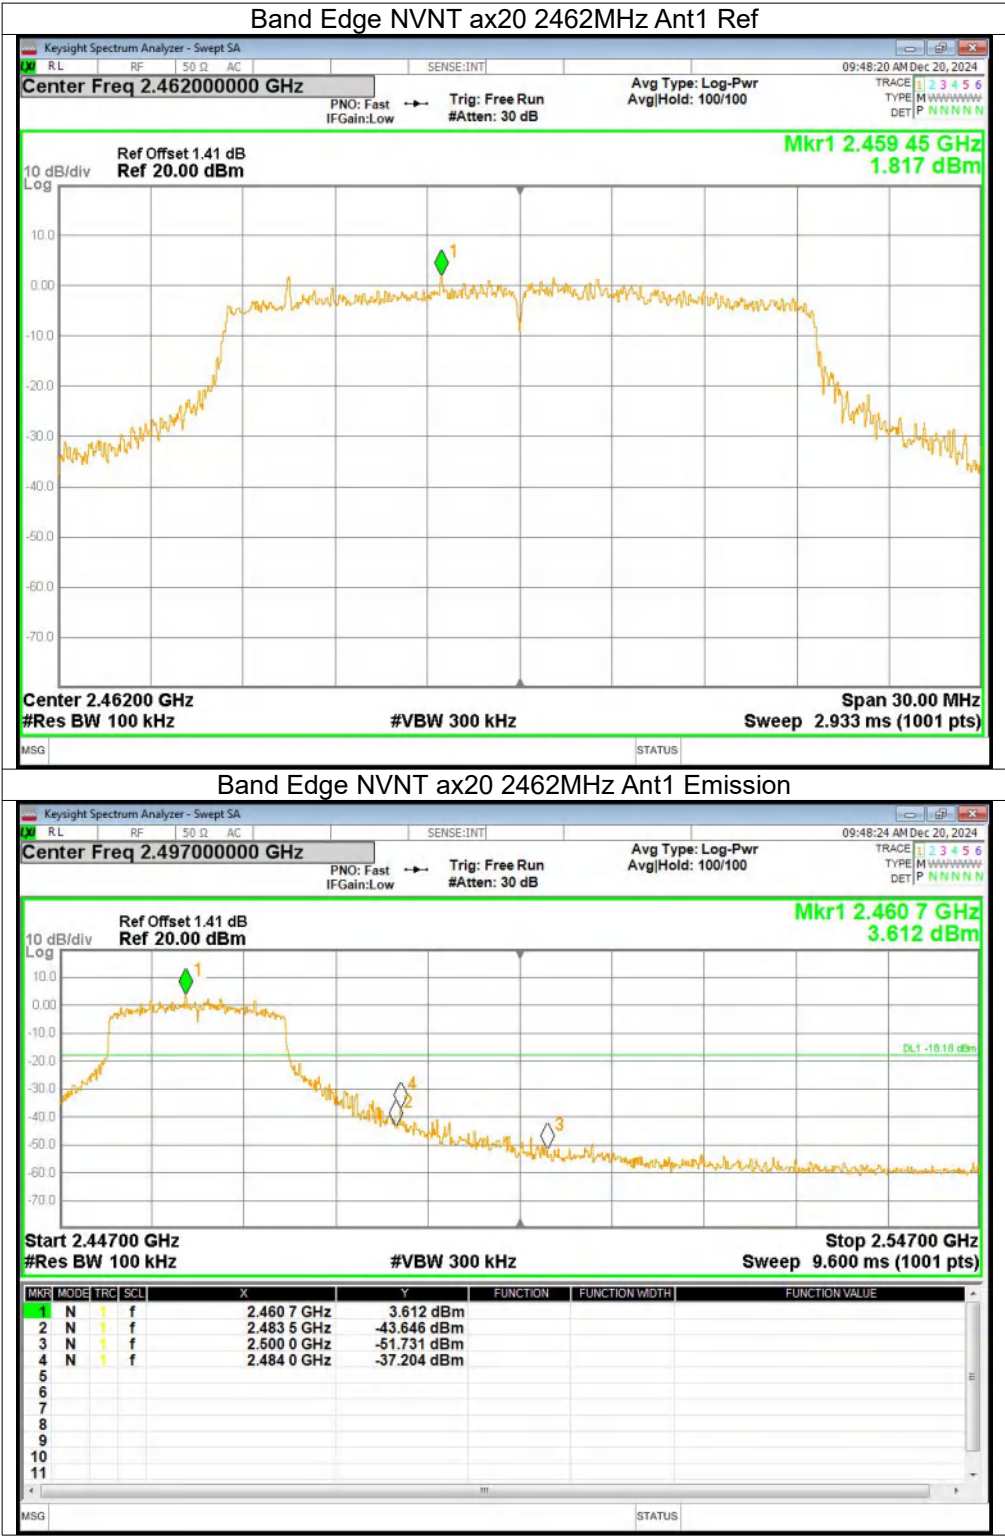


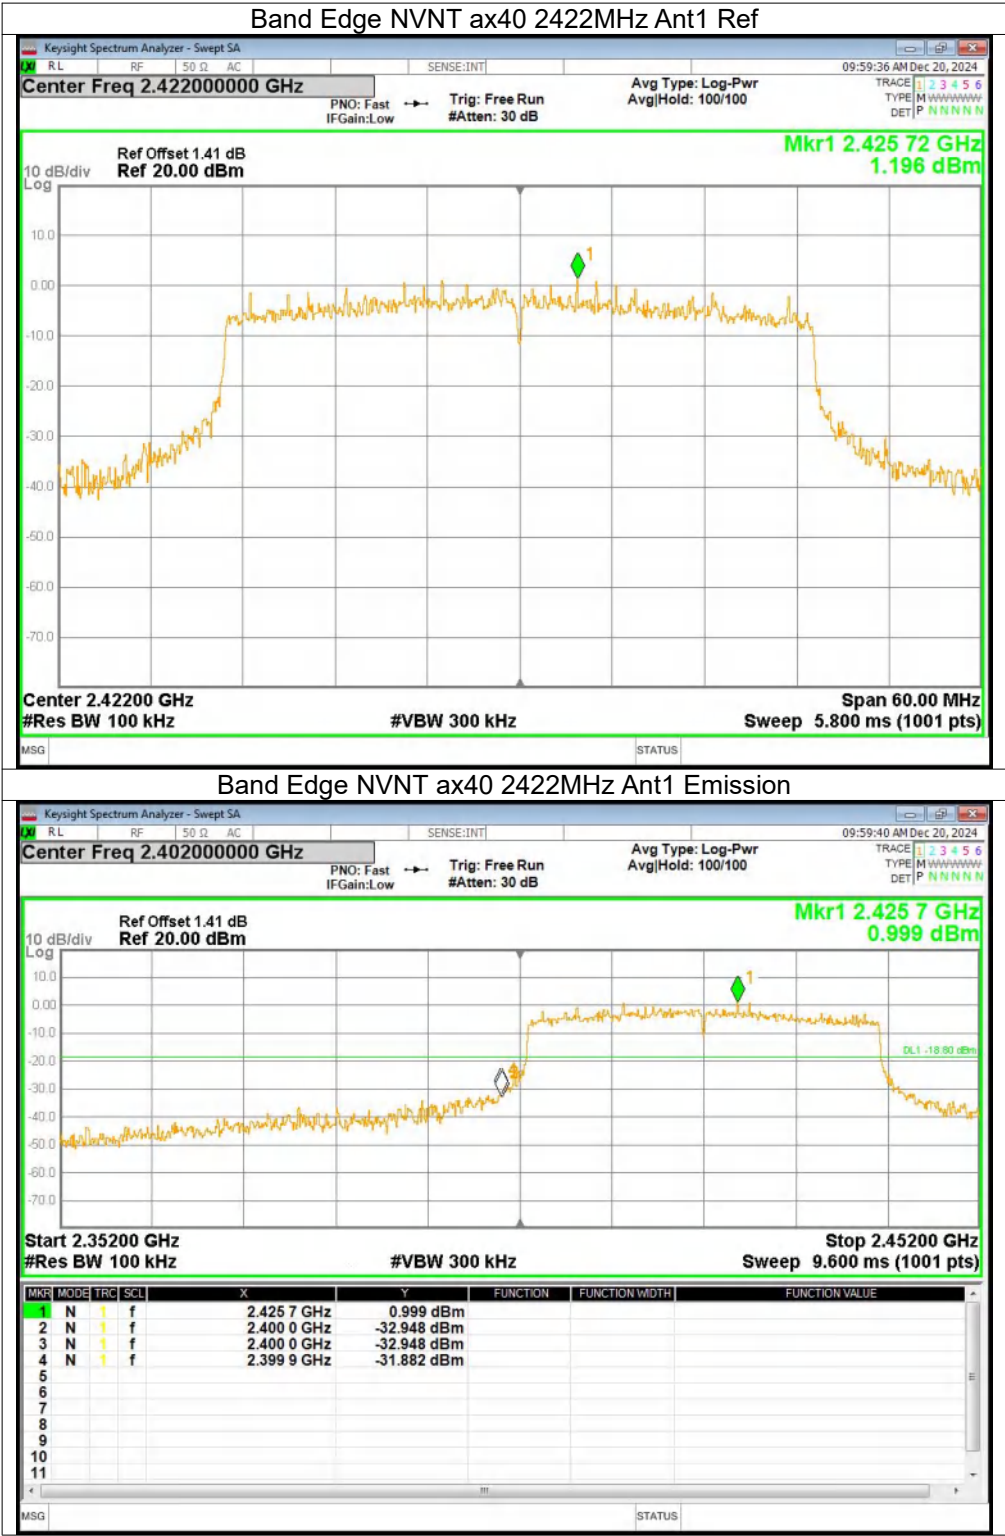


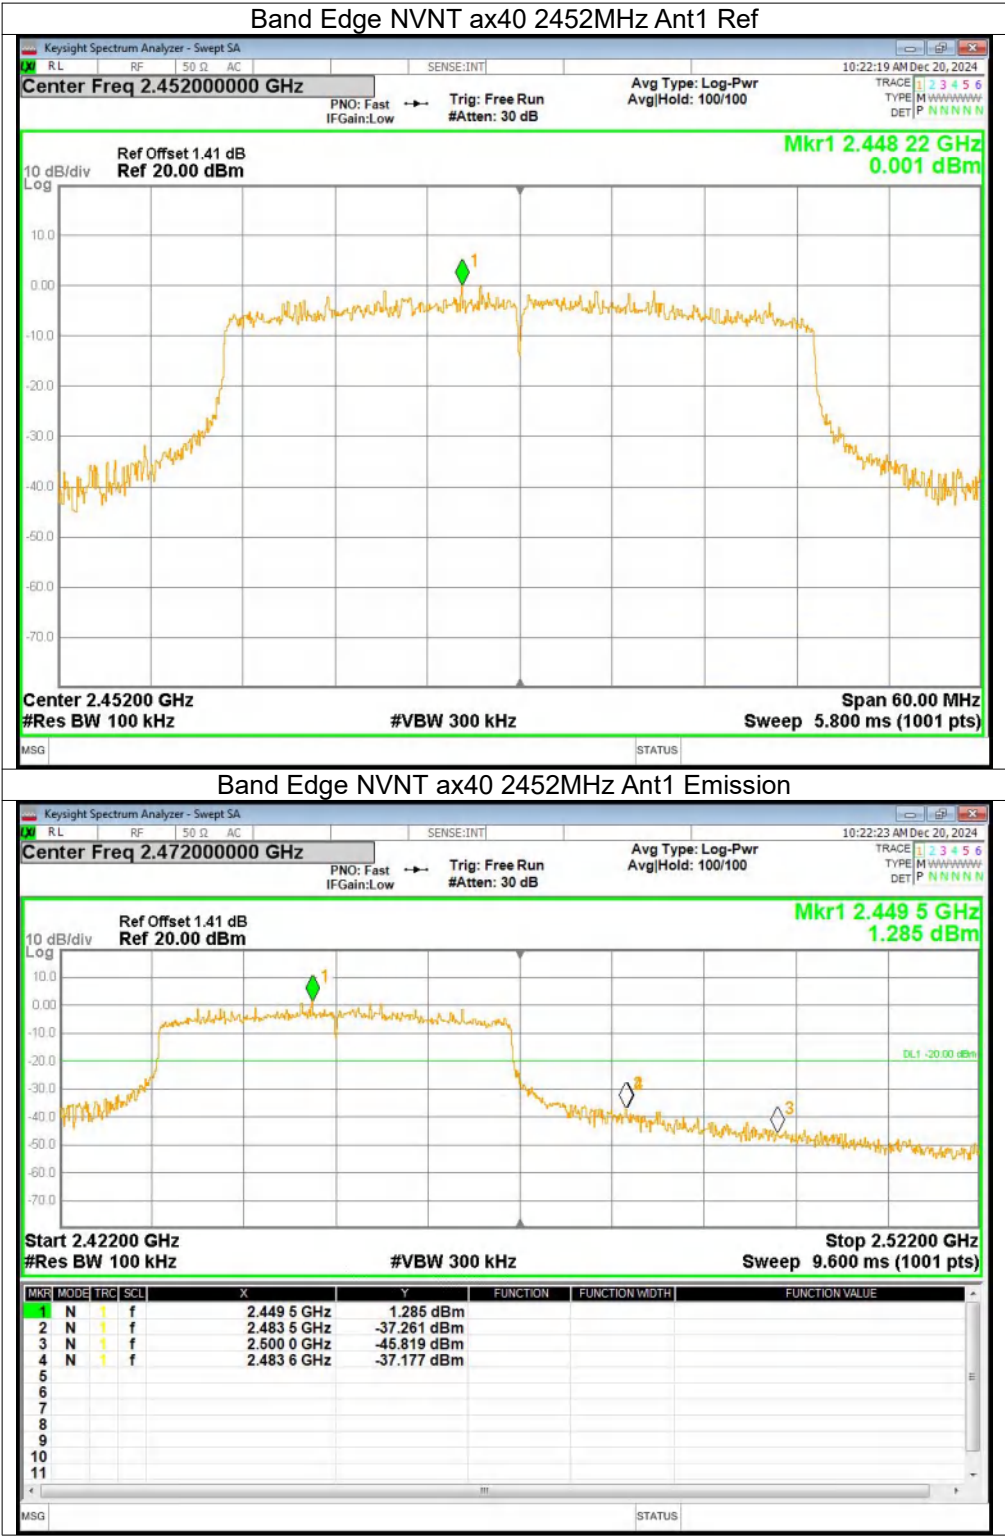



Conducted spurious emission: Pass.


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-42.32	-20	Pass
NVNT	b	2462	Ant1	-60.09	-20	Pass
NVNT	g	2412	Ant1	-29.43	-20	Pass
NVNT	g	2462	Ant1	-41.18	-20	Pass
NVNT	n20	2412	Ant1	-29.54	-20	Pass
NVNT	n20	2462	Ant1	-40.39	-20	Pass
NVNT	n40	2422	Ant1	-31.51	-20	Pass
NVNT	n40	2452	Ant1	-38.15	-20	Pass
NVNT	ax20	2412	Ant1	-27.65	-20	Pass
NVNT	ax20	2462	Ant1	-39.02	-20	Pass
NVNT	ax40	2422	Ant1	-33.08	-20	Pass
NVNT	ax40	2452	Ant1	-37.17	-20	Pass

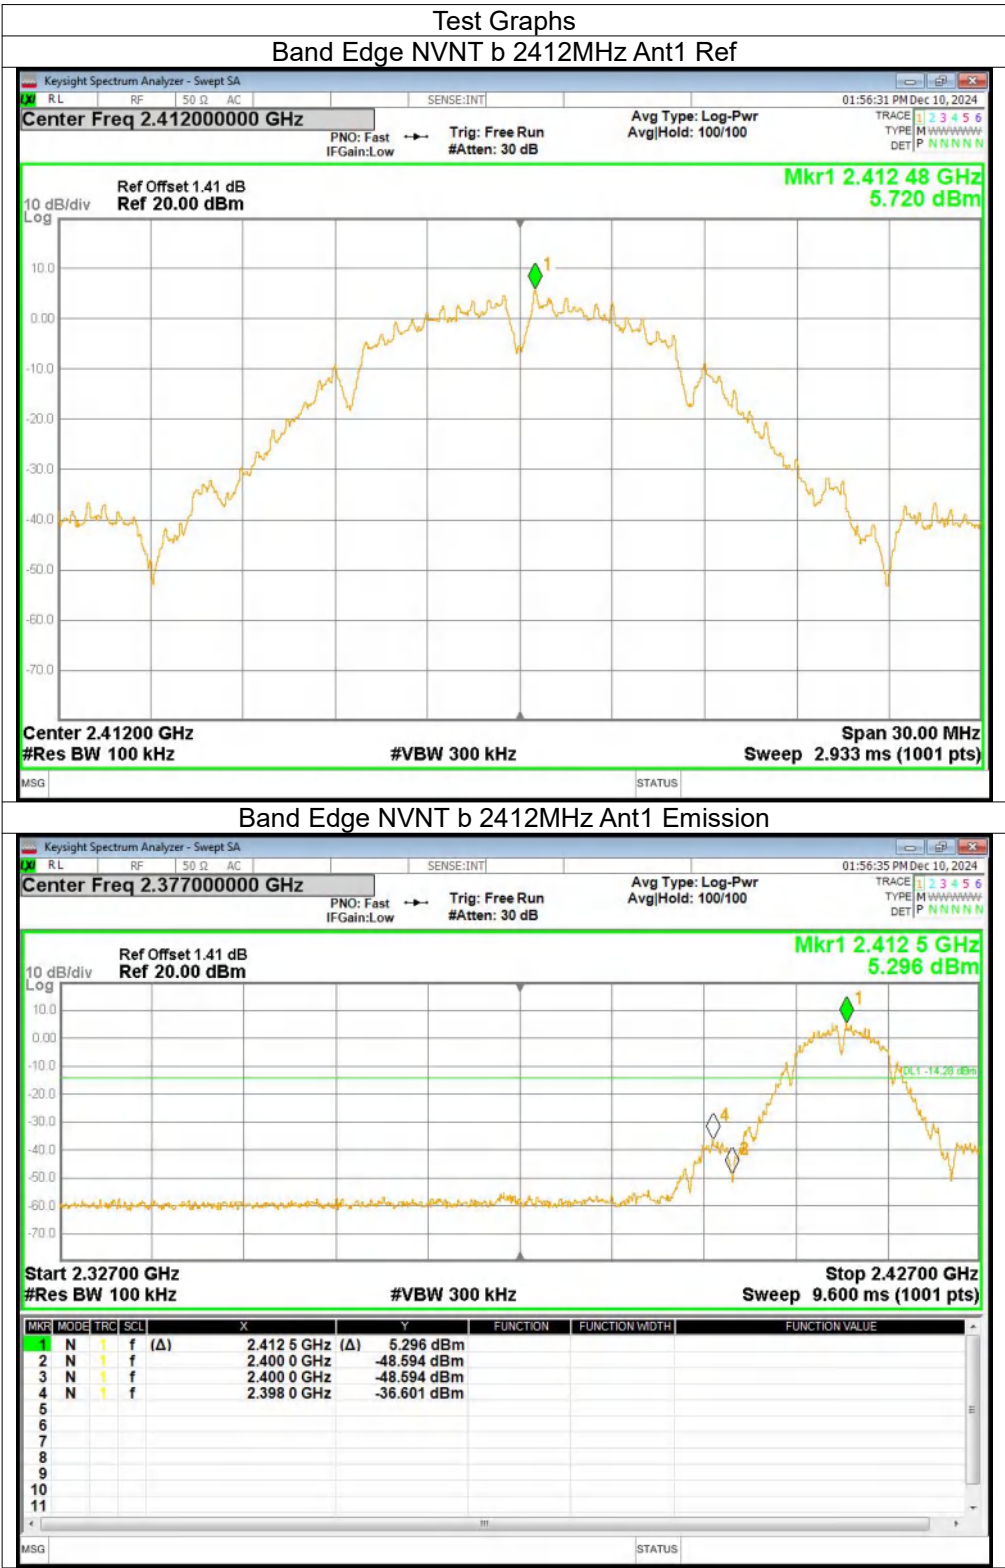


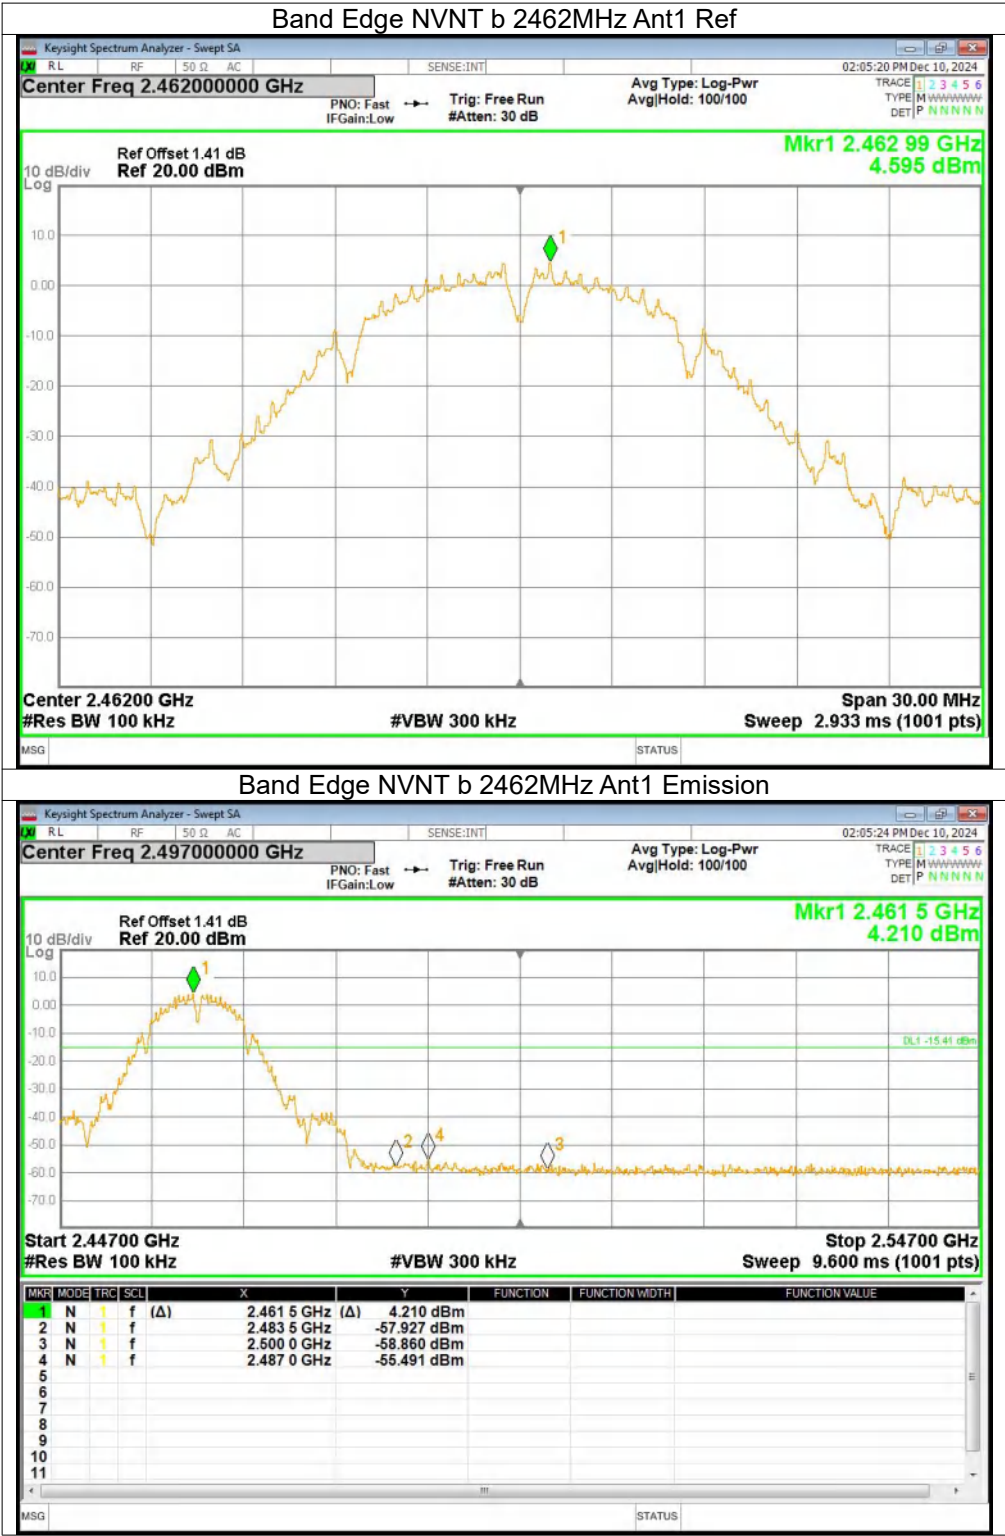


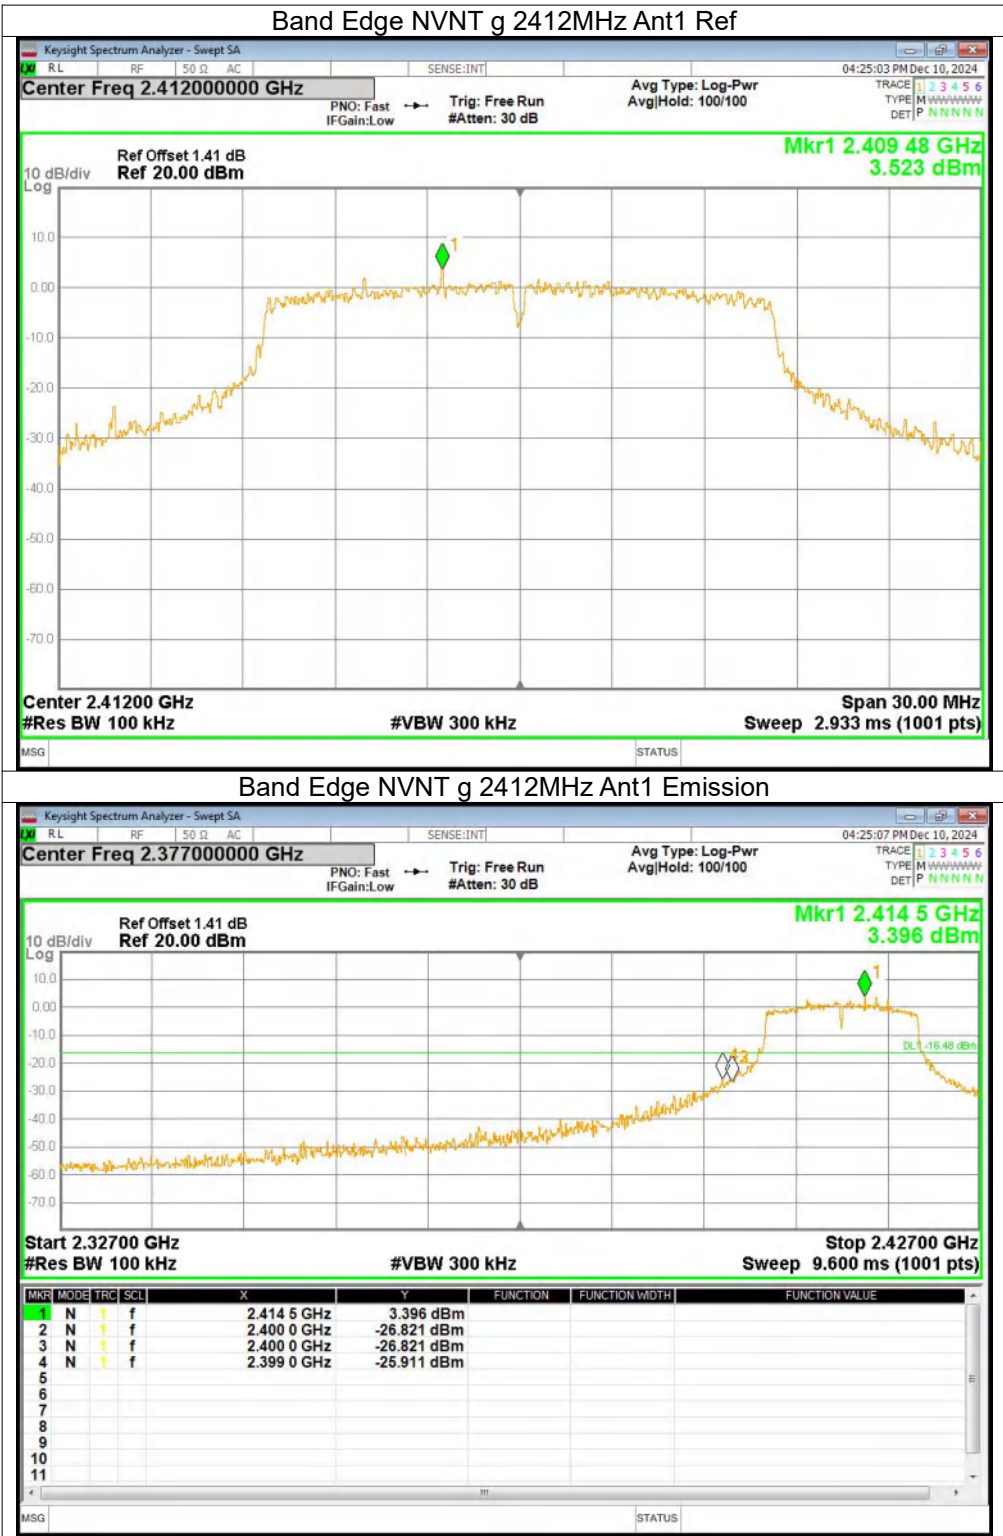


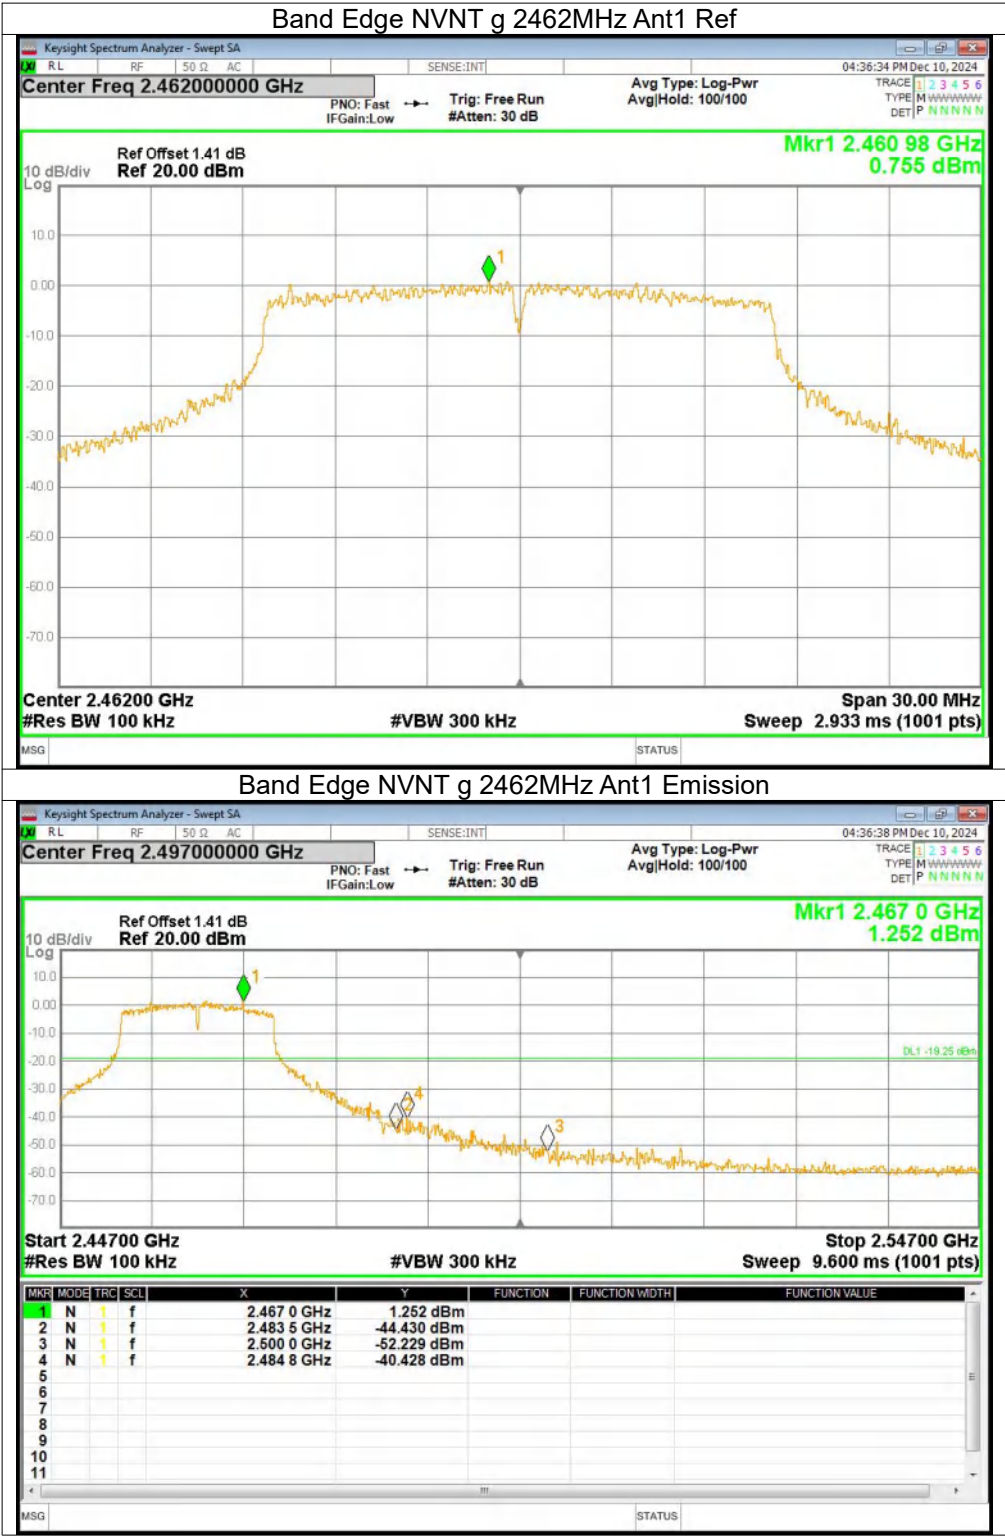


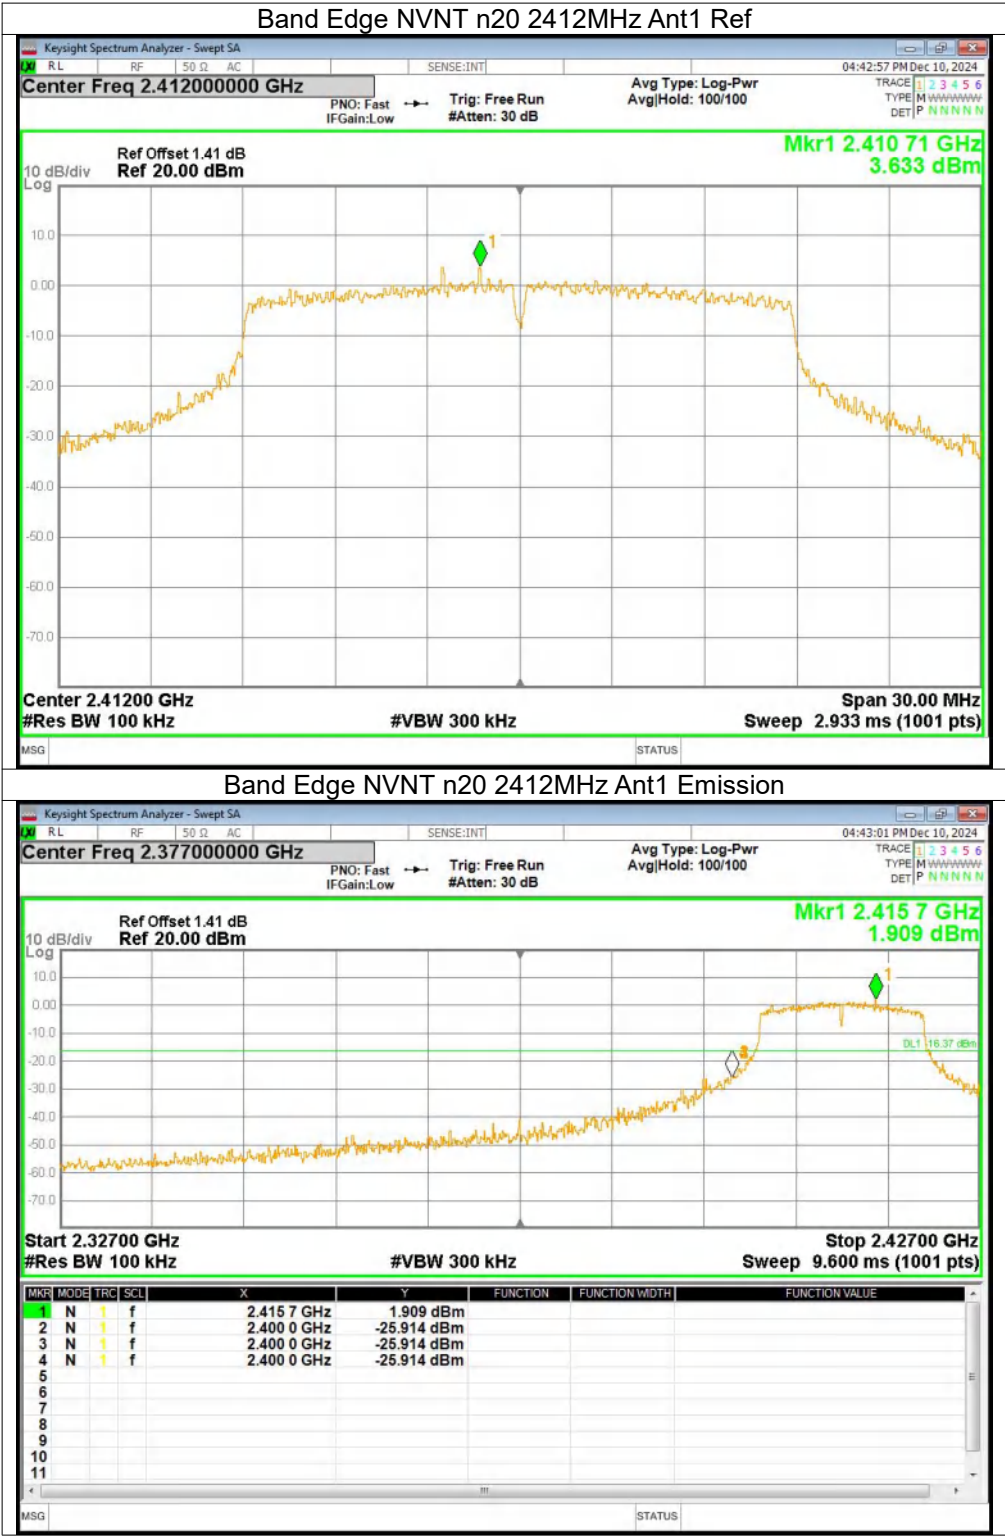


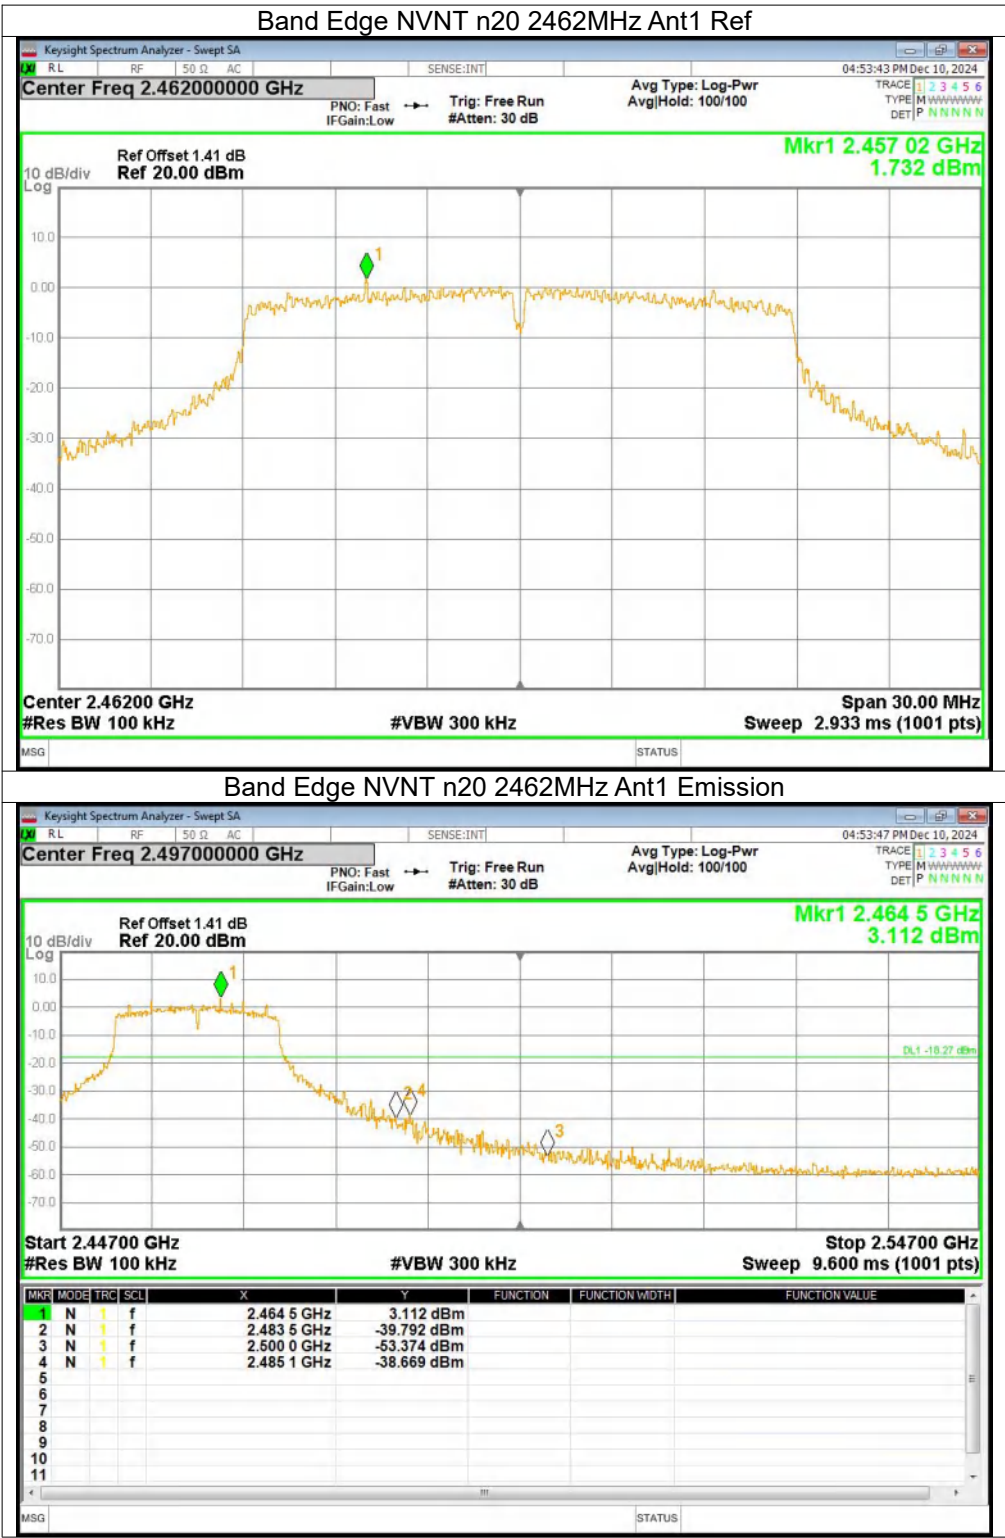


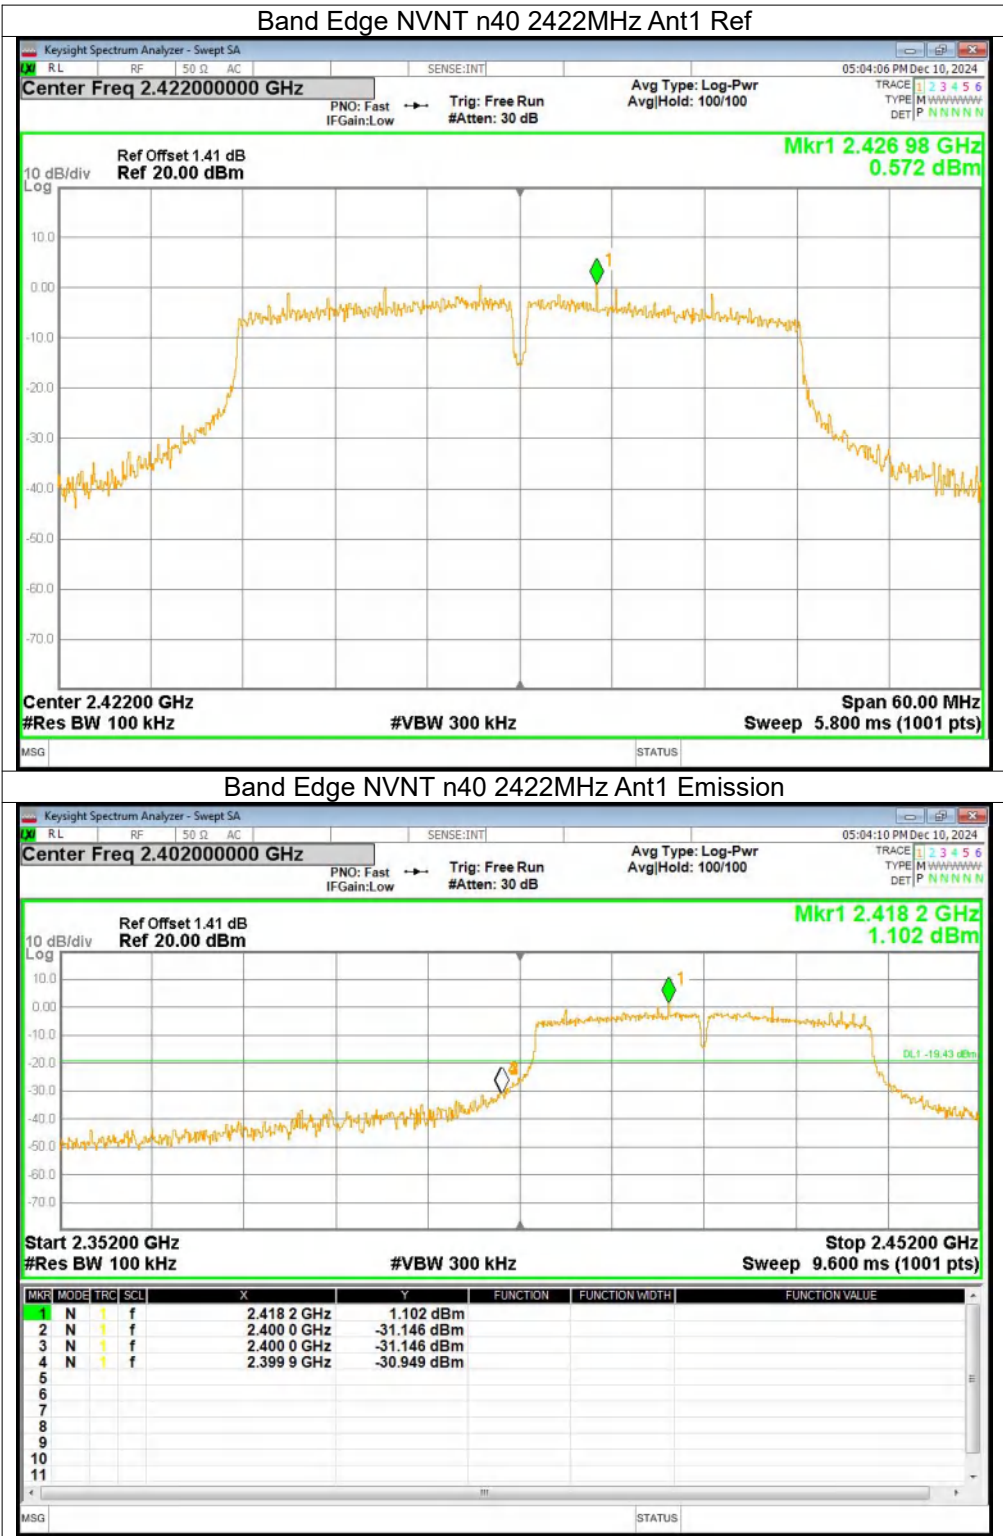


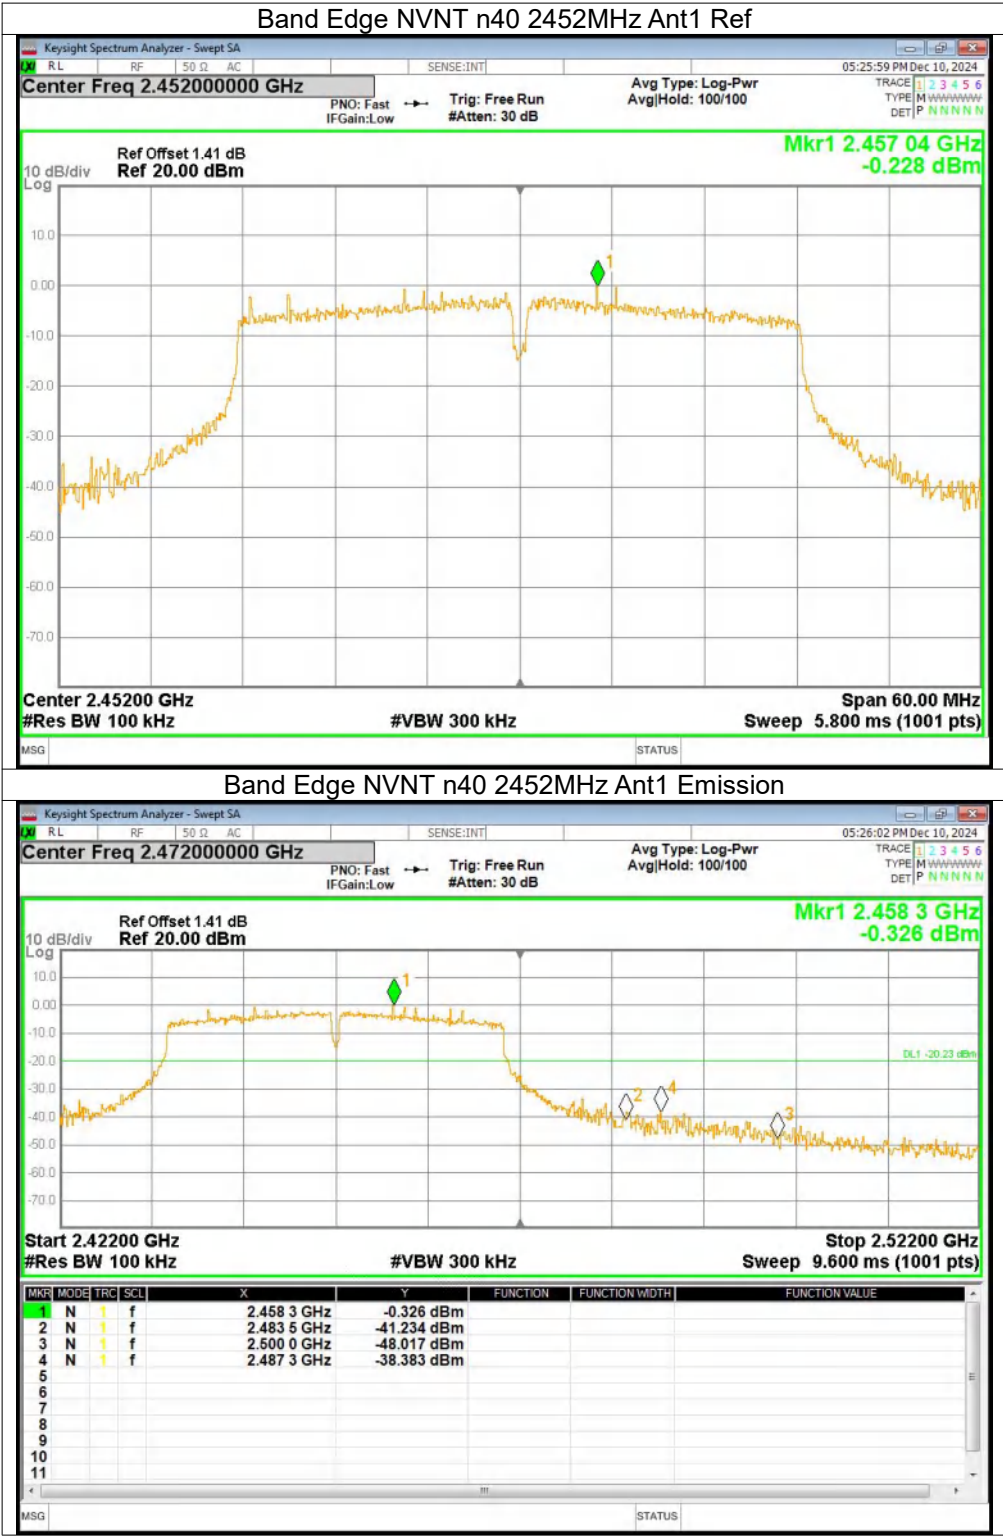

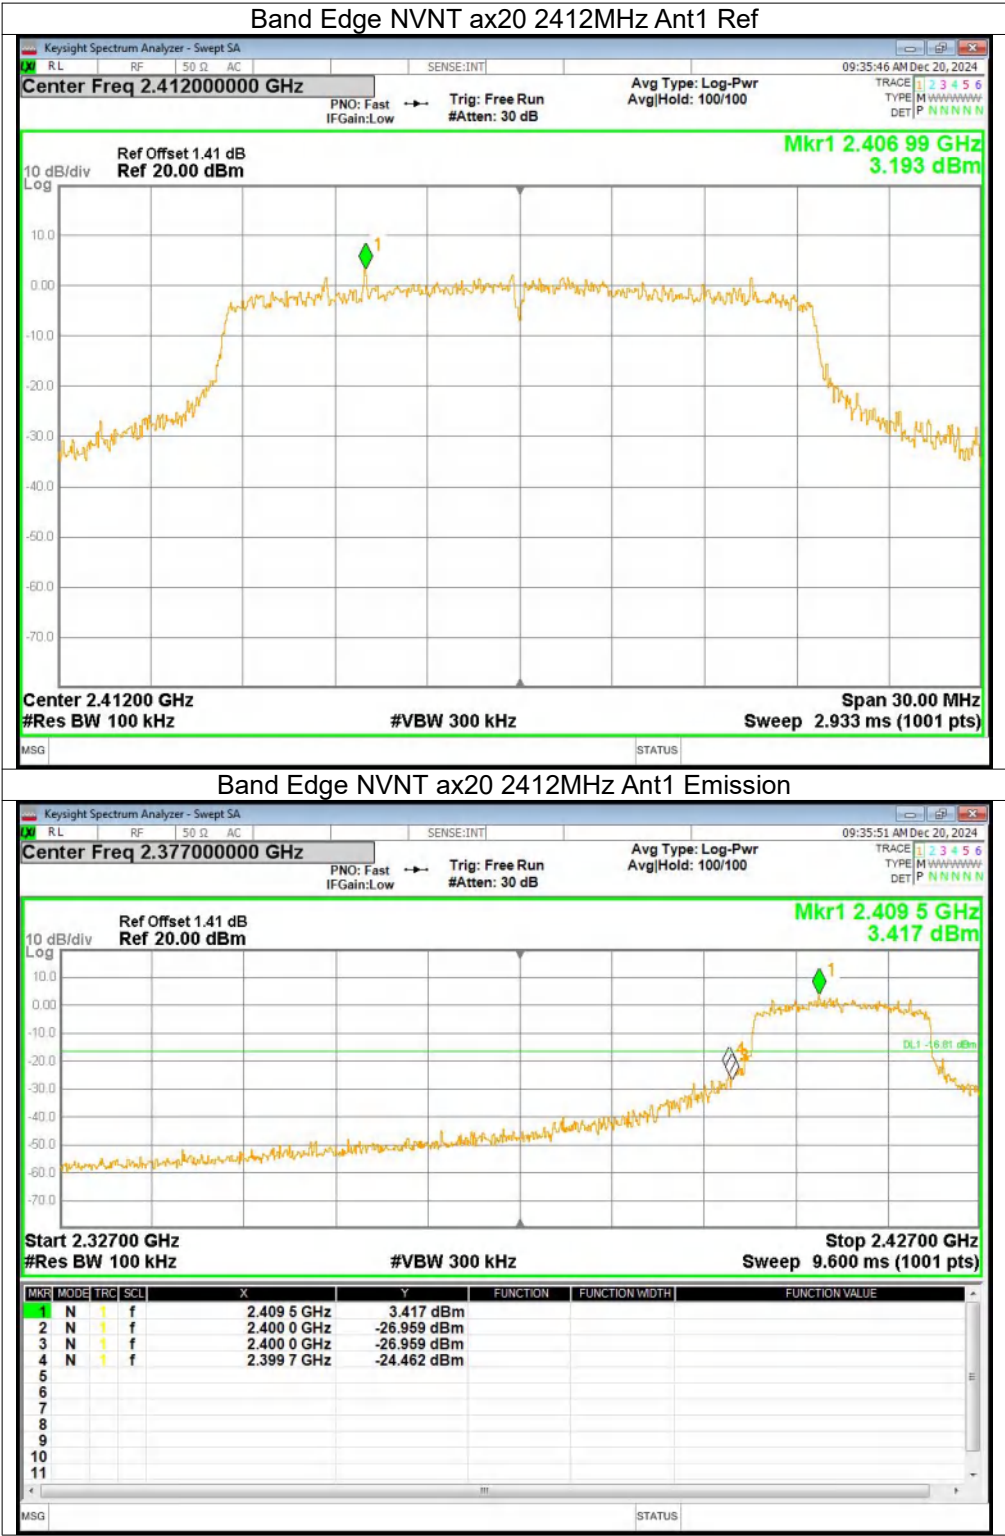

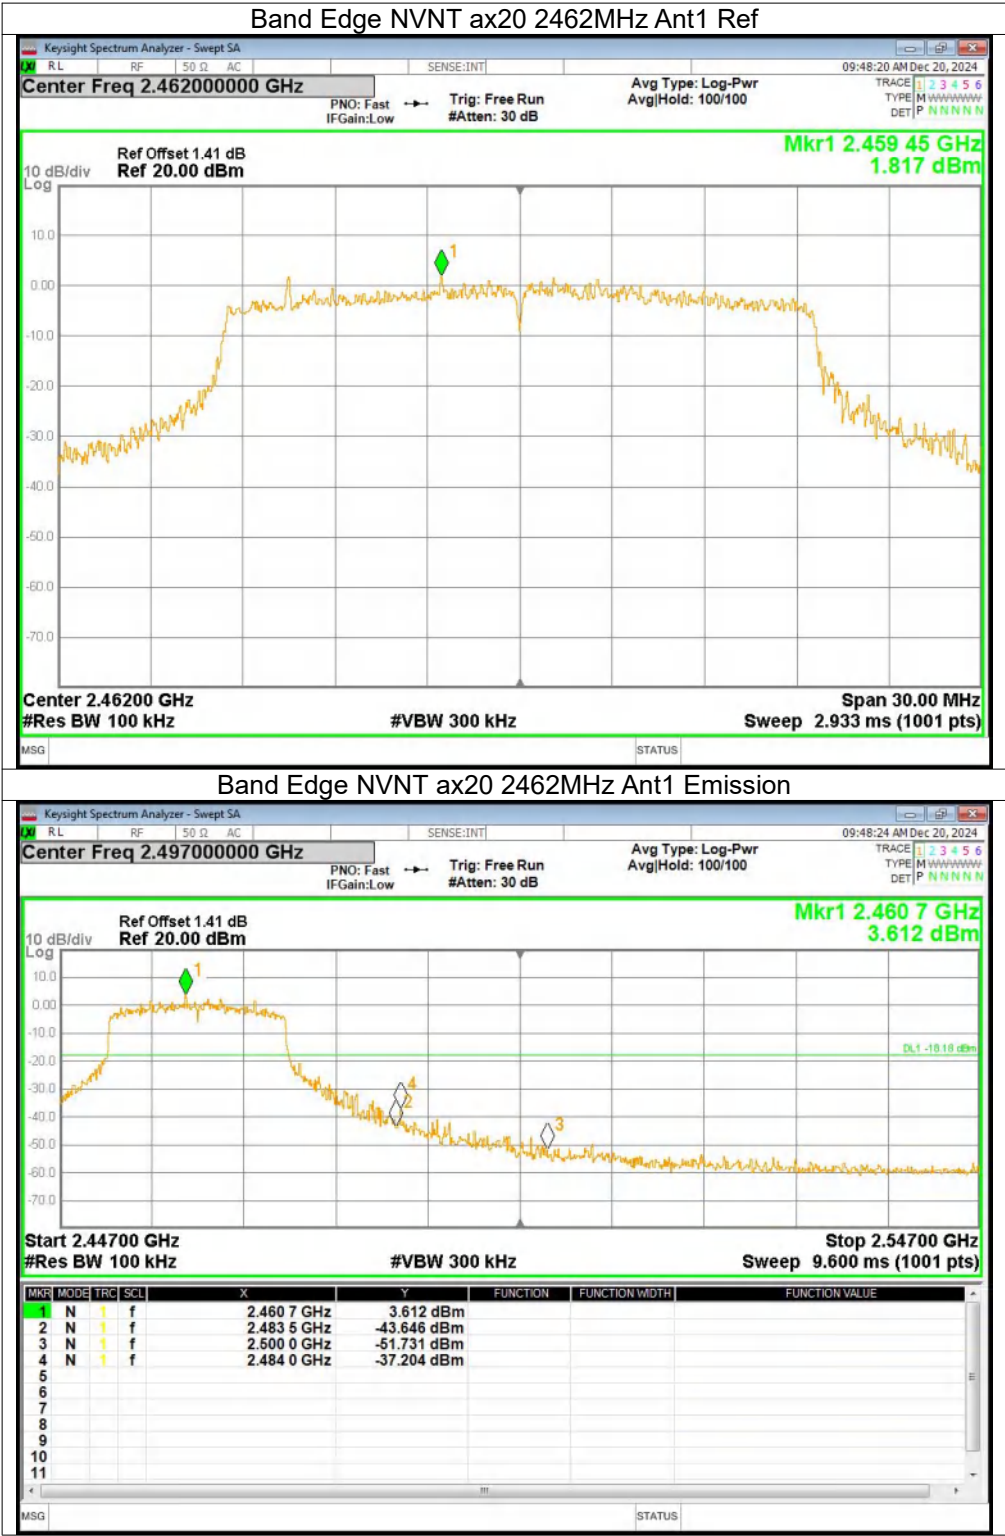



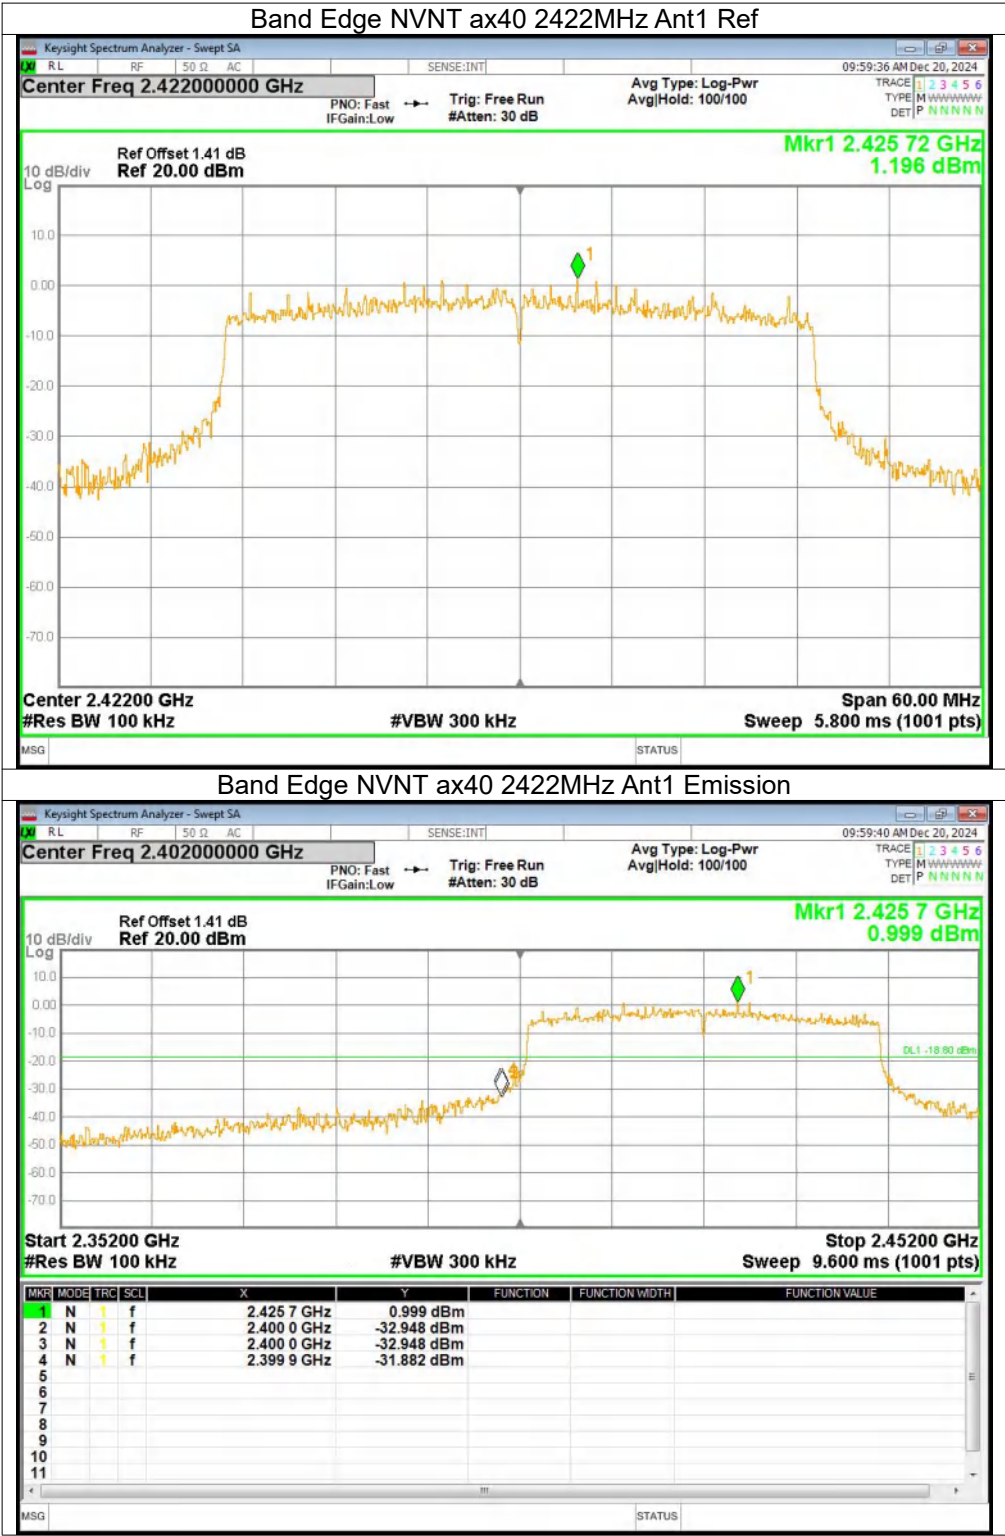


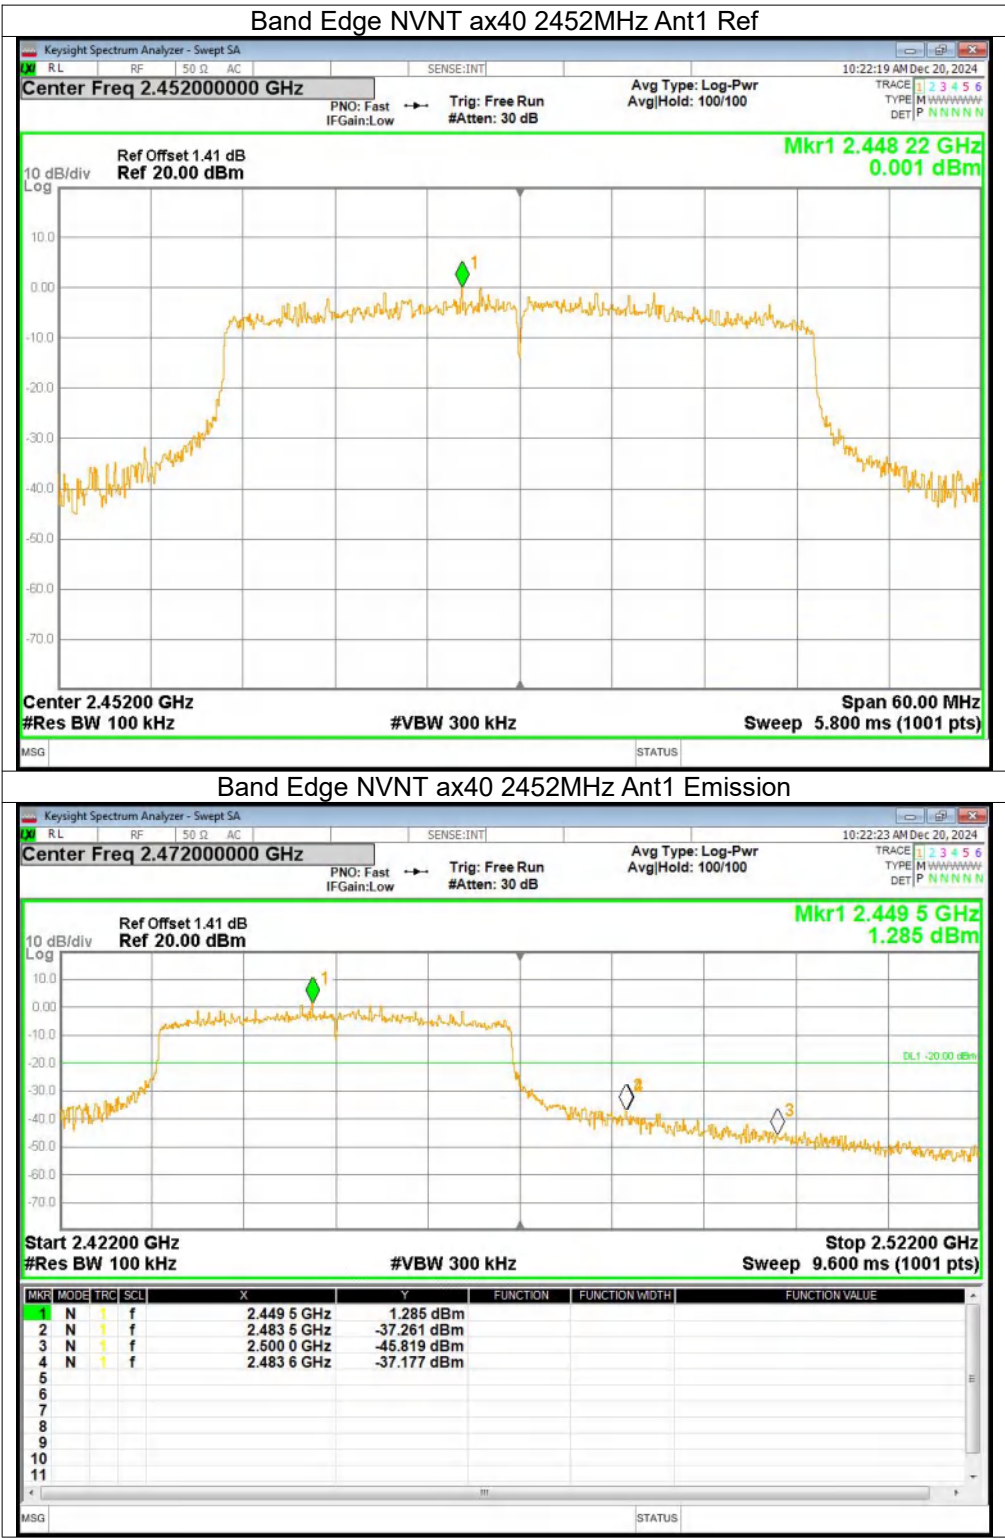


Conducted spurious emission: Pass.

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-44.8	-20	Pass
b	2437	Ant1	-43.89	-20	Pass
b	2462	Ant1	-45.67	-20	Pass
g	2412	Ant1	-45.4	-20	Pass
g	2437	Ant1	-46.14	-20	Pass
g	2462	Ant1	-44.37	-20	Pass
n20	2412	Ant1	-46.42	-20	Pass
n20	2437	Ant1	-44.39	-20	Pass
n20	2462	Ant1	-44.49	-20	Pass
n40	2422	Ant1	-45.59	-20	Pass
n40	2437	Ant1	-45.89	-20	Pass
n40	2452	Ant1	-45.71	-20	Pass
ax20	2412	Ant1	-46.33	-20	Pass
ax20	2437	Ant1	-45.5	-20	Pass
ax20	2462	Ant1	-42.58	-20	Pass
ax40	2422	Ant1	-45.7	-20	Pass
ax40	2437	Ant1	-42.03	-20	Pass
ax40	2452	Ant1	-45.46	-20	Pass

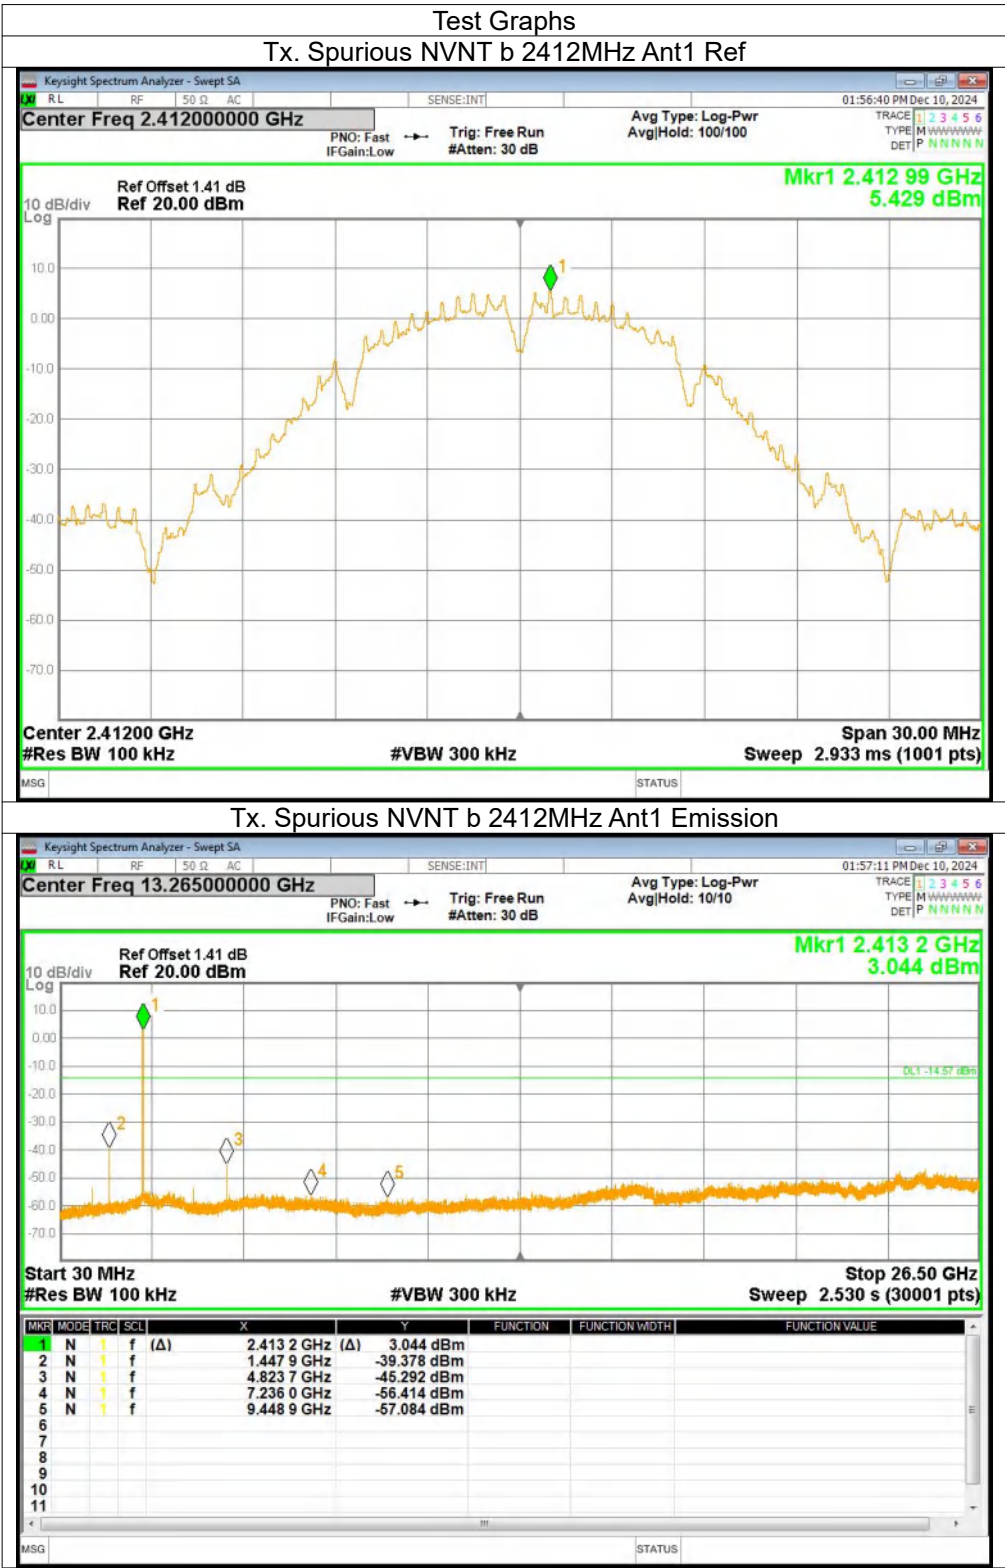


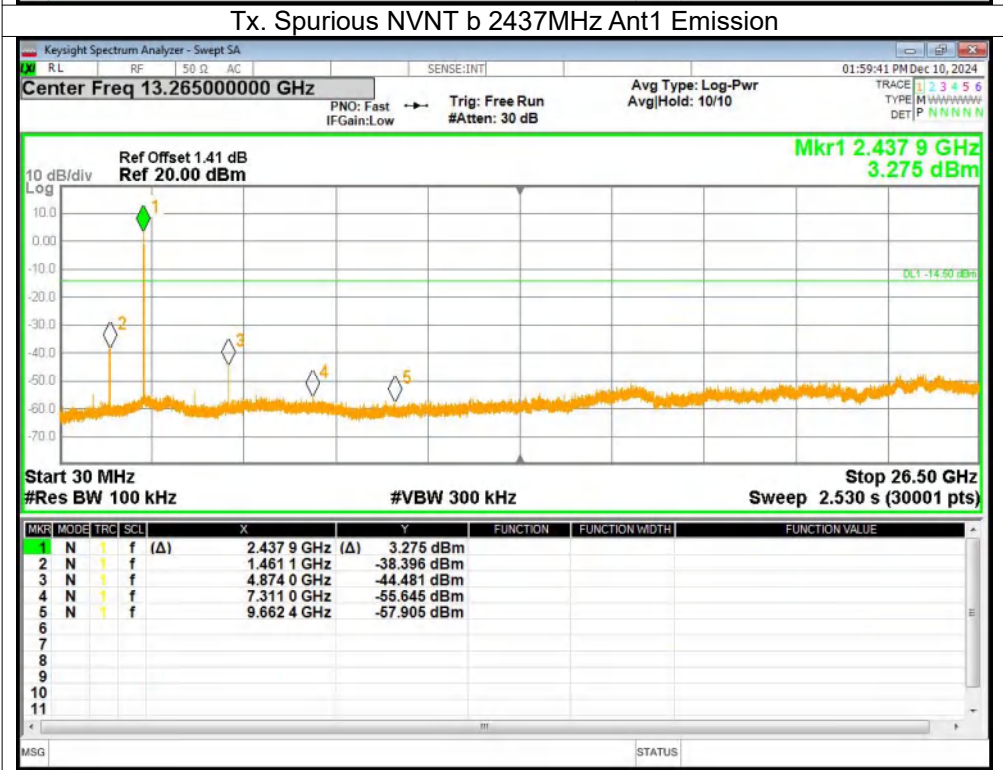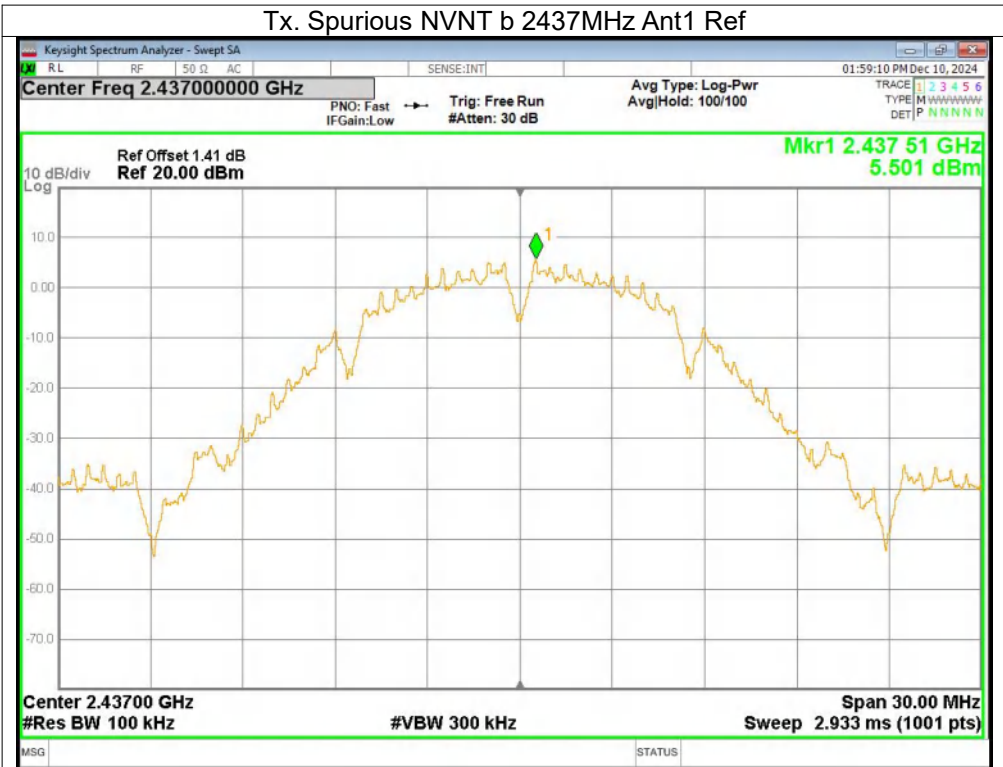




Tx. Spurious NVNT b 2462MHz Ant1 Ref


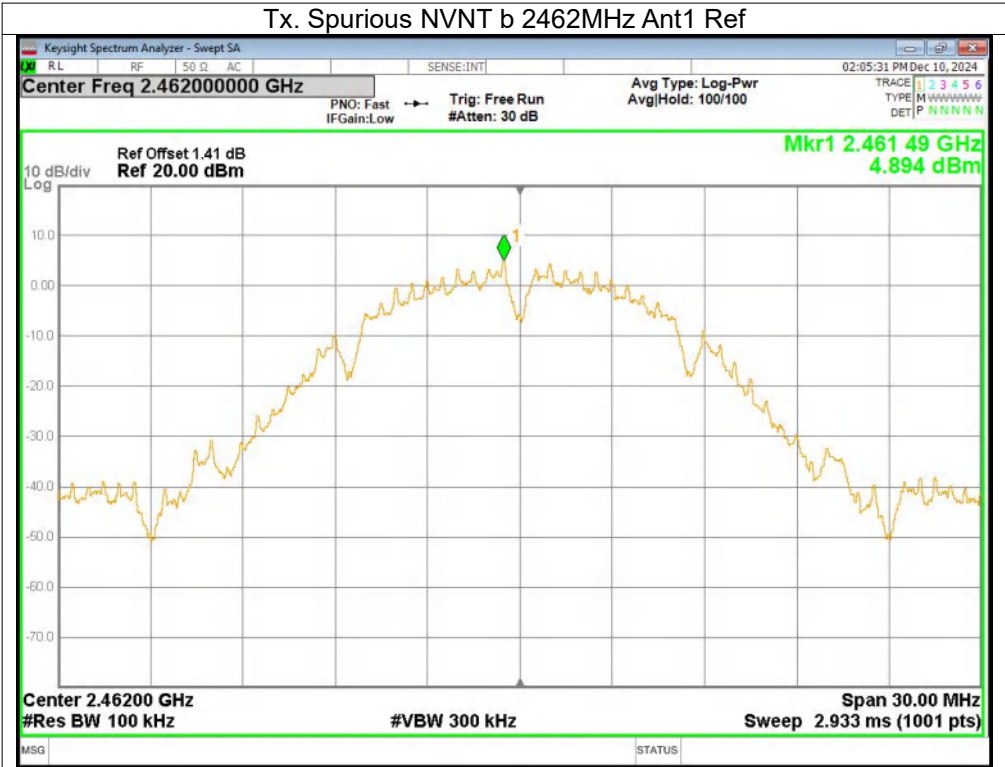


Tx. Spurious NVNT b 2462MHz Ant1 Emission

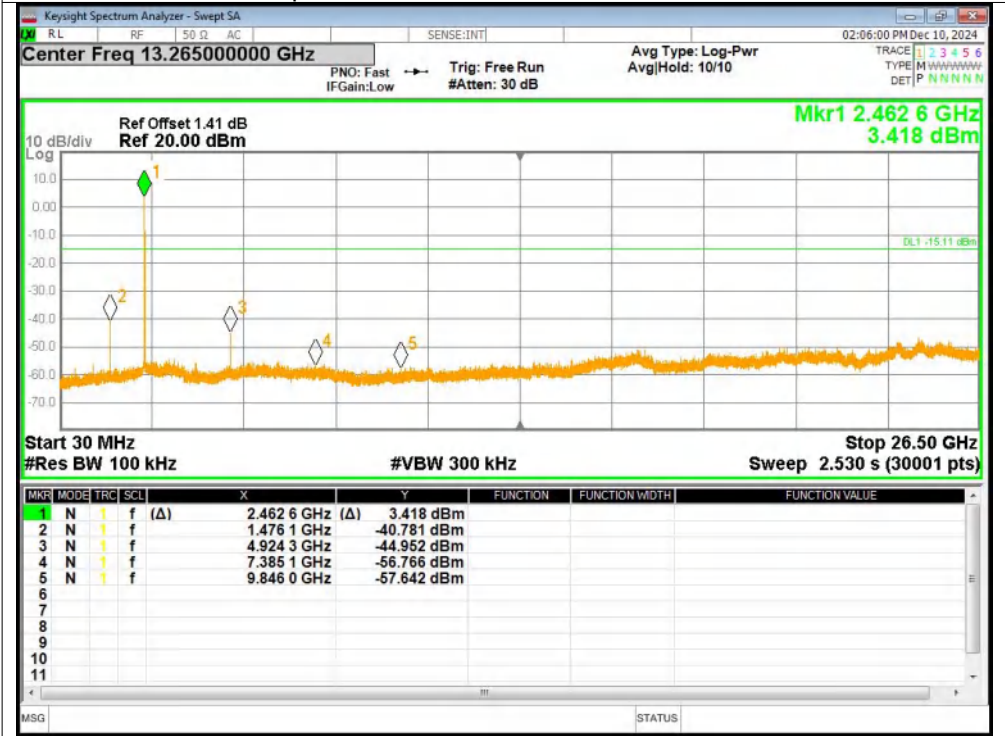


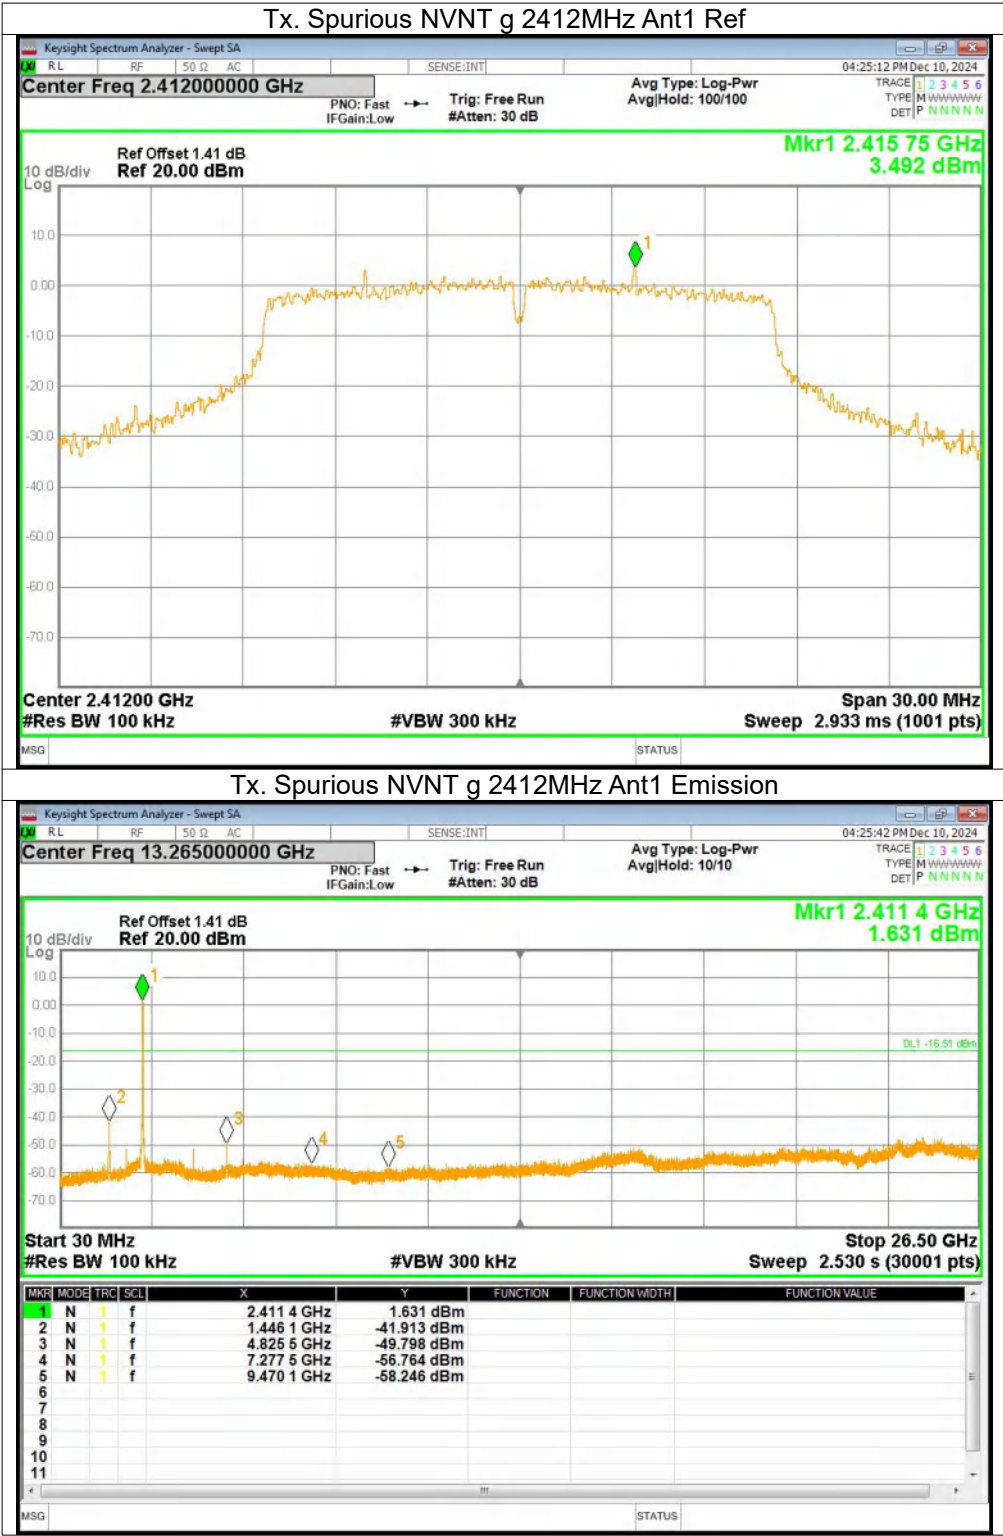

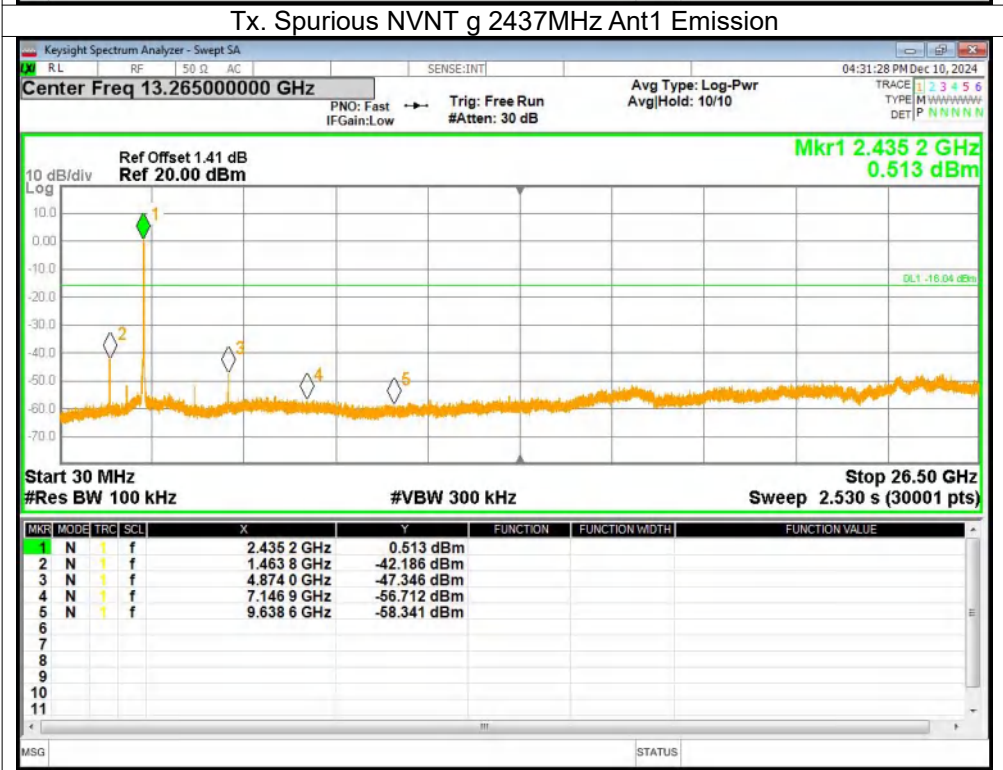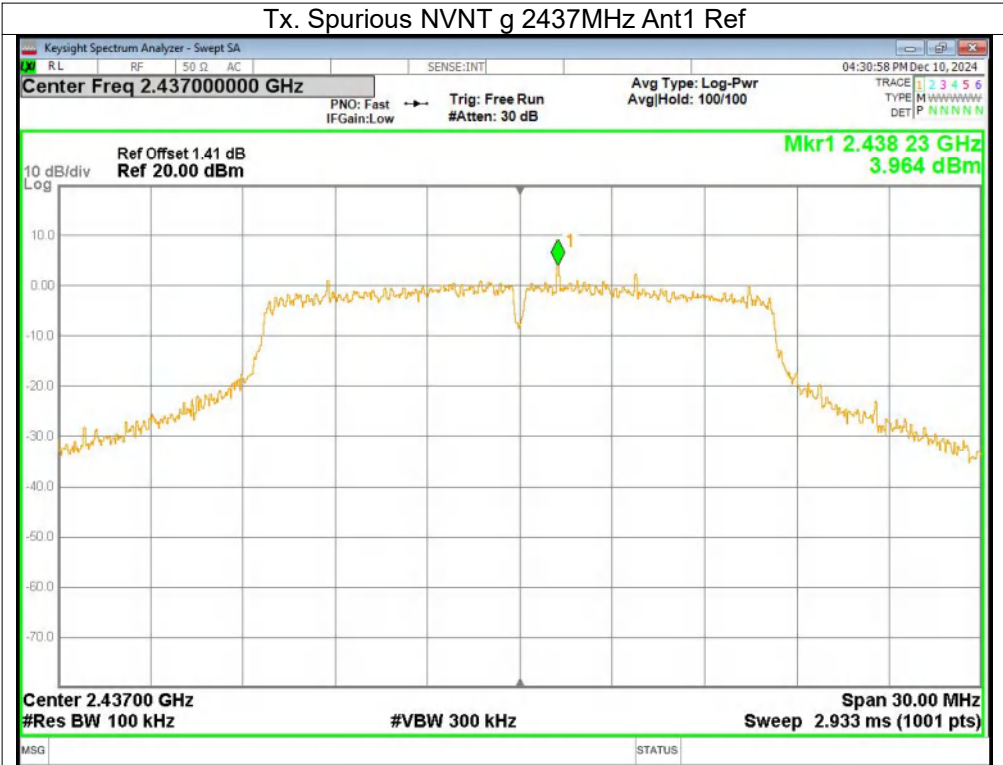


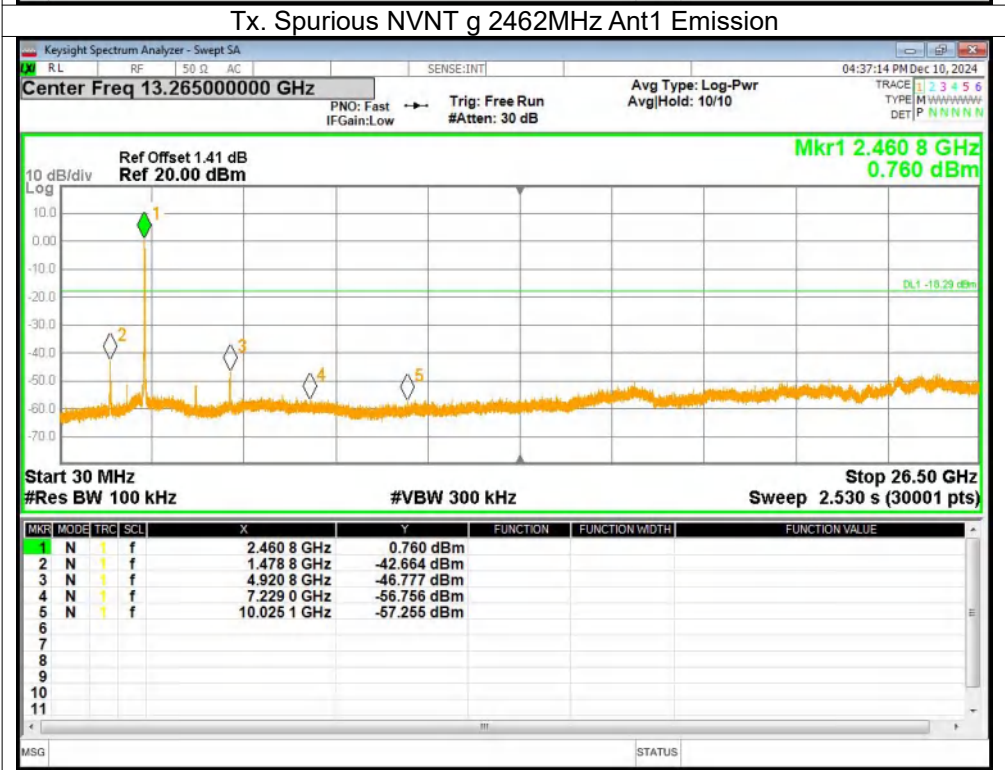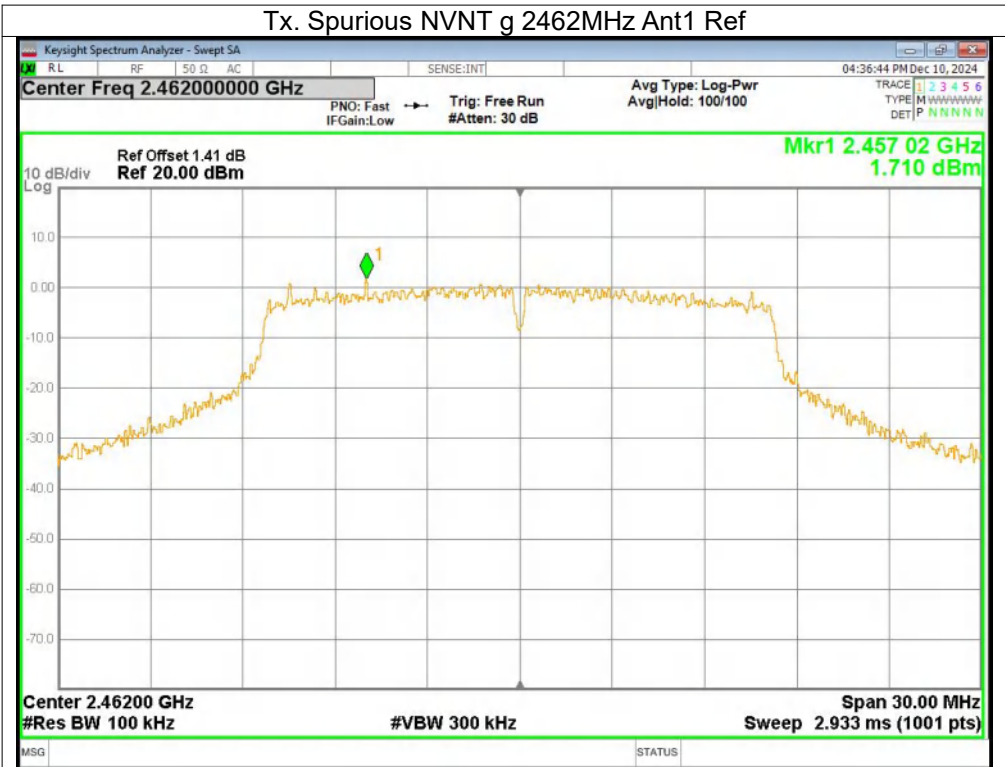


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

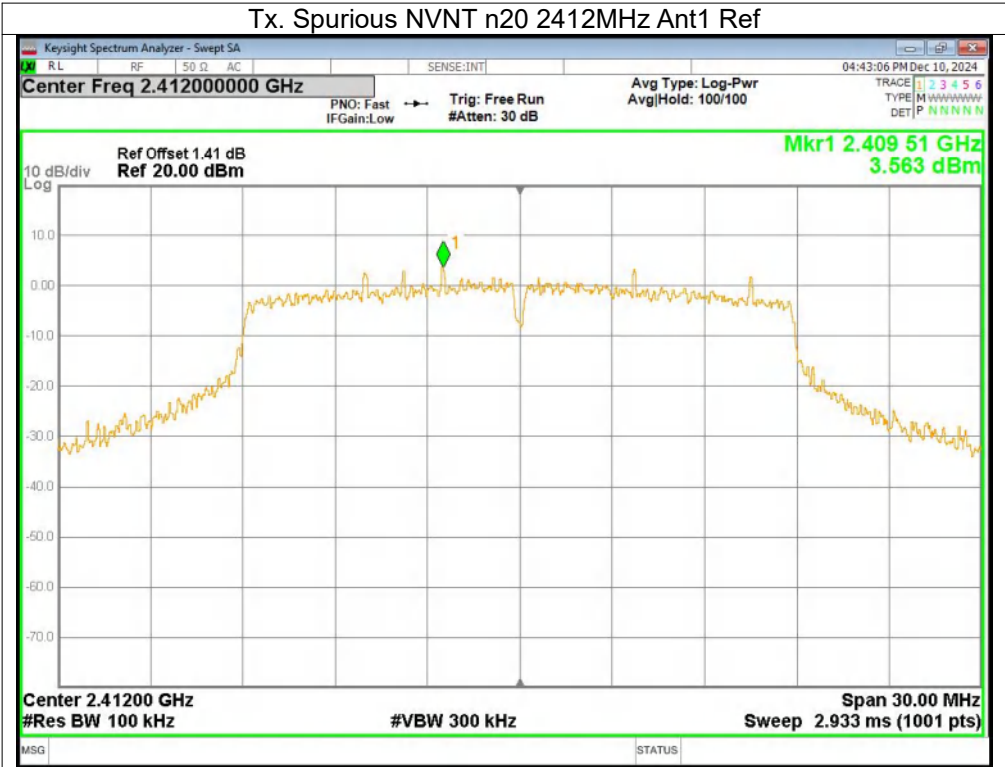


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

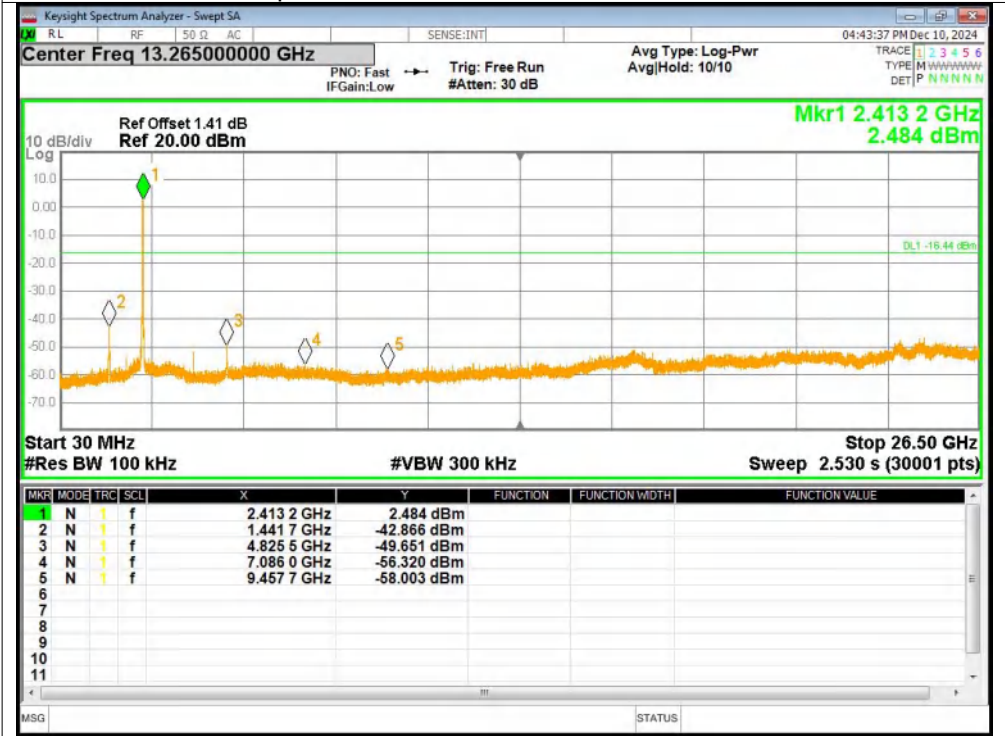


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

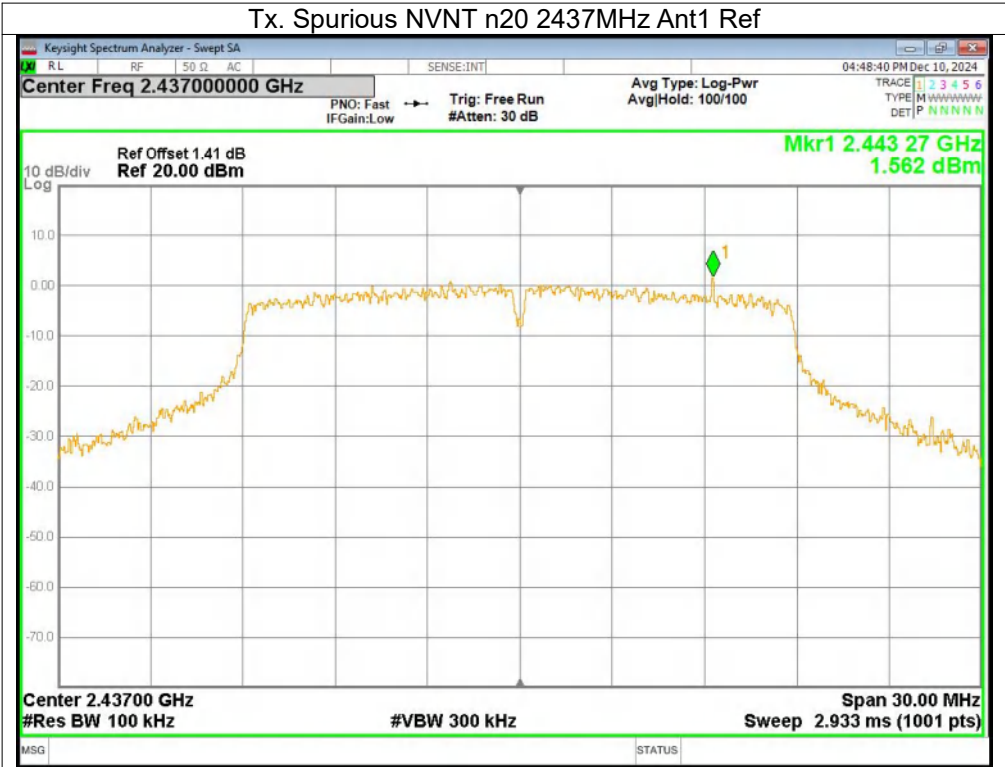


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

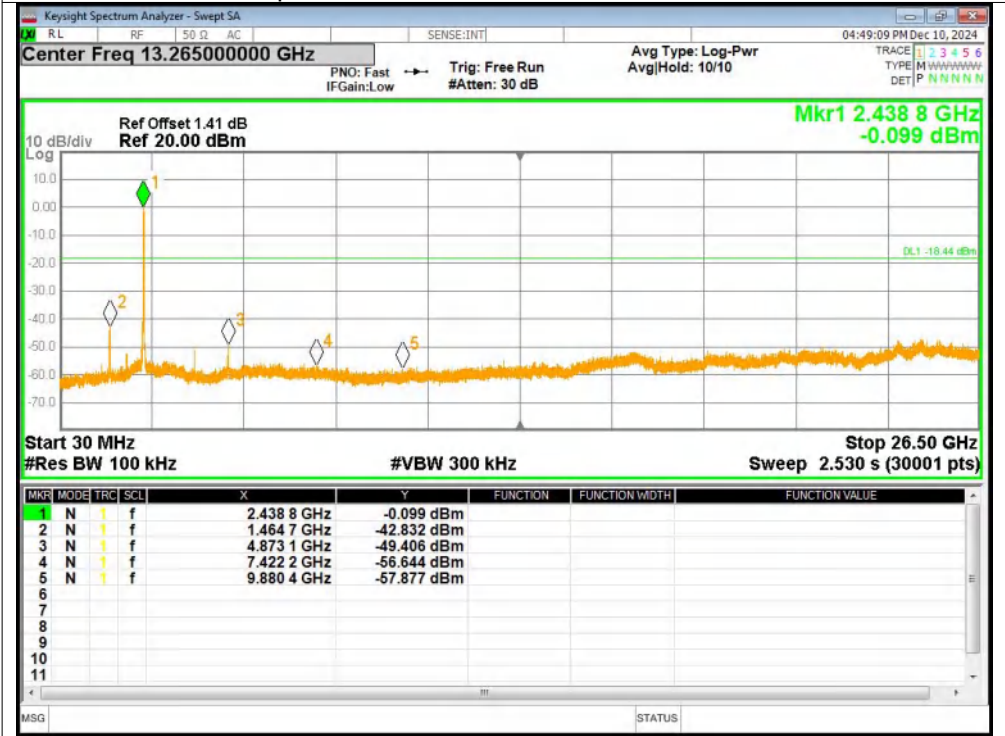


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

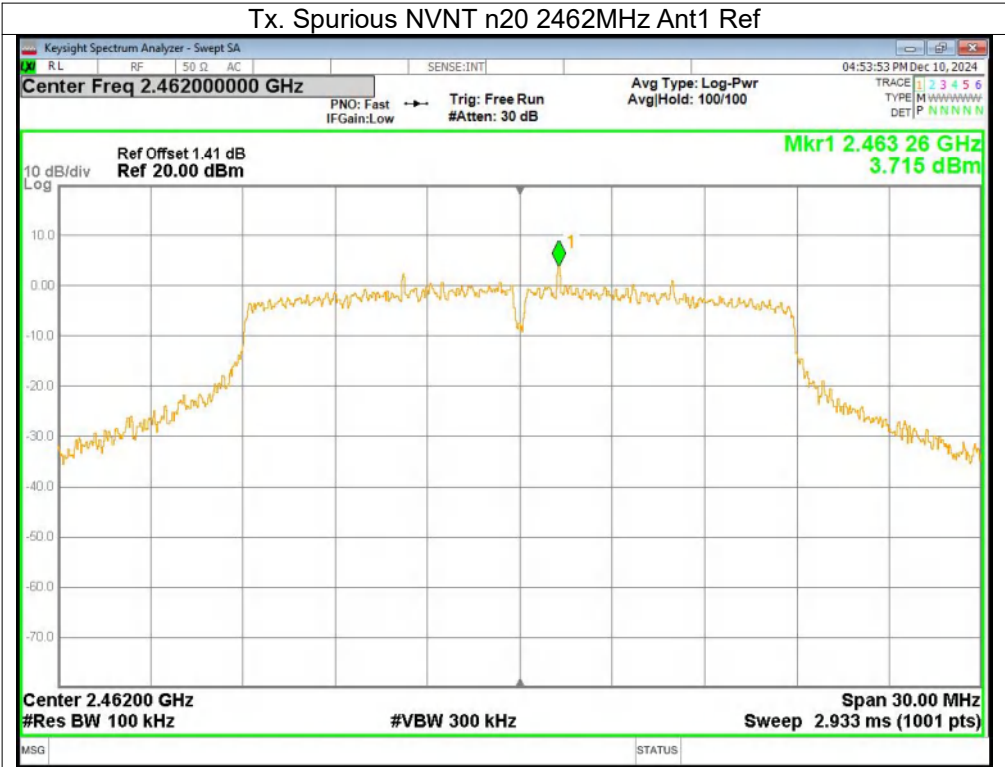

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

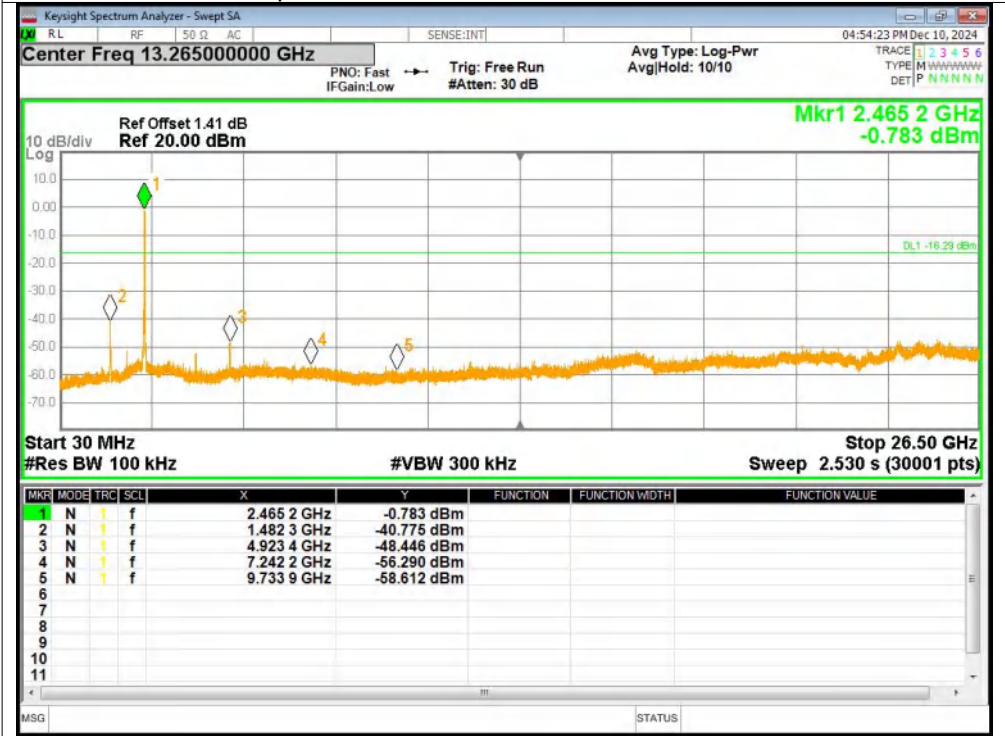

Tx. Spurious NVNT n40 2422MHz Ant1 Ref

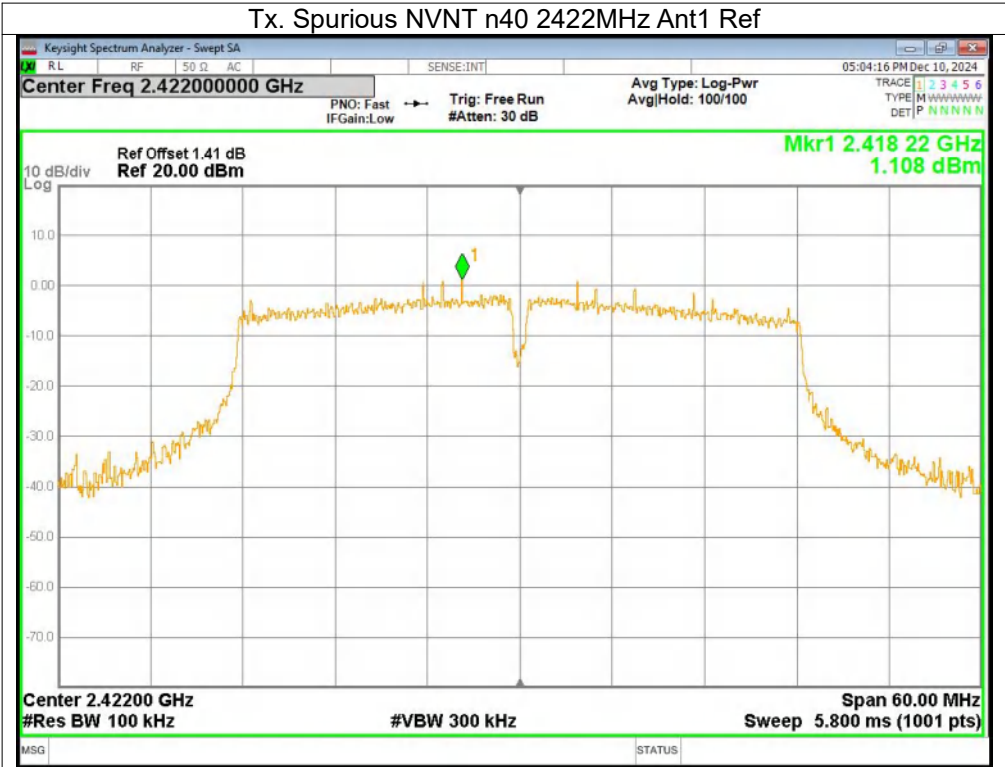

Tx. Spurious NVNT n40 2422MHz Ant1 Emission

