



RF Test Report

For

Applicant Name: Shenzhen Qichang Intelligent Technology Co., Ltd
Address: Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang, Shenzhen, China
EUT Name: Smart phone
Brand Name: FOSSIBOT
Model Number: F109
Series Model Number: F109 Pro, F109 P, F109 S, F109 Plus


Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report Number: BTF240704R01604
Test Standards: 47 CFR Part 15E
Test Conclusion: Pass
FCC ID: 2BAK2-F109
Test Date: 2024-07-07 to 2024-08-10
Date of Issue: 2024-08-11

Test By: Ssxx.guo
Ssxx.guo/ Tester

Prepared By: Ace Xie
Date: 2024-08-11
Approved By: Ryan.CJ
Date: 2024-08-11



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2024-08-11	Original
<i>Note: Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1	INTRODUCTION	5
1.1	Identification of Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Announcement	5
2	PRODUCT INFORMATION	6
2.1	Application Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description of Equipment under Test (EUT)	6
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Uncertainty of Test	7
3.3	Summary of Test Result	7
4	TEST CONFIGURATION	8
4.1	Test Equipment List	8
4.2	Test Auxiliary Equipment	14
4.3	Test Modes	14
5	EVALUATION RESULTS (EVALUATION)	15
5.1	Antenna requirement	15
6	RADIO SPECTRUM MATTER TEST RESULTS (RF)	15
6.1	Conducted Emission at AC power line	15
6.1.1	E.U.T. Operation:	15
6.1.2	Test Setup Diagram:	15
6.1.3	Test Data:	16
6.2	Duty Cycle	18
6.2.1	E.U.T. Operation:	18
6.2.2	Test Data:	18
6.3	Maximum conducted output power	19
6.3.1	E.U.T. Operation:	20
6.3.2	Test Data:	20
6.4	Power spectral density	21
6.4.1	E.U.T. Operation:	22
6.4.2	Test Data:	22
6.5	Emission bandwidth and occupied bandwidth	23
6.5.1	E.U.T. Operation:	24
6.5.2	Test Data:	24
6.6	Band edge emissions (Radiated)	25
6.6.1	E.U.T. Operation:	26
6.6.2	Test Setup Diagram:	27
6.6.3	Test Data:	28
6.7	Undesirable emission limits (below 1GHz)	28
6.7.1	E.U.T. Operation:	30
6.7.2	Test Setup Diagram:	31
6.7.3	Test Data:	32
6.8	Undesirable emission limits (above 1GHz)	34
6.8.1	E.U.T. Operation:	35

6.8.2	Test Data:	36
7	TEST SETUP PHOTOS	37
8	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	38
	APPENDIX	40

1 Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	Shenzhen Qichang Intelligent Technology Co., Ltd
Address:	Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang, Shenzhen, China

2.2 Manufacturer Information

Company Name:	Shenzhen Qichang Intelligent Technology Co., Ltd
Address:	Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang, Shenzhen, China

2.3 Factory Information

Company Name:	Shenzhen Qichang Intelligent Technology Co., Ltd
Address:	Room 510, Building 7, Yunli Intelligent Park, No. 7, Bantian Street, Longgang, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT name	Smart phone
Under test model name	F109
Series model name	F109 Pro, F109 P, F109 S, F109 Plus
Description of model name differentiation	Only the model name is different, everything else is the same.
Hardware version	E393_MAIN_PCB_V1.1
Software version	FOSSIBOT_F109_E

2.5 Technical Information

Power Supply:	AC100-240V, 50/60Hz From Adapter Rechargeable Li-ion polymer Battery DC3.87V
Power Adaptor:	Model No.: QZ-0180AAA00 Input: AC100-240V, 50/60Hz 0.5A Output: 5V \approx 3.0A 15.0W 9.0V \approx 2.0A 18.0W 12.0V \approx 1.5A 18.0W
Operation Frequency Range	U-NII Band 1: 5.18~5.24 GHz U-NII Band 3: 5.745~5.825 GHz
Frequency Block	U-NII Band 1: 5.15~5.25 GHz U-NII Band 3: 5.725~5.85 GHz
Channel Bandwidth	802.11a: 20 MHz 802.11n: 20 MHz/40 MHz 802.11ac: 20 MHz/40 MHz/80 MHz
Antenna Type:	Interior Antenna
Antenna Gain:	0.22 dBi
Note: #: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.	

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15E: Unlicensed National Information Infrastructure Devices

3.2 Uncertainty of Test

Item	Measurement Uncertainty
Conducted Emission (150 kHz-30 MHz)	$\pm 2.64\text{dB}$
Occupied Bandwidth	$\pm 69\text{kHz}$
Transmitter Power, Conducted	$\pm 0.87\text{dB}$
Power Spectral Density	$\pm 0.69\text{dB}$
Conducted Spurious Emissions	$\pm 0.95\text{dB}$
Radiated Spurious Emissions (above 1GHz)	1-6GHz: $\pm 3.94\text{dB}$ 6-18GHz: $\pm 4.16\text{dB}$
Radiated Spurious Emissions (30M - 1GHz)	$\pm 4.12\text{dB}$
The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15E	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15E	47 CFR Part 15.207(a)	Pass
Maximum conducted output power	47 CFR Part 15E	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)	Pass
Power spectral density	47 CFR Part 15E	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)	Pass
Emission bandwidth and occupied bandwidth	47 CFR Part 15E	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. 47 CFR Part 15.407(e)	Pass
Channel Availability Check Time	47 CFR Part 15E	47 CFR Part 15.407(h)(2)(ii)	Pass
U-NII Detection Bandwidth	47 CFR Part 15E	47 CFR Part 15.407(h)(2)	Pass
Statistical Performance Check	47 CFR Part 15E	KDB 935210 D02, Clause 5.1 Table 2	Pass
Channel Move Time, Channel Closing Transmission Time	47 CFR Part 15E	47 CFR Part 15.407(h)(2)(iii)	Pass
Non-Occupancy Period Test	47 CFR Part 15E	47 CFR Part 15.407(h)(2)(iv)	Pass
DFS Detection Thresholds	47 CFR Part 15E	KDB 905462 D02, Clause 5.2 Table 3	Pass
Band edge emissions (Radiated)	47 CFR Part 15E	47 CFR Part 15.407(b)(1)	Pass

		47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	
Undesirable emission limits (below 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(9)	Pass
Undesirable emission limits (above 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2023-11-16	2024-11-15
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2023-11-16	2024-11-15
V-LISN	SCHWARZBECK	NSLK 8127	01073	2023-11-16	2024-11-15
LISN	AFJ	LS16/110VAC	16010020076	2023-11-16	2024-11-15
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2023-11-16	2024-11-15

Duty Cycle					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Maximum conducted output power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic	etm-6050c	20211026123	2023-11-16	2024-11-15

	Technology Co., LTD				
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Power spectral density

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Emission bandwidth and occupied bandwidth

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Channel Availability Check Time

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15

Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

U-NII Detection Bandwidth

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Statistical Performance Check

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Channel Move Time, Channel Closing Transmission Time

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/

RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Non-Occupancy Period Test

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

DFS Detection Thresholds

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-16	2024-11-15
RF Sensor Unit	Techy	TR1029-2	/	2023-11-16	2024-11-15
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-16	2024-11-15
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-16	2024-11-15
WIDEBAND RADIO COMMUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-16	2024-11-15
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-16	2024-11-15

Band edge emissions (Radiated)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	/	/
Preamplifier	SCHWARZBECK	BBV9744	00246	2023-11-16	2023-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2023-11-16	2024-11-15
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	2024-11-15
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2023-11-16	2024-11-15
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2023-11-16	2024-11-15
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2023-11-16	2024-11-15
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-11-16	2024-11-15
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2023-11-16	2024-11-15
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2023-11-16	2024-11-15

Undesirable emission limits (below 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	/	/
Preamplifier	SCHWARZBECK	BBV9744	00246	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2023-11-16	2024-11-15
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2023-11-16	2024-11-15
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2023-11-16	2024-11-15
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2023-11-16	2024-11-15
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-11-16	2024-11-15

Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2023-11-16	2024-11-15
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2021-11-28	2024-11-15

Undesirable emission limits (above 1GHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	/	/
Preamplifier	SCHWARZBECK	BBV9744	00246	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF1-SMAMAM-10m	21101566	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF1-SMAMAM-1m	21101568	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2023-11-16	2024-11-15
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2023-11-16	2024-11-15
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2023-11-16	2024-11-15
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2023-11-16	2024-11-15
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2023-11-16	2024-11-15
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplifier	SCHWARZBECK	BBV9718D	00008	2023-11-16	2024-11-15
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2023-11-16	2024-11-15
EZ EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2023-11-16	2024-11-15

4.2 Test Auxiliary Equipment

The EUT was tested as an independent device.

4.3 Test Modes

No.	Test Modes	Description
TM1	802.11a mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11a modulation type. All data rates has been tested and found the data rate @ 6Mbps is the worst case. Only the data of worst case is recorded in the report.
TM2	802.11n mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11n modulation type. All bandwidth and data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM3	802.11ac mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. Only the data of worst case is recorded in the report.
TM4	Normal Operating	Keep the EUT works in normal operating mode and connect to companion device

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	47 CFR Part 15.207(a)		
Test Method:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		

6.1.1 E.U.T. Operation:


Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.1.2 Test Setup Diagram:

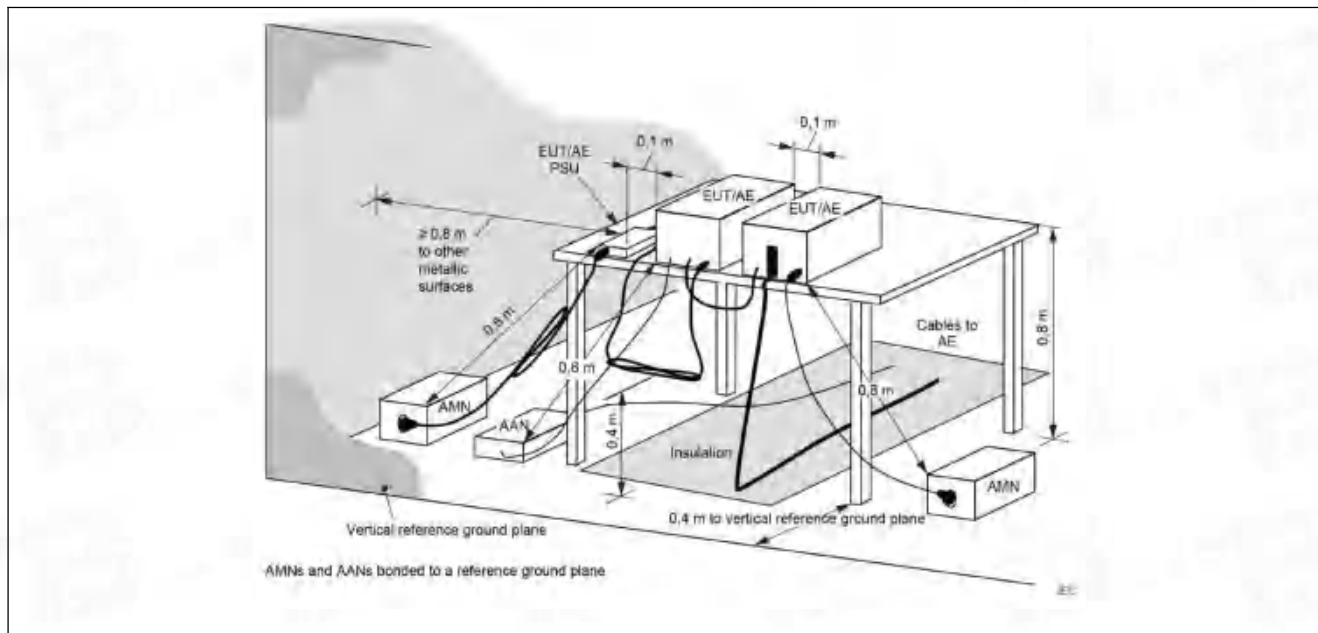


6.1.3 Test Data:

TM1 / Line: Line / Band: U-NII 1 / BW: 20 / CH: L

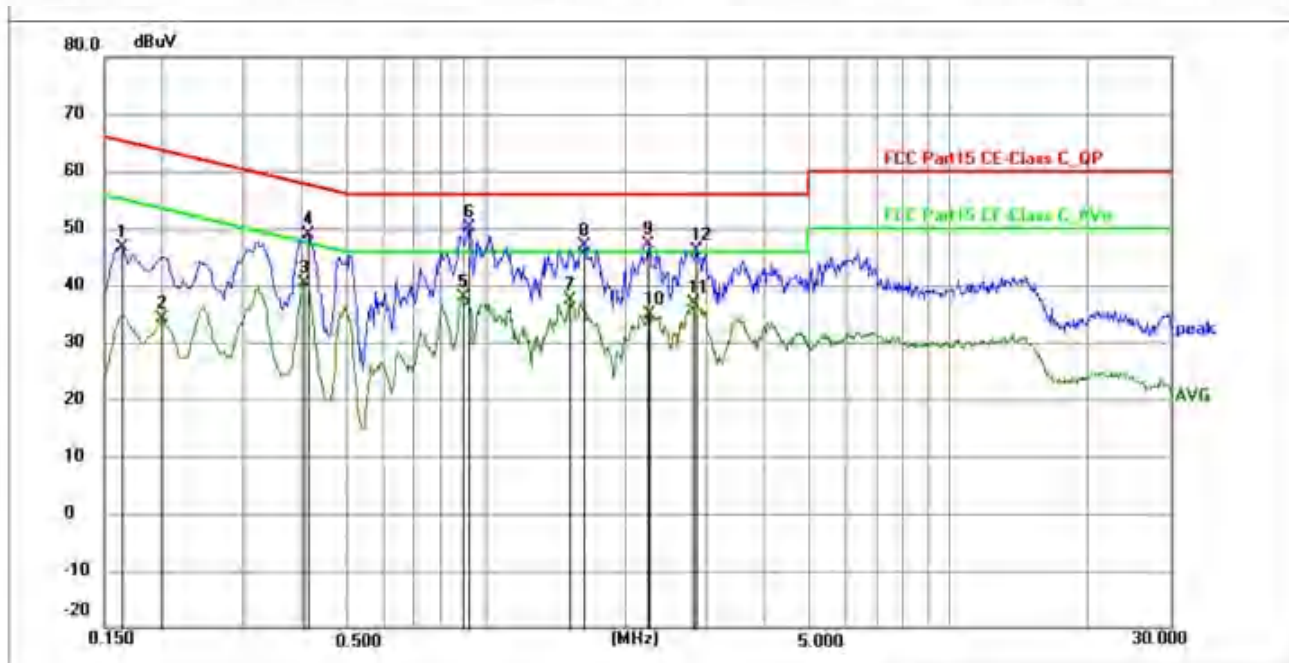

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1635	36.27	10.48	46.75	65.28	-18.53	QP	P	
2	0.1995	23.55	10.56	34.11	53.63	-19.52	AVG	P	
3	0.4020	29.77	10.57	40.34	47.81	-7.47	AVG	P	
4	0.4110	38.19	10.57	48.76	57.63	-8.87	QP	P	
5	0.8921	27.22	10.68	37.90	46.00	-8.10	AVG	P	
6 *	0.9193	39.35	10.67	50.02	56.00	-5.98	QP	P	
7	1.5135	26.76	10.66	37.42	46.00	-8.58	AVG	P	
8	1.6305	36.20	10.67	46.87	56.00	-9.13	QP	P	
9	2.2470	36.44	10.68	47.12	56.00	-8.88	QP	P	
10	2.2515	24.33	10.67	35.00	46.00	-11.00	AVG	P	
11	2.8050	26.26	10.68	36.94	46.00	-9.06	AVG	P	
12	2.8500	35.45	10.68	46.13	56.00	-9.87	QP	P	

TM1 / Line: Neutral / Band: U-NII 1 / BW: 20 / CH: L

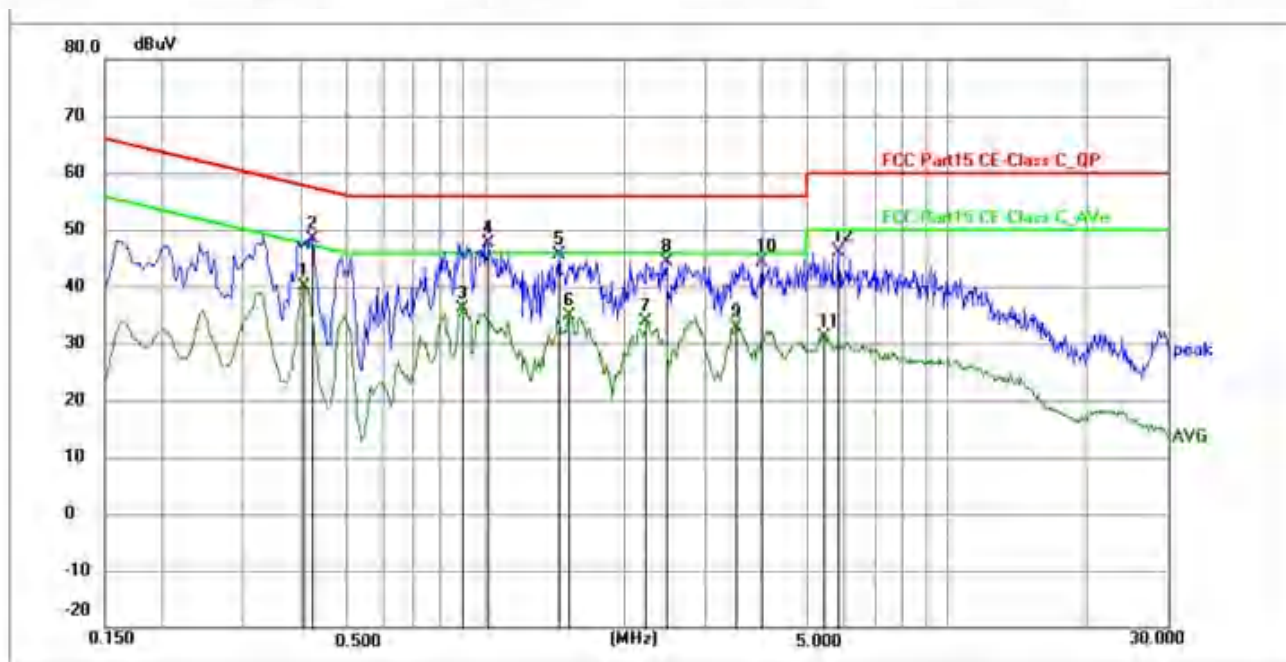

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.4020	29.60	10.57	40.17	47.81	-7.64	AVG	P	
2	0.4200	37.81	10.57	48.38	57.45	-9.07	QP	P	
3	0.8921	25.56	10.68	36.24	46.00	-9.76	AVG	P	
4	1.0181	36.88	10.66	47.54	56.00	-8.46	QP	P	
5	1.4415	34.98	10.66	45.64	56.00	-10.36	QP	P	
6	1.5135	24.31	10.66	34.97	46.00	-11.03	AVG	P	
7	2.2290	23.14	10.68	33.82	46.00	-12.18	AVG	P	
8	2.4630	33.63	10.67	44.30	56.00	-11.70	QP	P	
9	3.5070	22.36	10.63	32.99	46.00	-13.01	AVG	P	
10	3.9840	33.67	10.68	44.35	56.00	-11.65	QP	P	
11	5.4240	20.29	10.75	31.04	50.00	-18.96	AVG	P	
12	5.8334	35.46	10.76	46.22	60.00	-13.78	QP	P	

6.2 Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Method:	ANSI C63.10-2020 section 12.2 (b)
Test Limit:	No limits, only for report use.
Procedure:	i) Set the center frequency of the instrument to the center frequency of the transmission. ii) Set RBW \geq EBW if possible; otherwise, set RBW to the largest available value. iii) Set VBW \geq RBW. iv) Set detector = peak. v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.2.2 Test Data:

Please Refer to Appendix for Details.

6.3 Maximum conducted output power

Test Requirement:	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)
Test Method:	ANSI C63.10-2020, section 12.3
Test Limit:	<p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>

	<p>For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.</p> <p>If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>
Procedure:	<p>Method SA-1</p> <p>a) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.</p> <p>b) Set RBW = 1 MHz.</p> <p>c) Set VBW \geq 3 MHz.</p> <p>d) Number of points in sweep \geq $[2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)</p> <p>e) Sweep time = auto.</p> <p>f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.</p> <p>g) If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle \geq 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."</p> <p>h) Trace average at least 100 traces in power averaging (rms) mode.</p> <p>i) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.</p>

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.3.2 Test Data:

Please Refer to Appendix for Details.

6.4 Power spectral density

Test Requirement:	47 CFR Part 15.407(a)(1)(i) 47 CFR Part 15.407(a)(1)(ii) 47 CFR Part 15.407(a)(1)(iii) 47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(2) 47 CFR Part 15.407(a)(3)(i)
Test Method:	ANSI C63.10-2020, section 12.5
Test Limit:	<p>For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p> <p>For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter</p>

	<p>conducted power.</p> <p>Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>
Procedure:	<p>a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.)</p> <p>b) Use the peak search function on the instrument to find the peak of the spectrum.</p> <p>c) Make the following adjustments to the peak value of the spectrum, if applicable:</p> <ol style="list-style-type: none"> 1) If method SA-2 or SA-2A was used, then add $[10 \log (1 / D)]$, where D is the duty cycle, to the peak of the spectrum. 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. <p>d) The result is the PPSD.</p> <p>e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities. This requirement also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply:</p> <ol style="list-style-type: none"> 1) Set $RBW \geq 1 / T$, where T is defined in 12.2 a). 2) Set $VBW \geq [3 \times RBW]$. 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.4.2 Test Data:

Please Refer to Appendix for Details.

6.5 Emission bandwidth and occupied bandwidth

Test Requirement:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: 47 CFR Part 15.407(e)
Test Method:	ANSI C63.10-2020, section 6.9.3 & 12.4 KDB 789033 D02, Clause C.2
Test Limit:	U-NII 1, U-NII 2A, U-NII 2C: No limits, only for report use. U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Procedure:	<p>Emission bandwidth:</p> <ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = peak. Trace mode = max hold. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. <p>Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</p> <p>Occupied bandwidth:</p> <ol style="list-style-type: none"> The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2. Step a) through step c) might require iteration to adjust within the specified range. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until

	<p>99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.</p> <p>h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).</p> <p>6 dB emission bandwidth:</p> <p>a) Set RBW = 100 kHz.</p> <p>b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.</p> <p>c) Detector = Peak.</p> <p>d) Trace mode = max hold.</p> <p>e) Sweep = auto couple.</p> <p>f) Allow the trace to stabilize.</p> <p>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p>
--	--

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.5.2 Test Data:

Please Refer to Appendix for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)
Test Method:	ANSI C63.10-2020, section 12.7.4, 12.7.5, 12.7.6
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
	For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
	MHzMHzMHzGHz
	0.090-0.11016.42-16.423399.9-4104.5-5.15
	¹ 0.495-0.50516.69475-16.69525608-6145.35-5.46
	2.1735-2.190516.80425-16.80475960-12407.25-7.75
	4.125-4.12825.5-25.671300-14278.025-8.5
	4.17725-4.1777537.5-38.251435-1626.59.0-9.2
	4.20725-4.2077573-74.61645.5-1646.59.3-9.5
	6.215-6.21874.8-75.21660-171010.6-12.7
	6.26775-6.26825108-121.941718.8-1722.213.25-13.4
	6.31175-6.31225123-1382200-230014.47-14.5
	8.291-8.294149.9-150.052310-239015.35-16.2
	8.362-8.366156.52475-156.5252483.5-250017.7-21.4
	8.37625-8.38675156.7-156.92690-290022.01-23.12
	8.41425-8.41475162.0125-167.173260-326723.6-24.0
12.29-12.293167.72-173.23332-333931.2-31.8	
12.51975-12.52025240-2853345.8-335836.43-36.5	
12.57675-12.57725322-335.43600-4400(2)	
13.36-13.41	
¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.	
² Above 38.6	
The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.	
Except as provided elsewhere in this subpart, the emissions from an intentional	


	radiator shall not exceed the field strength levels specified in the following table:		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
Procedure:	<p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.</p> <p>3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.</p> <p>4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.</p>		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C

Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.6.2 Test Setup Diagram:

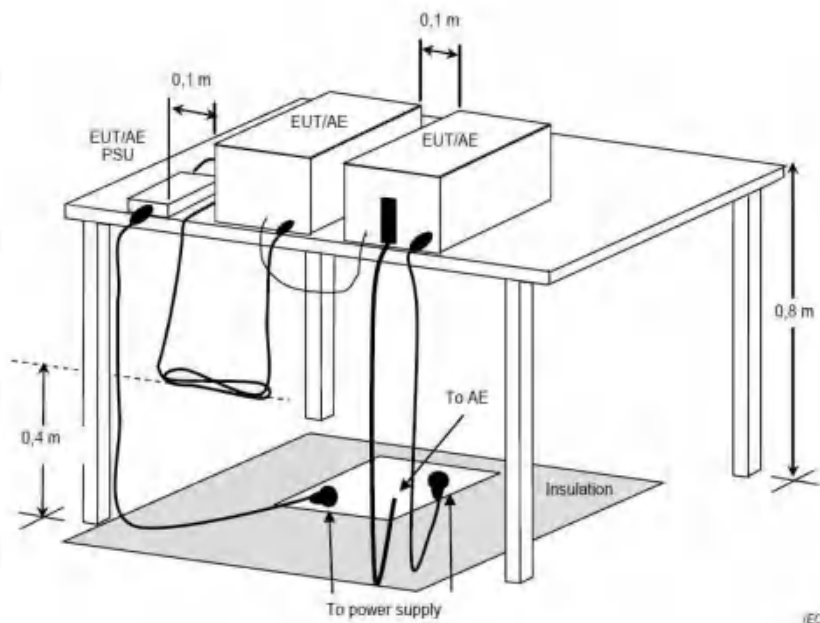

6.6.3 Test Data:

Note: All the mode have been tested, and only the worst mode 802.11n(20) are in the report
U-NII-1

Polarization	Frequency	Read Level	Preamplifier Factor	Emission Level	Limits	Over Limit	Detector Type
/	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal	4500	65.75	-28.23	37.52	74	-36.48	Pk
Horizontal	5150	63.54	-27.55	35.99	74	-38.01	Pk
Vertical	4500	67.82	-28.23	39.59	74	-34.41	Pk
Vertical	5150	61.08	-27.55	33.53	74	-40.47	Pk
Horizontal	5350	46.30	-27.19	19.11	74	-54.89	Pk
Horizontal	5460	50.93	-26.98	23.95	74	-50.05	Pk
Vertical	5350	49.02	-27.19	21.83	74	-52.17	Pk
Vertical	5460	49.69	-26.98	22.71	74	-51.29	Pk

U-NII-3

For 802.11a mode: CH149 5745MHz

Polarization	Frequency	Read Level	Preamplifier Factor	Emission Level	Limits	Over Limit	Detector Type
/	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal	5650	67.19	-26.51	40.68	68	-27.32	Pk
Horizontal	5700	84.85	-26.29	58.56	106.32	-47.76	Pk
Horizontal	5720	84.97	-26.51	58.46	108.64	-50.18	Pk
Horizontal	5725	83.23	-26.29	56.94	110.29	-53.35	Pk
Vertical	5650	66.30	-26.51	39.79	68	-28.21	Pk
Vertical	5700	84.62	-26.29	58.33	106.32	-47.99	Pk
Vertical	5720	84.71	-26.51	58.20	108.64	-50.44	Pk
Vertical	5725	84.10	-26.29	57.81	110.29	-52.48	Pk

For 802.11a mode: CH159 5795MHz

Polarization	Frequency	Read Level	Preamplifier Factor	Emission Level	Limits	Over Limit	Detector Type
/	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Horizontal	5850	86.99	-26.29	60.70	110.36	-49.66	Pk
Horizontal	5855	87.08	-26.27	60.81	108.96	-48.15	Pk
Horizontal	5875	87.36	-26.24	61.12	106.1	-44.98	Pk
Horizontal	5925	61.41	-26.14	35.27	68	-32.73	Pk
Vertical	5850	85.94	-26.29	59.65	110.36	-50.71	Pk
Vertical	5855	88.25	-26.27	61.98	108.96	-46.98	Pk
Vertical	5875	87.97	-26.24	61.73	106.1	-44.37	Pk
Vertical	5925	60.04	-26.14	33.90	68	-34.10	Pk

6.7 Undesirable emission limits (below 1GHz)

Test Requirement: 47 CFR Part 15.407(b)(9)

Test Method:	ANSI C63.10-2020, section 12.7.4, 12.7.5, 12.7.6		
Test Limit:	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.		
	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:		
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
Procedure:	216-960	200 **	3
	Above 960	500	3
	Below 1GHz:		
	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.		
	b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.		
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.		
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.		
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.		
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.		
	g. Test the EUT in the lowest channel, the middle channel, the Highest channel.		
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.		
	i. Repeat above procedures until all frequencies measured was complete.		
	Remark:		
	1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor		
	2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.		
	3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.		
	Above 1GHz:		
	a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360		

degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middle channel, the Highest channel.

h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.


i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.


6.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

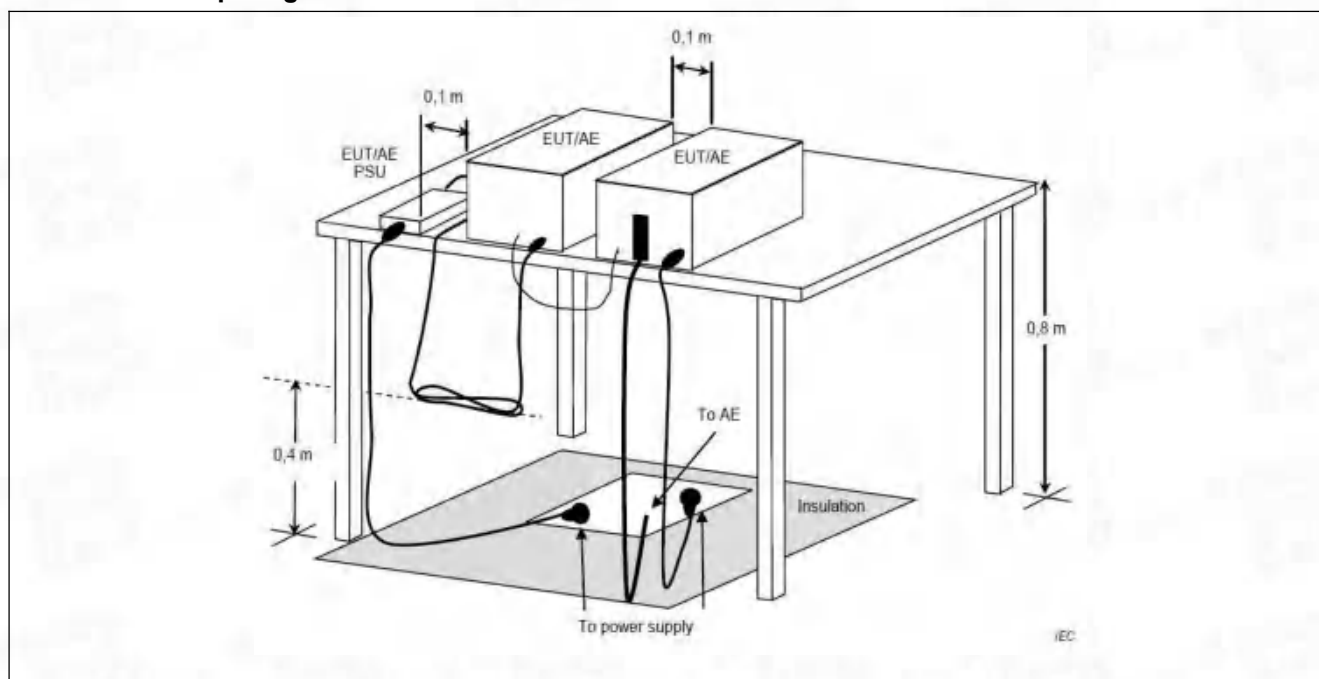6.7.2 Test Setup Diagram:


6.7.3 Test Data:

Note: All the mode have been tested, and only the worst mode are in the report
 TM1 / Polarization: Horizontal / Band: U-NII 1 / BW: 20 / CH: L

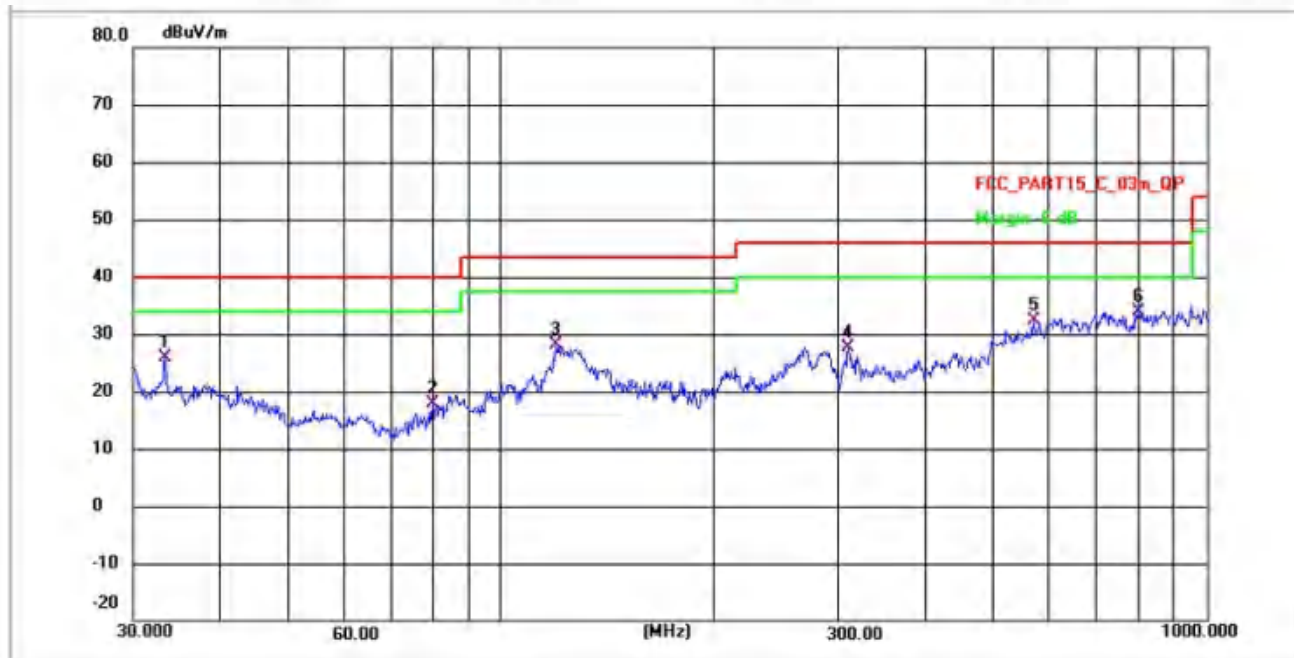

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	33.3278	35.65	-9.68	25.97	40.00	-14.03	QP	P
2	79.9402	27.13	-9.26	17.87	40.00	-22.13	QP	P
3	119.6456	50.30	-22.29	28.01	43.50	-15.49	QP	P
4	309.9977	48.22	-20.54	27.68	46.00	-18.32	QP	P
5	570.6100	50.86	-18.53	32.33	46.00	-13.67	QP	P
6 *	798.9796	51.80	-17.85	33.95	46.00	-12.05	QP	P

TM1 / Polarization: Vertical / Band: U-NII 1 / BW: 20 / CH: L

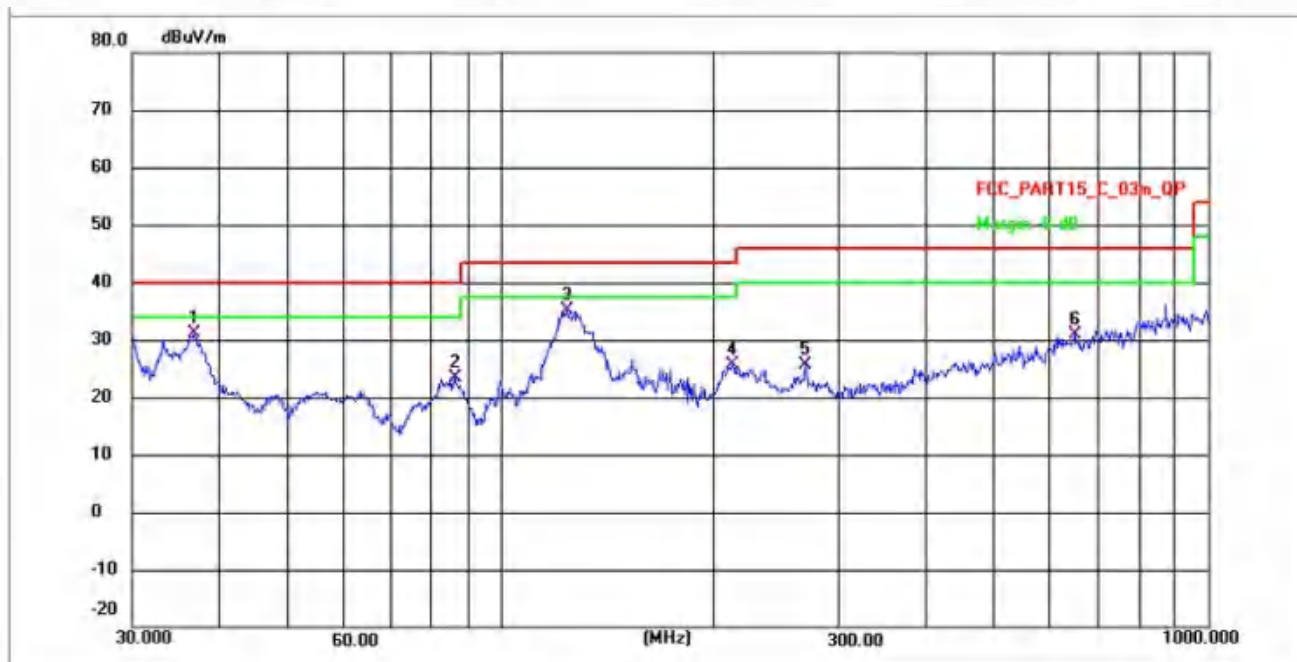

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	36.8305	40.69	-9.65	31.04	40.00	-8.96	QP	P
2	86.0490	46.05	-22.68	23.37	40.00	-16.63	QP	P
3 *	124.3508	57.45	-22.24	35.21	43.50	-8.29	QP	P
4	212.6420	47.15	-21.41	25.74	43.50	-17.76	QP	P
5	269.4282	46.45	-20.88	25.57	46.00	-20.43	QP	P
6	648.5216	48.82	-17.98	30.84	46.00	-15.16	QP	P

6.8 Undesirable emission limits (above 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(2) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)			
Test Method:	ANSI C63.10-2020, section 12.7.4, 12.7.5, 12.7.6			
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.			
	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.			
	MHz	MHz	MHz	GHz
	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
			5	
	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
			2	
	6.31175-6.31225	123-138	2200-2300	14.47-14.5
	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
	8.362-8.366	156.52475-156.525	2483.5-2500	17.7-21.4
		25		
	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	
12.57675-12.57725	322-335.4	3600-4400	(²)	
13.36-13.41				
	¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ² Above 38.6			
	The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.			
	Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:			
	Frequency (MHz)	Field strength	Measurement	

	(microvolts/meter)	distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

Procedure:	<p>Above 1GHz:</p> <p>a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p> <p>Remark:</p> <p>1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> <p>2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.</p> <p>3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.</p> <p>4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.</p>
------------	--

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.8.2 Test Data:

Not:All of the mode had be tested, only the worse mode of 802.11a are show in the report:

U-NII 1


Polar	Frequency	Meter Reading	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G							
Vertical	4435.878	56.38	-28.23	28.15	74.00	-45.85	Pk
Vertical	4434.308	44.70	-28.23	16.47	54.00	-37.53	AV
Vertical	10371.901	61.67	-45.12	16.55	68.20	-51.65	Pk
Vertical	15541.198	55.43	-42.88	12.55	68.20	-55.65	Pk
Vertical	15540.545	42.78	-42.88	-0.10	54.00	-54.10	AV
Horizontal	4434.675	58.55	-28.23	30.32	74.00	-43.68	Pk
Horizontal	4436.293	43.03	-28.23	14.80	54.00	-39.20	AV
Horizontal	10370.576	60.94	-45.12	15.82	68.20	-52.38	Pk
Horizontal	15541.160	57.52	-42.88	14.64	68.20	-53.56	Pk
Horizontal	15540.707	43.14	-42.88	0.26	54.00	-53.74	AV
middle Channel (5200 MHz)-Above 1G							
Vertical	4593.390	57.87	-28.25	29.62	74.00	-44.38	Pk
Vertical	4592.251	41.90	-28.25	13.65	54.00	-40.35	AV
Vertical	10401.536	45.59	-45.18	0.41	68.20	-67.79	AV
Vertical	15600.346	57.06	-42.94	14.12	68.20	-54.08	Pk
Vertical	15600.323	42.82	-42.94	-0.12	54.00	-54.12	AV
Horizontal	4593.869	60.08	-28.25	31.83	74.00	-42.17	Pk
Horizontal	4594.209	43.25	-28.25	15.00	54.00	-39.00	AV
Horizontal	10401.227	46.80	-45.18	1.62	68.20	-66.58	AV
Horizontal	15601.862	57.44	-42.94	14.50	68.20	-53.70	Pk
Horizontal	15602.292	43.69	-42.94	0.75	54.00	-53.25	AV
High Channel (5240 MHz)-Above 1G							
Vertical	4740.262	59.66	-28.35	31.31	74.00	-42.69	Pk
Vertical	4739.296	45.75	-28.35	17.40	54.00	-36.60	AV
Vertical	10482.135	60.86	-45.07	15.79	68.20	-52.41	Pk
Vertical	15721.382	58.00	-42.83	15.17	68.20	-53.03	Pk
Vertical	15722.124	42.35	-42.83	-0.48	54.00	-54.48	AV
Horizontal	4739.841	59.50	-28.35	31.15	74.00	-42.85	Pk
Horizontal	4740.161	44.45	-28.35	16.10	54.00	-37.90	AV
Horizontal	10483.391	43.45	-45.07	-1.62	68.20	-69.82	AV
Horizontal	15720.537	56.35	-42.83	13.52	68.20	-54.68	Pk
Horizontal	15721.172	42.33	-42.83	-0.50	54.00	-54.50	AV

U-NII 3

Polar	Frequency	Meter Reading	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G							
Vertical	4680.665	59.16	-28.23	30.93	74.00	-43.07	Pk
Vertical	4679.199	47.42	-28.23	19.19	54.00	-34.81	AV
Vertical	11492.076	59.67	-45.12	14.55	74.00	-59.45	Pk
Vertical	17236.589	58.15	-42.88	15.27	54.00	-38.73	Pk
Vertical	17236.224	40.81	-42.88	-2.07	68.20	-70.27	AV
Horizontal	4680.469	58.54	-28.23	30.31	74.00	-43.69	Pk
Horizontal	4679.259	45.43	-28.23	17.20	54.00	-36.80	AV
Horizontal	11491.987	59.30	-45.12	14.18	74.00	-59.82	Pk
Horizontal	17236.780	60.66	-42.88	17.78	54.00	-36.22	Pk
Horizontal	17235.858	43.36	-42.88	0.48	68.20	-67.72	AV
middle Channel (5785 MHz)-Above 1G							
Vertical	4593.998	58.17	-28.23	29.94	74.00	-44.06	Pk
Vertical	4592.664	44.38	-28.23	16.15	54.00	-37.85	AV
Vertical	11572.060	60.48	-45.16	15.32	74.00	-58.68	Pk
Vertical	17356.259	58.82	-42.89	15.93	54.00	-38.07	Pk
Vertical	17357.378	40.94	-42.89	-1.95	68.20	-70.15	AV
Horizontal	4594.114	60.51	-28.23	32.28	74.00	-41.72	Pk
Horizontal	4593.342	45.26	-28.23	17.03	54.00	-36.97	AV
Horizontal	11572.152	47.70	-45.16	2.54	74.00	-71.46	AV
Horizontal	17355.990	60.82	-42.89	17.93	54.00	-36.07	Pk
Horizontal	17355.278	45.68	-42.89	2.79	68.20	-65.41	AV
High Channel (5825 MHz)-Above 1G							
Vertical	5039.297	61.42	-28.25	33.17	74.00	-40.83	Pk
Vertical	5040.184	46.27	-28.25	18.02	54.00	-35.98	AV
Vertical	11651.802	55.27	-45.47	9.80	74.00	-64.20	Pk
Vertical	17477.208	60.96	-43.05	17.91	54.00	-36.09	Pk
Vertical	17475.791	41.68	-43.05	-1.37	68.20	-69.57	AV
Horizontal	5039.547	68.75	-28.25	40.50	74.00	-33.50	Pk
Horizontal	5039.942	43.14	-28.25	14.89	54.00	-39.11	AV
Horizontal	11650.872	45.44	-45.47	-0.03	74.00	-74.03	AV
Horizontal	17476.958	61.11	-43.05	18.06	54.00	-35.94	Pk
Horizontal	17477.262	44.51	-43.05	1.46	68.20	-66.74	AV


7 Test Setup Photos

Conducted Emission at AC power line

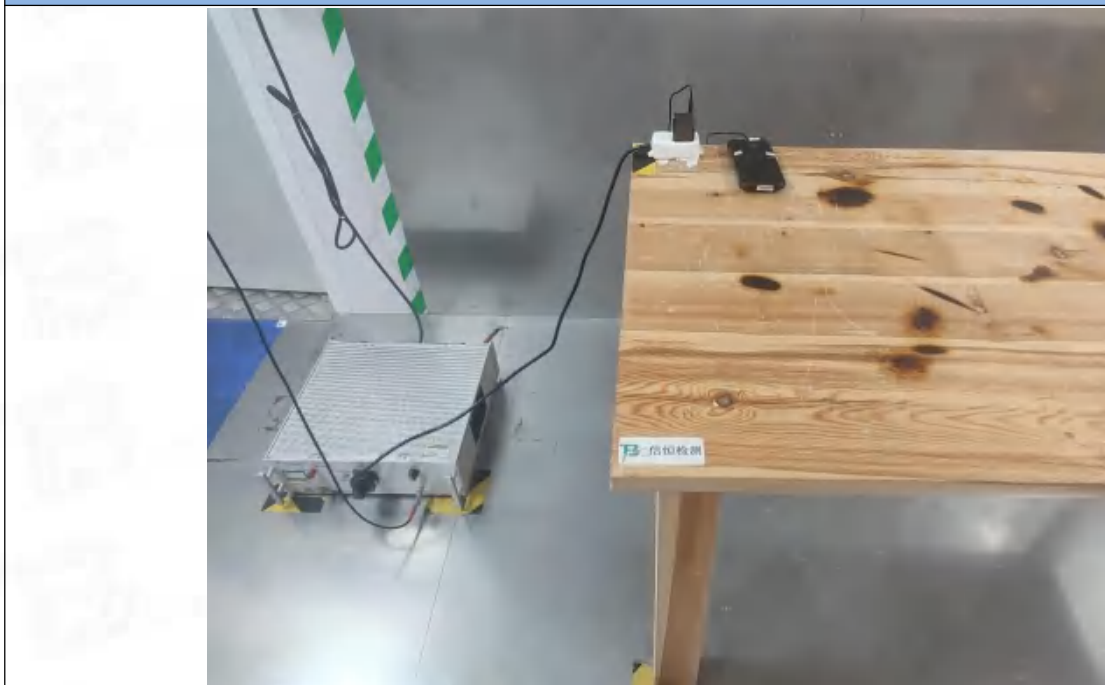

**Band edge emissions (Radiated)
Emissions in frequency bands (above 1GHz)**

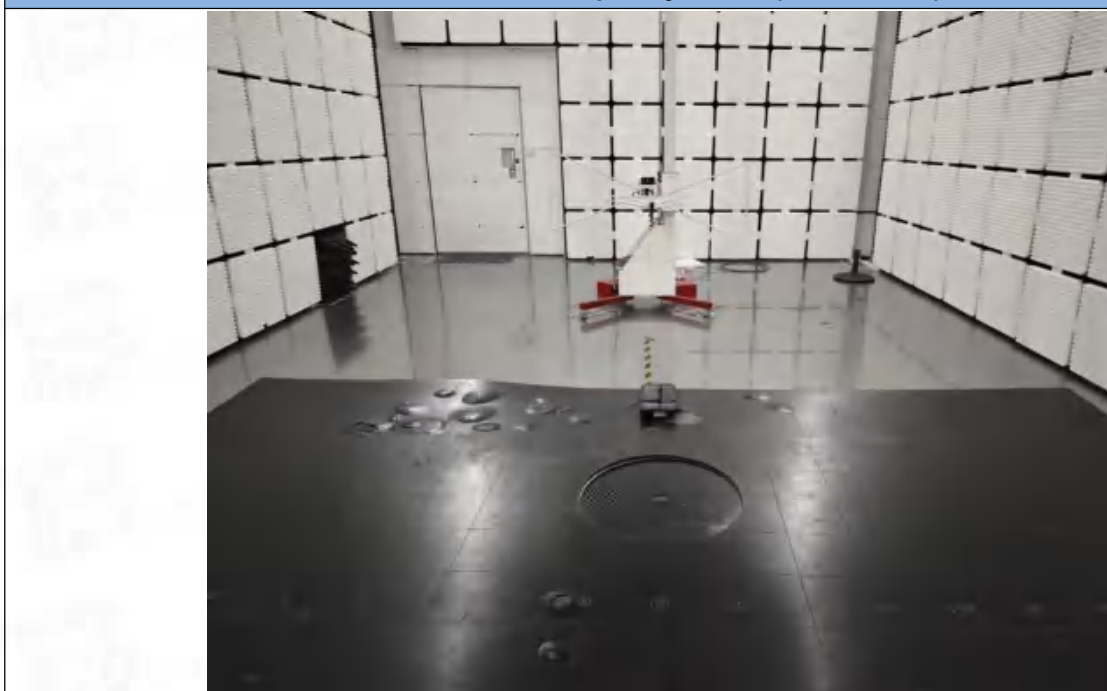

Emissions in frequency bands (below 1GHz)

Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	1.393	1.427	97.62	0.10	0.00
		5200	1.393	1.427	97.62	0.10	0.00
		5240	1.393	1.428	97.55	0.11	0.12
		5745	1.394	1.428	97.62	0.10	0.12
		5785	1.394	1.428	97.62	0.10	0.12
		5825	1.395	1.428	97.69	0.10	0.12
802.11n (HT20)	SISO	5180	1.302	1.335	97.53	0.11	0.00
		5200	1.302	1.337	97.38	0.12	0.13
		5240	1.302	1.335	97.53	0.11	0.00
		5745	1.302	1.337	97.38	0.12	0.13
		5785	1.302	1.336	97.46	0.11	0.13
		5825	1.302	1.335	97.53	0.11	0.00
802.11n (HT40)	SISO	5190	0.649	0.683	95.02	0.22	0.13
		5230	0.648	0.682	95.01	0.22	0.13
		5755	0.649	0.682	95.16	0.22	0.13
		5795	0.651	0.684	95.18	0.21	0.13
		5825	0.651	0.684	95.18	0.21	0.13
802.11ac (VHT20)	SISO	5180	1.314	1.348	97.48	0.11	0.00
		5200	1.314	1.349	97.41	0.11	0.13
		5240	1.314	1.349	97.41	0.11	0.13
		5745	1.314	1.348	97.48	0.11	0.14
		5785	1.314	1.348	97.48	0.11	0.13
		5825	1.316	1.350	97.48	0.11	0.13
802.11ac (VHT40)	SISO	5190	0.654	0.687	95.20	0.21	0.13
		5230	0.653	0.687	95.05	0.22	0.13
		5755	0.653	0.687	95.05	0.22	0.13
		5795	0.655	0.686	95.48	0.20	0.01
		5825	0.655	0.686	95.48	0.20	0.01
802.11ac (VHT80)	SISO	5210	0.326	0.394	82.74	0.82	8.17
		5775	0.325	0.386	84.20	0.75	4.02

1.2 Test Graph


1.2.1 Ant1

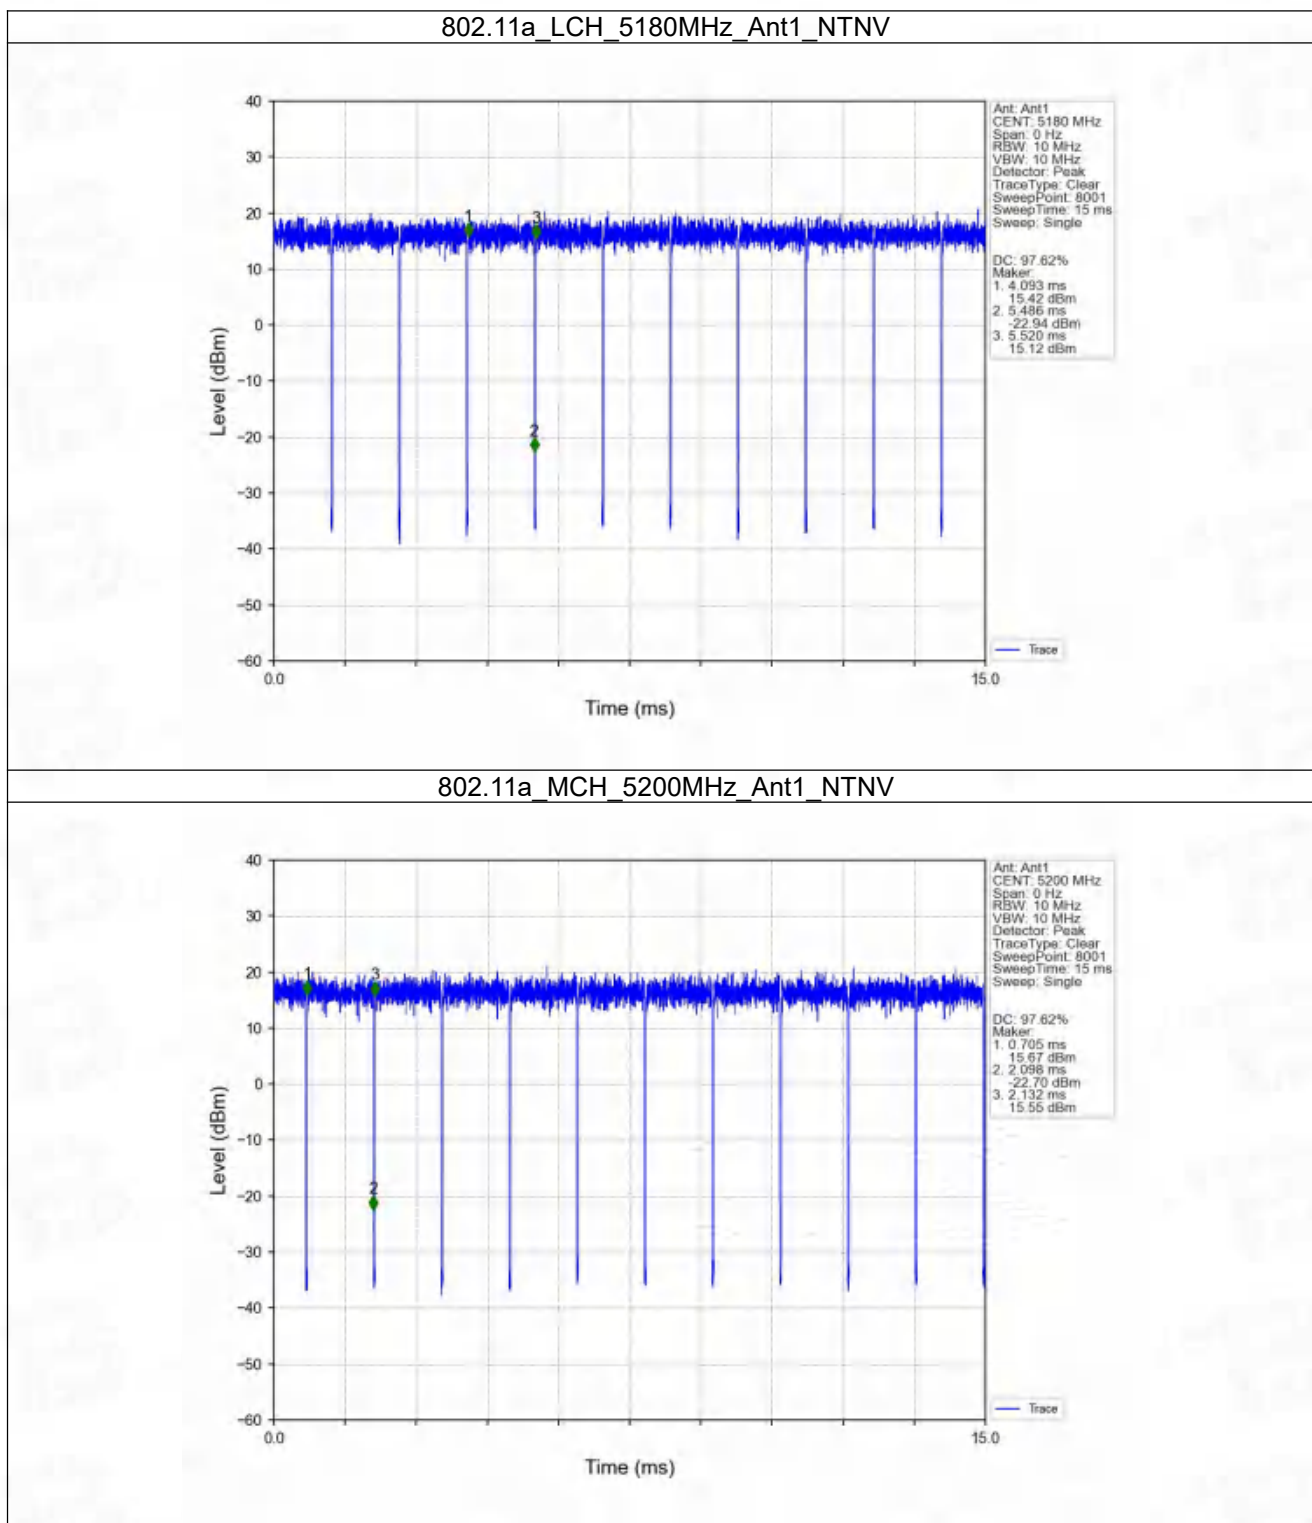


802.11a_HCH_5240MHz_Ant1_NTNV

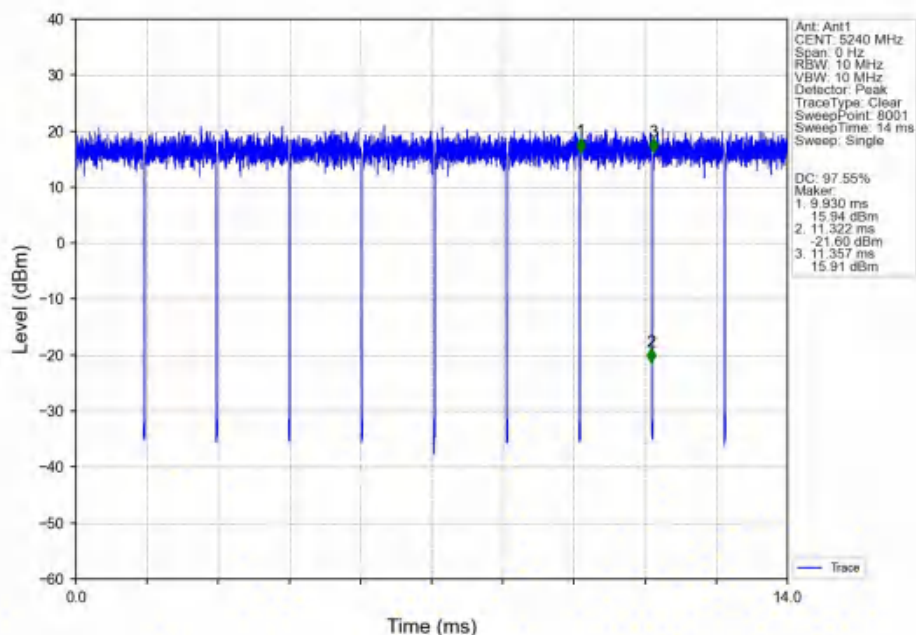


802.11a_LCH_5745MHz_Ant1_NTNV

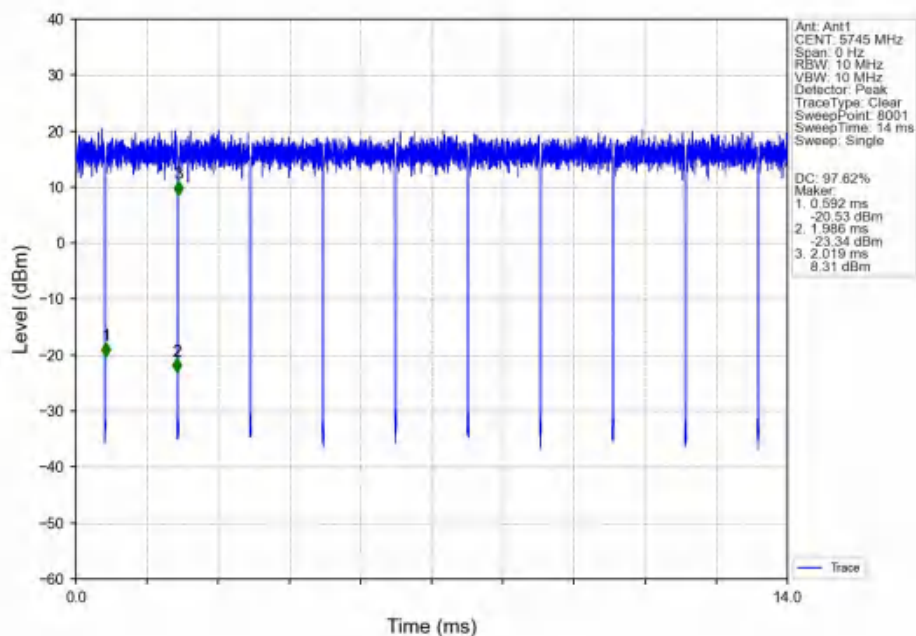


802.11a_MCH_5785MHz_Ant1_NTNV

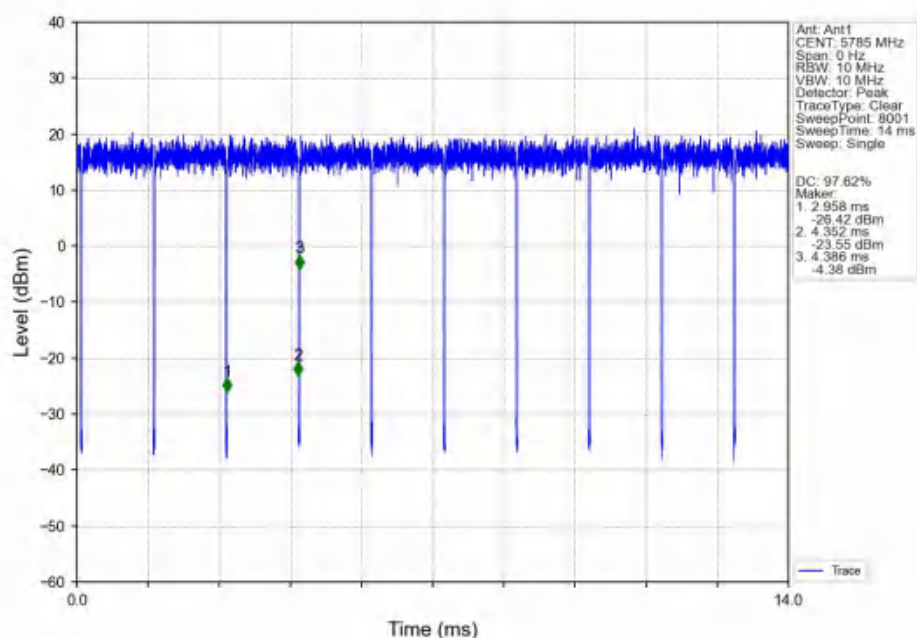


802.11a_HCH_5825MHz_Ant1_NTNV

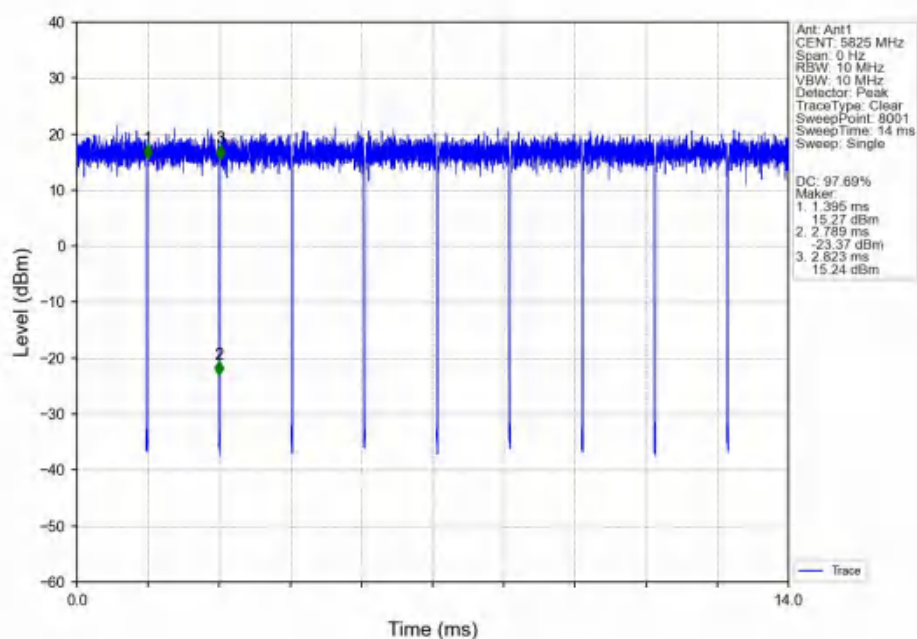


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

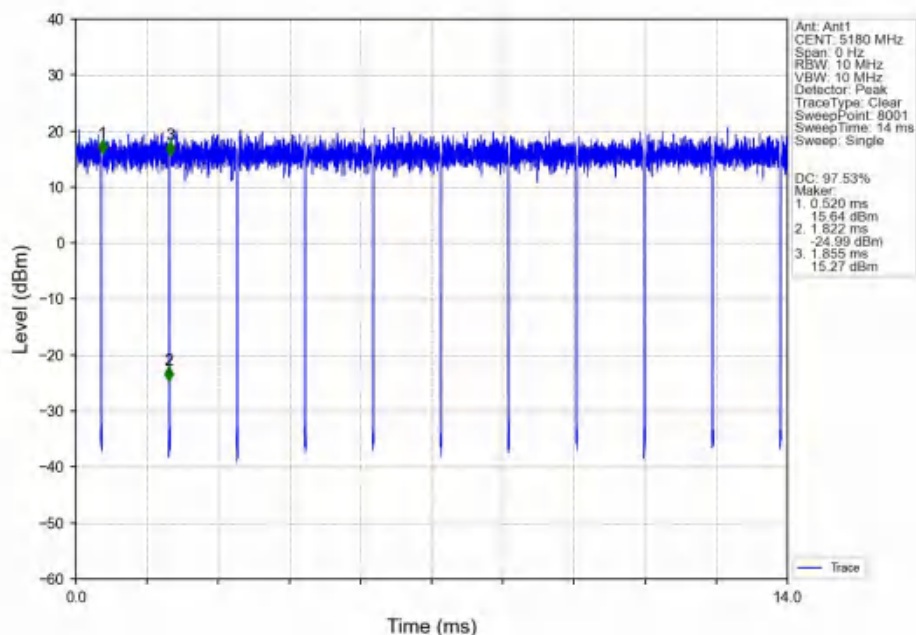


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

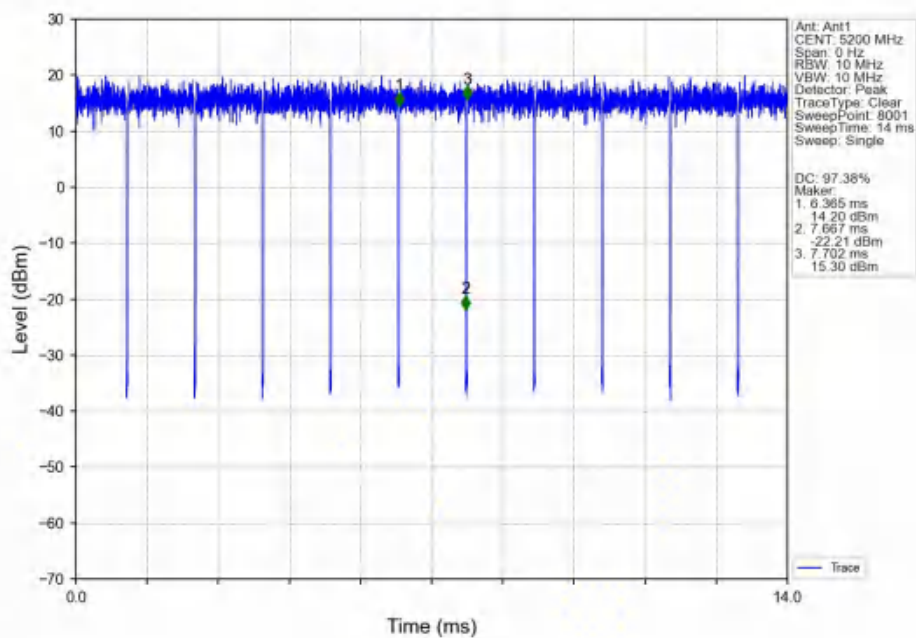


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

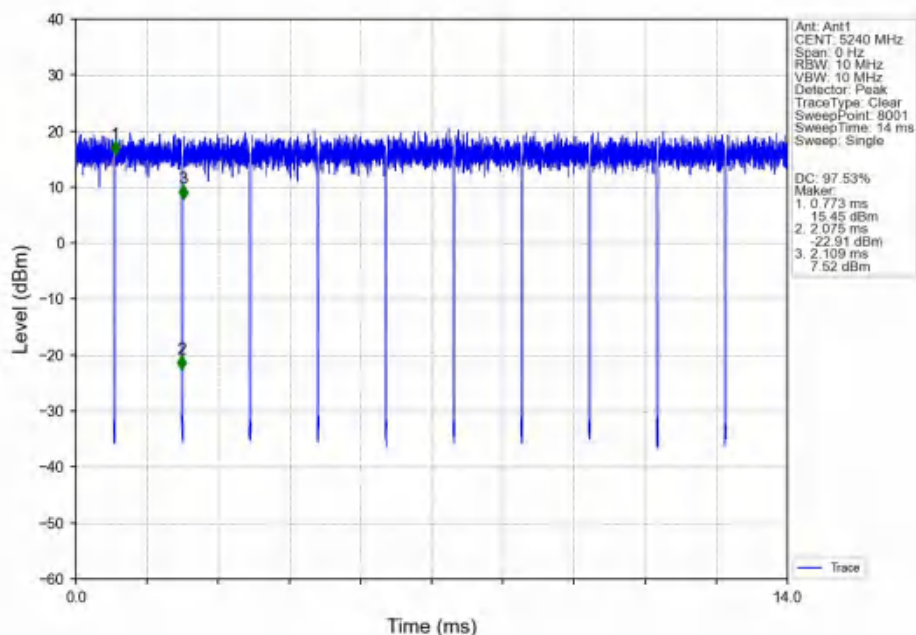


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

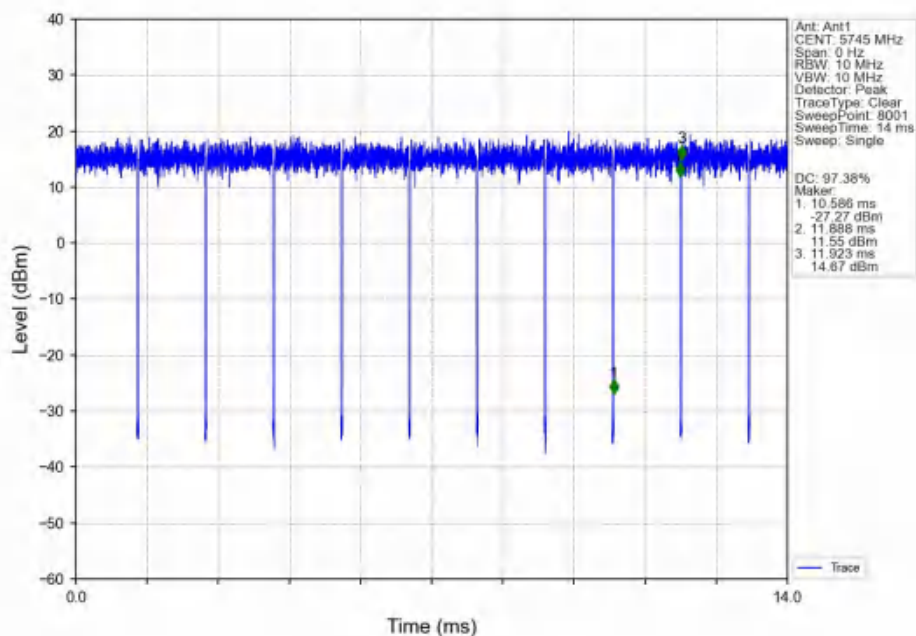


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

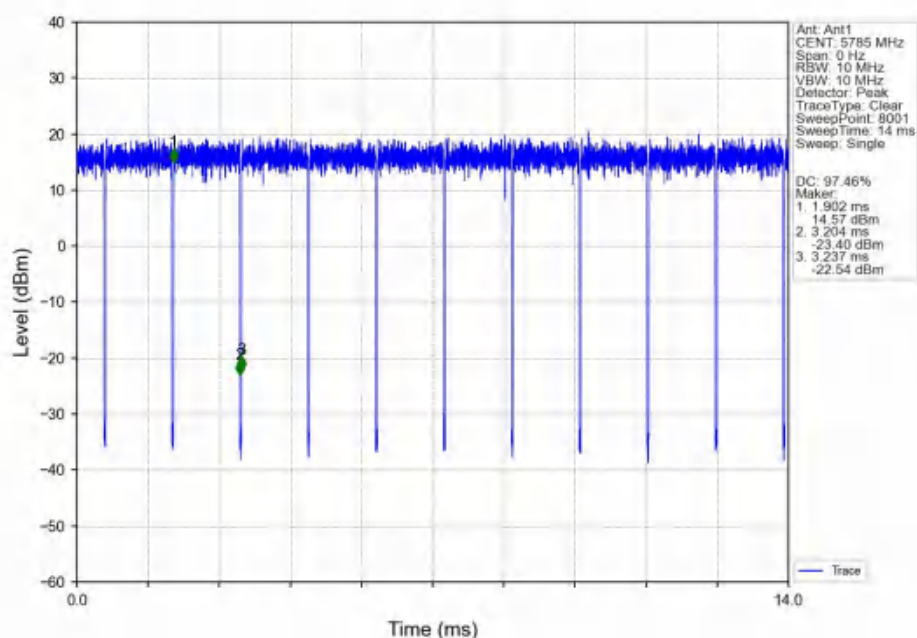


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

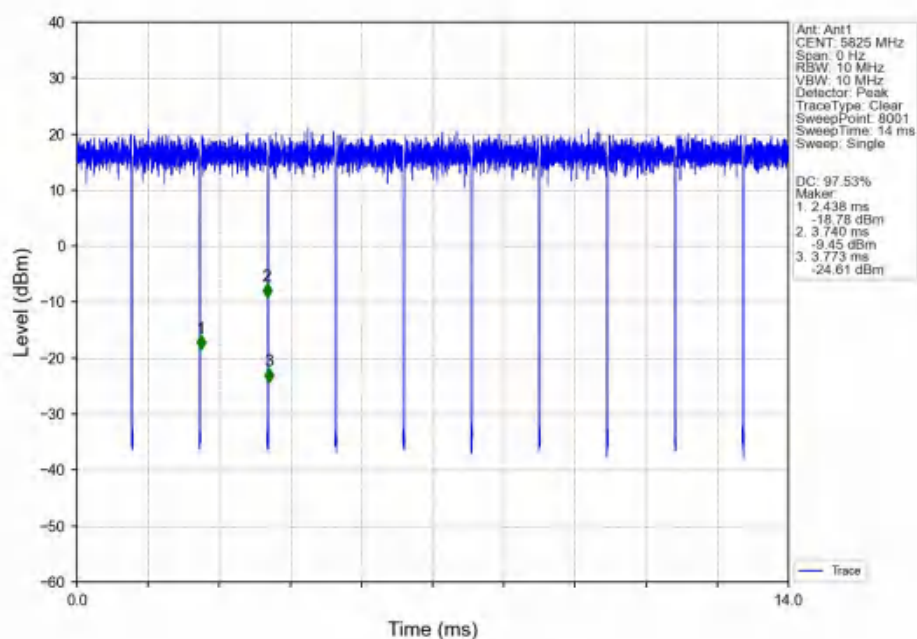


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

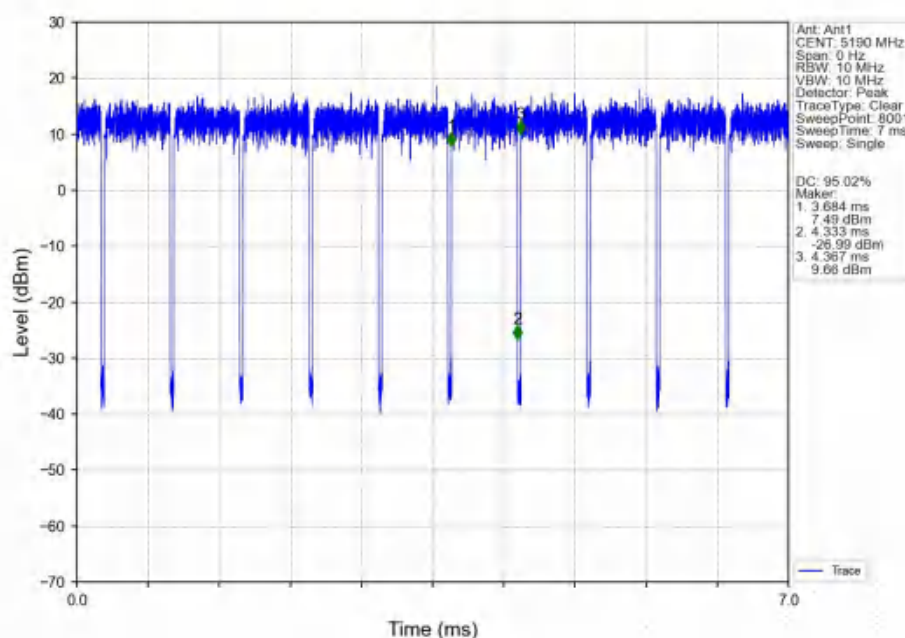


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

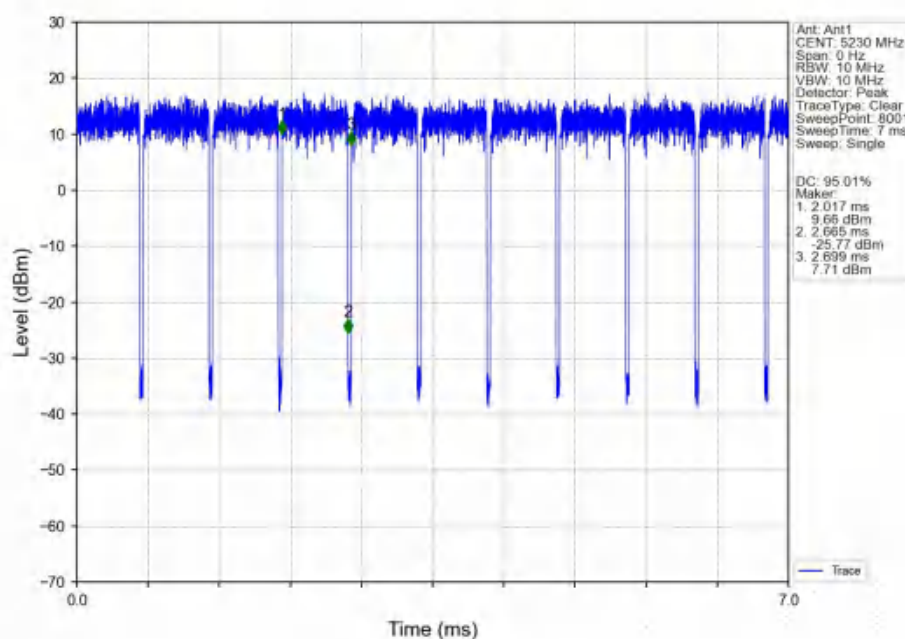


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

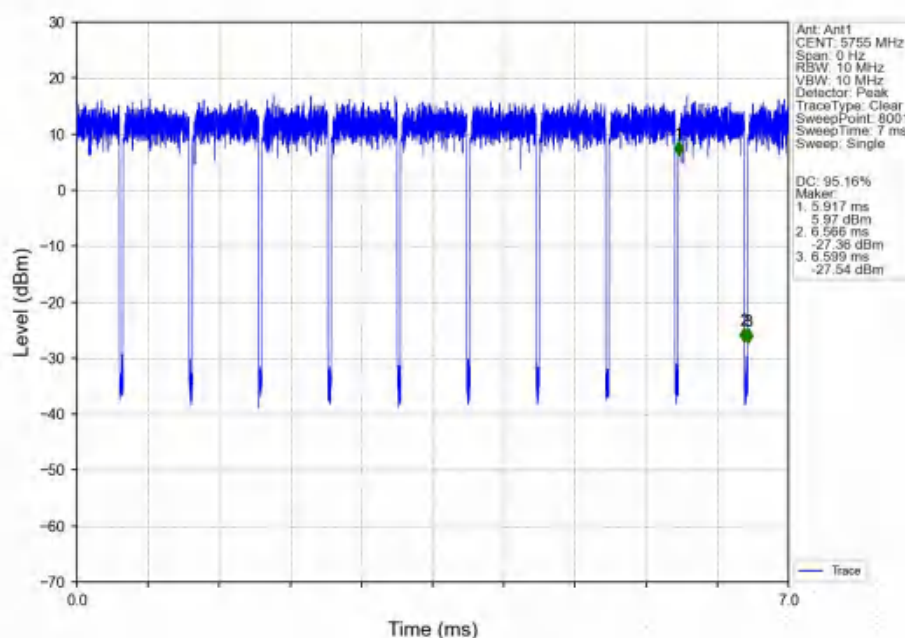


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

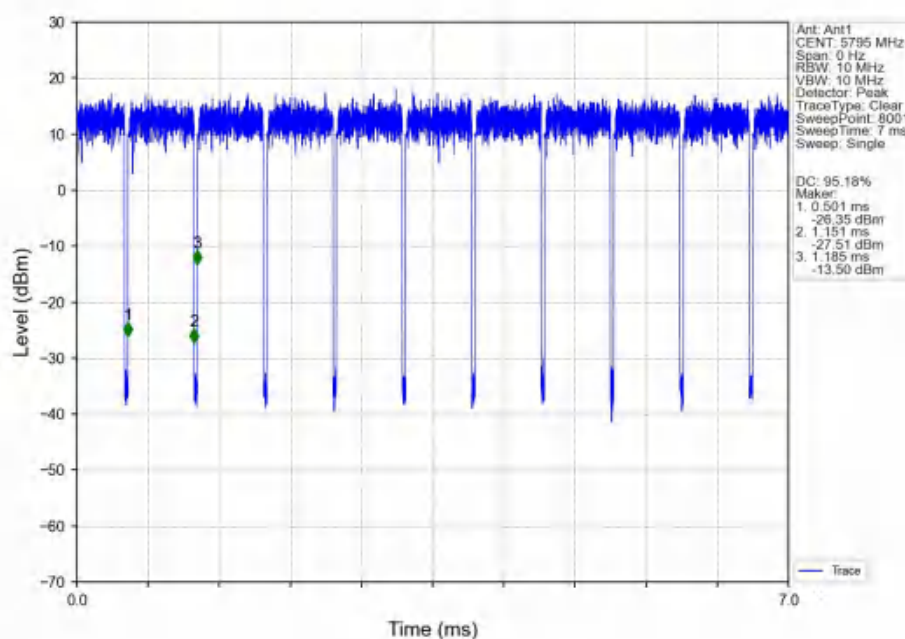


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

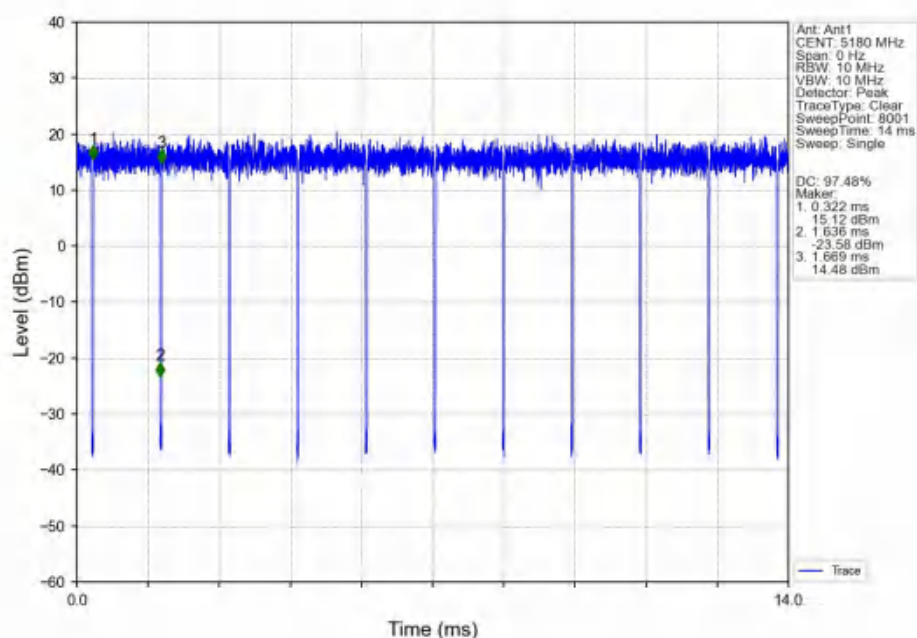


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

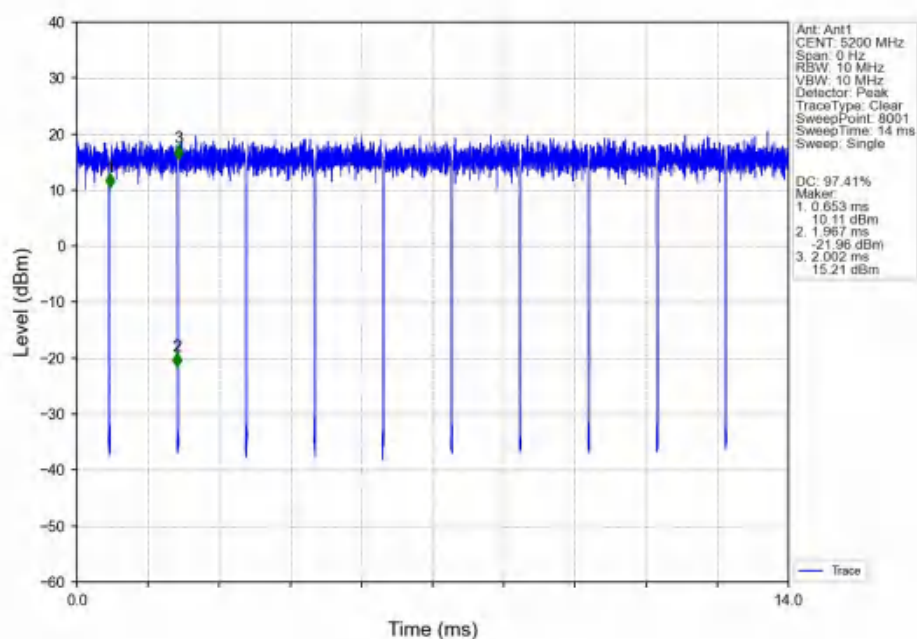


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

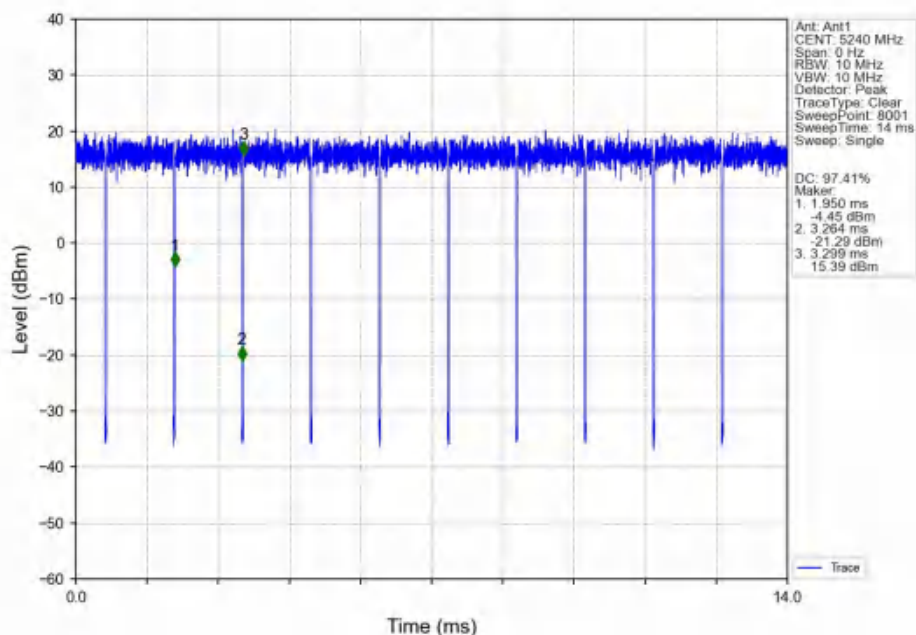


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

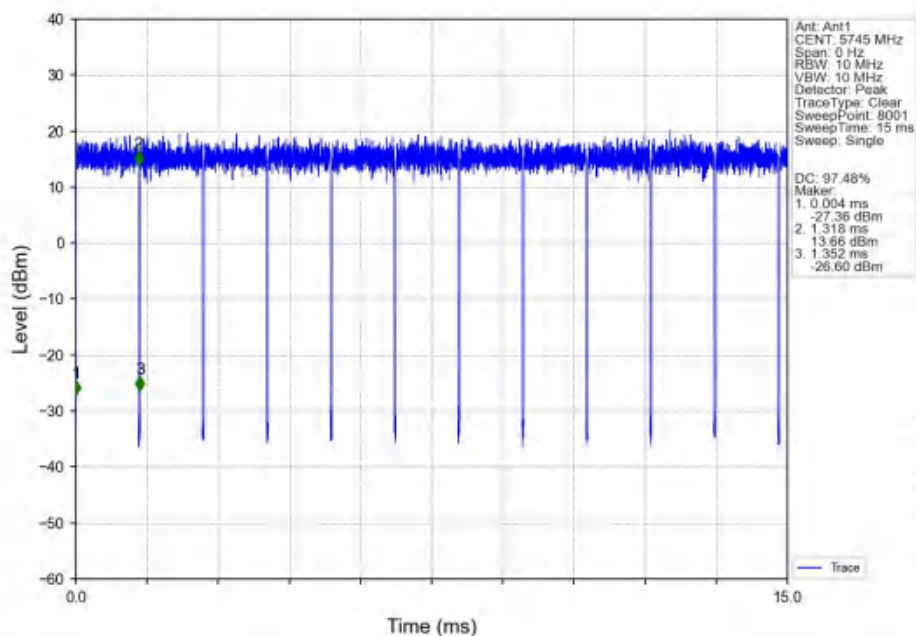


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

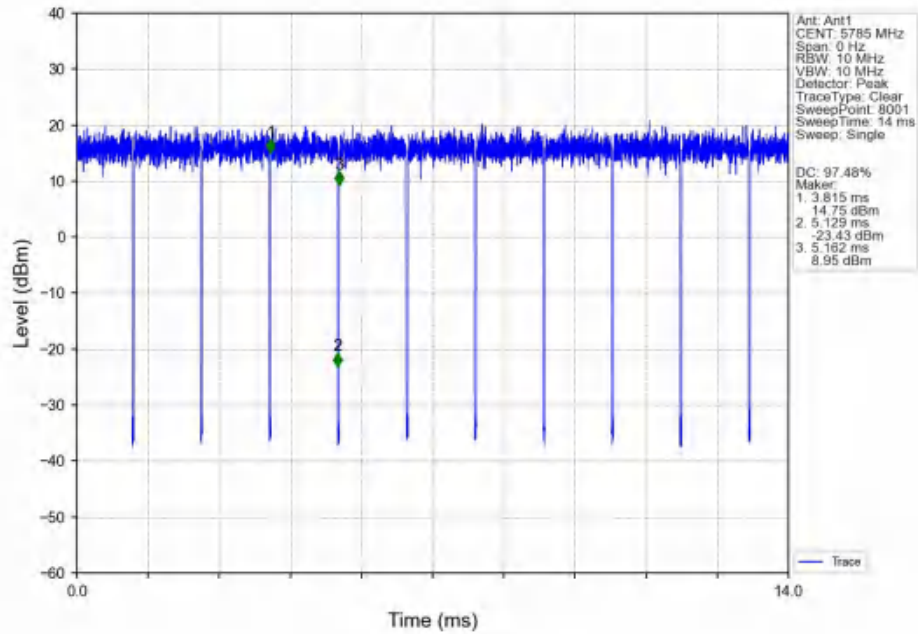


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

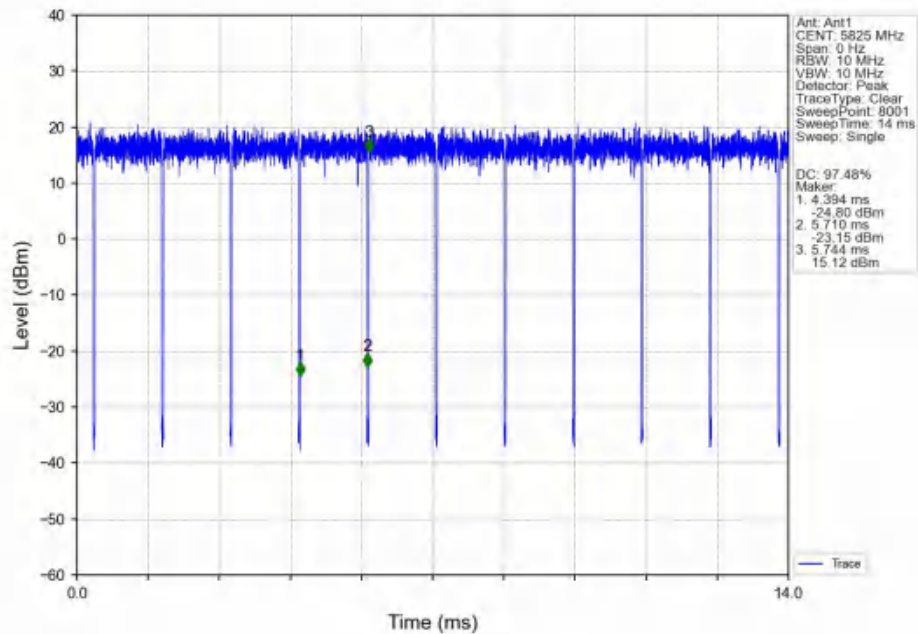


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

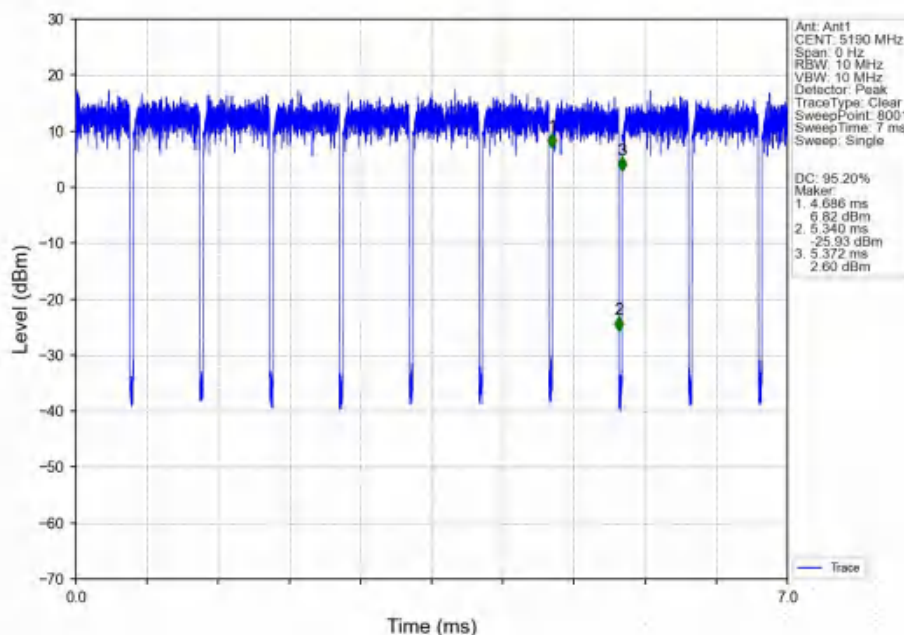


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

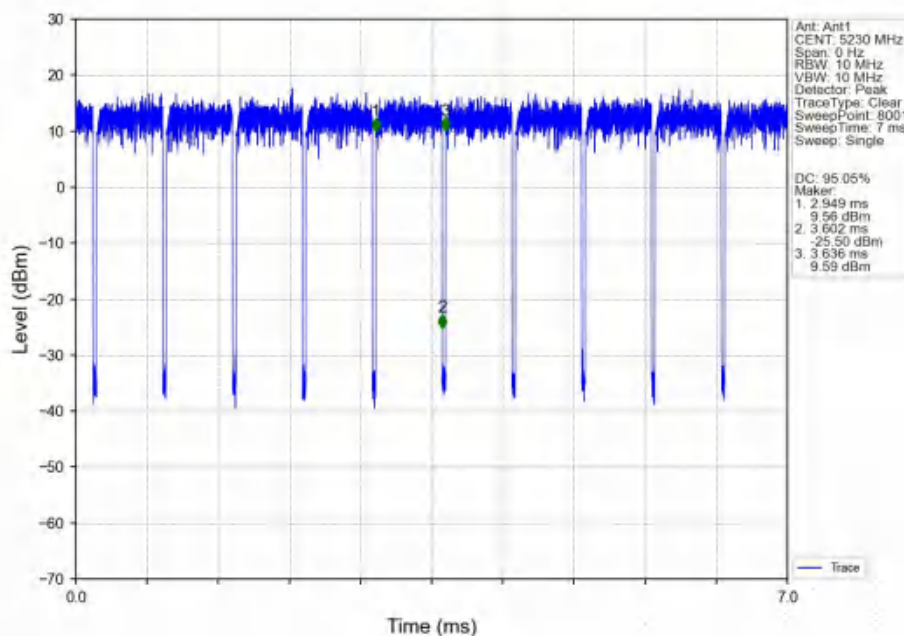


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

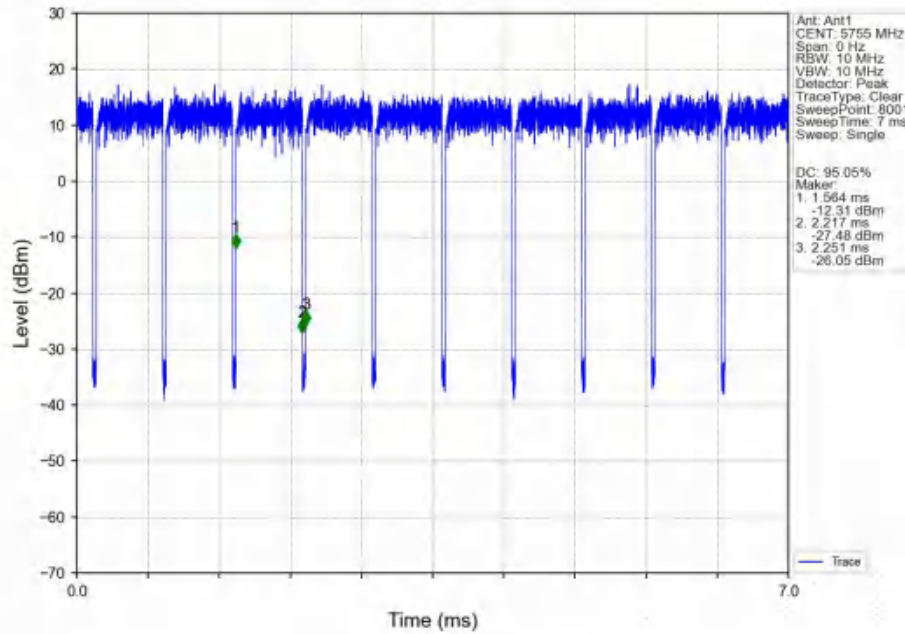


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

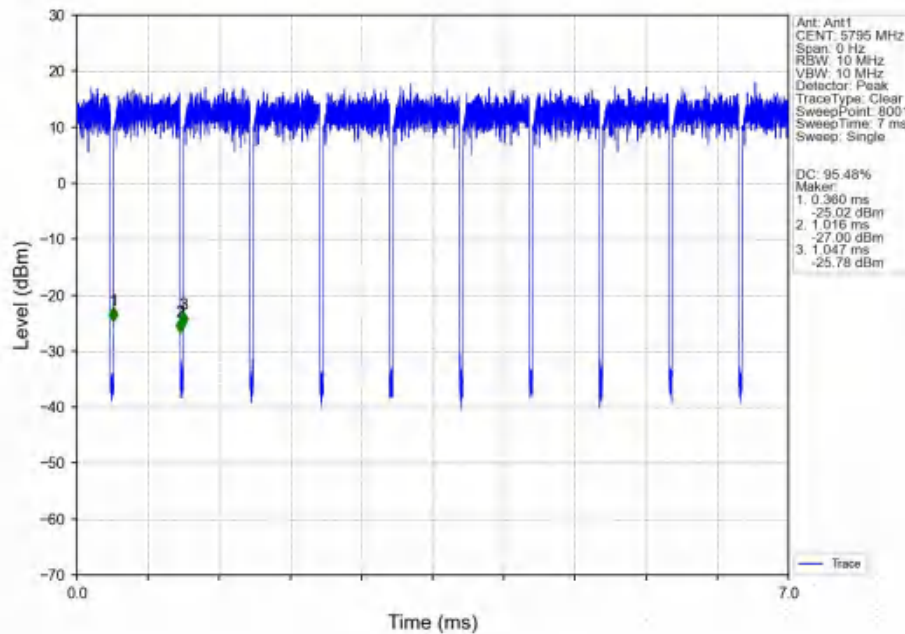

802.11ac(VHT80)_MCH_5210MHz_Ant1_NTNV

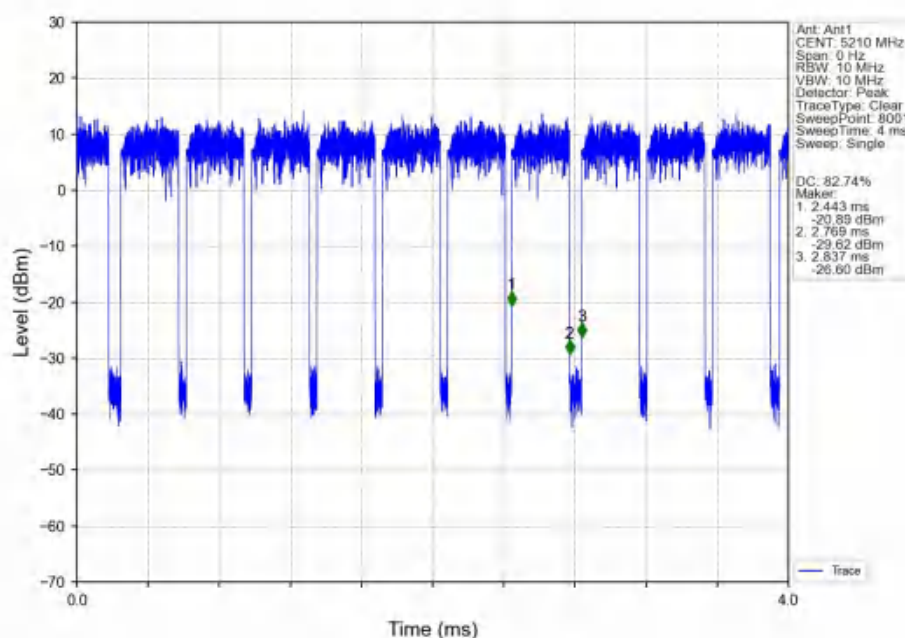

802.11ac(VHT80)_MCH_5775MHz_Ant1_NTNV

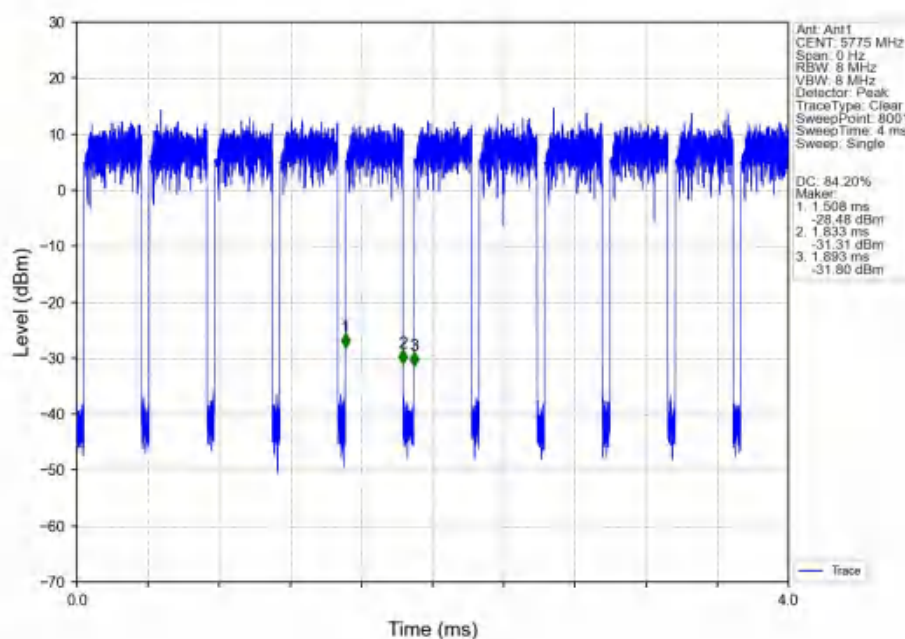

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5180	1	17.007	/	Pass
		5200	1	16.958	/	Pass
		5240	1	16.999	/	Pass
		5745	1	17.022	/	Pass
		5785	1	17.008	/	Pass
		5825	1	16.949	/	Pass
802.11n (HT20)	SISO	5180	1	17.954	/	Pass
		5200	1	17.960	/	Pass
		5240	1	17.924	/	Pass
		5745	1	17.924	/	Pass
		5785	1	17.934	/	Pass
		5825	1	17.899	/	Pass
802.11n (HT40)	SISO	5190	1	36.303	/	Pass
		5230	1	36.257	/	Pass
		5755	1	36.294	/	Pass
		5795	1	36.354	/	Pass
802.11ac (VHT20)	SISO	5180	1	17.940	/	Pass
		5200	1	17.960	/	Pass
		5240	1	17.926	/	Pass
		5745	1	17.934	/	Pass
		5785	1	17.881	/	Pass
		5825	1	17.949	/	Pass
802.11ac (VHT40)	SISO	5190	1	36.265	/	Pass
		5230	1	36.304	/	Pass
		5755	1	36.248	/	Pass
		5795	1	36.285	/	Pass
802.11ac (VHT80)	SISO	5210	1	75.805	/	Pass
		5775	1	75.730	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5745	1	15.424	≥ 0.5	Pass
		5785	1	15.644	≥ 0.5	Pass
		5825	1	15.434	≥ 0.5	Pass
802.11n (HT20)	SISO	5745	1	16.564	≥ 0.5	Pass
		5785	1	16.297	≥ 0.5	Pass
		5825	1	16.549	≥ 0.5	Pass
802.11n (HT40)	SISO	5755	1	35.154	≥ 0.5	Pass
		5795	1	35.151	≥ 0.5	Pass


802.11ac (VHT20)	SISO	5745	1	15.747	≥ 0.5	Pass
		5785	1	16.041	≥ 0.5	Pass
		5825	1	15.408	≥ 0.5	Pass
802.11ac (VHT40)	SISO	5755	1	35.151	≥ 0.5	Pass
		5795	1	35.156	≥ 0.5	Pass
802.11ac (VHT80)	SISO	5775	1	75.147	≥ 0.5	Pass

2.1.3 26dB BW


Mode	TX Type	Frequency (MHz)	ANT	26dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5180	1	19.779	/	Pass
		5200	1	19.092	/	Pass
		5240	1	19.565	/	Pass
802.11n (HT20)	SISO	5180	1	19.902	/	Pass
		5200	1	19.984	/	Pass
		5240	1	20.119	/	Pass
802.11n (HT40)	SISO	5190	1	40.067	/	Pass
		5230	1	39.587	/	Pass
802.11ac (VHT20)	SISO	5180	1	20.120	/	Pass
		5200	1	20.068	/	Pass
		5240	1	19.907	/	Pass
802.11ac (VHT40)	SISO	5190	1	39.728	/	Pass
		5230	1	40.438	/	Pass
802.11ac (VHT80)	SISO	5210	1	80.664	/	Pass

2.2 Test Graph


2.2.1 OBW

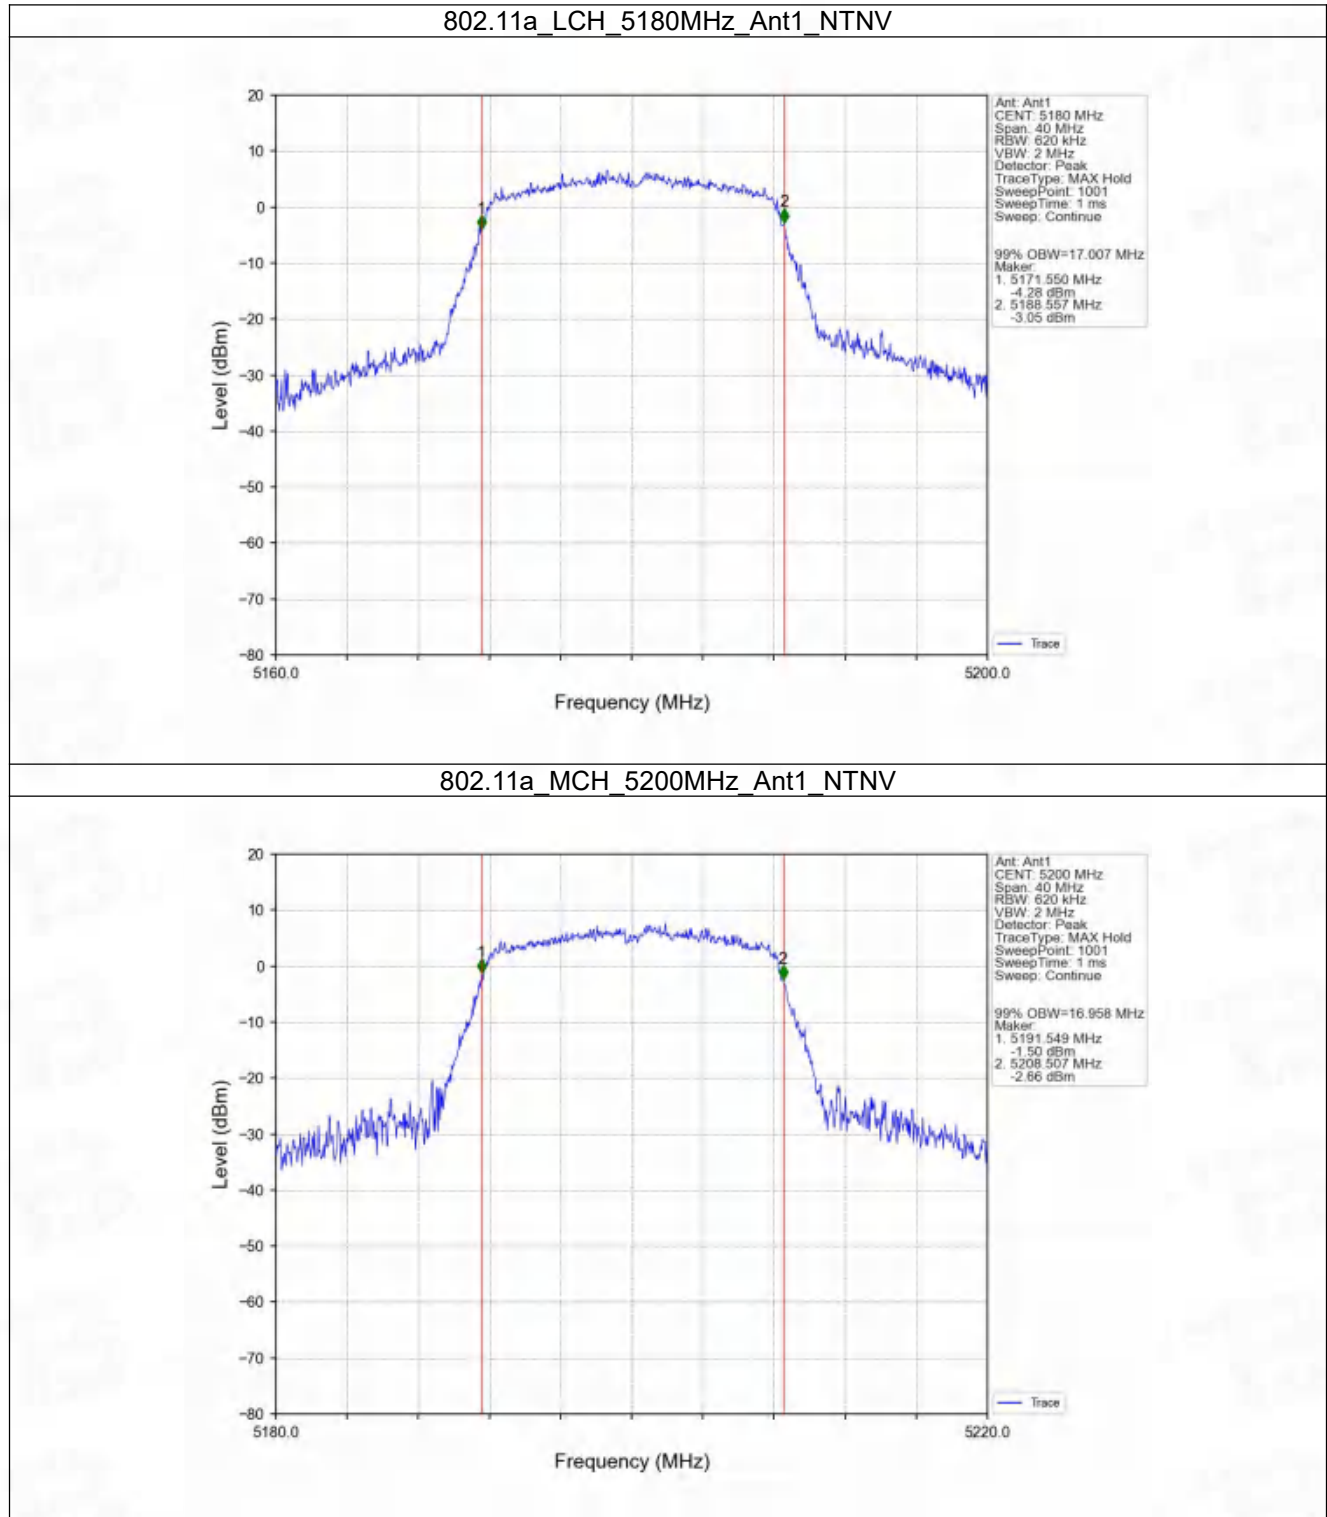


802.11a_HCH_5240MHz_Ant1_NTNV

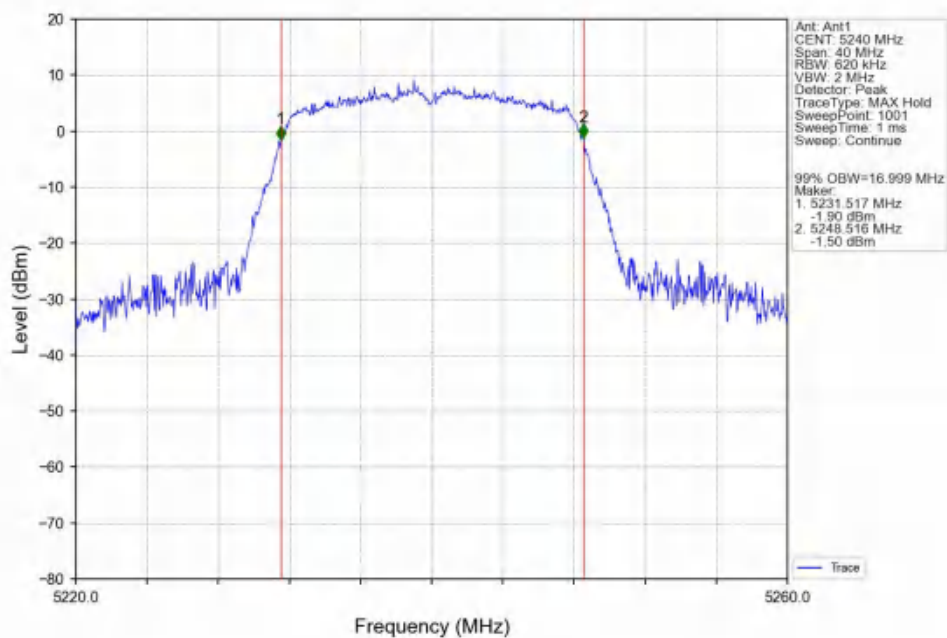


802.11a_LCH_5745MHz_Ant1_NTNV

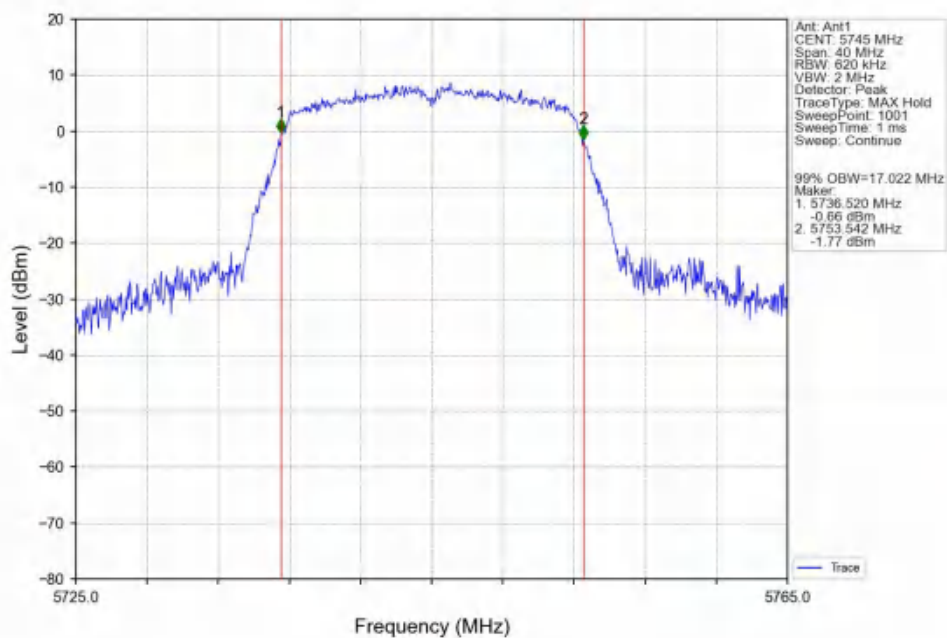


802.11a_MCH_5785MHz_Ant1_NTNV

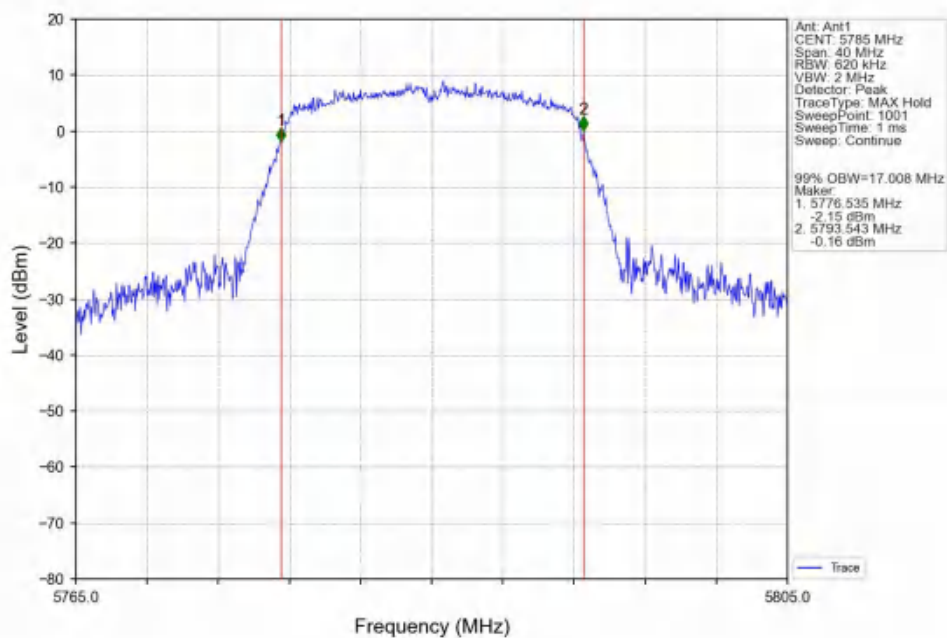


802.11a_HCH_5825MHz_Ant1_NTNV

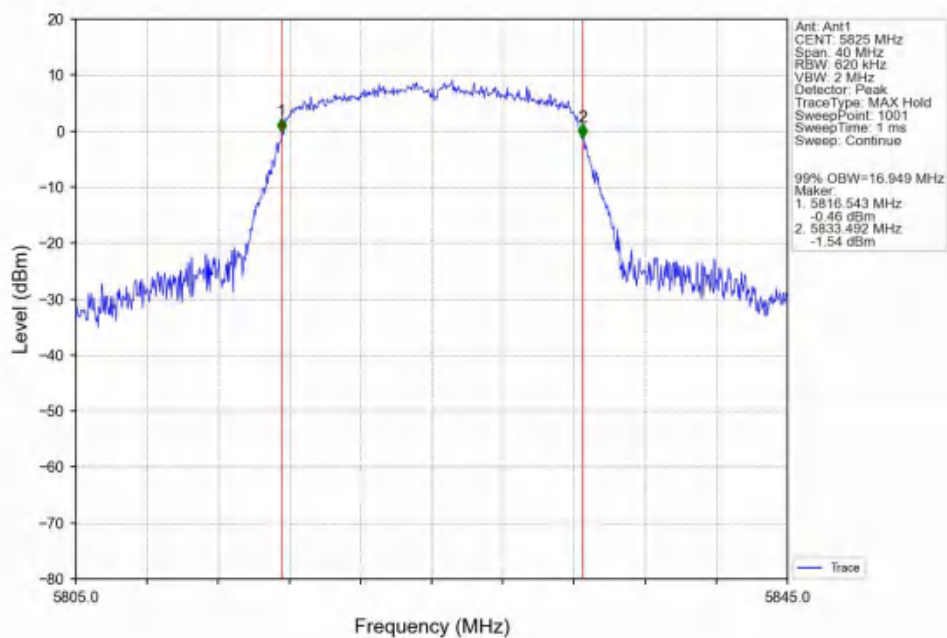


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

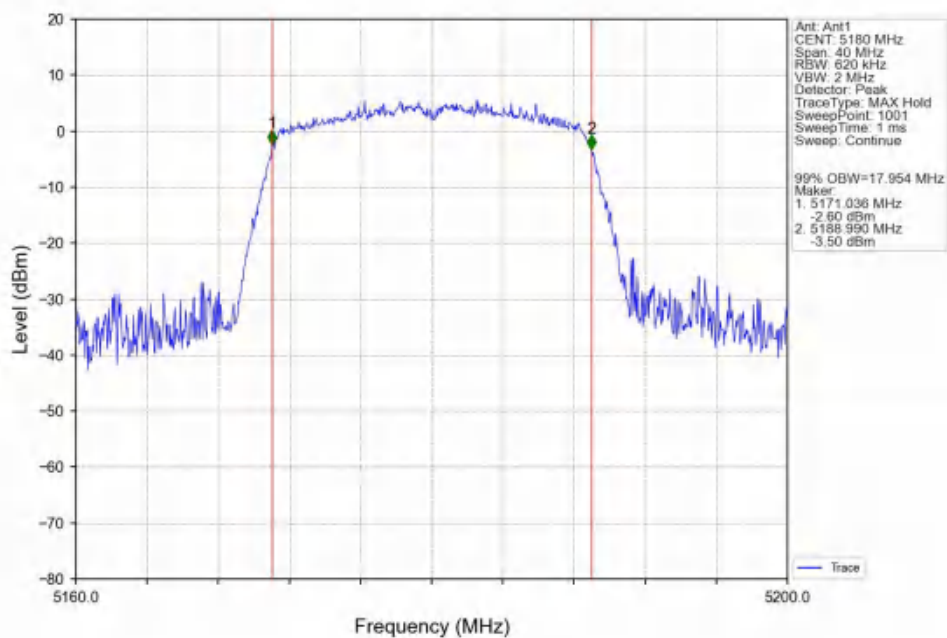


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

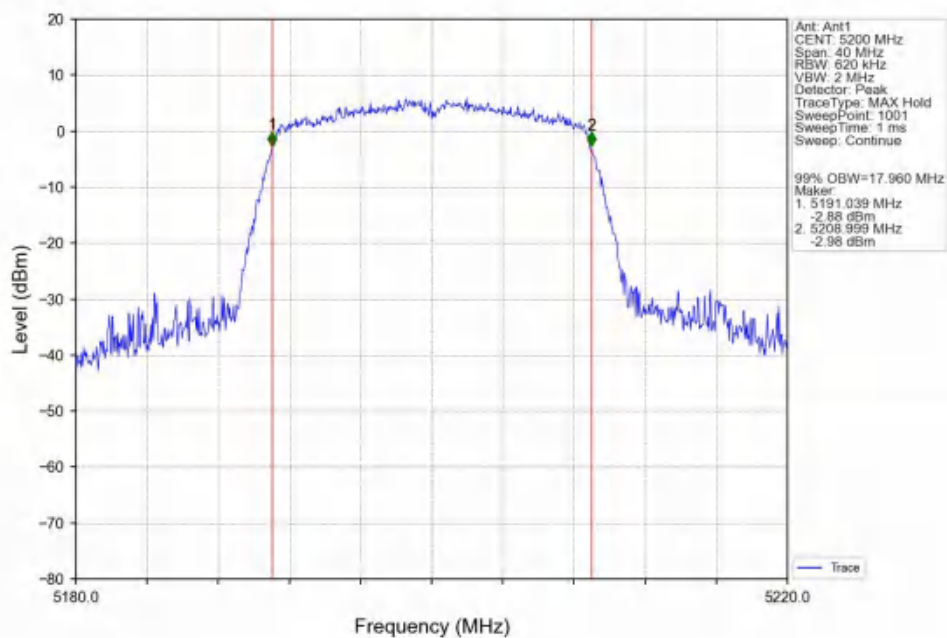


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

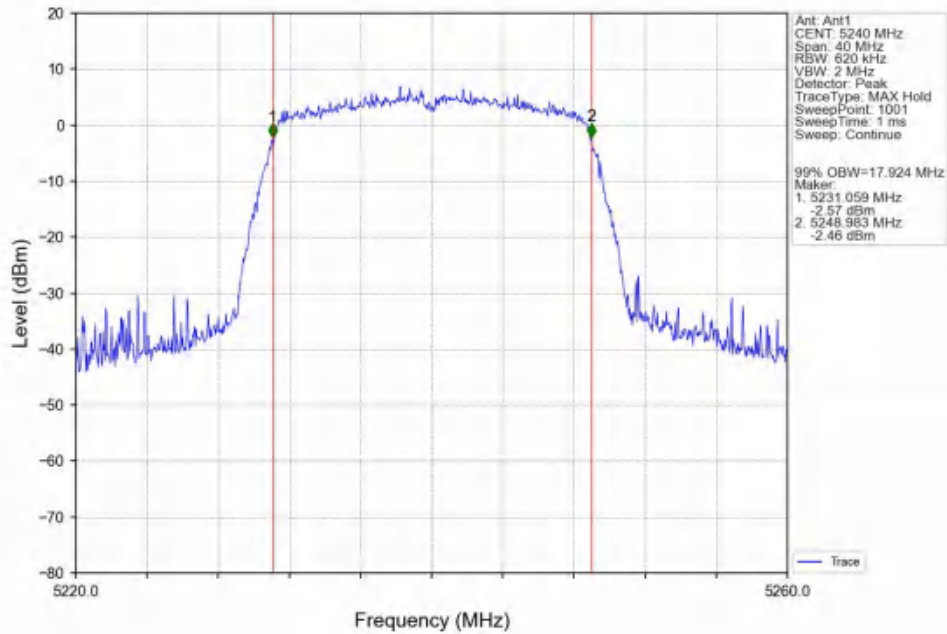


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

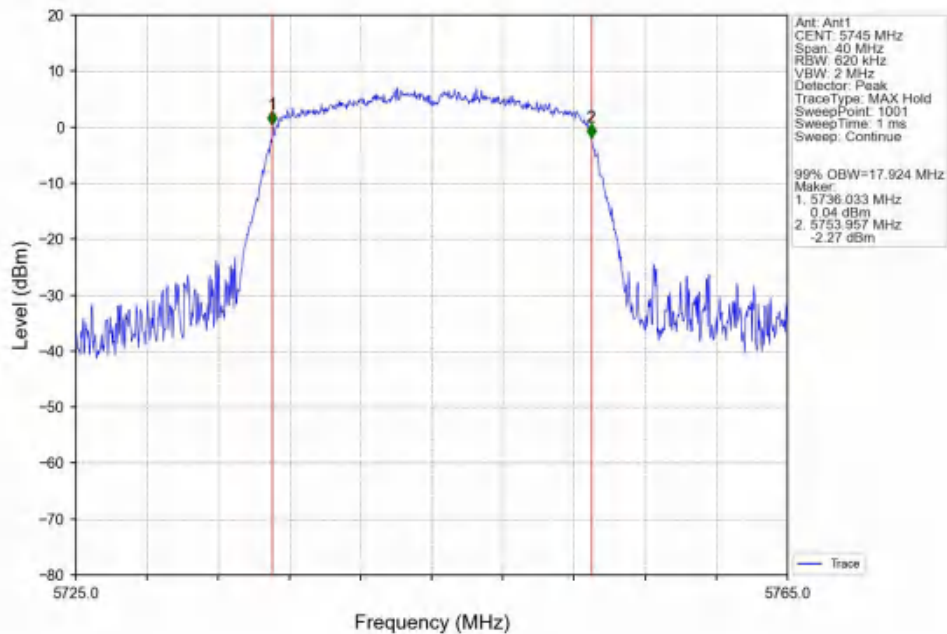


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

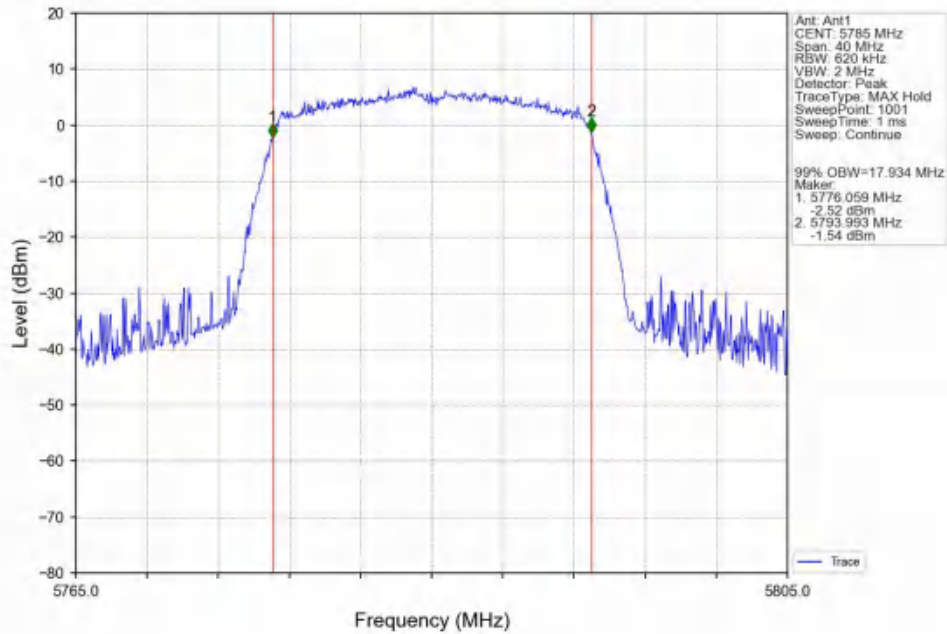


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

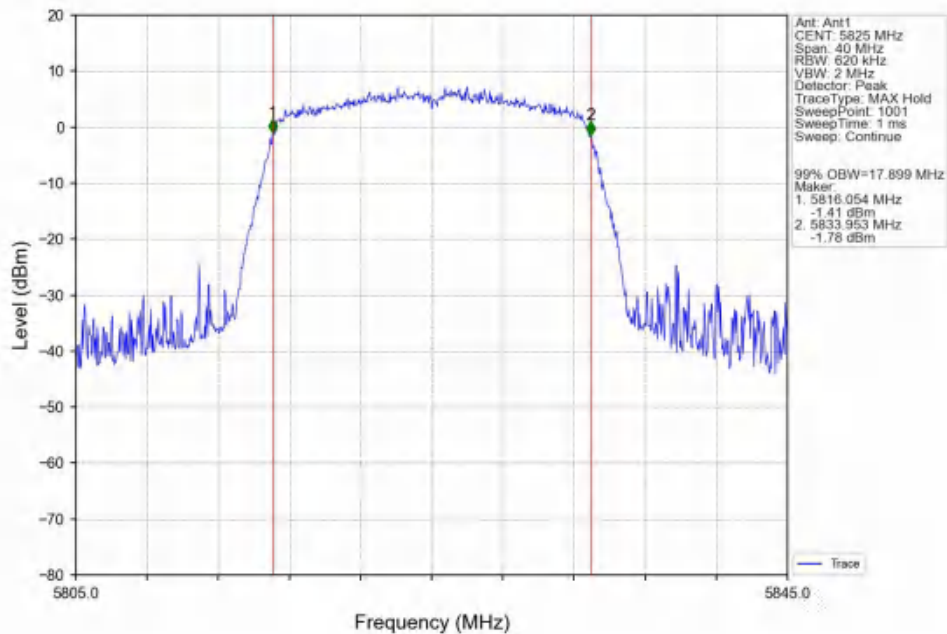


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

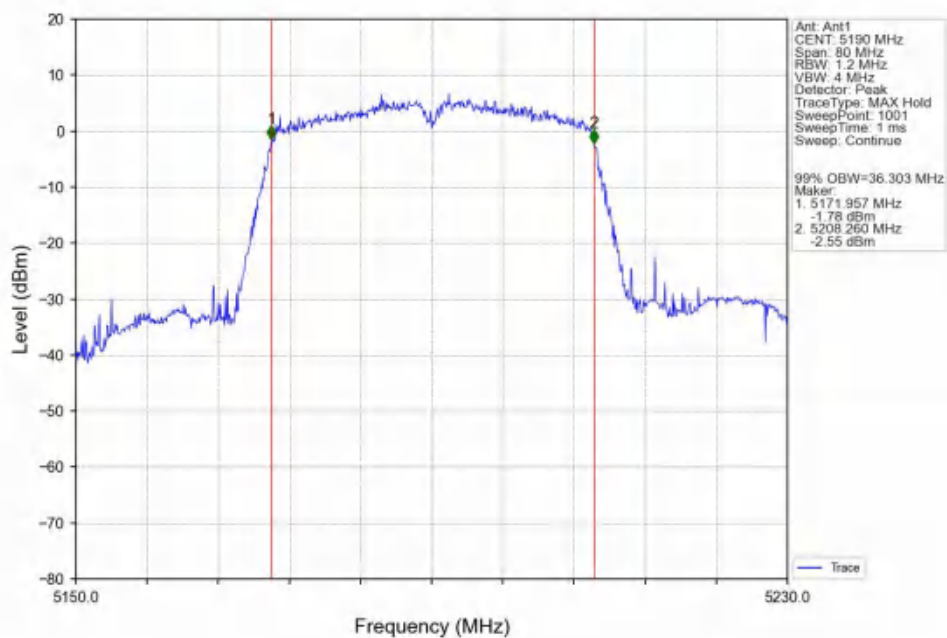


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

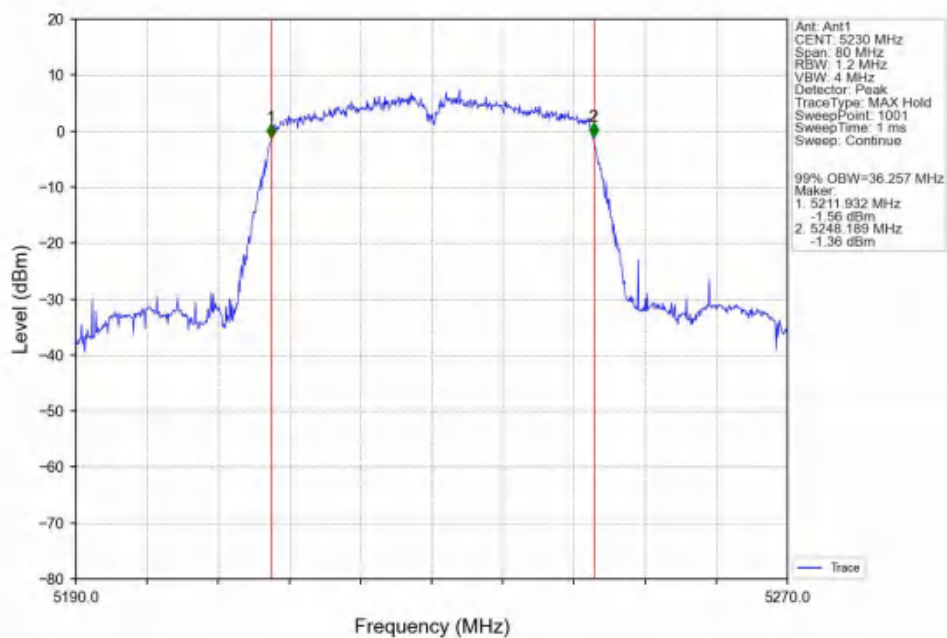


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

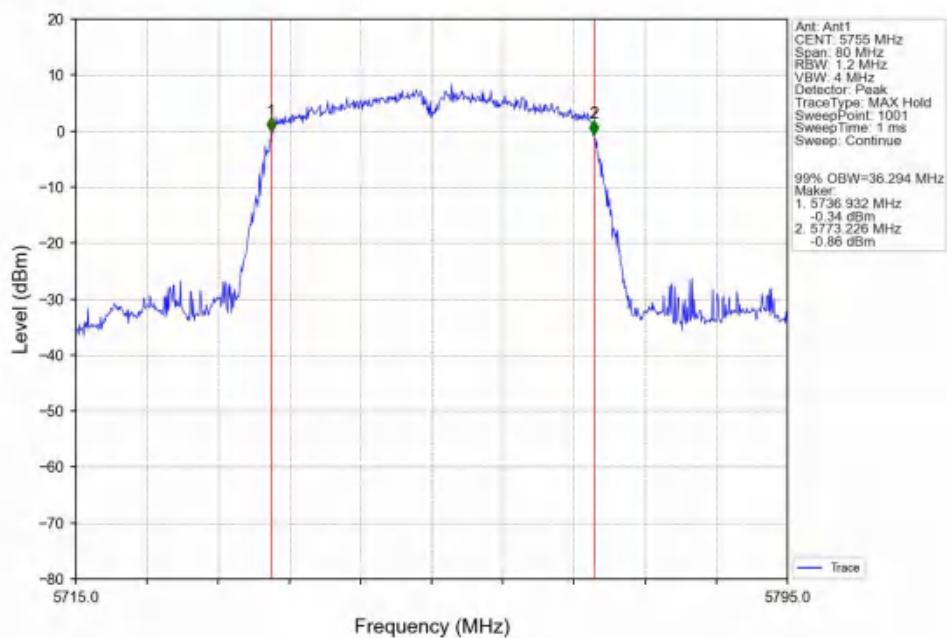


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

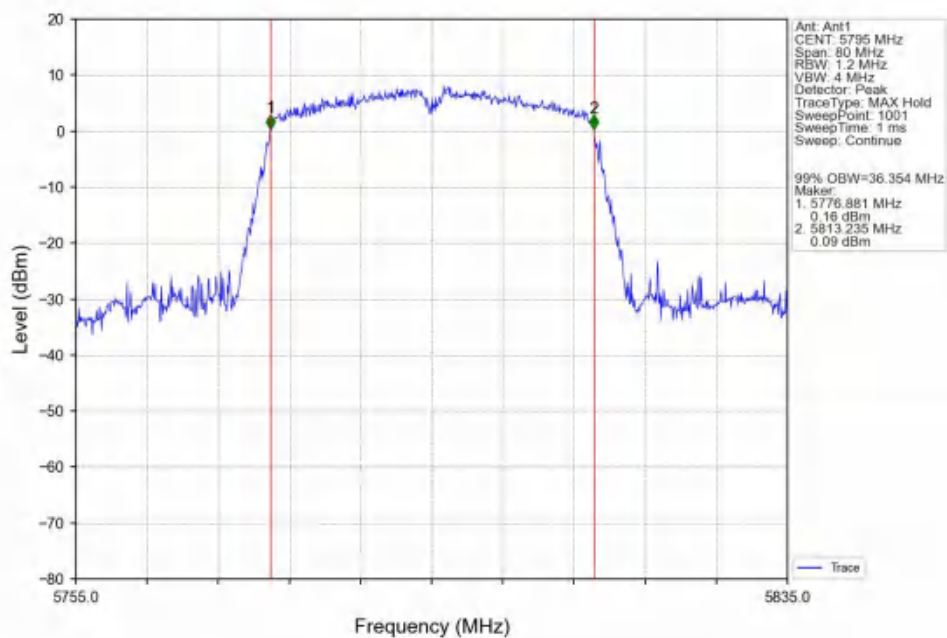


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

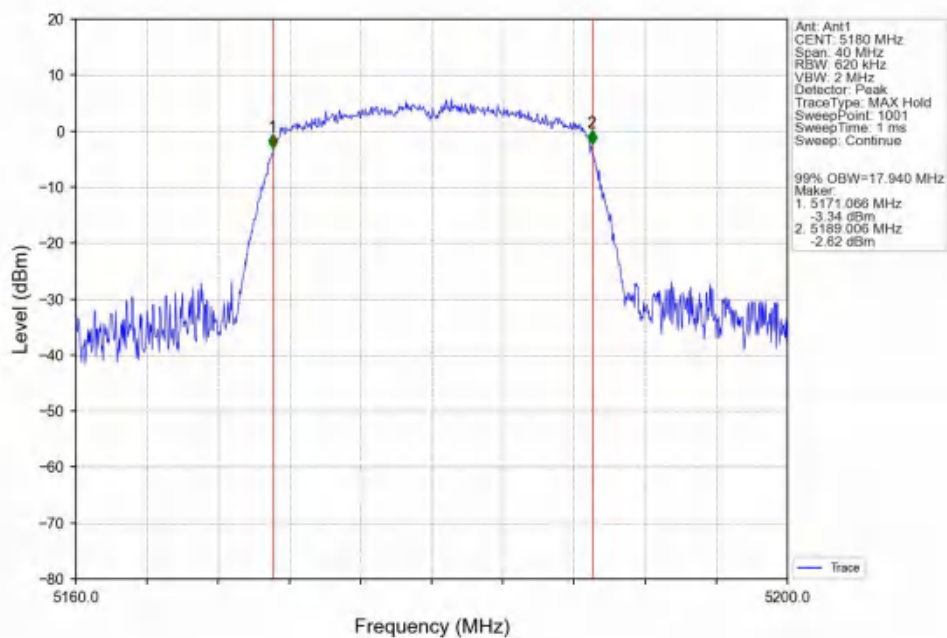


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

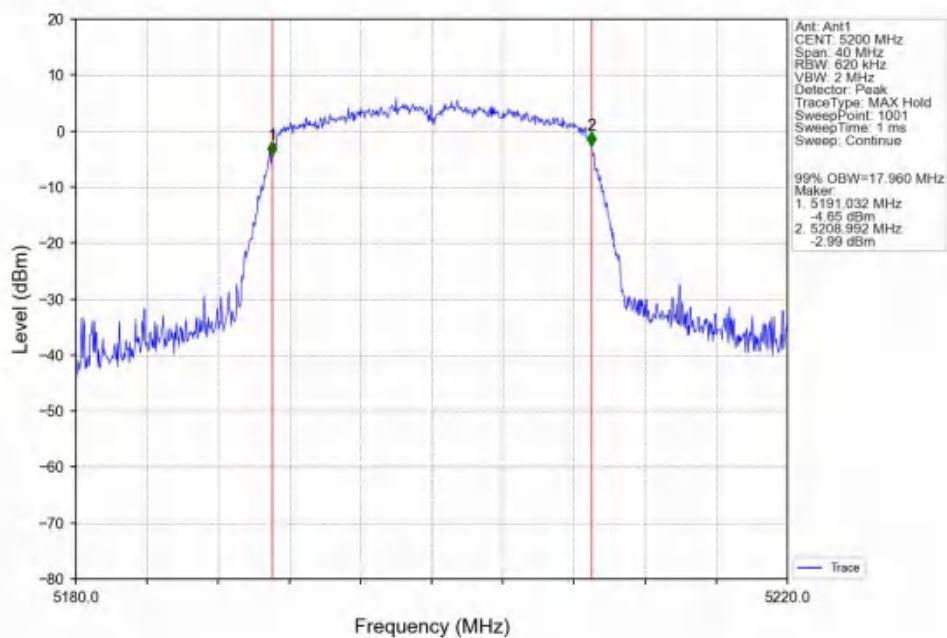


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

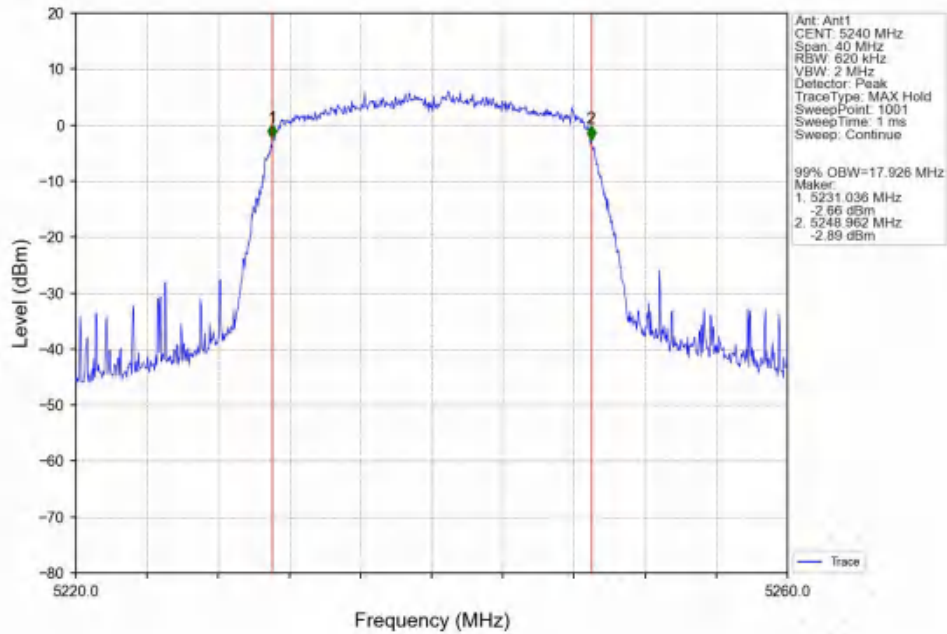


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

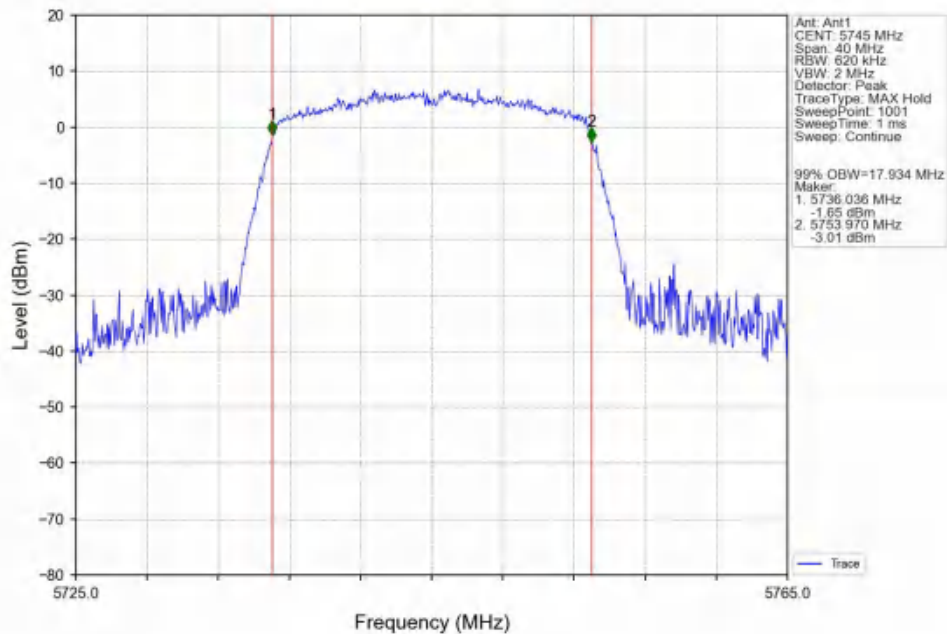


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

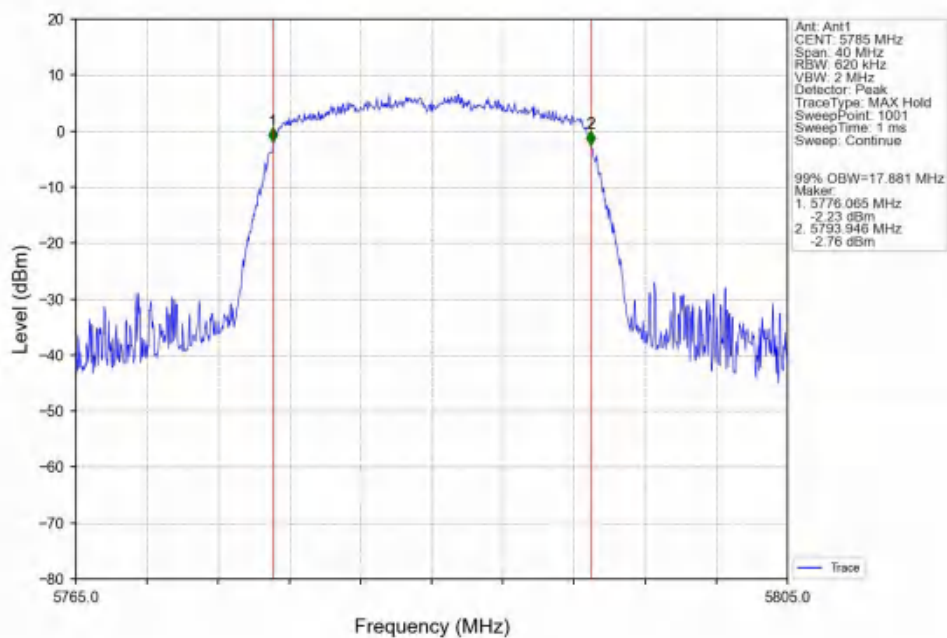


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

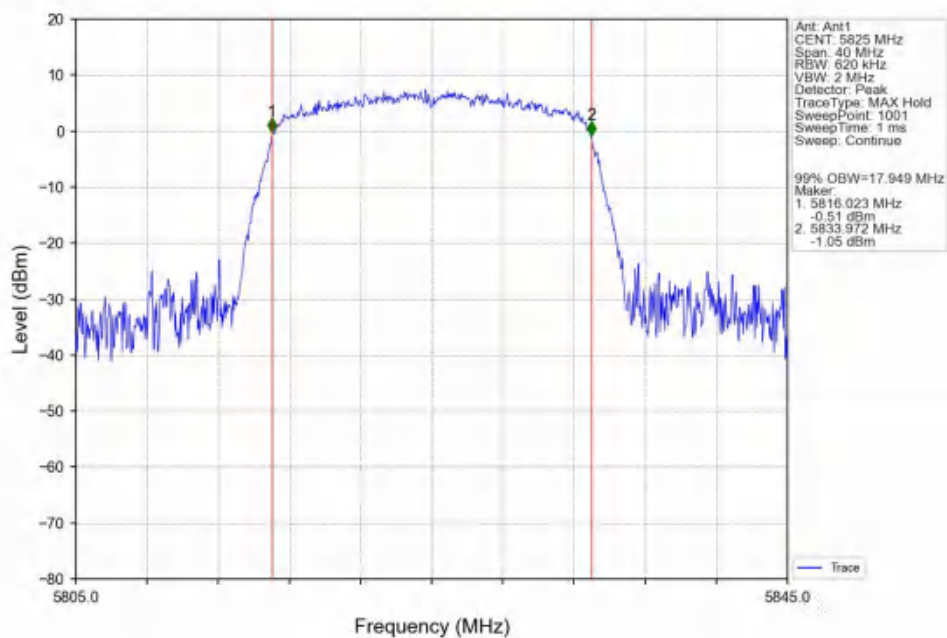


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

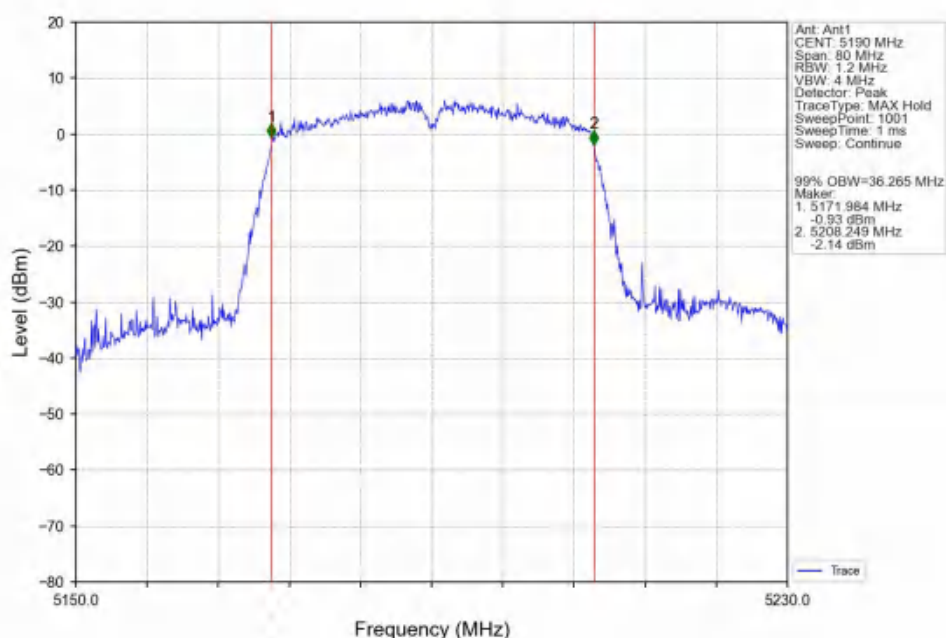


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

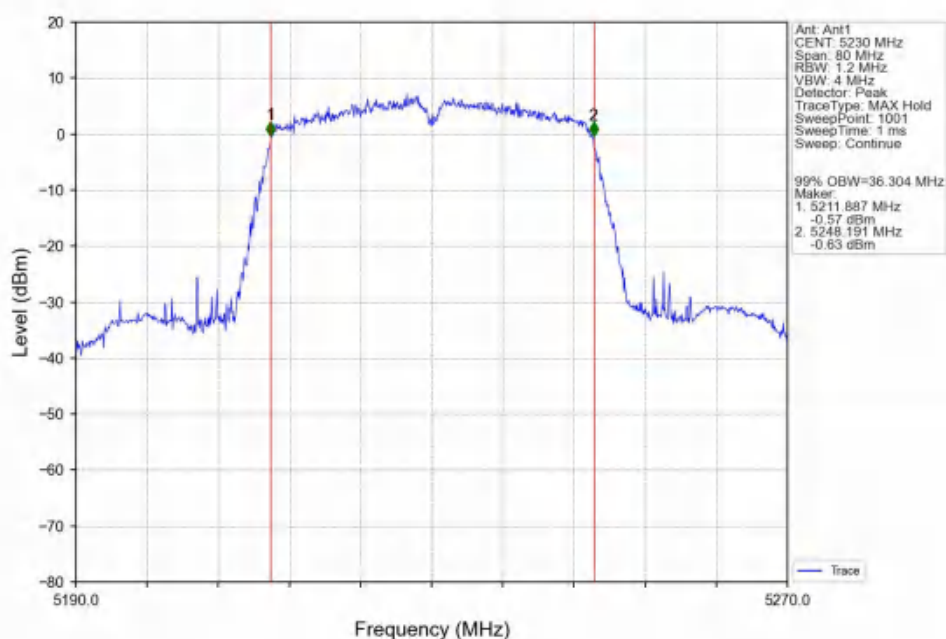


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

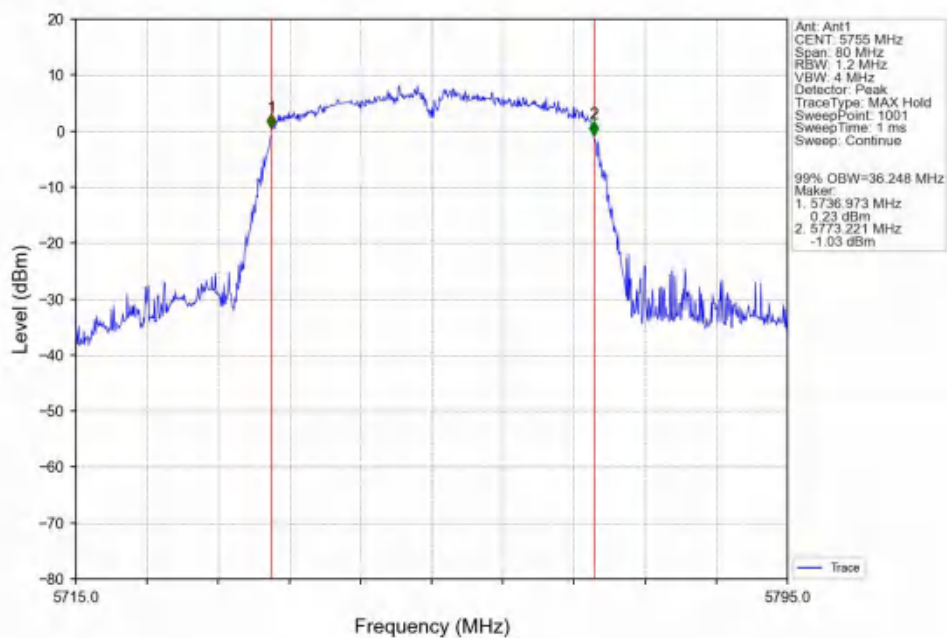


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

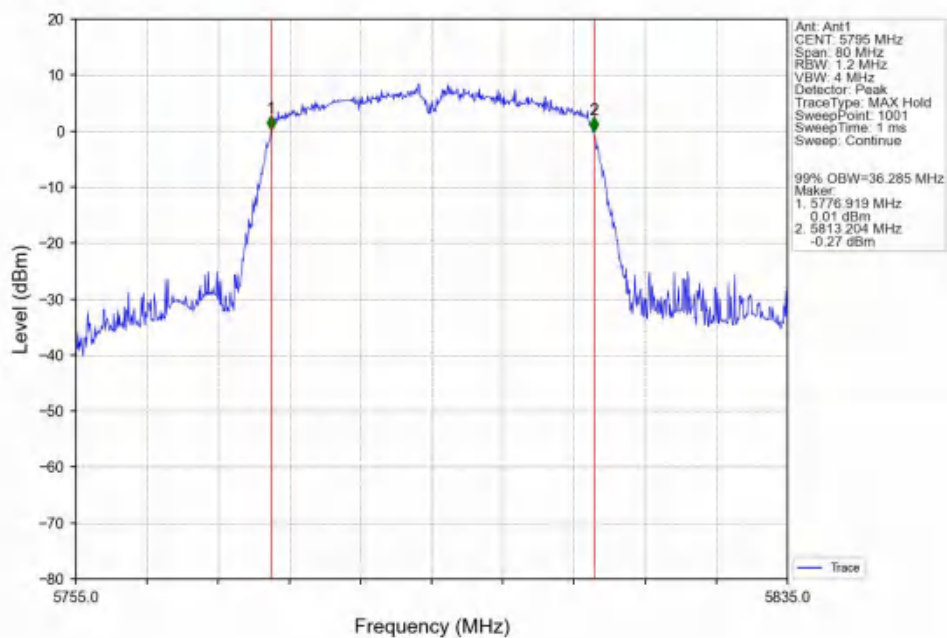

802.11ac(VHT80)_MCH_5210MHz_Ant1_NTNV

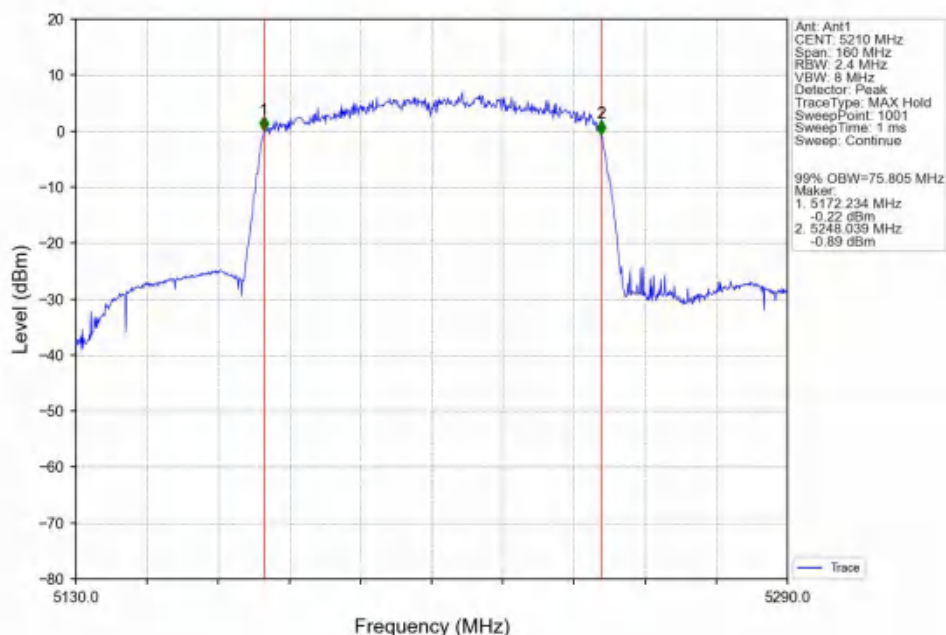


802.11ac(VHT80)_MCH_5775MHz_Ant1_NTNV

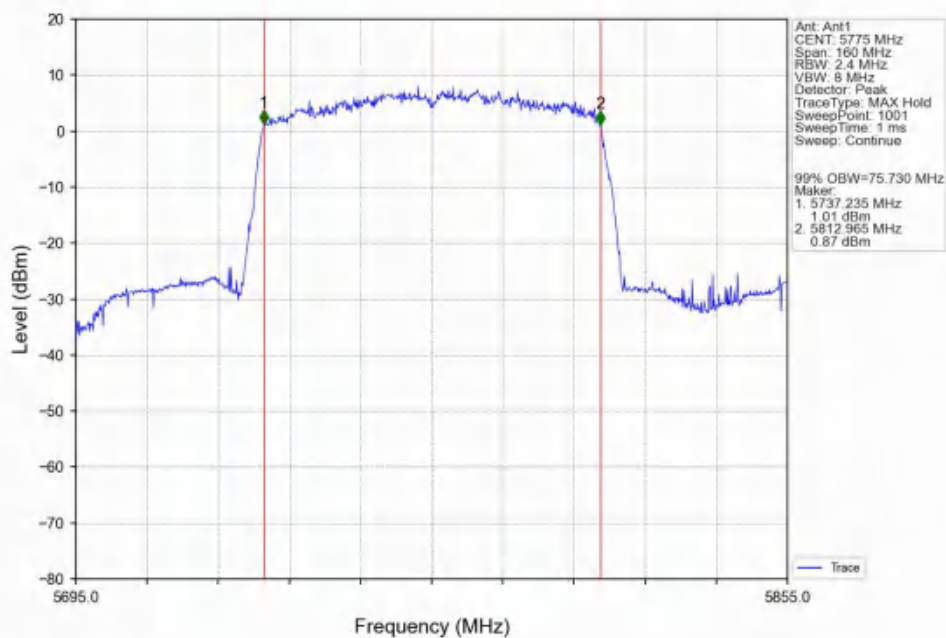


2.2.2 6dB BW


802.11a_LCH_5745MHz_Ant1_NTNV

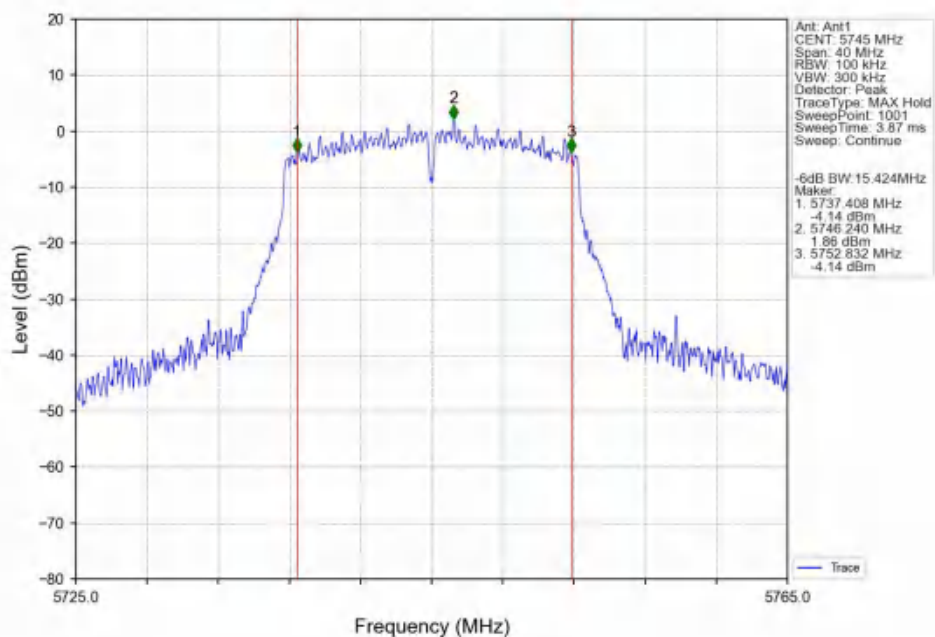


802.11a_MCH_5785MHz_Ant1_NTNV

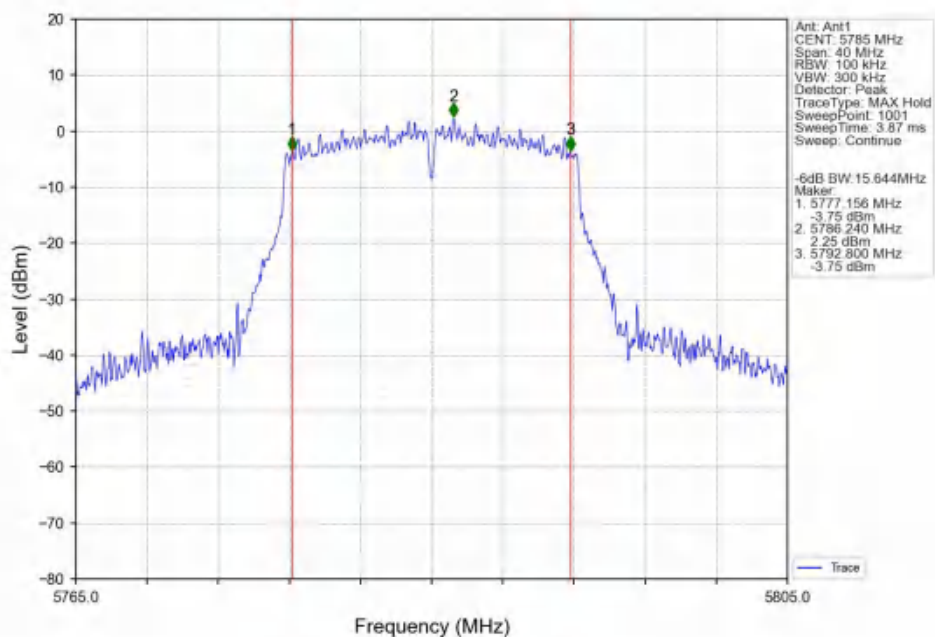


802.11a_HCH_5825MHz_Ant1_NTNV

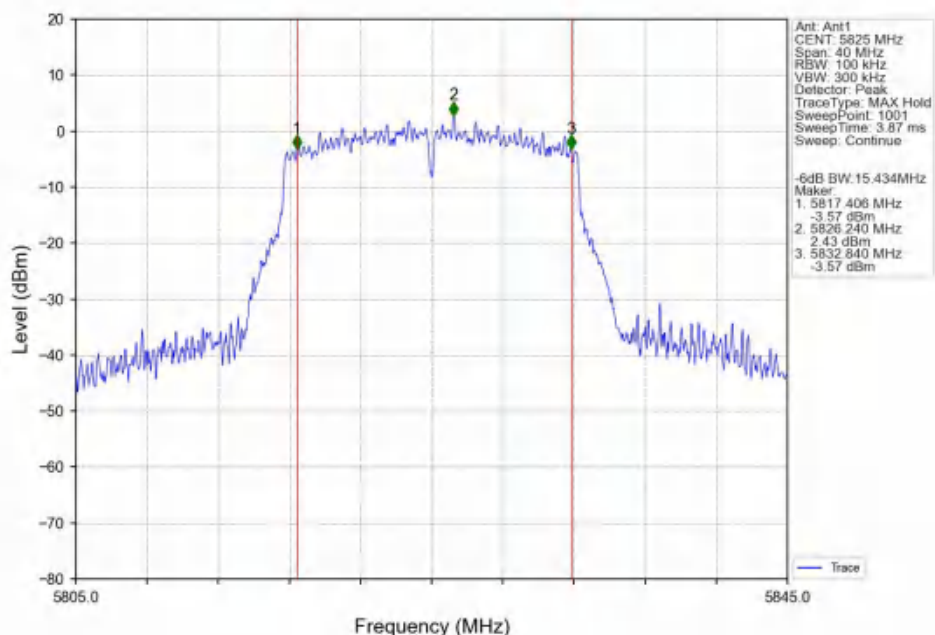


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

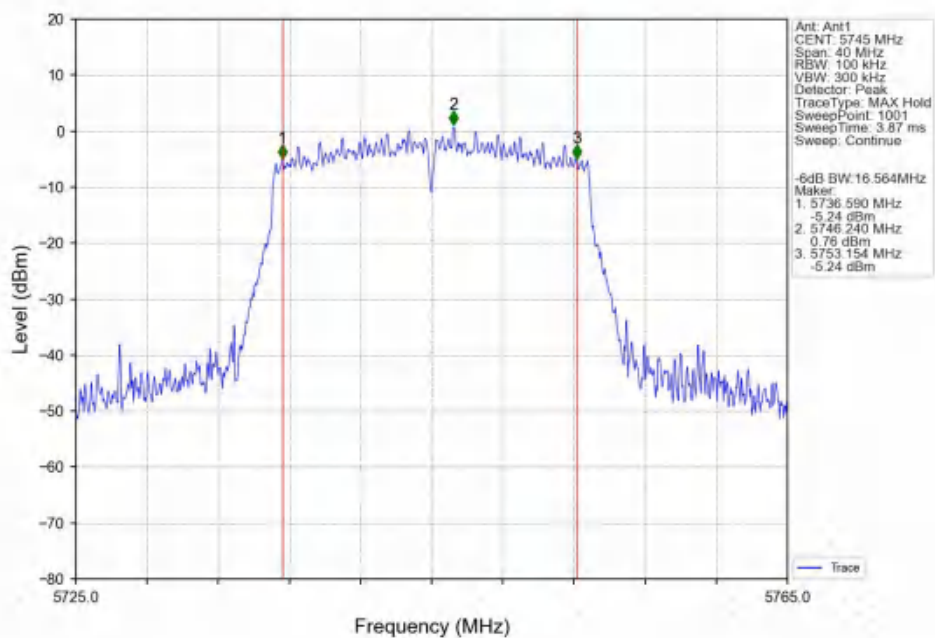


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

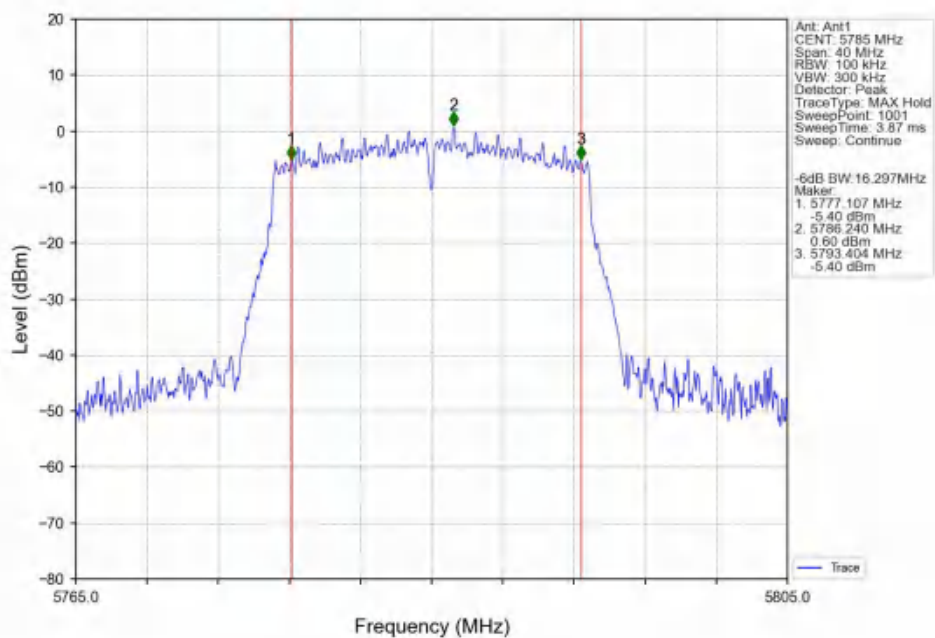


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

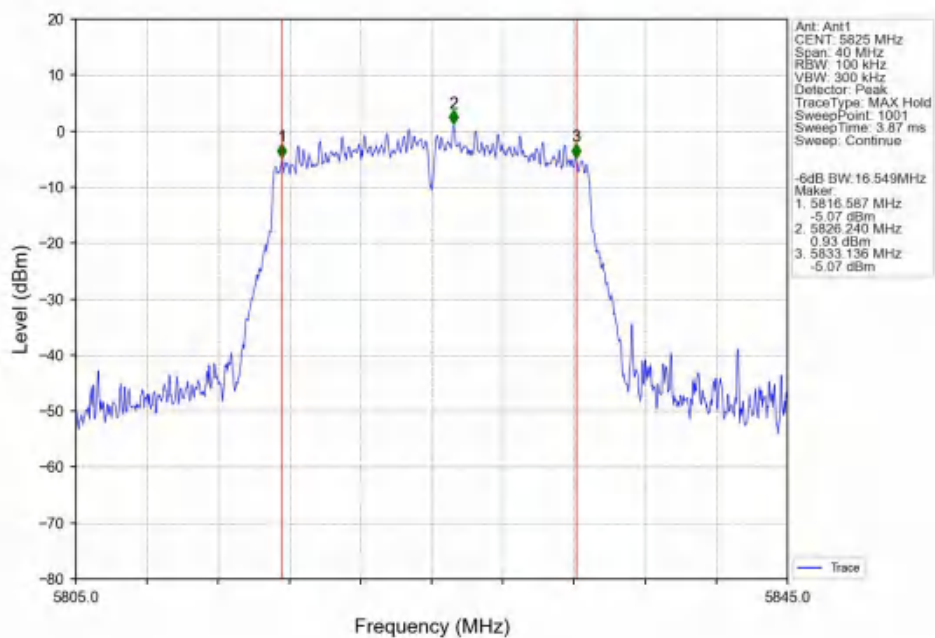


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

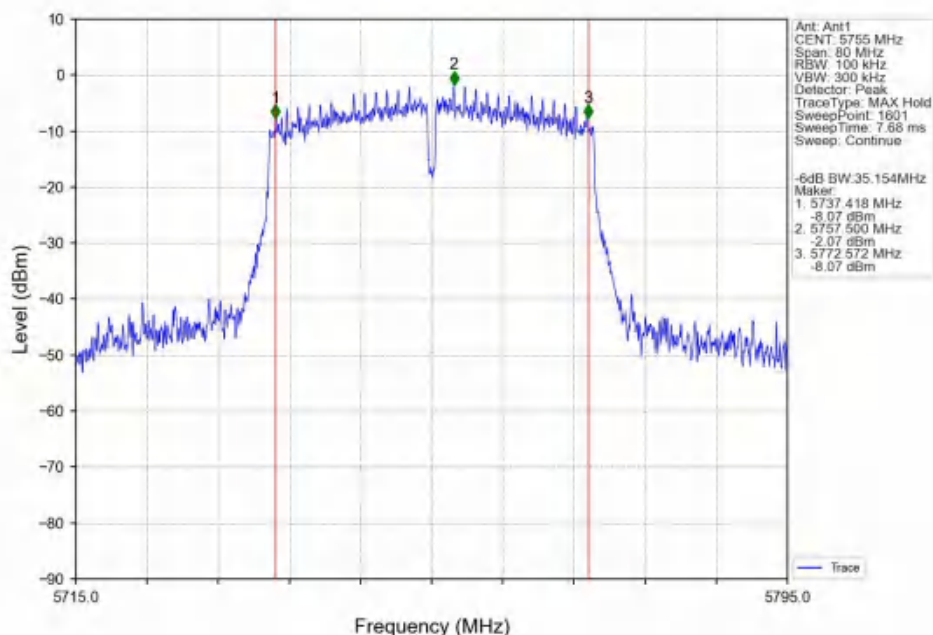


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

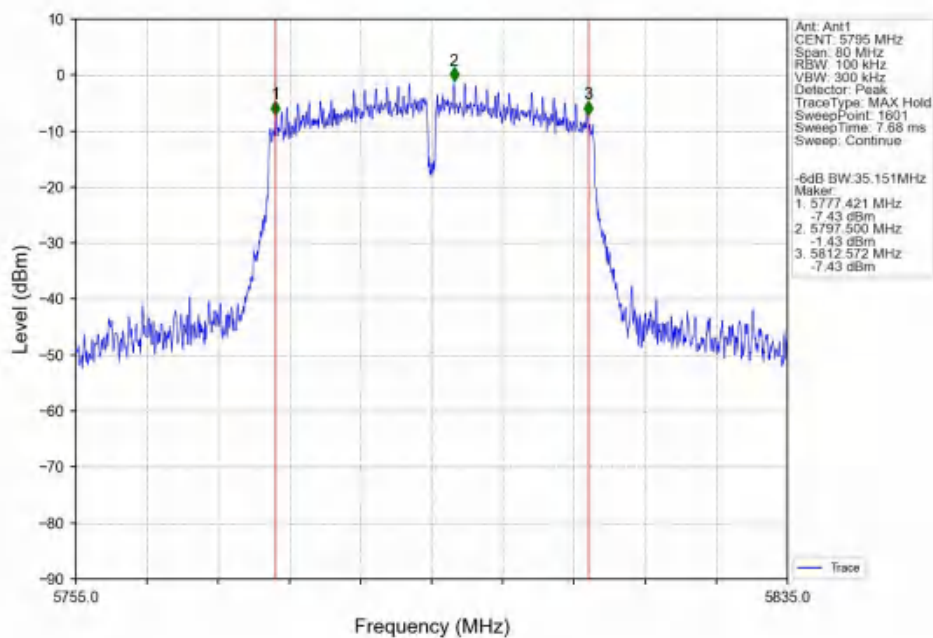


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

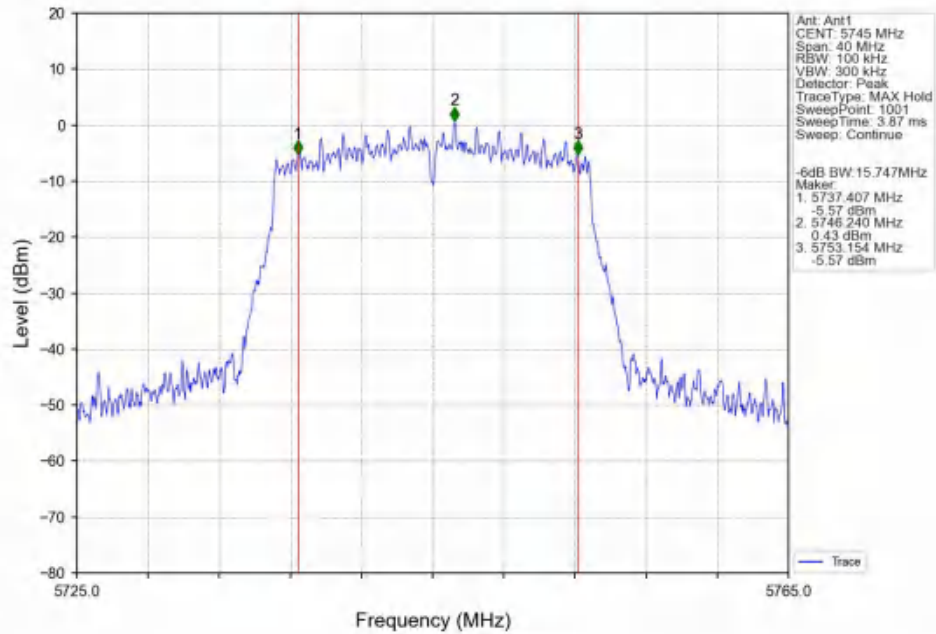


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

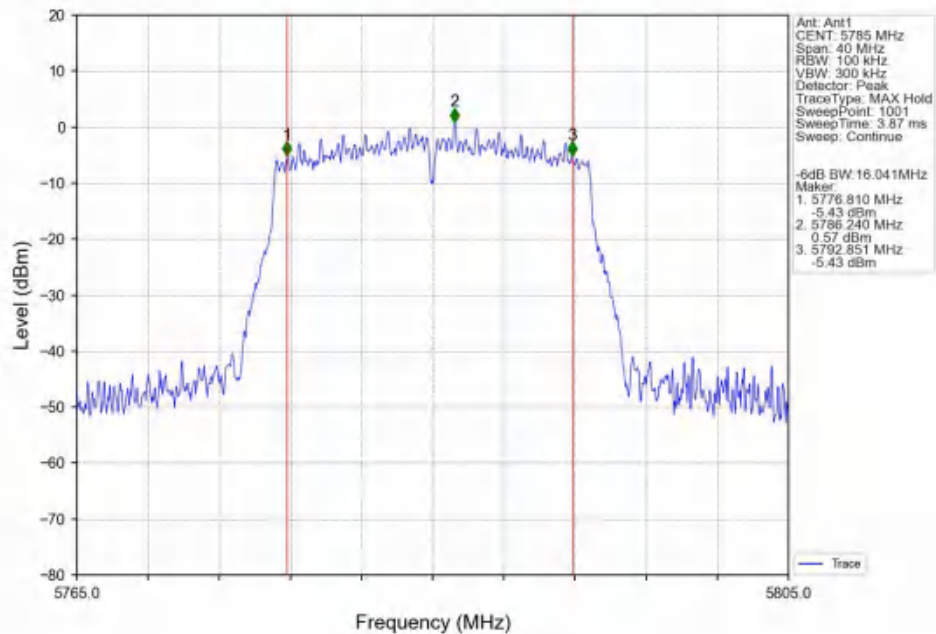


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

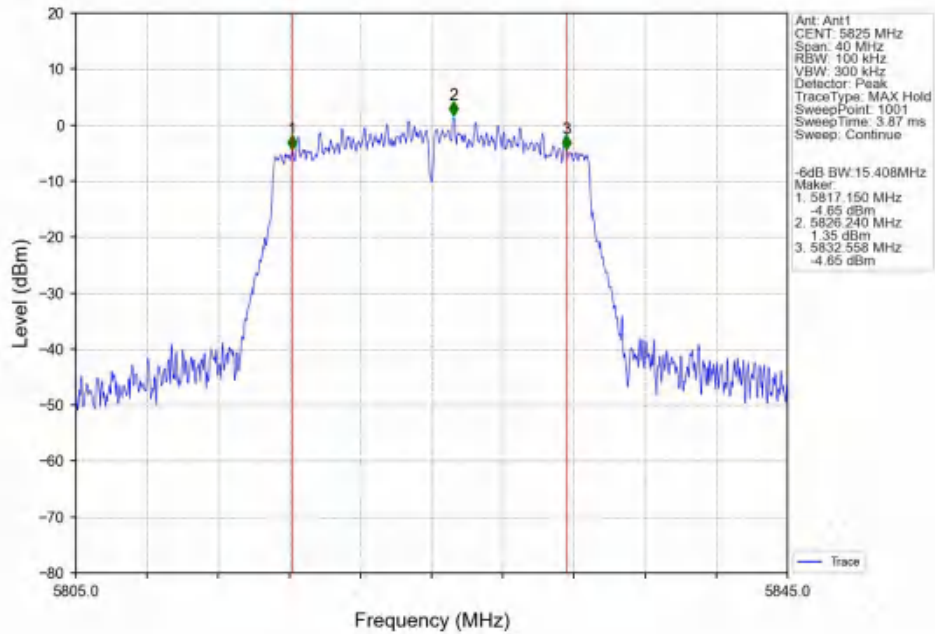


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

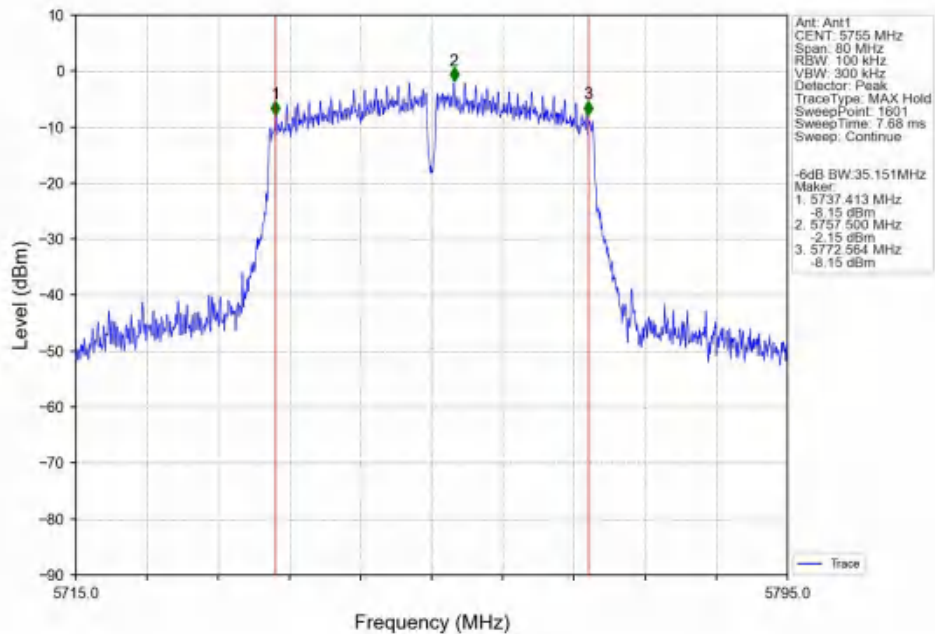


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

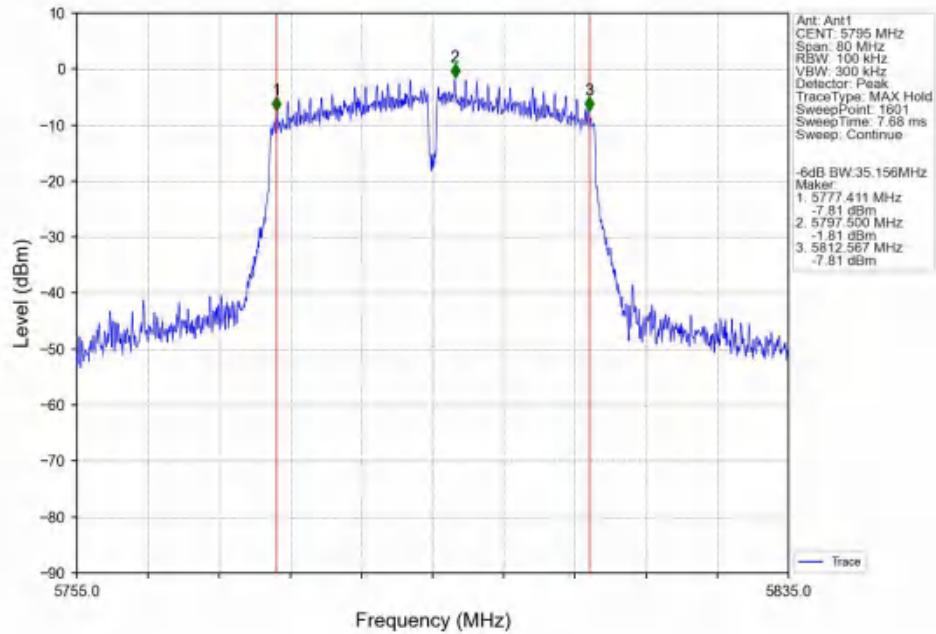


802.11ac(VHT80)_MCH_5775MHz_Ant1_NTNV

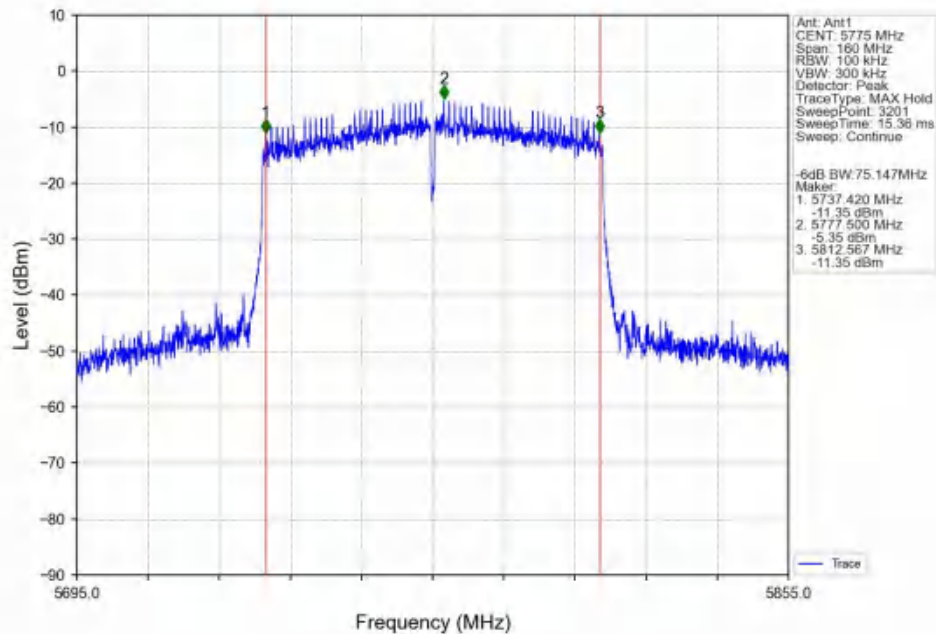


2.2.3 26dB BW

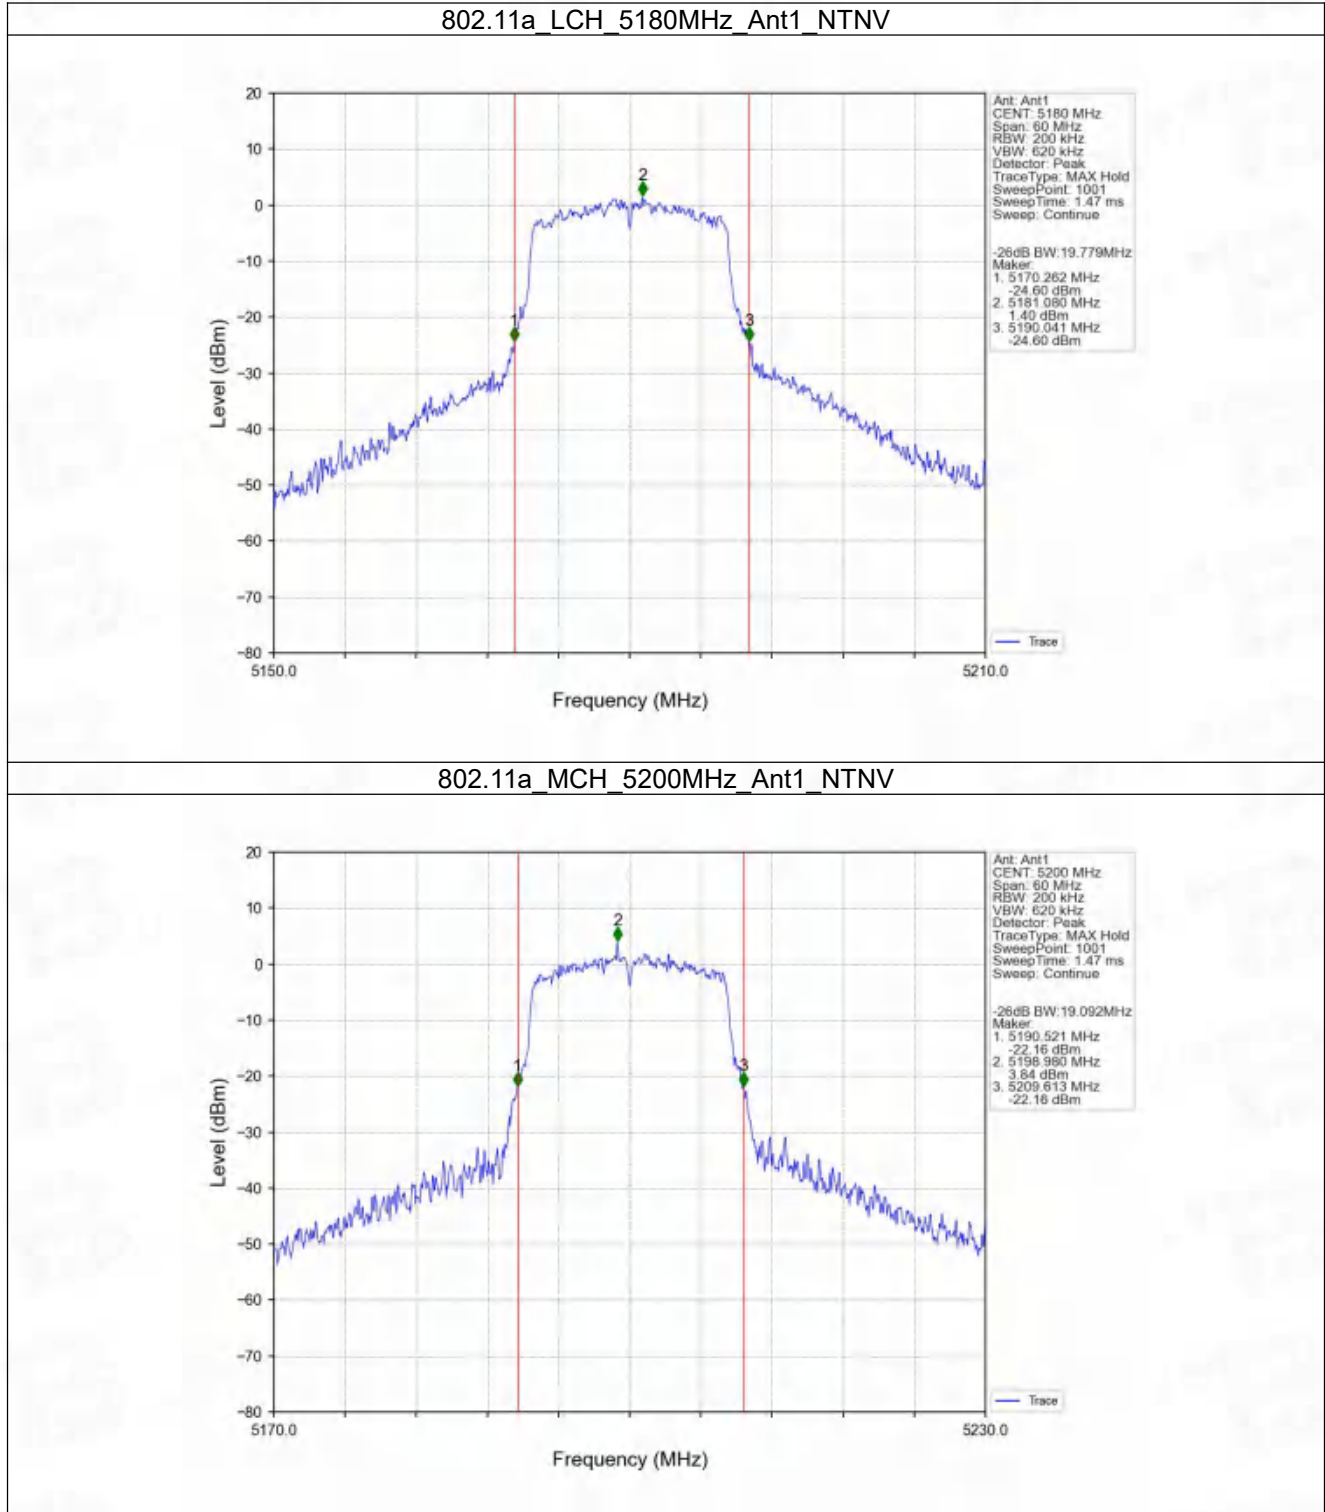


802.11a_HCH_5240MHz_Ant1_NTNV

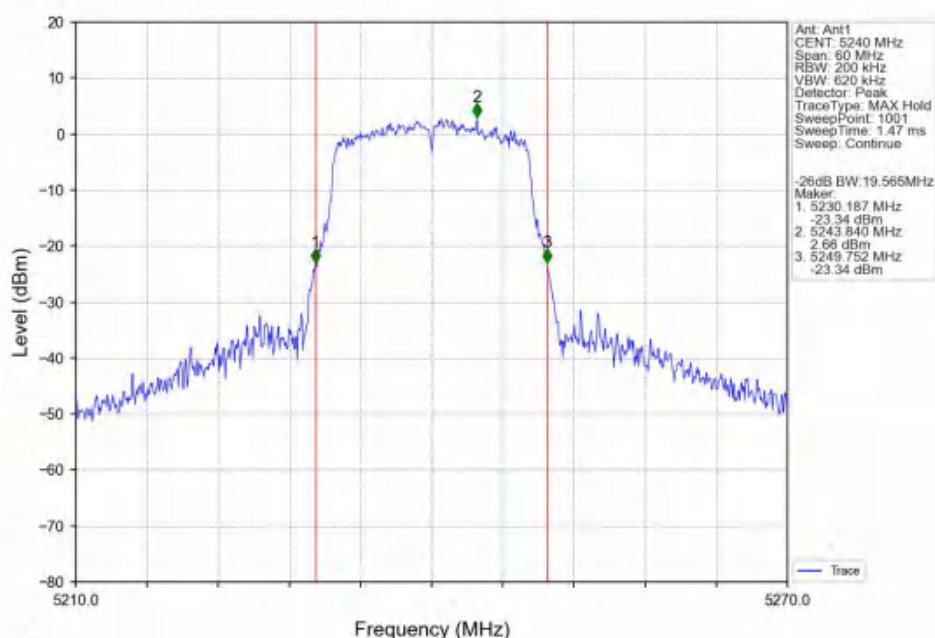


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

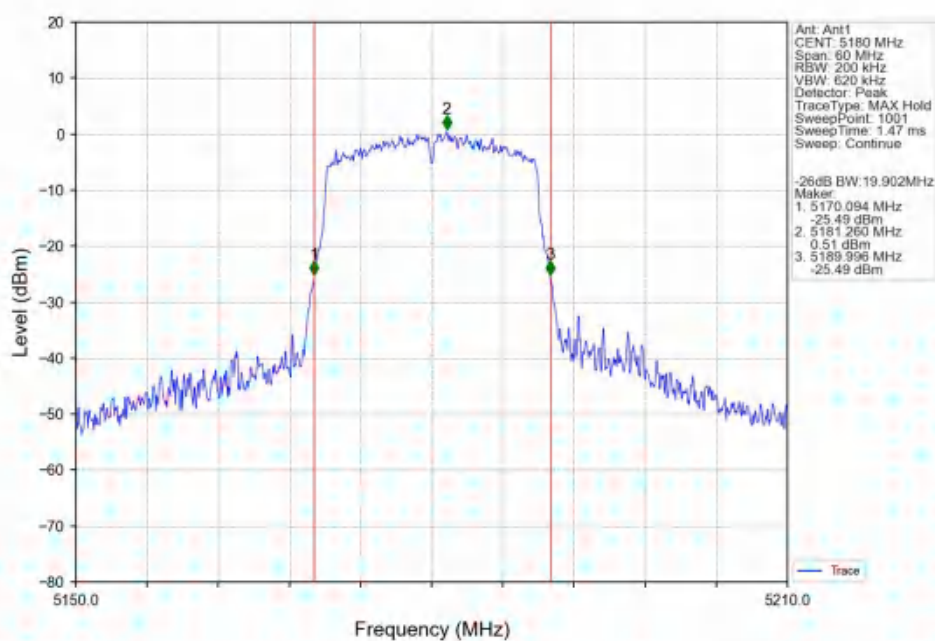


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

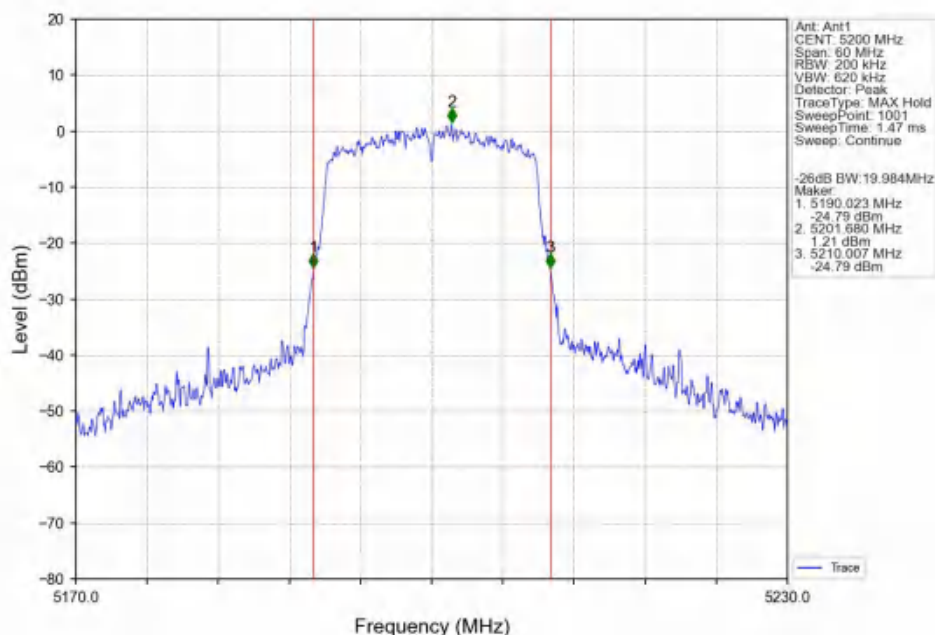


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

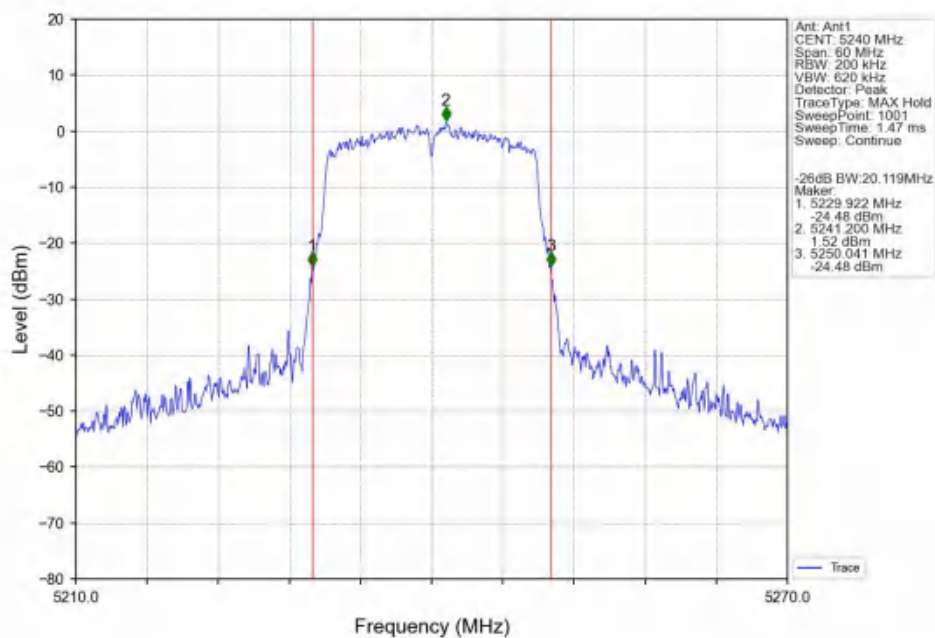


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

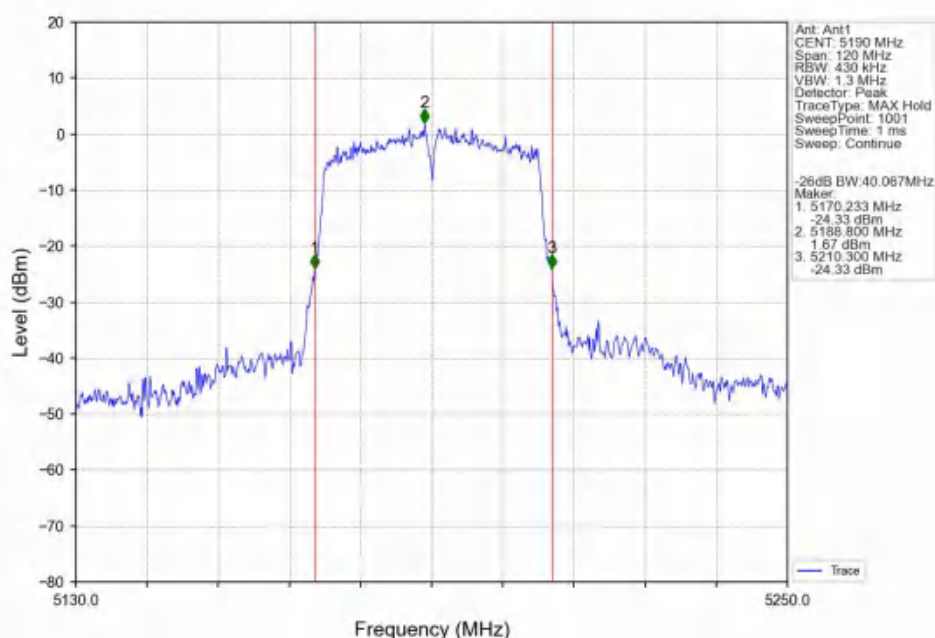


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

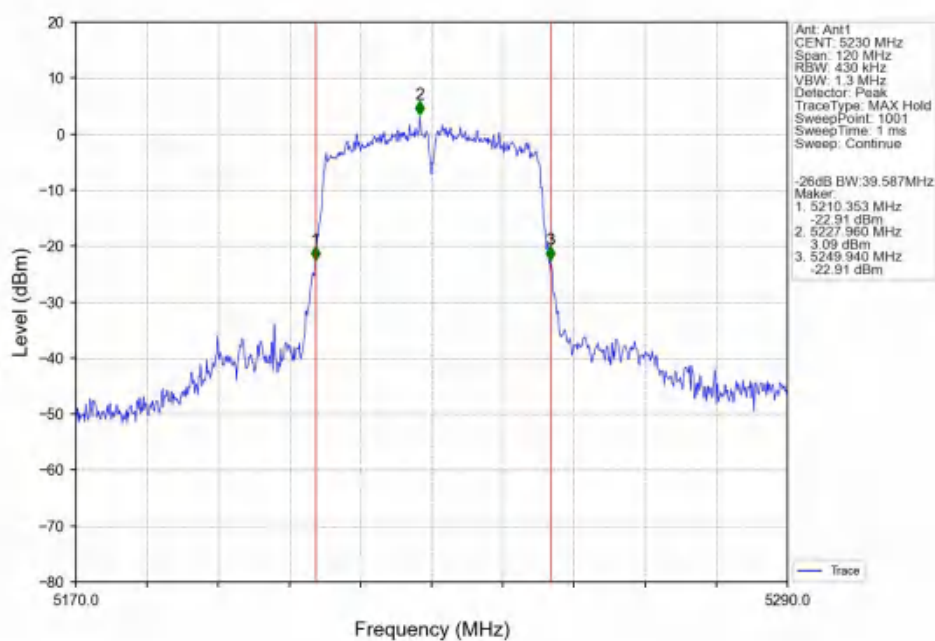


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

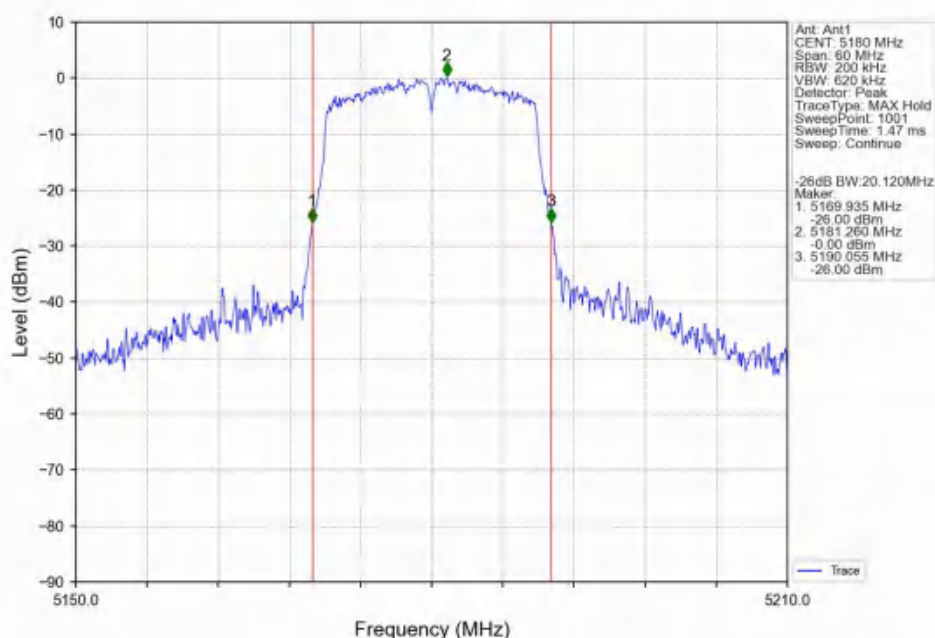


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

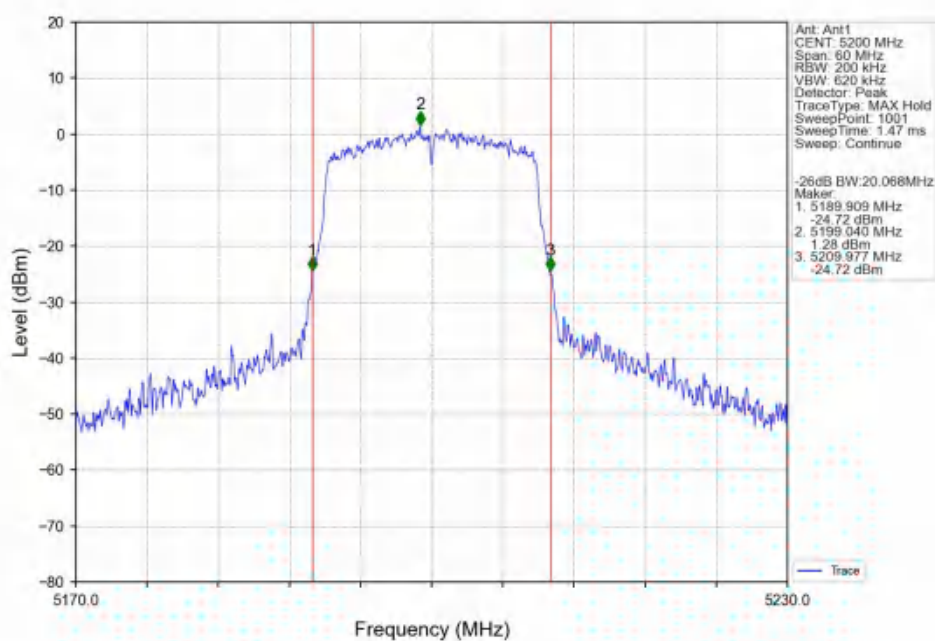


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

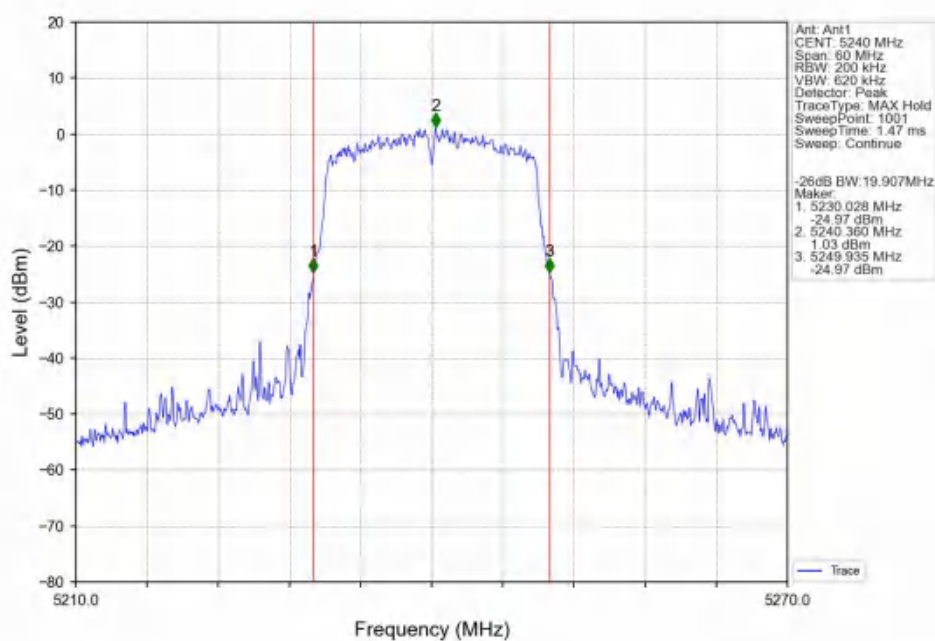


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

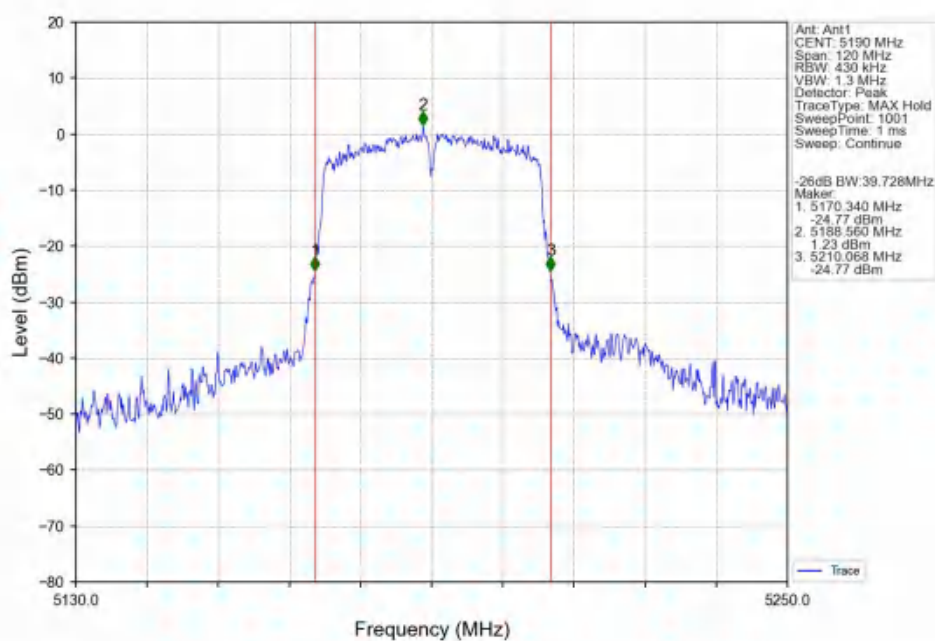

802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

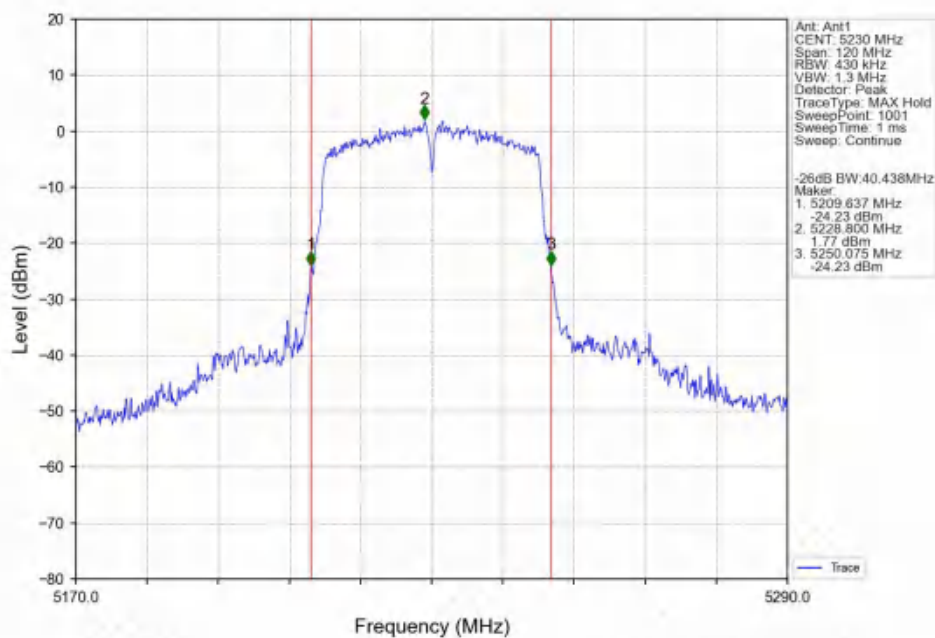

802.11ac(VHT80)_MCH_5210MHz_Ant1_NTNV

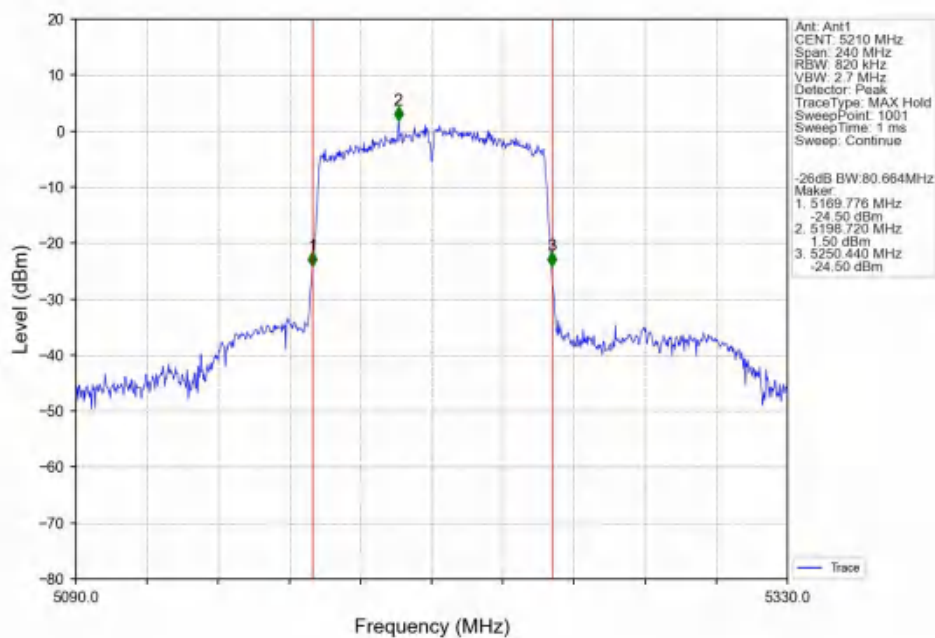

3. Maximum Conducted Output Power

3.1 Test Result


3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
802.11a	SISO	5180	12.21	≤ 23.98	Pass
		5200	12.90	≤ 23.98	Pass
		5240	13.23	≤ 23.98	Pass
		5745	12.58	≤ 30	Pass
		5785	12.61	≤ 30	Pass
		5825	13.28	≤ 30	Pass
802.11n (HT20)	SISO	5180	12.78	≤ 23.98	Pass
		5200	12.41	≤ 23.98	Pass
		5240	12.78	≤ 23.98	Pass
		5745	11.92	≤ 30	Pass
		5785	12.46	≤ 30	Pass
		5825	13.06	≤ 30	Pass
802.11n (HT40)	SISO	5190	12.45	≤ 23.98	Pass
		5230	12.63	≤ 23.98	Pass
		5755	12.10	≤ 30	Pass
		5795	12.71	≤ 30	Pass
802.11ac (VHT20)	SISO	5180	12.24	≤ 23.98	Pass
		5200	12.35	≤ 23.98	Pass
		5240	12.63	≤ 23.98	Pass
		5745	11.90	≤ 30	Pass
		5785	12.52	≤ 30	Pass
		5825	13.10	≤ 30	Pass
802.11ac (VHT40)	SISO	5190	12.34	≤ 23.98	Pass
		5230	12.52	≤ 23.98	Pass
		5755	12.16	≤ 30	Pass
		5795	12.78	≤ 30	Pass
802.11ac (VHT80)	SISO	5210	12.55	≤ 23.98	Pass
		5775	12.00	≤ 30	Pass


Note1: Antenna Gain: Ant1: -0.07dBi;

3.2 Test Graph


3.2.1 Power

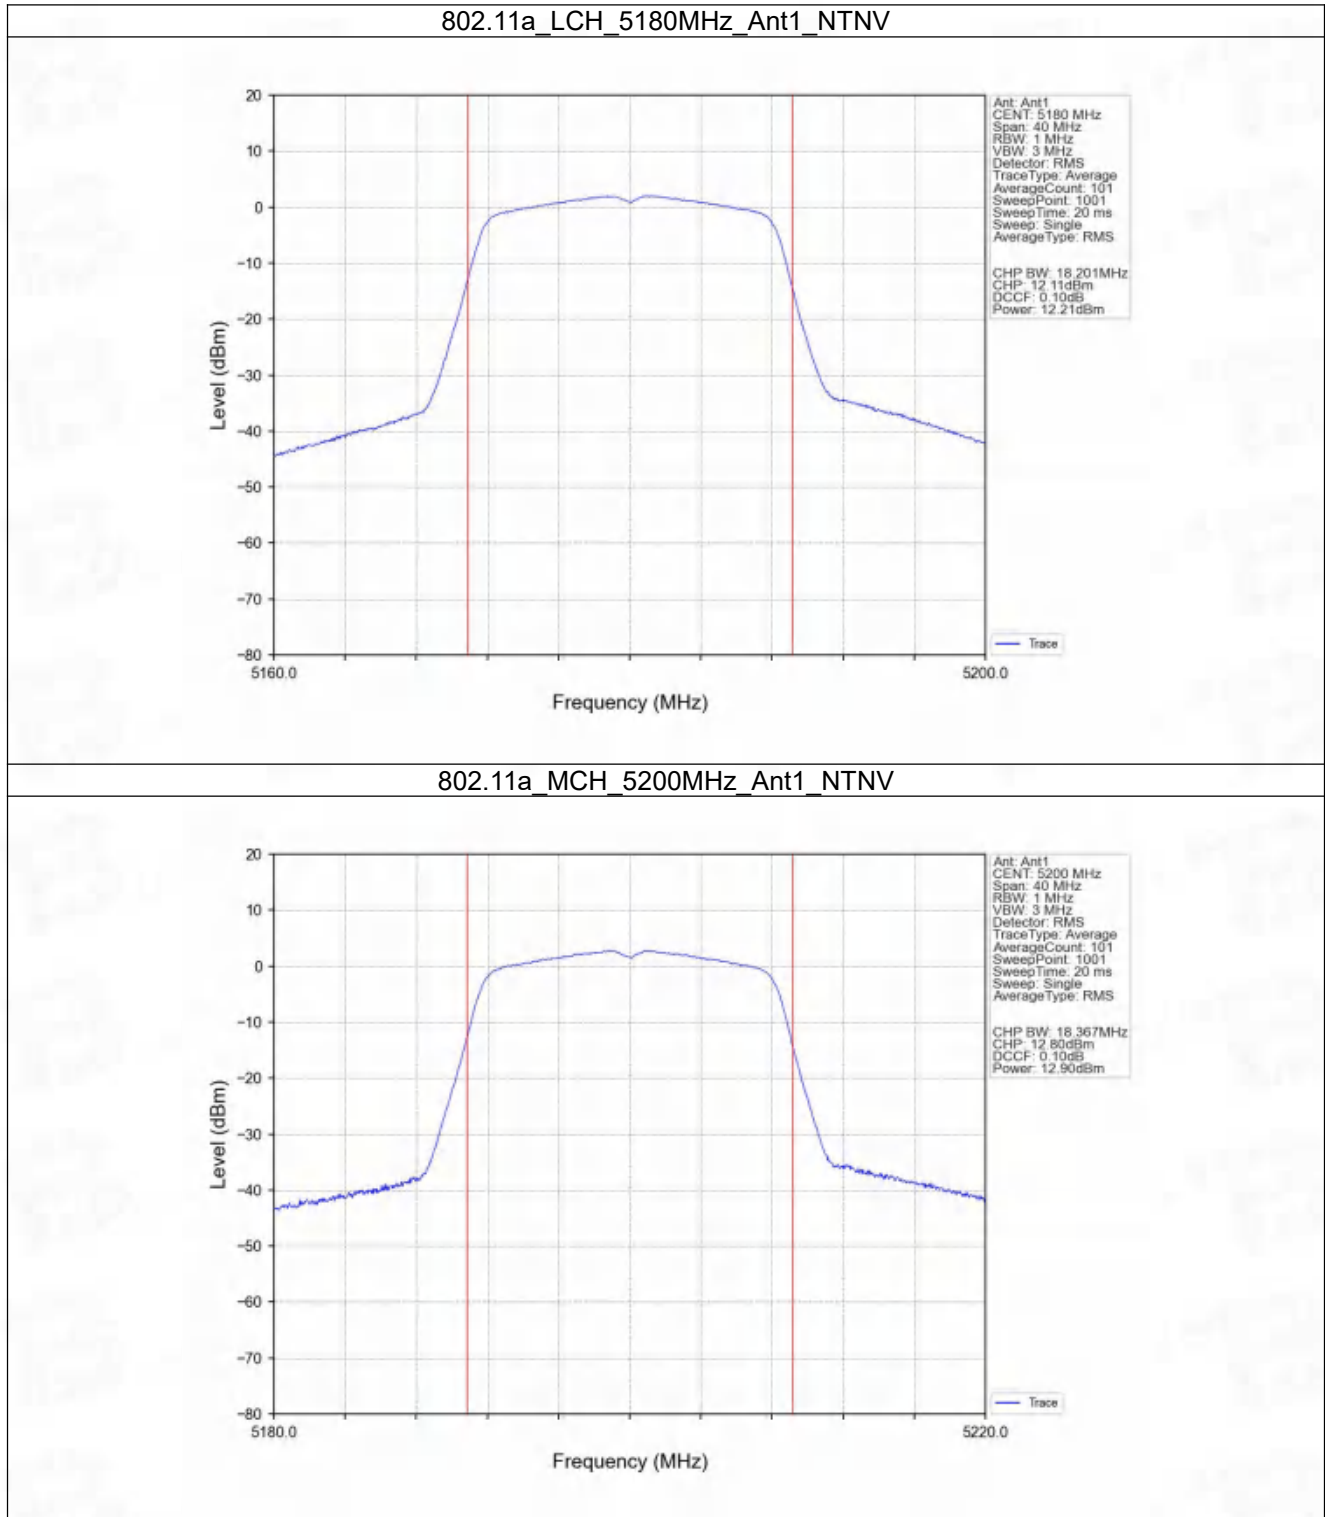


802.11a_HCH_5240MHz_Ant1_NTNV

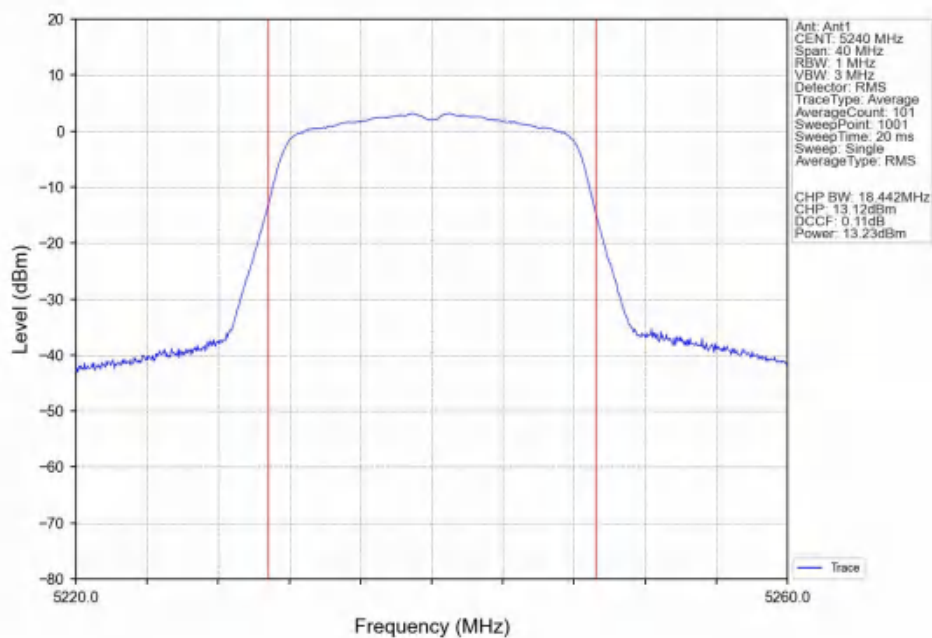


802.11a_LCH_5745MHz_Ant1_NTNV

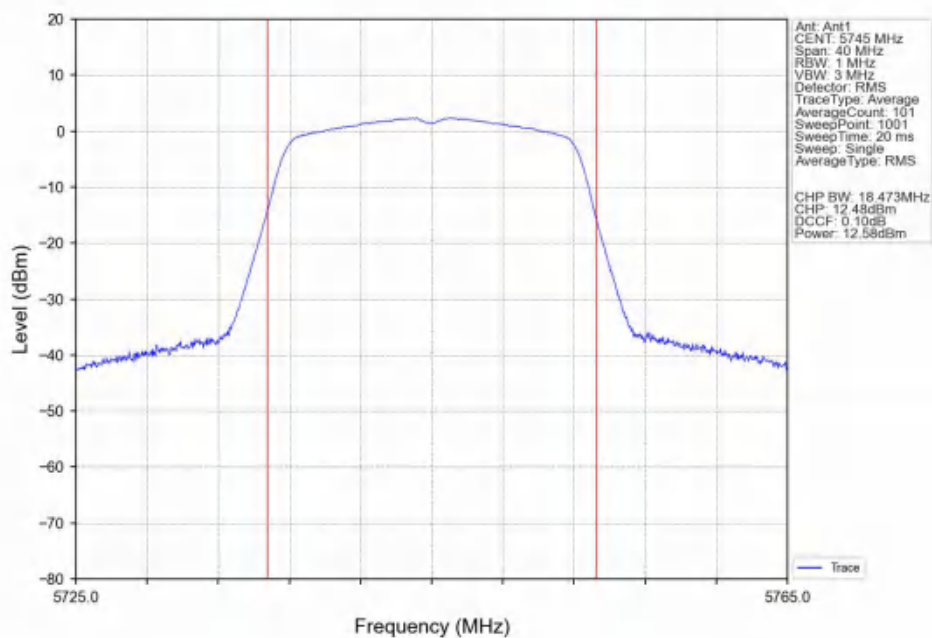


802.11a_MCH_5785MHz_Ant1_NTNV

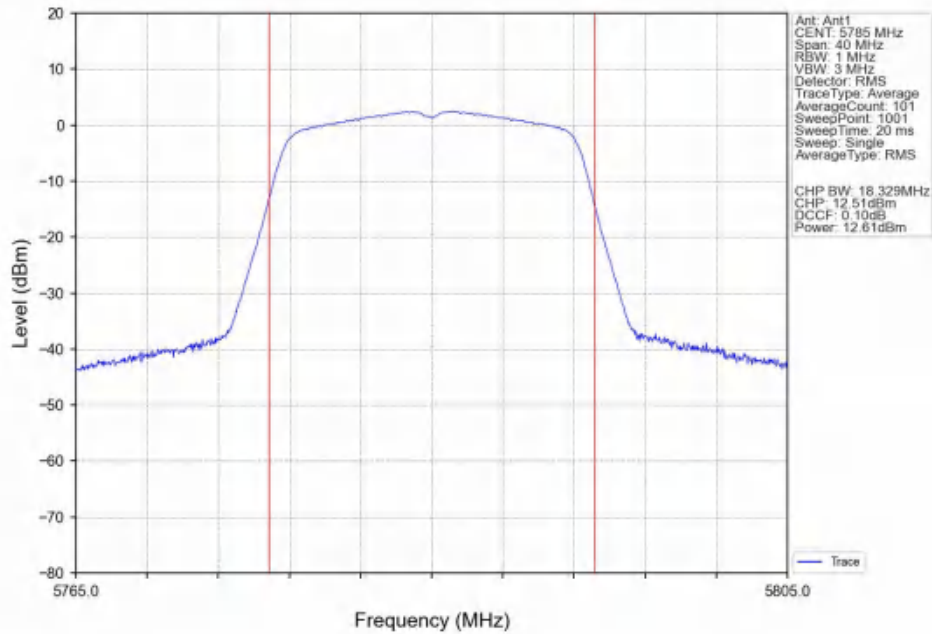


802.11a_HCH_5825MHz_Ant1_NTNV

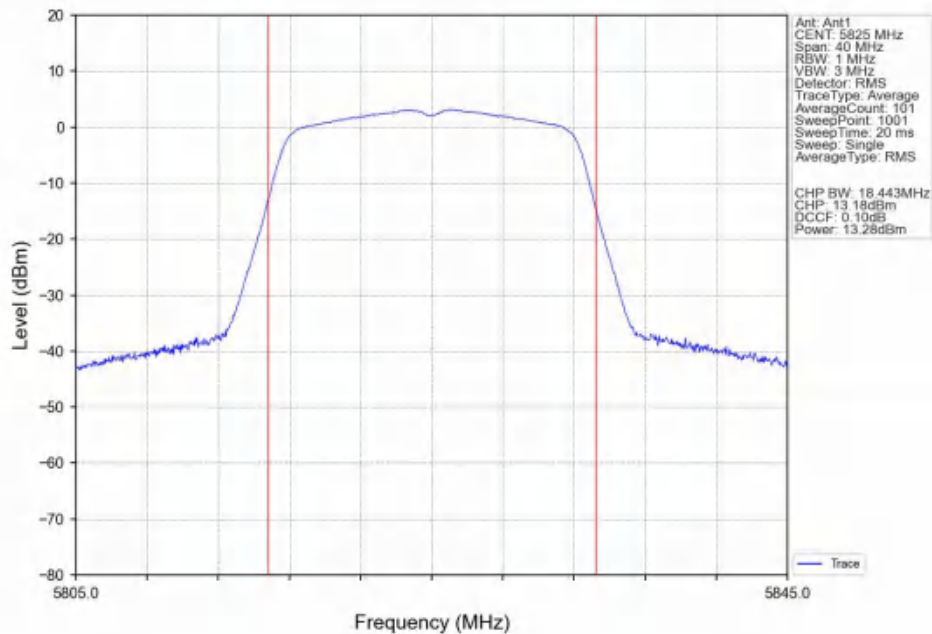


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

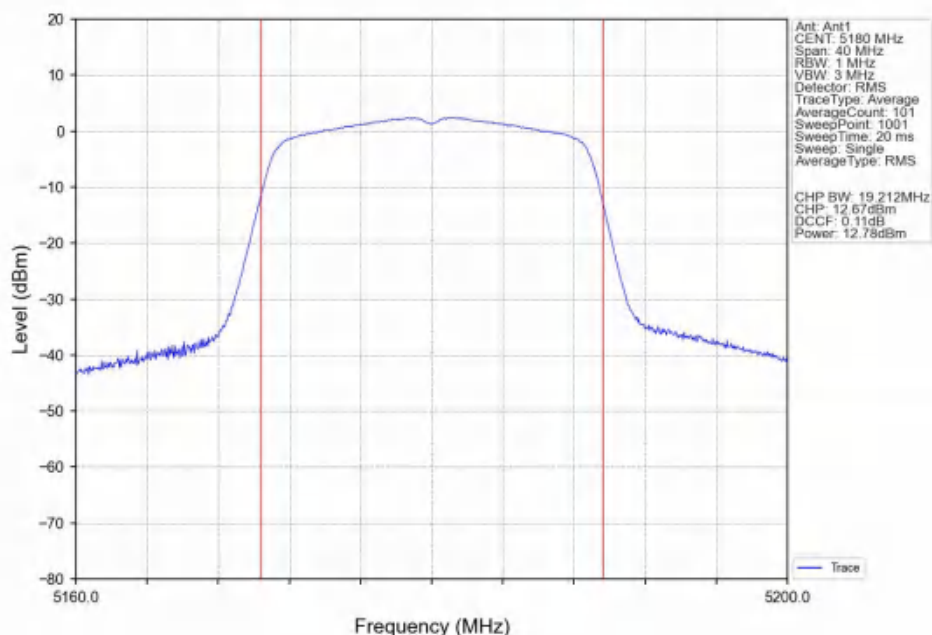


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

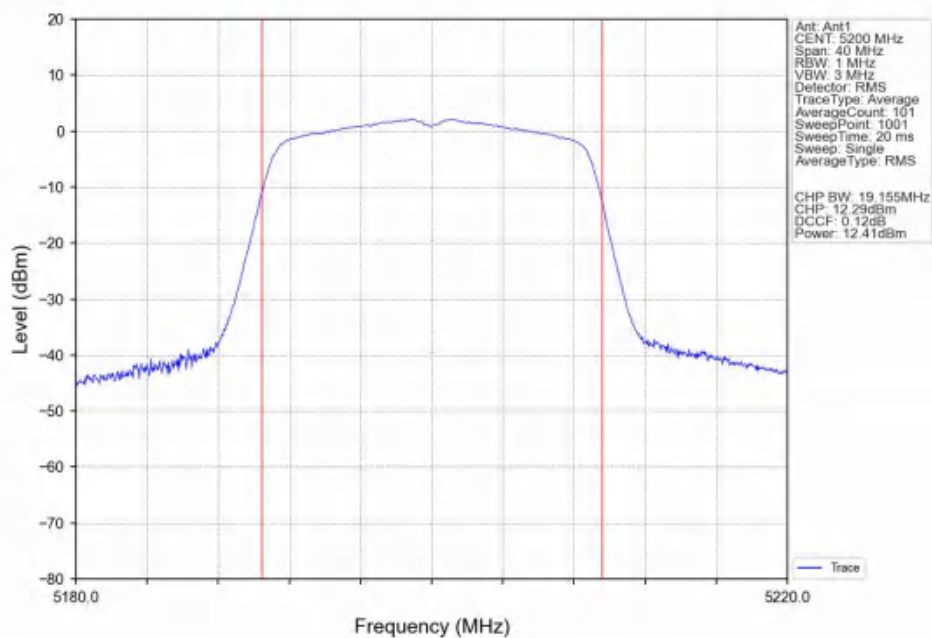


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

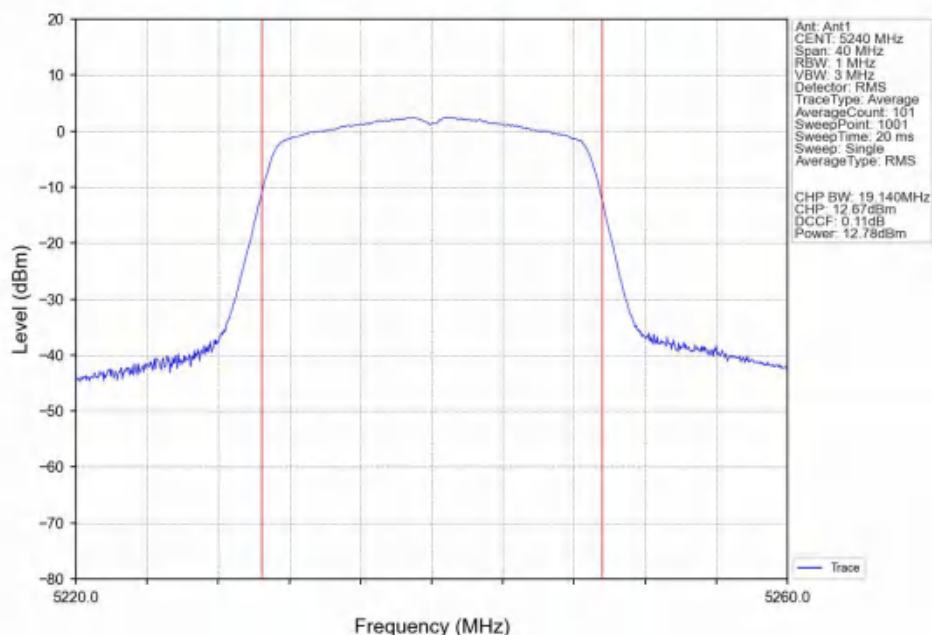


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

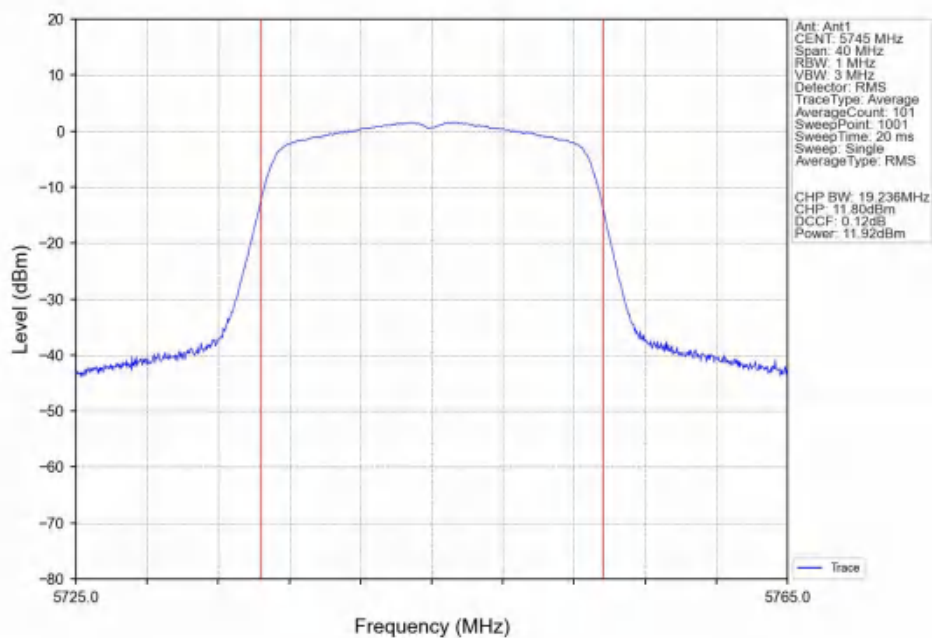


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

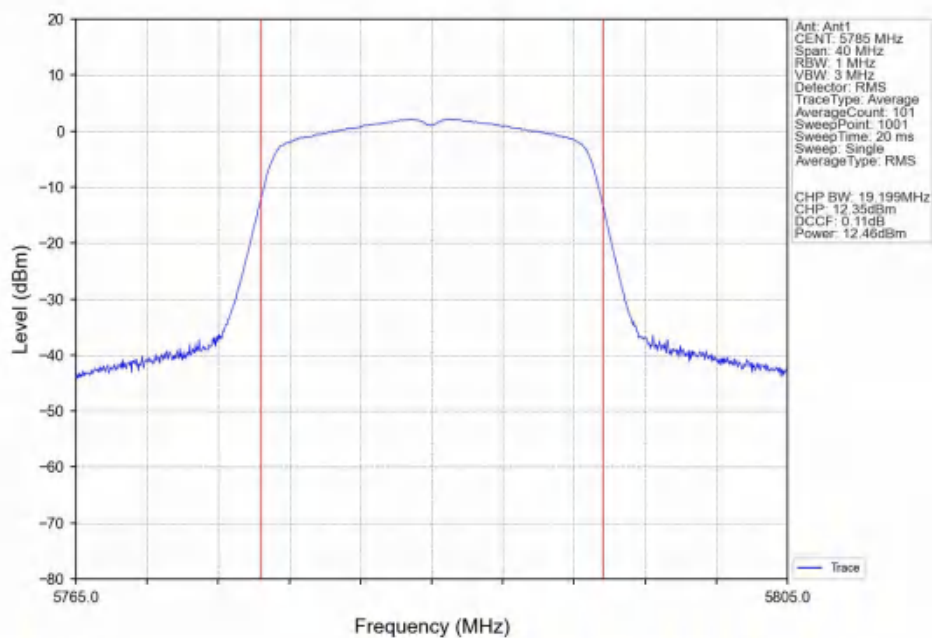


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

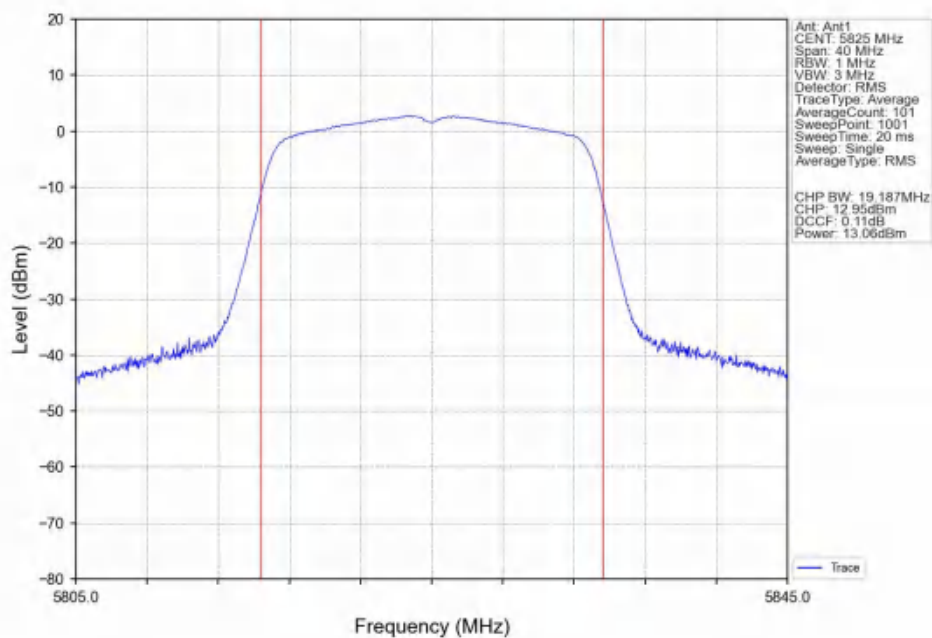


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

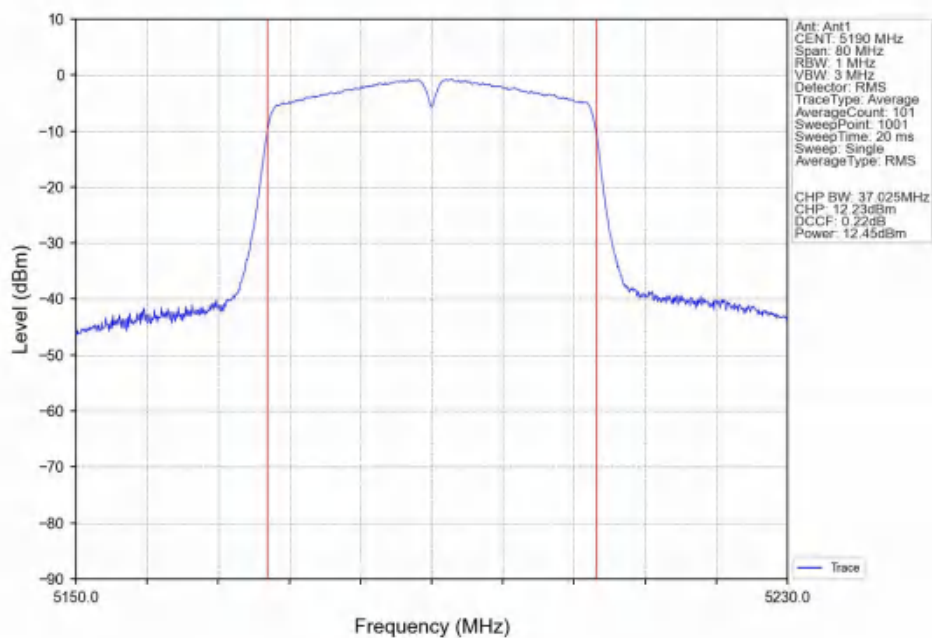


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

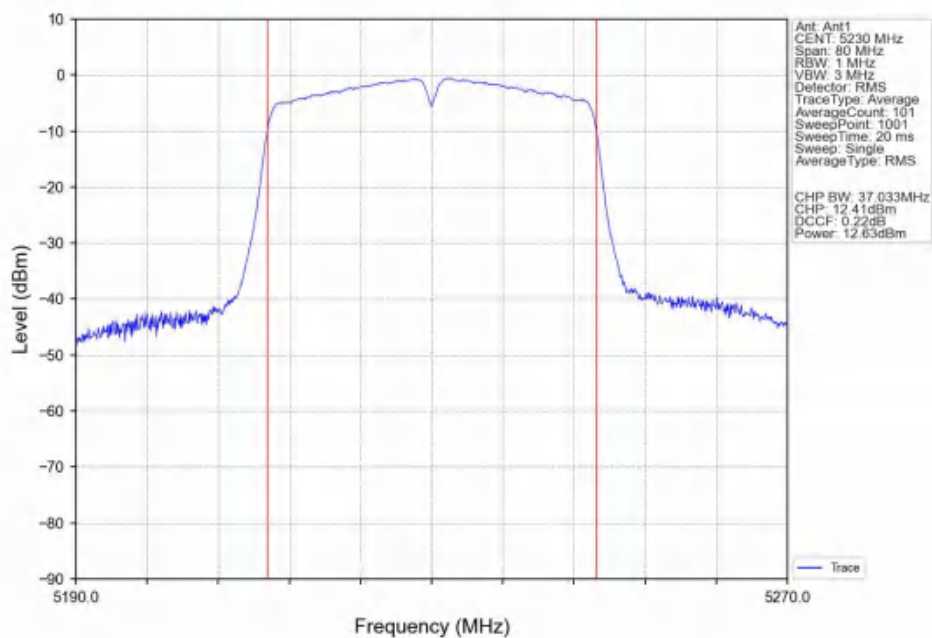


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

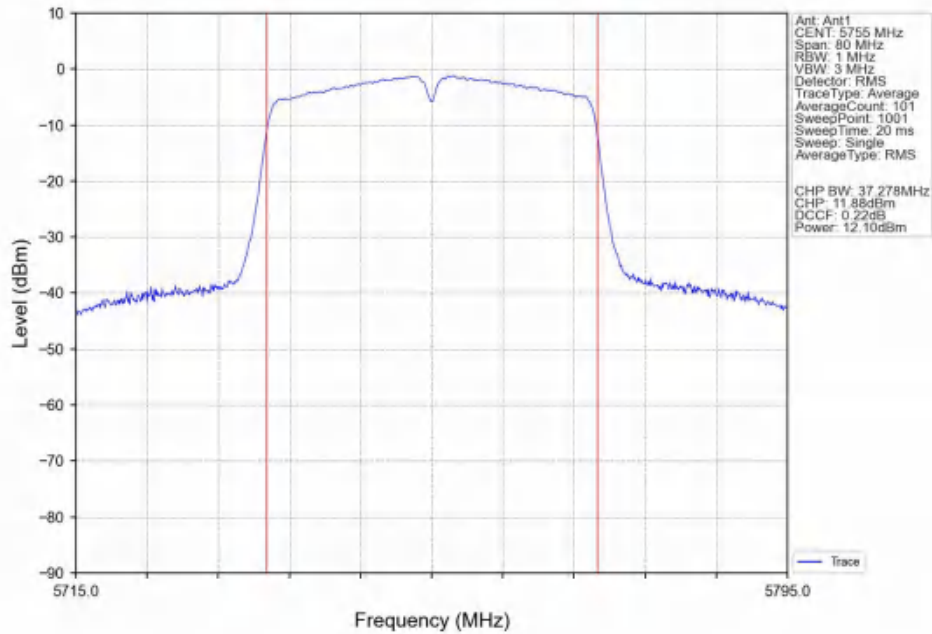


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

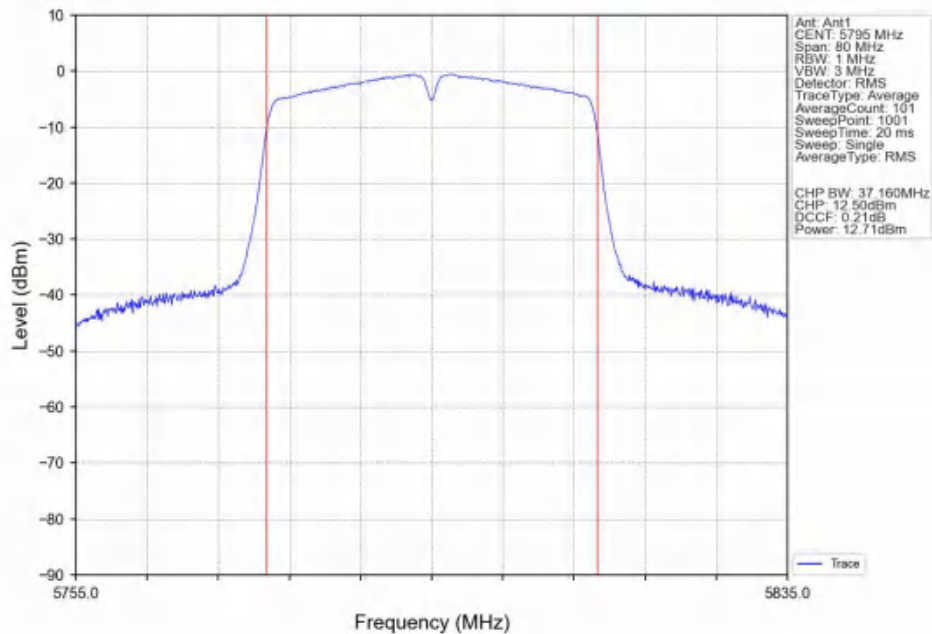


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

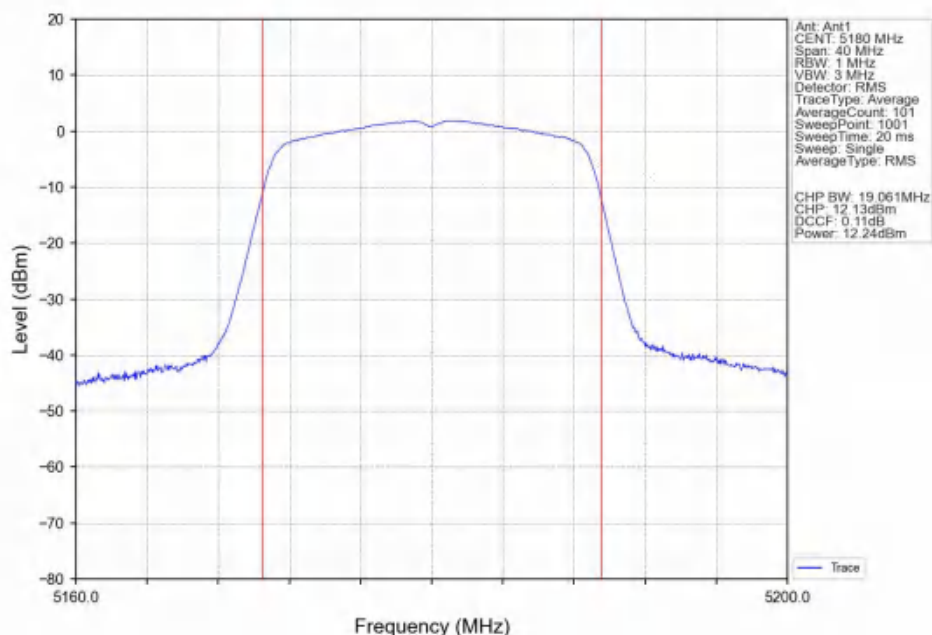


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

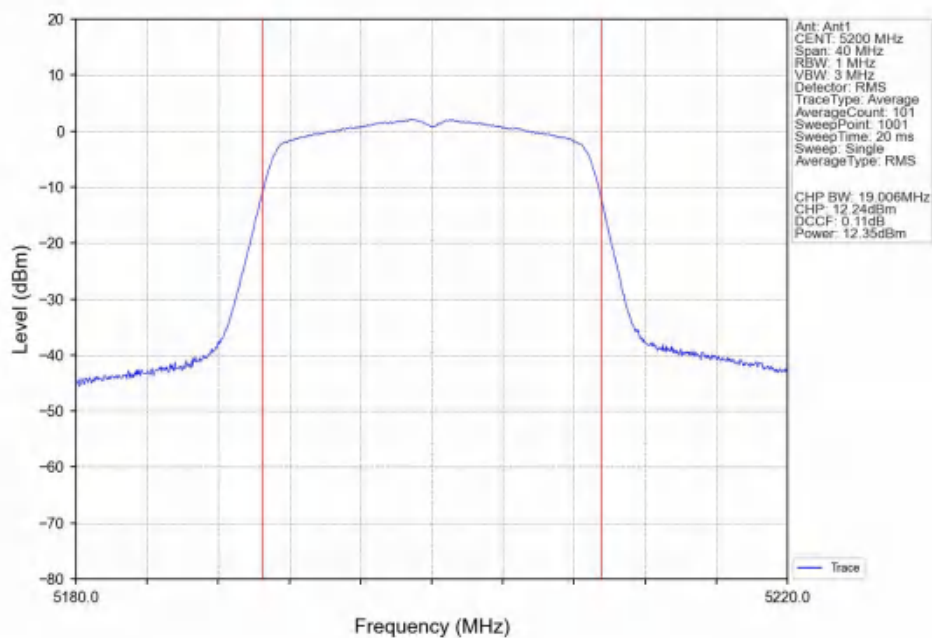


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

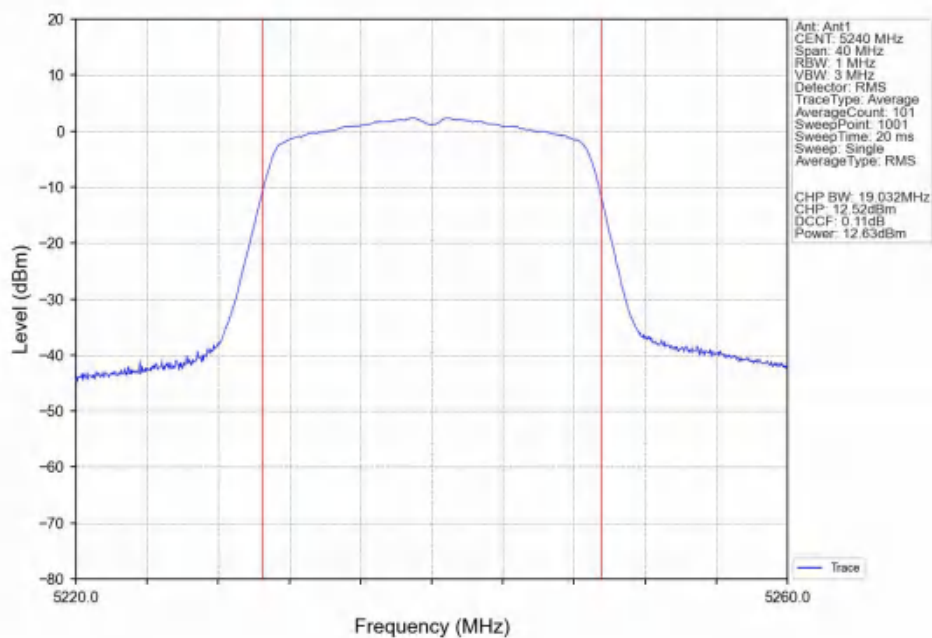


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

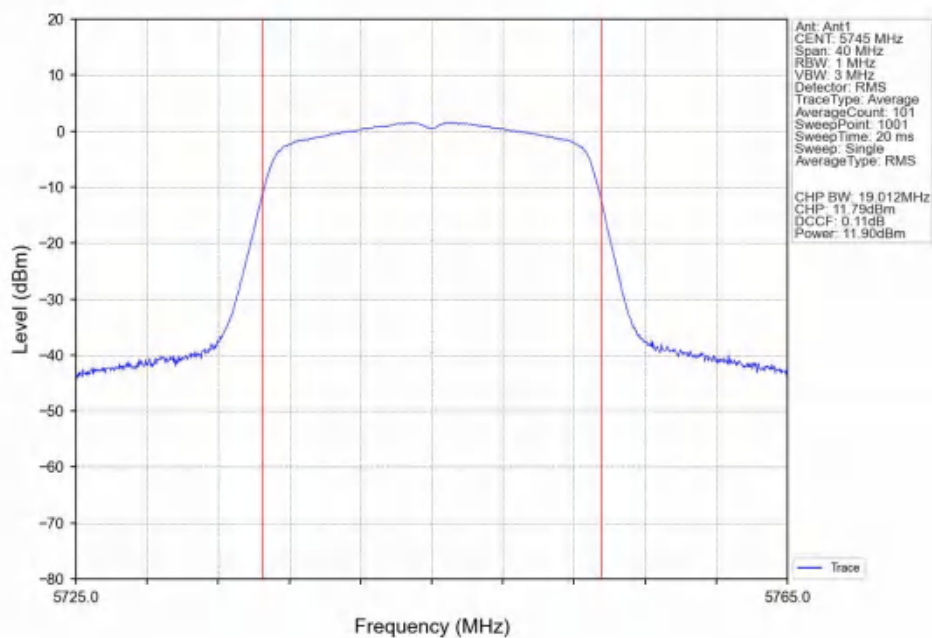


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

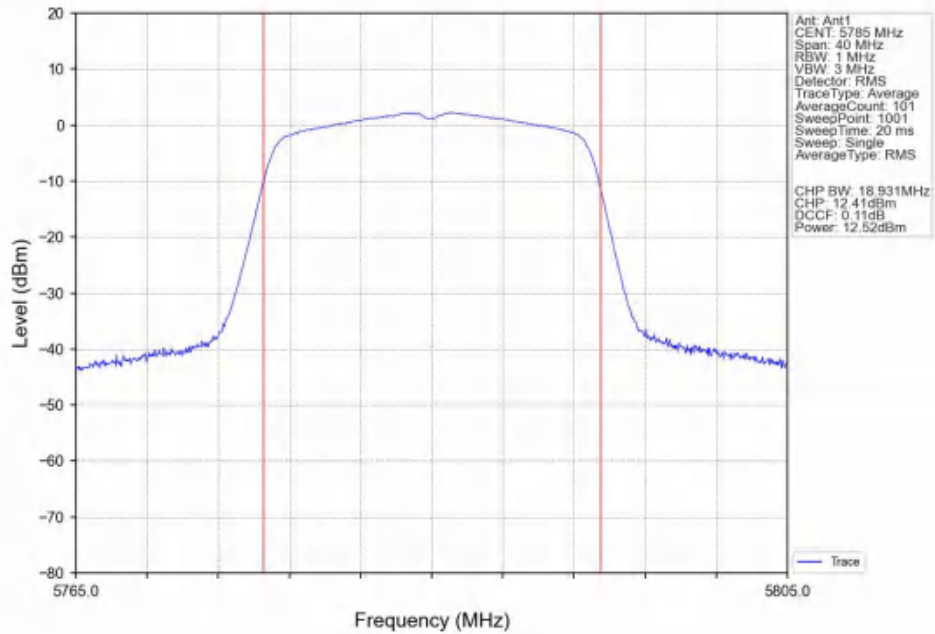


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

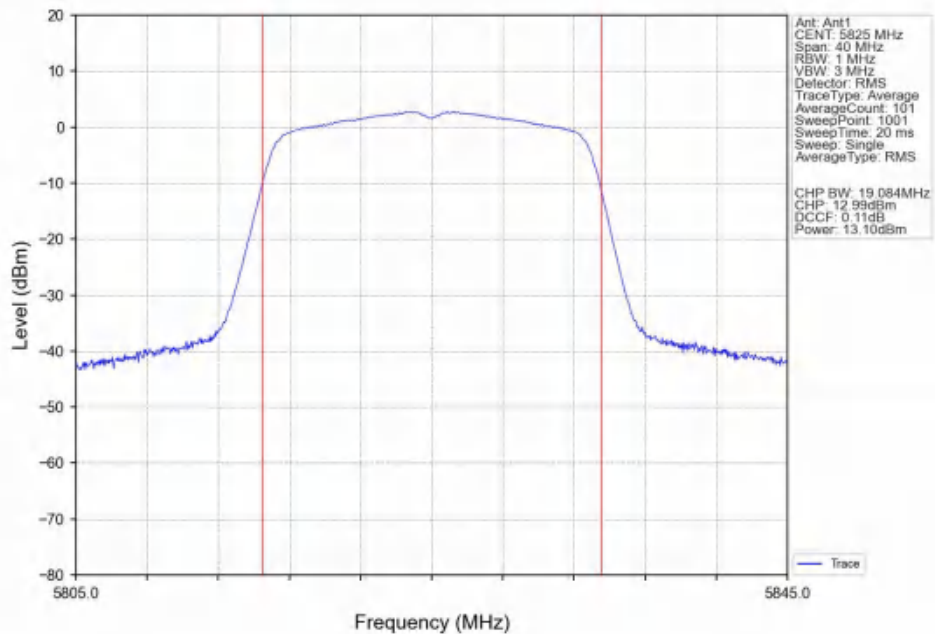


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

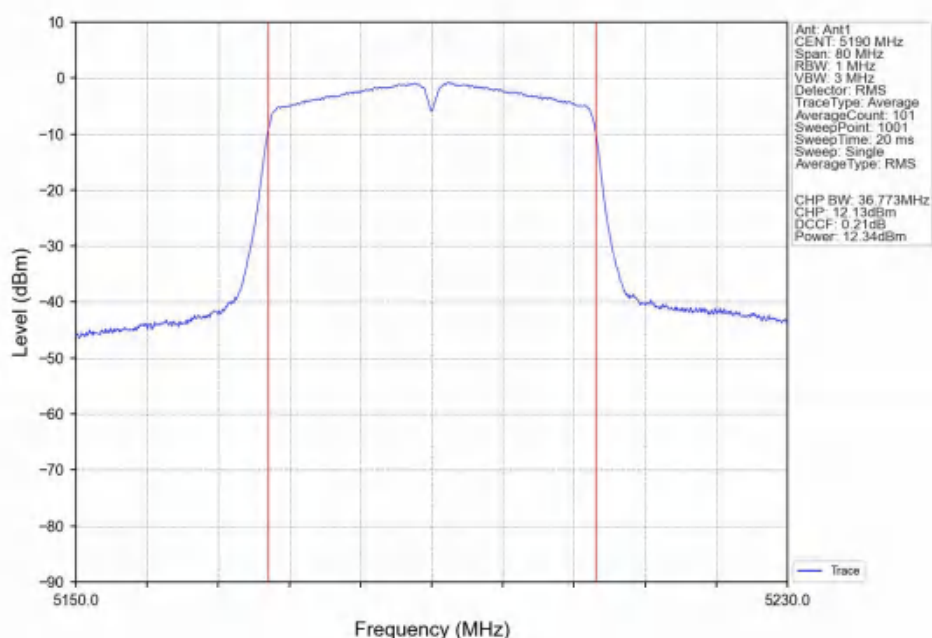


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

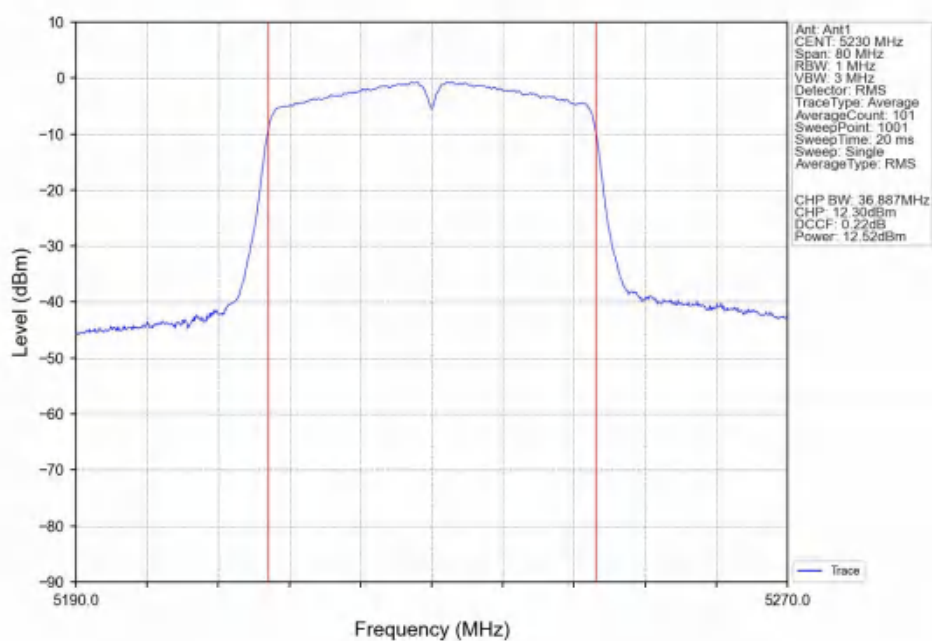


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

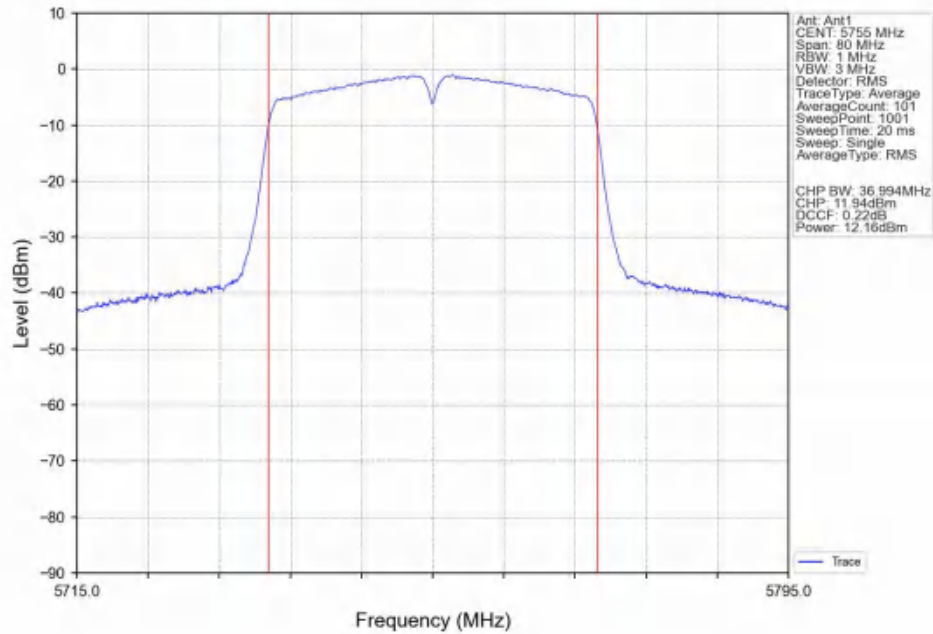


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

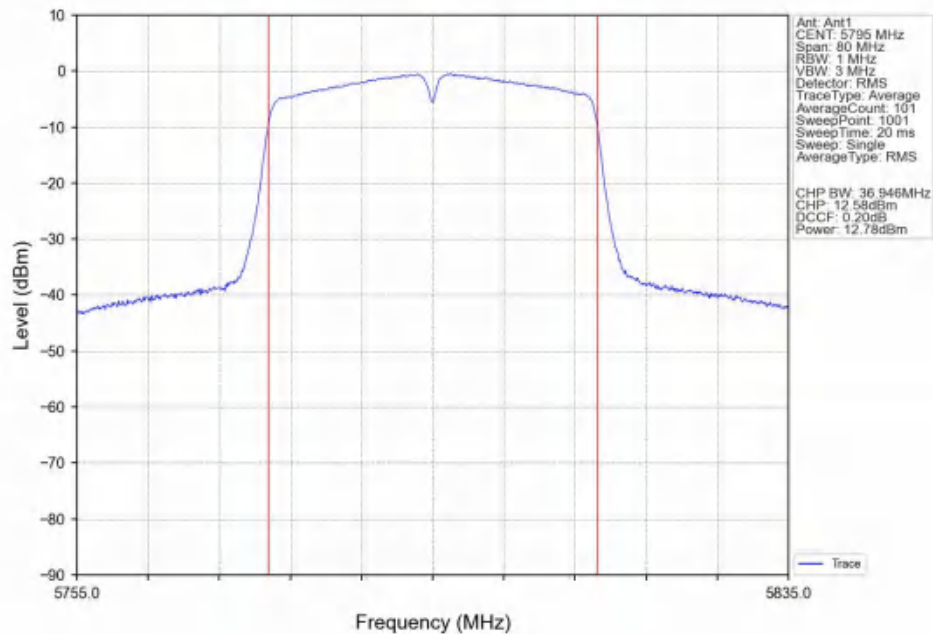

802.11ac(VHT80)_MCH_5210MHz_Ant1_NTNV

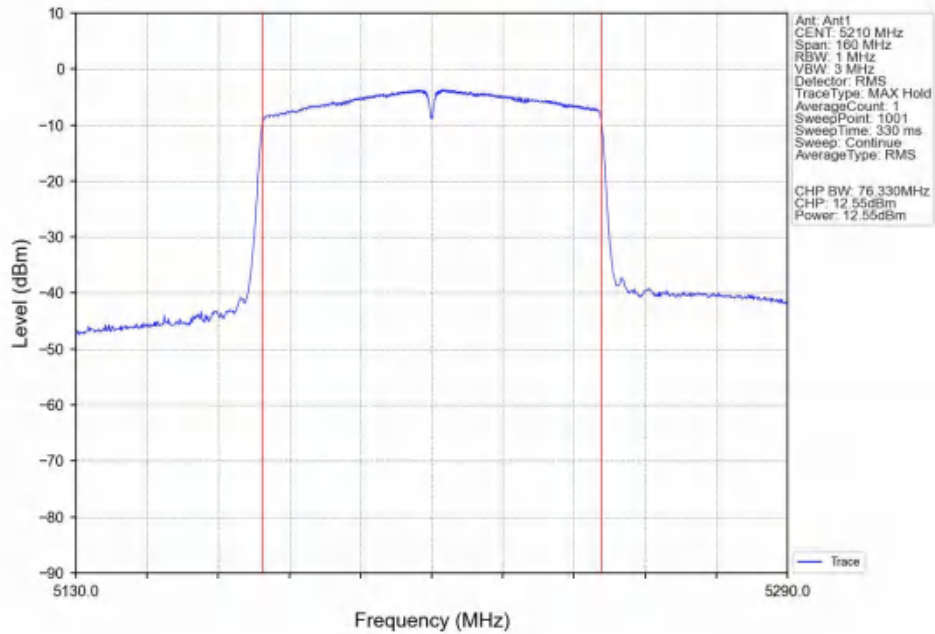

802.11ac(VHT80)_MCH_5775MHz_Ant1_NTNV

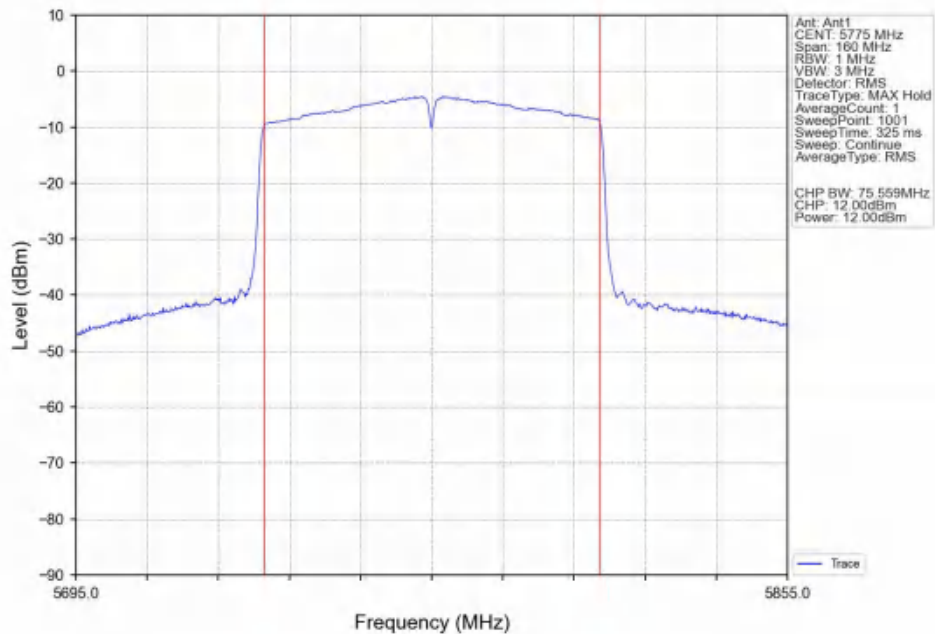

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/MHz)		Verdict
			ANT1	Limit	
802.11a	SISO	5180	2.11	<=11	Pass
		5200	2.89	<=11	Pass
		5240	3.44	<=11	Pass
802.11n (HT20)	SISO	5180	2.58	<=11	Pass
		5200	2.21	<=11	Pass
		5240	2.61	<=11	Pass
802.11n (HT40)	SISO	5190	-0.54	<=11	Pass
		5230	-0.32	<=11	Pass
802.11ac (VHT20)	SISO	5180	2.07	<=11	Pass
		5200	2.25	<=11	Pass
		5240	2.64	<=11	Pass
802.11ac (VHT40)	SISO	5190	-0.63	<=11	Pass
		5230	-0.31	<=11	Pass
802.11ac (VHT80)	SISO	5210	-3.62	<=11	Pass

Note1: Antenna Gain: Ant1: -0.07dBi;


4.1.2 PSD-Band3

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/500kHz)		Verdict
			ANT1	Limit	
802.11a	SISO	5745	0.12	<=30	Pass
		5785	0.20	<=30	Pass
		5825	0.91	<=30	Pass
802.11n (HT20)	SISO	5745	-0.61	<=30	Pass
		5785	-0.24	<=30	Pass
		5825	0.40	<=30	Pass
802.11n (HT40)	SISO	5755	-3.51	<=30	Pass
		5795	-2.76	<=30	Pass
802.11ac (VHT20)	SISO	5745	-0.80	<=30	Pass
		5785	0.03	<=30	Pass
		5825	0.46	<=30	Pass
802.11ac (VHT40)	SISO	5755	-3.45	<=30	Pass
		5795	-2.88	<=30	Pass
802.11ac (VHT80)	SISO	5775	-7.12	<=30	Pass


Note1: Antenna Gain: Ant1: 0.03dBi;

4.2 Test Graph


4.2.1 PSD

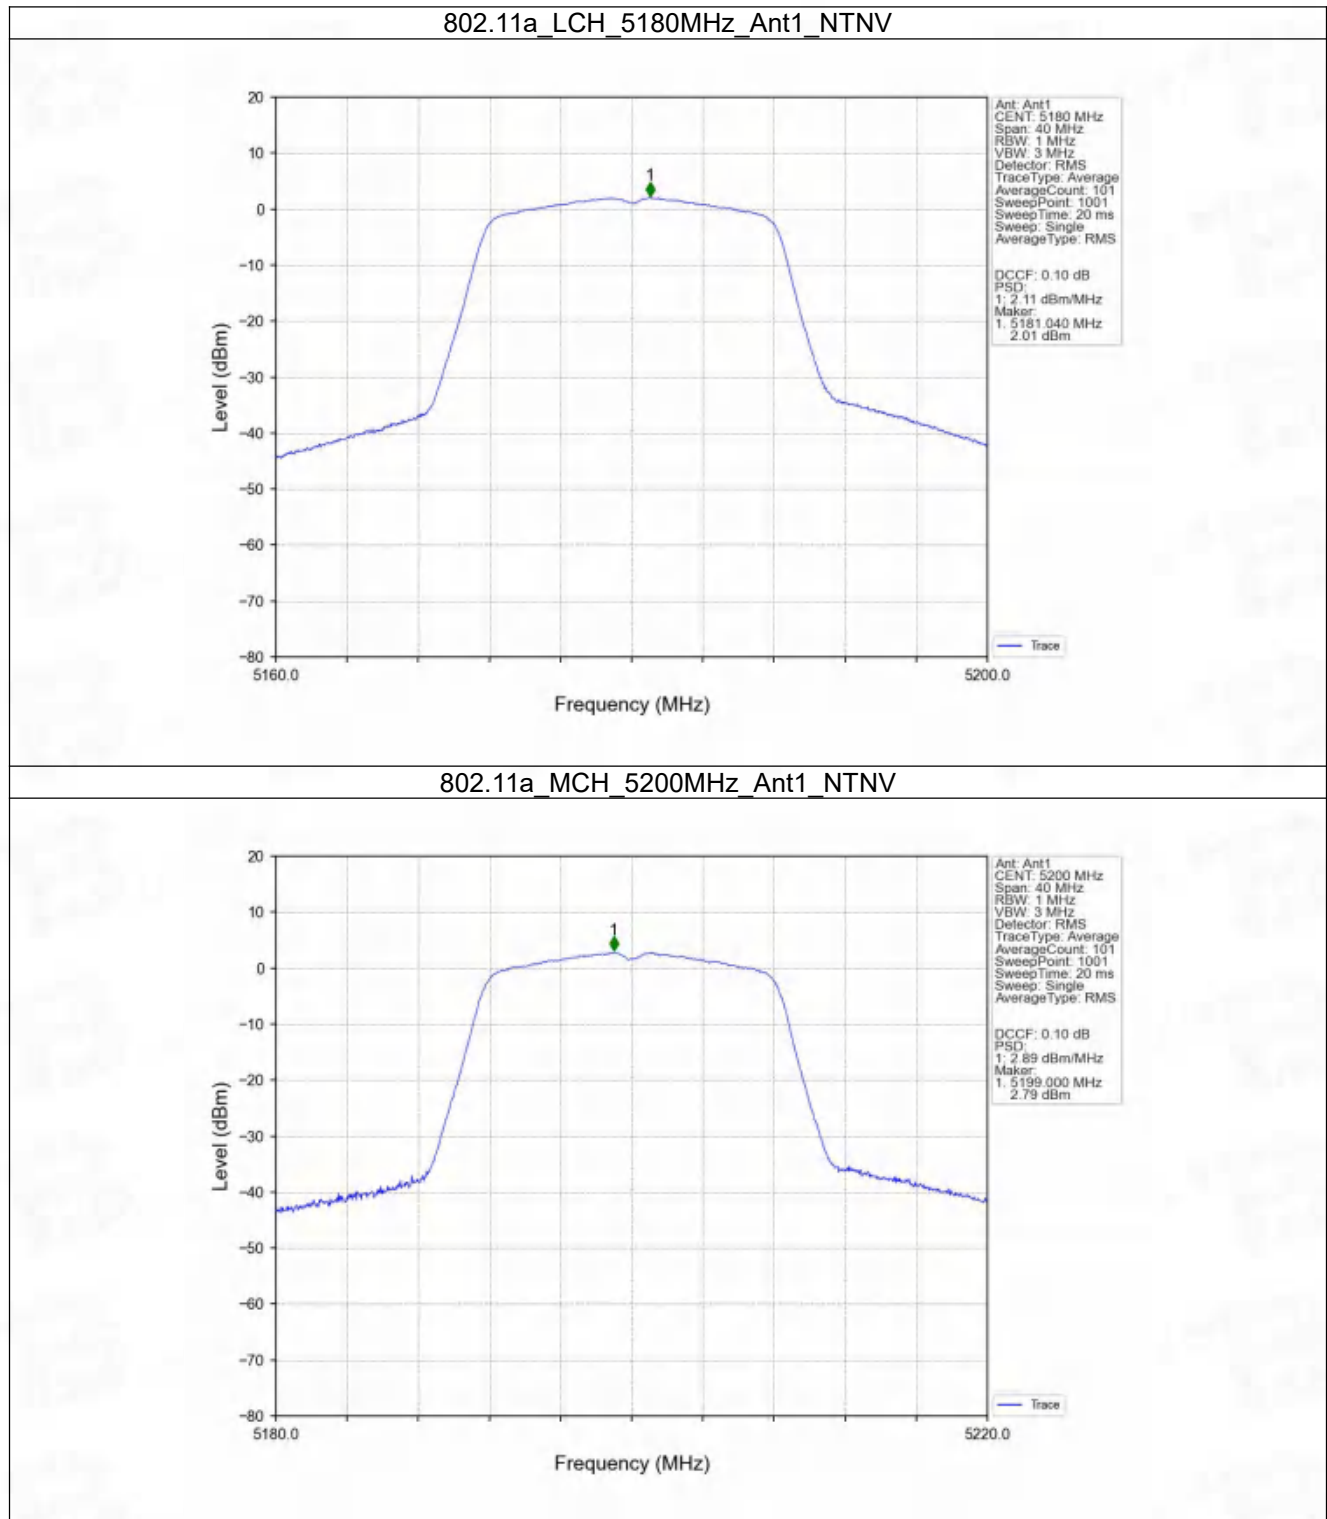


802.11a_HCH_5240MHz_Ant1_NTNV

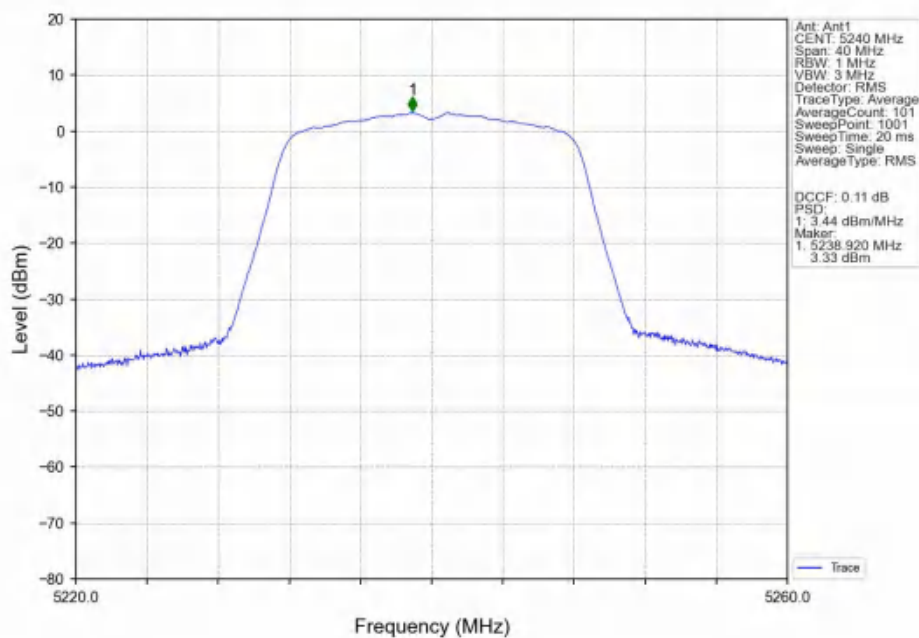


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

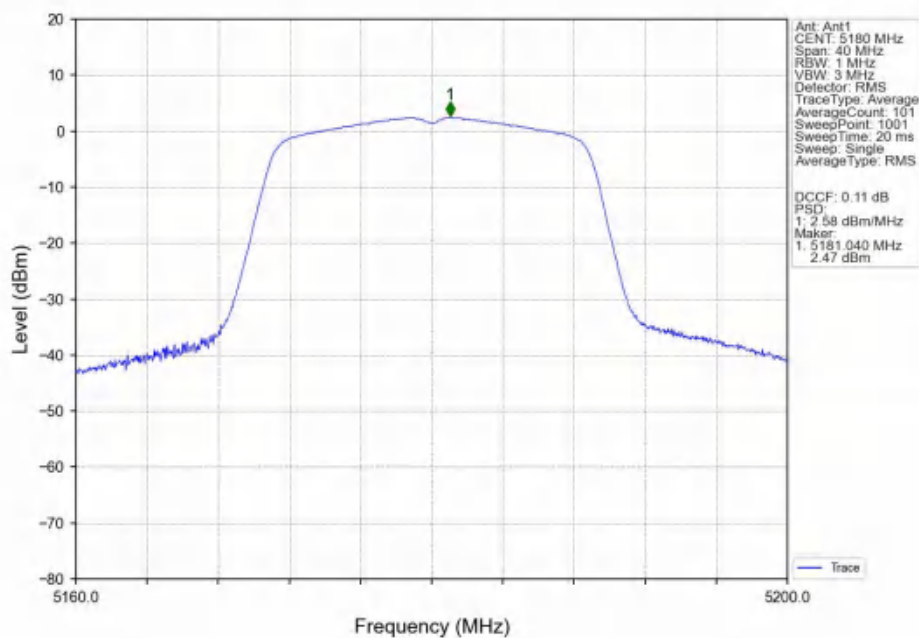


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

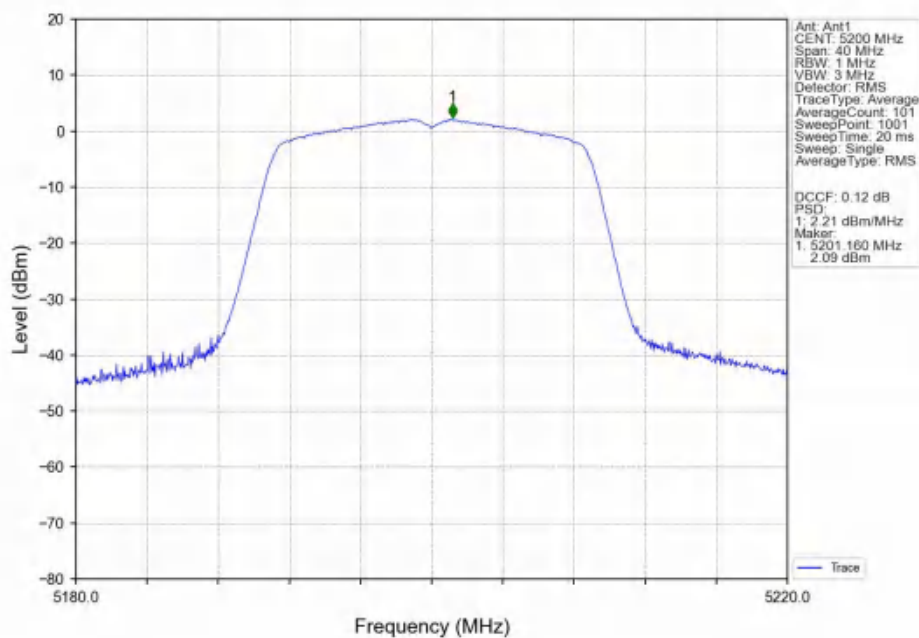


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

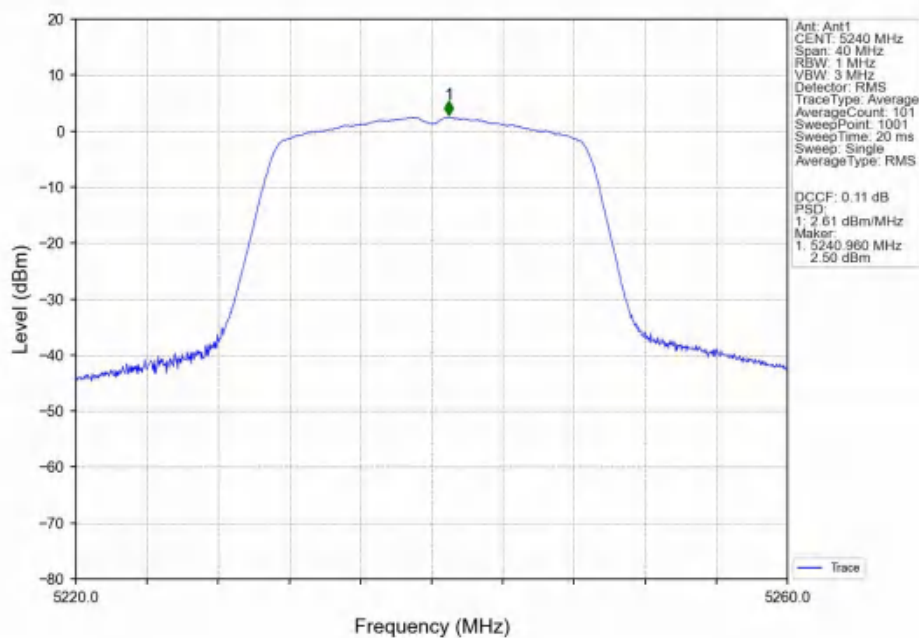


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

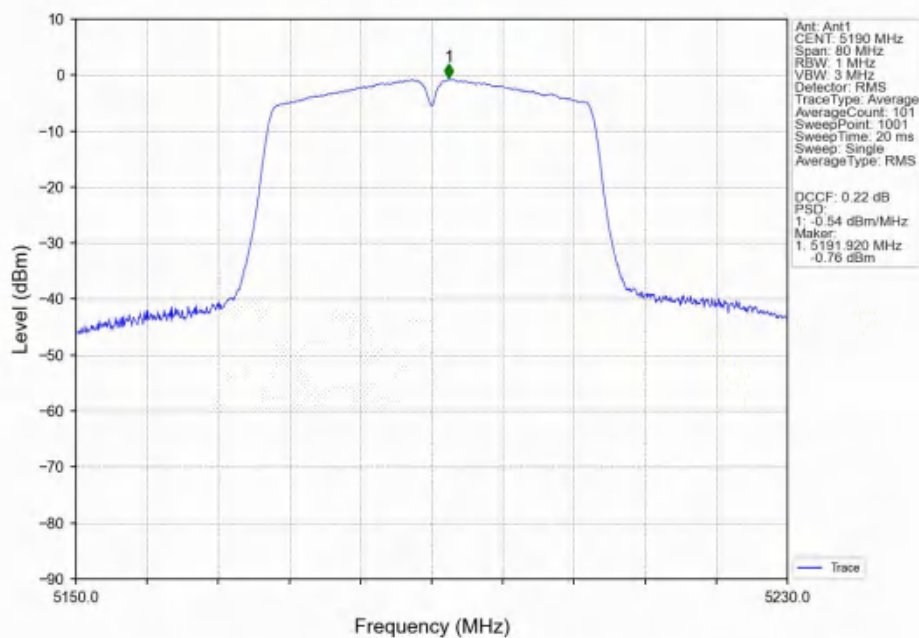


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

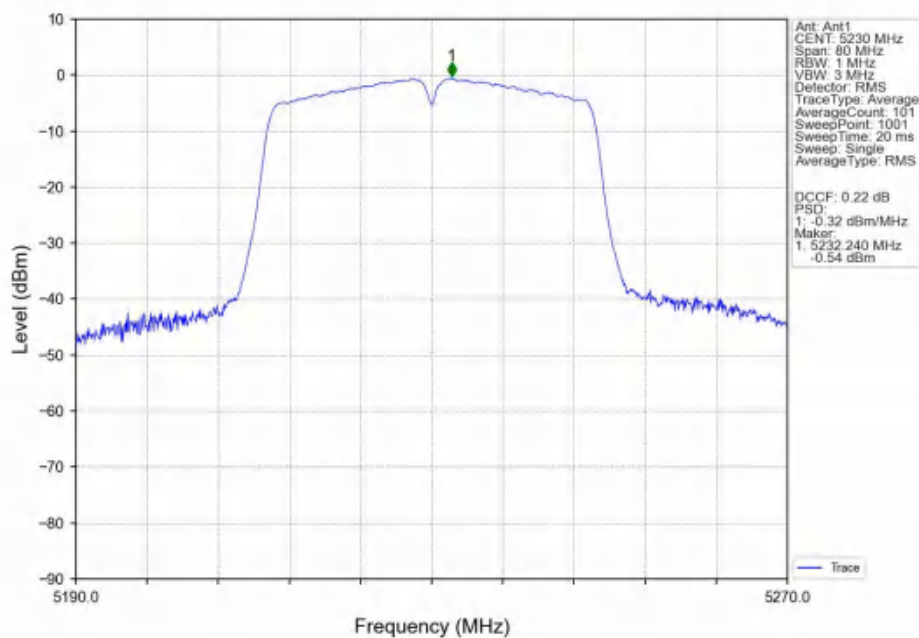


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

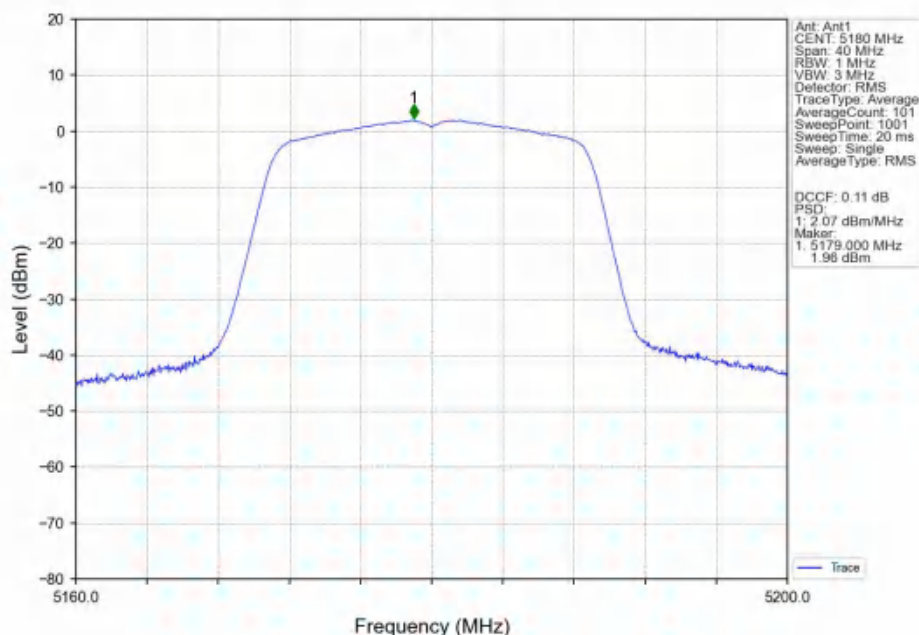


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

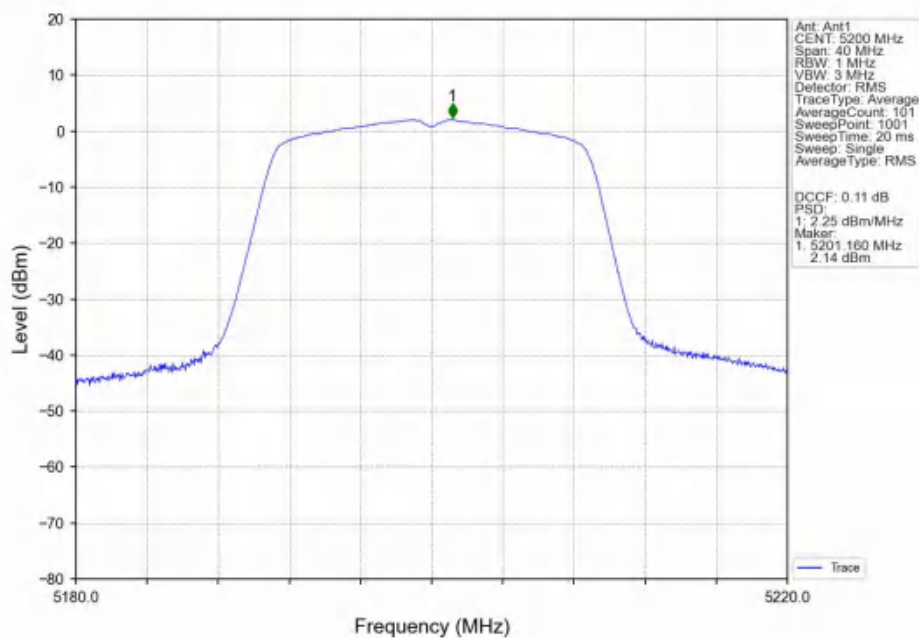


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

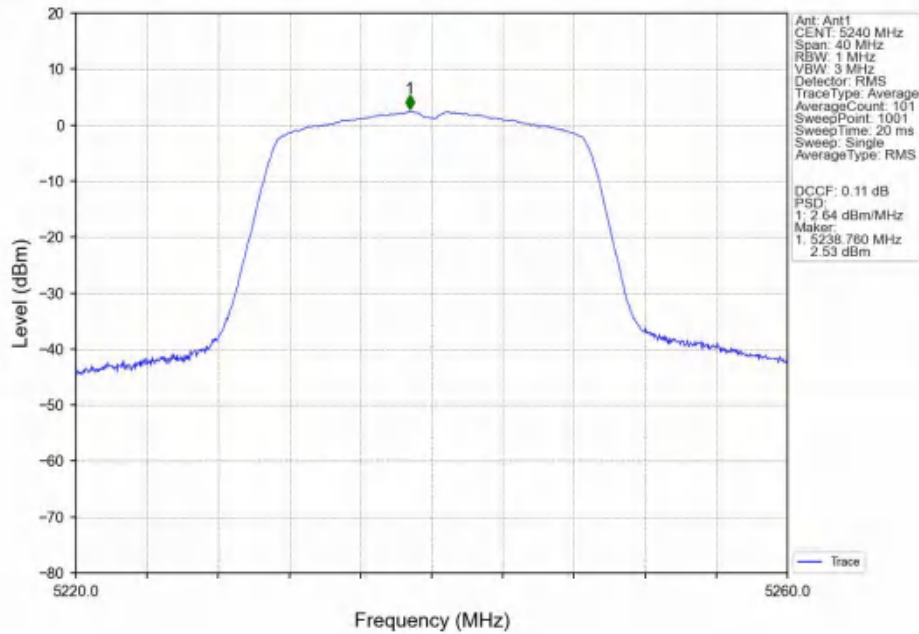


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

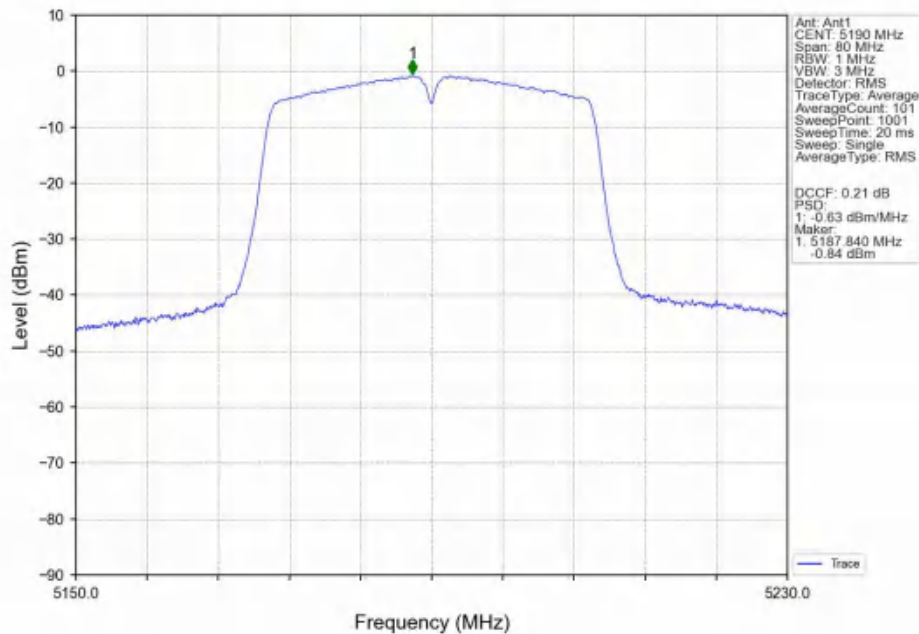


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

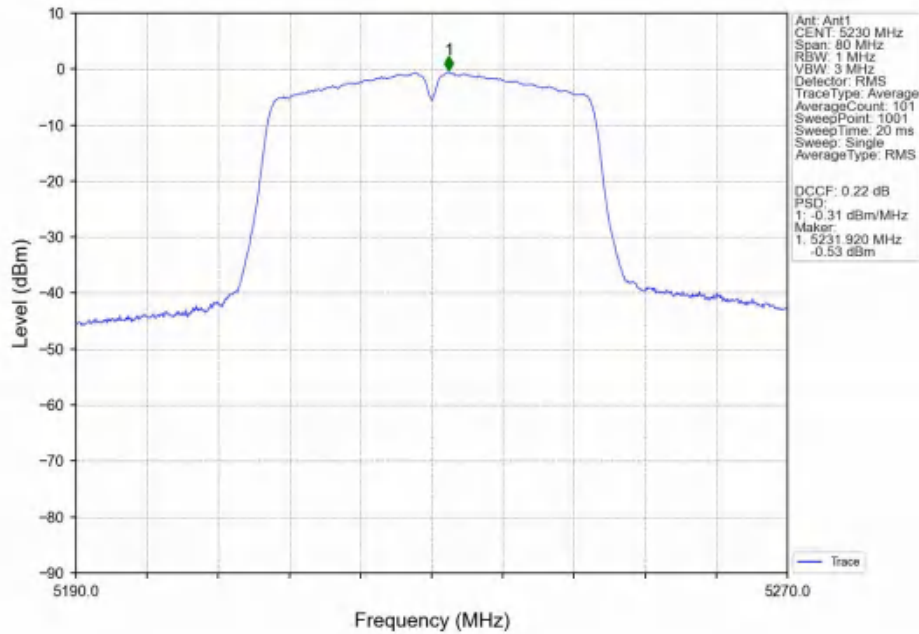


802.11ac(VHT80)_MCH_5210MHz_Ant1_NTNV

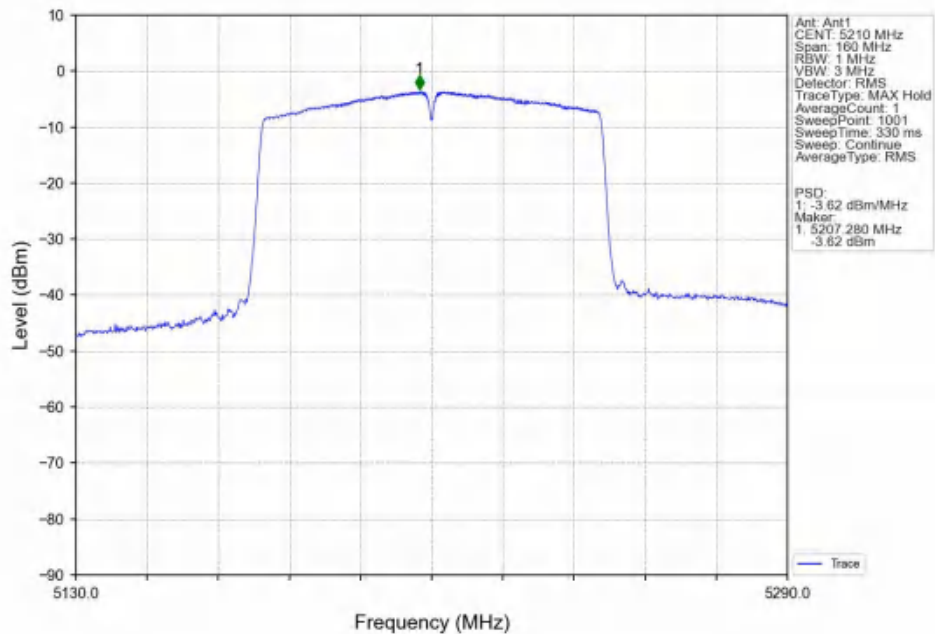


4.2.2 PSD-Band3

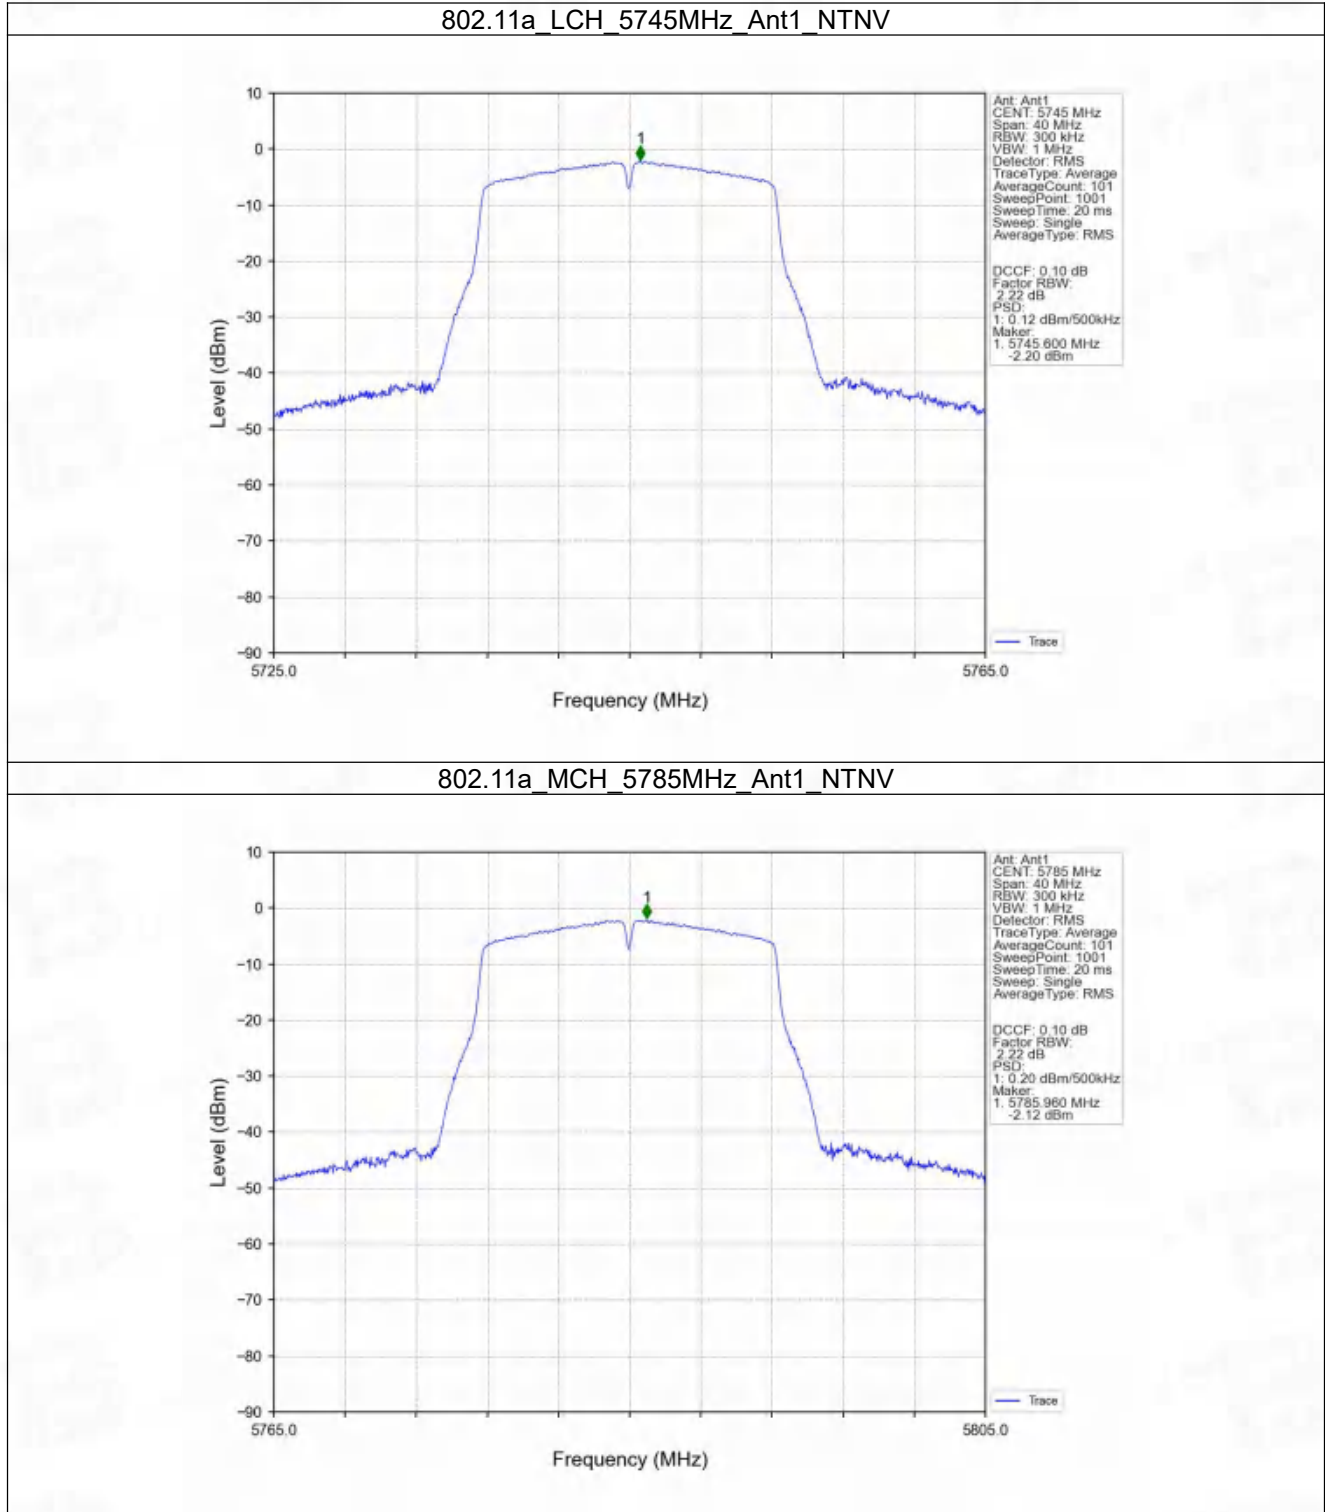


802.11a_HCH_5825MHz_Ant1_NTNV

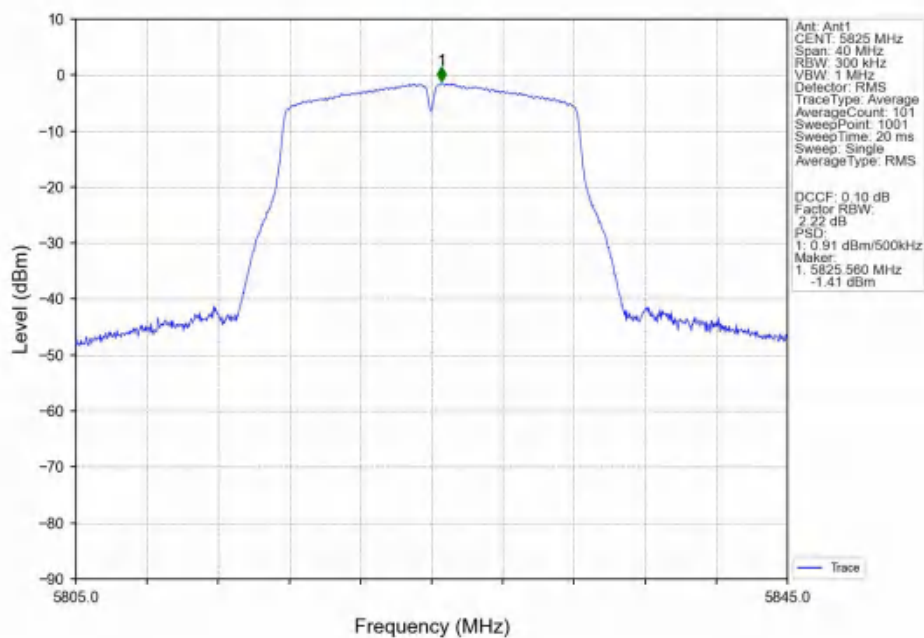


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

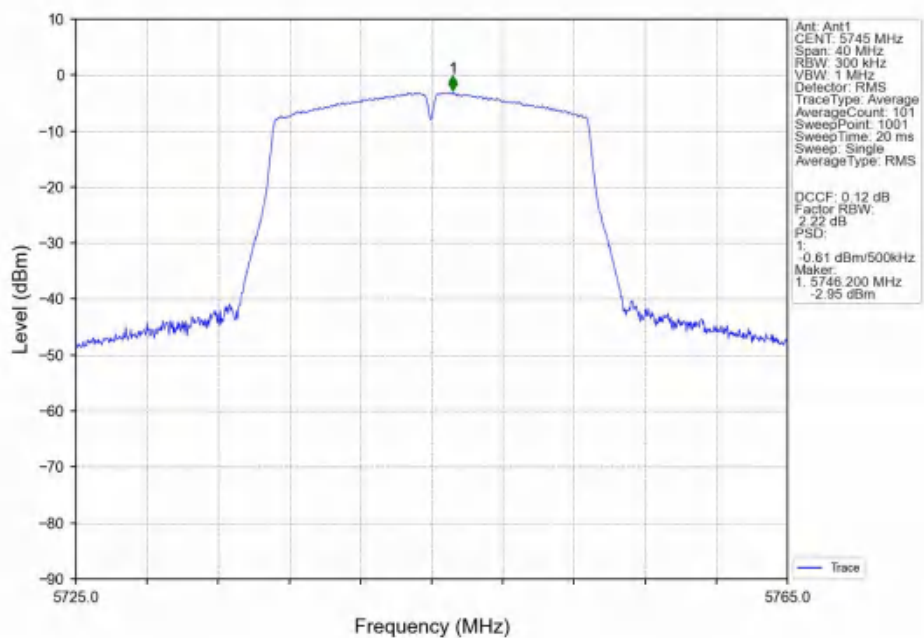


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

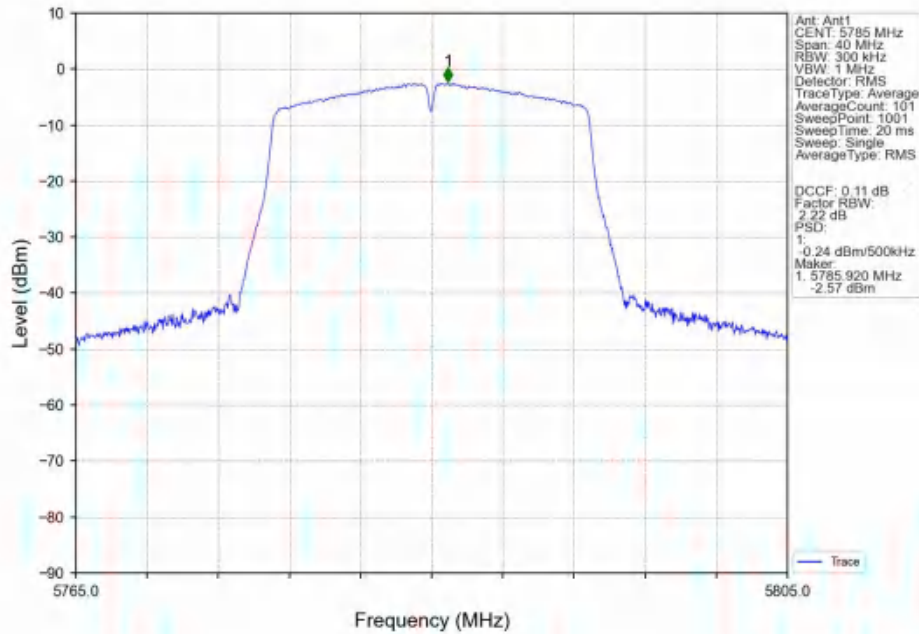


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

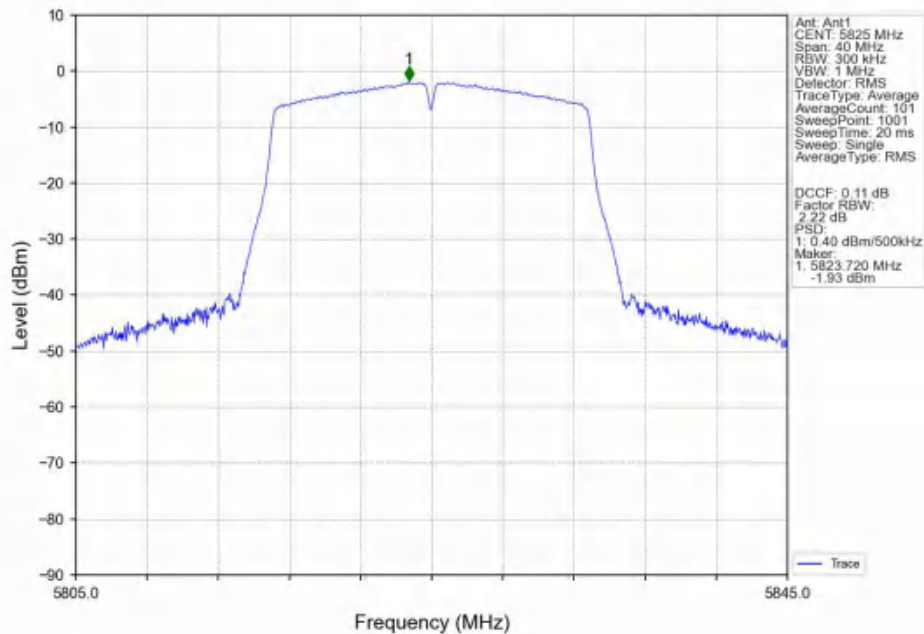


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

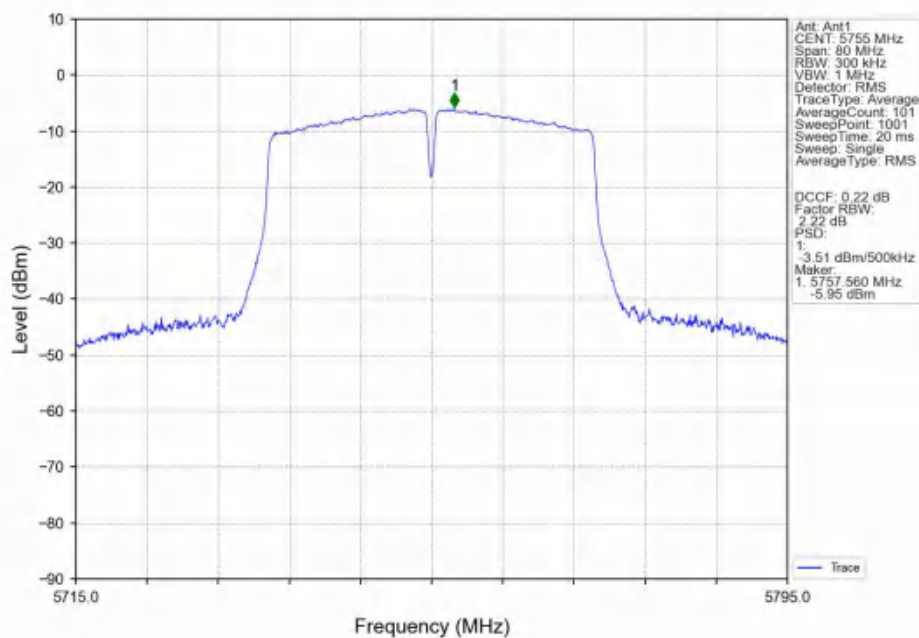


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

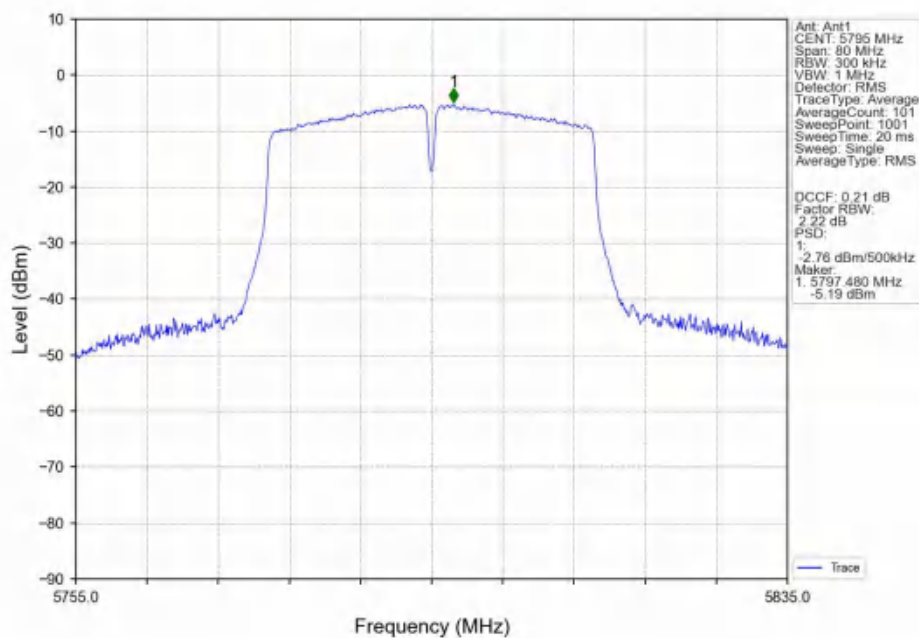


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

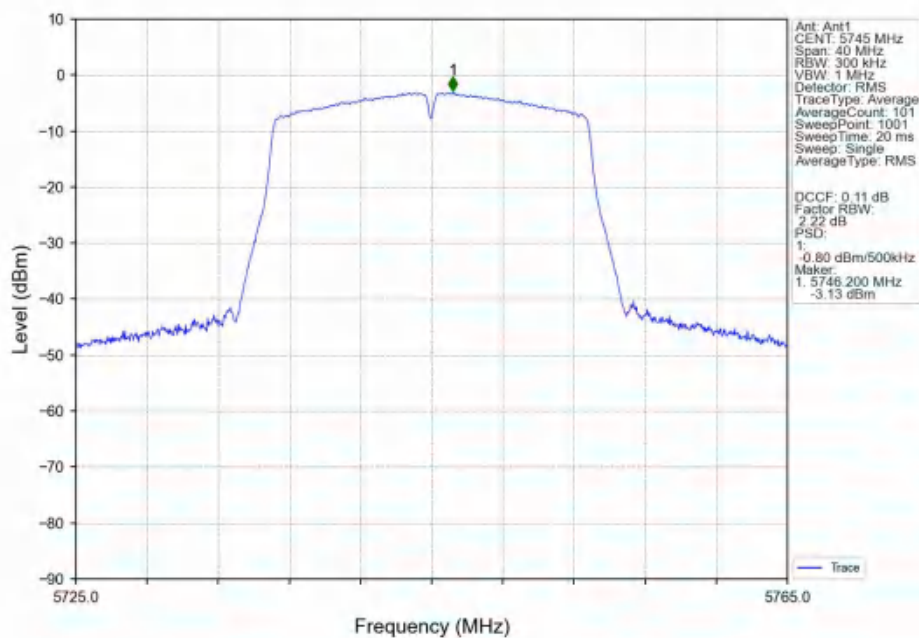


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

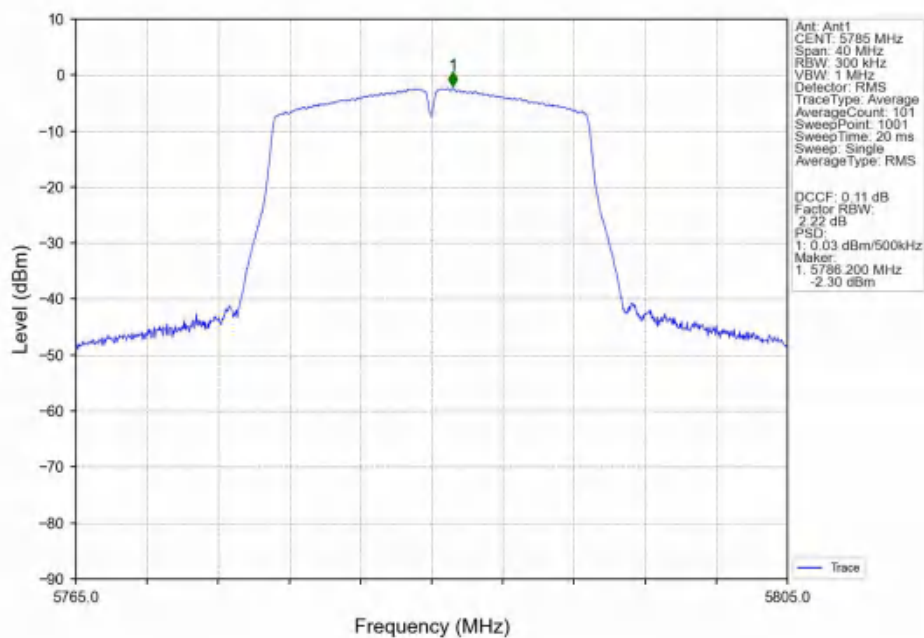


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

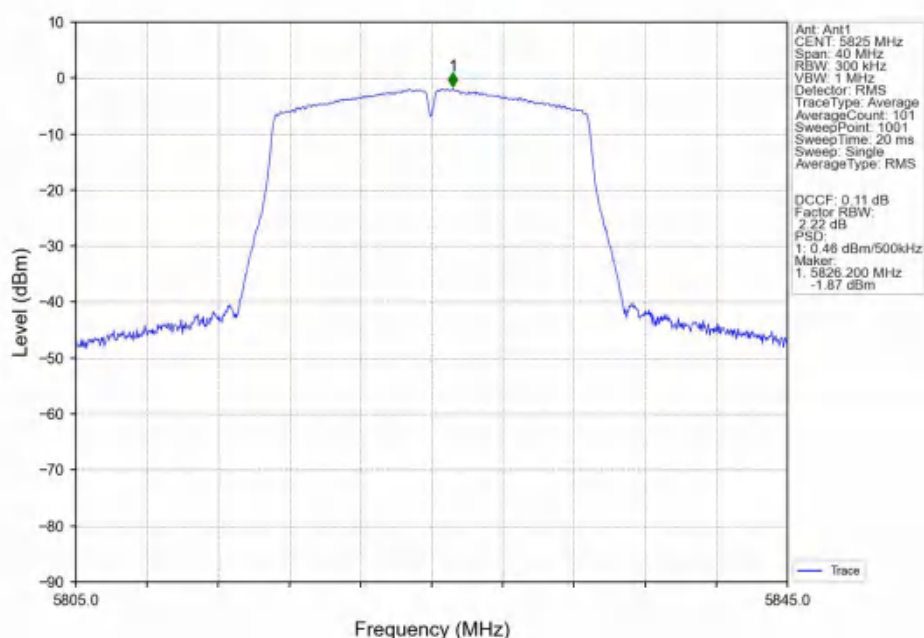


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

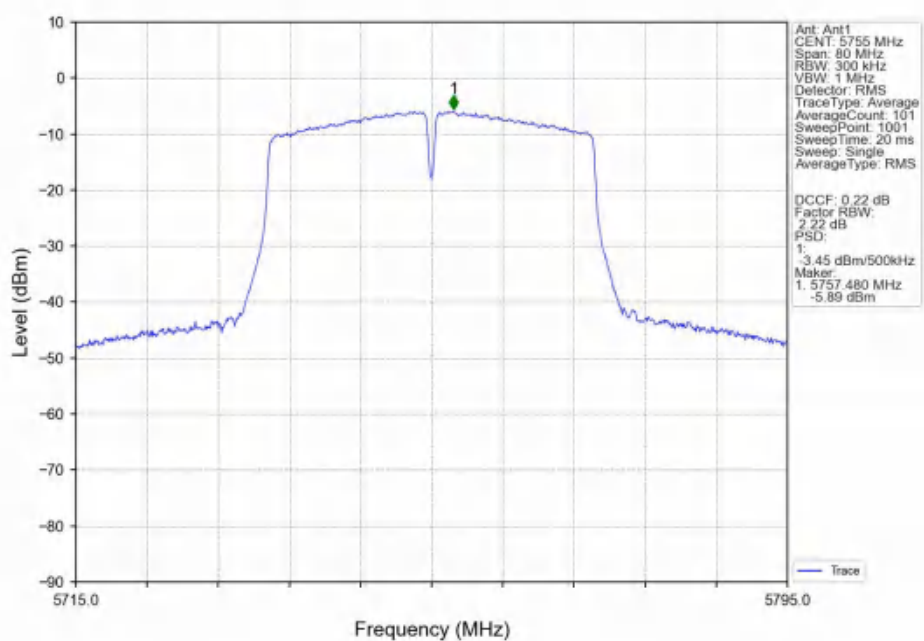

802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

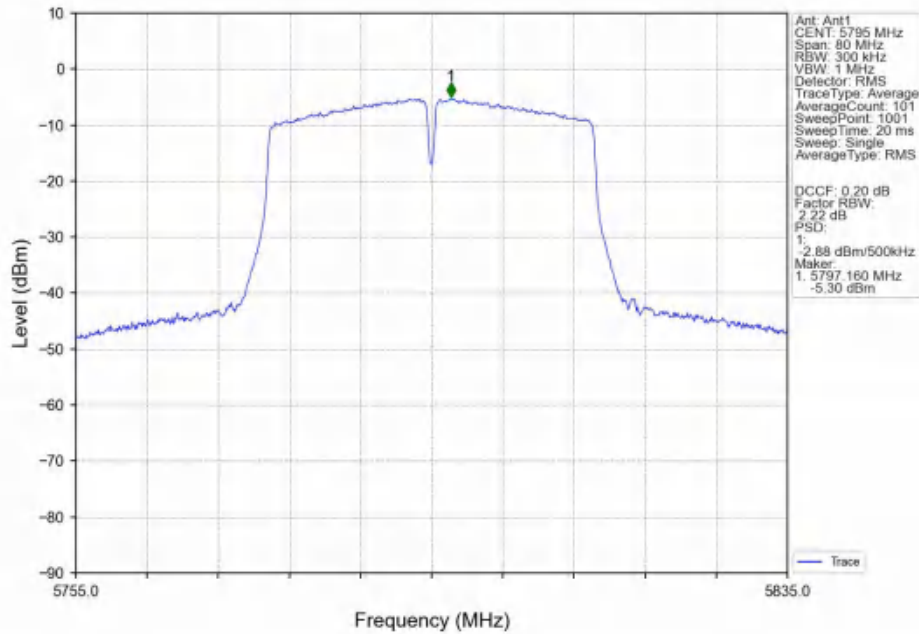

802.11ac(VHT80)_MCH_5775MHz_Ant1_NTNV

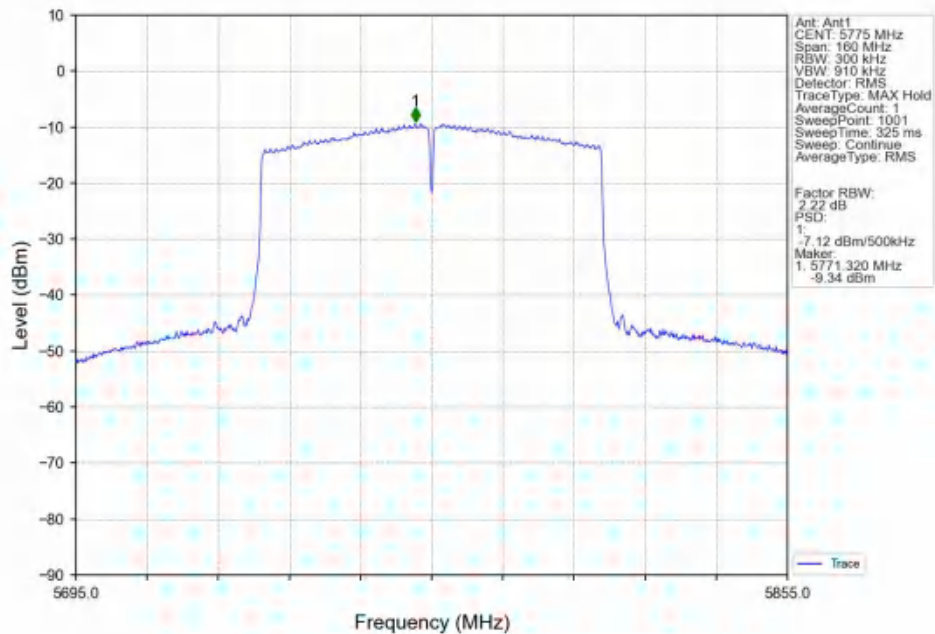

5. Frequency Stability

5.1 Test Result

5.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
Carrier Wave	SISO	5180	20	102	5180.228	5150 to 5250	Pass
				120	5180.350	5150 to 5250	Pass
				138	5180.229	5150 to 5250	Pass
			-30	120	5180.223	5150 to 5250	Pass
			-20	120	5180.275	5150 to 5250	Pass
			-10	120	5179.729	5150 to 5250	Pass
			0	120	5179.727	5150 to 5250	Pass
			10	120	5179.724	5150 to 5250	Pass
			30	120	5179.650	5150 to 5250	Pass
			40	120	5180.350	5150 to 5250	Pass
			50	120	5180.224	5150 to 5250	Pass
		5200	20	102	5199.662	5150 to 5250	Pass
				120	5200.225	5150 to 5250	Pass
				138	5199.651	5150 to 5250	Pass
			-30	120	5200.239	5150 to 5250	Pass
			-20	120	5199.718	5150 to 5250	Pass
			-10	120	5200.243	5150 to 5250	Pass
			0	120	5199.677	5150 to 5250	Pass
			10	120	5199.721	5150 to 5250	Pass
			30	120	5200.260	5150 to 5250	Pass
			40	120	5200.351	5150 to 5250	Pass
			50	120	5199.598	5150 to 5250	Pass
		5240	20	102	5239.725	5150 to 5250	Pass
				120	5240.224	5150 to 5250	Pass
				138	5240.225	5150 to 5250	Pass
			-30	120	5239.719	5150 to 5250	Pass
			-20	120	5240.350	5150 to 5250	Pass
			-10	120	5239.682	5150 to 5250	Pass
			0	120	5239.651	5150 to 5250	Pass
			10	120	5239.721	5150 to 5250	Pass
			30	120	5240.270	5150 to 5250	Pass
			40	120	5239.676	5150 to 5250	Pass
			50	120	5240.345	5150 to 5250	Pass
		5745	20	102	5744.717	5725 to 5850	Pass
				120	5745.224	5725 to 5850	Pass
				138	5745.344	5725 to 5850	Pass
			-30	120	5744.591	5725 to 5850	Pass
			-20	120	5744.595	5725 to 5850	Pass
			-10	120	5744.610	5725 to 5850	Pass
			0	120	5745.282	5725 to 5850	Pass
			10	120	5744.713	5725 to 5850	Pass

			30	120	5745.341	5725 to 5850	Pass
			40	120	5745.343	5725 to 5850	Pass
			50	120	5745.219	5725 to 5850	Pass
		5785	20	102	5784.714	5725 to 5850	Pass
				120	5785.288	5725 to 5850	Pass
				138	5785.306	5725 to 5850	Pass
			-30	120	5785.343	5725 to 5850	Pass
			-20	120	5784.718	5725 to 5850	Pass
			-10	120	5785.266	5725 to 5850	Pass
			0	120	5785.342	5725 to 5850	Pass
			10	120	5785.348	5725 to 5850	Pass
			30	120	5784.719	5725 to 5850	Pass
			40	120	5785.216	5725 to 5850	Pass
			50	120	5784.676	5725 to 5850	Pass
		5825	20	102	5825.218	5725 to 5850	Pass
				120	5825.216	5725 to 5850	Pass
				138	5824.720	5725 to 5850	Pass
			-30	120	5825.344	5725 to 5850	Pass
			-20	120	5824.718	5725 to 5850	Pass
			-10	120	5824.715	5725 to 5850	Pass
			0	120	5824.718	5725 to 5850	Pass
			10	120	5824.629	5725 to 5850	Pass
			30	120	5825.343	5725 to 5850	Pass
			40	120	5825.267	5725 to 5850	Pass
			50	120	5824.644	5725 to 5850	Pass
		5190	20	102	5190.495	5150 to 5250	Pass
				120	5190.480	5150 to 5250	Pass
				138	5190.485	5150 to 5250	Pass
			-30	120	5190.487	5150 to 5250	Pass
			-20	120	5190.494	5150 to 5250	Pass
			-10	120	5190.492	5150 to 5250	Pass
			0	120	5190.499	5150 to 5250	Pass
			10	120	5190.474	5150 to 5250	Pass
			30	120	5190.500	5150 to 5250	Pass
			40	120	5190.489	5150 to 5250	Pass
			50	120	5190.500	5150 to 5250	Pass
		5230	20	102	5229.972	5150 to 5250	Pass
				120	5229.972	5150 to 5250	Pass
				138	5229.972	5150 to 5250	Pass
			-30	120	5229.972	5150 to 5250	Pass
			-20	120	5229.973	5150 to 5250	Pass
			-10	120	5229.973	5150 to 5250	Pass
			0	120	5229.973	5150 to 5250	Pass
			10	120	5229.974	5150 to 5250	Pass
			30	120	5229.974	5150 to 5250	Pass
			40	120	5229.974	5150 to 5250	Pass
			50	120	5229.974	5150 to 5250	Pass
		5755	20	102	5754.969	5725 to 5850	Pass
				120	5754.970	5725 to 5850	Pass
				138	5754.971	5725 to 5850	Pass
			-30	120	5754.971	5725 to 5850	Pass
			-20	120	5754.972	5725 to 5850	Pass
			-10	120	5754.972	5725 to 5850	Pass

			0	120	5754.972	5725 to 5850	Pass
			10	120	5754.972	5725 to 5850	Pass
			30	120	5754.972	5725 to 5850	Pass
			40	120	5754.973	5725 to 5850	Pass
			50	120	5754.973	5725 to 5850	Pass
		5795	20	102	5794.971	5725 to 5850	Pass
				120	5794.972	5725 to 5850	Pass
				138	5794.972	5725 to 5850	Pass
			-30	120	5794.972	5725 to 5850	Pass
			-20	120	5794.972	5725 to 5850	Pass
			-10	120	5794.973	5725 to 5850	Pass
			0	120	5794.973	5725 to 5850	Pass
			10	120	5794.973	5725 to 5850	Pass
			30	120	5794.973	5725 to 5850	Pass
			40	120	5794.973	5725 to 5850	Pass
			50	120	5794.973	5725 to 5850	Pass
		5210	20	102	5209.973	5150 to 5250	Pass
				120	5209.974	5150 to 5250	Pass
				138	5209.974	5150 to 5250	Pass
			-30	120	5209.974	5150 to 5250	Pass
			-20	120	5209.974	5150 to 5250	Pass
			-10	120	5209.974	5150 to 5250	Pass
			0	120	5209.975	5150 to 5250	Pass
			10	120	5209.975	5150 to 5250	Pass
			30	120	5209.975	5150 to 5250	Pass
			40	120	5209.975	5150 to 5250	Pass
			50	120	5209.975	5150 to 5250	Pass
		5775	20	102	5774.970	5725 to 5850	Pass
				120	5775.473	5725 to 5850	Pass
				138	5775.474	5725 to 5850	Pass
			-30	120	5775.471	5725 to 5850	Pass
			-20	120	5775.499	5725 to 5850	Pass
			-10	120	5775.487	5725 to 5850	Pass
			0	120	5775.480	5725 to 5850	Pass
			10	120	5775.475	5725 to 5850	Pass
			30	120	5775.468	5725 to 5850	Pass
			40	120	5775.471	5725 to 5850	Pass
			50	120	5775.472	5725 to 5850	Pass

6. Form731

6.1 Test Result

6.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
5180	5240	0.0210	13.23
5745	5825	0.0213	13.28
5190	5230	0.0183	12.63
5755	5795	0.0190	12.78
5210	5210	0.0180	12.55



Test Report Number: BTF230913R00704



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --