



FCC COMPLIANCE TEST REPORT

Technical Statement of Conformity
in accordance with 47 CFR Part 15 Subpart C

The product

Equipment Under Test	: Bluetooth Panic Button
Model Number	: BT-PANIC-BUTTON
Product Series	: N/A
Report Number	: HA181049-RA
Issue Date	: 07-Nov-2018
Test Result	: Compliance

is produced by
ZONITH A/S

Gammel Kongevej 39E DK-1610 Copenhagen V Denmark



HongAn TECHNOLOGY CO., LTD.

NO.15-1, CWEISHUH KENG, CWEIPIN VILLAGE,
LINKOU, TAIPEI COUNTY,
TAIWAN, R. O. C.

TEL: +886-2-26030362

FAX: +886-2-26019259

E-mail: hatlab@ms19.hinet.net

BSMI Registration No.: SL2-IN-E-0023, SL2-A1-E-0023,
SL2-IS-E-0023, SL2-R1-E-0023,
SL2-R2-E-0023, SL2-L1-E-0023

FCC Designation No.: TW1071, TW1163

TAF Accreditation No.: 1163

VCCI Registration No.: R-2156, C-2329, T-219

Contents

1	General Description	6
1.1	Description of EUT	6
1.2	Test Instruments	7
1.3	Auxiliary Equipments	8
1.4	EUT SETUP	8
1.5	Identifying the Final Test Mode	8
1.6	Final Test Mode	9
1.7	Condition of Power Supply	9
1.8	EUT Configuration	9
1.9	Test Methodology	9
1.10	General Test Procedures	9
1.11	Modification	9
1.12	FCC Part 15.205 restricted bands of operations	10
1.13	Qualification of Test Facility	11
2	Power line Conducted Emission Measurement	12
2.1	Test Instruments	12
2.2	Test Arrangement and Procedure	12
2.3	Limit (§ 15.207)	12
2.4	Test Result	12
3	Radiated Emission Test	13
3.1	Test Instruments	13
3.2	Test Arrangement and Procedure	13
3.3	Limit (§ 15.205 & § 15.209)	14
3.4	Test Result	15
4	6 dB Bandwidth of the Emission	24
4.1	Test Instruments	24
4.2	Test Arrangement	24
4.3	Test Procedure	24
4.4	Limit (§ 15.247(a)(2))	24
4.5	Test Result	24
5	Maximum Conducted Output Power	28
5.1	Test Instruments	28
5.2	Test Arrangement and Procedure	28
5.3	Limit (§ 15.247(b))	28
5.4	Test Result	28



6	Out of Band Emission Test	33
6.1	Test Instruments	33
6.2	Test Arrangement	33
6.3	Test Procedure	33
6.4	Limit (§ 15.247(d))	33
6.5	Test Result	33
7	Power Spectral Density	40
7.1	Test Instruments	40
7.2	Test Arrangement	40
7.3	Test Procedure	40
7.4	Limit (§ 15.247(e))	40
7.5	Test Result	40
8	Antenna requirement	45
8.1	Limit (§ 15.203)	45
8.2	Test Result	45
9	Photographs of the Tests	46
9.1	Radiated Disturbances Emission Test	46
10	Photographs of the EUT	47



Test Result Certification

Applicant	: ZONITH A/S
Address of Applicant	: Gammel Kongevej 39E DK-1610 Copenhagen V Denmark
Manufacturer	: Mobility Sound Technology Ltd.
Address of Manufacturer	: 5F, No. 100, Jian 1 st Road, ZhongHe Dist., New Taipei City #235, Taiwan
Trade Name	: ZONITH A/S
Equipment Under Test	: Bluetooth Panic Button
Model Number	: BT-PANIC-BUTTON
Product Series	: N/A
FCC ID	: 2AJ8P-BT-PANIC-BT
Filing Type	: Certification
Sample Received Date	: 12-Oct-2018
Test Standard	:

☒ FCC Part 15 Subpart C §15.247

Deviations from standard test methods & any other specifications : NONE

Remark:

1. This report details the results of the test carried out on one sample.
2. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in both ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.203, 15.207, 15.209, 15.247.
3. This report applies to the above sample only and shall not be reproduced in part without written approval of HongAn Technology Co., Ltd.
4. Test Location: HongAn Technology Co., Ltd., No.15-1 Cweishuh Keng, Cweipin Village, Linkou Dist., New Taipei City, Taiwan, R.O.C. FCC Designation No.: TW1071, TW1163.

Documented by:**Kay Wang/ ADM. Dept Staff****2018-11-06****Tested by:****Eason Hsieh / ENG. Dept. Staff****2018-10-30****Approved by:****Peter Chin / Section Manager****Date: 2018-11-07**



Summary of Test Result

	Test Item	Applicable Standard	Test Result
1	Conducted limits	FCC part 15 subpart C §207	Compliance
2	Radiated emission limits	FCC part 15 subpart C §209	Compliance
3	6dB Bandwidth	FCC part 15 subpart C §247(a)(2)	Compliance
4	Maximum Conducted Output Power	FCC part 15 subpart C §247(b)(3)	Compliance
5	Out of Band Emission	FCC part 15 subpart C §247(d)	Compliance
6	Power Spectral Density	FCC part 15 subpart C §247(e)	Compliance
7	Antenna Requirement	FCC part 15 subpart C §203	Compliance

1 General Description

1.1 Description of EUT

Equipment Under Test	:	Bluetooth Panic Button								
Model Number of EUT	:	BT-PANIC-BUTTON								
Product Series	:	N/A								
Power Supply	:	Lithium Battery (CR 2477T) x 3 DC 3 V								
Frequency Range	:	2402~2480 MHz								
Number of Channels	:	40 Channels								
Carrier Frequency of Each Channel	:	00	2402	10	2422	20	2442	30	2462	
		01	2404	11	2424	21	2444	31	2464	
		02	2406	12	2426	22	2446	32	2466	
		03	2408	13	2428	23	2448	33	2468	
		04	2410	14	2430	24	2450	34	2470	
		05	2412	15	2432	25	2452	35	2472	
		06	2414	16	2434	26	2454	36	2474	
		07	2416	17	2436	27	2456	37	2476	
		08	2418	18	2438	28	2458	38	2478	
		09	2420	19	2440	29	2460	39	2480	
Antenna Specification	:	Chip Antenna/ Gain: 1.3 dBi								
Modulation Technique	:	GFSK								
Transmit Data Rate	:	1 Mbps								
Specification	:	Dimensions : 9 cm (L) X 6.7 cm (W) X 1.9 cm (H) Weight : 95 g Intended Function : The EUT is a Bluetooth Panic Button, which will sent out SOS message for emergency status .								

1.2 Test Instruments

Instrument Name	Manufacturer Mode	Model Number	Serial Number	Last Cal. Date	Next Cal. Date
RF Amplifier	Schaffner	CPA9231A	0405	24-Aug-2018	23-Aug-2019
EMI Receiver	R&S	ESCI	100931	09-Aug-2018	08-Aug-2019
Spectrum Analyzer	R&S	FSV	101629	16-Jan-2018	15-Jan-2019
Preamplifier	HD	HD17187	004	21-May-2018	20-May-2019
Bilog Antenna	TESEQ	CBL6111D	38521	03-Oct-2018	02-Oct-2019
Double-Ridged Waveguide Horn	EMCO	3115	9912-5992	23-May-2018	22-May-2019
Horn Antenna (18-40GHz)	Com -Power	AH-840	101042	22-May-2018	21-May-2019
Microwave Preamplifier	Com -Power	PAM-840	461269	21-May-2018	20-May-2019
LISN	Rolf Heine Hochfrequenztechnik	NNB-4/32T	00001	01-Mar-2018	28-Feb-2019
Active Loop Antenna	EMCO	6502	9202-2717	27-Aug-2018	26-Aug-2019
Coaxial Cable	n/a	8D-FB	HA2-10MSI TE-01	24-Aug-2018	23-Aug-2019
Microflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3368/2	21-May-2018	20-May-2019
Microflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3367/2	22-May-2018	21-May-2019
Coaxial Cable	n/a	RG 223/U	HA2-CE-01	24-Aug-2018	23-Aug-2019

※ The test equipments used are calibrated and can be traced to National ITRI and International Standards.

1.3 Auxiliary Equipments


1.3.1. Provided by HongAn Technology Co., Ltd. for Test.

No.	Equipment	Model No.	Serial No.	EMC Approved	Brand	Power Cord
01	NoteBook	N61J	N61JV-021A520M	CE,FCC, C-TICK N13219, BSMI R31018	ASUS	N/A

1.3.2. Provided by the Manufacturer

No.	Equipment	Model No.	Serial No.	EMC Approved	Brand	Specification
01	USB Cable	N/A	N/A	N/A	N/A	1m

1.4 EUT SETUP

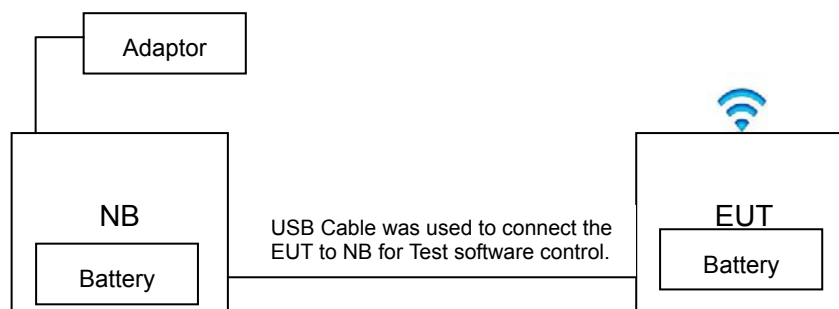

Note: Main Test Sample: BT-PANIC-BUTTON

1.5 Identifying the Final Test Mode

1. Mode 1: TX mode CH 00.
2. Mode 2: TX mode CH 20.
3. Mode 3: TX mode CH 39.

Note:

1. After pre-test, we identified that the TX mode was most likely to cause maximum disturbance and most likely to be susceptible to disturbance. Therefore, the Final Assessment was performed for the worst case.
2. The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements. During the tests, there was no Test Software has been used.
3. Channel Low (2402 MHz), Mid (2442 MHz) and High (2480 MHz) were chosen for full testing.
4. According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.
5. Test Software: AccessPort.exe v1.36; RF parameter: 0 (0-7, 0 is the maximum).



1.6 Final Test Mode

Conducted Emission: Mode 3.

Radiated Emission (30~1000 MHz): Mode 3.

Radiated Emission (1~26.5GHz): All Mode.

1.7 Condition of Power Supply

New Battery (CR 2477T) x 3.

1.8 EUT Configuration

1. Setup the EUT as shown in Sec.1.4 Block Diagram.
2. Turn on the power of all equipments.
3. Activate the selected Final Test Mode.

1.9 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10 (2013) and FCC CFR 47 15.203, 15.207, 15.209 and 15.247.

1.10 General Test Procedures

Conducted Emissions

The EUT is set according to the requirements in Section 6.2 of ANSI C63.10 (2013).

Radiated Emissions

The EUT is set according to the requirements in Section 6.3 of ANSI C63.10 (2013).

1.11 Modification

N/A

1.12 FCC Part 15.205 restricted bands of operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37635-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



1.13 Qualification of Test Facility

Name of Test Facility : HongAn Technology
Address of Test Facility : No. 15-1, Cweishuh Keng, Cweipin Village, Linkou, New Taipei City,
Taiwan, R.O.C
FCC Designation No. : TW1071, TW1163
TAF Accreditation No. : 1163

2 Power line Conducted Emission Measurement

2.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

2.2 Test Arrangement and Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

2.3 Limit (§ 15.207)

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency (MHz)	Limits (dBuV)	
	Q.P. (Quasi-Peak)	A.V. (Average)
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

2.4 Test Result

N/A



The EUT uses three Lithium batteries as its power source.

3 Radiated Emission Test

3.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

3.2 Test Arrangement and Procedure

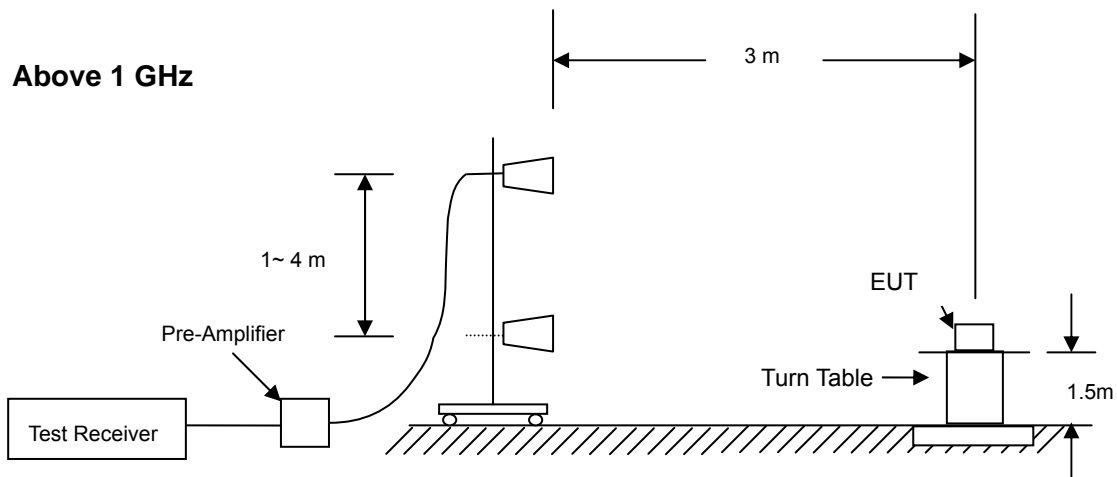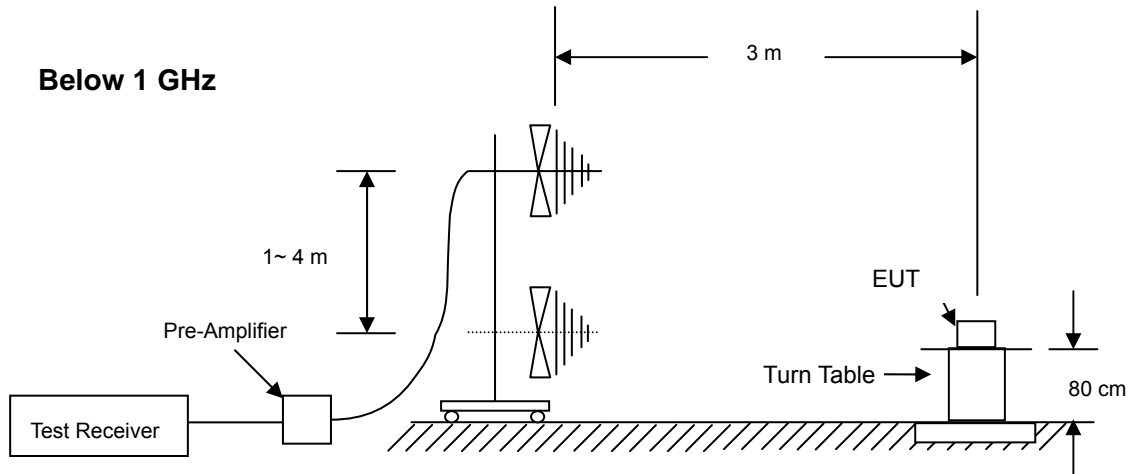

1. The EUT is placed on a turntable, which is 0.8 m (below 1GHz) and 1.5m (above 1GHz) above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer. Refer to each test results for detail setting up.
7. Repeat above procedures until the measurements for all frequencies are complete.

3.3 Limit (§ 15.205 & § 15.209)

3.3.1. Limit of Restricted Band of Operation (§ 15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	
13.36-13.41			

3.3.2. Limit of Spurious Emission (§ 15.209)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is lesser attenuation.

Frequency (MHz)	Field strength (microvolts/ meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.


3.4 Test Result

Compliance

The final test data are shown on the following page(s).

Radiated Emission Test Data (Below 1 GHz)

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39
EUT Position	: X axis		

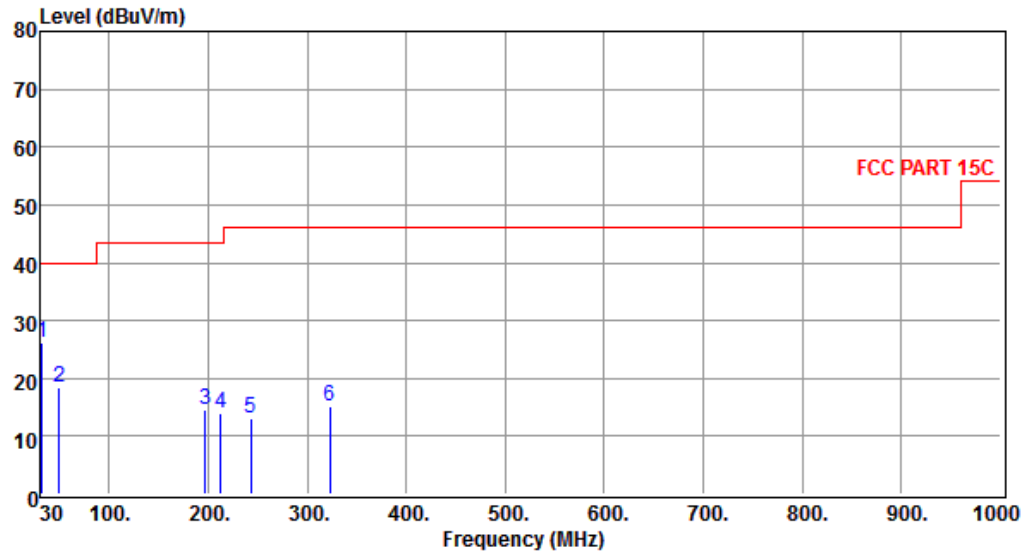

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
31.940	32.06	-5.75	26.31	40.00	-13.69	-----		VERTICAL	Peak
49.400	33.14	-14.79	18.35	40.00	-21.65	-----		VERTICAL	Peak
196.840	28.52	-13.89	14.63	43.50	-28.87	-----		VERTICAL	Peak
212.360	27.30	-13.24	14.06	43.50	-29.44	-----		VERTICAL	Peak
243.400	23.82	-10.78	13.04	46.00	-32.96	-----		VERTICAL	Peak
322.940	23.64	-8.36	15.28	46.00	-30.72	-----		VERTICAL	Peak


Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

Radiated Emission Test Data (Below 1 GHz)

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39
EUT Position	: X axis		

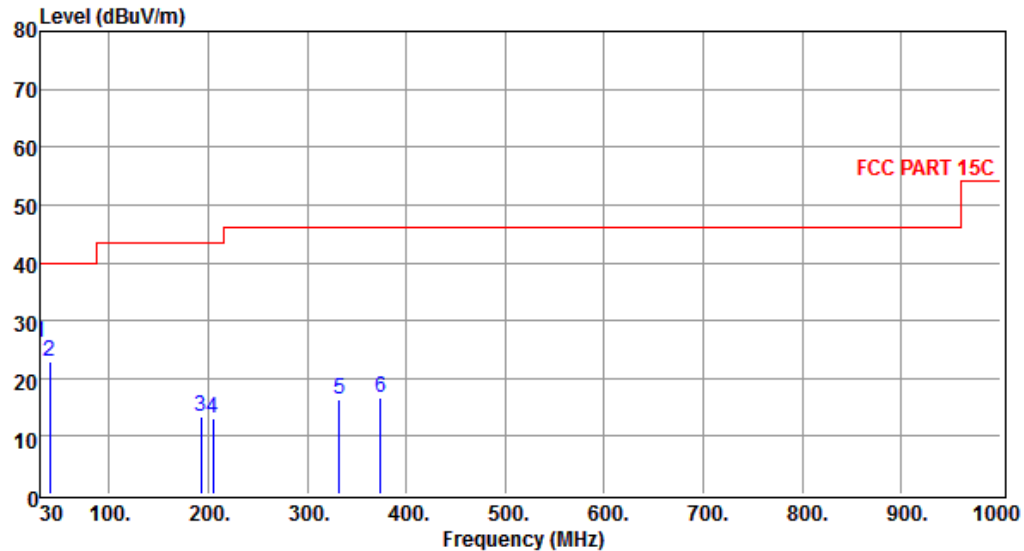

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
30.000	30.96	-4.85	26.11	40.00	-13.89	----	----	HORIZONTAL	Peak
39.700	33.01	-9.99	23.02	40.00	-16.98	----	----	HORIZONTAL	Peak
192.960	27.45	-13.95	13.50	43.50	-30.00	----	----	HORIZONTAL	Peak
204.600	26.79	-13.58	13.21	43.50	-30.29	----	----	HORIZONTAL	Peak
332.640	24.44	-8.15	16.29	46.00	-29.71	----	----	HORIZONTAL	Peak
374.350	23.84	-7.08	16.76	46.00	-29.24	----	----	HORIZONTAL	Peak


Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 30 MHz to 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
4. All readings are Peak values. None of the peak value reading exceeds the Q.P. limit. Hence, Q.P. reading was not measured.
5. The IF bandwidth of SPA between 30 MHz to 1 GHz was 100 kHz.

Radiated Emission Test Data (Above and Field Strength to 10th Harmonic)

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH00
EUT Position	: X axis		

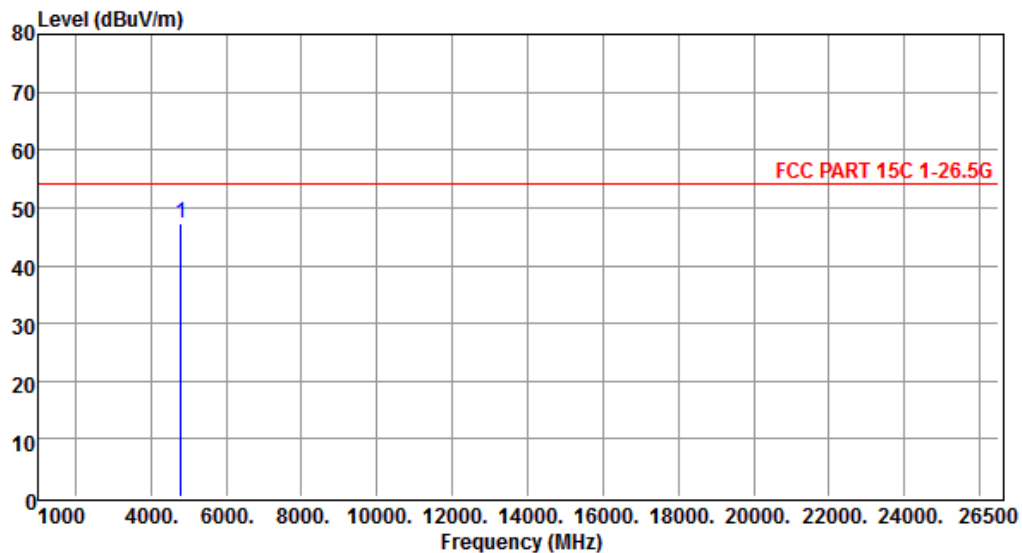

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4804.000	44.33	3.09	47.42	54.00	-6.58			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above and Field Strength to 10th Harmonic)**

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH00
EUT Position	: X axis		

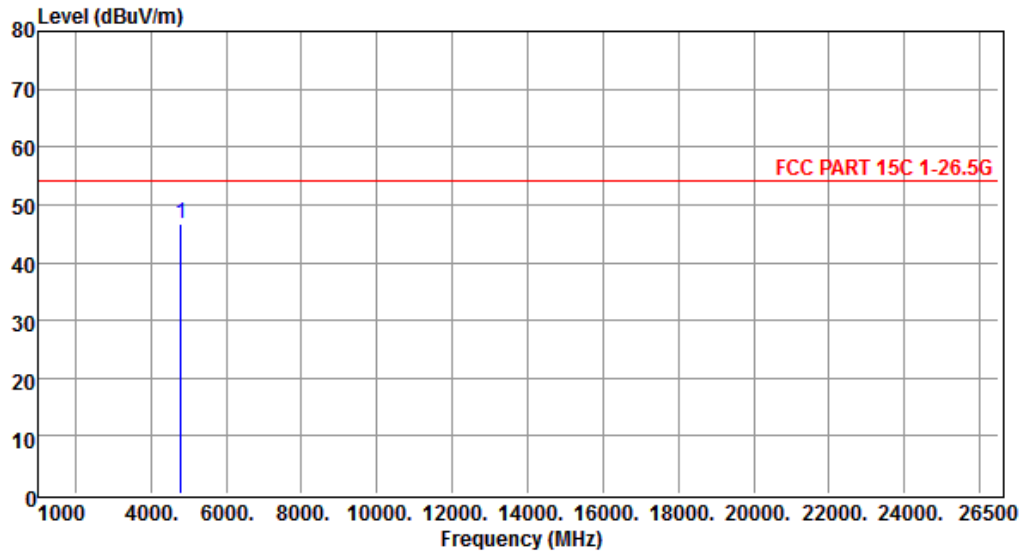

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4804.000	43.73	3.09	46.82	54.00	-7.18			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above and Field Strength to 10th Harmonic)

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH20
EUT Position	: X axis		

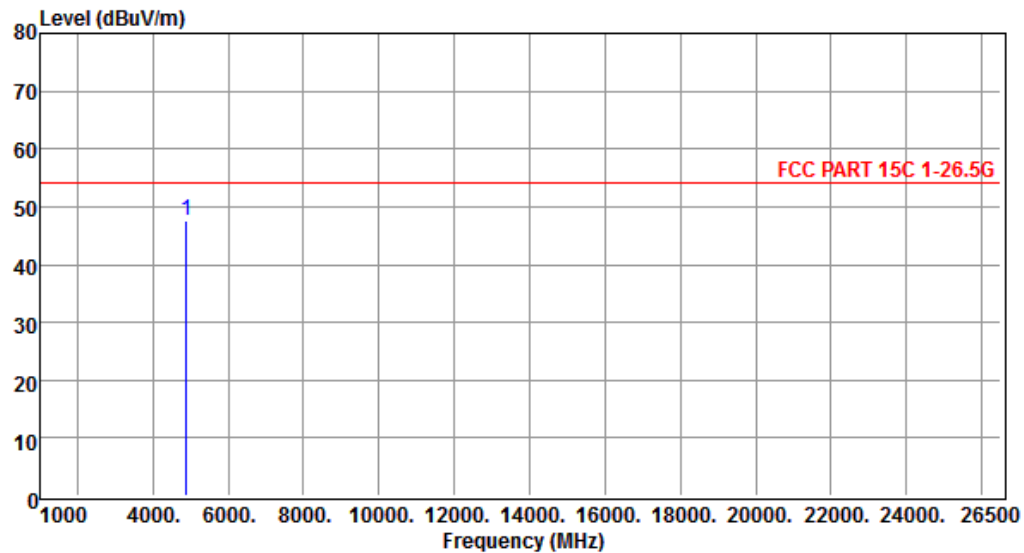

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4884.000	44.39	3.30	47.69	54.00	-6.31			VERTICAL	Peak


Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above and Field Strength to 10th Harmonic)

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH20
EUT Position	: X axis		

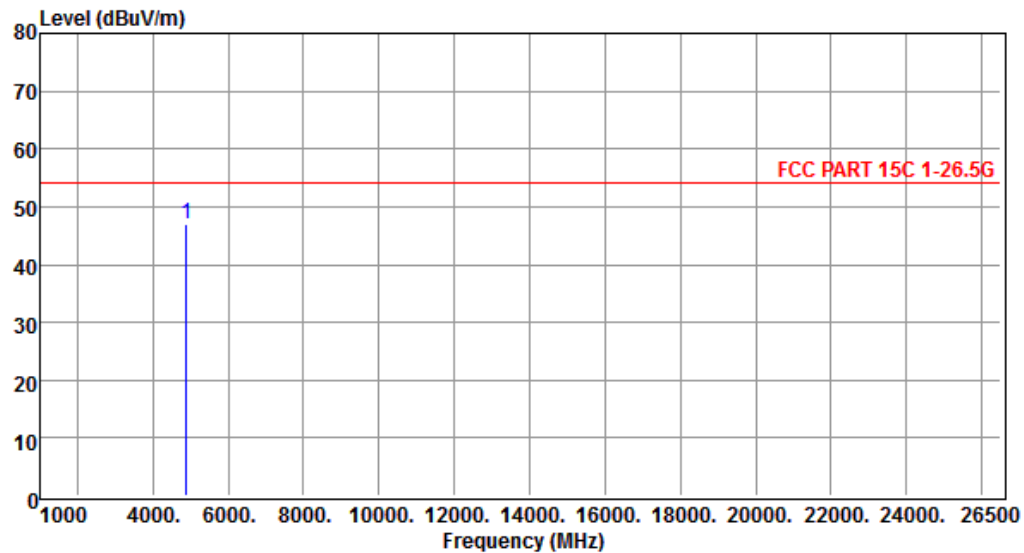

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4884.000	43.67	3.30	46.97	54.00	-7.03			HORIZONTAL	Peak


Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

Radiated Emission Test Data (Above and Field Strength to 10th Harmonic)

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Vertical	Channel	: CH39
EUT Position	: X axis		

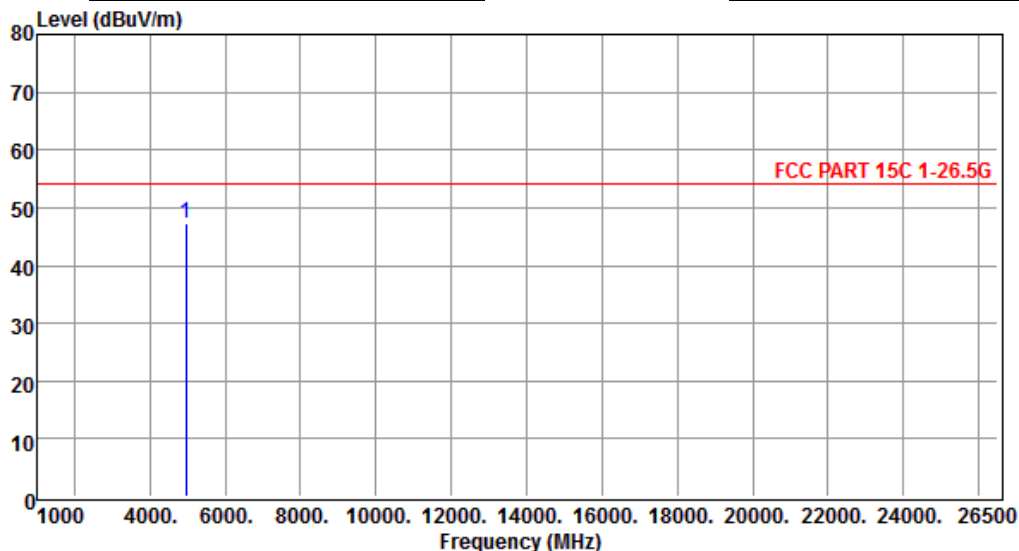

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	43.87	3.50	47.37	54.00	-6.63			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

Remark :

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

**Radiated Emission Test Data (Above and Field Strength to 10th Harmonic)**

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Polarization	: Horizontal	Channel	: CH39
EUT Position	: X axis		

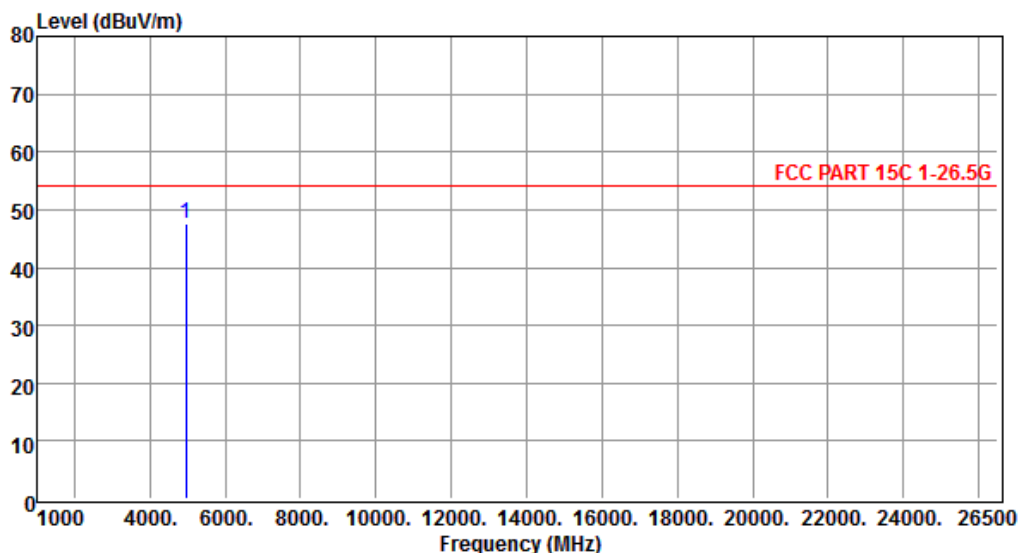

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
4960.000	44.04	3.50	47.54	54.00	-6.46	-----		HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

Remark :


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. All readings are Peak values. None of the peak value reading exceeds the A.V. limit. Hence, A.V. reading was not measured.
5. Spectrum setting:
 - (a) Peak Setting 1GHz to 10th harmonics of fundamental, RBW = VBW = 1MHz, Sweep = AUTO.

4 6 dB Bandwidth of the Emission

4.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

4.2 Test Arrangement



4.3 Test Procedure

1. Connect the EUT to spectrum analyzer through appropriate attenuator.
2. Spectrum setting; RMB = 100 kHz; VBW \geq 300 kHz. Detector = Peak. Sweep = Auto.
3. Trace = Max Hold.

4.4 Limit (§ 15.247(a)(2))

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

4.5 Test Result


Compliance

The final test data are shown on the following page(s).

Bluetooth			
Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)
00	2402	819	≥ 500
20	2442	828	≥ 500
39	2480	807	≥ 500




Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: BT BLE	Channel	: 00

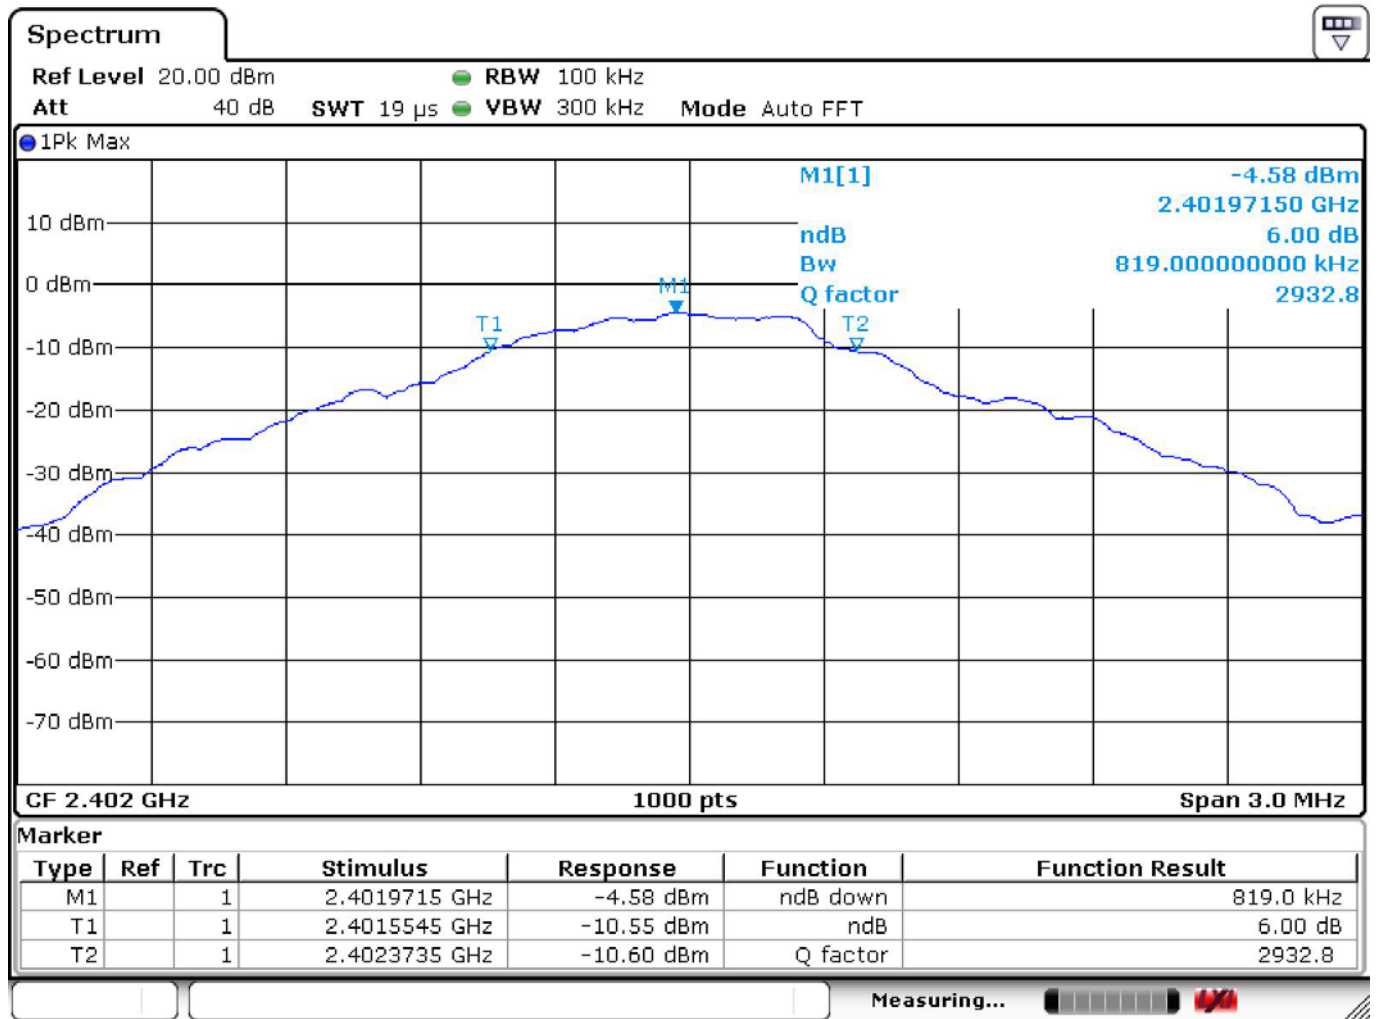



Test Mode : BT BLE


Channel : 20

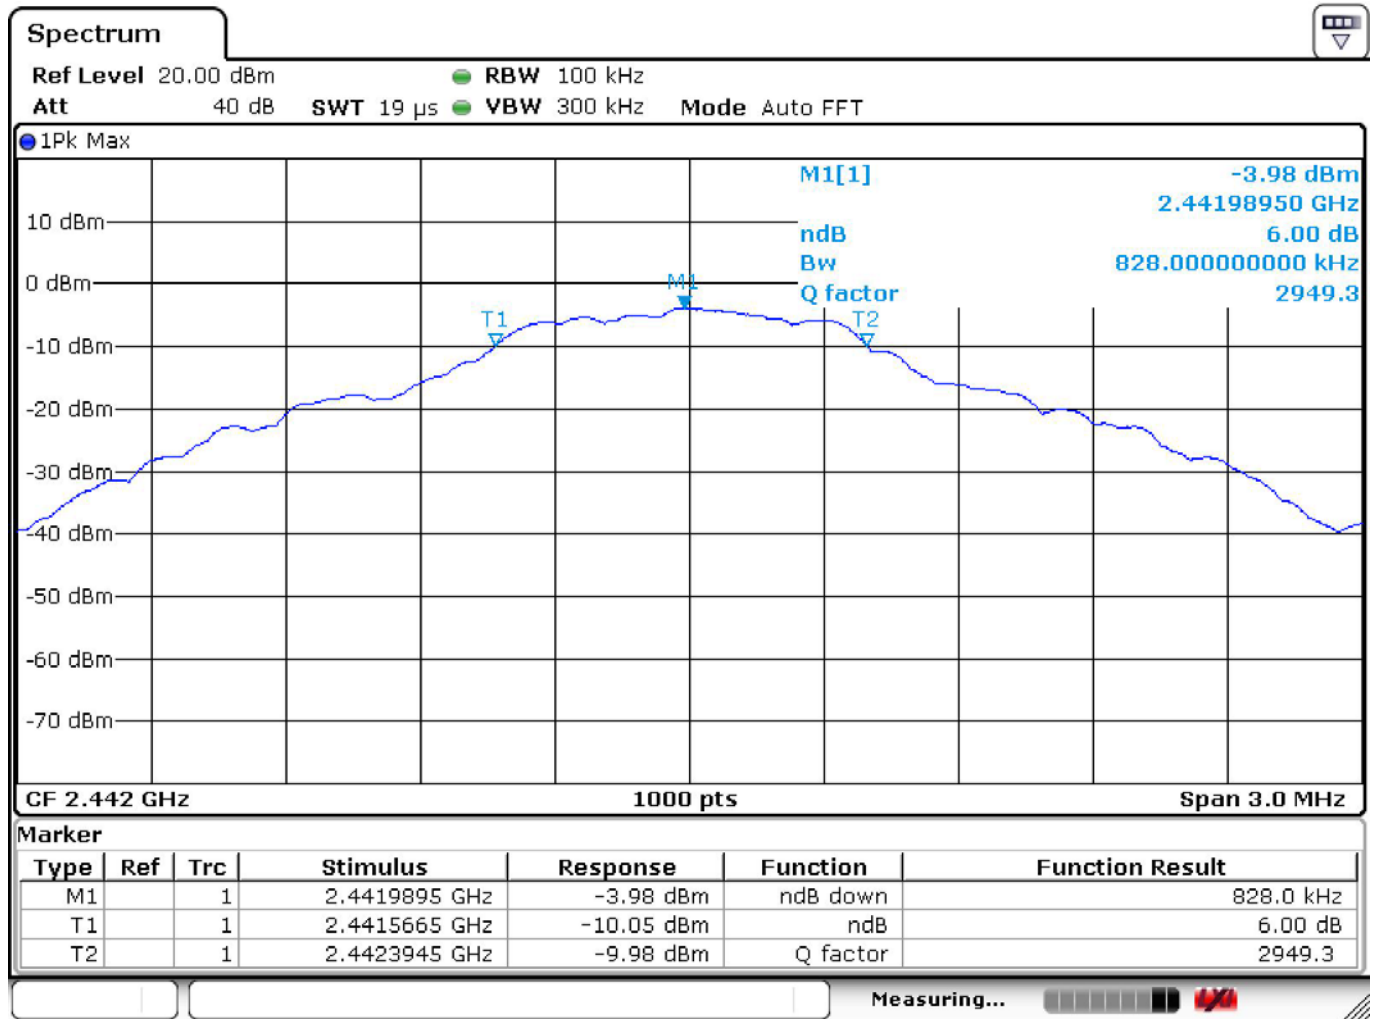



Test Mode : BT BLE

Channel : 39

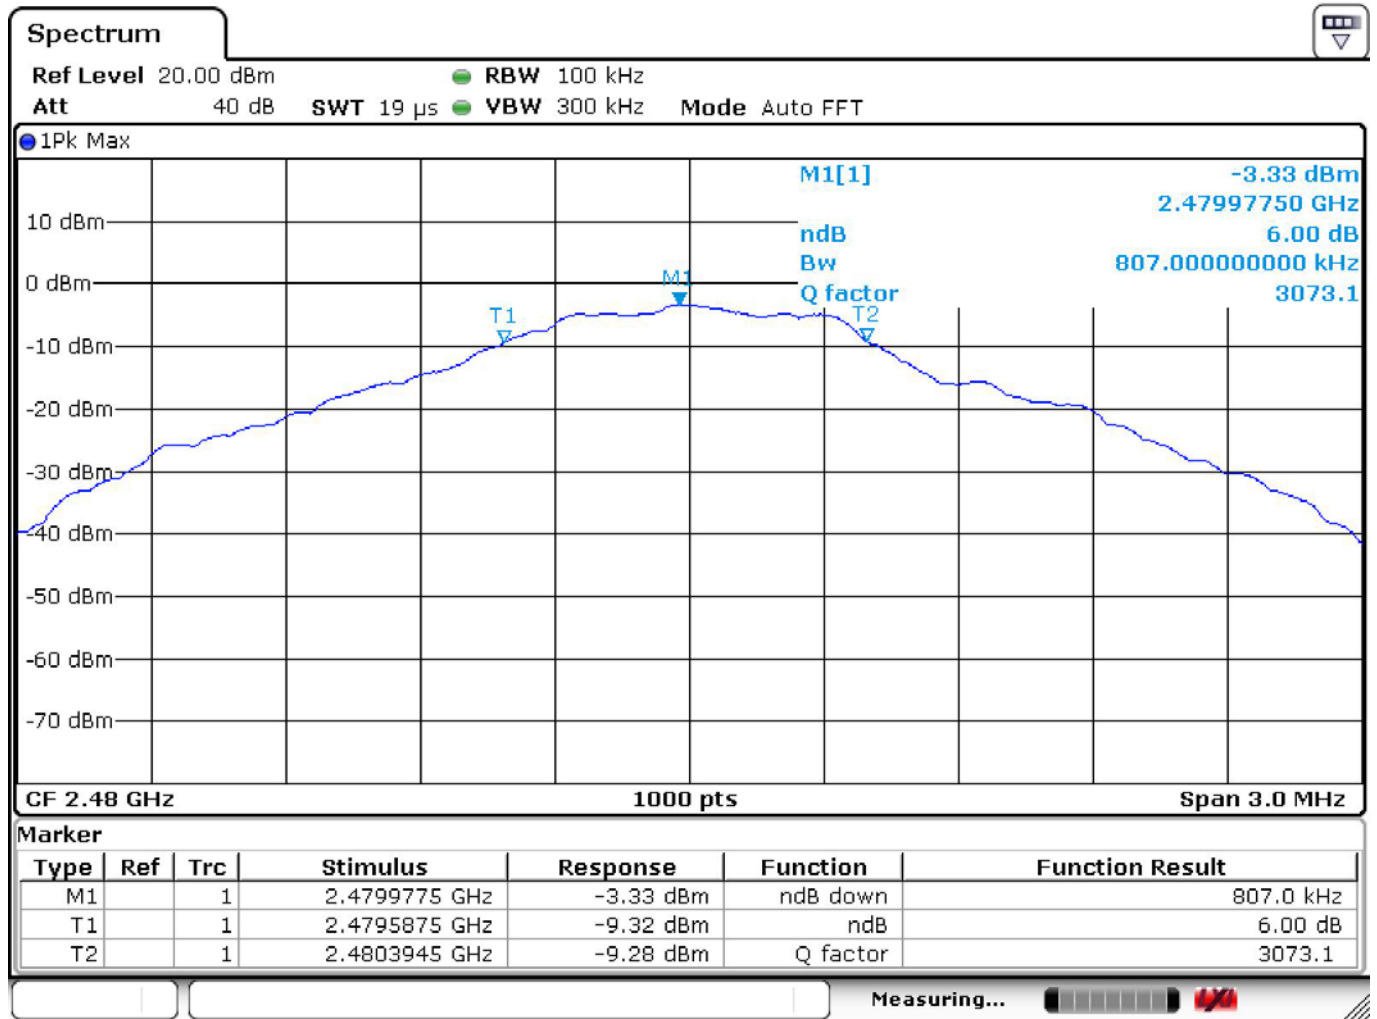


5 Maximum Conducted Output Power

5.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

5.2 Test Arrangement and Procedure



1. The transmitter output was connected to a spectrum analyzer (through an attenuator, if it's necessary).
2. The RBW is set to 3MHz and VBW is set to 10MHz. Span set to 5MHz.
3. Max Hold..

5.3 Limit (§ 15.247(b))

15.247(b) - The maximum peak conducted output power of the intentional radiator shall not exceed the following:

15.247(b)(3) - For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt (30 dBm).

The maximum antenna gain is 1.3 dBi.

5.4 Test Result

Compliance.

The final test data are shown on the following page(s).


**Result of Peak Conducted output power**

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: BLE		

Test Channel	Frequency (MHz)	Test Result		Limit	
		(dBm)	(W)	(dBm)	(W)
00	2402	-3.81	0.0004159106105	30	1
20	2442	-3.41	0.0004560369160	30	1
39	2480	-2.71	0.0005357966575	30	1

**Peak Conducted output power Test Data**


Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: BT BLE	Channel	: 00

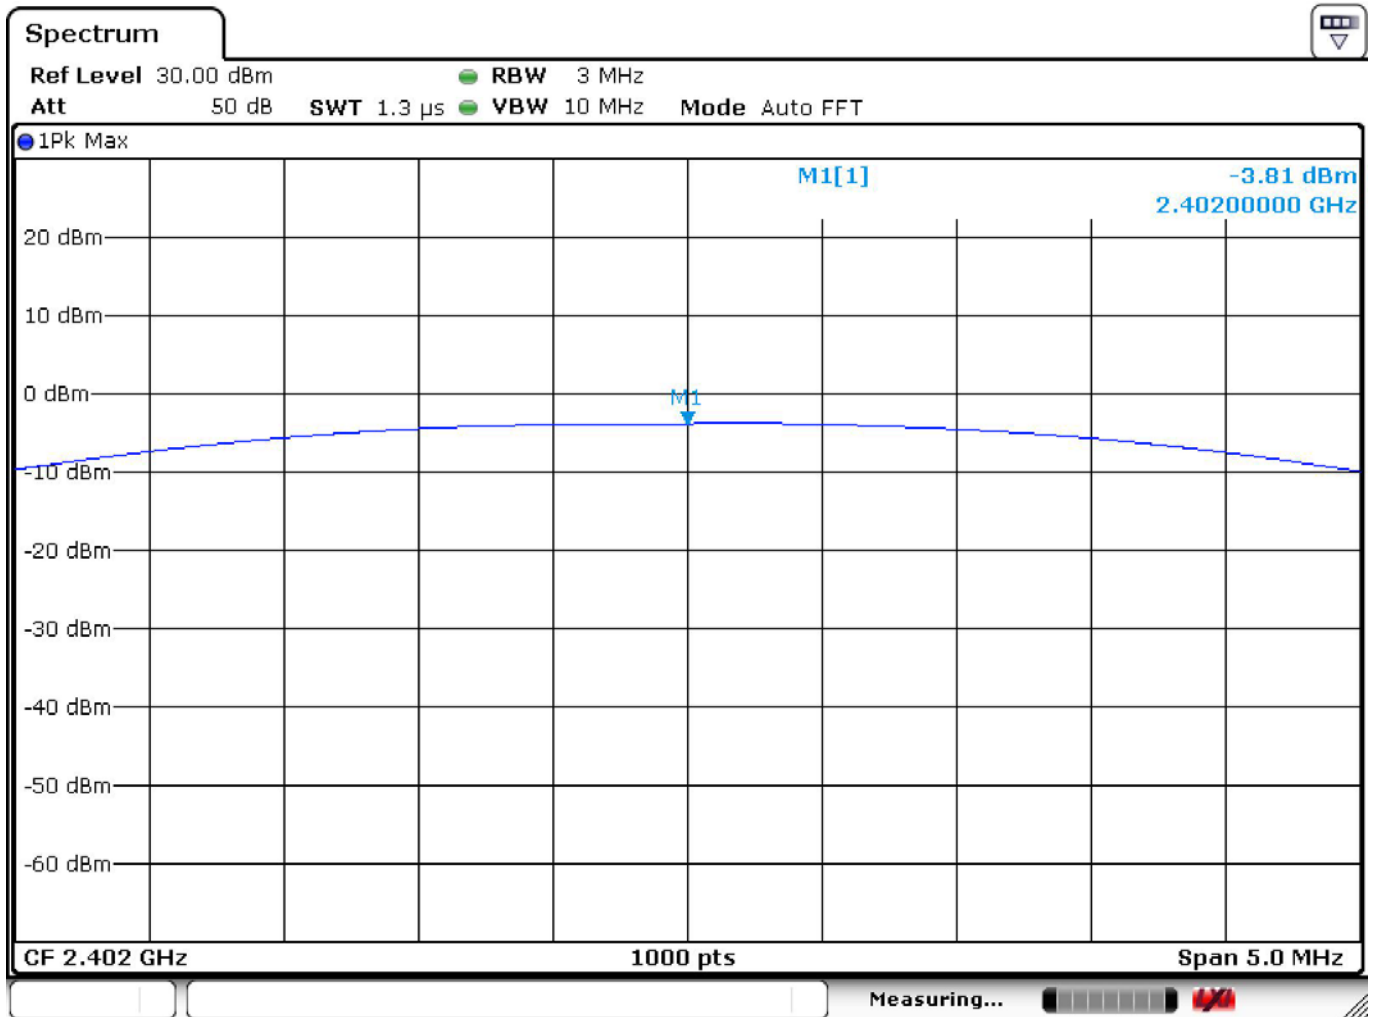



Test Mode : BT BLE


Channel : 20

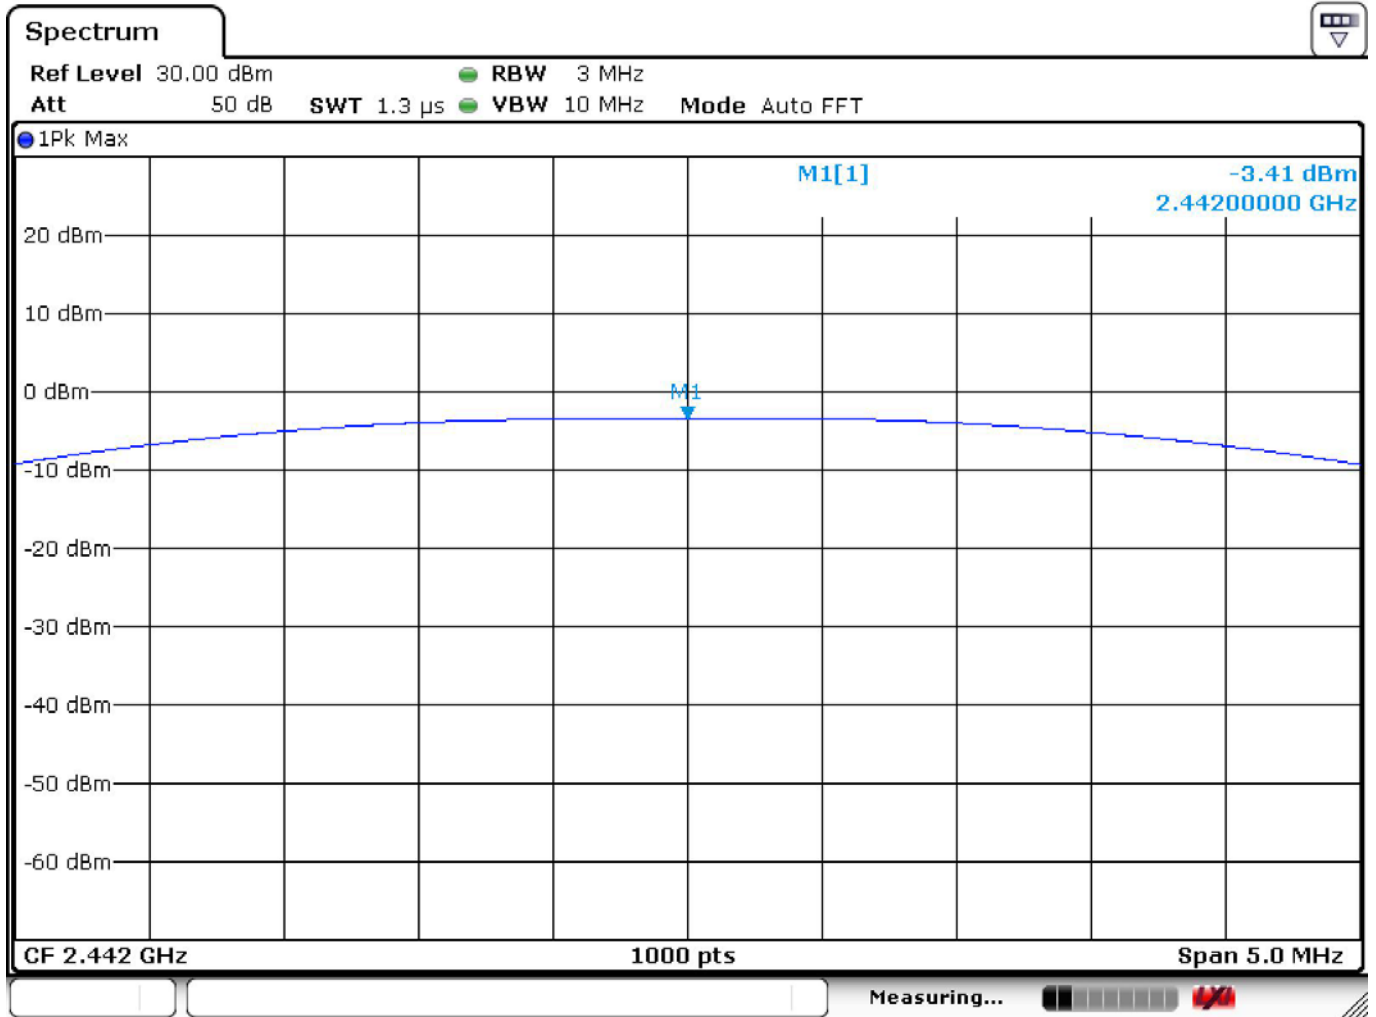



Test Mode : BT BLE

Channel : 39

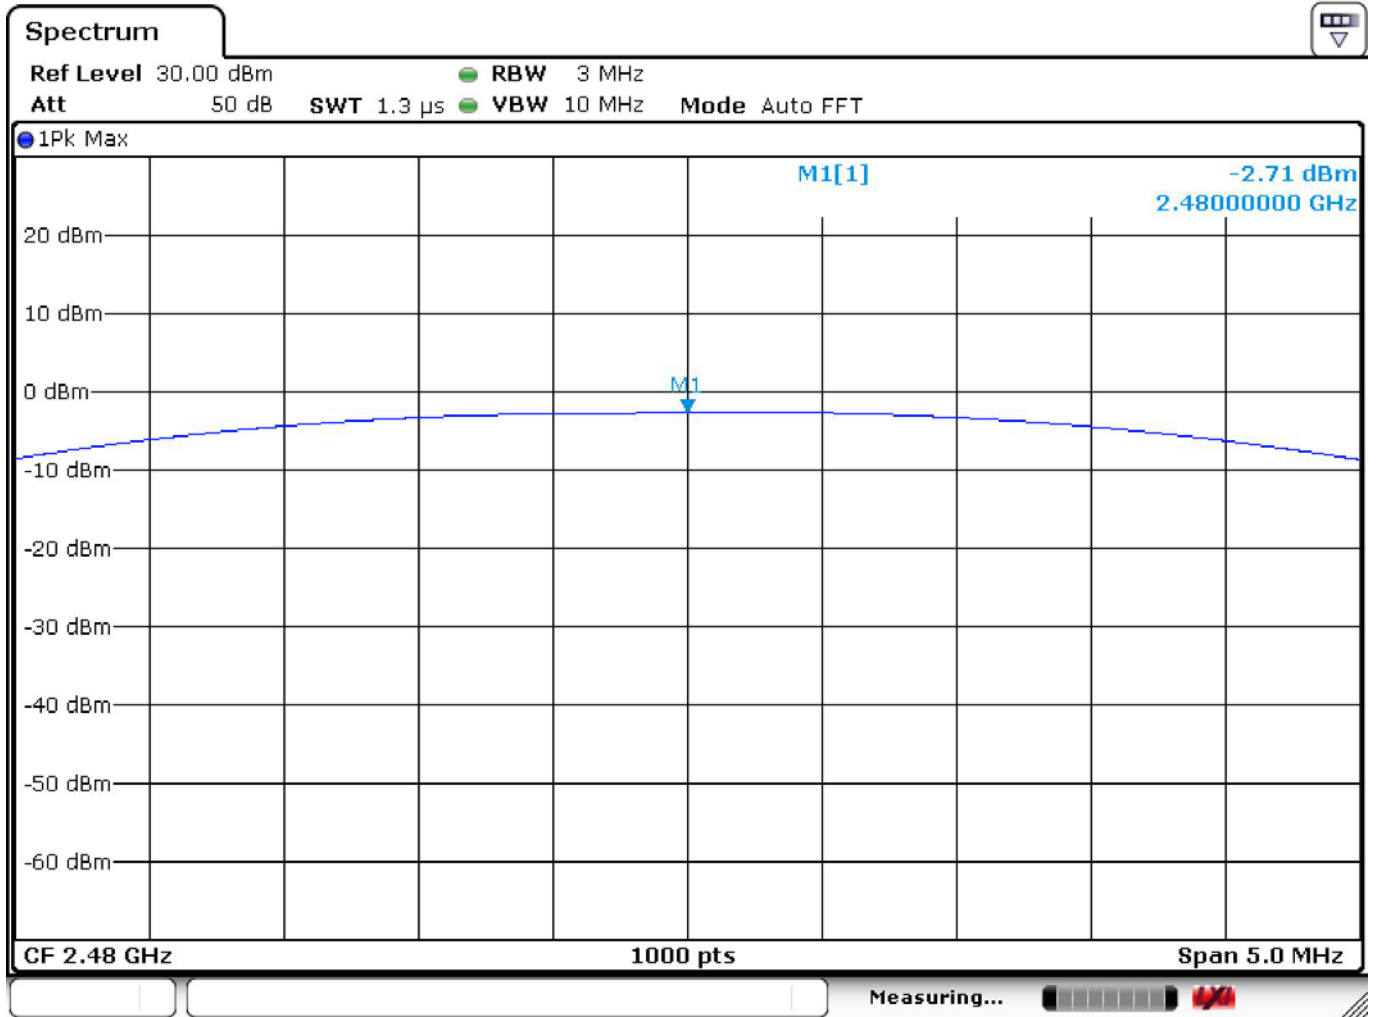


6 Out of Band Emission Test

6.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

6.2 Test Arrangement



6.3 Test Procedure

1. Connect the EUT to spectrum analyzer through appropriate attenuator.
2. Spectrum setting; RMB = 100 kHz; VBW = 300 kHz.
3. Span ≥ 1.5 time DTS BW.
4. Detector = Peak.
5. Trace = Max Hold.

6.4 Limit (§ 15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

6.5 Test Result

Compliance

The final test data are shown on the following page(s).

**Band-Edge Test Data (Lower Edge)**

Temperature : 25.5°C


Humidity : 35%

Test Date : 30-Oct-2018

Tested by : Eason Hsieh

Test Mode : Mode 1


Channel : CH00 (2402 MHz)

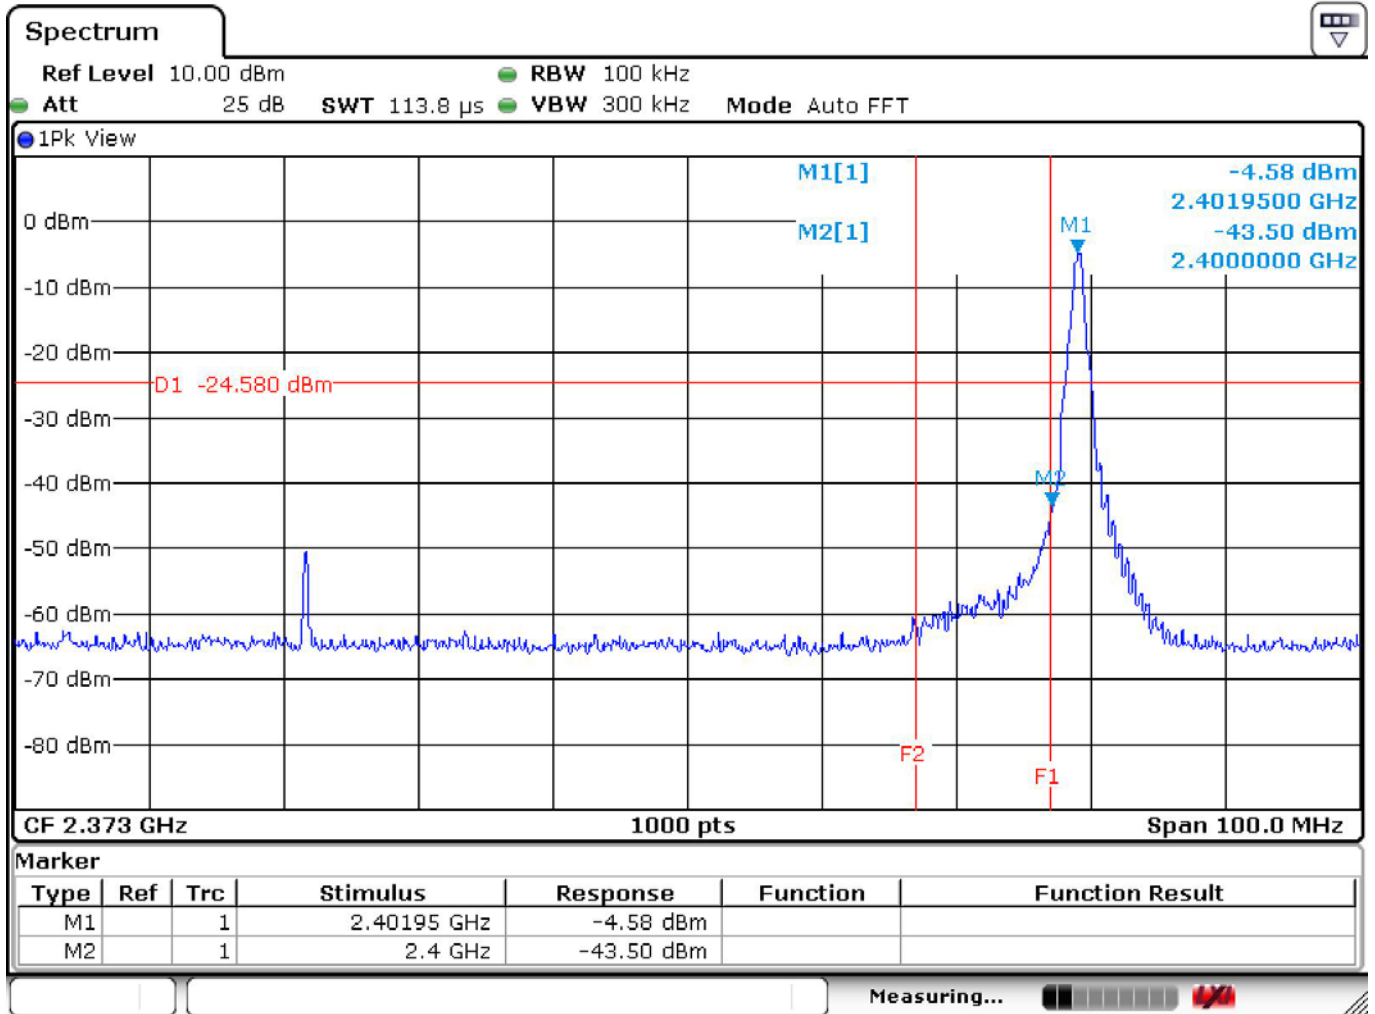




Band-Edge Test Data (Upper Edge)

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: Mode 3	Channel	: CH39 (2480 MHz)

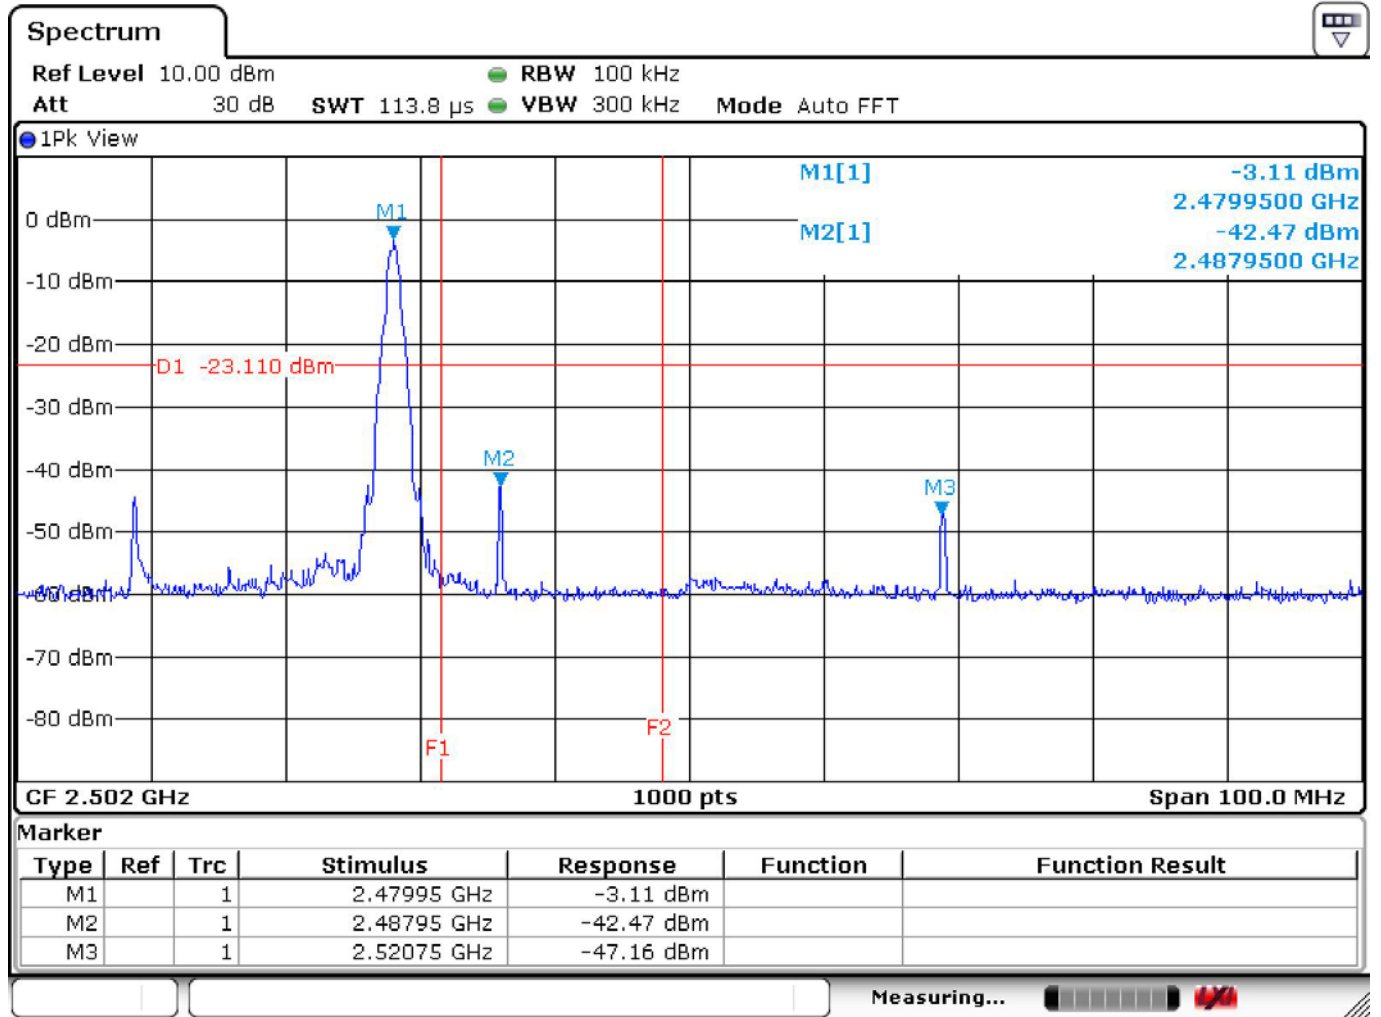

**Radiated Emission in the Restricted Band Test Data (Lower Edge)**

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: Mode 1	Channel	: CH00 (2402 MHz)
Polarization	: Vertical		

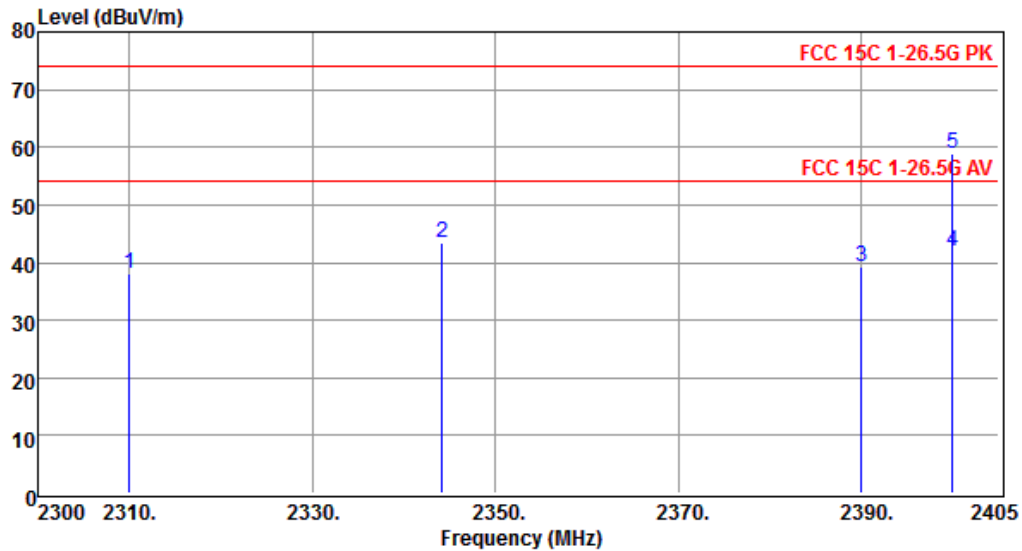


Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2310.000	44.35	-6.29	38.06	74.00	-35.94			VERTICAL	Peak
2344.205	49.73	-6.20	43.53	74.00	-30.47			VERTICAL	Peak
2390.000	45.44	-6.06	39.38	74.00	-34.62			VERTICAL	Peak
2400.000	47.96	-6.03	41.93	54.00	-12.07			VERTICAL	Average
2400.000	64.95	-6.03	58.92	74.00	-15.08			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

Radiated Emission in the Restricted Band Test Data (Lower Edge)

Temperature	: 20.3°C	Humidity	: 46%
Test Date	: 23-JAN-2018	Tested by	: Eason Hsieh
Test Mode	: Mode 1	Channel	: CH00 (2402 MHz)
Polarization	: Horizontal		

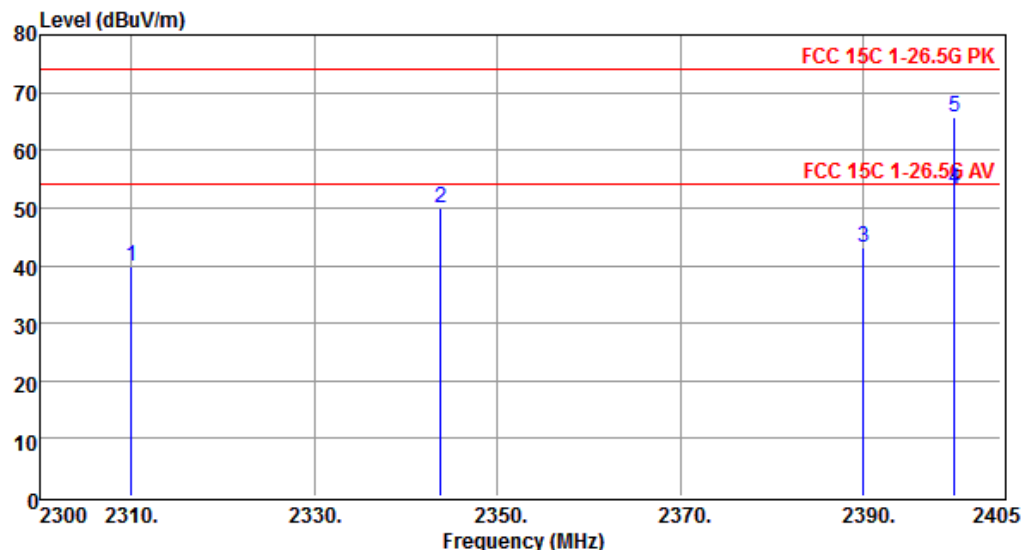


Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2310.000	46.24	-6.29	39.95	74.00	-34.05			HORIZONTAL	Peak
2343.785	56.12	-6.20	49.92	74.00	-24.08			HORIZONTAL	Peak
2390.000	49.06	-6.06	43.00	74.00	-31.00			HORIZONTAL	Peak
2400.000	59.14	-6.03	53.11	54.00	-0.89			HORIZONTAL	Average
2400.000	71.77	-6.03	65.74	74.00	-8.26			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

**Radiated Emission in the Restricted Band Test Data (Upper Edge)**

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: Mode 3	Channel	: CH39 (2480 MHz)
Polarization	: Vertical		

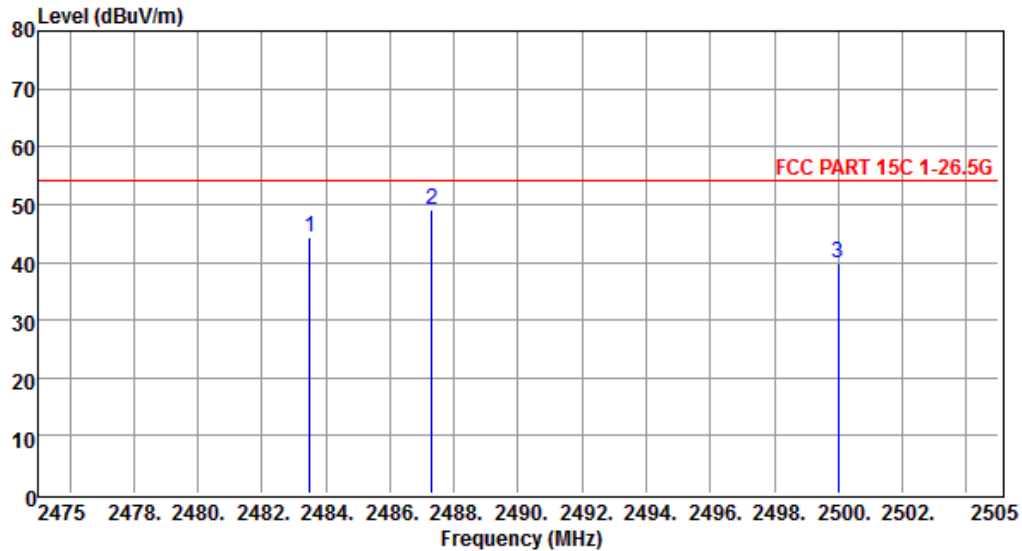


Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2483.490	50.08	-5.77	44.31	54.00	-9.69			VERTICAL	Peak
2487.300	54.83	-5.76	49.07	54.00	-4.93			VERTICAL	Peak
2500.000	45.45	-5.72	39.73	54.00	-14.27			VERTICAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Note2: Margin = Result - Limit

**Radiated Emission in the Restricted Band Test Data (Upper Edge)**

Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: Mode 3	Channel	: CH39 (2480 MHz)
Polarization	: Horizontal		

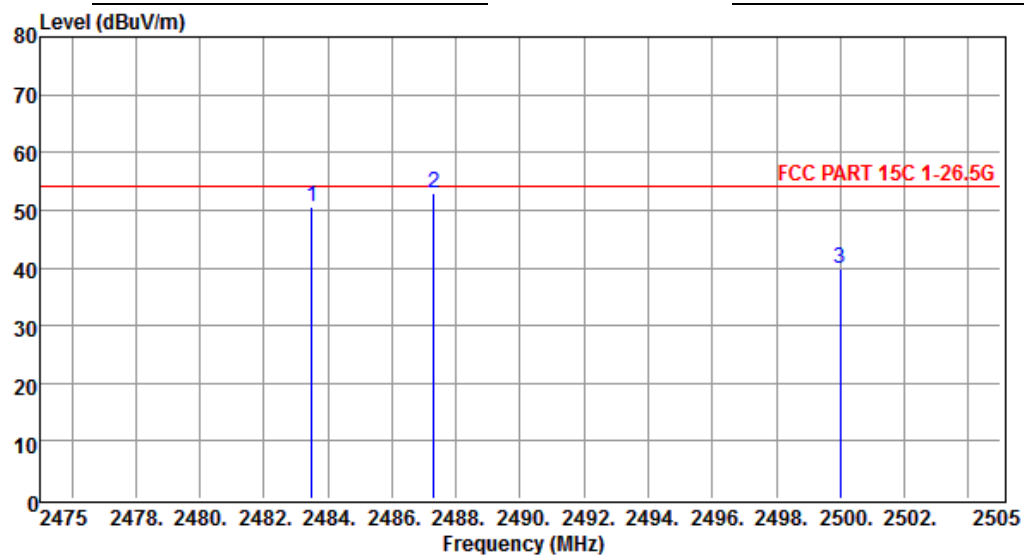

Freq	Reading	C.F	Result	Limit	Margin	A/H	T/P	Polarity	Remark
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg		
2483.500	56.23	-5.77	50.46	54.00	-3.54			HORIZONTAL	Peak
2487.300	58.61	-5.76	52.85	54.00	-1.15			HORIZONTAL	Peak
2500.000	45.67	-5.72	39.95	54.00	-14.05			HORIZONTAL	Peak

Note1: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


Note2: Margin = Result - Limit

7 Power Spectral Density

7.1 Test Instruments

Refer to Sec. 1.2 Test Instruments.

7.2 Test Arrangement



7.3 Test Procedure

1. Connect the EUT to spectrum analyzer through appropriate attenuator.
2. Spectrum setting; RMB = 3 kHz; VBW = 10 kHz; Span = 1.5 times DTS bandwidth; Sweep Time = 2.5 mSec.
3. Trace = Max Hold.
4. Test method in Section 11.10.2 of ANSI C63.10 (2013) was used to measure the power spectral density.

7.4 Limit (§ 15.247(e))

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.5 Test Result

Compliance


The final test data are shown on the following page(s).



Bluetooth			
Channel	Frequency (MHz)	Result (dBm)	Limit (dBm/ 3kHz)
00	2402	-17.24	8
20	2442	-16.69	8
39	2480	-15.89	8




Temperature	: 25.5°C	Humidity	: 35%
Test Date	: 30-Oct-2018	Tested by	: Eason Hsieh
Test Mode	: BT BLE	Channel	: 00

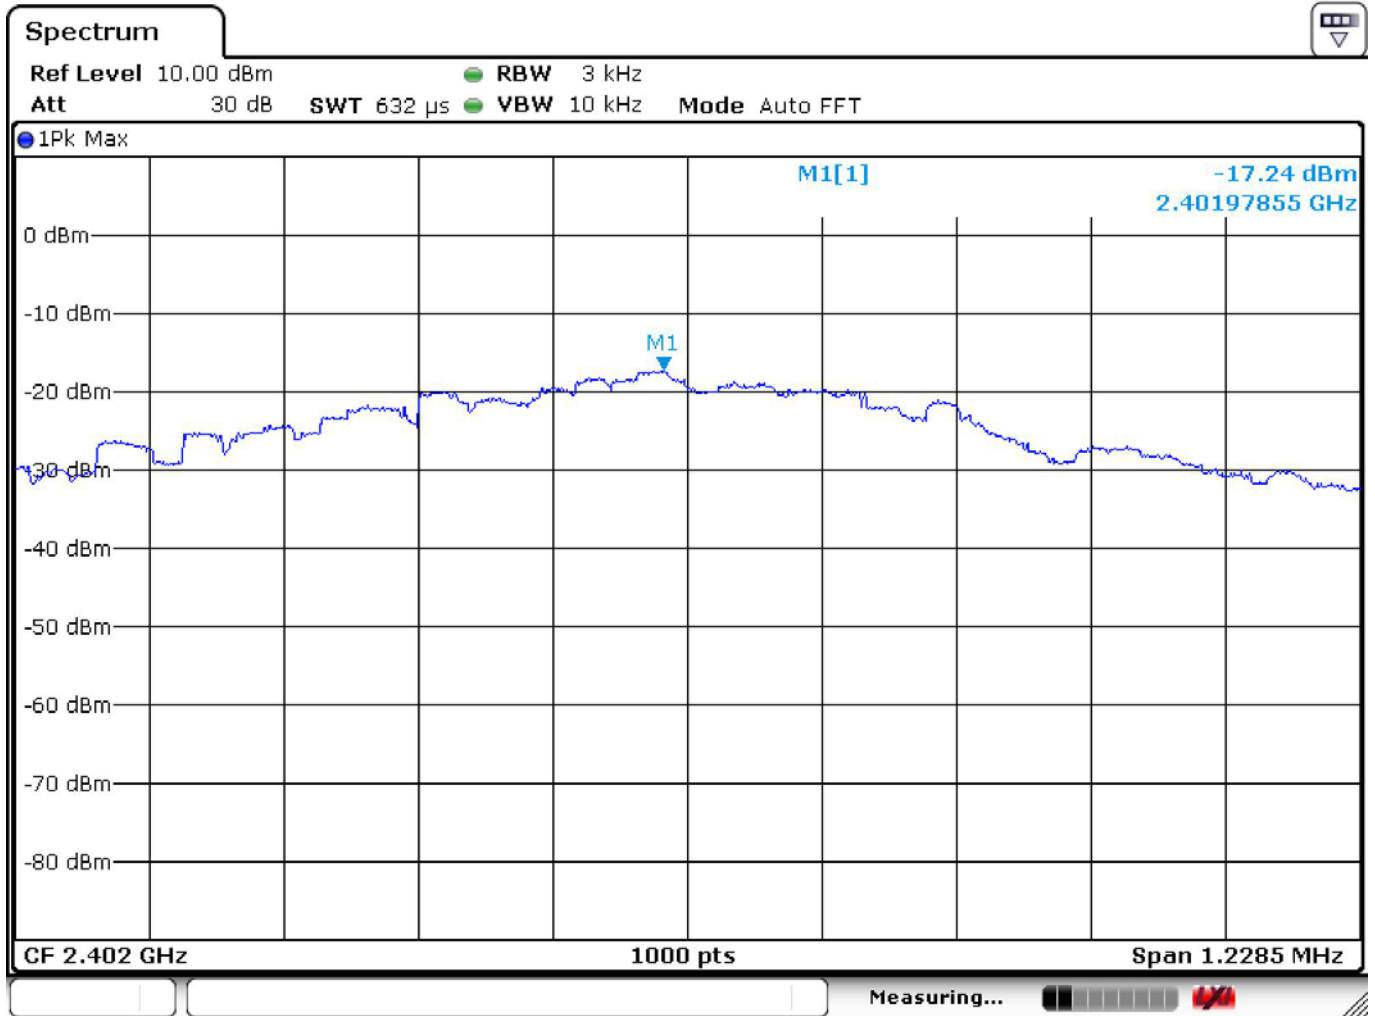



Test Mode : BT BLE


Channel : 20

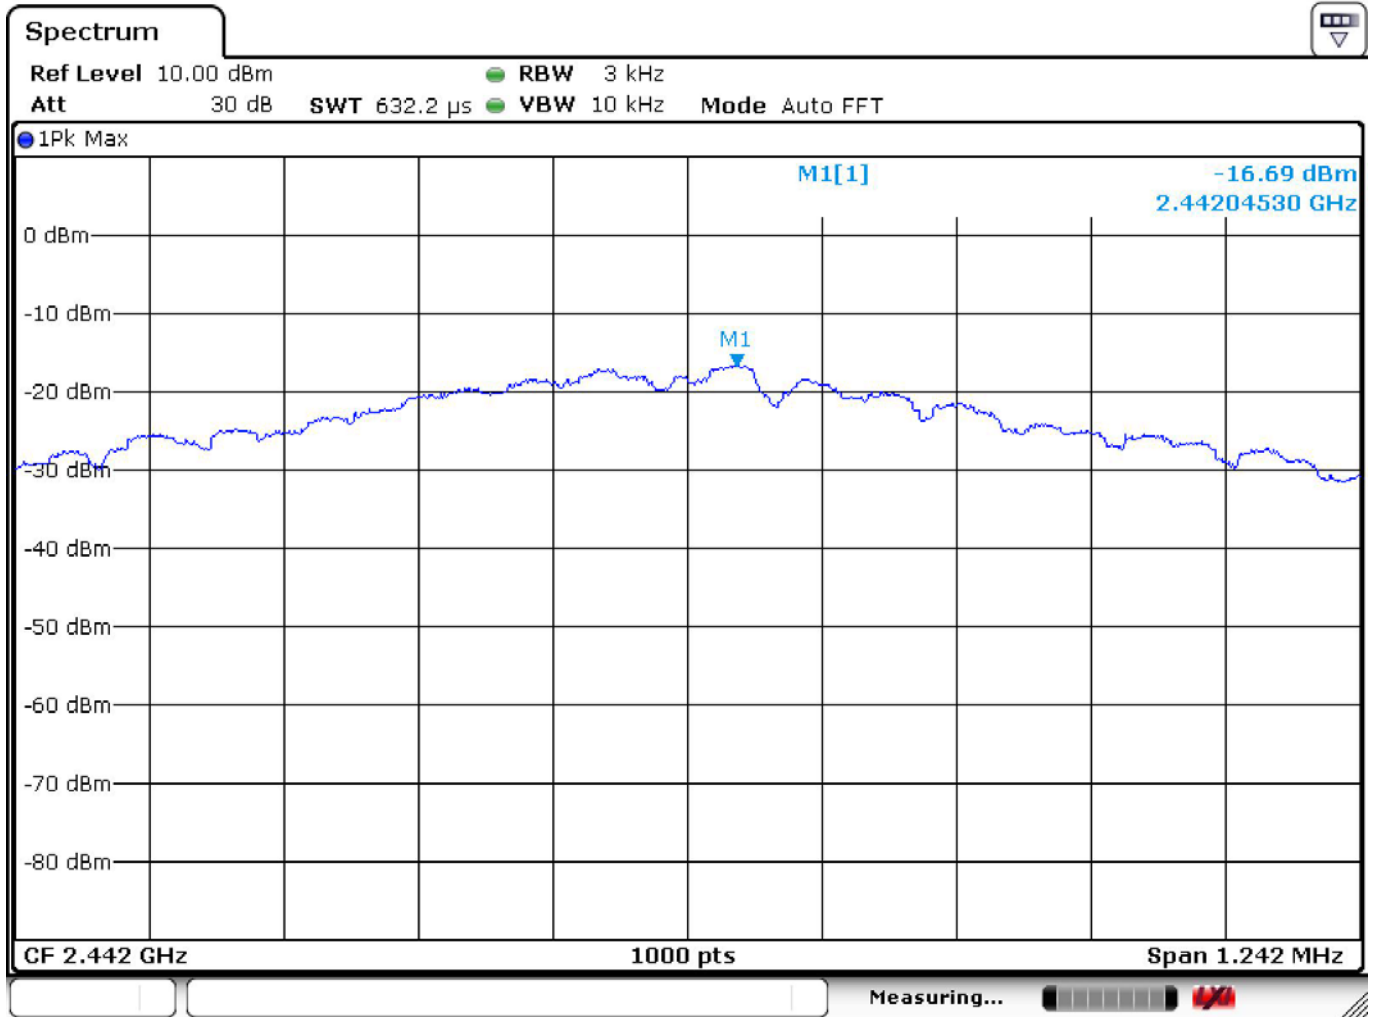



Test Mode : BT BLE

Channel : 39

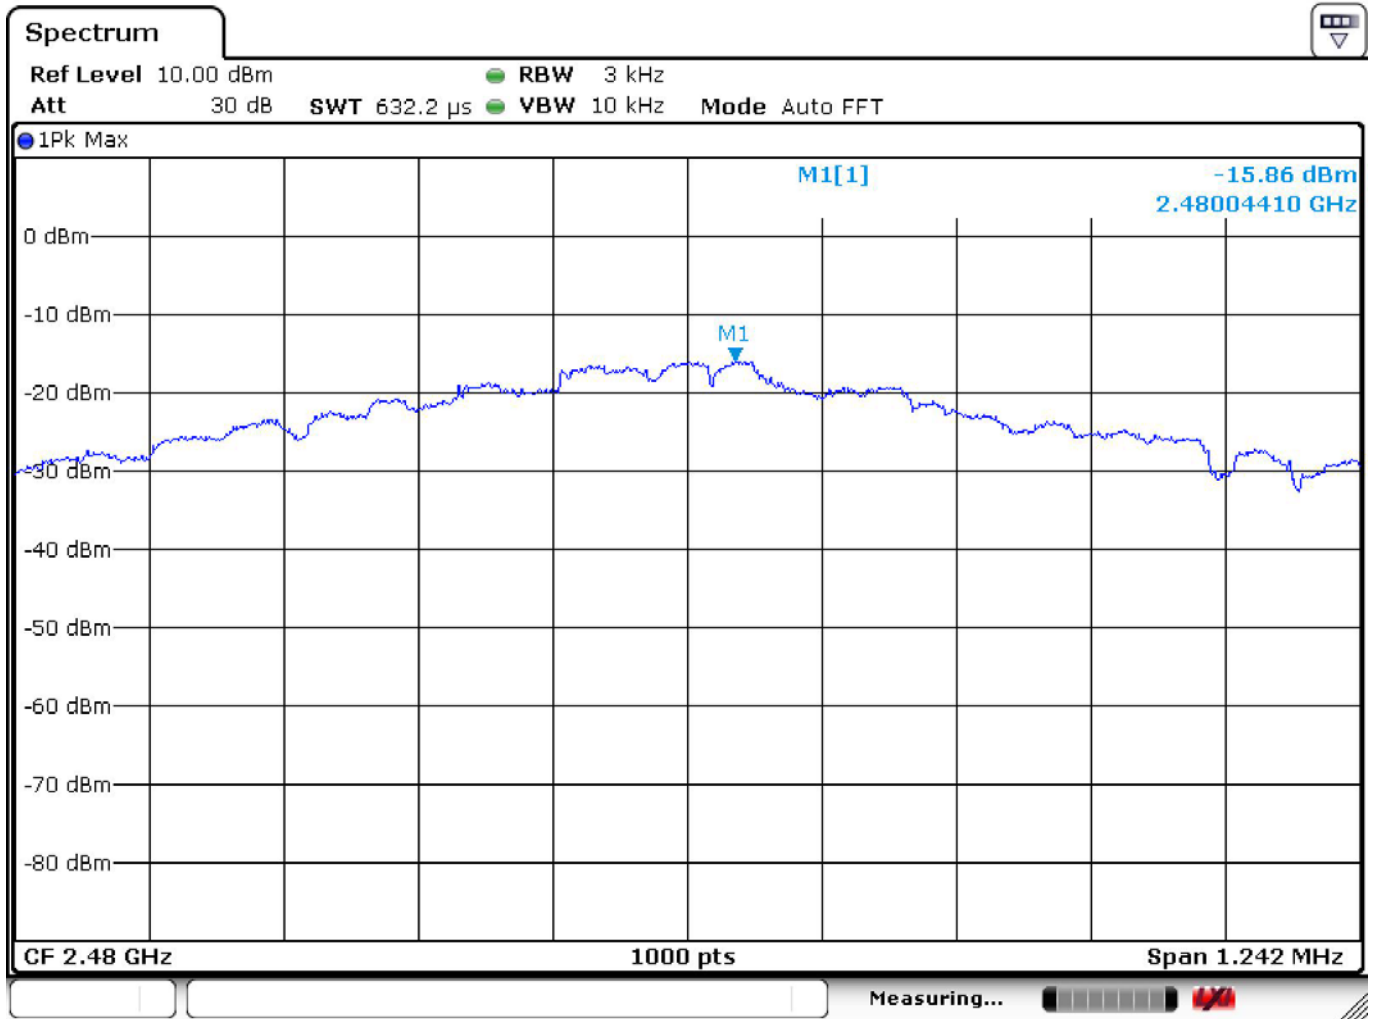



8 Antenna requirement

8.1 Limit (§ 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a uniue coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

8.2 Test Result

Compliance.

The EUT applies a Chip Ceramic antenna.

-----End Of Test Report-----