



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

**For**

**Alpha Networks Inc.**

**WLAN 802.11a MiniPCI Card**

**Model: WMP-A13**

**Trade Name: Alpha**

*Issued to*

**Alpha Networks Inc.  
No.8, Li Hsing Rd. VII, Science-Based, Industrial Park,  
Hsinchu, Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.  
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,  
Taoyuan Hsien, (338) Taiwan, R.O.C.  
TEL: 886-3-324-0332  
FAX: 886-3-324-5235**



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
3.1 EUT CONFIGURATION .....	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES .....	6
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>7</b>
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>8</b>
5.1 FACILITIES .....	8
5.2 EQUIPMENT.....	8
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
6.1 SETUP CONFIGURATION OF EUT.....	10
6.2 SUPPORT EQUIPMENT .....	10
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>11</b>
7.1 6DB BANDWIDTH .....	11
7.2 PEAK POWER.....	19
7.3 PEAK POWER SPECTRAL DENSITY .....	27
7.4 RADIO FREQUENCY EXPOSURE .....	35
7.5 SPURIOUS EMISSIONS .....	38
7.6 POWERLINE CONDUCTED EMISSIONS.....	86
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP .....</b>	<b>95</b>



## 1. TEST RESULT CERTIFICATION

**Applicant:** Alpha Networks Inc.  
No.8, Li Hsing Rd. Vii, Science-Based, Industrial Park,  
Hsinchu, Taiwan, R.O.C.

**Equipment Under Test:** WLAN 802.11a MiniPCI Card

**Trade Name:** Alpha

**Model:** WMP-A13

**Date of Test:** October 1 ~ November 3, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

*Approved by:*

---

Harris W. Lai  
Executive Vice President  
Compliance Certification Services Inc.

*Reviewed by:*

---

Devin Chang  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	WLAN 802.11a MiniPCI Card
<b>Trade Name</b>	Alpha
<b>Model Number</b>	WMP-A13
<b>Model Discrepancy</b>	<ol style="list-style-type: none"><li>1. The EUT have two types, three different gain's antennas for sales, one is Dual-Band Omni-Directional antenna and other one is Panel Directional Antenna, the detail descriptions please refer antenna specification.</li><li>2. The EUT may be sale combination with 802.11g Outdoor Access Point (FCC ID: KA22002090027-1) with the possible configurations below, so co-location tests have also been performed and recorded in this report.<ol style="list-style-type: none"><li>1) WMP-A13/ 5dBi dual band antenna, AP/4.5dBi dual band antenna.</li><li>2) WMP-A13/14dBi panel directional antenna, AP/16dBi panel directional antenna.</li><li>3) WMP-A13/18dBi panel directional antenna, AP/16dBi panel directional antenna.</li></ol></li></ol>
<b>Power Supply</b>	DC 3.3V from host device
<b>Frequency Range</b>	IEEE 802.11a: Base mode: 5.150 ~ 5.350 GHz Turbo mode: 5.210 GHz / 5.250 GHz / 5.290 GHz Base mode: 5.725 ~ 5.850 GHz Turbo mode: 5.760 GHz / 5.800 GHz
<b>Transmit Power</b>	IEEE 802.11a: 5.150 ~ 5.350 GHz: Dual-Band Omni-Directional antenna: 13.88dBm Panel Directional antenna / 14dBi: 15.64dBm
	IEEE 802.11a: 5.725 ~ 5.850 GHz: Dual-Band Omni-Directional antenna / 5dBi: 15.70dBm Panel Directional antenna / 18dBi: 15.36dBm
<b>Modulation Technique</b>	IEEE 802.11a: 5.150 ~ 5.350 GHz: OFDM 5.725 ~ 5.850 GHz: DSSS
<b>Transmit Data Rate</b>	IEEE802.11a: 6, 9, 12, 18, 24, 36, 48, 54, 108Mbps
<b>Number of Channels</b>	IEEE802.11a: 5.150 ~5.350 GHz: 8 Channels 5.725 ~ 5.850 GHz: 5 Channels
<b>Antenna Specification</b>	Dual-Band Omni-Directional Antenna Gain: 5dBi (5.150~5.250 / 5.725~5.850GHz) Panel Directional Antenna Gain: 18dBi (5.725 ~ 5.850 GHz) 14dBi (5.250 ~ 5.350 GHz)

**Note:** This submittal(s) (test report) is intended for FCC ID: RRK2004090192-1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT has been set in continuous transmitting/ receiving with following test modes/ configurations:

#### 1. Stand-alone test:

The EUT is 802.11a mini PCI radio. It was connected to a laptop via a cardbus-to-mini PCI adapter / extension board with the configurations below for testing.

1. EUT with 5dBi Dual-Band Omni-Directional Antenna/ test frequency range: 5.725-5.850 GHz.
2. EUT with 18dBi Panel Directional Antenna/ test frequency range: 5.725-5.850 GHz.

#### 2. Co-location test:

The EUT was set at the approved 802.11g AP and selected one channel of the worst case from the mode /configuration 1) to test with L/M/H channels of 802.11g AP with the configurations indicated in section 2 of test report for testing.



## **4. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

☒ No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang, Taoyuan Hsien, Taiwan, R.O.C.

☐ No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.








All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200600-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (Registration no: 93105 and 90471).



## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP*	EN 55011, EN 55014-1, AS/NZS 1044, CNS 13783-1, EN 55022, CNS 13438, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, FCC OST/MP-5, AS/NZS CISPR 22, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 200600-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	4 3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	CNLA	EN 300 328-1/2, EN 300 220-1/2/3, EN 300 440-1/2, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15 Subpart C/D/E, EN 55013, CNS 13439, EN 55014-1, CNS 13783-1, EN 55022, CNS 13438, CISPR 22, AS/NZS 3548, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, IEEE Std 1528, FCC OET Bulletin, 65+Supplement C, EN50360, EN50361, EN50371, RSS102	 0363 ILAC MRA
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	RSS212, Issue 1	 IC 3991-3 IC 3991-4

\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	2656	AK-VF0HT	FCC DoC	N/A	AC I/P Cable: Unshielded, 1.8m DC O/P Cable Unshielded, 1.8m
2.	USB Mouse	HP	MO19UCA	020440964	FCC DoC	Shielded, 1.8m	N/A
3.	802.11g Outdoor Access Point	D-Link	DWL-2600AP	N/A	KA22002090027-1	N/A	AC I/P Cable: Unshielded, 1.8m DC O/P Cable Unshielded, 1.8m

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6dB BANDWIDTH

#### LIMIT


For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = Base mode: 20MHz / Turbo mode: 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*

**Test Data****Dual-Band Omni-Directional Antenna**


Channel	Frequency (MHz)		Bandwidth (kHz)	Antenna Gain (dBi)	Limit (kHz)	Test Result
Low	Base mode	5745	16370	5	>500	PASS
Mid		5785	16570			PASS
High		5825	16500			PASS
Low	Turbo mode	5760	33170			PASS
High		5800	33170			PASS

**Panel Directional Antenna**


Channel	Frequency (MHz)		Bandwidth (kHz)	Antenna Gain (dBi)	Limit (kHz)	Test Result
Low	Base mode	5745	16530	18	>500	PASS
Mid		5785	16600	18		PASS
High		5825	16570	18		PASS
Low	Turbo mode	5760	33170	18		PASS
High		5800	33000	18		PASS

**IEEE 802.11a Base mode / Dual-Band Omni-Directional Antenna****CH 5745 / 5dBi**

\* Agilent 21:47:11 Oct 12, 2004

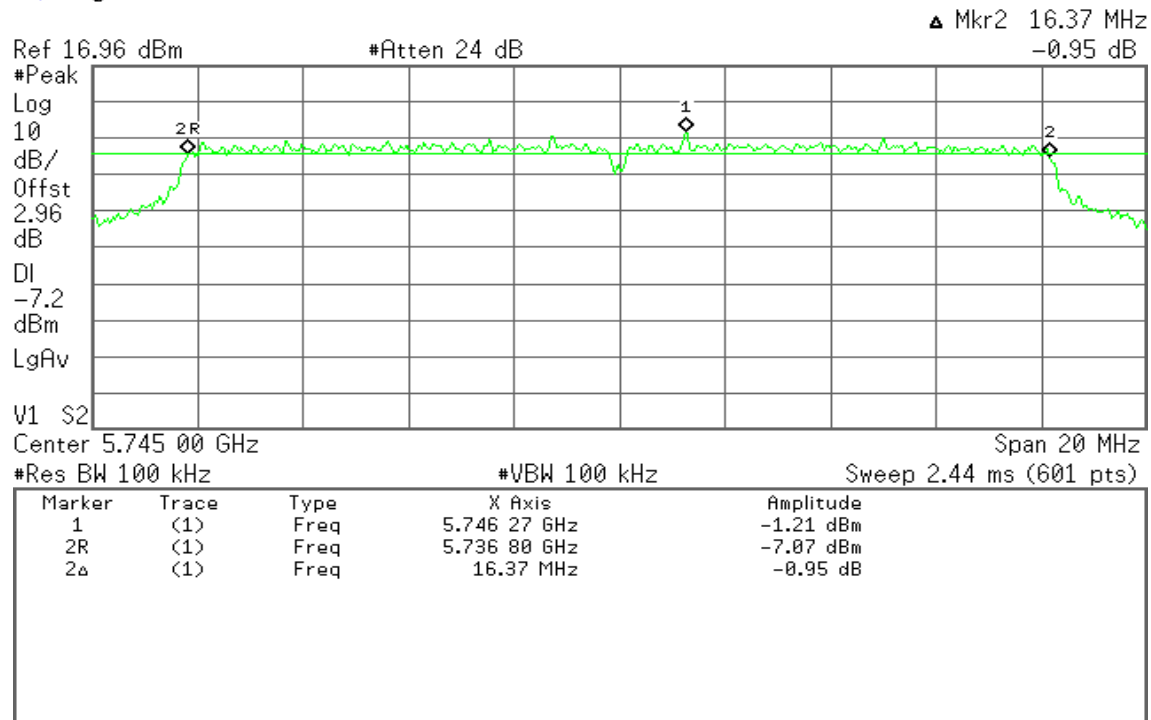**CH 5785 / 5dBi**


\* Agilent 21:48:46 Oct 12, 2004

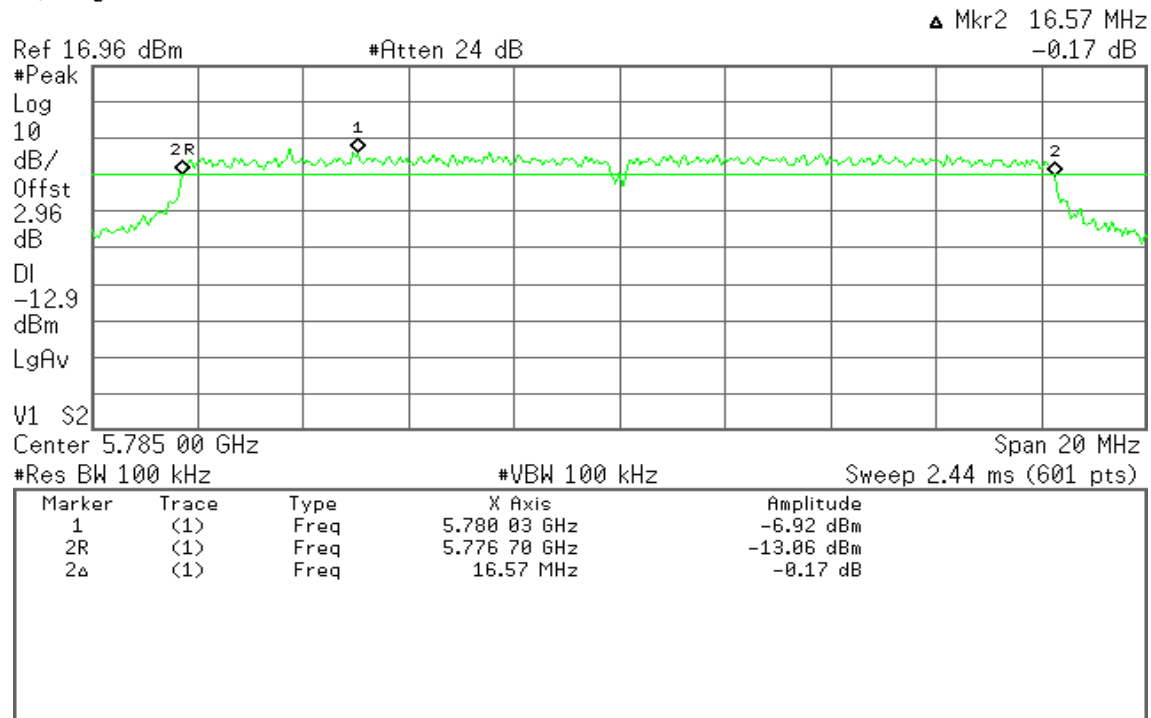




## CH 5825 / 5dBi

Agilent 21:49:38 Oct 12, 2004

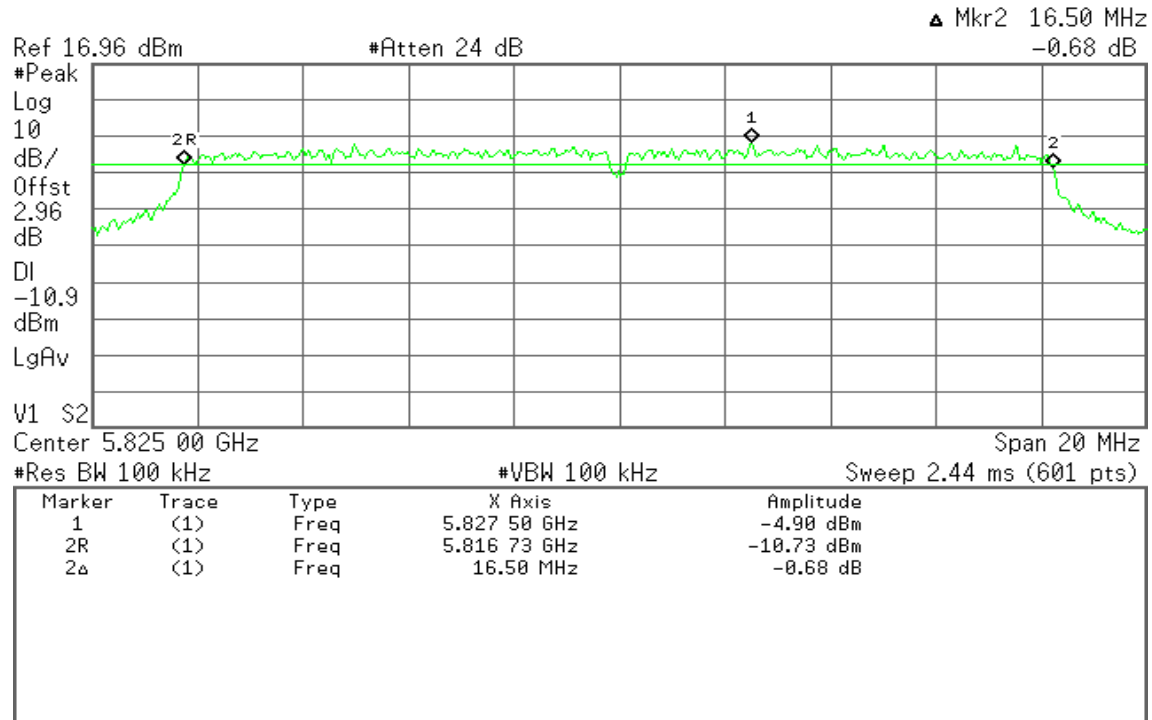


**IEEE 802.11a Turbo mode****CH 5760 / 5dBi**

\* Agilent 21:52:01 Oct 12, 2004

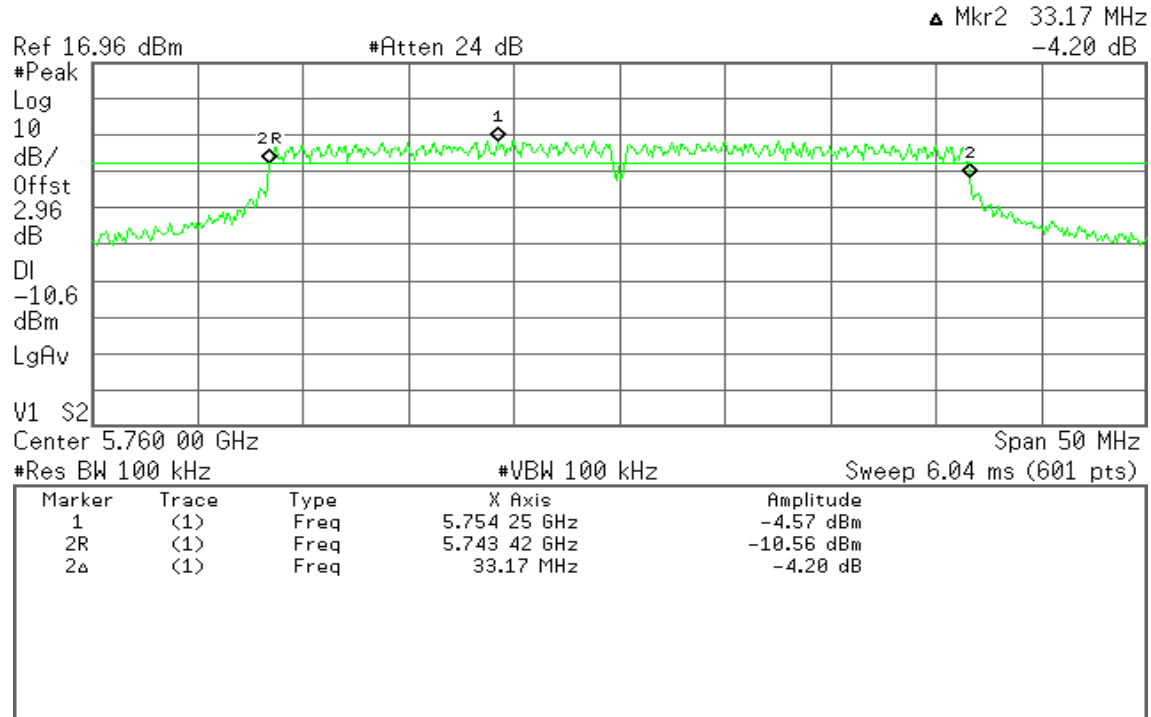
**CH 5800 / 5dBi**

\* Agilent 21:52:52 Oct 12, 2004

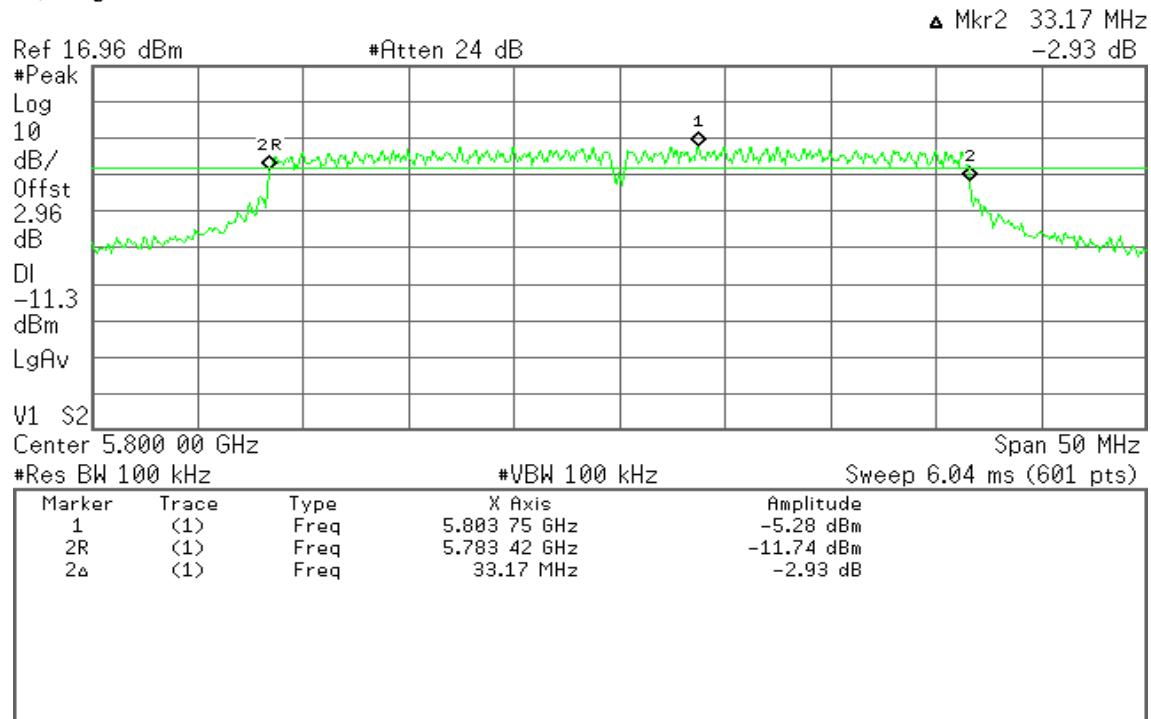


**IEEE 802.11a Base mode / Panel Directional Antenna****CH 5745 / 18dBi**

\* Agilent 15:38:37 Oct 6, 2004

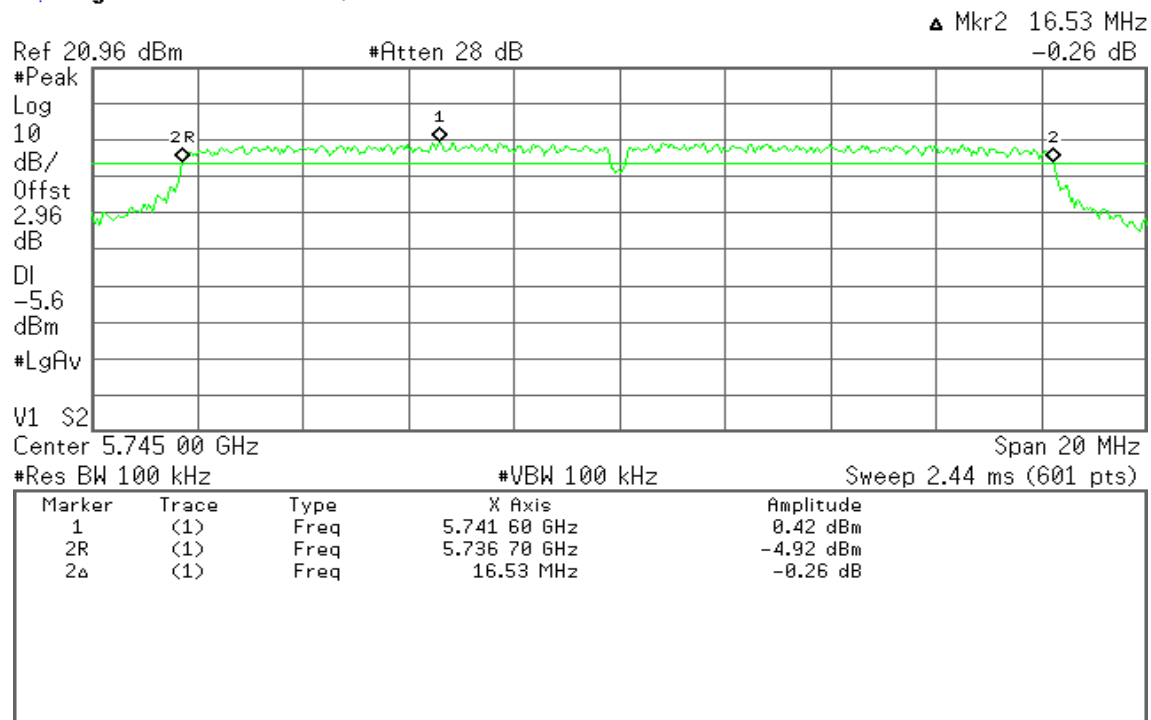**CH 5785 / 18dBi**

\* Agilent 15:40:23 Oct 6, 2004

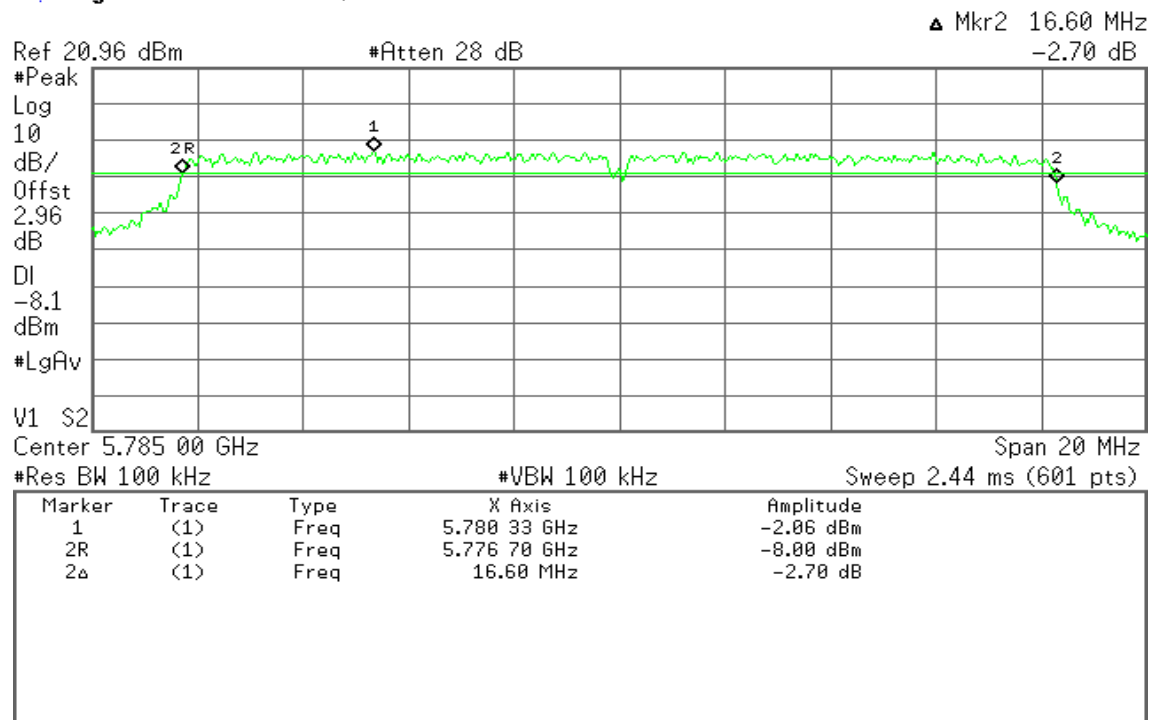







## CH 5825 / 18dBi

Agilent 15:44:08 Oct 6, 2004

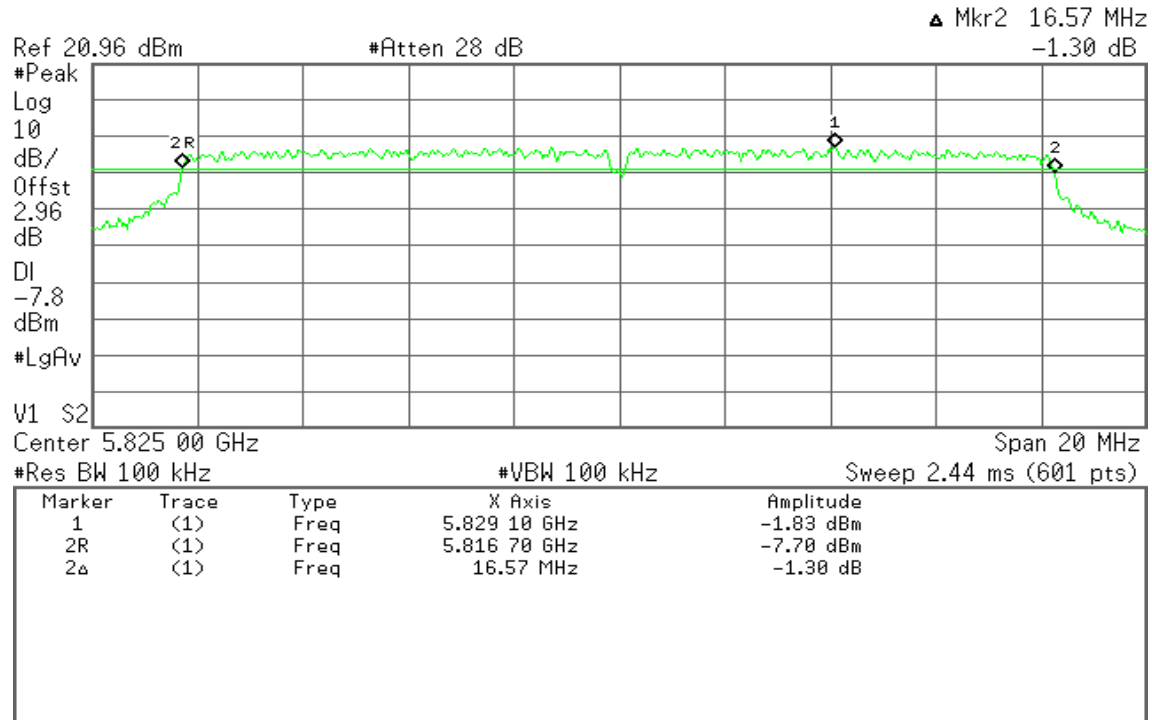


**IEEE 802.11a Turbo mode****CH 5760 / 18dBi**

\* Agilent 15:46:15 Oct 6, 2004

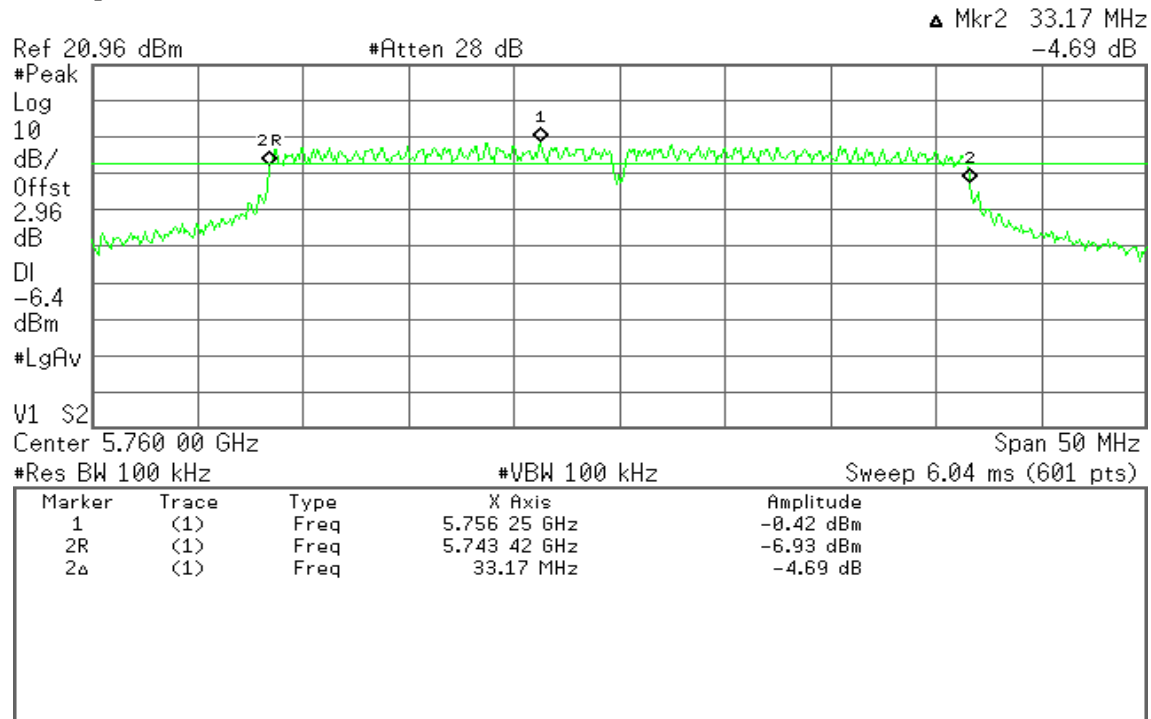**CH 5800 / 18dBi**

\* Agilent 15:47:42 Oct 6, 2004

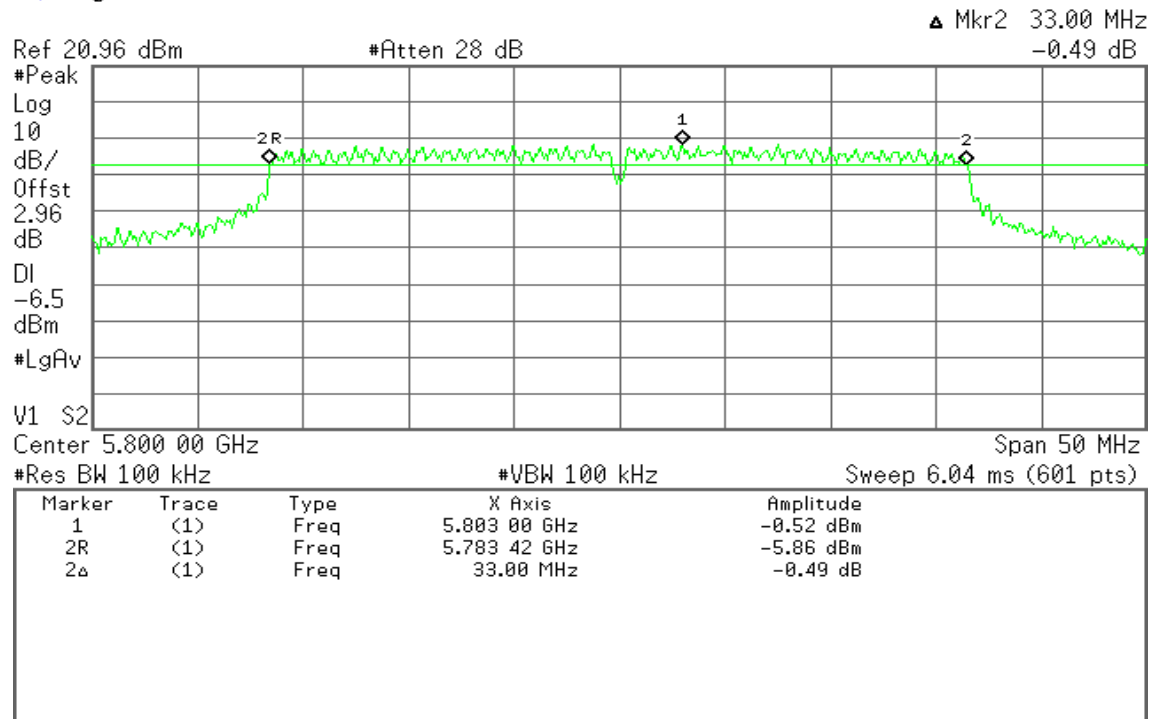



## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

**TEST RESULTS***No non-compliance noted***Dual-Band Omni-Directional Antenna**

Channel	Frequency (MHz)		Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Antenna Gain (dBi)	Limit (W)	Test Result
Low	Base mode	5745	11.04	2.96	14.00	0.02512	5	1	Pass
Mid		5785	10.64	2.96	13.60	0.02291			
High		5825	10.53	2.96	13.49	0.02234			
Low	Turbo mode	5760	12.44	2.96	15.40	0.03467			
High		5800	12.74	2.96	15.70	0.03715			

**Panel Directional Antenna**

Channel	Frequency (MHz)		Output Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Antenna Gain (dBi)	Limit (W)	Test Result
Low	Base mode	5745	11.39	2.96	14.35	0.02723	18	1	Pass
Mid		5785	10.30	2.96	13.26	0.02118			
High		5825	10.94	2.96	13.90	0.02455			
Low	Turbo mode	5760	12.11	2.96	15.07	0.03214			
High		5800	12.40	2.96	15.36	0.03436			




## Test Plot

### IEEE 802.11a Base mode / Dual-Band Omni-Directional Antenna

#### CH 5745 / 5dBi

\* Agilent 21:25:21 Oct 12, 2004

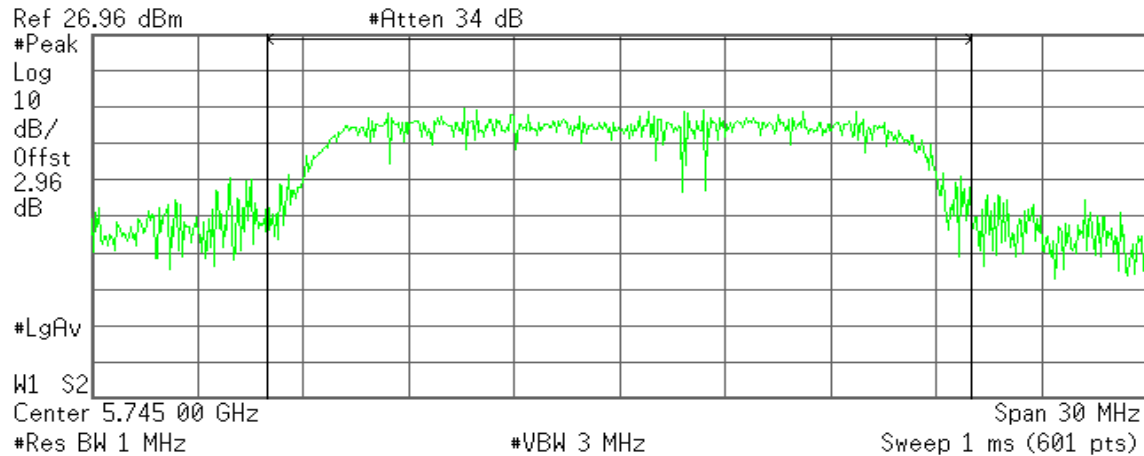

Channel Power


14.00 dBm /20.00000 MHz

Power Spectral Density

-59.01 dBm/Hz

#### CH 5785 / 5dBi

\* Agilent 10:27:13 Oct 14, 2004

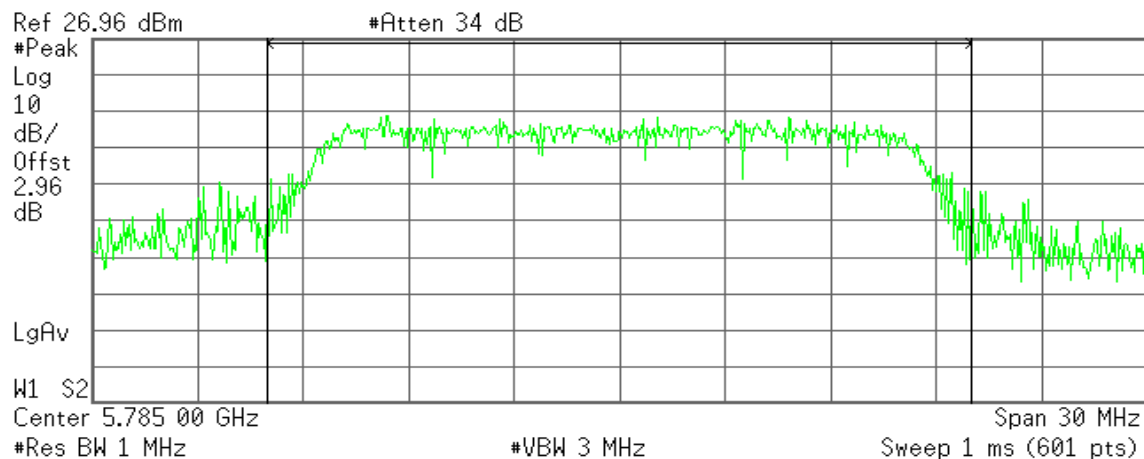

Channel Power

13.60 dBm /20.00000 MHz


Power Spectral Density

-59.41 dBm/Hz



## CH 5825 / 5dBi

✱ Agilent 10:31:22 Oct 14, 2004

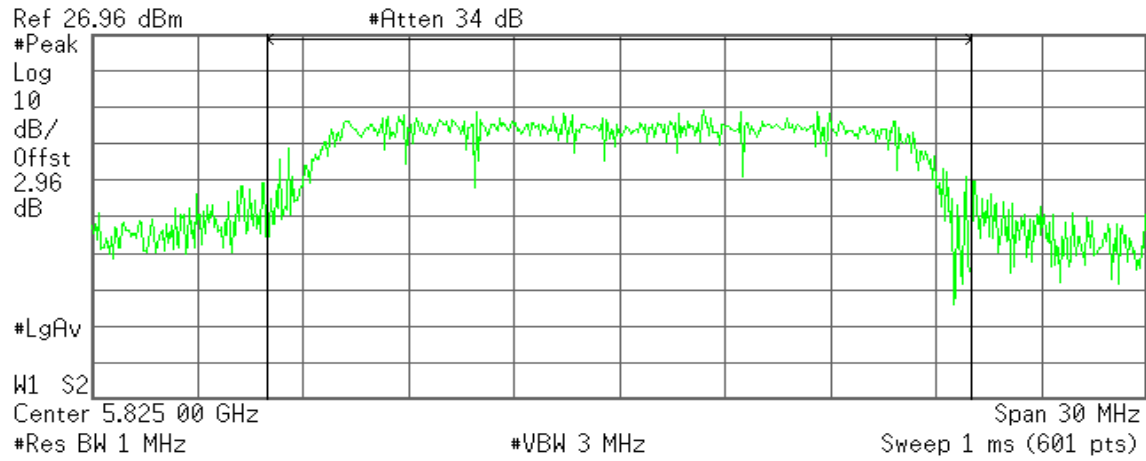

**Channel Power**

**13.49 dBm /20.0000 MHz**

**Power Spectral Density**


**-59.52 dBm/Hz**



## IEEE 802.11a Turbo mode

### CH 5760 / 5dBi

Agilent 21:33:03 Oct 12, 2004

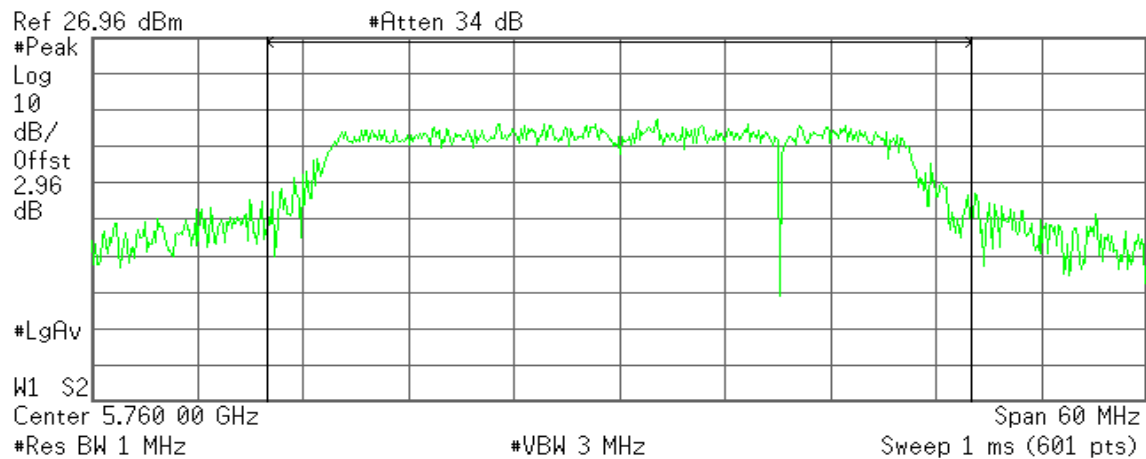

Channel Power


15.40 dBm /40.0000 MHz

Power Spectral Density

-60.62 dBm/Hz

### CH 5800 / 5dBi

Agilent 21:35:09 Oct 12, 2004

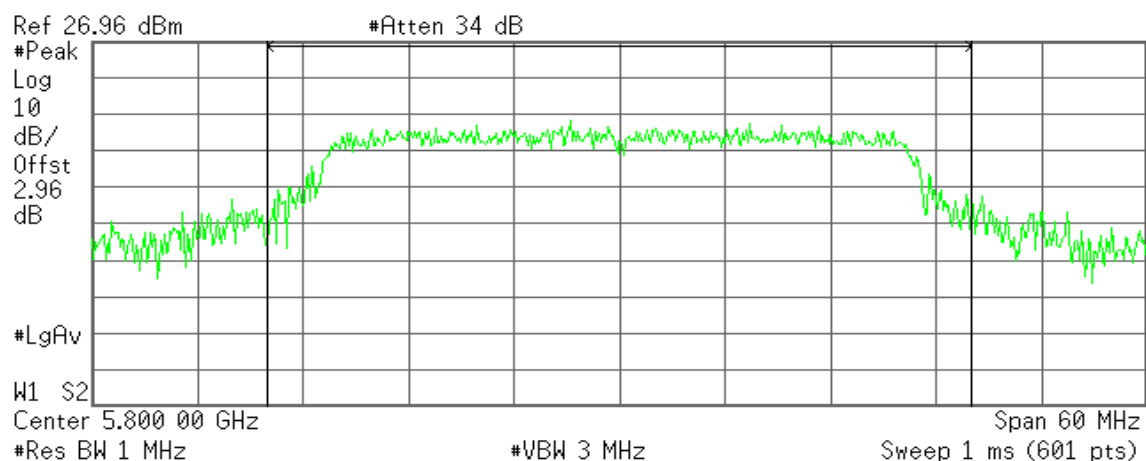

Channel Power

15.70 dBm /40.0000 MHz

Power Spectral Density


-60.32 dBm/Hz



## IEEE 802.11a Base mode / Panel Directional Antenna

### CH 5745 / 18dBi

Agilent 20:03:34 Oct 12, 2004

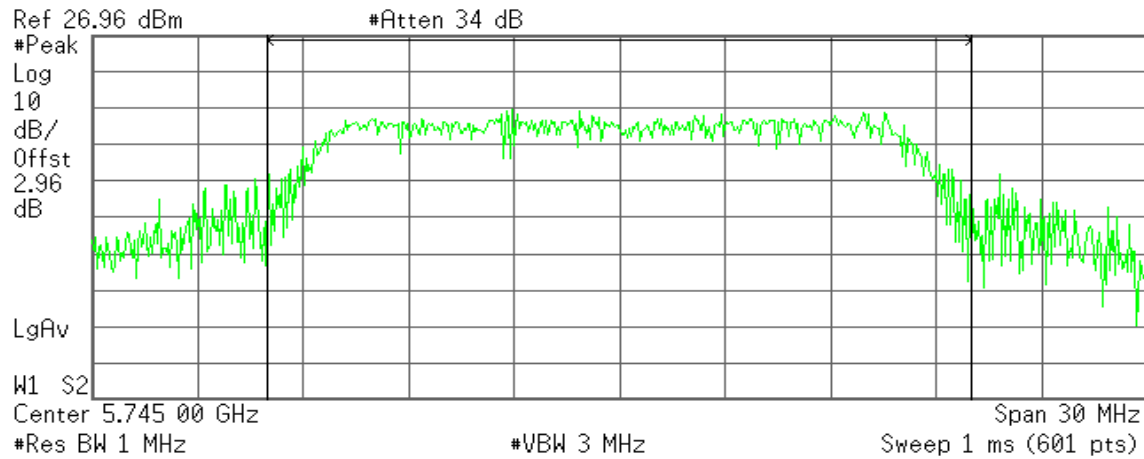

Channel Power


14.35 dBm /20.0000 MHz

Power Spectral Density

-58.66 dBm/Hz

### CH 5785 / 18dBi

Agilent 20:04:55 Oct 12, 2004

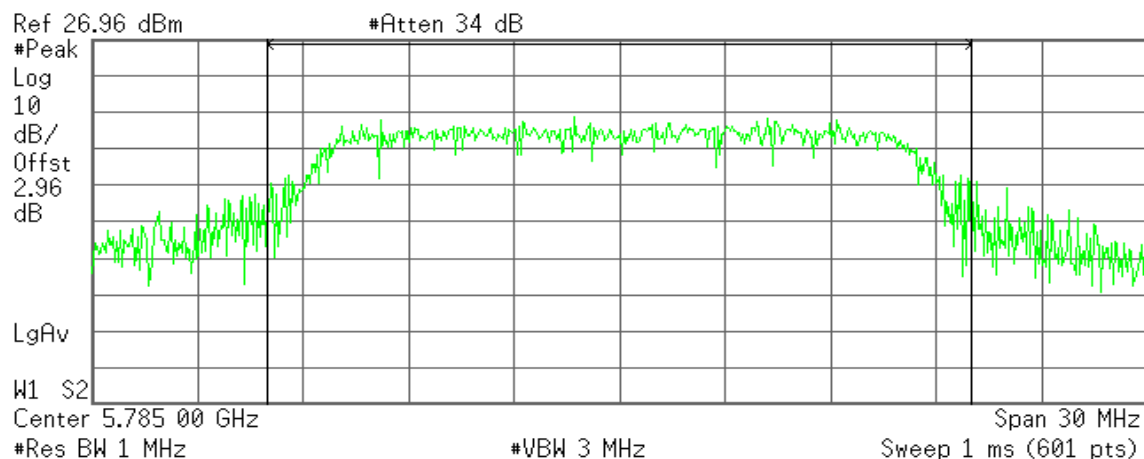

Channel Power

13.26 dBm /20.0000 MHz

Power Spectral Density


-59.75 dBm/Hz





CH 5825 / 18dBi

Agilent 20:07:23 Oct 12, 2004

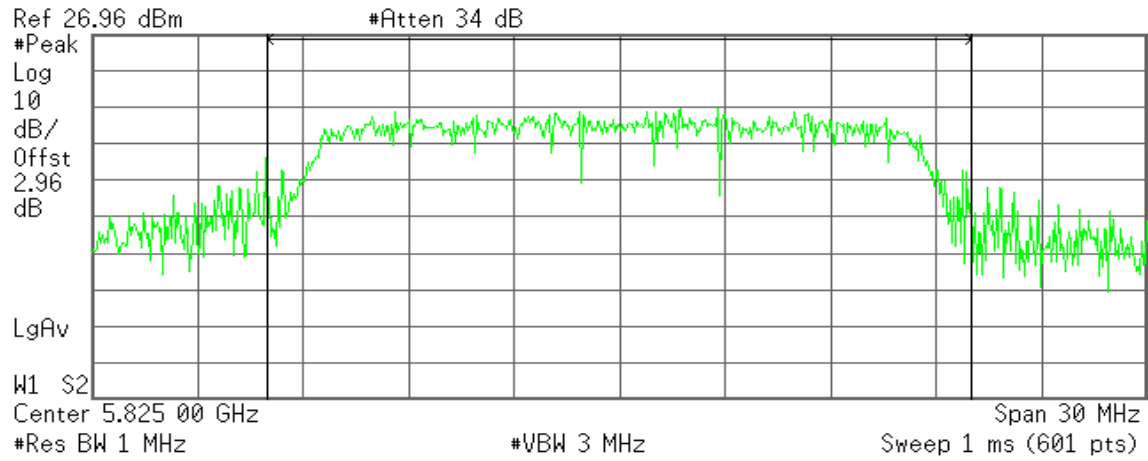

Channel Power

13.90 dBm /20.0000 MHz

Power Spectral Density


-59.11 dBm/Hz



## IEEE 802.11a Turbo mode

### CH 5760 / 18dBi

Agilent 20:09:33 Oct 12, 2004

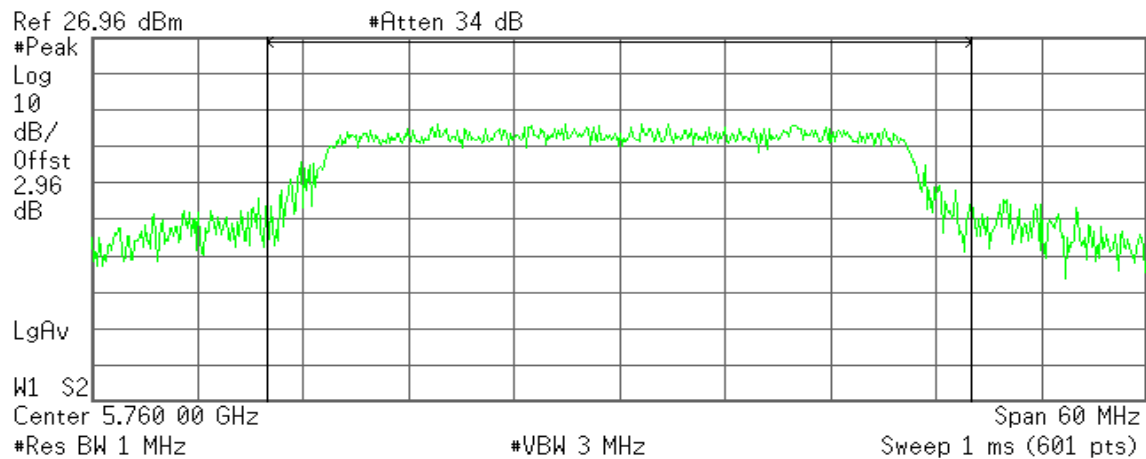

Channel Power


15.07 dBm /40.0000 MHz

Power Spectral Density

-60.95 dBm/Hz

### CH 5800 / 18dBi

Agilent 20:11:28 Oct 12, 2004

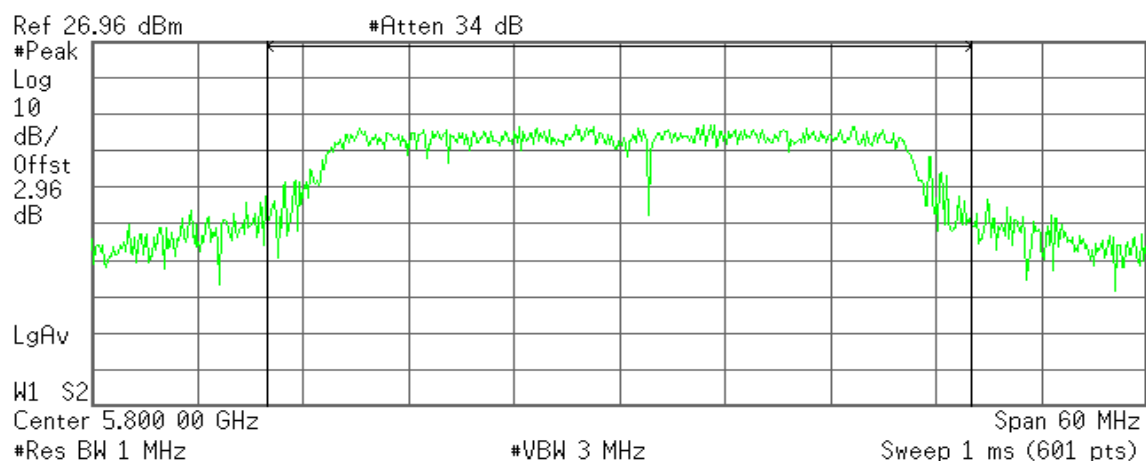

Channel Power

15.36 dBm /40.0000 MHz

Power Spectral Density

-60.66 dBm/Hz



### 7.3 PEAK POWER SPECTRAL DENSITY

#### LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

**Remark:** Each piece of equipment is scheduled for calibration once a year.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

**TEST RESULTS***No non-compliance noted***Test Data****Dual-Band Omni-Directional Antenna**

Channel	Frequency		Reading (dBm)	Factor (dB)	PPSD (dBm)	Antenna Gain (dBi)	Limit (dBm)	Result
Low	Base mode	5745	-18.47	2.96	-15.51	5	8	PASS
Mid		5785	-21.20	2.96	-18.24			
High		5825	-20.08	2.96	-17.12			
Low	Turbo mode	5760	-19.84	2.96	-16.88			
High		5800	-17.00	2.96	-14.04			

**Panel Directional Antenna**

Channel	Frequency		Reading (dBm)	Factor (dB)	PPSD (dBm)	Antenna Gain (dBi)	Limit (dBm)	Result
Low	Base mode	5745	-12.60	2.96	-9.64	18	8	PASS
Mid		5785	-12.60	2.96	-9.64			
High		5825	-14.47	2.96	-11.51			
Low	Turbo mode	5760	-15.23	2.96	-12.27			
High		5800	-14.90	2.96	-11.94			




## Test Plot

### IEEE 802.11a Base mode / Dual-Band Omni-Directional Antenna


#### CH 5745 / 5dBi

Agilent 21:56:57 Oct 12, 2004

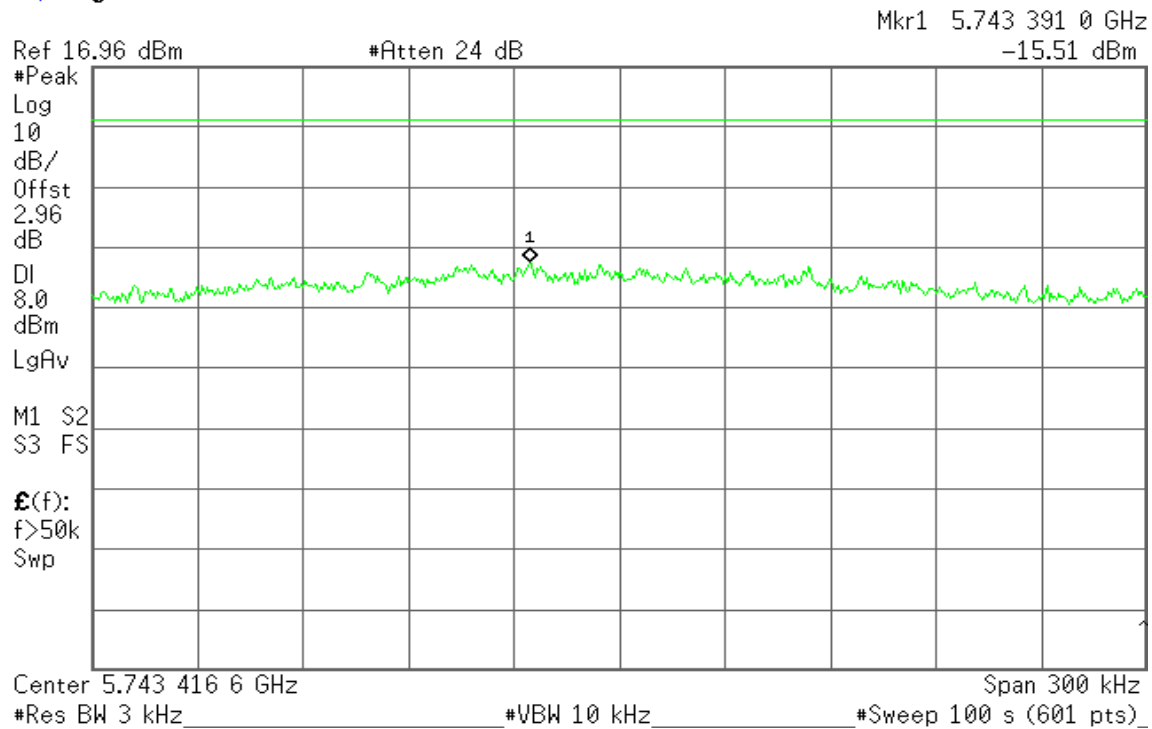

#### CH 5785 / 5dBi

Agilent 21:59:59 Oct 12, 2004

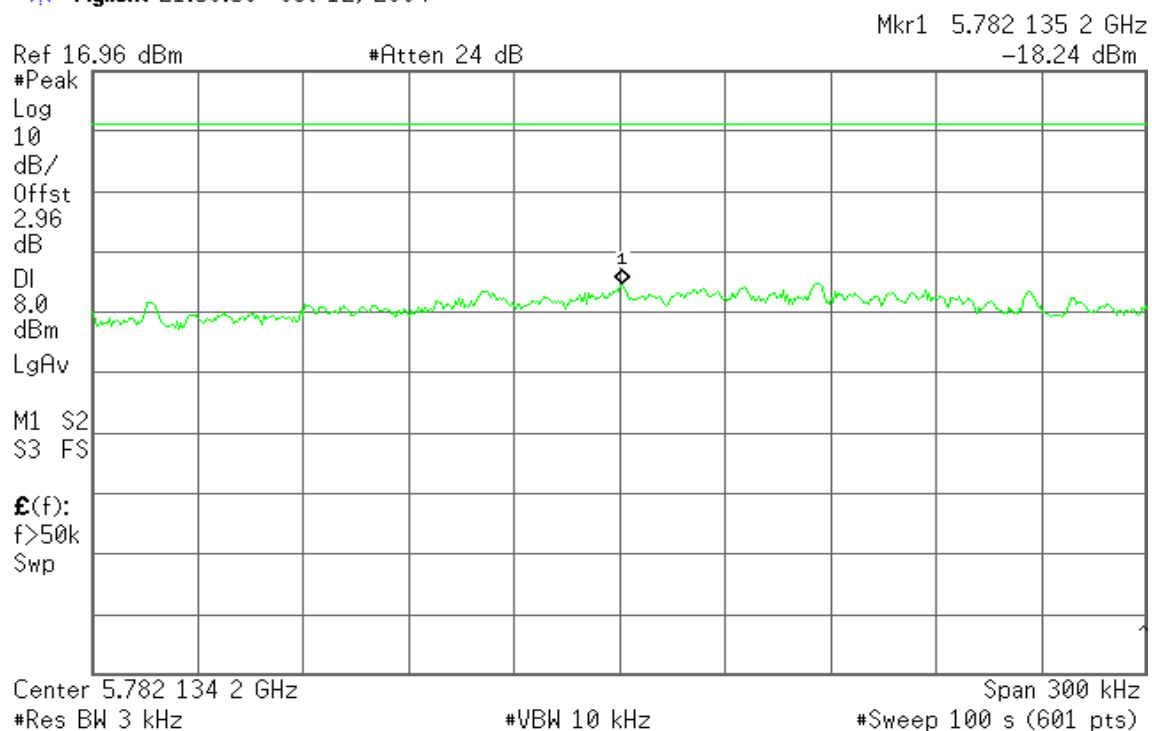



## CH 5825 / 5dBi

Agilent 22:02:42 Oct 12, 2004

Mkr1 5.824 042 5 GHz

Ref 16.96 dBm

#Atten 24 dB

-17.12 dBm

#Peak

Log

10

dB/

Offst

2.96

dB

DI

8.0

dBm

LgAv


M1 S2

S3 FS

£(f):

f>50k

Swp

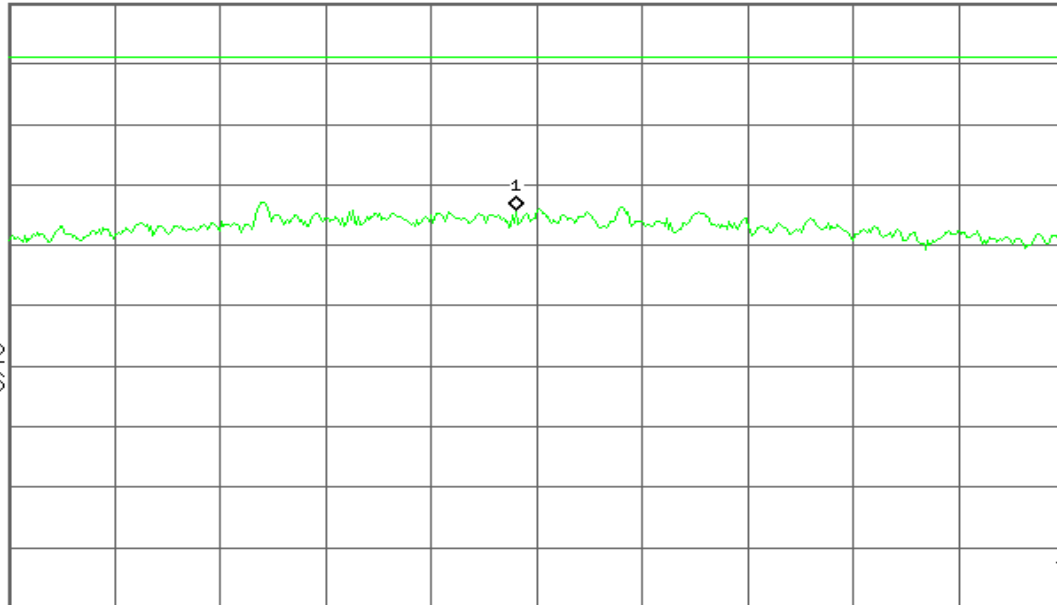

Center 5.824 048 5 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz


#Sweep 100 s (601 pts)



## IEEE 802.11a Turbo mode


### CH 5760 / 5dBi

Agilent 22:07:56 Oct 12, 2004

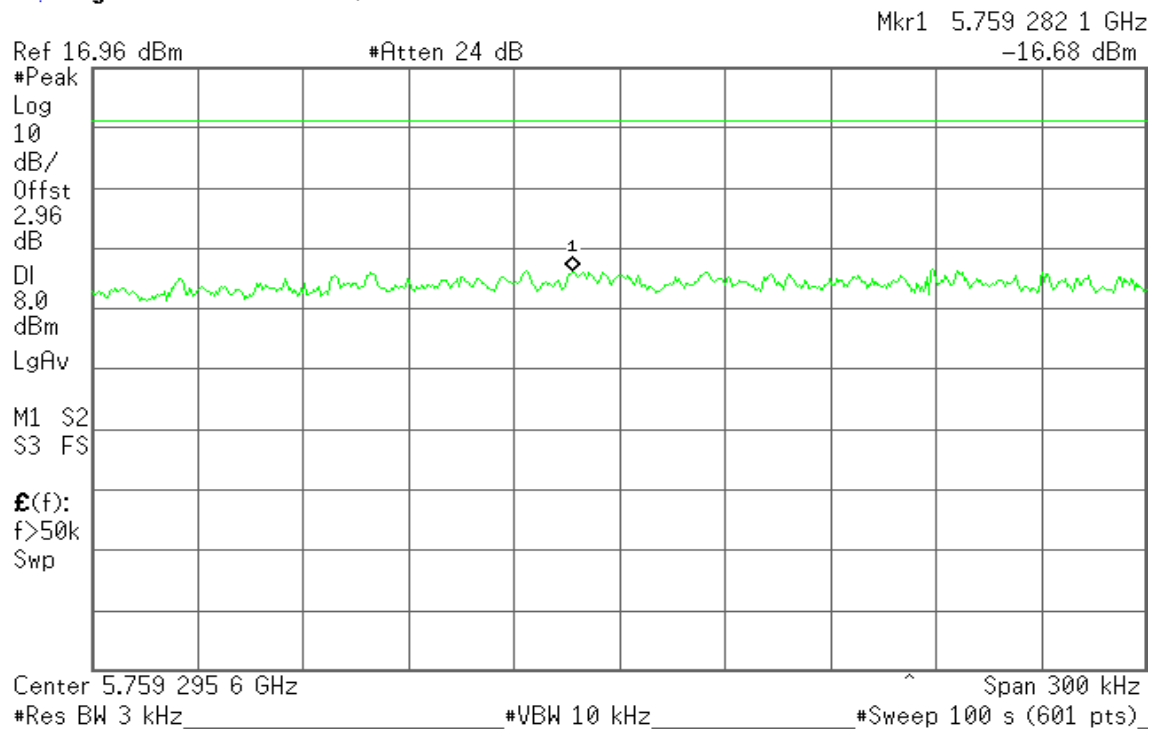

### CH 5800 / 5dBi

Agilent 22:11:11 Oct 12, 2004

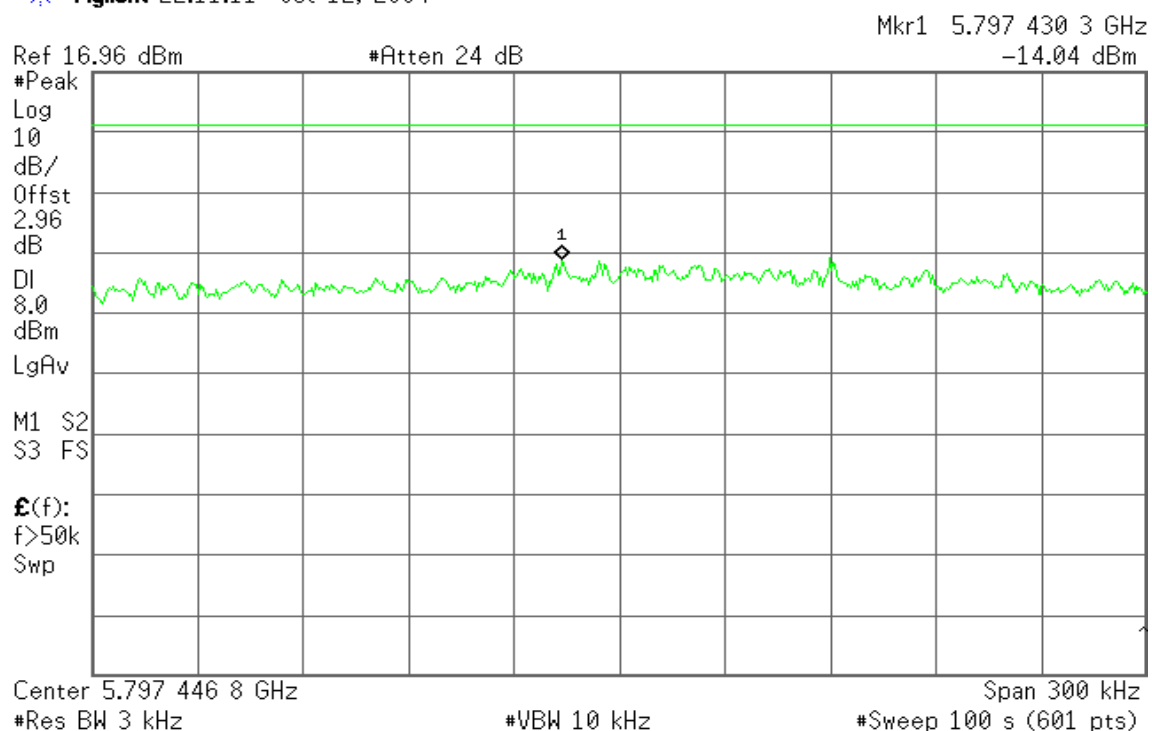




## Test Plot

### IEEE 802.11a Base mode / Panel Directional Antenna


#### CH 5745 / 18dBi

Agilent 13:24:29 Oct 6, 2004

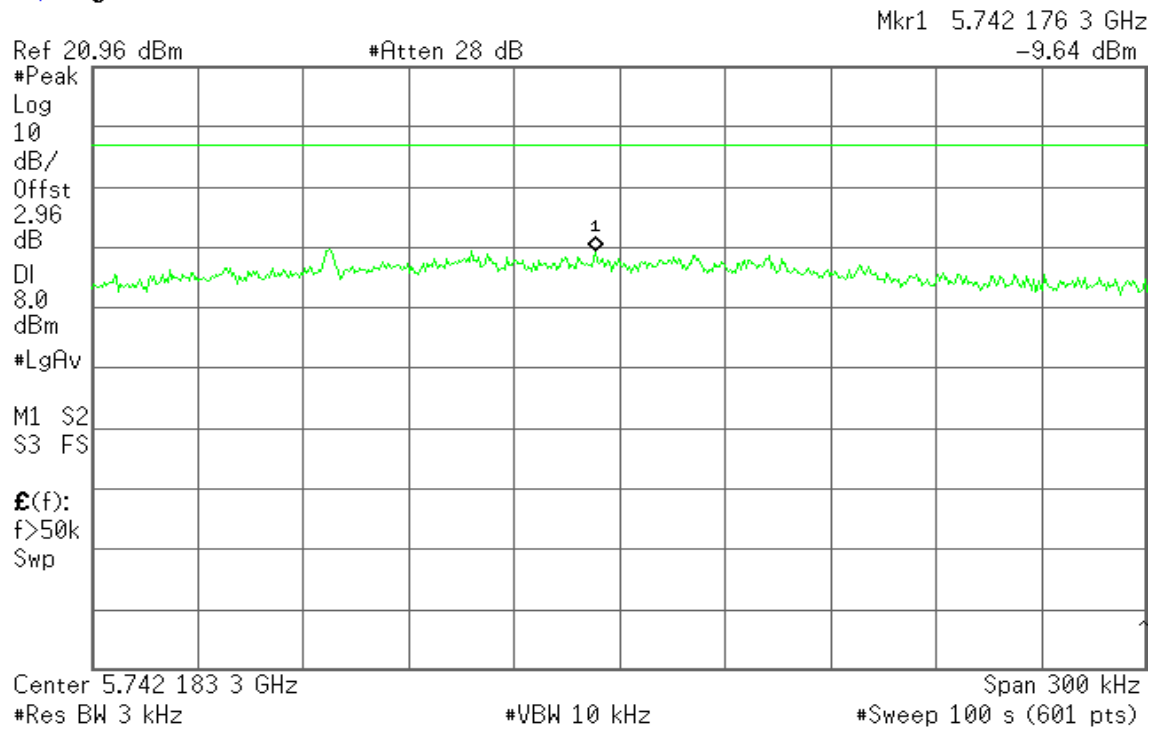

#### CH 5785 / 18dBi

Agilent 13:27:18 Oct 6, 2004

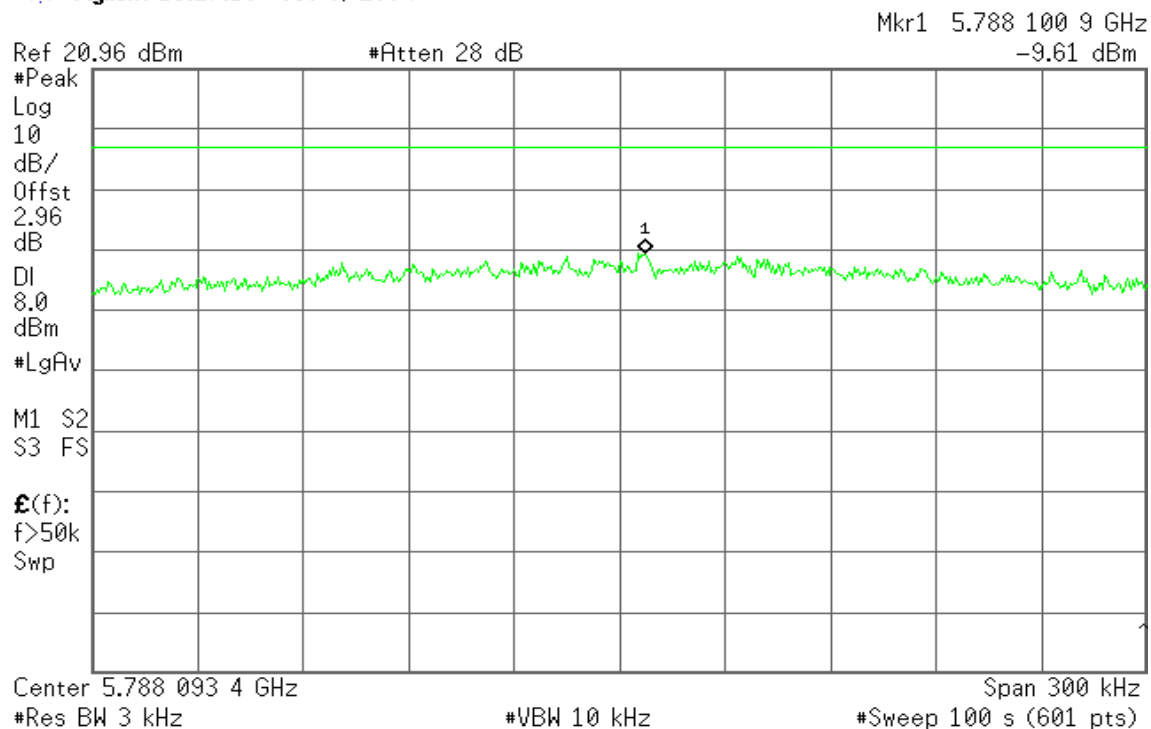






## CH 5825 / 18dBi

Agilent 13:30:00 Oct 6, 2004

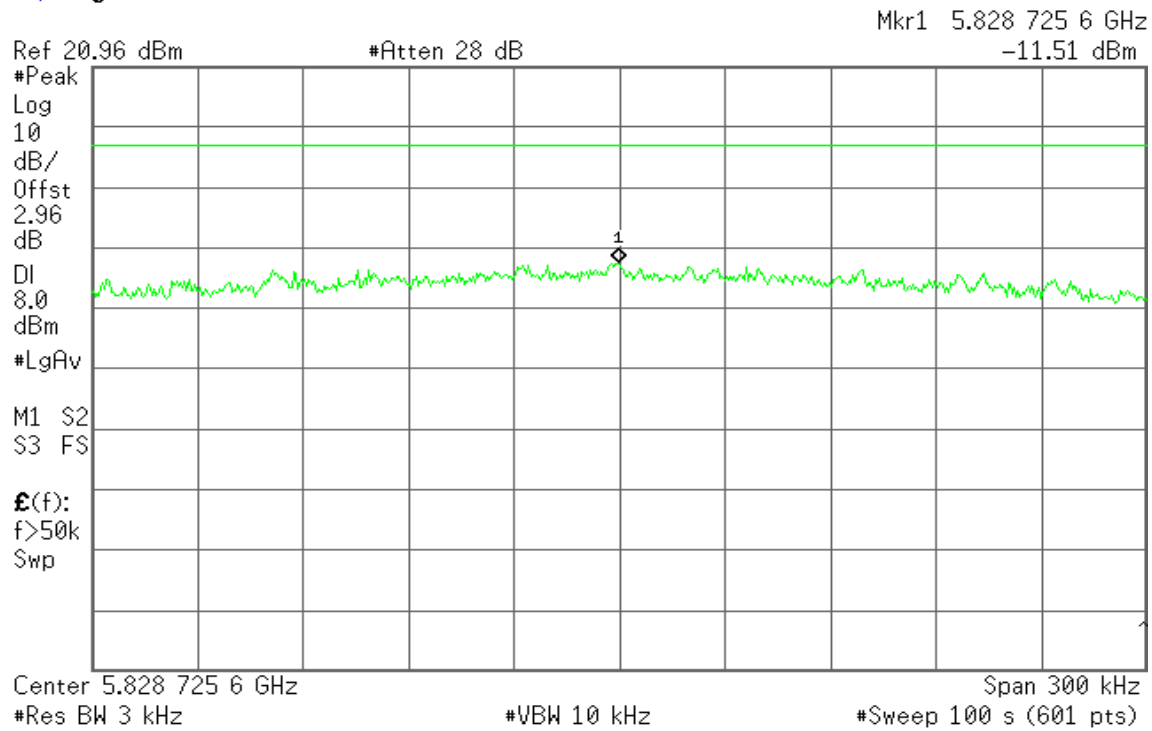




## IEEE 802.11a Turbo mode


### CH 5760 / 18dB

Agilent 13:34:15 Oct 6, 2004

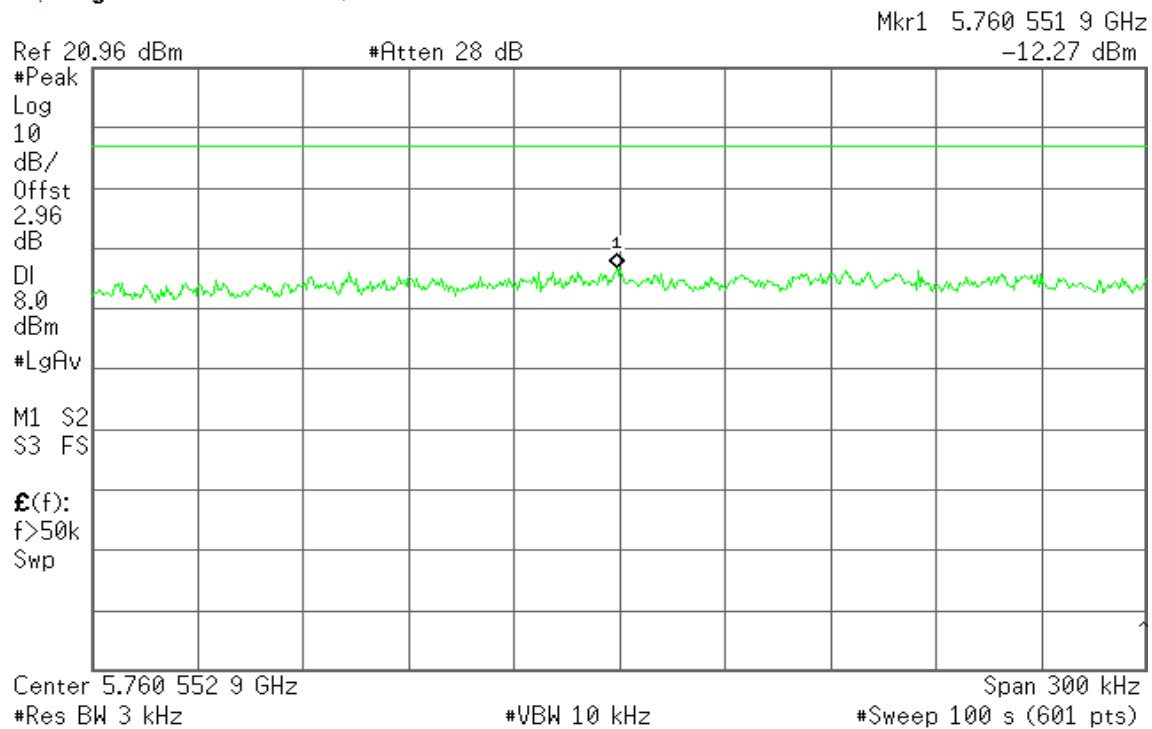

### CH 5800 / 18dB

Agilent 13:38:17 Oct 6, 2004

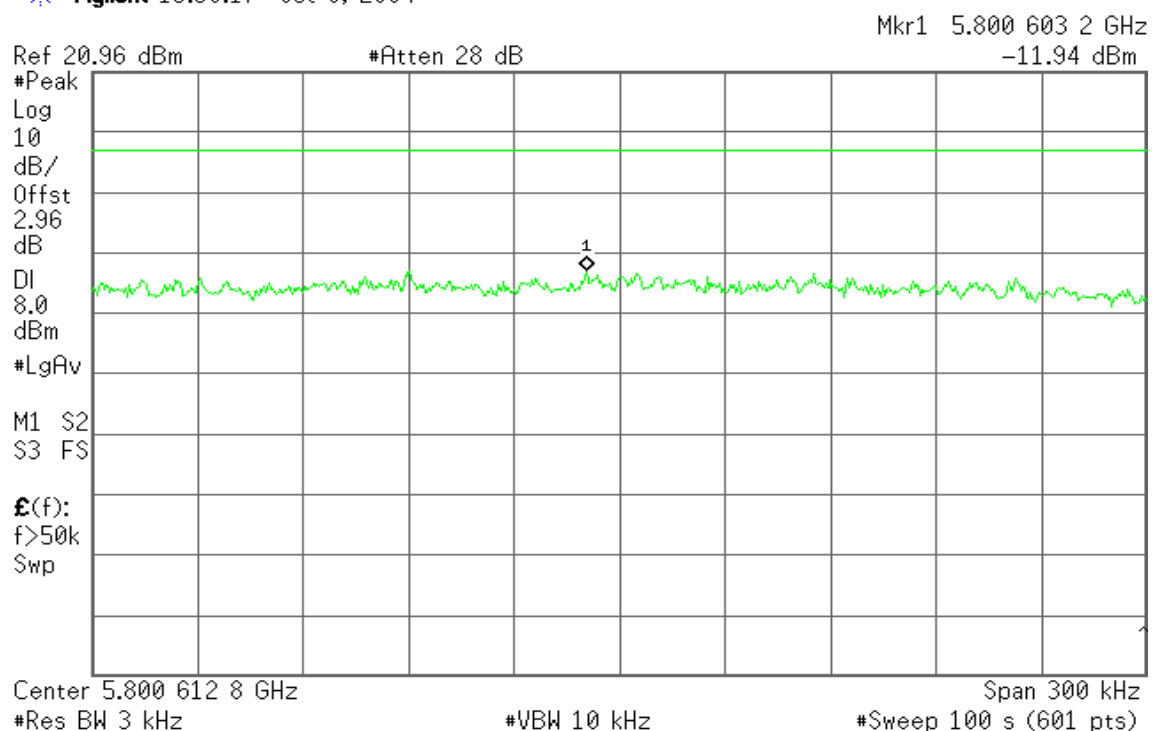



## 7.4 RADIO FREQUENCY EXPOSURE

### LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

### EUT Specification

<b>EUT</b>	WLAN 802.11a MiniPCI Card
<b>Frequency band (Operating)</b>	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.150GHz ~ 5.350GHz <input checked="" type="checkbox"/> WLAN: 5.725GHz ~ 5.850GHz <input type="checkbox"/> Others: _____
<b>Device category</b>	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others: _____
<b>Exposure classification</b>	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm <sup>2</sup> ) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm <sup>2</sup> )
<b>Antenna diversity</b>	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity
<b>Max. output power</b>	Dual-Band Omni-Directional Antenna / 5dBi: 15.70dBm (37.15mW) Panel Directional Antenna / 18dBi: 15.36dBm (34.35mW)
<b>Antenna gain (Max)</b>	Dual-Band Omni-Directional Antenna: 5dBi / Numeric gain: 3.162 Panel Directional Antenna: 18dBi / Numeric gain: 63.095
<b>Evaluation applied</b>	<input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A

#### **Note:**

1. The maximum output power is 15.70dBm (37.15mW) at 5800Hz (with 63.095 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

### TEST RESULTS

No non-compliance noted.

**Calculation**

Given  $E = \sqrt{\frac{30 \times P \times G}{d}}$  &  $S = \frac{E^2}{3770}$

Where  $E$  = Field Strength in Volts / meter

$P$  = Power in Watts

$G$  = Numeric antenna gain

$d$  = Distance in meters

$S$  = Power Density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{\frac{30 \times P \times G}{3770 \times S}}$$

Changing to units of mW and cm, using:

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = 100 * d (m)$$

Yields

$$d = 100 \times \sqrt{\frac{30 \times (P / 1000) \times G}{3770 \times S}} = 0.282 \times \sqrt{\frac{P \times G}{S}}$$

Where  $d$  = distance in cm

$P$  = Power in mW

$G$  = Numeric antenna gain

$S$  = Power Density in mW / cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

Yields

$$d = 0.282 \times \frac{10^{(P+G)/20}}{\sqrt{20}}$$

**Equation 1**

Where  $d$  = MPE safe distance in cm

$P$  = Power in dBm

$G$  = Antenna Gain in dBi

$S$  = Power Density Limit in mW / cm<sup>2</sup>



### **Maximum Permissible Exposure**

EUT output power = 37.15mW

Antenna Gain = 63.095 (Numeric gain)

S = 1.0 mW / cm<sup>2</sup> from 1.1310 Table 1

Substituting these parameters into the above Equation 1:

→ MPE Safe Distance = 13.657 cm

*(For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.)*



## 7.5 SPURIOUS EMISSIONS

### 7.5.1 Conducted Measurement

#### **LIMIT**


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/10/2005

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### **Test Configuration**



#### **TEST PROCEDURE**

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

#### **TEST RESULTS**


*No non-compliance noted*

**Test Plot****IEEE 802.11a Base mode / Dual-Band Omni-Directional Antenna****CH 5745 / 5dBi****30MHz ~ 8GHz**

\* Agilent 22:13:49 Oct 12, 2004

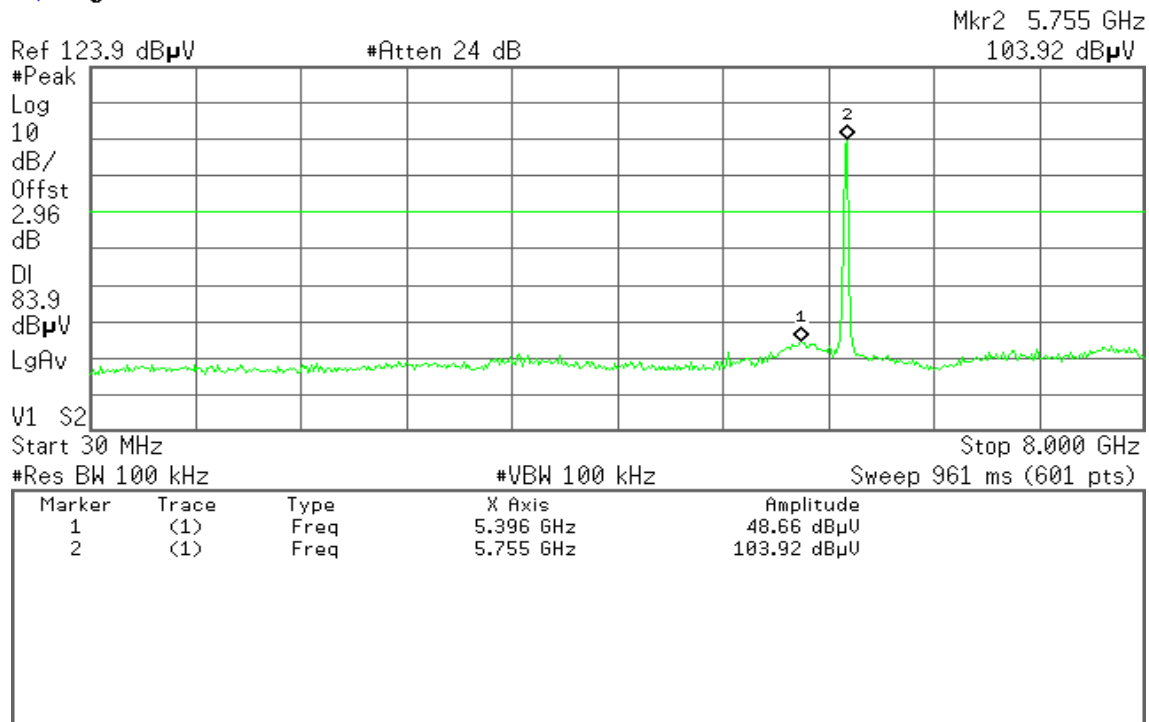
**8GHz ~ 40GHz**

\* Agilent 22:14:28 Oct 12, 2004

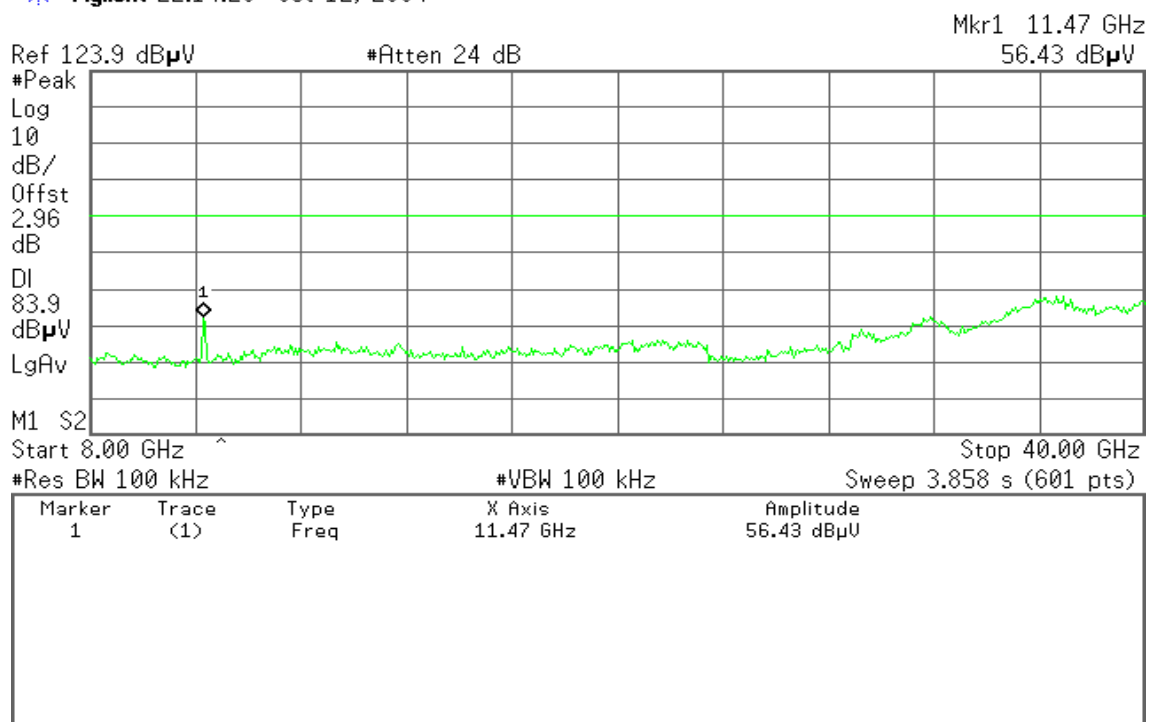


**CH 5785 / 5dBi****30MHz ~ 8GHz**

\* Agilent 22:16:12 Oct 12, 2004

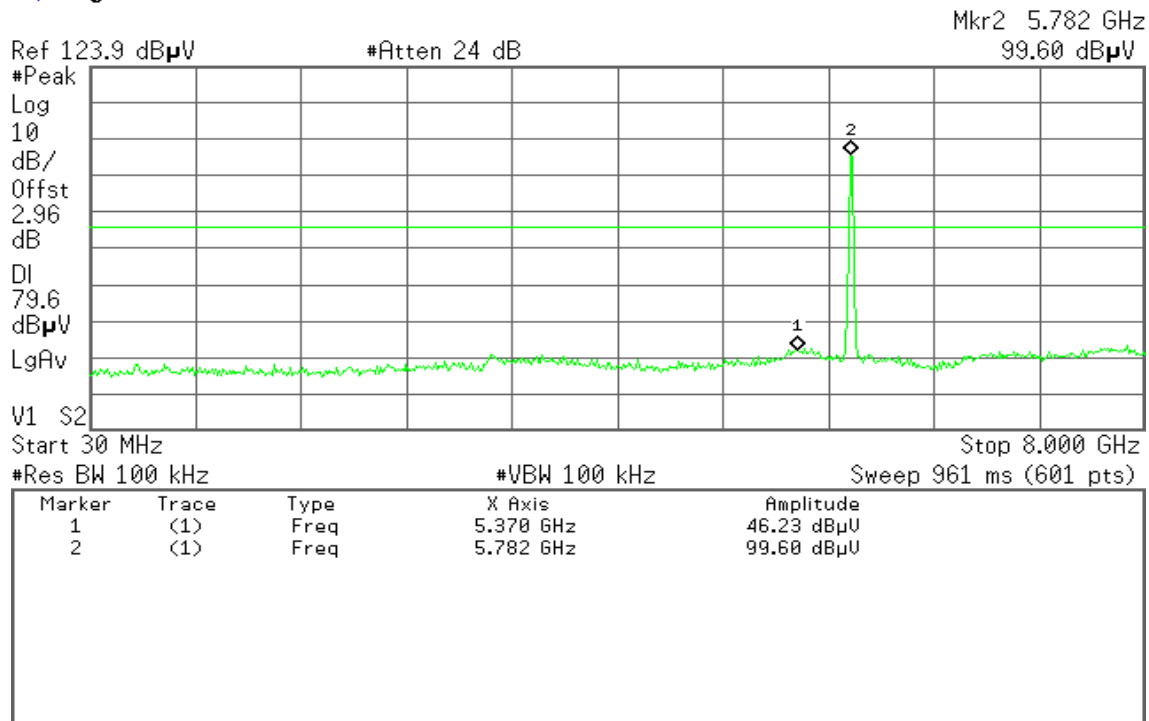**8GHz ~ 40GHz**


\* Agilent 22:16:45 Oct 12, 2004

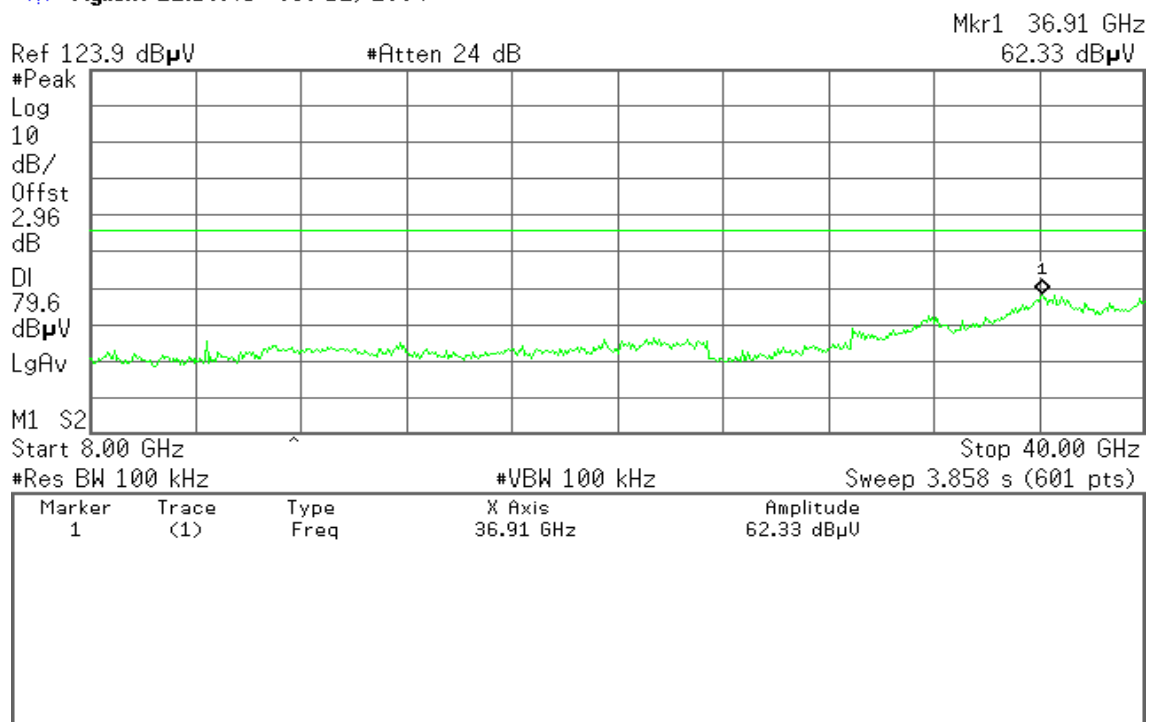




**CH 5825 / 5dBi****30MHz ~ 8GHz**

\* Agilent 22:17:33 Oct 12, 2004

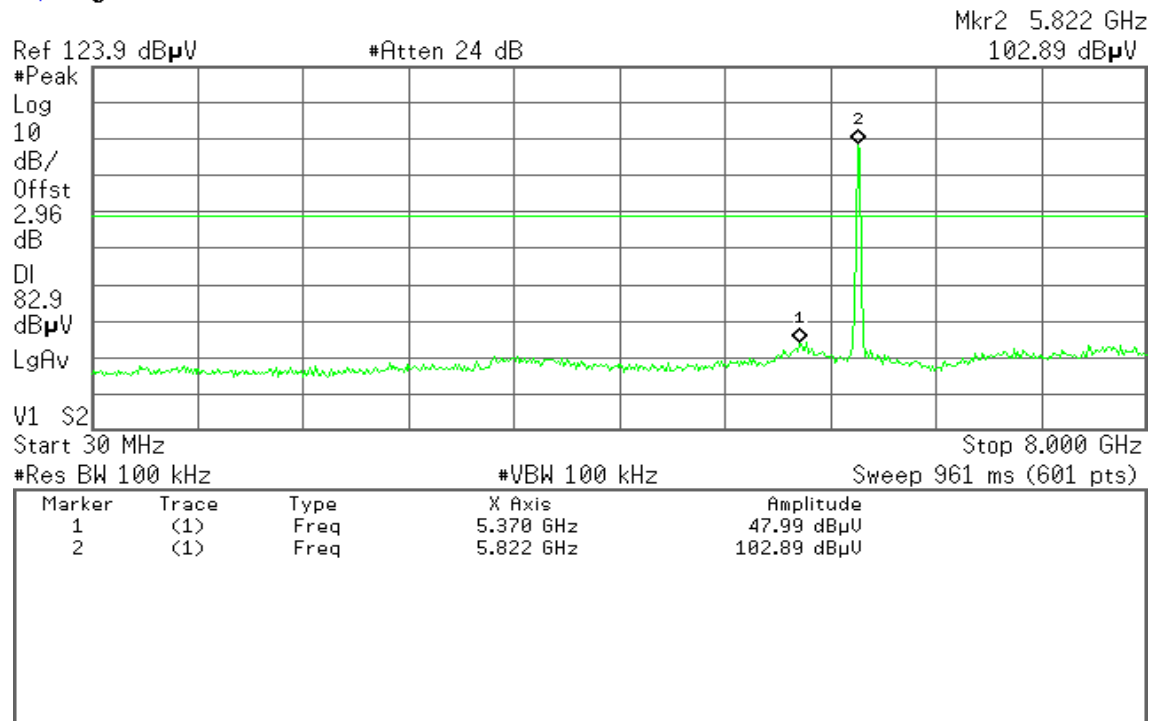
**8GHz ~ 40GHz**

\* Agilent 22:18:04 Oct 12, 2004

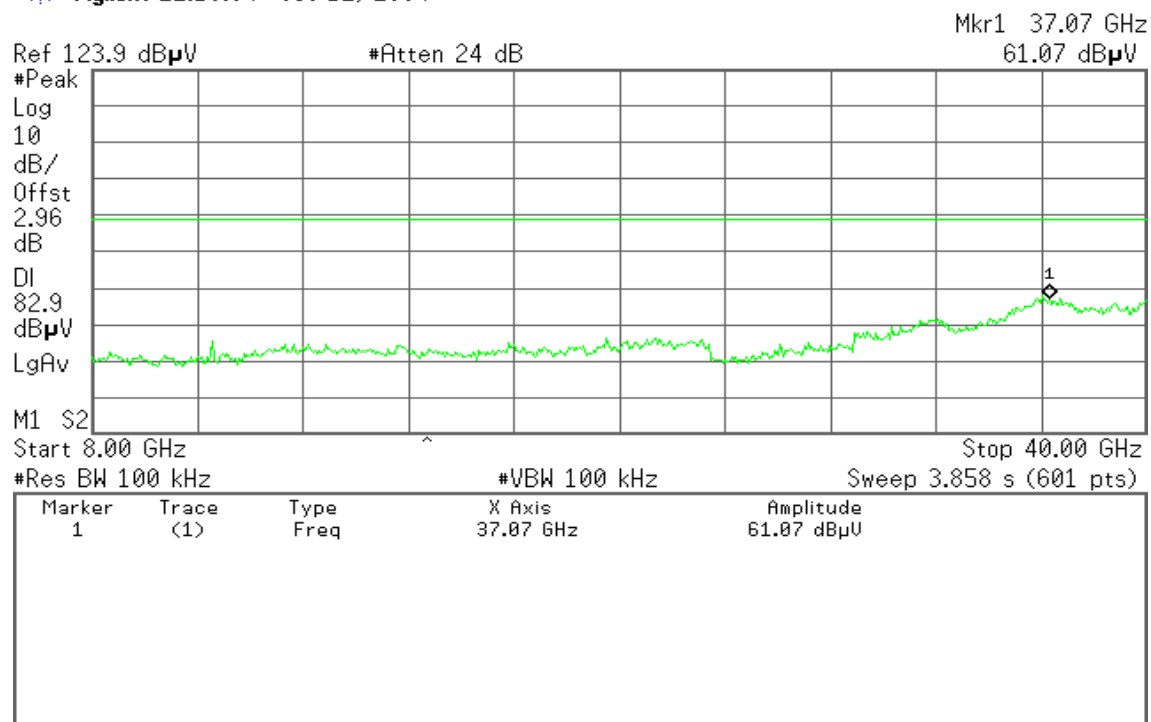


**IEEE 802.11a Turbo mode****CH 5760 / 5dBi****30MHz ~ 8GHz**

\* Agilent 22:20:10 Oct 12, 2004

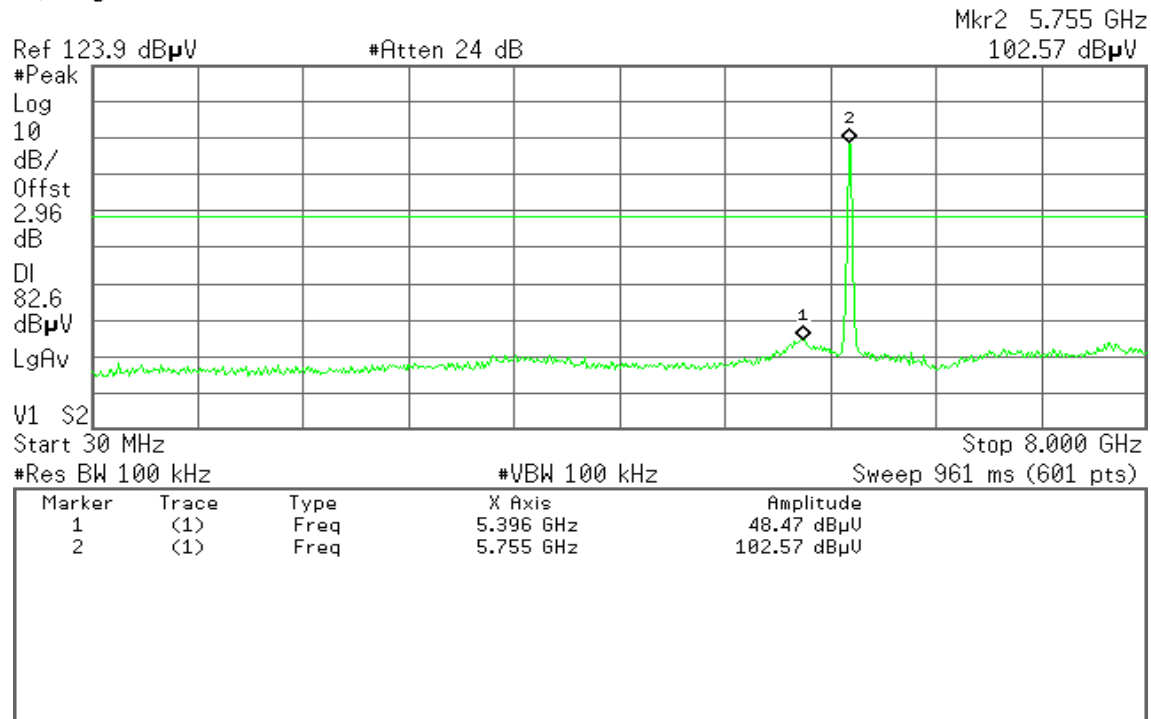
**8GHz ~ 40GHz**

\* Agilent 22:20:46 Oct 12, 2004

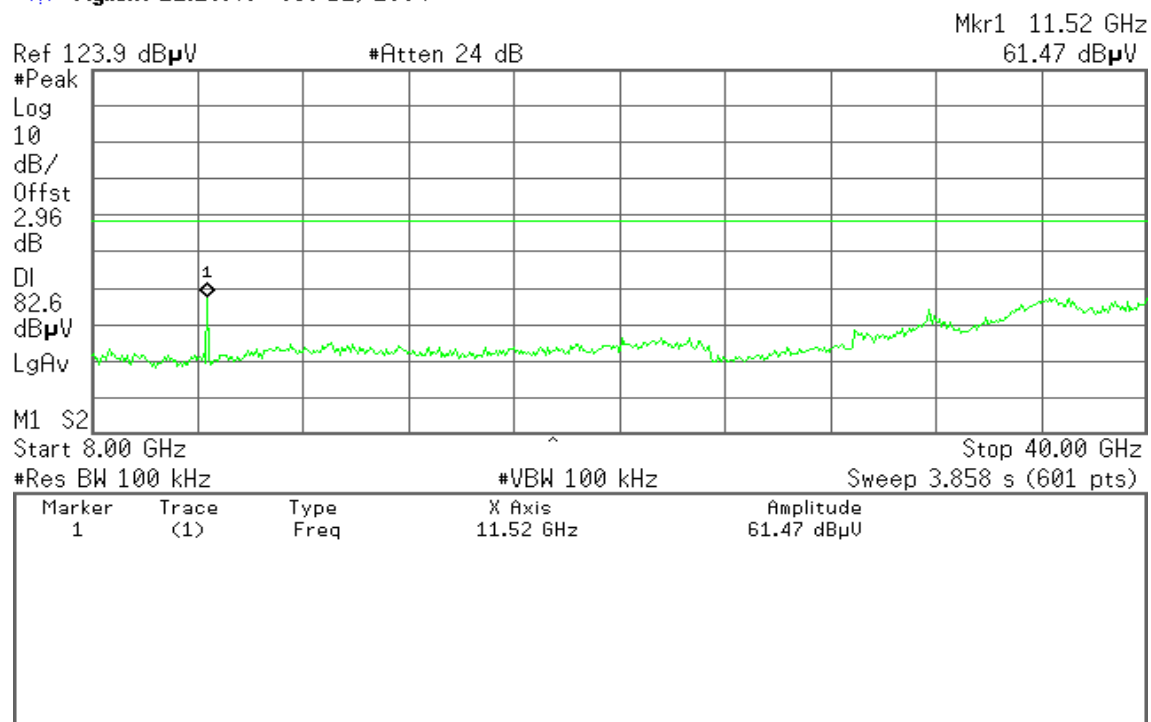


**CH 5800 / 5dBi****30MHz ~ 8GHz**

\* Agilent 22:21:39 Oct 12, 2004

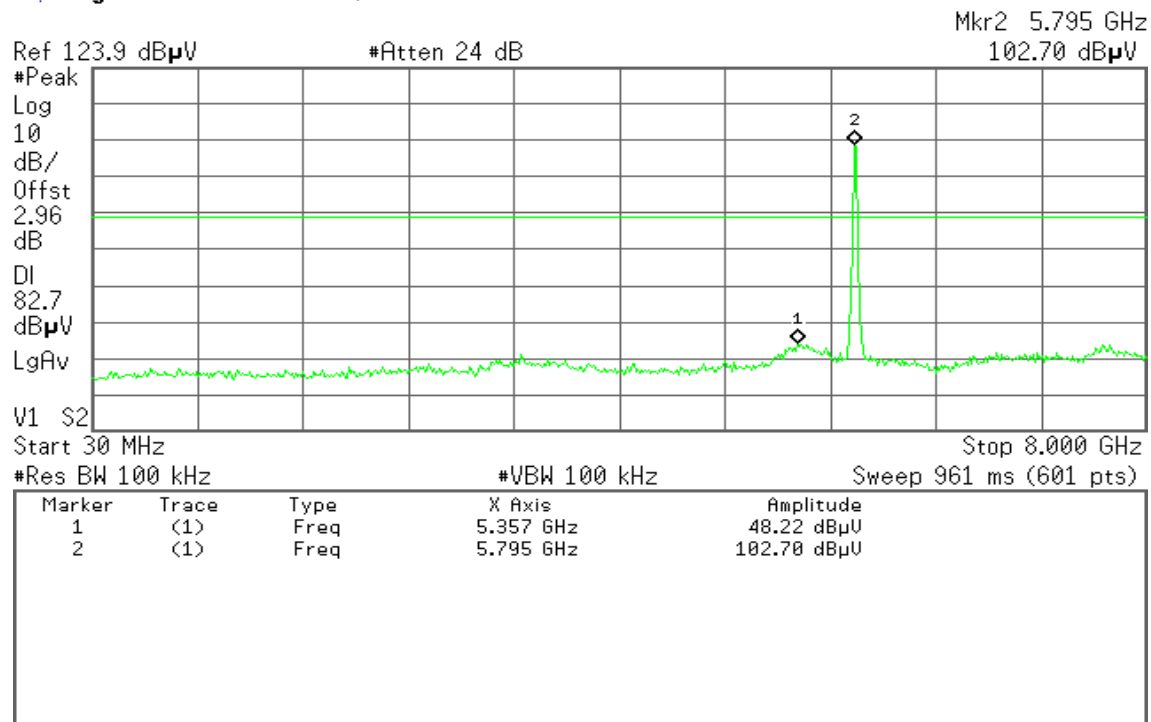
**8GHz ~ 40GHz**

\* Agilent 22:32:48 Oct 12, 2004

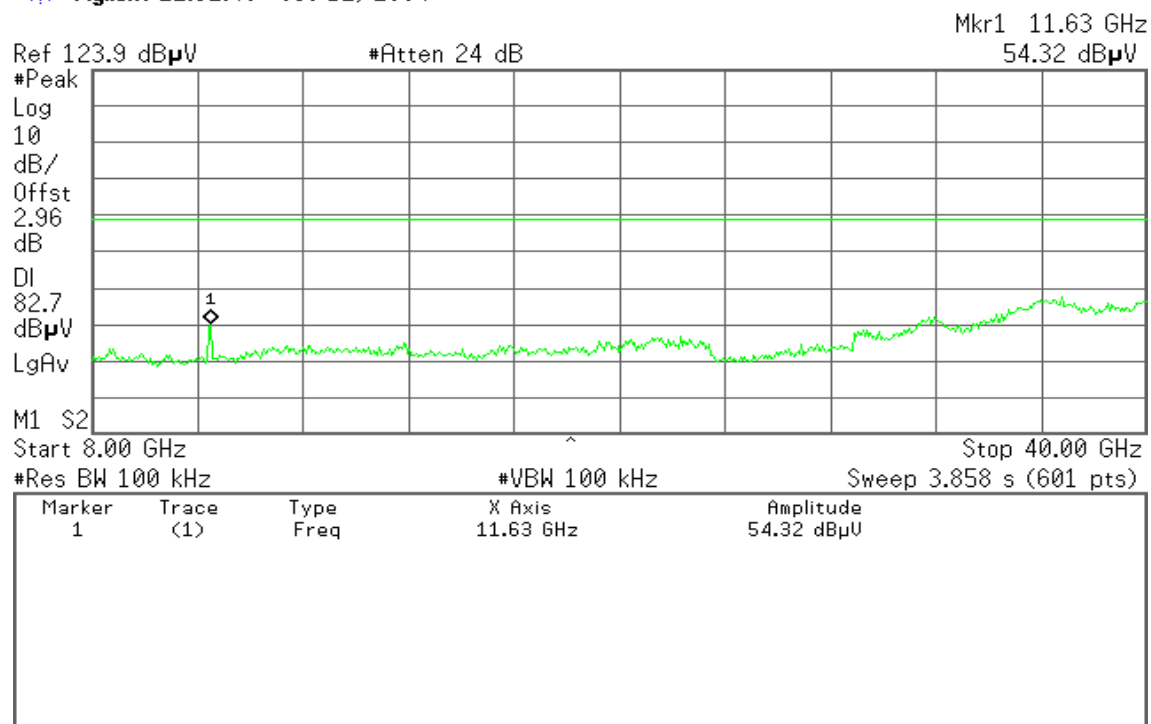


**IEEE 802.11a Base mode / Panel Directional Antenna****CH 5745 / 18dBi****30MHz ~ 8GHz**

\* Agilent 15:50:01 Oct 6, 2004

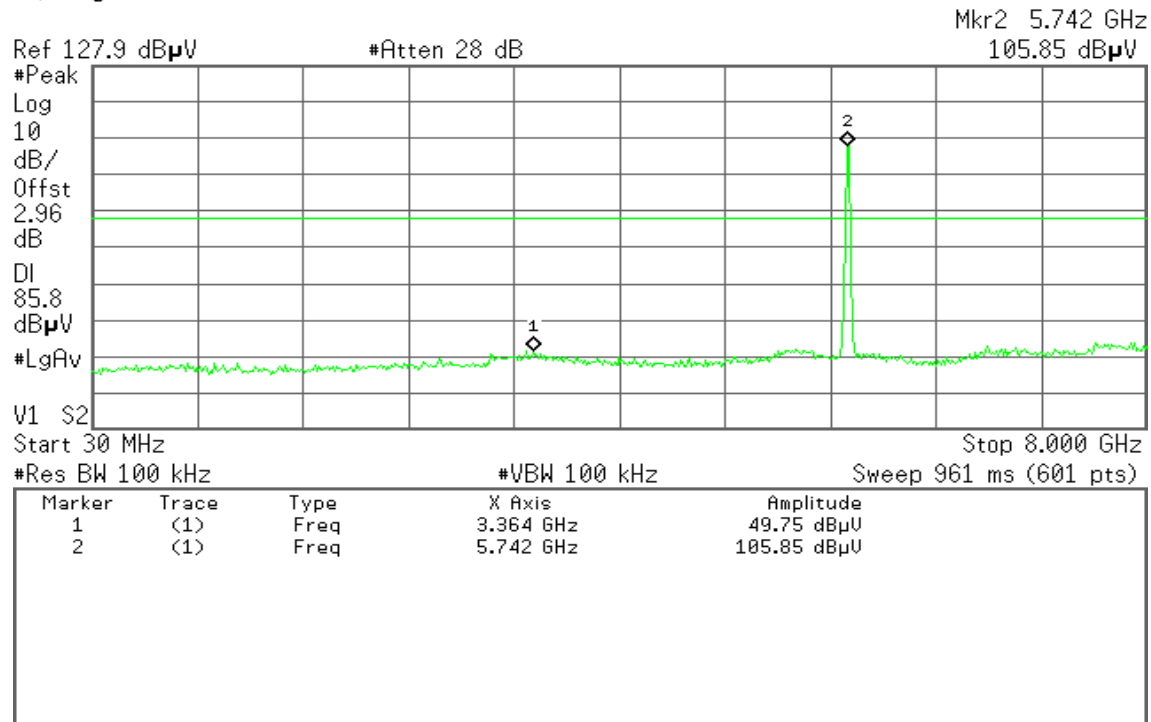
**8GHz ~ 40GHz**

\* Agilent 15:50:36 Oct 6, 2004

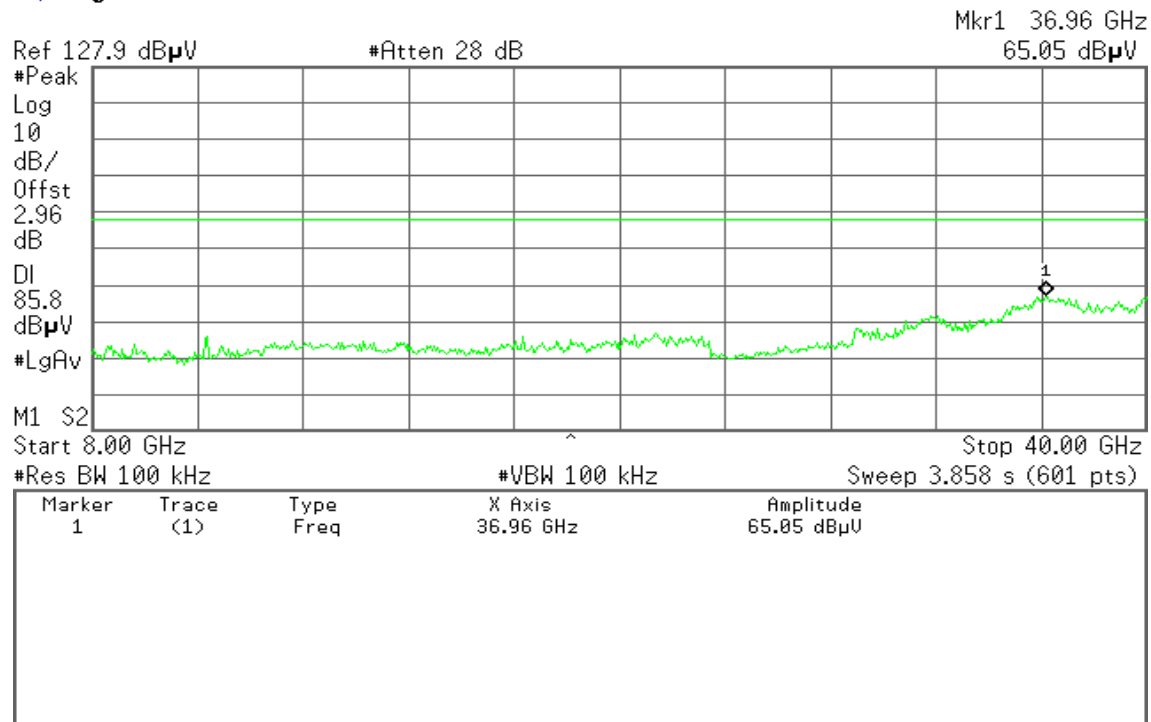


**CH 5785 / 18dBi****30MHz ~ 8GHz**

\* Agilent 15:52:15 Oct 6, 2004

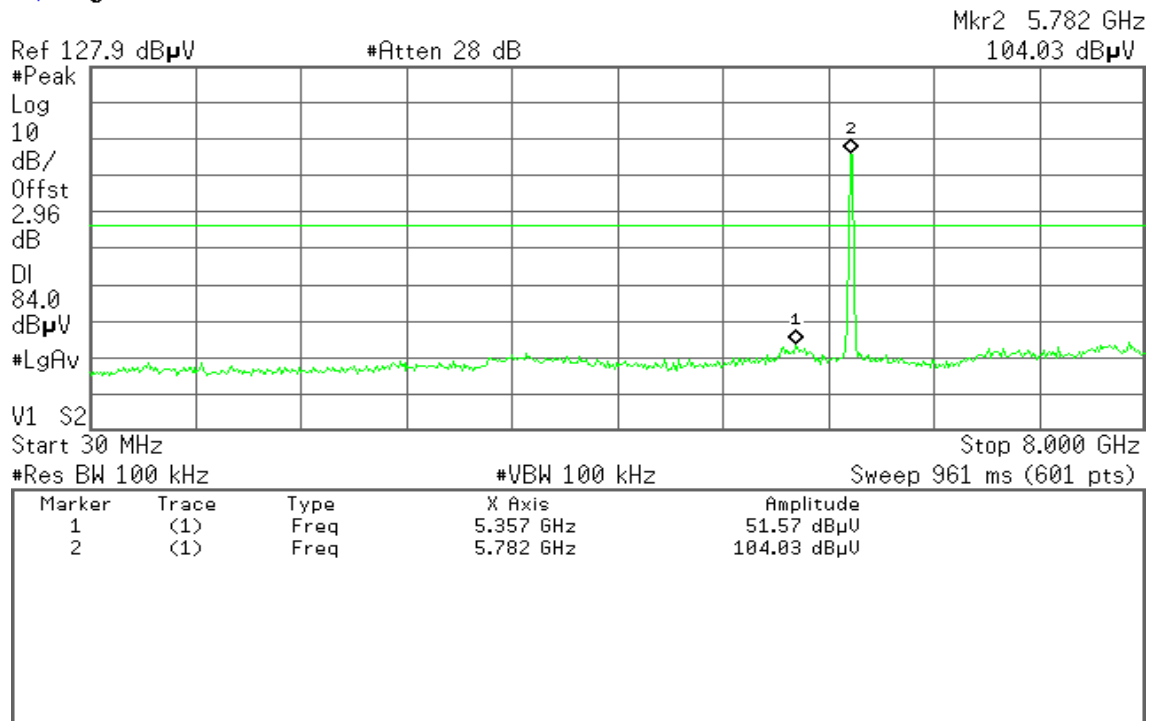
**8GHz ~ 40GHz**

\* Agilent 15:52:58 Oct 6, 2004

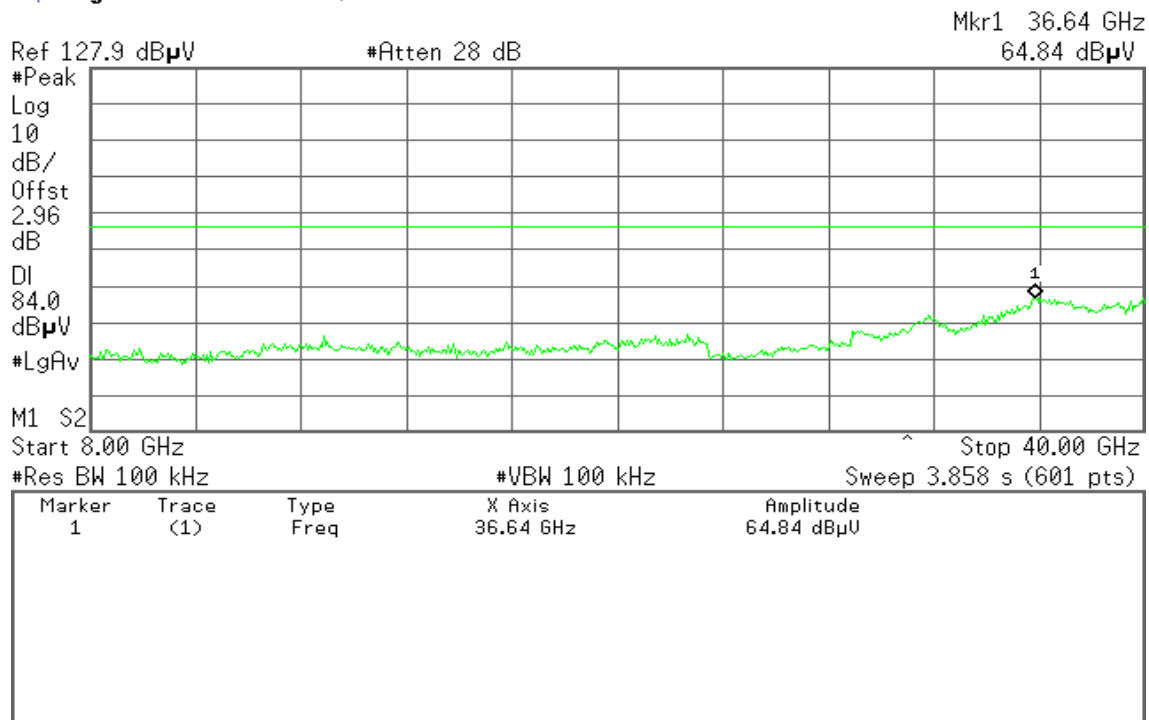


**CH 5825 / 18dBi****30MHz ~ 8GHz**

\* Agilent 15:54:22 Oct 6, 2004

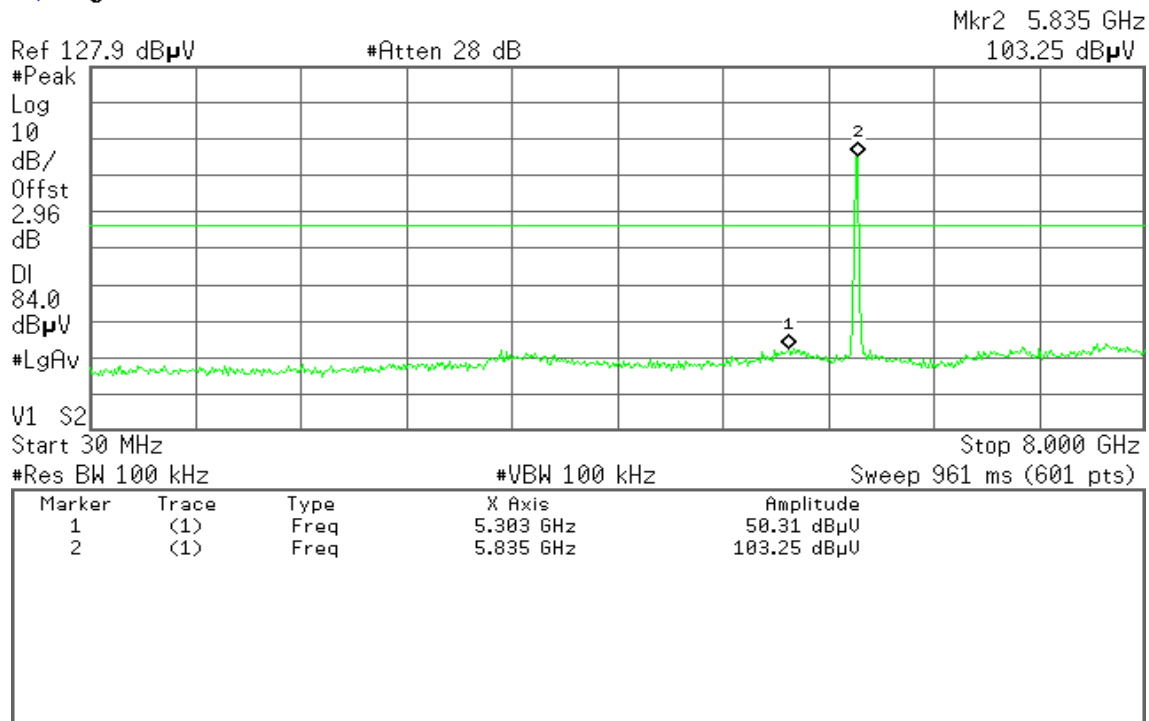
**8GHz ~ 40GHz**

\* Agilent 15:55:02 Oct 6, 2004

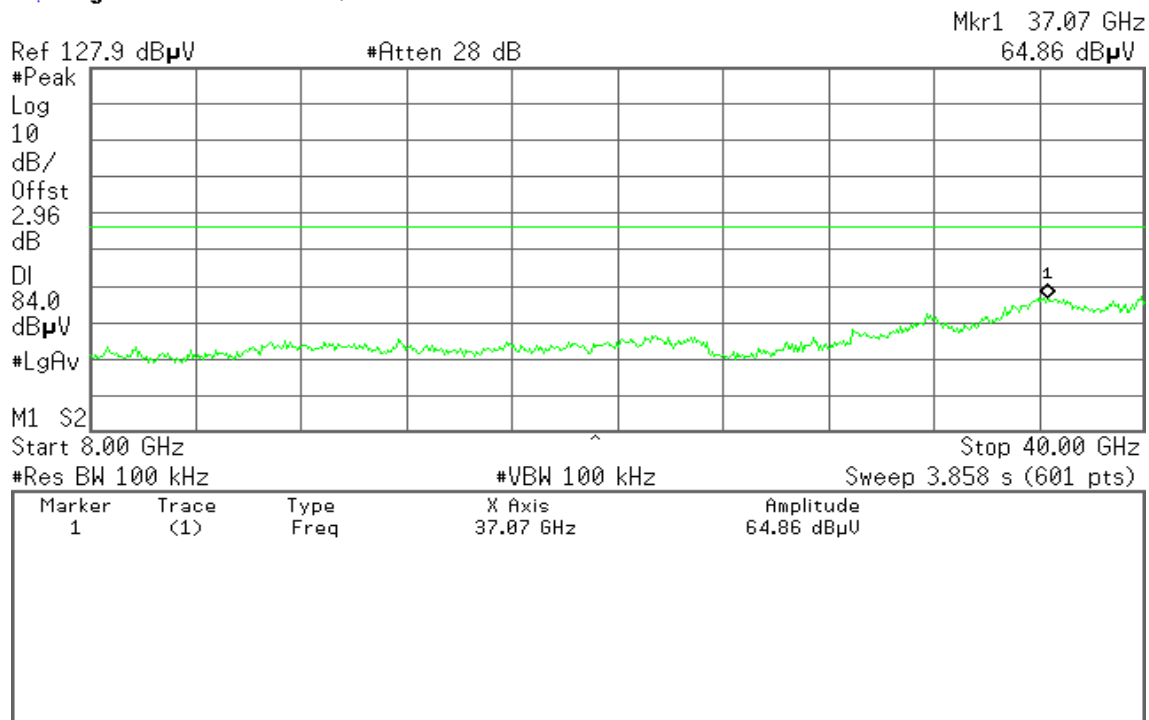


**IEEE 802.11a Turbo mode****CH 5760 / 18dBi****30MHz ~ 8GHz**

\* Agilent 15:57:48 Oct 6, 2004

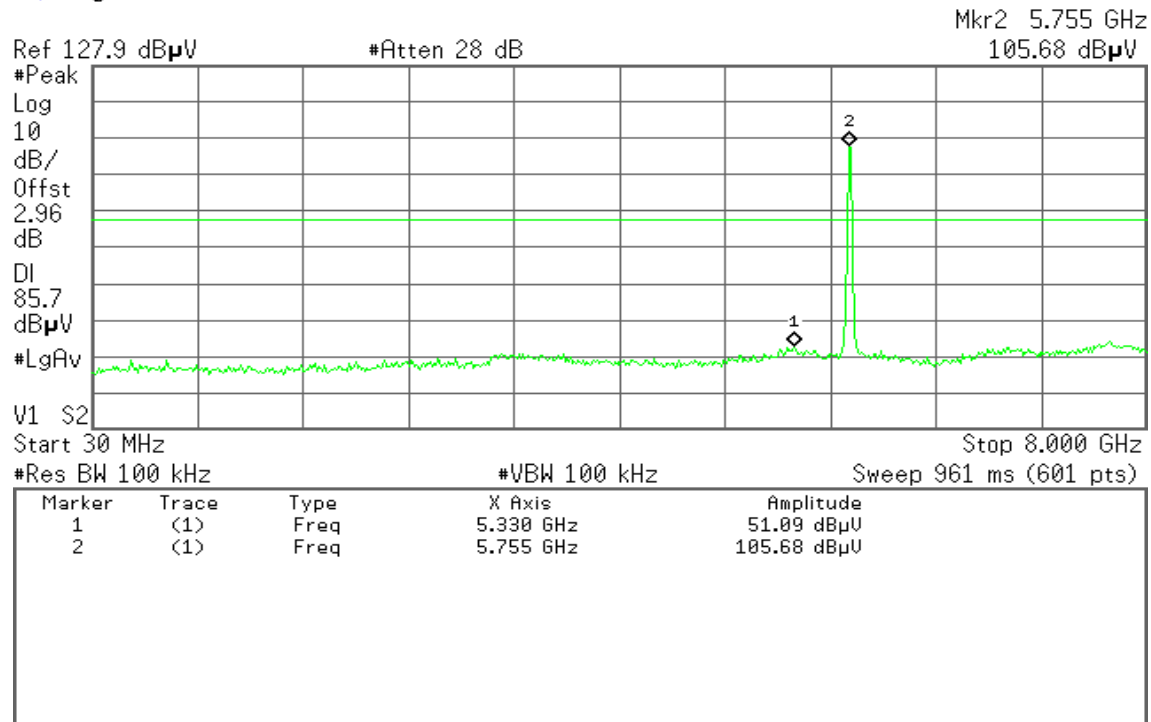
**8GHz ~ 40GHz**

\* Agilent 15:58:21 Oct 6, 2004

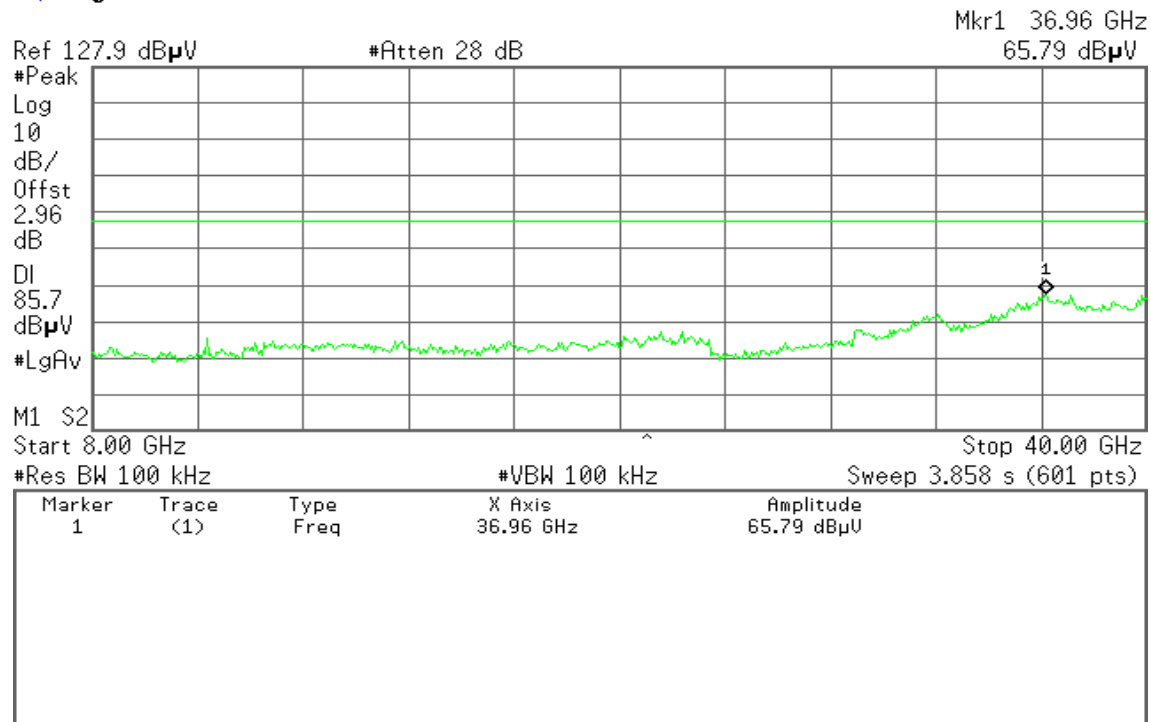


**CH 5800 / 18dBi****30MHz ~ 8GHz**

\* Agilent 16:02:02 Oct 6, 2004

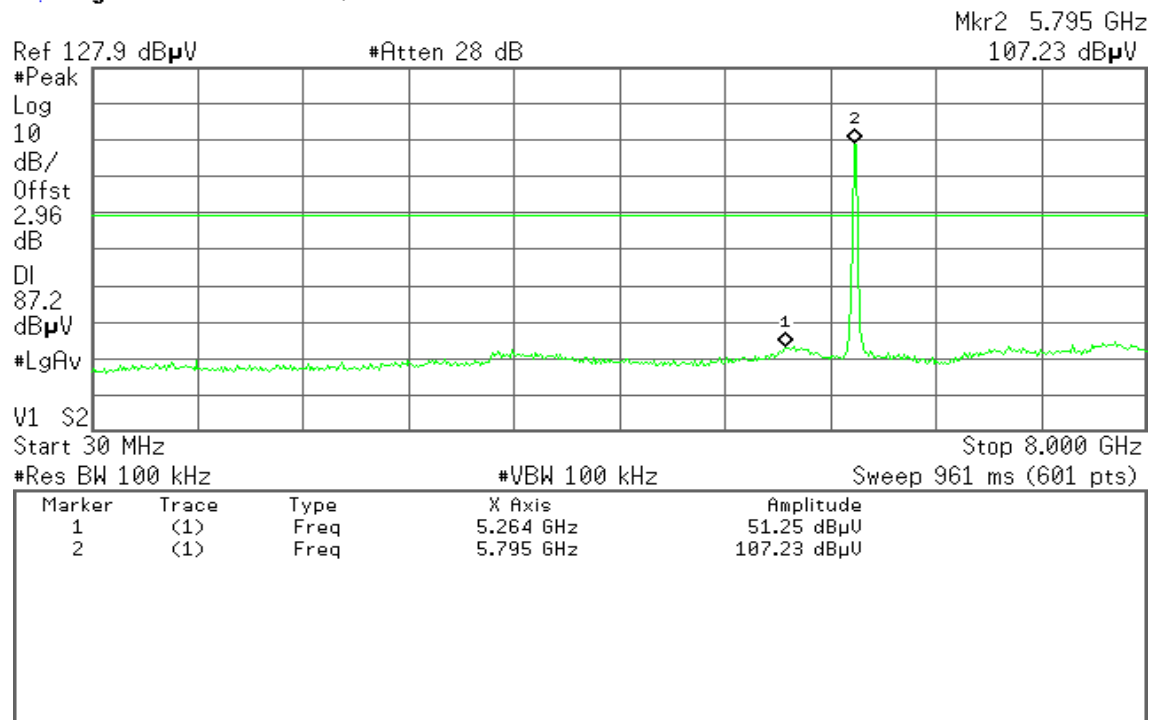**8GHz ~ 40GHz**

\* Agilent 16:03:15 Oct 6, 2004

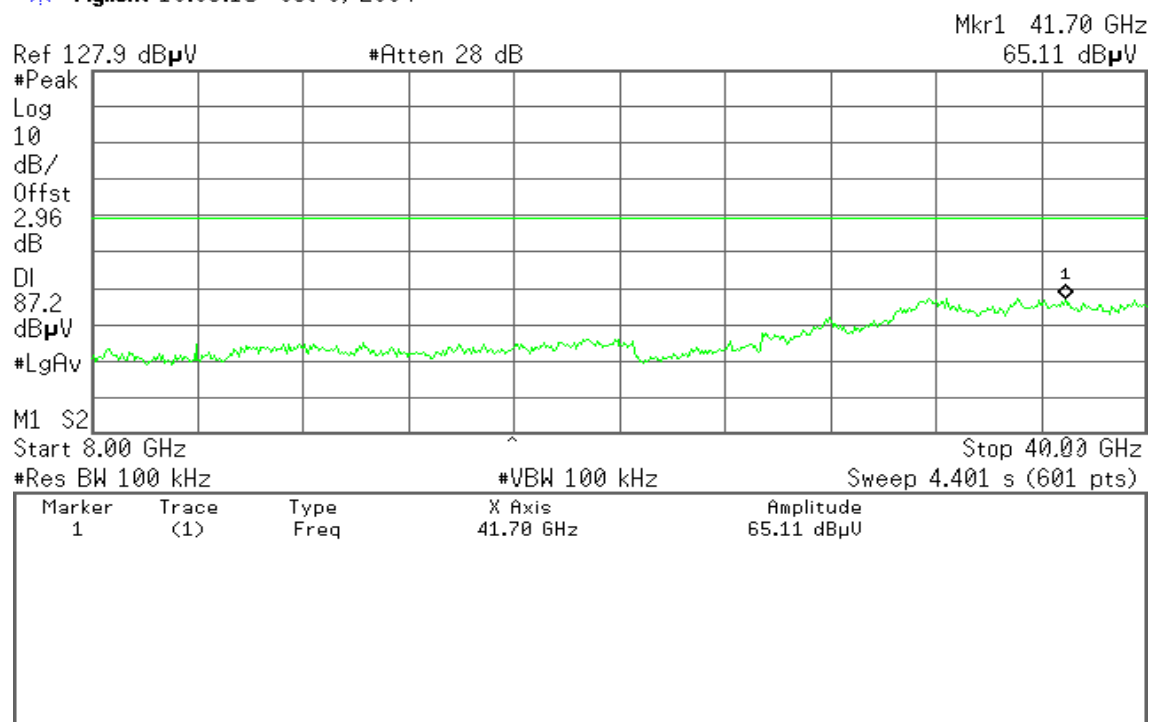





## 7.5.2 Radiated Emissions

### **LIMIT**

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

***Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


## **MEASUREMENT EQUIPMENT USED**

Open Area Test Site # 3				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	ADVANTEST	R3261A	N/A	03/18/2005
EMI Test Receiver	R&S	ESVS20	838804/004	01/04/2005
Pre-Amplifier	HP	8447D	2944A09173	03/03/2005
Bilog Antenna	SCHWAZBECK	VULB9163	145	07/05/2005
Turn Table	EMCO	2081-1.21	9709-1885	N.C.R
Antenna Tower	EMCO	2075-2	9707-2060	N.C.R
Controller	EMCO	2090	9709-1256	N.C.R
RF Switch	ANRITSU	MP59B	M53867	N.C.R
Site NSA	C&C	N/A	N/A	09/06/2005
Horn antenna	Schwarzbeck	BBHA 9120	D210	02/23/2005
Horn antenna	EMCO	3116	2487	11/27/2004
Loop Antenna	EMCO	6502	2356	07/10/2005
Pre-Amplifier	HP	8449B	3008B00965	10/02/2005


**Remark:** Each piece of equipment is scheduled for calibration once a year.

### **Test Configuration**

**Below 1 GHz**

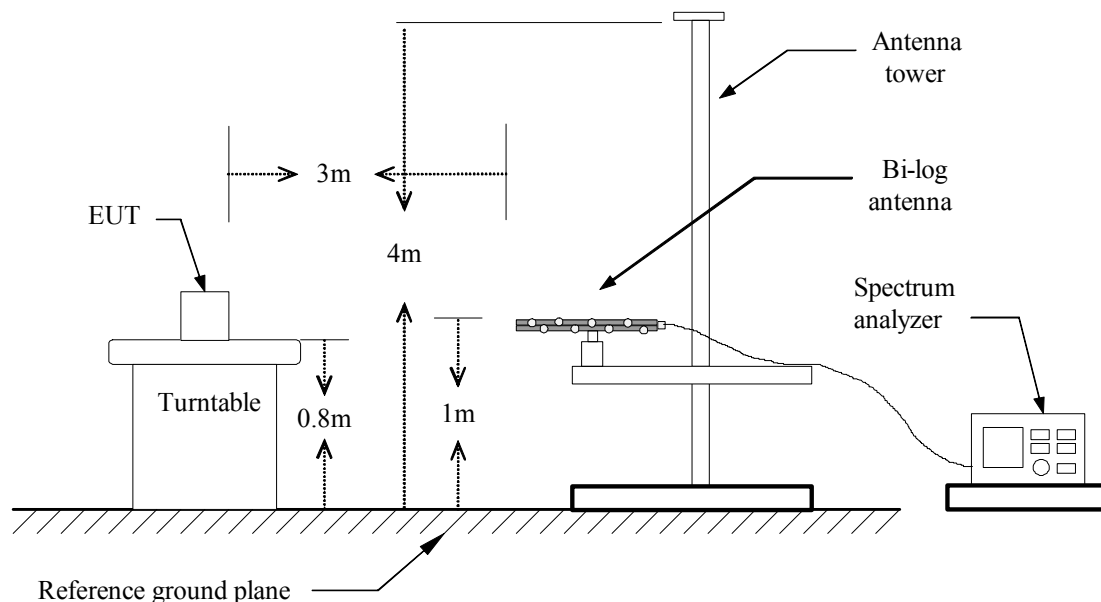

## Above 1 GHz

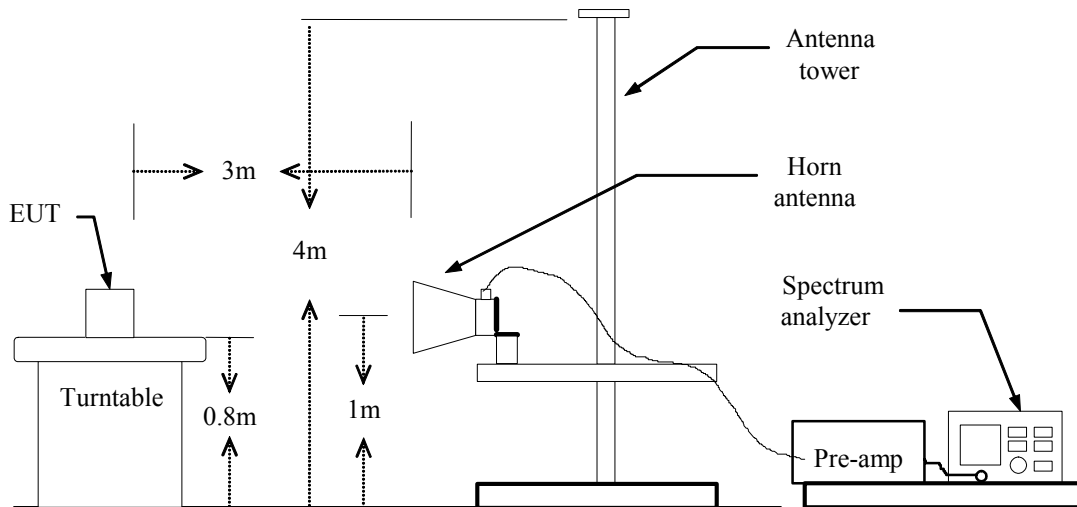

## TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****CONDITION A: EUT (Dual-Band Omni-Directional Antenna)****Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 5dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
78.15	V	Peak	22.37	9.62	31.99	40.00	-8.01
199.65	V	Peak	19.04	14.89	33.93	43.50	-9.57
287.85	V	Peak	24.28	16.21	40.49	46.00	-5.51
400.33	V	Peak	11.68	20.72	32.40	46.00	-13.60
431.83	V	Peak	13.40	20.37	33.77	46.00	-12.23
942.83	V	Peak	7.39	28.76	36.15	46.00	-9.85
173.10	H	Peak	25.10	12.40	37.50	43.50	-6.00
190.20	H	Peak	25.66	13.94	39.60	43.50	-3.90
287.85	H	Peak	18.95	16.21	35.16	46.00	-10.84
667.50	H	Peak	7.32	25.19	32.51	46.00	-13.49
834.33	H	Peak	4.87	26.92	31.79	46.00	-14.21
947.50	H	Peak	6.60	28.82	35.42	46.00	-10.58

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5785 / 5dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
199.65	V	Peak	18.38	14.89	33.27	43.50	-10.23
267.15	V	Peak	16.67	15.90	32.57	46.00	-13.43
288.30	V	Peak	24.45	16.23	40.68	46.00	-5.32
431.83	V	Peak	13.56	20.37	33.93	46.00	-12.07
667.50	V	Peak	8.82	25.19	34.01	46.00	-11.99
942.83	V	Peak	8.06	28.76	36.82	46.00	-9.18
154.65	H	Peak	25.67	11.24	36.91	43.50	-6.59
196.05	H	Peak	26.12	14.53	40.65	43.50	-2.85
288.30	H	Peak	18.62	16.23	34.85	46.00	-11.15
431.83	H	Peak	8.06	20.37	28.43	46.00	-17.57
798.17	H	Peak	5.27	26.13	31.40	46.00	-14.60
946.33	H	Peak	7.75	28.81	36.56	46.00	-9.44

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5825 / 5dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
66.45	V	Peak	21.38	11.31	32.69	40.00	-7.31
200.55	V	Peak	22.20	14.93	37.13	43.50	-6.37
288.30	V	Peak	24.28	16.23	40.51	46.00	-5.49
431.83	V	Peak	13.73	20.37	34.10	46.00	-11.90
633.67	V	Peak	5.66	25.04	30.70	46.00	-15.30
942.83	V	Peak	6.89	28.76	35.65	46.00	-10.35
163.20	H	Peak	25.02	11.63	36.65	43.50	-6.85
196.50	H	Peak	26.09	14.57	40.66	43.50	-2.84
266.25	H	Peak	20.31	15.92	36.23	46.00	-9.77
305.83	H	Peak	16.28	16.84	33.12	46.00	-12.88
500.67	H	Peak	5.95	22.53	28.48	46.00	-17.52
947.50	H	Peak	4.76	28.82	33.58	46.00	-12.42

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5760 / 5dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
66.45	V	Peak	20.04	11.31	31.35	40.00	-8.65
200.55	V	Peak	19.53	14.93	34.46	43.50	-9.04
287.85	V	Peak	24.12	16.21	40.33	46.00	-5.67
300.00	V	Peak	18.07	16.68	34.75	46.00	-11.25
431.83	V	Peak	13.90	20.37	34.27	46.00	-11.73
942.83	V	Peak	7.06	28.76	35.82	46.00	-10.18
139.35	H	Peak	25.24	10.89	36.13	43.50	-7.37
193.80	H	Peak	25.93	14.30	40.23	43.50	-3.27
206.40	H	Peak	24.01	15.02	39.03	43.50	-4.47
288.30	H	Peak	18.62	16.23	34.85	46.00	-11.15
763.17	H	Peak	3.99	25.95	29.94	46.00	-16.06
946.33	H	Peak	4.42	28.81	33.23	46.00	-12.77

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5800 / 5dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
78.60	V	Peak	21.51	9.60	31.11	40.00	-8.89
200.55	V	Peak	23.70	14.93	38.63	43.50	-4.87
288.30	V	Peak	24.45	16.23	40.68	46.00	-5.32
300.00	V	Peak	18.74	16.68	35.42	46.00	-10.58
431.83	V	Peak	13.73	20.37	34.10	46.00	-11.90
942.83	V	Peak	10.06	28.76	38.82	46.00	-7.18
154.65	H	Peak	25.84	11.24	37.08	43.50	-6.42
194.25	H	Peak	24.74	14.35	39.09	43.50	-4.41
288.30	H	Peak	20.12	16.23	36.35	46.00	-9.65
431.83	H	Peak	8.56	20.37	28.93	46.00	-17.07
575.33	H	Peak	4.79	24.83	29.62	46.00	-16.38
942.83	H	Peak	6.22	28.76	34.98	46.00	-11.02

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**CONDITION B: EUT (Panel Directional Antenna)****Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
66.90	V	Peak	27.35	11.16	38.51	40.00	-1.49
70.50	V	Peak	26.16	10.10	36.26	40.00	-3.74
288.30	V	Peak	16.95	16.23	33.18	46.00	-12.82
300.00	V	Peak	17.57	16.68	34.25	46.00	-11.75
665.17	V	Peak	13.85	25.15	39.00	46.00	-7.00
942.83	V	Peak	9.89	28.76	38.65	46.00	-7.35
68.70	H	Peak	23.09	10.56	33.65	40.00	-6.35
154.20	H	Peak	22.30	11.23	33.53	43.50	-9.97
287.85	H	Peak	16.45	16.21	32.66	46.00	-13.34
310.50	H	Peak	21.37	16.96	38.33	46.00	-7.67
431.83	H	Peak	17.23	20.37	37.60	46.00	-8.40
767.83	H	Peak	6.37	25.97	32.34	46.00	-13.66

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5785 / 18dBi**Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
66.45	V	Peak	24.88	11.31	36.19	40.00	-3.81
70.50	V	Peak	26.66	10.10	36.76	40.00	-3.24
201.00	V	Peak	18.21	14.94	33.15	43.50	-10.35
662.83	V	Peak	8.71	25.11	33.82	46.00	-12.18
800.50	V	Peak	7.27	26.15	33.42	46.00	-12.58
942.83	V	Peak	9.89	28.76	38.65	46.00	-7.35
69.15	H	Peak	25.75	10.41	36.16	40.00	-3.84
200.55	H	Peak	17.20	14.93	32.13	43.50	-11.37
288.30	H	Peak	17.28	16.23	33.51	46.00	-12.49
367.67	H	Peak	16.80	18.98	35.78	46.00	-10.22
431.83	H	Peak	18.23	20.37	38.60	46.00	-7.40
798.17	H	Peak	7.61	26.13	33.74	46.00	-12.26

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5825 / 18dBi**Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
61.05	V	Peak	20.72	13.11	33.83	40.00	-6.17
66.90	V	Peak	25.52	11.16	36.68	40.00	-3.32
69.15	V	Peak	23.59	10.41	34.00	40.00	-6.00
300.00	V	Peak	17.74	16.68	34.42	46.00	-11.58
668.67	V	Peak	8.80	25.21	34.01	46.00	-11.99
942.83	V	Peak	10.22	28.76	38.98	46.00	-7.02
66.90	H	Peak	26.45	11.16	37.61	40.00	-2.39
154.65	H	Peak	20.84	11.24	32.08	43.50	-11.42
200.55	H	Peak	18.37	14.93	33.30	43.50	-10.20
338.50	H	Peak	19.00	17.72	36.72	46.00	-9.28
367.67	H	Peak	17.47	18.98	36.45	46.00	-9.55
431.83	H	Peak	18.23	20.37	38.60	46.00	-7.40

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5760 / 18dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBUV)	Factor (dB)	Actual FS (dBUV/m)	Limit 3m (dBUV/m)	Safe Margin (dB)
66.45	V	Peak	25.04	11.31	36.35	40.00	-3.65
70.50	V	Peak	25.32	10.10	35.42	40.00	-4.58
233.40	V	Peak	18.87	15.65	34.52	46.00	-11.48
301.17	V	Peak	19.38	16.71	36.09	46.00	-9.91
667.50	V	Peak	8.49	25.19	33.68	46.00	-12.32
942.83	V	Peak	10.56	28.76	39.32	46.00	-6.68
66.90	H	Peak	26.61	11.16	37.77	40.00	-2.23
70.05	H	Peak	27.56	10.13	37.69	40.00	-2.31
200.55	H	Peak	17.87	14.93	32.80	43.50	-10.70
332.67	H	Peak	20.17	17.56	37.73	46.00	-8.27
431.83	H	Peak	16.56	20.37	36.93	46.00	-9.07
942.83	H	Peak	6.06	28.76	34.82	46.00	-11.18

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5800 / 18dBi **Test Date:** October 13, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
70.50	V	Peak	24.66	10.10	34.76	40.00	-5.24
200.55	V	Peak	18.53	14.93	33.46	43.50	-10.04
288.30	V	Peak	15.28	16.23	31.51	46.00	-14.49
665.17	V	Peak	8.52	25.15	33.67	46.00	-12.33
942.83	V	Peak	10.39	28.76	39.15	46.00	-6.85
954.50	V	Peak	5.68	28.94	34.62	46.00	-11.38
70.50	H	Peak	27.46	10.10	37.56	40.00	-2.44
154.20	H	Peak	21.80	11.23	33.03	43.50	-10.47
200.55	H	Peak	16.37	14.93	31.30	43.50	-12.20
304.67	H	Peak	23.48	16.81	40.29	46.00	-5.71
366.50	H	Peak	18.19	18.92	37.11	46.00	-8.89
433.00	H	Peak	14.30	20.36	34.66	46.00	-11.34

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Co-Location:****CONDITION C: EUT (Panel Directional Antenna) +  
AP (Panel Directional Antenna)****Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX IEEE 802.11b / CH 2412 / 16dBi**Test Date:** November 2, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
59.25	V	Peak	24.56	13.61	38.17	40.00	-1.83
141.60	V	Peak	21.79	10.91	32.70	43.50	-10.80
288.30	V	Peak	17.45	16.23	33.68	46.00	-12.32
350.17	V	Peak	16.15	18.04	34.19	46.00	-11.81
455.17	V	Peak	19.12	20.41	39.53	46.00	-6.47
952.17	V	Peak	8.73	28.90	37.63	46.00	-8.37
56.55	H	Peak	18.34	14.15	32.49	40.00	-7.51
68.70	H	Peak	22.93	10.56	33.49	40.00	-6.51
141.60	H	Peak	21.79	10.91	32.70	43.50	-10.80
250.05	H	Peak	19.52	16.31	35.83	46.00	-10.17
287.85	H	Peak	20.95	16.21	37.16	46.00	-8.84
455.17	H	Peak	18.12	20.41	38.53	46.00	-7.47

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX IEEE 802.11b / CH 2437 / 16dBi

**Test Date:** November 2, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
63.30	V	Peak	24.37	12.36	36.73	40.00	-3.27
141.15	V	Peak	22.01	10.90	32.91	43.50	-10.59
250.05	V	Peak	17.35	16.31	33.66	46.00	-12.34
288.30	V	Peak	16.78	16.23	33.01	46.00	-12.99
455.17	V	Peak	19.29	20.41	39.70	46.00	-6.30
942.83	V	Peak	6.56	28.76	35.32	46.00	-10.68
58.80	H	Peak	24.15	13.70	37.85	40.00	-2.15
73.20	H	Peak	25.22	9.93	35.15	40.00	-4.85
141.60	H	Peak	21.29	10.91	32.20	43.50	-11.30
250.05	H	Peak	20.69	16.31	37.00	46.00	-9.00
288.30	H	Peak	19.28	16.23	35.51	46.00	-10.49
455.17	H	Peak	18.79	20.41	39.20	46.00	-6.80

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX IEEE 802.11b / CH 2462 / 16dBi

**Test Date:** November 2, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
68.25	V	Peak	25.29	10.71	36.00	40.00	-4.00
141.15	V	Peak	19.51	10.90	30.41	43.50	-13.09
250.05	V	Peak	16.69	16.31	33.00	46.00	-13.00
455.17	V	Peak	18.95	20.41	39.36	46.00	-6.64
575.33	V	Peak	7.79	24.83	32.62	46.00	-13.38
942.83	V	Peak	6.72	28.76	35.48	46.00	-10.52
64.20	H	Peak	21.50	12.06	33.56	40.00	-6.44
68.25	H	Peak	23.59	10.71	34.30	40.00	-5.70
250.05	H	Peak	19.85	16.31	36.16	46.00	-9.84
287.85	H	Peak	18.95	16.21	35.16	46.00	-10.84
455.17	H	Peak	18.79	20.41	39.20	46.00	-6.80
500.67	H	Peak	12.45	22.53	34.98	46.00	-11.02

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX IEEE 802.11g / CH 2412 / 16dBi**Test Date:** November 2, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
57.45	V	Peak	22.38	13.97	36.35	40.00	-3.65
141.60	V	Peak	20.62	10.91	31.53	43.50	-11.97
250.05	V	Peak	19.35	16.31	35.66	46.00	-10.34
350.17	V	Peak	13.32	18.04	31.36	46.00	-14.64
500.67	V	Peak	10.78	22.53	33.31	46.00	-12.69
942.83	V	Peak	8.56	28.76	37.32	46.00	-8.68
52.05	H	Peak	19.00	15.06	34.06	40.00	-5.94
141.60	H	Peak	19.12	10.91	30.03	43.50	-13.47
250.05	H	Peak	19.02	16.31	35.33	46.00	-10.67
450.50	H	Peak	13.20	20.19	33.39	46.00	-12.61
500.67	H	Peak	9.45	22.53	31.98	46.00	-14.02
658.17	H	Peak	6.77	25.03	31.80	46.00	-14.20

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX IEEE 802.11g / CH 2437 / 16dBi

**Test Date:** November 2, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
57.00	V	Peak	22.87	14.06	36.93	40.00	-3.07
141.60	V	Peak	21.29	10.91	32.20	43.50	-11.30
250.05	V	Peak	18.35	16.31	34.66	46.00	-11.34
450.05	V	Peak	9.53	20.19	29.72	46.00	-16.28
499.50	V	Peak	11.16	22.49	33.65	46.00	-12.35
942.83	V	Peak	8.22	28.76	36.98	46.00	-9.02
52.05	H	Peak	19.33	15.06	34.39	40.00	-5.61
56.10	H	Peak	17.91	14.24	32.15	40.00	-7.85
141.15	H	Peak	18.68	10.90	29.58	43.50	-13.92
250.05	H	Peak	19.02	16.31	35.33	46.00	-10.67
450.50	H	Peak	11.87	20.19	32.06	46.00	-13.94
499.50	H	Peak	10.67	22.49	33.16	46.00	-12.84

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX IEEE 802.11g / CH 2462 / 16dBi

**Test Date:** November 2, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
56.55	V	Peak	23.03	14.15	37.18	40.00	-2.82
141.15	V	Peak	20.84	10.90	31.74	43.50	-11.76
250.05	V	Peak	18.52	16.31	34.83	46.00	-11.17
350.17	V	Peak	12.82	18.04	30.86	46.00	-15.14
499.50	V	Peak	11.82	22.49	34.31	46.00	-11.69
942.83	V	Peak	8.39	28.76	37.15	46.00	-8.85
52.05	H	Peak	19.50	15.06	34.56	40.00	-5.44
141.60	H	Peak	18.12	10.91	29.03	43.50	-14.47
250.05	H	Peak	18.52	16.31	34.83	46.00	-11.17
350.17	H	Peak	13.65	18.04	31.69	46.00	-14.31
450.50	H	Peak	13.37	20.19	33.56	46.00	-12.44
500.67	H	Peak	11.28	22.53	33.81	46.00	-12.19

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX IEEE 802.11g / Turbo CH 2437 / 16dBi **Test Date:** November 2, 2004

**Temperature:** 28°C **Tested by:** Max Yao

**Humidity:** 60% RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
56.55	V	Peak	22.70	14.15	36.85	40.00	-3.15
141.15	V	Peak	20.51	10.90	31.41	43.50	-12.09
250.05	V	Peak	19.02	16.31	35.33	46.00	-10.67
350.17	V	Peak	12.82	18.04	30.86	46.00	-15.14
499.50	V	Peak	11.16	22.49	33.65	46.00	-12.35
941.67	V	Peak	8.21	28.76	36.97	46.00	-9.03
52.05	H	Peak	18.83	15.06	33.89	40.00	-6.11
250.05	H	Peak	18.52	16.31	34.83	46.00	-11.17
350.17	H	Peak	13.82	18.04	31.86	46.00	-14.14
450.50	H	Peak	12.87	20.19	33.06	46.00	-12.94
500.67	H	Peak	10.78	22.53	33.31	46.00	-12.69
659.33	H	Peak	6.92	25.05	31.97	46.00	-14.03

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****CONDITION A: EUT (Dual-Band Omni-Directional Antenna)****Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 5dBi **Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1836.67	V	51.67	---	-5.49	46.18	---	74.00	54.00	-7.82	Peak
2733.33	V	48.17	---	-2.15	46.02	---	74.00	54.00	-7.98	Peak
11490.00	V	55.12	43.94	9.80	64.92	53.74	74.00	54.00	-0.26	Average
17235.00	V	53.62	41.11	12.26	65.88	53.37	74.00	54.00	-0.63	Average
N/A										
1200.00	H	50.17	---	-9.01	41.16	---	74.00	54.00	-12.84	Peak
1366.67	H	46.67	---	-8.39	38.28	---	74.00	54.00	-15.72	Peak
11490.00	H	56.15	43.86	9.80	65.95	53.66	74.00	54.00	-0.34	Average
17235.00	H	48.95	37.31	12.26	61.21	49.57	74.00	54.00	-4.43	Average
N/A										

***Notes:***

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.*
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.*
- 4. Spectrum setting:*
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.*
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.*

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5785 / 5dBi **Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1586.67	V	48.17	---	-6.90	41.27	---	74.00	54.00	-12.73	Peak
1836.67	V	52.34	---	-5.49	46.85	---	74.00	54.00	-7.15	Peak
2733.33	V	49.17	---	-2.15	47.02	---	74.00	54.00	-6.98	Peak
11570.00	V	55.89	43.56	9.91	65.80	53.47	74.00	54.00	-0.53	Average
17355.00	V	47.28	35.14	12.86	60.14	48.00	74.00	54.00	-6.00	Average
N/A										
1193.33	H	50.34	---	-9.06	41.28	---	74.00	54.00	-12.72	Peak
1366.67	H	46.50	---	-8.39	38.11	---	74.00	54.00	-15.89	Peak
11570.00	H	54.53	42.31	9.91	64.44	52.22	74.00	54.00	-1.78	Average
17355.00	H	45.17	33.65	12.86	58.03	46.51	74.00	54.00	-7.49	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5825 / 5dBi **Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1836.67	V	52.00	---	-5.49	46.51	---	74.00	54.00	-7.49	Peak
2733.33	V	48.17	---	-2.15	46.02	---	74.00	54.00	-7.98	Peak
11650.00	V	55.37	42.89	10.05	65.42	52.94	74.00	54.00	-1.06	Average
17475.00	V	44.65	33.91	13.45	58.10	47.36	74.00	54.00	-6.64	Average
N/A										
1190.00	H	50.50	---	-9.08	41.42	---	74.00	54.00	-12.58	Peak
1366.67	H	46.00	---	-8.39	37.61	---	74.00	54.00	-16.39	Peak
11650.00	H	56.92	43.82	10.05	66.97	53.87	74.00	54.00	-0.13	Average
17475.00	H	44.02	33.01	13.45	57.47	46.46	74.00	54.00	-7.54	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5760 / 5dBi **Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1836.67	V	51.84	---	-5.49	46.35	---	74.00	54.00	-7.65	Peak
2276.67	V	44.50	---	-3.46	41.04	---	74.00	54.00	-12.96	Peak
2733.33	V	48.17	---	-2.15	46.02	---	74.00	54.00	-7.98	Peak
11520.00	V	55.60	43.11	9.82	65.42	52.93	74.00	54.00	-1.07	Average
17280.00	V	51.60	39.43	12.51	64.11	51.94	74.00	54.00	-2.06	Average
N/A										
1190.00	H	50.34	---	-9.08	41.26	---	74.00	54.00	-12.74	Peak
1366.67	H	46.84	---	-8.39	38.45	---	74.00	54.00	-15.55	Peak
11520.00	H	53.98	41.82	9.82	63.80	51.64	74.00	54.00	-2.36	Average
17280.00	H	45.99	33.57	12.51	58.50	46.08	74.00	54.00	-7.92	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5800 / 5dBi **Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1836.67	V	52.00	---	-5.49	46.51	---	74.00	54.00	-7.49	Peak
2733.33	V	47.00	---	-2.15	44.85	---	74.00	54.00	-9.15	Peak
11600.00	V	56.02	42.45	9.96	65.98	52.41	74.00	54.00	-1.59	Average
17400.00	V	44.89	33.07	13.10	57.99	46.17	74.00	54.00	-7.83	Average
N/A										
1200.00	H	50.00	---	-9.01	40.99	---	74.00	54.00	-13.01	Peak
1366.67	H	47.00	---	-8.39	38.61	---	74.00	54.00	-15.39	Peak
11600.00	H	55.47	43.03	9.96	65.43	52.99	74.00	54.00	-1.01	Average
17400.00	H	46.67	34.50	13.10	59.77	47.60	74.00	54.00	-6.40	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**CONDITION B: EUT (Panel Directional Antenna)****Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi**Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1836.67	V	52.00	---	-5.49	46.51	---	74.00	54.00	-7.49	Peak
2733.33	V	45.00	---	-2.15	42.85	---	74.00	54.00	-11.15	Peak
11490.00	V	54.70	43.67	9.80	64.50	53.47	74.00	54.00	-0.53	Average
17235.00	V	51.60	40.54	12.26	63.86	52.80	74.00	54.00	-1.20	Average
N/A										
1190.00	H	50.00	---	-9.08	40.92	---	74.00	54.00	-13.08	Peak
1366.66	H	45.34	---	-8.39	36.95	---	74.00	54.00	-17.05	Peak
1823.33	H	43.17	---	-5.58	37.59	---	74.00	54.00	-16.41	Peak
11490.00	H	56.03	43.85	9.80	65.83	53.65	74.00	54.00	-0.35	Average
17235.00	H	49.96	39.73	12.26	62.22	51.99	74.00	54.00	-2.01	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5785 / 18dB**Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1196.67	V	46.67	---	-9.03	37.64	---	74.00	54.00	-16.36	Peak
1836.67	V	51.50	---	-5.49	46.01	---	74.00	54.00	-7.99	Peak
2733.33	V	44.67	---	-2.15	42.52	---	74.00	54.00	-11.48	Peak
11570.00	V	56.05	43.69	9.91	65.96	53.60	74.00	54.00	-0.40	Average
17355.00	V	48.28	38.32	12.86	61.14	51.18	74.00	54.00	-2.82	Average
N/A										
1193.33	H	50.34	---	-9.06	41.28	---	74.00	54.00	-12.72	Peak
1463.33	H	42.50	---	-7.84	34.66	---	74.00	54.00	-19.34	Peak
11570.00	H	58.28	43.64	9.91	68.19	53.55	74.00	54.00	-0.45	Average
17355.00	H	49.77	38.26	12.86	62.63	51.12	74.00	54.00	-2.88	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX IEEE 802.11a Base mode / CH 5825 / 18dB**Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1200.00	V	46.67	---	-9.01	37.66	---	74.00	54.00	-16.34	Peak
1836.67	V	51.50	---	-5.49	46.01	---	74.00	54.00	-7.99	Peak
2733.33	V	45.67	---	-2.15	43.52	---	74.00	54.00	-10.48	Peak
11650.00	V	54.79	43.04	10.05	64.84	53.09	74.00	54.00	-0.91	Average
17475.00	V	48.38	38.11	13.45	61.83	51.56	74.00	54.00	-2.44	Average
N/A										
1190.00	H	49.84	---	-9.08	40.76	---	74.00	54.00	-13.24	Peak
1836.67	H	42.67	---	-5.49	37.18	---	74.00	54.00	-16.82	Peak
11650.00	H	57.31	43.62	10.05	67.36	53.67	74.00	54.00	-0.33	Average
17475.00	H	48.79	38.27	13.45	62.24	51.72	74.00	54.00	-2.28	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5760 / 18dB **Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1200.00	V	46.50	---	-9.01	37.49	---	74.00	54.00	-16.51	Peak
1836.67	V	51.84	---	-5.49	46.35	---	74.00	54.00	-7.65	Peak
2733.33	V	45.00	---	-2.15	42.85	---	74.00	54.00	-11.15	Peak
11520.00	V	54.35	42.92	9.82	64.17	52.74	74.00	54.00	-1.26	Average
17280.00	V	49.66	39.79	12.51	62.17	52.30	74.00	54.00	-1.70	Average
N/A										
1190.00	H	50.00	---	-9.08	40.92	---	74.00	54.00	-13.08	Peak
2733.33	H	41.67	---	-2.15	39.52	---	74.00	54.00	-14.48	Peak
11520.00	H	56.70	43.84	9.82	66.52	53.66	74.00	54.00	-0.34	Average
17280.00	H	49.57	39.61	12.51	62.08	52.12	74.00	54.00	-1.88	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Operation Mode:** TX IEEE 802.11a Turbo mode / CH 5800 / 18dB **Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1200.00	V	47.67	---	-9.01	38.66	---	74.00	54.00	-15.34	Peak
1836.67	V	51.34	---	-5.49	45.85	---	74.00	54.00	-8.15	Peak
2733.33	V	45.84	---	-2.15	43.69	---	74.00	54.00	-10.31	Peak
11600.00	V	56.18	43.79	9.96	66.14	53.75	74.00	54.00	-0.25	Average
17400.00	V	48.91	37.46	13.10	62.01	50.56	74.00	54.00	-3.44	Average
N/A										
1200.00	H	48.84	---	-9.01	39.83	---	74.00	54.00	-14.17	Peak
1836.67	H	43.00	---	-5.49	37.51	---	74.00	54.00	-16.49	Peak
11600.00	H	59.16	43.80	9.96	69.12	53.76	74.00	54.00	-0.24	Average
17400.00	H	48.53	38.68	13.10	61.63	51.78	74.00	54.00	-2.22	Average
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.

**Co-Location:****CONDITION C: EUT (Panel Directional Antenna) +****AP (Panel Directional Antenna)****Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX 802.11b / CH 2412 / 16dBi**Test Date:** October 31, 2004**Temperature:** 28°C**Tested by:** Max Yao**Humidity:** 60% RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1440.00	V	48.00	---	-8.00	40.00	---	74.00	54.00	-14.00	Peak
2173.33	V	52.50	---	-3.81	48.69	---	74.00	54.00	-5.31	Peak
2206.67	V	47.17	---	-3.70	43.47	---	74.00	54.00	-10.53	Peak
4866.67	V	45.00	---	3.38	48.38	---	74.00	54.00	-5.62	Peak
N/A										
2063.33	H	43.84	---	-4.18	39.66	---	74.00	54.00	-14.34	Peak
2636.67	H	44.84	---	-2.42	42.42	---	74.00	54.00	-11.58	Peak
4900.00	H	41.50	---	3.45	44.95	---	74.00	54.00	-9.05	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX 802.11b / CH 2437 / 16dBi

**Test Date:** October 31, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1596.67	V	47.17	---	-6.82	40.35	---	74.00	54.00	-13.65	Peak
2173.33	V	51.00	---	-3.81	47.19	---	74.00	54.00	-6.81	Peak
2206.67	V	46.84	---	-3.70	43.14	---	74.00	54.00	-10.86	Peak
4866.67	V	45.84	---	3.38	49.22	---	74.00	54.00	-4.78	Peak
N/A										
1596.67	H	47.34	---	-6.82	40.52	---	74.00	54.00	-13.48	Peak
2173.33	H	50.00	---	-3.81	46.19	---	74.00	54.00	-7.81	Peak
2206.67	H	48.00	---	-3.70	44.30	---	74.00	54.00	-9.70	Peak
4908.33	H	42.00	---	3.47	45.47	---	74.00	54.00	-8.53	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.





**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX 802.11b / CH 2462 / 16dBi

**Test Date:** October 31, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1593.33	V	46.17	---	-6.84	39.33	---	74.00	54.00	-14.67	Peak
2173.33	V	51.17	---	-3.81	47.36	---	74.00	54.00	-6.64	Peak
2206.67	V	47.00	---	-3.70	43.30	---	74.00	54.00	-10.70	Peak
4916.67	V	46.67	---	3.49	50.16	---	74.00	54.00	-3.84	Peak
N/A										
1643.33	H	44.17	---	-6.56	37.61	---	74.00	54.00	-16.39	Peak
1940.00	H	43.00	---	-4.80	38.20	---	74.00	54.00	-15.80	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX 802.11g / CH 2412 / 16dBi

**Test Date:** October 31, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1596.67	V	50.00	---	-6.82	43.18	---	74.00	54.00	-10.82	Peak
2173.33	V	48.50	---	-3.81	44.69	---	74.00	54.00	-9.31	Peak
2206.67	V	46.00	---	-3.70	42.30	---	74.00	54.00	-11.70	Peak
4816.67	V	42.00	---	3.28	45.28	---	74.00	54.00	-8.72	Peak
N/A										
2333.33	H	44.84	---	-3.27	41.57	---	74.00	54.00	-12.43	Peak
4816.67	H	41.84	---	3.28	45.12	---	74.00	54.00	-8.88	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX 802.11g / CH 2437 / 16dBi

**Test Date:** October 31, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1593.33	V	46.00	---	-6.84	39.16	---	74.00	54.00	-14.84	Peak
2173.33	V	47.84	---	-3.81	44.03	---	74.00	54.00	-9.97	Peak
2206.67	V	46.17	---	-3.70	42.47	---	74.00	54.00	-11.53	Peak
4866.67	V	42.84	---	3.38	46.22	---	74.00	54.00	-7.78	Peak
N/A										
1440.00	H	42.17	---	-8.00	34.17	---	74.00	54.00	-19.83	Peak
4883.33	H	40.34	---	3.42	43.76	---	74.00	54.00	-10.24	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX 802.11g / CH 2462 / 16dBi

**Test Date:** October 31, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1596.67	V	45.84	---	-6.82	39.02	---	74.00	54.00	-14.98	Peak
2173.33	V	49.34	---	-3.81	45.53	---	74.00	54.00	-8.47	Peak
2206.67	V	47.34	---	-3.70	43.64	---	74.00	54.00	-10.36	Peak
4916.67	V	47.17	---	3.49	50.66	---	74.00	54.00	-3.34	Peak
N/A										
2340.00	H	44.34	---	-3.25	41.09	---	74.00	54.00	-12.91	Peak
4916.67	H	43.17	---	3.49	46.66	---	74.00	54.00	-7.34	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



**Operation Mode:** TX IEEE 802.11a Base mode / CH 5745 / 18dBi  
+ TX 802.11g / Turbo CH 2437 / 16dBi

**Test Date:** October 31, 2004

**Temperature:** 28°C

**Tested by:** Max Yao

**Humidity:** 60% RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1593.33	V	46.00	---	-6.84	39.16	---	74.00	54.00	-14.84	Peak
2173.33	V	47.00	---	-3.81	43.19	---	74.00	54.00	-10.81	Peak
2206.67	V	49.84	---	-3.70	46.14	---	74.00	54.00	-7.86	Peak
4866.67	V	42.84	---	3.38	46.22	---	74.00	54.00	-7.78	Peak
N/A										
1633.33	H	43.84	---	-6.61	37.23	---	74.00	54.00	-16.77	Peak
2083.33	H	44.84	---	-4.11	40.73	---	74.00	54.00	-13.27	Peak
4166.67	H	43.34	---	2.64	45.98	---	74.00	54.00	-8.02	Peak
N/A										

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
  - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



## 7.6 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/24/2005
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/11/2005
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	02/05/2005

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## **TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### **Test Data**

#### **Dual-Band Omni-Directional Antenna / 5dBi**

**Operation Mode:** Tx mode **Test Date:** November 3, 2004

**Temperature:** 22°C **Tested by:** Max Yao

**Humidity:** 65 % RH

Frequency MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.200	50.90	---	63.61	53.61	-12.71	---	L1
0.465	32.90	---	56.60	46.60	-23.70	---	L1
0.600	31.00	---	56.00	46.00	-25.00	---	L1
14.350	30.10	---	60.00	50.00	-29.90	---	L1
16.350	34.40	---	60.00	50.00	-25.60	---	L1
16.950	30.50	---	60.00	50.00	-29.50	---	L1
0.200	50.50	---	63.61	53.61	-13.11	---	L2
0.465	33.60	---	56.60	46.60	-23.00	---	L2
0.600	31.60	---	56.00	46.00	-24.40	---	L2
2.400	27.20	---	56.00	46.00	-28.80	---	L2
14.800	32.80	---	60.00	50.00	-27.20	---	L2
16.200	34.90	---	60.00	50.00	-25.10	---	L2


### ***Note:***

1. *Measuring frequencies from 0.15 MHz to 30MHz.*
2. *The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
3. *“---” denotes the emission level was or more than 2dB below the Average limit*
4. *The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;*
5. *L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*




## Test Plots

### Conducted emissions (Line 1)

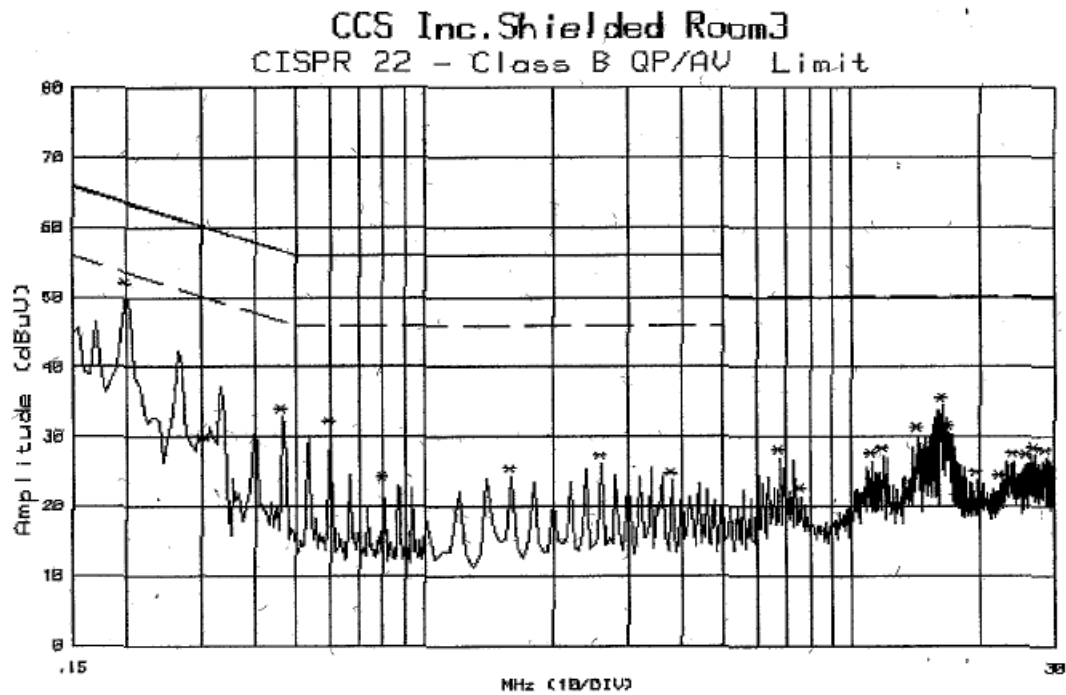

### Conducted emissions (Line 2)

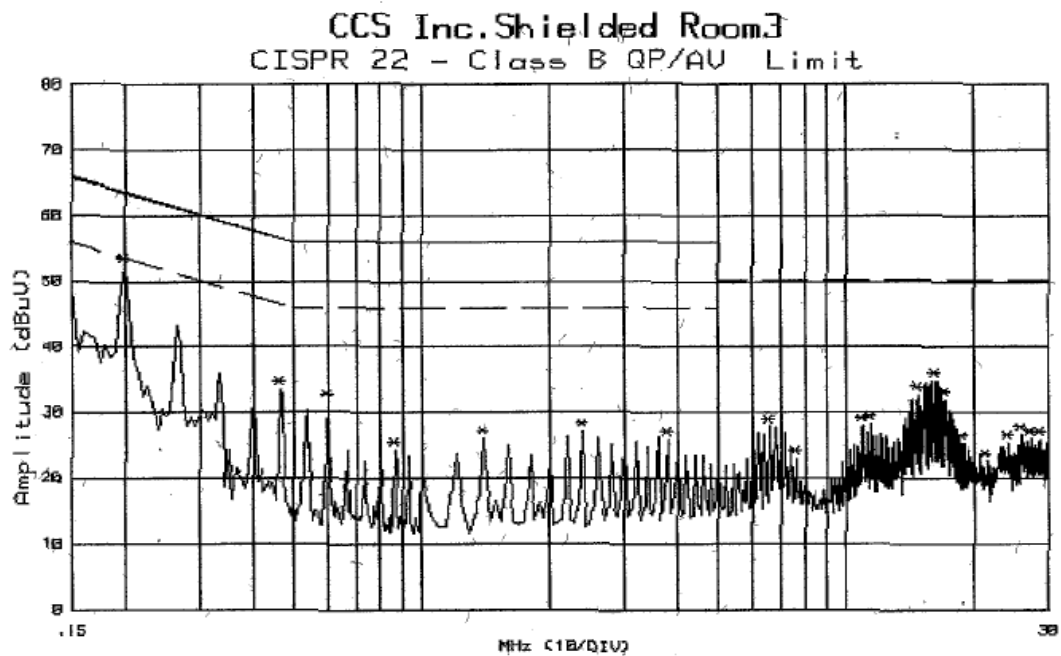



**Panel Directional Antenna / 18dBi****Operation Mode:** Tx mode**Test Date:** November 3, 2004**Temperature:** 22°C**Tested by:** Max Yao**Humidity:** 65 % RH

Frequency MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.200	49.10	---	63.61	53.61	-14.51	---	L1
0.465	30.60	---	56.60	46.60	-26.00	---	L1
0.535	32.40	---	56.00	46.00	-23.60	---	L1
14.400	32.00	---	60.00	50.00	-28.00	---	L1
16.250	33.80	---	60.00	50.00	-26.20	---	L1
17.200	30.60	---	60.00	50.00	-29.40	---	L1
0.200	51.60	---	63.61	53.61	-12.01	---	L2
0.465	32.90	---	56.60	46.60	-23.70	---	L2
0.600	31.70	---	56.00	46.00	-24.30	---	L2
14.400	30.90	---	60.00	50.00	-29.10	---	L2
16.450	34.10	---	60.00	50.00	-25.90	---	L2
17.200	30.90	---	60.00	50.00	-29.10	---	L2


***Note:***

1. *Measuring frequencies from 0.15 MHz to 30MHz.*
2. *The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
3. *“---” denotes the emission level was or more than 2dB below the Average limit*
4. *The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;*
5. *L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*




## Test Plots

### Conducted emissions (Line 1)

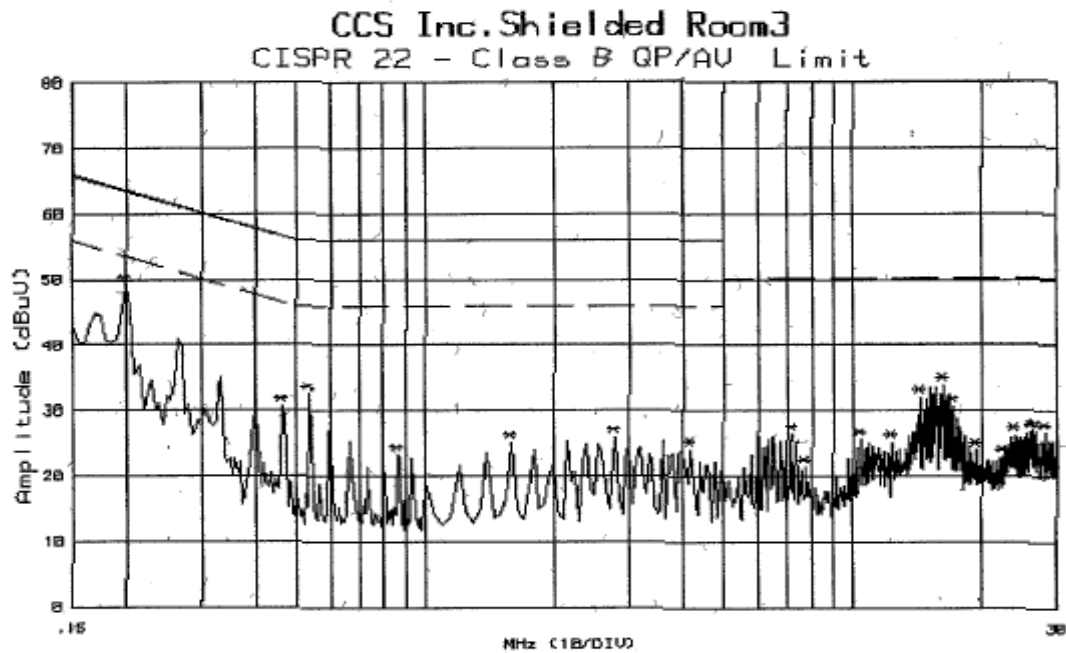

### Conducted emissions (Line 2)

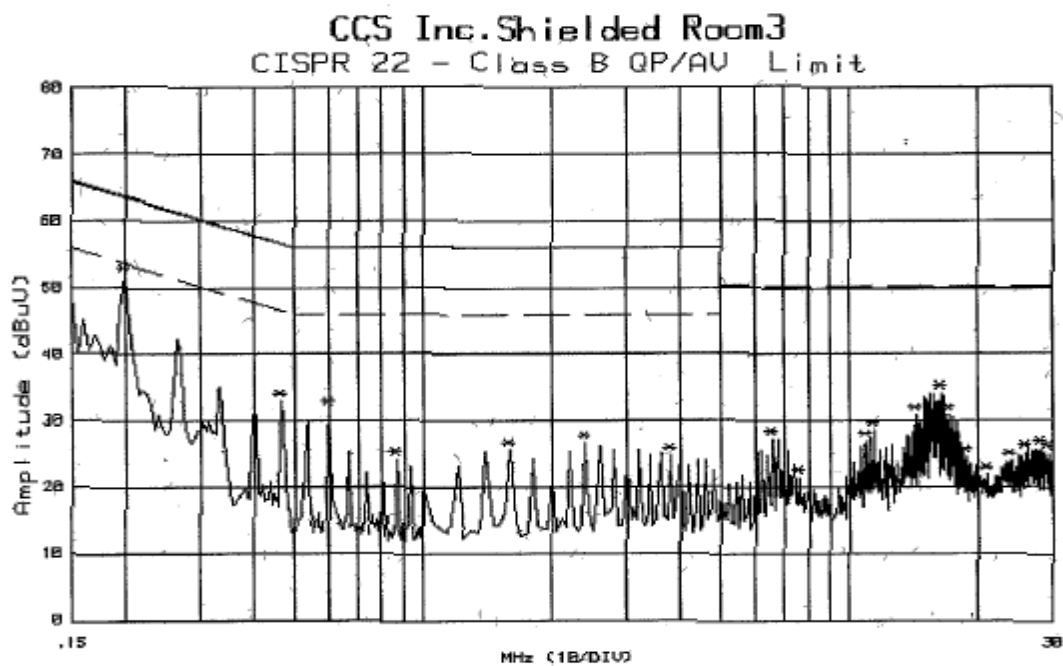

**Dual-Band Omni-Directional Antenna / 5dBi +**  
**Dual-Band Omni-Directional Antenna / 5dBi**

**Operation Mode:** Tx mode      **Test Date:** November 3, 2004  
**Temperature:** 22°C      **Tested by:** Max Yao  
**Humidity:** 65 % RH

Frequency MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.860	43.40	---	56.00	46.00	-12.60	---	L1
3.502	49.70	43.90	56.00	46.00	-6.30	-2.10	L1
3.898	48.60	42.80	56.00	46.00	-7.40	-3.20	L1
14.000	47.10	---	60.00	50.00	-12.90	---	L1
15.488	56.40	43.50	60.00	50.00	-3.60	-6.50	L1
27.533	54.90	44.50	60.00	50.00	-5.10	-5.50	L1
0.860	42.40	---	56.00	46.00	-13.60	---	L2
3.498	53.25	42.90	56.00	46.00	-2.75	-3.10	L2
3.894	53.17	42.60	56.00	46.00	-2.83	-3.40	L2
14.437	57.20	46.30	60.00	50.00	-2.80	-3.70	L2
15.082	57.40	44.70	60.00	50.00	-2.60	-5.30	L2
27.600	47.50	---	60.00	50.00	-12.50	---	L2


**Note:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




## Test Plots

### Conducted emissions (Line 1)

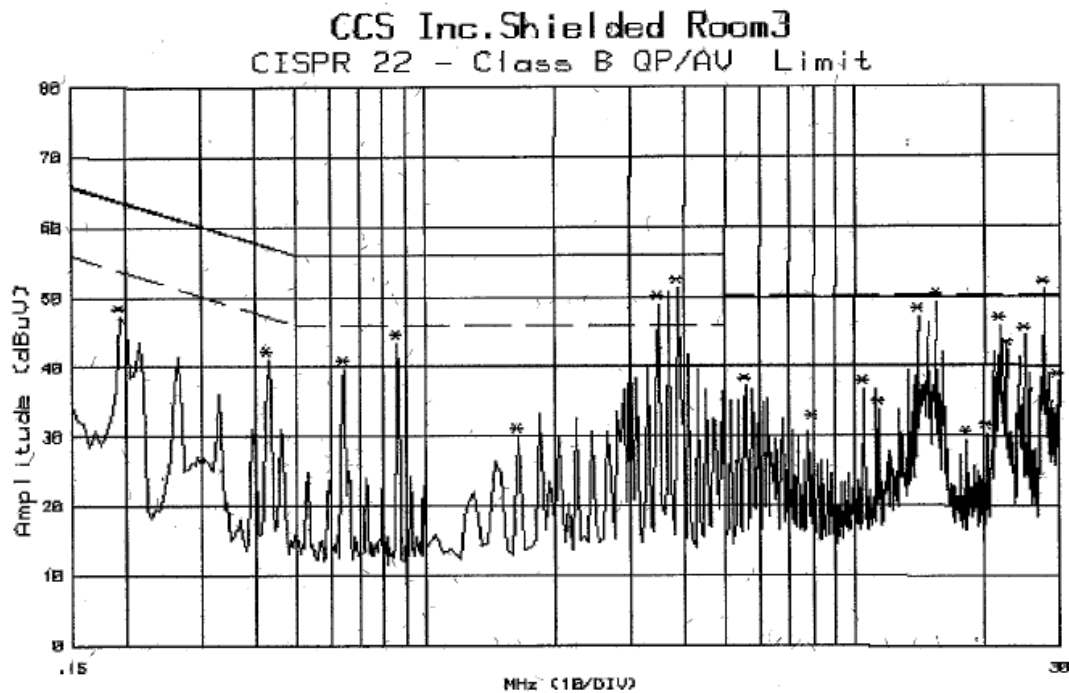

### Conducted emissions (Line 2)

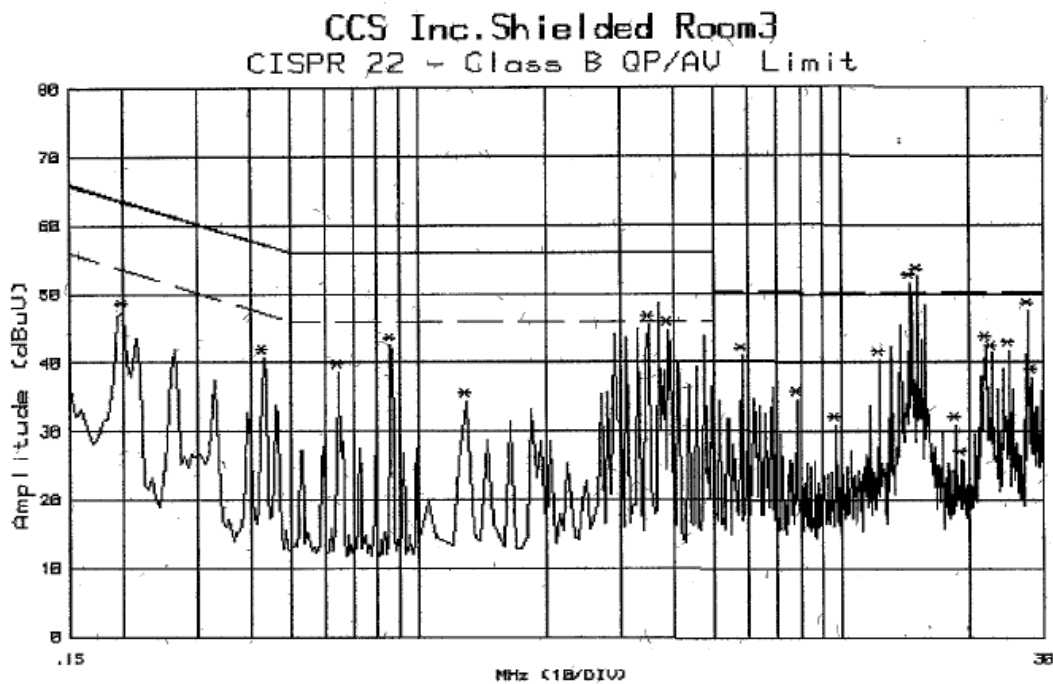

**Panel Directional Antenna / 18dBi + Panel Directional Antenna / 16dBi**

**Operation Mode:** Tx mode                      **Test Date:** November 3, 2004  
**Temperature:** 22°C                              **Tested by:** Max Yao  
**Humidity:** 65 % RH

Frequency MHz	Q.P. Raw dBuV	AVG Raw dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.860	43.40	---	56.00	46.00	-12.60	---	L1
3.505	49.50	42.70	56.00	46.00	-6.50	-3.30	L1
3.904	47.30	43.20	56.00	46.00	-8.70	-2.80	L1
14.394	48.50	46.40	60.00	50.00	-11.50	-3.60	L1
15.039	50.60	47.40	60.00	50.00	-9.40	-2.60	L1
27.497	47.40	46.60	60.00	50.00	-12.60	---	L1
0.860	43.70	---	56.00	46.00	-12.30	---	L2
3.652	50.40	43.20	56.00	46.00	-5.60	-2.80	L2
3.905	51.30	43.10	56.00	46.00	-4.70	-2.90	L2
14.598	49.50	47.30	60.00	50.00	-10.50	-2.70	L2
21.900	48.00	---	60.00	50.00	-12.00	---	L2
27.358	39.50	---	60.00	50.00	-20.50	---	L2


**Note:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



## Test Plots

### Conducted emissions (Line 1)

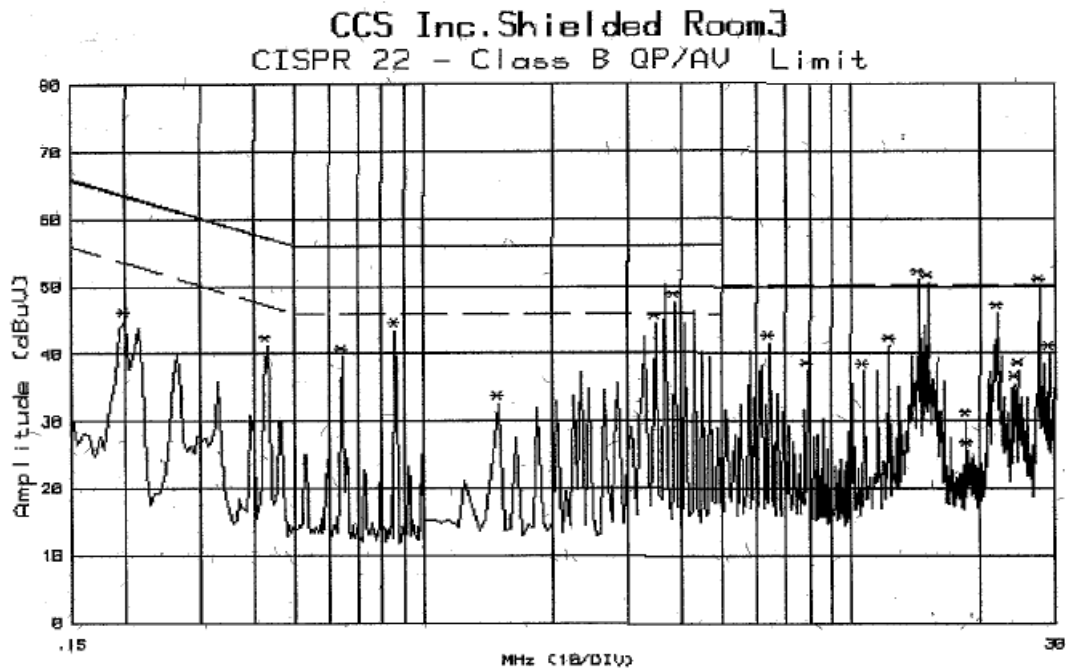

### Conducted emissions (Line 2)

