





Test_Graph_802.11g_ANT2_2462_6Mbps_Lower Band Emissions




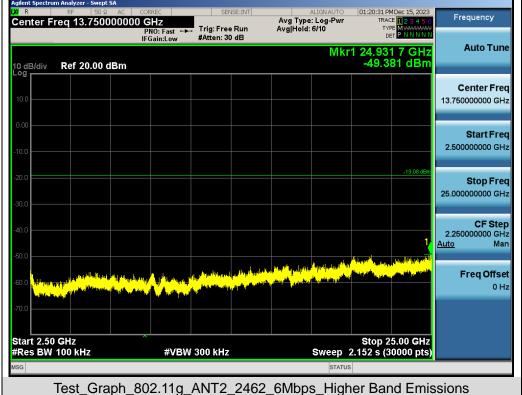




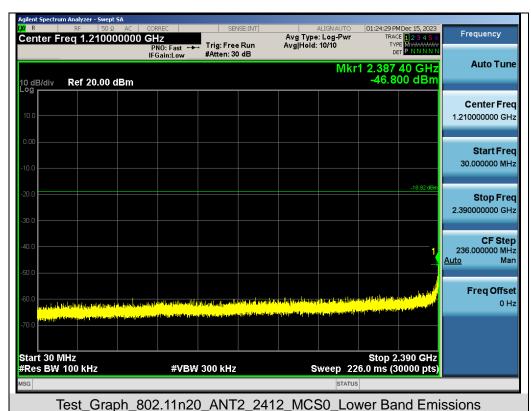

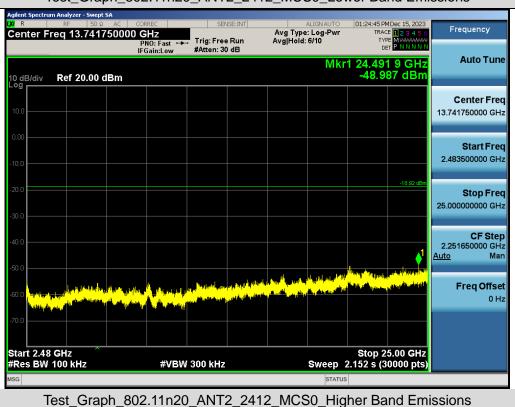






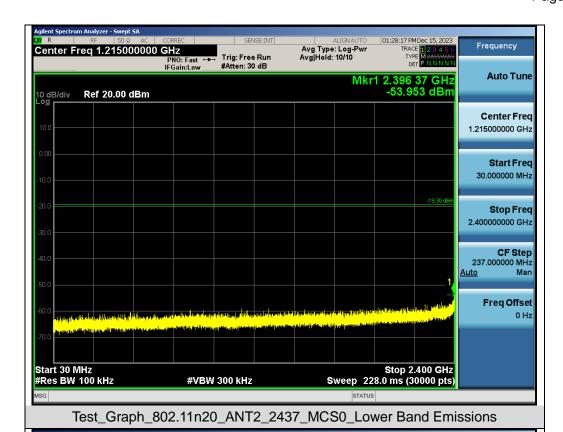


01:28:33 PM Dec 15, 2023
TRACE 12 3 4 5 6
TYPE MWWWWW
DET P N N N N Frequency Center Freq 13.741750000 GHz Trig: Free Run #Atten: 30 dB PNO: Fast →→ IFGain:Low **Auto Tune** Mkr1 21.599 9 GHz -49.725 dBm 10 dB/div Ref 20.00 dBm Center Frea 13.741750000 GHz Start Freq 2 483500000 GHz Stop Frea 25.000000000 GHz **CF Step** 2.251650000 GHz Man Freq Offset Start 2.48 GHz #Res BW 100 kHz Stop 25.00 GHz Sweep 2.152 s (30000 pts) #VBW 300 kHz


Test_Graph_802.11n20_ANT2_2437_MCS0_Higher Band Emissions





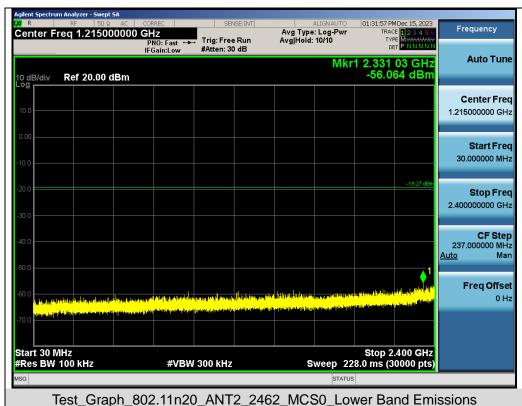











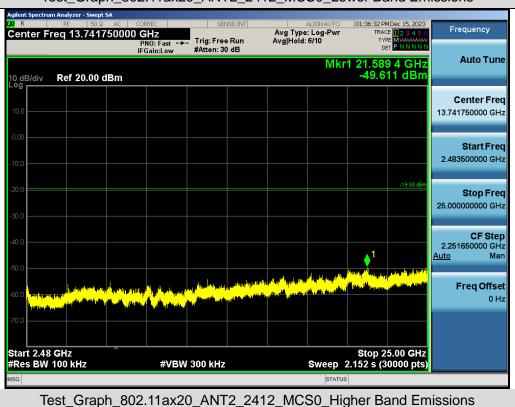

















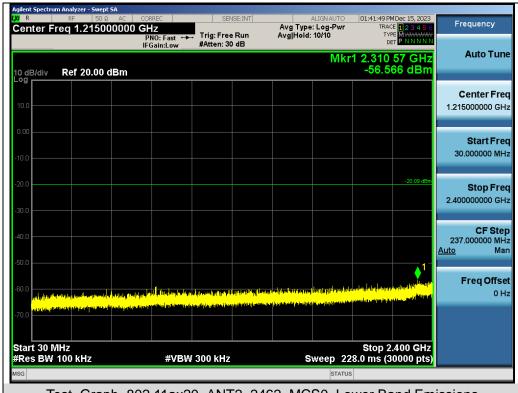

Test_Graph_802.11ax20_ANT2_2462_MCS0_Lower Band Emissions

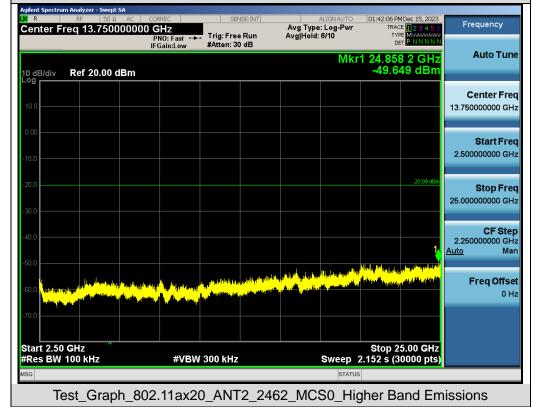



0 Hz




Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_Lower Band Edge Emissions








Test_Graph_802.11ax20_ANT1_2412_MCS0_Lower Band Edge Emissions






Test_Graph_802.11g_ANT2_2412_6Mbps_Lower Band Edge Emissions





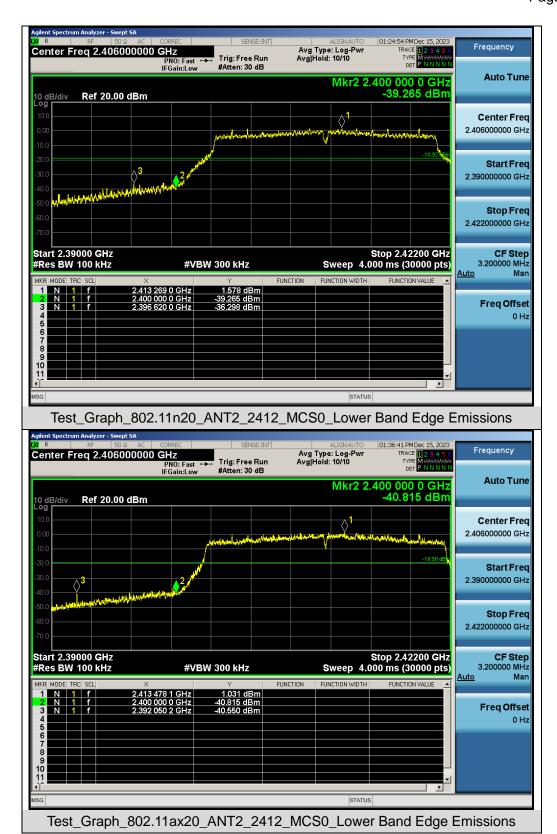

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 96 of 132

11. Radiated Spurious Emission

11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any reposphang alternative (provided the transmitter aloperates a for i longer hand) on the sample of pincases in where in the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Page 97 of 132

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- ◆ The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start Stan Fraguency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



Page 98 of 132

Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold




11.3 Measurement Setup (Block Diagram of Configuration)


Radiated Emission Test Setup 9kHz-30MHz

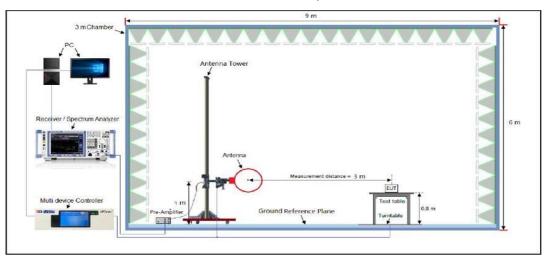

Radiated Emission Test Setup 30MHz-1000MHz

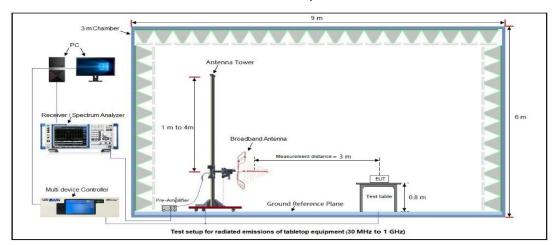


Radiated Emission Test Setup Above 1000MHz

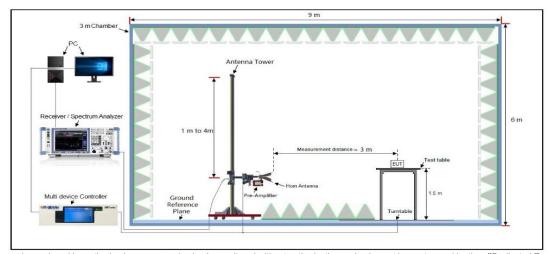

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/






11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


'						
Radiated Emission Test Results at 30MHz-1GHz						
EUT Name	EUT Name FJD Trion P1 LiDAR Scanner Model Name F					
Temperature	23.2°C	Relative Humidity	61.5%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 7	Antenna Polarity	Horizontal			

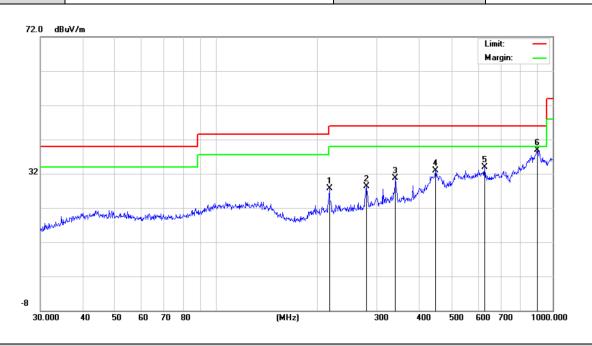

Final D	ata List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	216.7828	27.73	14.42	46.00	18.27	100	180	Horizontal
2	279.0436	28.36	14.90	46.00	17.64	100	100	Horizontal
3	340.7817	30.64	17.12	46.00	15.36	100	60	Horizontal
4	447.9821	32.83	24.82	46.00	13.17	100	220	Horizontal
5	627.2738	33.97	24.51	46.00	12.03	100	170	Horizontal
6	900.1471	38.88	31.78	46.00	7.12	100	130	Horizontal



Radiated Emission Test Results at 30MHz-1GHz					
EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1		
Temperature	23.2°C	Relative Humidity	61.5%		
Pressure	960hPa	Test Voltage	Normal Voltage		
Test Mode	Mode 7	Antenna Polarity	Vertical		

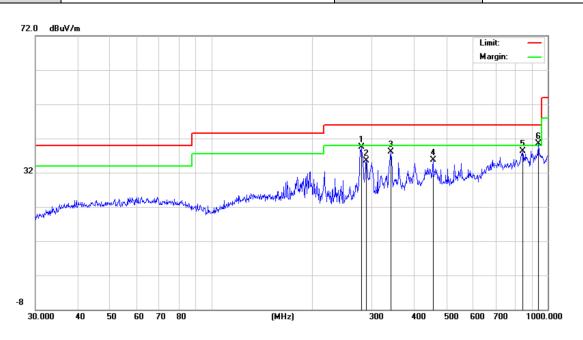

Final Data List Level Factor Limit Margin Height Freq. Angle NO. **Polarity** [MHz] [dBµV/m] [dB] [dBµV/m] [dB] [cm] [°] 1 279.0436 39.50 18.38 46.00 6.5 100 180 Vertical 2 289.0020 35.60 18.62 46.00 10.4 100 100 Vertical Vertical 341.9786 38.13 19.76 46.00 7.87 100 3 60 455.9057 35.65 25.38 46.00 10.35 100 220 Vertical 4 5 842.1295 38.31 27.56 46.00 7.69 100 170 Vertical 5.59 6 938.8324 40.41 30.84 46.00 100 130 Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



Page 102 of 132

Radiated Emissions Test Results above 1 GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4824.000	46.32	0.08	46.4	74	-27.6	peak	
4824.000	37.54	0.08	37.62	54	-16.38	AVG	
7236.000	41.54	2.21	43.75	74	-30.25	peak	
7236.000	32.42	2.21	34.63	54	-19.37	AVG	

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4824.000	47.25	0.08	47.33	74	-26.67	peak	
4824.000	38.41	0.08	38.49	54	-15.51	AVG	
7236.000	41.28	2.21	43.49	74	-30.51	peak	
7236.000	32.17	2.21	34.38	54	-19.62	AVG	
2 om ark:		<u> </u>					

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 103 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	46.28	0.14	46.42	74	-27.58	peak
4874.000	37.54	0.14	37.68	54	-16.32	AVG
7311.000	42.01	2.36	44.37	74	-29.63	peak
7311.000	32.41	2.36	34.77	54	-19.23	AVG
_						

|Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name FJD Trion P1 LiDAR Scanner		Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	46.28	0.14	46.42	74	-27.58	peak
4874.000	38.54	0.14	38.68	54	-15.32	AVG
7311.000	42.13	2.36	44.49	74	-29.51	peak
7311.000	32.42	2.36	34.78	54	-19.22	AVG
_						

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 104 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	47.13	0.22	47.35	74	-26.65	peak
4924.000	37.94	0.22	38.16	54	-15.84	AVG
7386.000	41.59	2.64	44.23	74	-29.77	peak
7386.000	32.48	2.64	35.12	54	-18.88	AVG
_						

|Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	47.64	0.22	47.86	74	-26.14	peak
4924.000	38.46	0.22	38.68	54	-15.32	AVG
7386.000	41.88	2.64	44.52	74	-29.48	peak
7386.000	32.12	2.64	34.76	54	-19.24	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 105 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner Model Name		P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.59	0.08	46.67	74	-27.33	peak
4824.000	37.58	0.08	37.66	54	-16.34	AVG
7236.000	41.55	2.21	43.76	74	-30.24	peak
7236.000	32.07	2.21	34.28	54	-19.72	AVG
		_		_		

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.28	0.08	46.36	74	-27.64	peak
4804.000	37.54	0.08	37.62	54	-16.38	AVG
7236.000	42.16	2.21	44.37	74	-29.63	peak
7236.000	32.48	2.21	34.69	54	-19.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 106 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	UT Name FJD Trion P1 LiDAR Scanner Model Name		P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	47.61	0.14	47.75	74	-26.25	peak
4874.000	38.42	0.14	38.56	54	-15.44	AVG
7311.000	42.69	2.36	45.05	74	-28.95	peak
7311.000	31.87	2.36	34.23	54	-19.77	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 5	Antenna Polarity	Vertical

(MHz) (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) 4874.000 46.29 0.14 46.43 74 -27.57 pe 4874.000 37.54 0.14 37.68 54 -16.32 A¹ 7311.000 42.06 2.36 44.42 74 -29.58 pe	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
4874.000 37.54 0.14 37.68 54 -16.32 A\text{7311.000} 7311.000 42.06 2.36 44.42 74 -29.58 pe	(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
7311.000 42.06 2.36 44.42 74 -29.58 pe	4874.000	46.29	0.14	46.43	74	-27.57	peak
	4874.000	37.54	0.14	37.68	54	-16.32	AVG
7311,000 31,35 3.36 33,61 54 30,30 4)	7311.000	42.06	2.36	44.42	74	-29.58	peak
7511.000 51.25 2.30 55.01 54 -20.39 A	7311.000	31.25	2.36	33.61	54	-20.39	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 107 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.14	0.22	46.36	74	-27.64	peak
4924.000	37.61	0.22	37.83	54	-16.17	AVG
7386.000	42.54	2.64	45.18	74	-28.82	peak
7386.000	31.58	2.64	34.22	54	-19.78	AVG

|Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.29	0.22	46.51	74	-27.49	peak
4924.000	37.54	0.22	37.76	54	-16.24	AVG
7386.000	41.05	2.64	43.69	74	-30.31	peak
7386.000	32.43	2.64	35.07	54	-18.93	AVG
		_		·		

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 108 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1	
Temperature	23.2°C	Relative Humidity	61.5%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 7	Antenna Polarity	Horizontal	

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	47.66	0.08	47.74	74	-26.26	peak
4824.000	38.42	0.08	38.5	54	-15.5	AVG
7236.000	42.04	2.21	44.25	74	-29.75	peak
7236.000	31.46	2.21	33.67	54	-20.33	AVG
				_		

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4824.000	47.64	0.08	47.72	74	-26.28	peak
4824.000	38.54	0.08	38.62	54	-15.38	AVG
7236.000	42.5	2.21	44.71	74	-29.29	peak
7236.000	32.46	2.21	34.67	54	-19.33	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



Page 109 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	46.28	0.14	46.42	74	-27.58	peak
4874.000	38.42	0.14	38.56	54	-15.44	AVG
7311.000	42.13	2.36	44.49	74	-29.51	peak
7311.000	32.47	2.36	34.83	54	-19.17	AVG

|Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	47.61	0.14	47.75	74	-26.25	peak
4874.000	37.91	0.14	38.05	54	-15.95	AVG
7311.000	41.53	2.36	43.89	74	-30.11	peak
7311.000	31.86	2.36	34.22	54	-19.78	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 110 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	47.61	0.22	47.83	74	-26.17	peak
4924.000	38.29	0.22	38.51	54	-15.49	AVG
7386.000	41.55	2.64	44.19	74	-29.81	peak
7386.000	32.64	2.64	35.28	54	-18.72	AVG
				·		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.29	0.22	46.51	74	-27.49	peak
4924.000	38.64	0.22	38.86	54	-15.14	AVG
7386.000	41.99	2.64	44.63	74	-29.37	peak
7386.000	31.45	2.64	34.09	54	-19.91	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 111 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.28	0.08	46.36	74	-27.64	peak
4824.000	37.54	0.08	37.62	54	-16.38	AVG
7236.000	42.05	2.21	44.26	74	-29.74	peak
7236.000	32.43	2.21	34.64	54	-19.36	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	46.28	0.08	46.36	74	-27.64	peak
4824.000	37.54	0.08	37.62	54	-16.38	AVG
7236.000	42.09	2.21	44.3	74	-29.7	peak
7236.000	32.44	2.21	34.65	54	-19.35	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 112 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Horizontal

(MHz) 4874.000	(dBµV) 46.28	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4874.000	46.20				` ,	
	40.20	0.14	46.42	74	-27.58	peak
4874.000	38.42	0.14	38.56	54	-15.44	AVG
7311.000	41.06	2.36	43.42	74	-30.58	peak
7311.000	31.24	2.36	33.6	54	-20.4	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 11	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	47.61	0.14	47.75	74	-26.25	peak
4874.000	38.29	0.14	38.43	54	-15.57	AVG
7311.000	41.64	2.36	44	74	-30	peak
7311.000	32.55	2.36	34.91	54	-19.09	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass



Page 113 of 132

Radiated Emissions Test Results above 1GHz

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.28	0.22	46.5	74	-27.5	peak
4924.000	37.52	0.22	37.74	54	-16.26	AVG
7386.000	42.34	2.64	44.98	74	-29.02	peak
7386.000	41.67	2.64	44.31	54	-9.69	AVG
_				·		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	23.2°C	Relative Humidity	61.5%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	47.61	0.22	47.83	74	-26.17	peak
4924.000	38.47	0.22	38.69	54	-15.31	AVG
7386.000	41.06	2.64	43.7	74	-30.3	peak
7386.000	32.54	2.64	35.18	54	-18.82	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

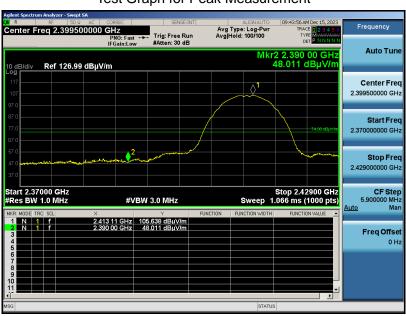

Test Graph for Average Measurement

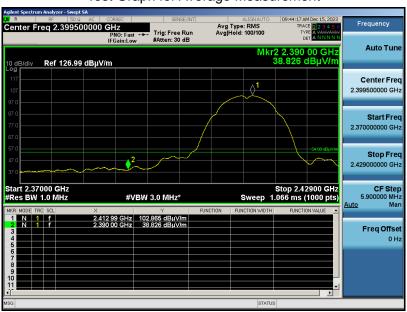


RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

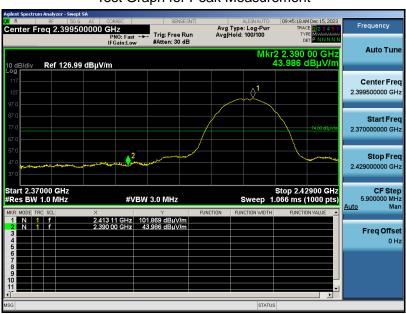

Test Graph for Average Measurement

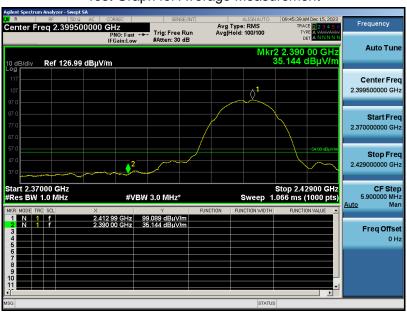

RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

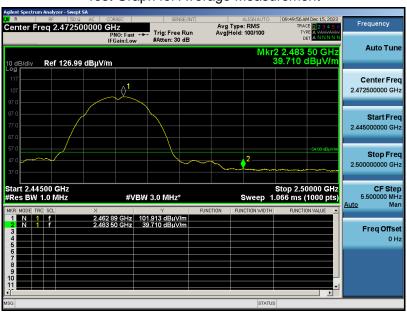

RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

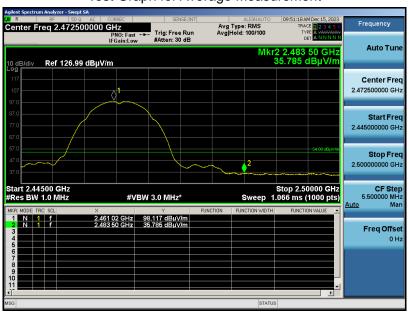


RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

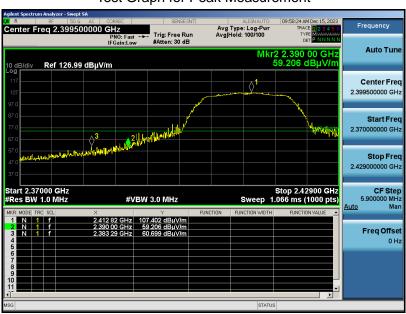

Test Graph for Average Measurement

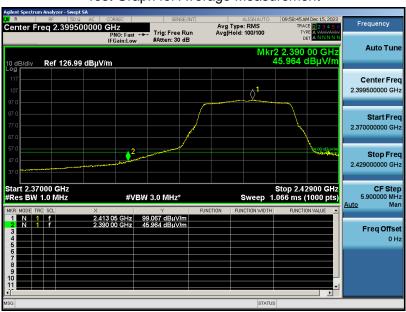


RESULT: Pass



EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

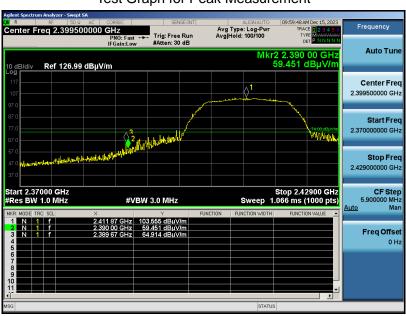

Test Graph for Average Measurement




RESULT: Pass



EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

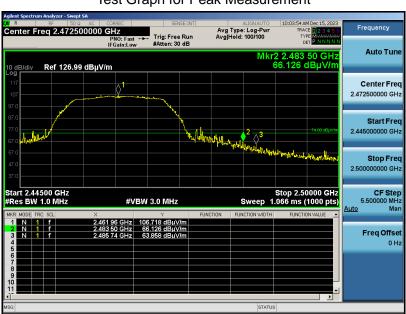

Test Graph for Average Measurement



RESULT: Pass



EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

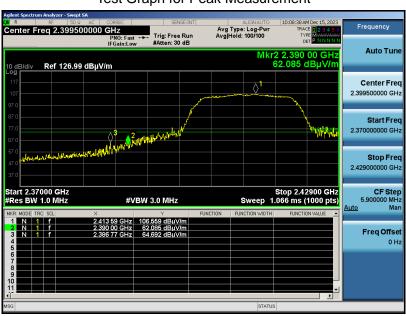

Test Graph for Average Measurement

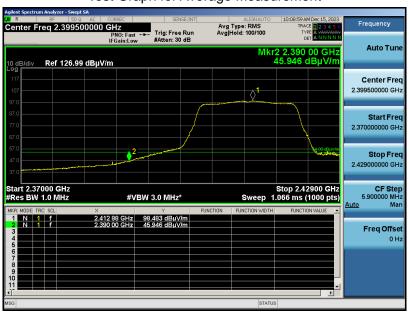


RESULT: Pass



EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Test Graph for Peak Measurement

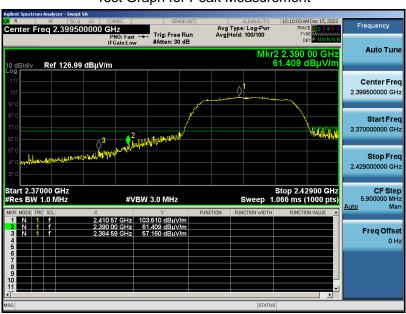

Test Graph for Average Measurement



RESULT: Pass



EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

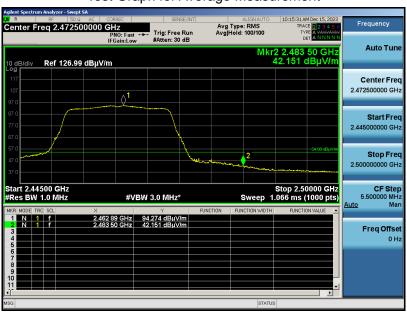

RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

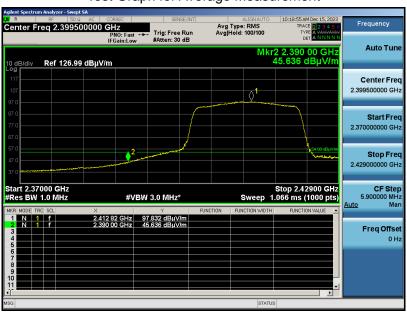

RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

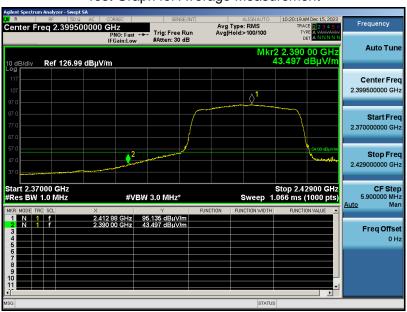

RESULT: Pass




EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

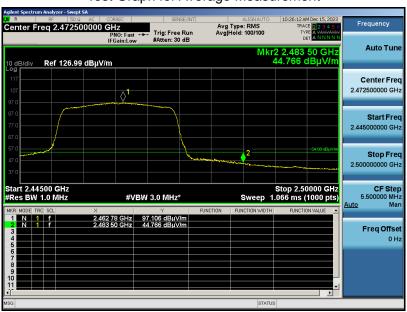

RESULT: Pass



EUT Name	FJD Trion P1 LiDAR Scanner	Model Name	P1
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Report No.: AGC12845231102FR01

Page 130 of 132

12. AC Power Line Conducted Emission


12.1 Measurement Limits

F	Maximum RF Line Voltage		
Frequency	Q.P (dBμV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 Block Diagram of Line Conducted Emission Test

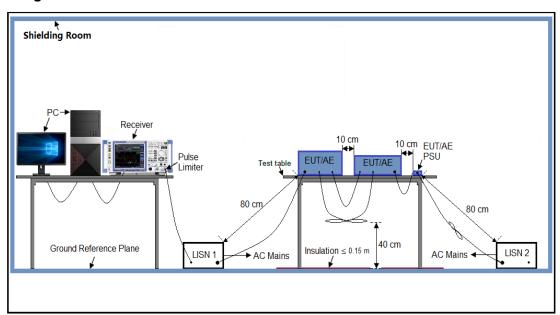



Report No.: AGC12845231102FR01

Page 131 of 132

12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.

12.5 Test Result of Line Conducted Emission Test

N/A

Note: The WIFI function cannot transmit when charging



Report No.: AGC12845231102FR01

Page 132 of 132

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC12845231102AP02

Appendix II: Photographs of EUT

Refer to the Report No.: AGC12845231102AP03

----End of Report----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.