


1. Product Overview & Dimension

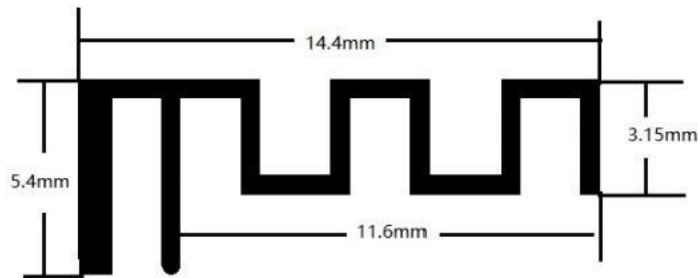

Inverted F Antenna Specification


Summary

ITEM	ANT SPEC					
Model Name	2. 4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz
	-1.26	-0.76	-0.58	-5.25	-2.46	-1.86
MAX. Gain	-0.58dB					
Polarization	Horizontal and Vertical					
Azimuth Beam Patten	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					

Manufacturer: Jiangxi Province Hongruixing Technology Co., Ltd
No. 29 Development Avenue, Industrial Park, Jizhou District, Ji'an, Jiangxi, China

2. Test Result


2.1 VSWR

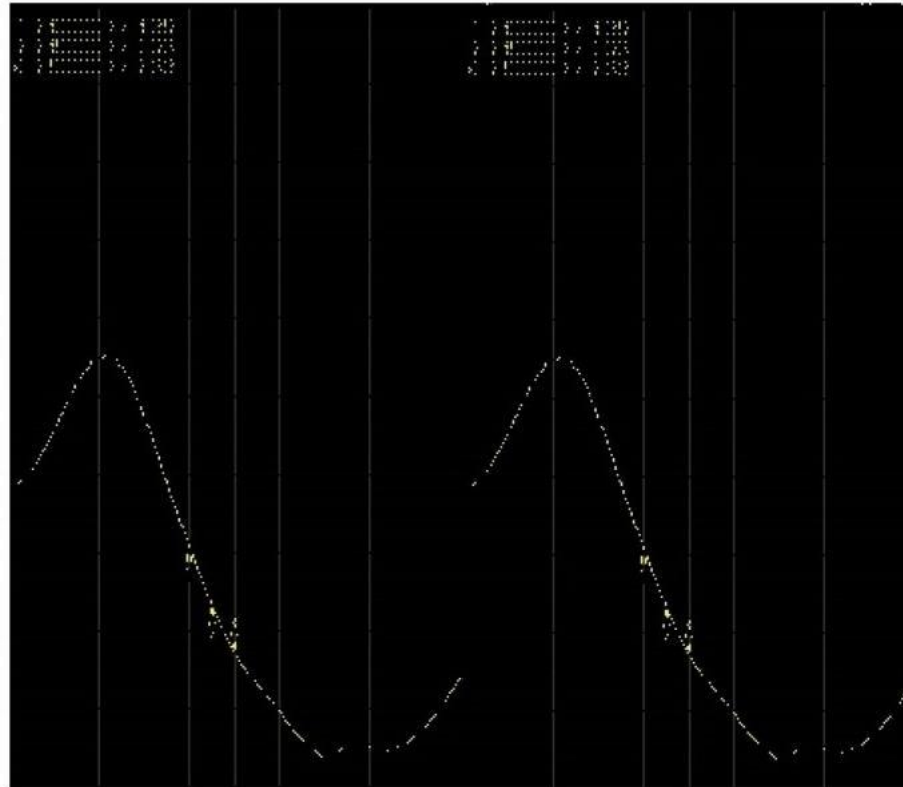

Frequency (MHz)	2400	2450	2500
VSWR	4.08	3.32	2.69

2. Test Result

2.2SMISH

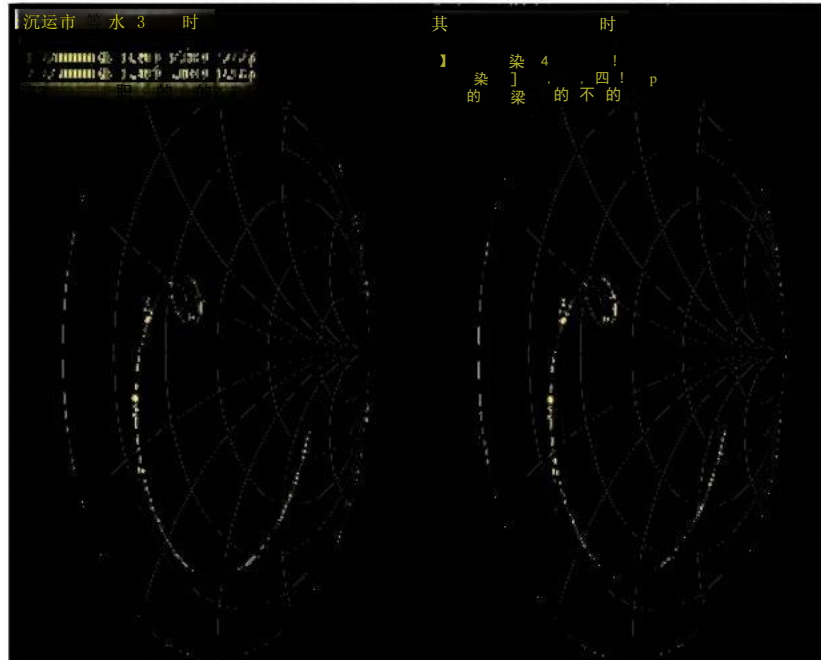

Frequency (MHz)	2400	2450	2500
SMISH	13.39	15.20	18.68


2. Test Result

2.3 GAIN & Efficiency

Frequency (MHz)	Efficiency (%)	Average GAIN(dB)	Peak GAIN (dBi)
2400	4.33	-13.64	-1.26
2450	5.26	-12.79	-0.76
2500	5.96	-12.25	-0.58

2. Test Result

2.4 3D DATE

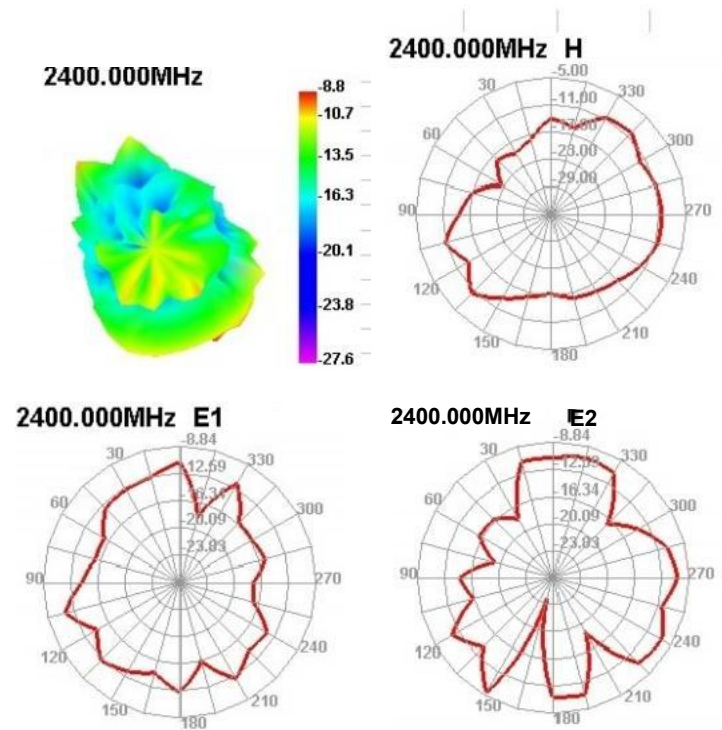

2. Test Result

