



**GFSK mode - conducted emissions at the band edge**


Low band-edge (no-hopping mode mode)

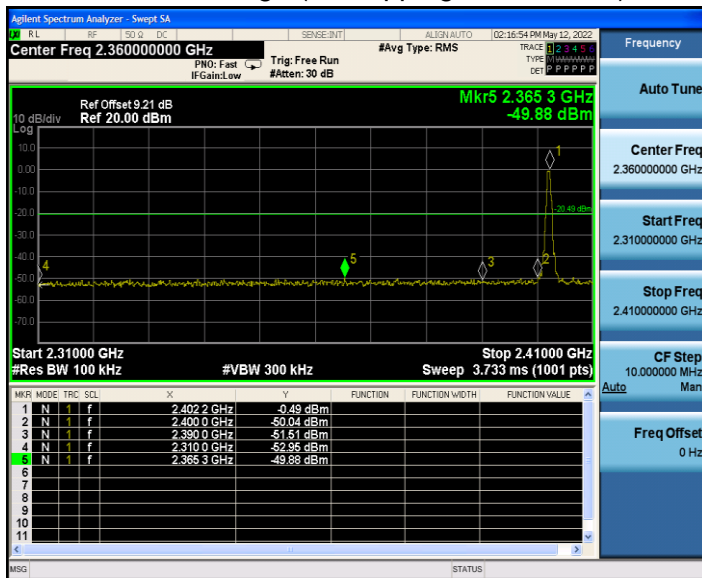


High band-edge (non-hopping mode)

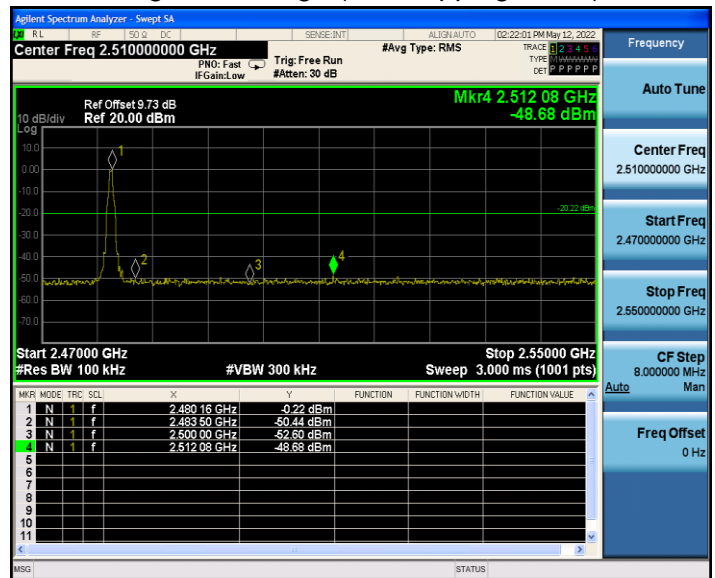

Low band-edge (hopping mode)

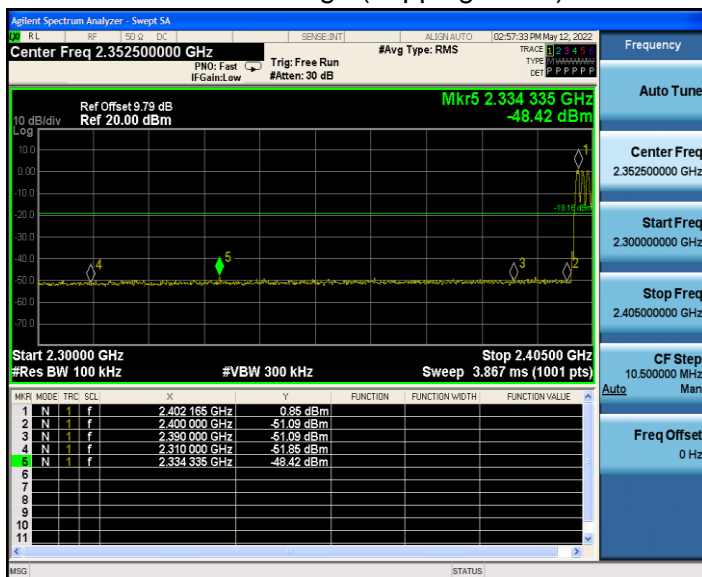



High band-edge (hopping mode)

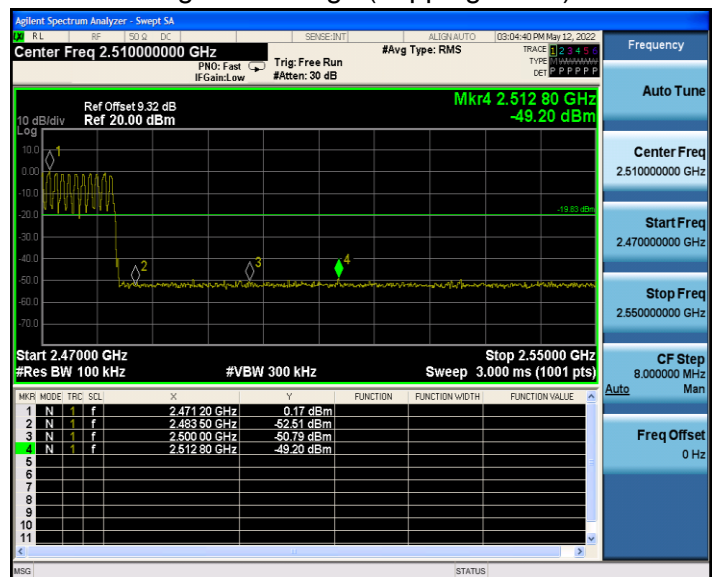

# $\pi/4$ -DQPSK mode - conducted emissions at the band edge



Low band-edge (non-hopping mode)

High band-edge (non-hopping mode)

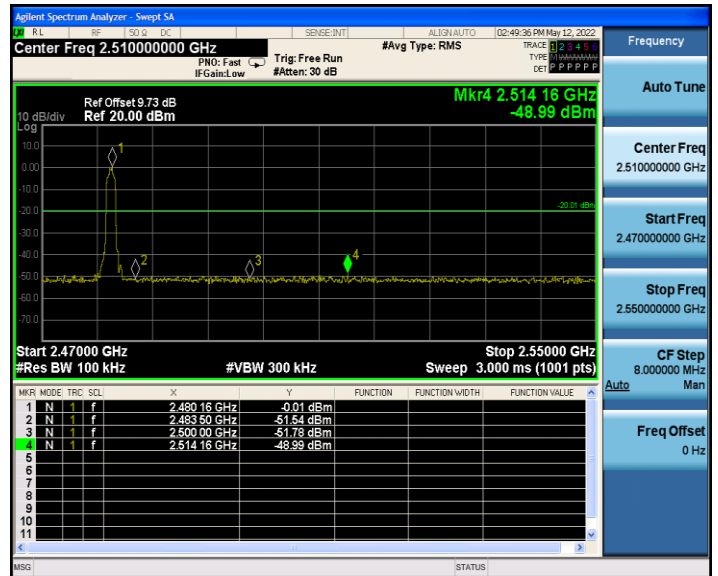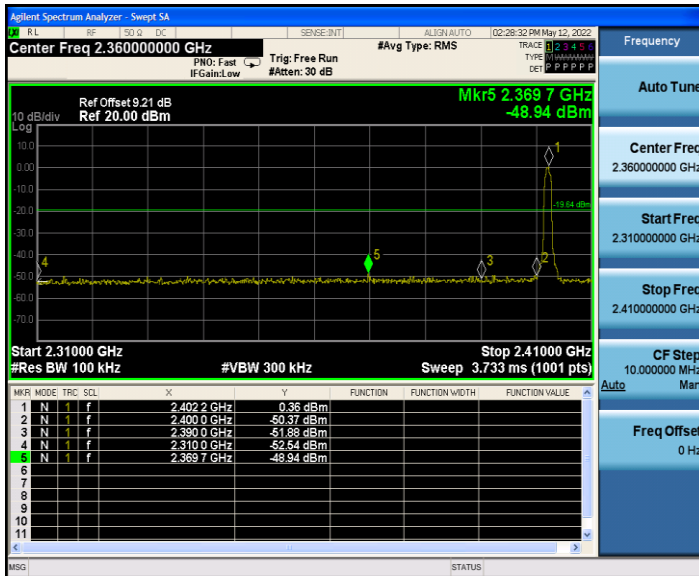


Low band-edge (hopping mode)

High band-edge (hopping mode)

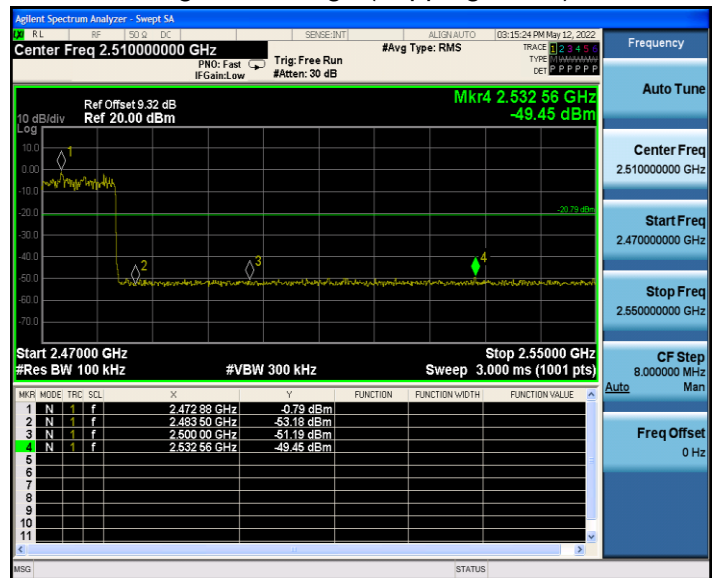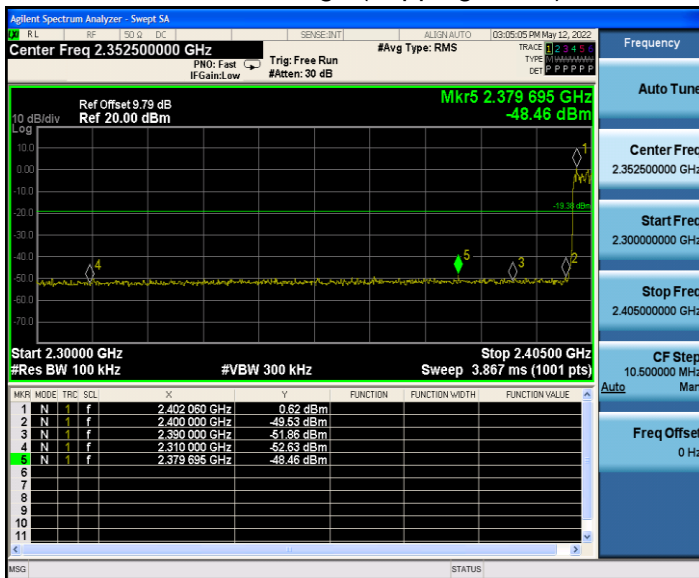


## 8DPSK mode - conducted emissions at the band edge


### Low band-edge (non-hopping mode)

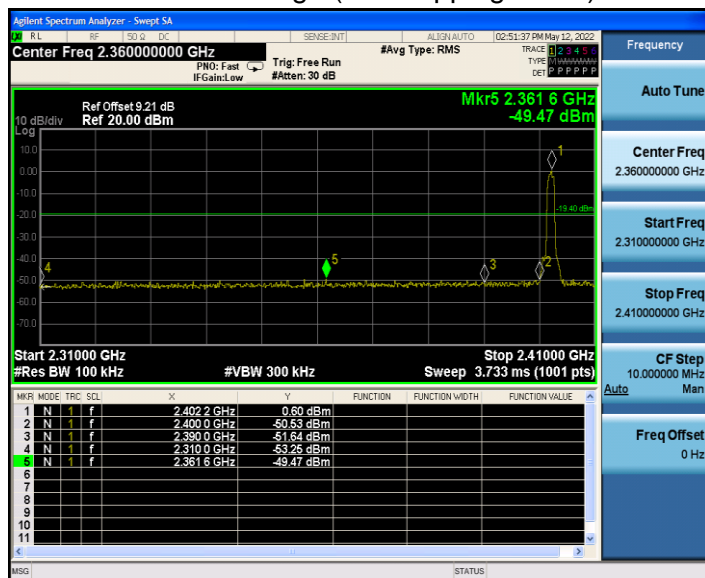


### High band-edge (non-hopping mode)

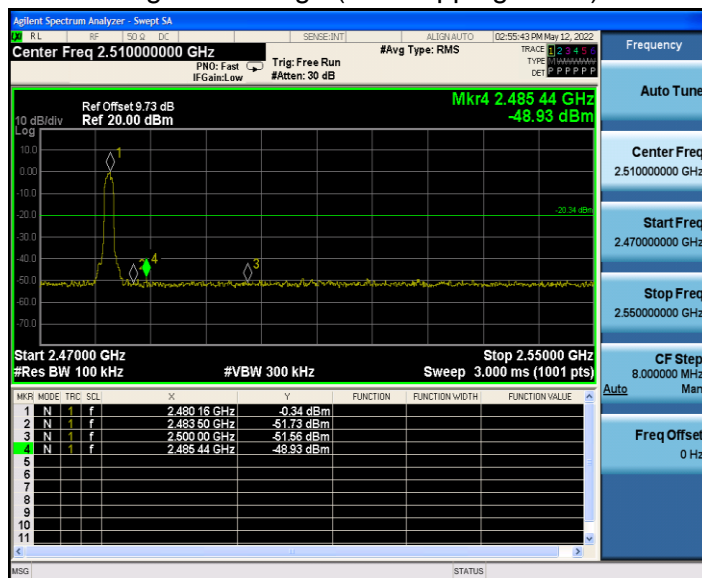

### Low band-edge (hopping mode)

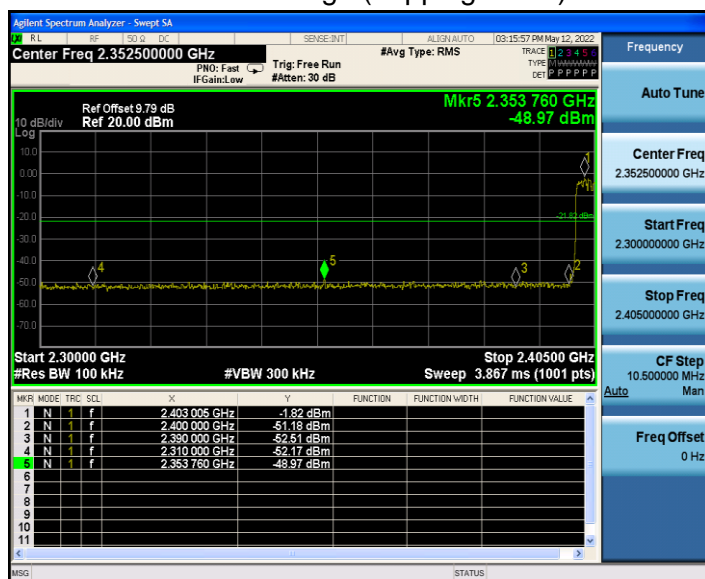

### High band-edge (hopping mode)

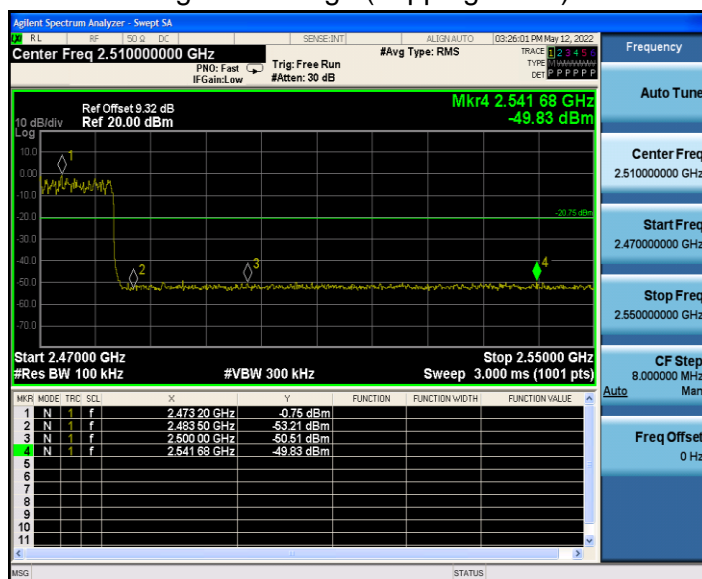


## 5.9 Conducted spurious emissions

### 5.9.1 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.9.2 Test setup



### 5.9.3 Test procedure

- Test method: ANSI C63.10-2013 Section 6.10.4
- The EUT was set to non-hopping mode & hopping mode during the test.
- The transmitter output of EUT is connected to the spectrum analyzer.
- Spectrum analyzer setting: RBW = 100 kHz, VBW = 300 kHz, Detector = Peak.

### 5.9.4 Test results

#### Notes:


All modes of operation of the EUT were investigated, and only the worst-case results are reported. The worst-case mode: TX mode (8DPSK).

**Conducted spurious emissions –8DPSK mode**


CH0



CH0

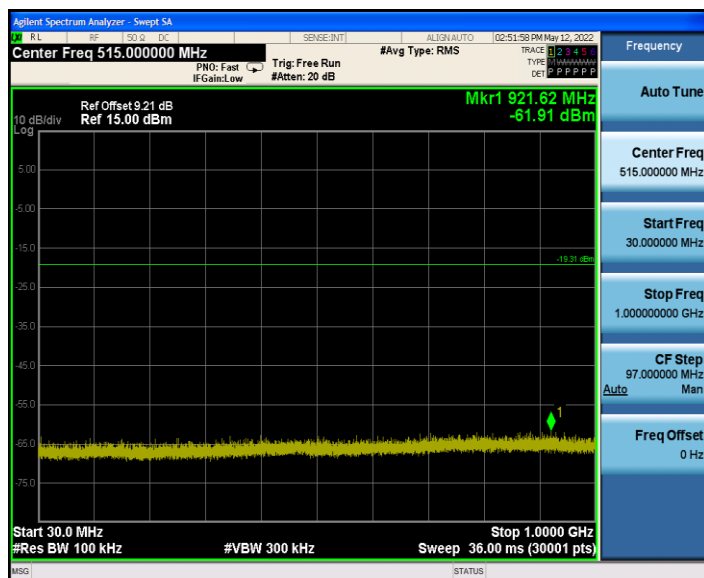


CH0

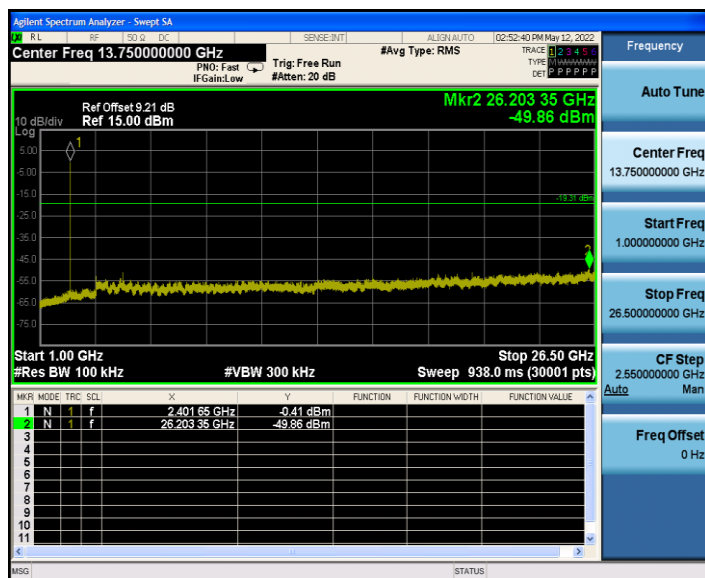


CH39



CH39

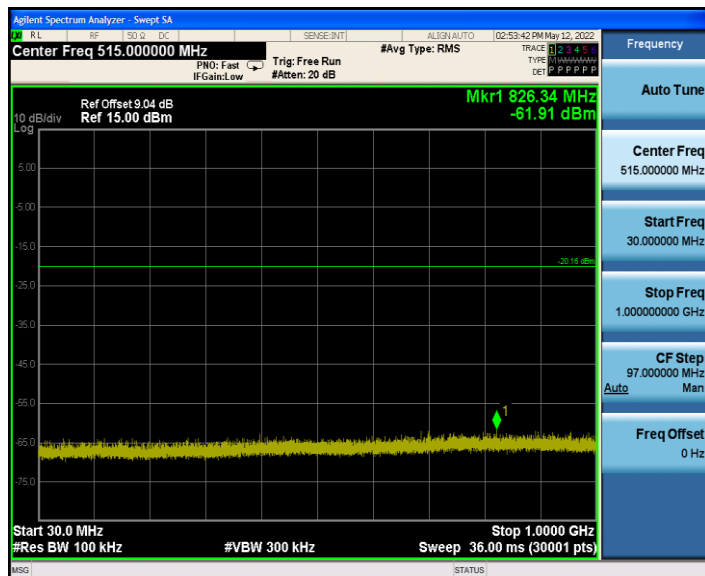


CH39

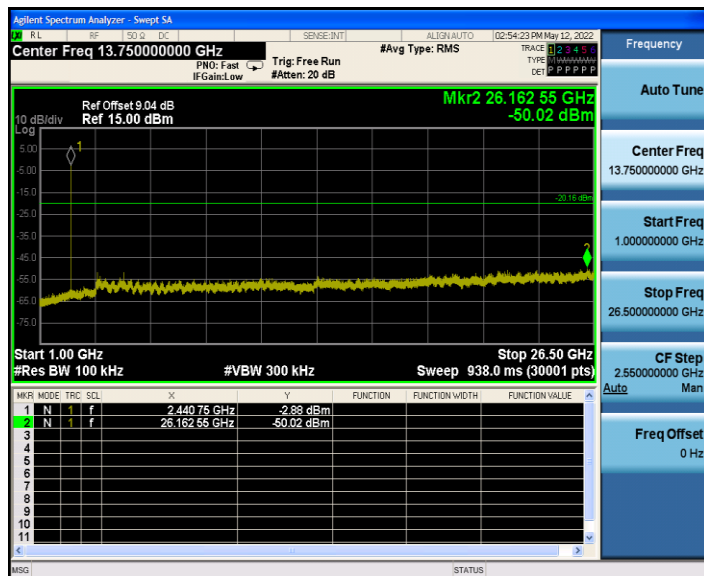




**Conducted spurious emissions –8DPSK mode**


CH78

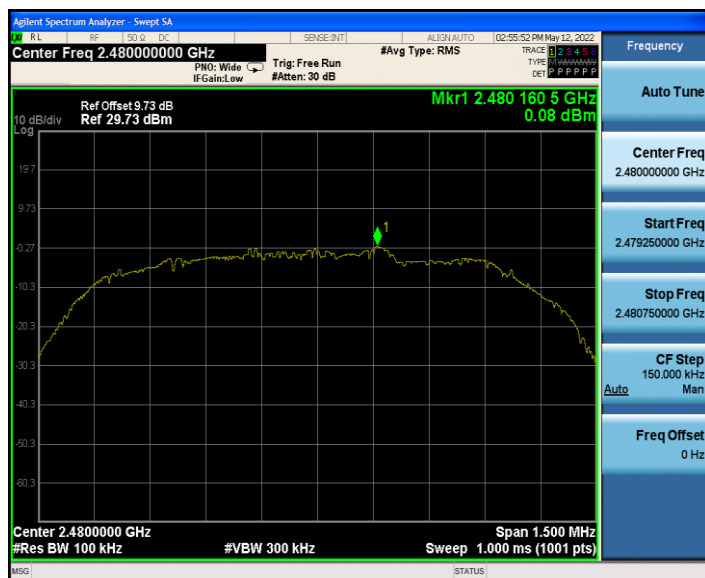

CH78

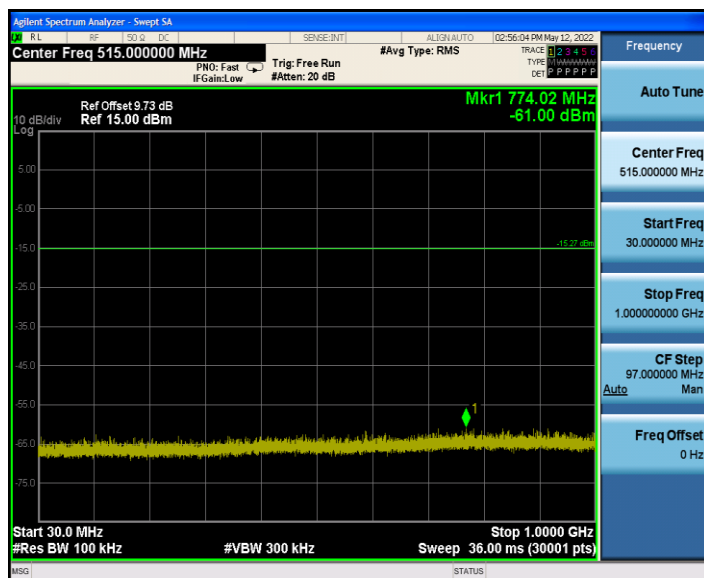

CH78

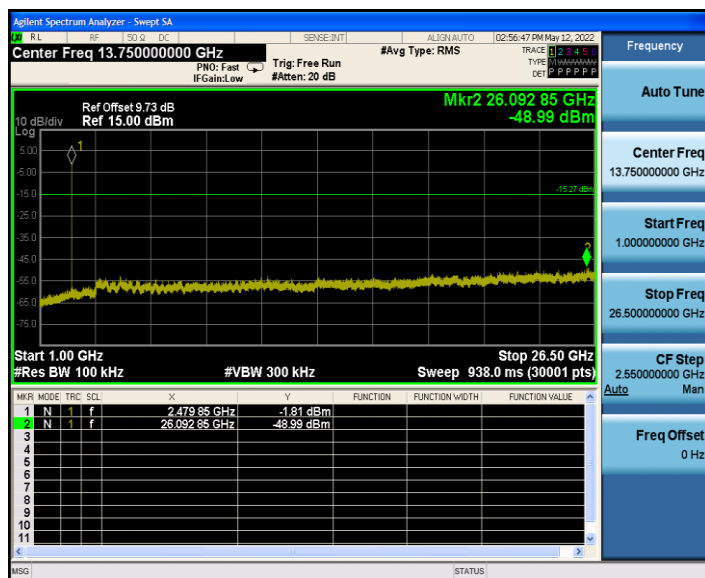

## 5.10 Radiated spurious emission

### 5.10.1 Limits

§ 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

§ 15.209 Radiated emission limits; general requirements.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Note 1:** the tighter limit applies at the band edges.

**Note 2:** the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector

§ 15.35 (b) requirements:

When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.253(d), 15.255, 15.256, and 15.509 through 15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

According to ANSI C63.10-2013, the tests shall be performed in the frequency range shown in the following table:

**Frequency range of measurements for unlicensed wireless device**

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified


**Frequency range of measurements for unlicensed wireless device with digital device**

Highest frequency generated or used in the device or on which the device operates or tunes	Upper frequency range of measurement
Below 1.705 MHz	30 MHz
1.705 MHz to 108 MHz	1000 MHz
108 MHz to 500 MHz	2000 MHz
500 MHz to 1000 MHz	5000 MHz
Above 1000 MHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower




### 5.10.2 Test setup


Below 30MHz

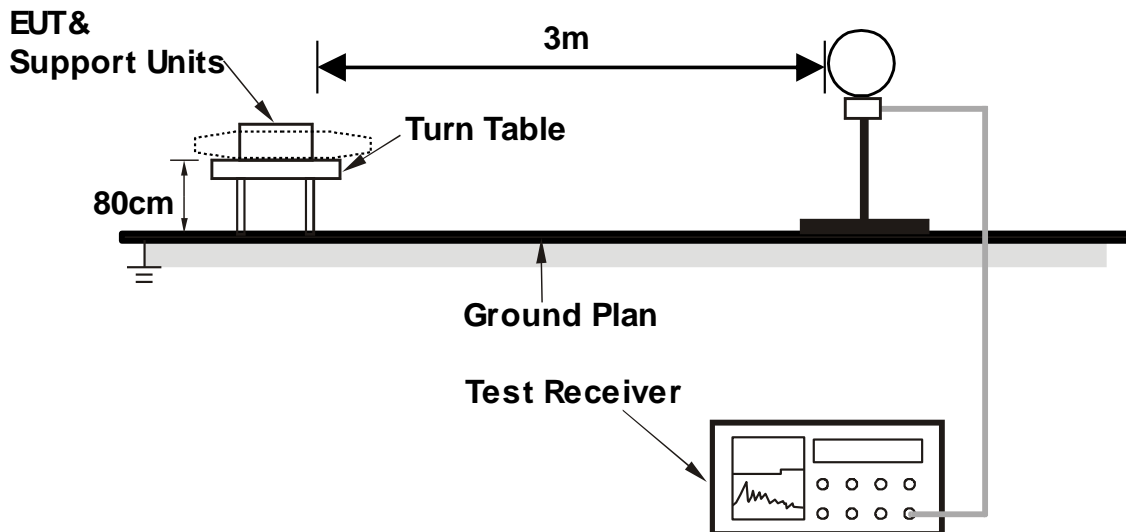

30MHz~1GHz

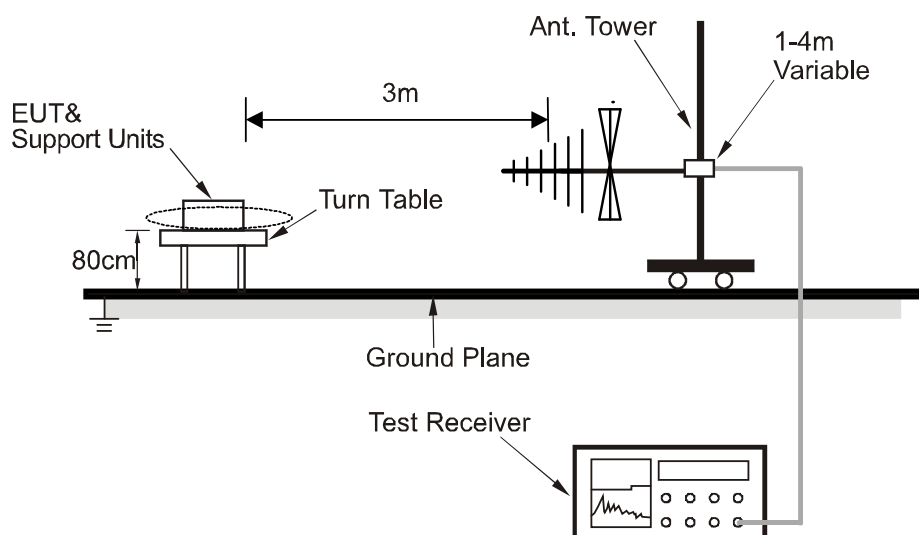

Above 1GHz

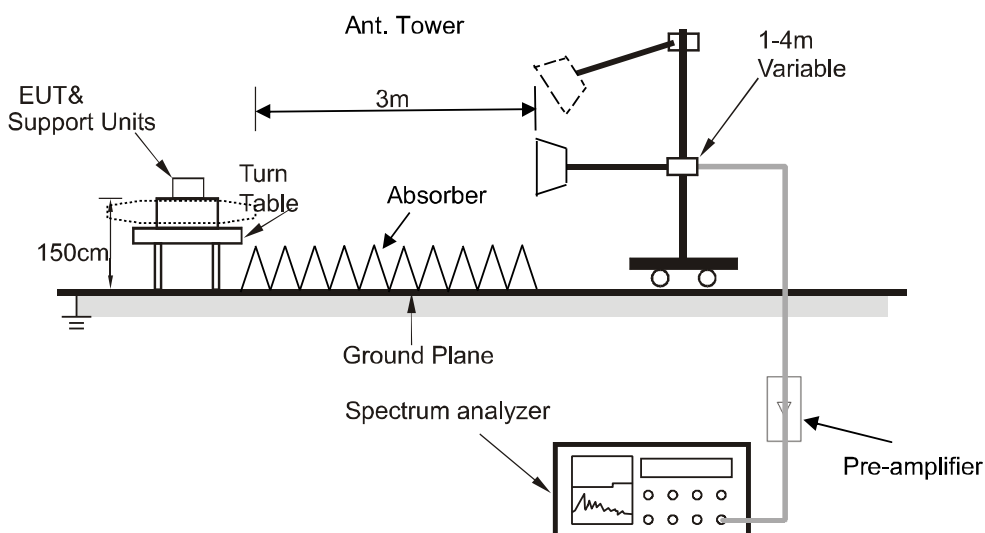

For the actual test configuration, please refer to the related item – Photographs of the test setup.

### 5.10.3 Test procedure

- a) Test method: ANSI C63.10-2013 Section 6.3, 6.4, 6.5, 6.6, 6.10.
- b) The EUT is placed on an on-conducting table 0.8 meters above the ground plane for measurement below 1GHz, 1.5 meters above the ground plane for measurement above 1GHz.
- c) Emission blew 18 GHz were measured at a 3 meters test distance, above 18 GHz were measured at 1.5-meter test distance with the application of a distance correction factor
- d) The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

KDB 558074 D01 15.247 Meas Guidance v05r02

The use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247. This DCCF can be applied when the unwanted emission limit is subject to an average field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied. The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement. The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level). It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector. Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period.

### Test instrument setup

Frequency	Test receiver / Spectrum analyzer setting
9 kHz ~ 150 kHz	Quasi Peak / RBW: 200 Hz
150 kHz ~ 30 MHz	Quasi Peak / RBW: 9 kHz
30 MHz ~ 1 GHz	Quasi Peak / RBW: 120 kHz
Above 1 GHz	Peak / RBW: 1 MHz, VBW: 3MHz, Peak detector AVG / RBW: 1 MHz, VBW: 1/T, Peak detector

### 5.10.4 Test results

#### Notes:

The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

All modes of operation of the EUT were investigated, and only the worst-case results are reported.

There were no emissions found below 30MHz within 20dB of the limit.


#### Calculation formula:

Measurement (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Correct Factor (dB/m)

Over (dB) = Measurement (dB $\mu$ V/m) – Limit (dB $\mu$ V/m)

**Radiated emissions between 30MHz – 1GHz**
**Left ear test data:**


Test mode:	TX 8DPSK-2402	Polarization:	Horizontal
Power supply:	DC 3.85V	Test site:	RE chamber 1

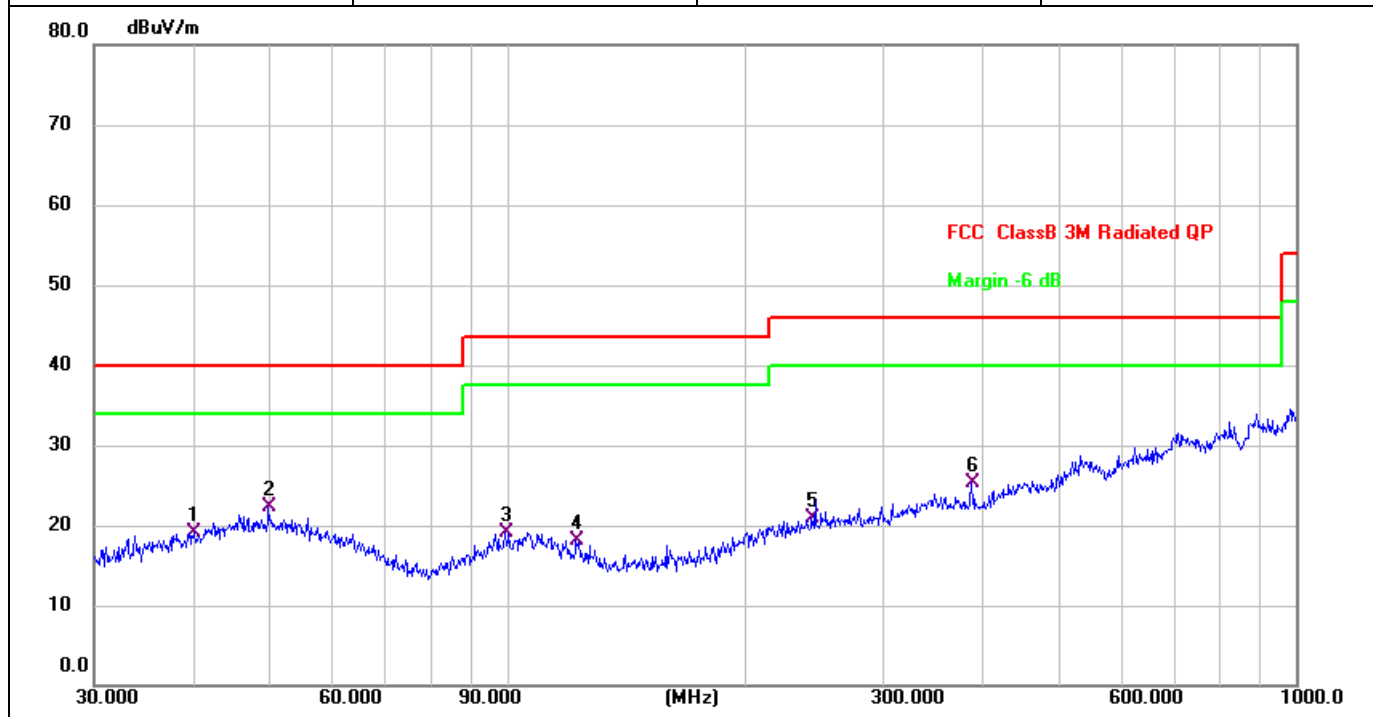

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		40.1347	25.95	-6.82	19.13	40.00	-20.87	QP
2	*	49.8814	27.79	-5.50	22.29	40.00	-17.71	QP
3		99.5281	26.07	-6.96	19.11	43.50	-24.39	QP
4		122.4040	27.04	-8.87	18.17	43.50	-25.33	QP
5		243.3772	25.61	-4.63	20.98	46.00	-25.02	QP
6		387.9920	26.84	-1.54	25.30	46.00	-20.70	QP

**Radiated emissions between 30MHz – 1GHz**
**Left ear test data:**


Test mode:	TX 8DPSK-2402	Polarization:	Vertical
Power supply:	DC 3.85V	Test site:	RE chamber 1

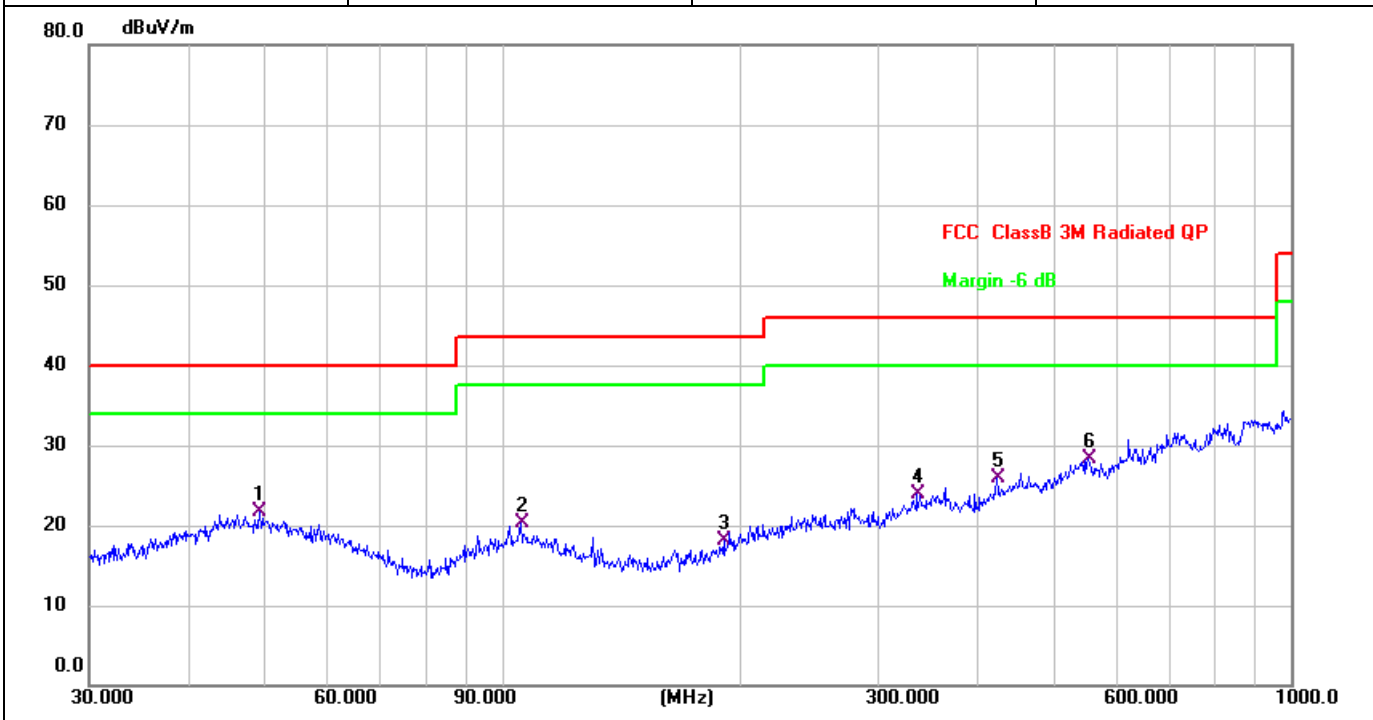

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		49.3594	27.34	-5.60	21.74	40.00	-18.26	QP
2		105.6415	27.20	-6.89	20.31	43.50	-23.19	QP
3		191.0738	24.94	-6.88	18.06	43.50	-25.44	QP
4		336.0352	26.79	-2.82	23.97	46.00	-22.03	QP
5		423.5403	26.63	-0.80	25.83	46.00	-20.17	QP
6	*	552.8832	26.59	1.68	28.27	46.00	-17.73	QP

**Radiated emissions between 30MHz – 1GHz**
**Right ear test data:**


Test mode:	TX 8DPSK-2402	Polarization:	Horizontal
Power supply:	DC 3.85V	Test site:	RE chamber 2

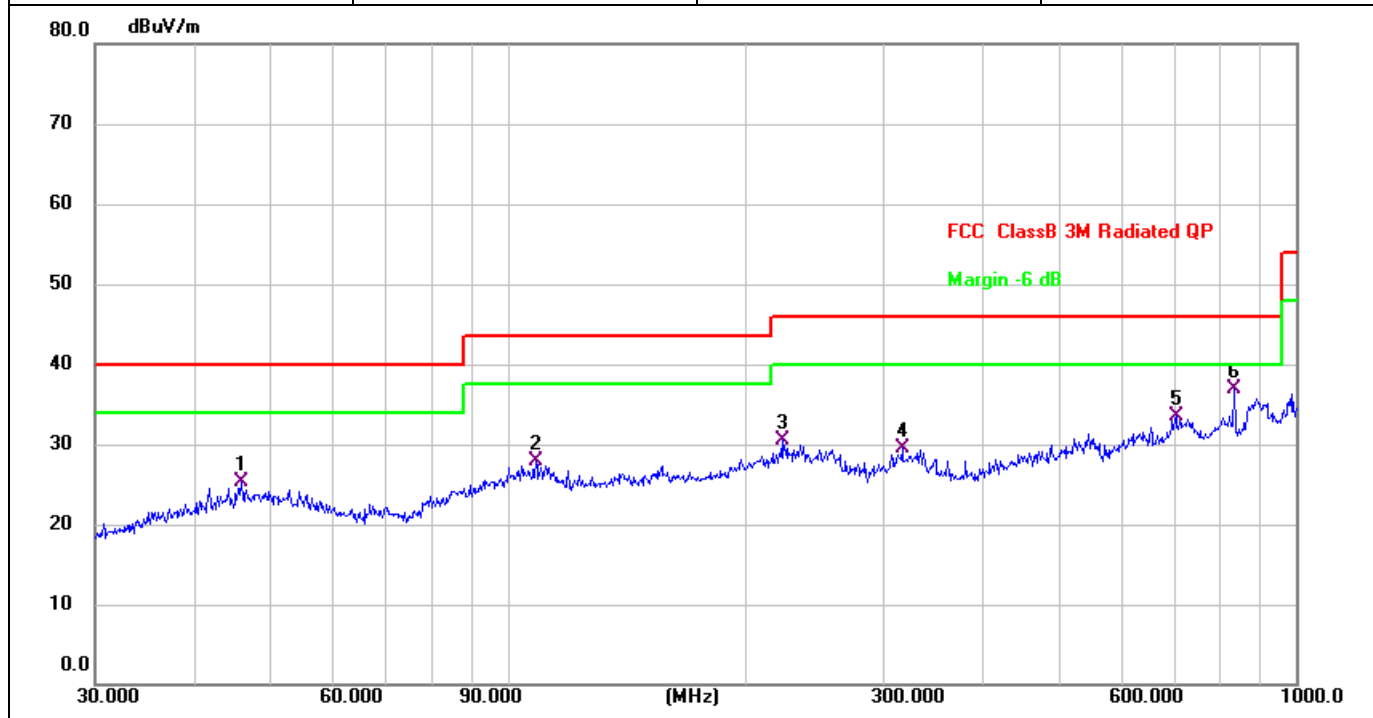

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		46.0162	31.25	-5.94	25.31	40.00	-14.69	QP
2		108.6470	34.88	-6.94	27.94	43.50	-15.56	QP
3		222.9500	35.75	-5.21	30.54	46.00	-15.46	QP
4		316.5889	32.53	-2.97	29.56	46.00	-16.44	QP
5		704.2259	29.14	4.41	33.55	46.00	-12.45	QP
6	*	836.2441	29.88	7.00	36.88	46.00	-9.12	QP

**Radiated emissions between 30MHz – 1GHz**
**Right ear test data:**

Test mode:	TX 8DPSK-2402	Polarization:	Vertical
Power supply:	DC 3.85V	Test site:	RE chamber 2

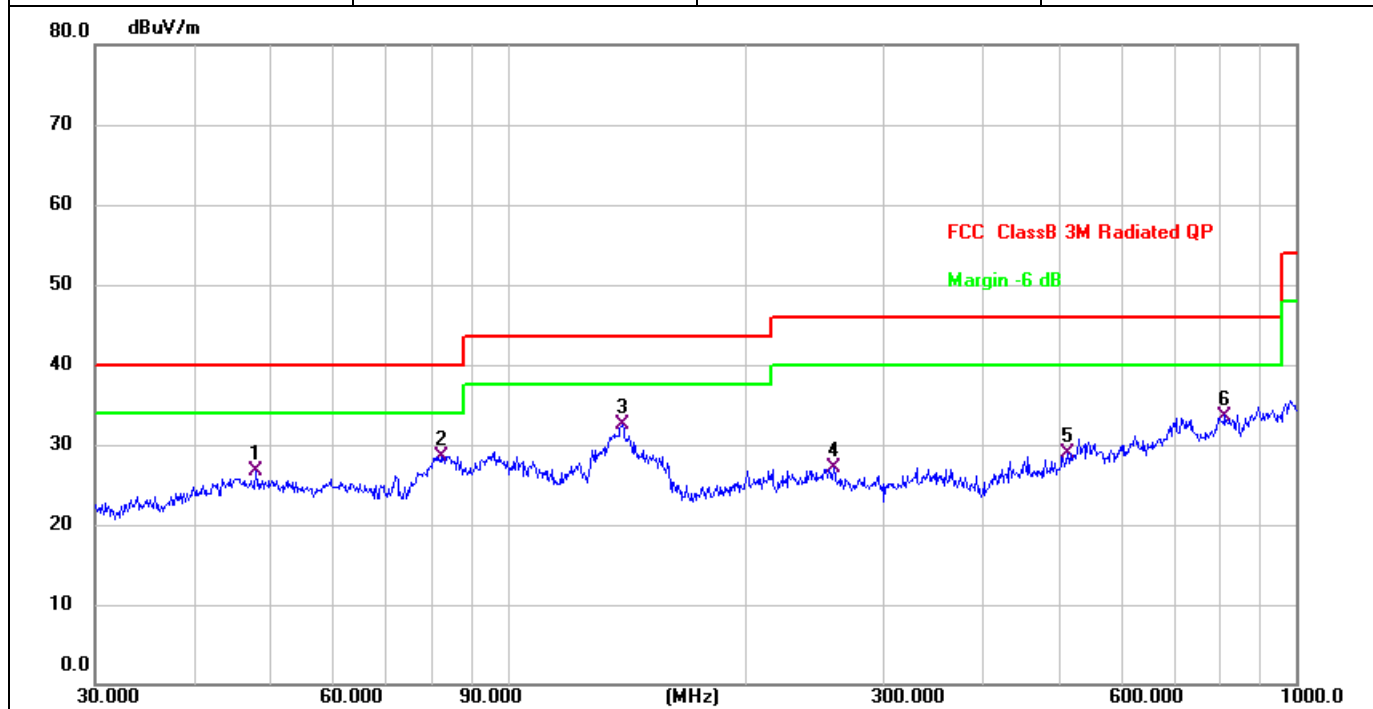

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		47.9938	32.26	-5.62	26.64	40.00	-13.36	QP
2		82.3588	38.84	-10.27	28.57	40.00	-11.43	QP
3	*	139.8505	42.68	-10.10	32.58	43.50	-10.92	QP
4		259.2336	30.98	-3.80	27.18	46.00	-18.82	QP
5		513.6331	28.20	0.78	28.98	46.00	-17.02	QP
6		813.1114	27.15	6.45	33.60	46.00	-12.40	QP



**Radiated emissions 1 GHz ~ 25 GHz**
**Left ear test data:**

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>8DPSK - 2402 MHz TX mode</b>							
4804	40.29	1.52	41.81	74.00	-32.19	Peak	V
4804	33.74	1.52	35.26	54.00	-18.74	AVG	V
7206	39.35	5.46	44.81	74.00	-29.19	Peak	V
7206	33.01	5.46	38.47	54.00	-15.53	AVG	V
9608	41.30	6.33	47.63	74.00	-26.37	Peak	V
9608	34.99	6.33	41.32	54.00	-12.68	AVG	V
4804	41.20	1.52	42.72	74.00	-31.28	Peak	H
4804	34.62	1.52	36.14	54.00	-17.86	AVG	H
7206	39.42	5.46	44.88	74.00	-29.12	Peak	H
7206	33.00	5.46	38.46	54.00	-15.54	AVG	H
9608	40.74	6.33	47.07	74.00	-26.93	Peak	H
9608	34.73	6.33	41.06	54.00	-12.94	AVG	H
<b>8DPSK - 2441 MHz TX mode</b>							
4882	40.63	1.68	42.31	74.00	-31.69	Peak	V
4882	34.56	1.68	36.24	54.00	-17.76	AVG	V
7323	43.49	5.45	48.94	74.00	-25.06	Peak	V
7323	36.72	5.45	42.17	54.00	-11.83	AVG	V
9764	40.27	6.37	46.64	74.00	-27.36	Peak	V
9764	33.98	6.37	40.35	54.00	-13.65	AVG	V
4882	40.16	1.68	41.84	74.00	-32.16	Peak	H
4882	33.68	1.68	35.36	54.00	-18.64	AVG	H
7323	39.75	5.45	45.20	74.00	-28.80	Peak	H
7323	33.69	5.45	39.14	54.00	-14.86	AVG	H
9764	40.25	6.37	46.62	74.00	-27.38	Peak	H
9764	34.28	6.37	40.65	54.00	-13.35	AVG	H

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>8DPSK - 2480 MHz TX mode</b>							
4960	40.37	1.83	42.20	74.00	-31.80	Peak	V
4960	34.51	1.83	36.34	54.00	-17.66	AVG	V
7440	40.91	5.43	46.34	74.00	-27.66	Peak	V
7440	34.83	5.43	40.26	54.00	-13.74	AVG	V
9920	39.28	6.41	45.69	74.00	-28.31	Peak	V
9920	33.07	6.41	39.48	54.00	-14.52	AVG	V
4960	40.47	1.83	42.30	74.00	-31.70	Peak	H
4960	34.52	1.83	36.35	54.00	-17.65	AVG	H
7440	43.30	5.43	48.73	74.00	-25.27	Peak	H
7440	37.08	5.43	42.51	54.00	-11.49	AVG	H
9920	39.33	6.41	45.74	74.00	-28.26	Peak	H
9920	33.22	6.41	39.63	54.00	-14.37	AVG	H

**Right ear test data:**

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>8DPSK - 2402 MHz TX mode</b>							
4804	39.91	1.52	41.43	74.00	-32.57	Peak	V
4804	33.89	1.52	35.41	54.00	-18.59	AVG	V
7206	40.14	5.46	45.60	74.00	-28.40	Peak	V
7206	33.89	5.46	39.35	54.00	-14.65	AVG	V
9608	41.39	6.33	47.72	74.00	-26.28	Peak	V
9608	35.19	6.33	41.52	54.00	-12.48	AVG	V
4804	39.98	1.52	41.50	74.00	-32.50	Peak	H
4804	33.84	1.52	35.36	54.00	-18.64	AVG	H
7206	39.46	5.46	44.92	74.00	-29.08	Peak	H
7206	33.01	5.46	38.47	54.00	-15.53	AVG	H
9608	40.19	6.33	46.52	74.00	-27.48	Peak	H
9608	33.93	6.33	40.26	54.00	-13.74	AVG	H
<b>8DPSK - 2441 MHz TX mode</b>							
4882	39.46	1.68	41.14	74.00	-32.86	Peak	V
4882	33.73	1.68	35.41	54.00	-18.59	AVG	V
7323	40.98	5.45	46.43	74.00	-27.57	Peak	V
7323	34.81	5.45	40.26	54.00	-13.74	AVG	V
9764	40.17	6.37	46.54	74.00	-27.46	Peak	V
9764	39.74	1.68	41.42	74.00	-32.58	AVG	V
4882	33.66	1.68	35.34	54.00	-18.66	Peak	H
4882	39.19	5.45	44.64	74.00	-29.36	AVG	H
7323	33.02	5.45	38.47	54.00	-15.53	Peak	H
7323	39.97	6.37	46.34	74.00	-27.66	AVG	H
9764	32.27	6.37	38.64	54.00	-15.36	Peak	H
9764	39.74	1.68	41.42	74.00	-32.58	AVG	H

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>8DPSK - 2480 MHz TX mode</b>							
4960	39.51	1.83	41.34	74.00	-32.66	Peak	V
4960	33.43	1.83	35.26	54.00	-18.74	AVG	V
7440	40.44	5.43	45.87	74.00	-28.13	Peak	V
7440	34.04	5.43	39.47	54.00	-14.53	AVG	V
9920	39.51	6.41	45.92	74.00	-28.08	Peak	V
9920	33.23	6.41	39.64	54.00	-14.36	AVG	V
4960	40.00	1.83	41.83	74.00	-32.17	Peak	H
4960	33.51	1.83	35.34	54.00	-18.66	AVG	H
7440	39.27	5.43	44.70	74.00	-29.30	Peak	H
7440	33.03	5.43	38.46	54.00	-15.54	AVG	H
9920	39.71	6.41	46.12	74.00	-27.88	Peak	H
9920	33.91	6.41	40.32	54.00	-13.68	AVG	H

**Radiated emissions at band edge**
**Left ear test data:**

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>8DPSK – Low band-edge</b>							
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
2310	50.37	-6.60	43.77	74.00	-30.23	Peak	V
2310	41.62	-6.60	35.02	54.00	-18.98	AVG	V
2390	52.82	-6.23	46.59	74.00	-27.41	Peak	V
2390	43.38	-6.23	37.15	54.00	-16.85	AVG	V
2310	53.26	-6.60	46.66	74.00	-27.34	Peak	H
2310	42.65	-6.60	36.05	54.00	-17.95	AVG	H
2390	53.11	-6.23	46.88	74.00	-27.12	Peak	H
2390	42.93	-6.23	36.70	54.00	-17.30	AVG	H
<b>8DPSK – High band-edge</b>							
2483.5	59.04	-5.79	53.25	74.00	-20.75	Peak	V
2483.5	43.68	-5.79	37.89	54.00	-16.11	AVG	V
2500	69.27	-5.72	63.55	74.00	-10.45	Peak	V
2500	48.24	-5.72	42.52	54.00	-11.48	AVG	V
2483.5	58.03	-5.79	52.24	74.00	-21.76	Peak	H
2483.5	42.81	-5.79	37.02	54.00	-16.98	AVG	H
2500	58.53	-5.72	52.81	74.00	-21.19	Peak	H
2500	42.18	-5.72	36.46	54.00	-17.54	AVG	H

**Right ear test data:**

Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector	Polarization
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
<b>8DPSK – Low band-edge</b>							
(MHz)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)	Peak/AVG	H/V
2310	49.17	-6.60	42.57	74.00	-31.43	Peak	V
2310	39.81	-6.60	33.21	54.00	-20.79	AVG	V
2390	48.35	-6.23	42.12	74.00	-31.88	Peak	V
2390	39.25	-6.23	33.02	54.00	-20.98	AVG	V
2310	49.82	-6.60	43.22	74.00	-30.78	Peak	H
2310	39.92	-6.60	33.32	54.00	-20.68	AVG	H
2390	50.94	-6.23	44.71	74.00	-29.29	Peak	H
2390	39.70	-6.23	33.47	54.00	-20.53	AVG	H
<b>8DPSK – High band-edge</b>							
2483.5	51.06	-5.79	45.27	74.00	-28.73	Peak	V
2483.5	40.29	-5.79	34.50	54.00	-19.50	AVG	V
2500	64.84	-5.72	59.12	74.00	-14.88	Peak	V
2500	43.99	-5.72	38.27	54.00	-15.73	AVG	V
2483.5	52.71	-5.79	46.92	74.00	-27.08	Peak	H
2483.5	41.09	-5.79	35.30	54.00	-18.70	AVG	H
2500	61.59	-5.72	55.87	74.00	-18.13	Peak	H
2500	43.29	-5.72	37.57	54.00	-16.43	AVG	H



## Photographs of the Test Setup

See the appendix – Test Setup Photos.

## Photographs of the EUT

See the appendix - EUT Photos.

----End of Report----