

PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics U.S.A, Inc. 111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632 United States

Date of Testing: 4/27/2020 - 5/14/2020 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2004220073-11-R1.ZNF Date of Issue: 06/01/2020

FCC ID:

ZNFL355DL

APPLICANT:

LG ELECTRONICS U.S.A, INC.

Scope of Test:	Audio Band Magnetic Testing (T-Coil)
Application Type:	Certification
FCC Rule Part(s):	CFR §20.19(b)
HAC Standard:	ANSI C63.19-2011
	285076 D01 HAC Guidance v05
	285076 D02 T-Coil testing for CMRS IP v03
DUT Type:	Portable Handset
Model:	LM-K300QM
Additional Model(s):	LG-L355DL, LMK300QM, LGL355DL, K300QM, L355DL,
	LG L355DL
Test Device Serial No.:	Pre-Production Sample [S/N: 09854]

C63.19-2011 HAC Category:

T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M2004220073-11-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez President



FCC ID: ZNFL355DL	Road to be part of @ nerver	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 1 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 1 of 83
© 2020 PCTEST		·		REV 3.5.M

REV 3.5.M 3/2/2020

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	. 18
6.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	. 22
7.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	. 25
8.	FCC 3G MEASUREMENTS	. 28
9.	T-COIL TEST SUMMARY	. 30
10.	MEASUREMENT UNCERTAINTY	. 40
11.	EQUIPMENT LIST	. 41
12.	TEST DATA	. 42
13.	CALIBRATION CERTIFICATES	. 71
14.	CONCLUSION	. 78
15.	REFERENCES	. 79
16.	TEST SETUP PHOTOGRAPHS	. 81

FCC ID: ZNFL355DL	PCTEST Road to be past of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 2 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 2 of 83
© 2020 PCTEST		·		REV 3.5.M

REV 3.5.M 3/2/2020

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658¹ to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFL355DL	PCTEST Prod to be part of @ eveness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 3 of 83
© 2020 PCTEST		· · ·		REV 3.5.M

3/2/2020

2. DUT DESCRIPTION



FCC ID:	ZNFL355DL		
Applicant:	LG Electronics U.S.A, Inc.		
	111 Sylvan Avenue, North Building		
	Englewood Cliffs, NJ 07632		
	United States		
Model:	LM-K300QM		
Additional Model(s):	LG-L355DL, LMK300QM, LGL355DL, K300QM, L355DL, LG L355DL		
Serial Number:	09854		
HW Version:	Rev.1.0		
SW Version:	K300QM07r		
Antenna:	Internal Antenna		
DUT Type:	Portable Handset		

I. LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B25 & B2, B26 & B5, and B66 & B4. These pairs of LTE bands have the same target powers and share the same transmission paths. Since the supported frequency spans for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B25, B26, and B66) were evaluated for hearing-aid compliance.

FCC ID: ZNFL355DL	Total to be pest of @ revenues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 4 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 4 of 83
© 2020 PCTEST		•		REV 3.5.M

3/2/2020

	ZNFL355DL HAC AIr Interfaces					
Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated
	835	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EVRC
CDMA	1900					21110
	EvDO	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850	vo	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR
GSM	1900					
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	850					
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹	NB AMR
	1900					
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo ²	OPUS
	680 (B71) Yes ³					
	700 (B12)					
	780 (B13)					
	850 (B5)					
LTE (FDD)	850 (B26)	VD Yes	Voc	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
	1700 (B4)		105			
	1700 (B66)					
	1900 (B2)					
	1900 (B25)					
LTE (TDD)	2600 (B41)	VD	Yes	Yes: WIFI or BT	VoLTE ¹ , Google Duo ²	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
WIFI	2450	VD	Yes	Yes: CDMA, GSM, UMTS, or LTE	VoWIFI ² , Google Duo ²	VoWIFI: NB AMR, WB AMR, EVS Google Duo: OPUS
BT	2450	DT	No	Yes: CDMA, GSM, UMTS, or LTE	N/A	N/A
Type Transport Notes: VO = Voice Only 1. Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE Interpretation. DT = Digital Data - Not intended for Voice Services 2. Reference level is -200Bm0 in accordance with FCC KDB 285076 D02 VD = CMRS and/or IP Voice over Data Transport 3. LTE B71, while outside the scope of ANSI C63.19 and FCC HAC regulations, was additionally tested according to the existing procedures with currently available test equipment.						

Table 2-1 ZNFL355DL HAC Air Interfaces

FCC ID: ZNFL355DL	PCTEST Road to be past of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege E of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 5 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES


I. MAGNETIC COUPLING

Axial and Radial Field Intensity


All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz - 3000 Hz per §8.3.2.

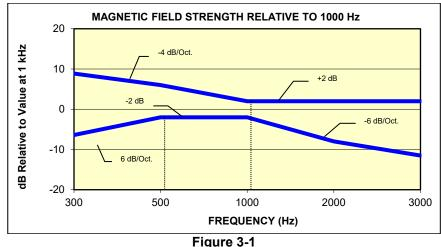

Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

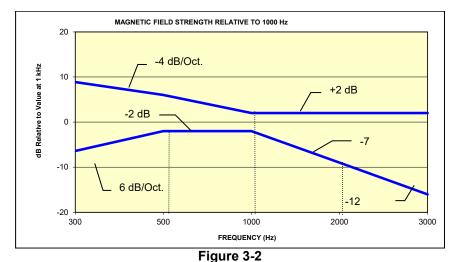

Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: ZNFL355DL	Road to be part of @ nerver	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 6 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 6 of 83
© 2020 PCTEST				REV 3.5.M

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Catagony	Telephone RF Parameters			
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]			
T1	0 to 10 dB			
T2	10 to 20 dB			
Т3	20 to 30 dB			
T4	> 30 dB			
Table 3-1 Magnetic Coupling Parameters				

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 7 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 7 of 83
© 2020 PCTEST		· ·		REV 3.5.M

3/2/2020

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:


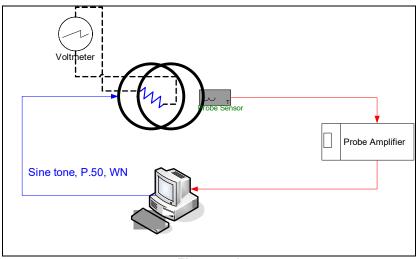


Figure 4-1 Validation Setup with Helmholtz Coil

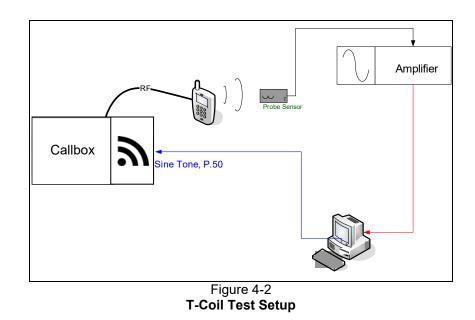

FCC ID: ZNFL355DL	Road to be past of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 9 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 8 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020

II. Scanning Mechanism

Manufacturer:	TEM
Accuracy:	± 0.83 cm/meter
Minimum Step Size:	0.1 mm
Maximum speed	6.1 cm/sec
Line Voltage:	115 VAC
Line Frequency:	60 Hz
Material Composite:	Delrin (Acetal)
Data Control:	Parallel Port
Dynamic Range (X-Y-Z):	45 x 31.75 x 47 cm
Dimensions:	36" x 25" x 38"
Operating Area:	36" x 49" x 55"
Reflections:	< -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice

Manufacturer:	ITU-T
Active Frequency Range:	100 Hz – 8 kHz
Stimulus Type:	Male and Female, no spaces
Single Sample Duration:	20.96 seconds
Activity Level:	100%





Figure 4-4 Spectral Characteristic of full P.50




Temporal Characteristic of full P.50

FCC ID: ZNFL355DL	Total to be past of @ reference	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 0 af 02	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 9 of 83	
© 2020 PCTEST				REV 3.5.M	

3/2/2020

ABM1 Measurement Block Diagram:

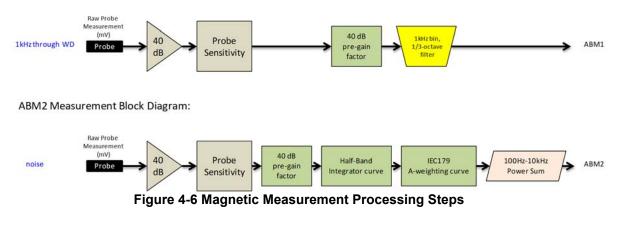

IV. Test Procedure

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - b. "A-weighting" and Half-Band Integration was applied to the measurements.
 - c. Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_{c} = \frac{NI}{r\sqrt{1.25^{3}}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^{3}}}$$

Where H_c = magnetic field strength in amperes per meter

N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.08m; R=10.2 Ω and using V=18mV:

$$H_c = \frac{20 \cdot (\frac{0.018}{10.2})}{0.08 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 18mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10 dB(A/m). This was verified to be within $\pm 0.5 \text{ dB}$ of the -10 dB(A/m) value (see Page 38).

FCC ID: ZNFL355DL	PCTEST Poul to be petit of @ university	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 40 af 00	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 10 of 83	
© 2020 PCTEST		· · · · · · · · · · · · · · · · · · ·		REV 3.5.M	

^{© 2020} PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.




Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:


ABM2 Frequency Response Validation				
	HBI, A -	HBI, A -		
f (Hz)	Measured	Theoretical	dB Var.	
	(dB re 1kHz)	(dB re 1kHz)		
100	-16.180	-16.170	-0.010	
125	-13.257	-13.250	-0.007	
160	-10.347	-10.340	-0.007	
200	-8.017	-8.010	-0.007	
250	-5.925	-5.920	-0.005	
315	-4.045	-4.040	-0.005	
400	-2.405	-2.400	-0.005	
500	-1.212	-1.210	-0.002	
630	-0.349	-0.350	0.001	
800	0.071	0.070	0.001	
1000	0.000	0.000	0.000	
1250	-0.503	-0.500	-0.003	
1600	-1.513	-1.510	-0.003	
2000	-2.778	-2.780	0.002	
2500	-4.316	-4.320	0.004	
3150	-6.166	-6.170	0.004	
4000	-8.322	-8.330	0.008	
5000	-10.573	-10.590	0.017	
6300	-13.178	-13.200	0.022	
8000	-16.241	-16.270	0.029	
10000	-19.495	-19.520	0.025	

Table 4-1 ABM2 Frequency Response Validation

FCC ID: ZNFL355DL	POTEST Poind to post of @ eveness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 44 af 00	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 11 of 83	
© 2020 PCTEST		·		REV 3.5.M	


3/2/2020

ABM2 Frequency Response Validation (LISTEN)

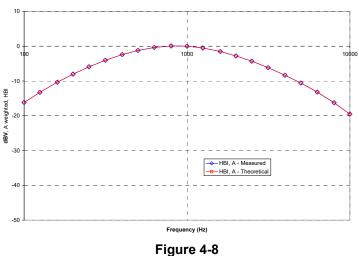

ABM2 Frequency Response Validation


The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and Aweighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.


Table 4-2 ABM2 Power Sum Validation					
WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)		
-60	-60.36	-60.2	0.16		
-50	-50.19	-50.13	0.06		
-40	-40.14	-40.03	0.11		
-30	-30.13	-30.01	0.12		
-20	-20.12	-20	0.12		
-10	-10.14	-10	0.14		

FCC ID: ZNFL355DL	PCTEST. Total to be past of @ removed	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 40 af 00	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 12 of 83	
© 2020 PCTEST				REV 3.5.M	



3. Measurement Test Setup

- a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

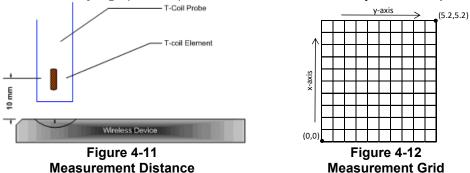

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-14 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN TM	TDMA (22 and 11 Hz)	-18


FCC ID: ZNFL355DL	PCTEST Prod to be part of @ eveness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dama 40 af 00	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 13 of 83	
© 2020 PCTEST				REV 3.5.M	

- ii. See Section 5 and 6 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE), and Voice Over WIFI (VoWIFI) testing.
- iii. See Section 7 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 8 for more information regarding worst-case configurations for CDMA and UMTS. LTE configuration information can be found in Section 5 and 7 WIFI configuration information can be found in Section 6 and 7.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 14 of 83	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset			
© 2020 PCTEST		· ·		REV 3.5.M	

^{© 2020} PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V. Test Setup



Audio Magnetic Field Test Setup

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFL355DL	PCTEST Boad to be post of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 15 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 15 of 83
© 2020 PCTEST		•		REV 3.5.M

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle, and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes.

Center Channels and Frequencies						
Test frequencies & associated channels						
Channel	Frequency (MHz)					
Secondary Cellular 8	20					
564 (CDMA)	820.10					
Cellular 850						
384 (CDMA)	836.52					
190 (GSM)	836.60					
4183 (UMTS)	836.60					
AWS 1750						
1412 (UMTS)	1730.40					
PCS 1900						
600 (CDMA)	1880					
661 (GSM)	1880					
9400 (UMTS)	1880					

Table 4-3							
Center Channels and Frequencies							

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and id-high channels are additionally tested for LTE TDD. The middle channels and supported bandwidths from the worst-case bands according to Tables 7-6 and 7-7 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 9-5 to 9-12 and Tables 9-17 and 9-18 for LTE bandwidths and channels.

3. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. See Tables 9-13 and 9-19 for WIFI standards and channels.

FCC ID: ZNFL355DL	PCTEST. Total to be pest of @ revenues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 40 af 00
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 16 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020

IX. Test Flow

The flow diagram below was followed (From C63.19):

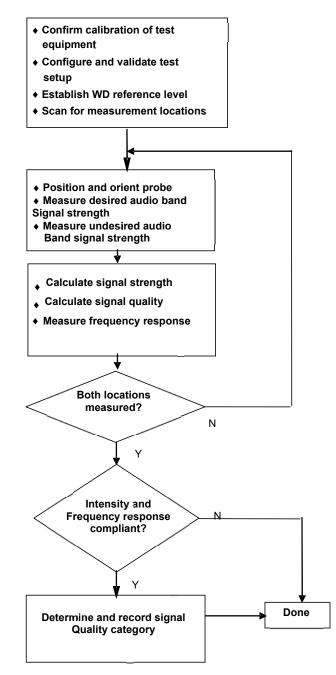


Figure 4-14 C63.19 T-Coil Signal Test Process

FCC ID: ZNFL355DL	PCTEST. Poul to be pest of @ revenues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 17 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 17 of 83
© 2020 PCTEST		·		REV 3.5.M

^{3/2/2020}

5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

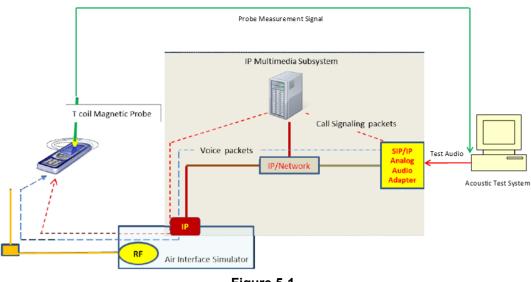


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level^{*}. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

* http://c63.org/documents/misc/posting/new_interpretations.htm

FCC ID: ZNFL355DL	PCTEST. Road to be past of @ revenue	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 19 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 18 of 83
© 2020 PCTEST				REV 3.5.M

II. DUT Configuration for VoLTE over IMS T-coil Testing

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 99%RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

	Frequency		Bandwidth				ABM1	ABM2	SNNR
Band	[MHz]	Channel	[MHz]	Modulation	RB Size	RB Offset	[dB(A/m)]	[dB(A/m)]	[dB]
12	10	23095	10	QPSK	1	0	5.97	-37.92	43.89
12	10	23095	10	QPSK	1	25	5.98	-39.01	44.99
12	10	23095	10	QPSK	1	49	5.85	-37.24	43.09
12	10	23095	10	QPSK	25	0	5.60	-39.23	44.83
12	10	23095	10	QPSK	25	12	5.72	-39.59	45.31
12	10	23095	10	QPSK	25	25	5.76	-38.07	43.83
12	10	23095	10	QPSK	50	0	5.69	-38.70	44.39
12	10	23095	10	16QAM	1	0	5.98	-33.62	39.60
12	10	23095	10	16QAM	1	1 25		-34.65	40.61
12	10	23095	10	16QAM	1	49	5.99	-32.44	38.43
12	10	23095	10	16QAM	25	0	5.77	-38.09	43.86
12	10	23095	10	16QAM	25	12	5.65	-37.92	43.57
12	10	23095	10	16QAM	25	25	5.79	-38.75	44.54
12	10	23095	10	16QAM	50	0	5.84	-38.43	44.27
12	10	23095	10	64QAM	1	0	5.74	-32.88	38.62
12	10	23095	10	64QAM	1	25	5.53	-34.58	40.11
12	10	23095	10	64QAM	1	49	6.01	-32.67	38.68
12	10	23095	10	64QAM	25	0	5.61	-38.00	43.61
12	10	23095	10	64QAM	25	12	5.97	-38.07	44.04
12	10	23095	10	64QAM	25	25	5.66	-38.42	44.08
12	10	23095	10	64QAM	50	0	5.44	-38.31	43.75

Table 5-1 VoLTE over IMS SNNR by Radio Configuration

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 23.85kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

	AMR Codec Investigation – VoLTE over IMS												
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel						
ABM1 (dBA/m)	5.75	6.90	6.74	6.69									
ABM2 (dBA/m)	-33.71	-33.76	-33.96	-33.77	Avial	Band 12 10MHz	23095						
Frequency Response	Pass	Pass	Pass	Pass	- Axial		23095						
S+N/N (dB)	39.46	40.66	40.70	40.46									

Table 5-2 AMR Codec Investigation – VoLTE over IMS

Mute on; Backlight off; Max Volume; Max Contrast


TPC = "Max Power"

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:	DUT Type:	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	- 5/14/2020 Portable Handset		Page 19 of 83
© 2020 PCTEST		•		REV 3.5.M

	EVS Codec Investigation - Volite over IMS												
Codec Setting:	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel						
ABM1 (dBA/m)	7.00	6.13	7.81	6.50									
ABM2 (dBA/m)	-33.52	-33.58	-33.22	-33.03	Avial	Band 12 10MHz	23095						
Frequency Response	Pass	Pass	Pass	Pass	- Axial		23095						
S+N/N (dB)	40.52	39.71	41.03	39.53									

Table 5-3 EVS Codec Investigation - VoLTE over IMS

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"



Audio Band Magnetic Curve Measurement Block Diagram

3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s = 10 \text{ ms}$, where T_s is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length $30720 \cdot T_s = 1 \text{ ms}$, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 \cdot Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity		Subframe number							Calculated Transmission		
configuration	Switch-point periodicity	0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

 Table 5-4

 Uplink-Downlink Configurations for Type 2 Frame Structures

FCC ID: ZNFL355DL	PCTEST Multible patt of interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 20 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	4/27/2020 - 5/14/2020 Portable Handset		Page 20 of 83
© 2020 PCTEST		•		REV 3.5.M

REV 3.5.M 3/2/2020

a. Power Class 3 Uplink-Downlink Configuration Investigation

Power Class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 2 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	99	0	5.72	-24.07	29.79
2593.0	40620	20	16QAM	1	99	1	5.76	-24.04	29.80
2593.0	40620	20	16QAM	1	99	2	5.65	-24.05	29.70
2593.0	40620	20	16QAM	1	99	3	5.76	-26.96	32.72
2593.0	40620	20	16QAM	1	99	4	5.98	-27.09	33.07
2593.0	40620	20	16QAM	1	99	5	5.81	-26.63	32.44
2593.0	40620	20	16QAM	1	99	6	5.92	-24.00	29.92

Table 5-5
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 0RB Offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 1 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]			
2593.0	40620	20	16QAM	1	99	1	5.84	-19.65	25.49			
2593.0	40620	20	16QAM	1	99	2	5.92	-19.67	25.59			
2593.0	40620	20	16QAM	1	99	3	5.94	-22.42	28.36			
2593.0	40620	20	16QAM	1	99	4	5.93	-22.82	28.75			
2593.0	40620	20	16QAM	1	99	5	5.78	-22.73	28.51			

Table 5-6 Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

c. Conclusion

Per the investigations above, UL-DL Configuration 2 was used to evaluate Power Class 3 VoLTE over IMS and UL-DL Configuration 1 was used to evaluate Power Class 2 VoLTE over IMS.

FCC ID: ZNFL355DL	PCTEST Total to be post of @ revenues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dego 21 of 22
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 21 of 83
© 2020 PCTEST		· ·		REV 3.5.M

6. VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION

I. Test System Setup for VoWIFI over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

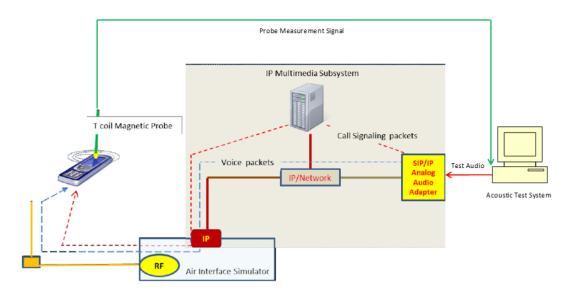


Figure 6-1 Test Setup for VoWIFI over IMS T-Coil Measurements

2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level². The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFL355DL	PCTEST Road to be past of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 22 of 22
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 22 of 83
© 2020 PCTEST		•		REV 3.5.M

^{© 2020} PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

II. DUT Configuration for VoWIFI over IMS T-coil Testing

1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

	IEEE 802.11b SNNR by Radio Configuration										
Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]					
IEEE 802.11b	6	DSSS	1	0.87	-29.34	30.21					
IEEE 802.11b	6	DSSS	2	1.10	-29.56	30.66					
IEEE 802.11b	6	CCK	5.5	0.80	-29.65	30.45					
IEEE 802.11b	6	CCK	11	0.78	-30.13	30.91					

Table 6-1 IEEE 802.11b SNNR by Radio Configuration

 Table 6-2

 IEEE 802.11g SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]				
IEEE 802.11g	6	BPSK	6	0.97	-32.30	33.27				
IEEE 802.11g	6	BPSK	9	1.19	-32.21	33.40				
IEEE 802.11g	6	QPSK	12	1.08	-35.52	36.60				
IEEE 802.11g	6	QPSK	18	0.92	-34.89	35.81				
IEEE 802.11g	6	16QAM	24	0.35	-35.44	35.79				
IEEE 802.11g	6	16QAM	36	0.50	-37.24	37.74				
IEEE 802.11g	6	64QAM	48	0.52	-34.95	35.47				
IEEE 802.11g	6	64QAM	54	0.45	-36.03	36.48				

Table 6-3 IEEE 802.11n SNNR by Radio Configuration

Mode	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]					
IEEE 802.11n	6	BPSK	0	1.70	-33.38	35.08					
IEEE 802.11n	6	QPSK	1	1.54	-34.83	36.37					
IEEE 802.11n	6	QPSK	2	1.22	-35.51	36.73					
IEEE 802.11n	6	16QAM	3	1.10	-34.80	35.90					
IEEE 802.11n	6	16QAM	4	1.70	-34.92	36.62					
IEEE 802.11n	6	64QAM	5	1.24	-34.33	35.57					
IEEE 802.11n	6	64QAM	6	1.12	-36.24	37.36					
IEEE 802.11n	6	64QAM	7	1.63	-34.67	36.30					

FCC ID: ZNFL355DL	PCTEST Total to be past of @ reference	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 22 of 82
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 23 of 83
© 2020 PCTEST		·		REV 3.5.M

2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 23.85kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:


AMR Codec Investigation – VoWIFI over IMS									
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel	
ABM1 (dBA/m)	0.83	1.47	1.73	1.74			IEEE 802.11b	6	
ABM2 (dBA/m)	-29.19	-29.81	-29.73	-29.77	Axial	2.4GHz			
Frequency Response	Pass	Pass	Pass	Pass	Axiai				
S+N/N (dB)	30.02	31.28	31.46	31.51					

Table 6-4 AMR Codec Investigation – VoWIFI over IMS

Table 6-5 EVS Codec Investigation – VoWIFI over IMS

Codec Setting:	EVS Primary WB 13.2kbps	EVS Primary WB 5.9kbps	EVS Primary NB 13.2kbps	EVS Primary NB 5.9kbps	Orientation	Band	Standard	Channel		
ABM1 (dBA/m)	2.82	1.52	2.12	1.16			IEEE 802.11b	6		
ABM2 (dBA/m)	-29.00	-29.60	-29.45	-29.72	Axial	2.4GHz				
Frequency Response	Pass	Pass	Pass	Pass	Axiai	2.4602				
S+N/N (dB)	31.82	31.12	31.57	30.88						

• Mute on; Backlight off; Max Volume; Max Contrast



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 24 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 24 of 83
© 2020 PCTEST				REV 3.5.M

REV 3.5.M 3/2/2020

7. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation³. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

II. DUT Configuration for OTT VoIP T-Coil Testing

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Codec In	vestigatio	on – OTT	VOIP (EVL	JO)
Codec Setting:	75kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	5.11	4.37		
ABM2 (dBA/m)	-38.24	-37.10	Axial	600
Frequency Response	Pass	Pass	Axiai	
S+N/N (dB)	43.35	41.47		

Table 7-1	
Codec Investigation – OTT VoIP (EvDO)	

³ FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

FCC ID: ZNFL355DL	PCTEST Proof to be perfect of @ eveneer	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 25 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 25 of 83
© 2020 PCTEST	•			REV 3.5.M

Codec Investigation – OTT VoIP (EDGE)				
Codec Setting:	75kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	6.26	4.46		
ABM2 (dBA/m)	-23.74	-23.18	Axial	661
Frequency Response	Pass	Pass	Axiai	001
S+N/N (dB)	30.00	27.64		

Table 7-2

Table 7-3 Codec Investigation – OTT VoIP (HSPA)

	reengune			
Codec Setting:	75kbps	6kbps	Orientation	Channel
ABM1 (dBA/m)	5.87	4.85		
ABM2 (dBA/m)	-42.41	-42.61	Axial	9400
Frequency Response	Pass	Pass	Axiai	
S+N/N (dB)	48.28	47.46		


Table 7-4 Codec Investigation – OTT VoIP (LTE)

Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	5.92	4.73		Band 12 10MHz	23095
ABM2 (dBA/m)	-32.08	-32.04	Axial		
Frequency Response	Pass	Pass	Axiai		
S+N/N (dB)	38.00	36.77			

Table 7-5 Codec Investigation - OTT VoIP (WIFI)

		neengan				
Codec Setting:	75kbps	6kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	5.98	4.89				
ABM2 (dBA/m)	-29.29	-29.18	Axial	2.4GHz		0
Frequency Response	Pass	Pass	Ала	2.4002	IEEE 802.11b	6
S+N/N (dB)	35.27	34.07				

- Mute on; Backlight off; Max Volume; Max Contrast .
- Radio Configurations can be found in Section 9.II.H .



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL355DL	PCTEST. Road to be past of @ revenue	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 26 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 26 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020

2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 12 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
71	680.5	133297	20	16QAM	1	49	4.27	-32.75	37.02
12	707.5	23095	10	16QAM	1	49	4.34	-31.90	36.24
13	782.0	23230	10	16QAM	1	49	4.67	-34.17	38.84
26	831.5	26865	15	16QAM	1	74	4.40	-31.93	36.33
66	1745.0	132322	20	16QAM	1	99	5.01	-32.93	37.94
25	1882.5	26365	20	16QAM	1	99	4.93	-34.02	38.95

 Table 7-6

 OTT VoIP (LTE FDD) SNNR by LTE Band

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

 Table 7-7

 OTT VolP (LTE TDD) SNNR by LTE Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
41 (PC3)	2593.0	40620	20	16QAM	1	99	4.92	-24.64	29.56
41 (PC2)	2593.0	40620	20	16QAM	1	99	4.56	-20.39	24.95

FCC ID: ZNFL355DL	PCTEST Proad to be part of @ whenever	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 27 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 27 of 83
© 2020 PCTEST				REV 3.5.M

REV 3.5.M 3/2/2020

8. FCC 3G MEASUREMENTS

I. CDMA Test Configurations

Radio Configuration 1, Service Option 3 (thick, green data curve) was used for the testing as the worstcase configuration for the handset due to vocoder gating from the EVRC logic. See below plot for ABM noise comparison between operational field service options and radio configurations for a CDMA2000 handset:

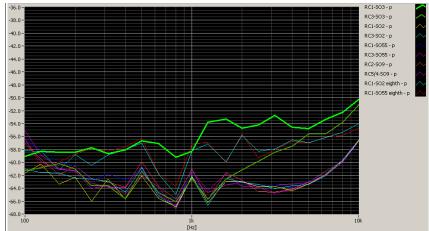



Figure 8-1 CDMA Audio Band Magnetic Noise

Table 8-1
FCC 3G ABM Measurements for ZNFL355DL (CDMA)

=				/	
Configuration:	RC1/SO3	RC3/SO3	RC4/SO3	Orientation	Channel
ABM1 (dBA/m)	2.90	2.74	2.61		
ABM2 (dBA/m)	-28.57	-44.68 -43.51		Axial	600
Frequency Response	Pass	Pass	Pass	Axiai	800
S+N/N (dB)	31.47	47.42	46.12		

Mute on; Backlight off; Max Volume; Max Contrast

Power Control Bits = "All Up"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL355DL	PCTEST Road to be past of @ nervest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 29 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 28 of 83
© 2020 PCTEST		·		REV 3.5.M

REV 3.5.M 3/2/2020

II. UMTS Test Configurations

AMR at 12.2kbps, 13.6kbps SRB (thick, purple data curve) was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:


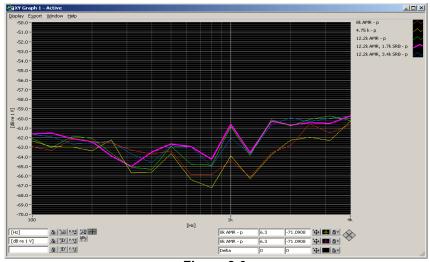


Figure 8-3 UMTS Audio Band Magnetic Noise

Table 8-2 Codec Investigation - UMTS

		ee myestigatio					
Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel		
ABM1 (dBA/m)	-4.63	-4.61	-4.68				
ABM2 (dBA/m)	-45.83	-45.92	-46.14	Axial	9400		
Frequency Response	Pass	Pass	Pass	Axiai	9400		
S+N/N (dB)	41.20	41.31	41.46				

Mute on; Backlight off; Max Volume; Max Contrast
TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFL355DL	Total to be past of @ reference	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 20 of 82
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 29 of 83
© 2020 PCTEST		·		REV 3.5.M

REV 3.5.M 3/2/2020

9. T-COIL TEST SUMMARY

Consolidated Tabled Results												
		-	esponse rgin	_	netic / Verdict		SNNR dict	Margin from FCC Limit	C63.19-2011			
C62 10	9 Section	8.3	3.2	8.3	3.1	8.3	3.4	(dB)	Rating			
005.18	Section	Axial	Radial	Axial	Radial	Axial	Radial					
	Secondary Cellular	PASS	NA	PASS	PASS	PASS	PASS					
CDMA	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-8.05	Т3			
	PCS	PASS	NA	PASS	PASS	PASS	PASS					
	Secondary Cellular	PASS	NA	PASS	PASS	PASS	PASS					
EvDO (OTT VolP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-21.08	Τ4			
	PCS	PASS	NA	PASS	PASS	PASS	PASS					
0.014	Cellular	PASS	NA	PASS	PASS	PASS	PASS	0.00	To			
GSM	PCS	PASS	NA	PASS	PASS	PASS	PASS	-2.02	Т3			
EDGE	Cellular	PASS	NA	PASS	PASS	PASS	PASS	2.02	Т3			
(OTT VoIP)	PCS	PASS NA PASS PASS PASS PASS		-2.23	13							
	Cellular	PASS	NA	PASS	PASS	PASS	PASS					
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-16.64	Τ4			
	PCS	PASS	NA	PASS	PASS	PASS	PASS					
	Cellular	PASS	NA	PASS	PASS	PASS	PASS					
HSPA (OTT VoIP)	AWS	PASS	NA	PASS	PASS	PASS	PASS	-24.22	Τ4			
(011 001)	PCS	PASS	NA	PASS	PASS	PASS	PASS					
	B71	PASS	NA	PASS	PASS	PASS	PASS	\$				
	B12	PASS	NA	PASS	PASS	PASS	PASS					
	B13	PASS	NA	PASS	PASS	PASS	PASS	12.09	T4			
LTE FDD	B26	PASS	NA	PASS	PASS	PASS	PASS	-12.08	14			
	B66	PASS	NA	PASS	PASS	PASS	PASS					
	B25	PASS	NA	PASS	PASS	PASS	PASS					
LTE FDD (OTT VolP)	B12	PASS	NA	PASS	PASS	PASS	PASS	-13.08	Τ4			
	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS	0.50	To			
LTE TDD	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-2.58	Т3			
LTE TDD (OTT VolP)	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-2.02	Т3			
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS					
WLAN	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	-10.54	Τ4			
	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS					
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS					
WLAN (OTT VoIP)	IEEE 802.11g	PASS	NA	PASS	PASS	PASS	PASS	-12.61	Τ4			
	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS					

Tab	le 9-1	
Consolidated	Tabled	Results

FCC ID: ZNFL355DL	PCTEST Road to be part of @ newsrow	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 30 of 83
1M2004220073-11-R1.ZNF	73-11-R1.ZNF 4/27/2020 - 5/14/2020 Portable Handset			Fage 50 01 05
A AAAA DOTEOT				

© 2020 PCTEST

REV 3.5.M 3/2/2020

I. Raw Handset Data

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates					
		476	2.79	-26.24		2.00	29.03	20.00	-9.03	T3						
	Axial	564	2.96	-26.08	-63.85	2.00	29.04	20.00	-9.04	T3	2.2, 1.6					
Secondary		684	2.62	-25.43		2.00	28.05	20.00	-8.05	Т3						
Cellular		476	-5.80	-46.56			40.76	20.00	-20.76	T4						
	Radial	564	-5.95	-45.05	-63.17	N/A	39.10	20.00	-19.10	T4	2.0, 2.6					
		684	-5.73	-45.15			39.42	20.00	-19.42	T4						
	Axial	1013	2.76	-26.27		2.00	29.03	20.00	-9.03	Т3						
		384	2.59	-27.51	-63.85	2.00	30.10	20.00	-10.10	T4	2.2, 1.6					
Cellular		777	2.45	-26.74		2.00	29.19	20.00	-9.19	Т3						
Cellular		1013	-5.90	-45.40	-63.17 N/A		39.50	20.00	-19.50	T4						
	Radial	384	-6.19	-46.50		40.31	20.00	-20.31	T4	2.0, 2.6						
		777	-5.91	-45.81			39.90	20.00	-19.90	T4						
		25	3.01	-28.72		2.00	31.73	20.00	-11.73	T4						
	Axial	600	3.16	-28.67	-63.85	2.00	31.83	20.00	-11.83	T4	2.2, 1.6					
PCS		1175	2.33	-28.98		2.00	31.31	20.00	-11.31	T4						
FCS		25	-5.83	-46.76			40.93	20.00	-20.93	T4						
	Radial	600	-5.69	-46.76	-63.17	-63.17	-63.17	-63.17	-63.17	-63.17	N/A	41.07	20.00	-21.07	T4	2.0, 2.6
		1175	-5.46	-47.14	-		41.68	20.00	-21.68	T4						

Table 9-2 Raw Data Results for CDMA

Table 9-3 Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		128	13.00	-14.14		1.07	27.14	20.00	-7.14	T3	
	Axial	190	13.01	-13.66	-63.20	1.08	26.67	20.00	-6.67	Т3	2.2, 1.6
GSM850		251	13.00	-12.80		1.24	25.80	20.00	-5.80	Т3	
6311030		128	4.90	-18.53		-62.57 N/A	23.43	20.00	-3.43	T3	
	Radial	190	4.91	-18.02	-62.57		22.93	20.00	-2.93	Т3	2.0, 2.6
		251	4.80	-17.22			22.02	20.00	-2.02	T3	
		512	13.02	-20.08		1.24	33.10	20.00	-13.10	T4	
	Axial	661	13.04	-19.56	-63.20	1.07	32.60	20.00	-12.60	T4	2.2, 1.6
CSM1000		810	13.03	-18.70		1.05	31.73	20.00	-11.73	T4	
GSM1900		512	4.86	-24.14			29.00	20.00	-9.00	T3	
	Radial	661	4.87	-23.58	-62.57	N/A	28.45	20.00	-8.45	T3	2.0, 2.6
		810	4.86	-22.68			27.54	20.00	-7.54	T3	

Table 9-4 Raw Data Results for UMTS

Mode	Mode Orientation Channel [dB(A/m)] [dB(A/m)] [dB		Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates				
		4132	-4.70	-45.42		2.00	40.72	20.00	-20.72	T4			
	Axial	4183	-4.69	-45.42	-63.20	1.97	40.73	20.00	-20.73	T4	2.2, 1.6		
UMTS V		4233	-4.69	-45.63		2.00	40.94	20.00	-20.94	T4			
UNITSV		4132	-12.79	-49.53			36.74	20.00	-16.74	T4			
	Radial	4183	-12.78	-49.83	-62.57	N/A	37.05	20.00	-17.05	T4	2.0, 2.6		
		4233	-12.80	-49.81			37.01	20.00	-17.01	T4			
	Axial	1312	-4.65	-45.10		2.00	40.45	20.00	-20.45	T4			
		1412	-4.68	-45.39	-63.20	2.00	40.71	20.00	-20.71	T4	2.2, 1.6		
UMTS IV		1513	-4.67	-45.71		2.00	41.04	20.00	-21.04	T4			
0111311		1312	-12.75	-49.67			36.92	20.00	-16.92	T4			
	Radial	1412	-12.77	-50.30	-62.57	-62.57 N/A	37.53	20.00	-17.53	T4	2.0, 2.6		
		1513	-12.79	-49.81			37.02	20.00	-17.02	T4			
		9262	-4.69	-45.57		2.00	40.88	20.00	-20.88	T4			
	Axial	9400	-4.66	-45.74	-63.20	1.98	41.08	20.00	-21.08	T4	2.2, 1.6		
UMTSII		9538	-4.65	-45.69		2.00	41.04	20.00	-21.04	T4			
OWISI		9262	-12.78	-49.50			36.72	20.00	-16.72	T4	2.0, 2.6		
	Radial	9400	-12.76	-49.47	-62.57	7 -62.57 N/A	36.71	20.00	-16.71	T4			
		9538	-12.78	-49.42			36.64	20.00	-16.64	T4			

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 21 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 31 of 83
© 2020 PCTEST				REV 3.5.M

KEV 3.5.M 3/2/2020

Table 9-5Raw Data Results for LTE B71

	Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates			
			20MHz	133297	4.37	-33.66	-63.85	2.00	38.03	20.00	-18.03	T4	2.2. 1.6			
	Axial	Avial	15MHz	133297	4.01	-34.33		2.00	38.34	20.00	-18.34	T4				
		Axiai	10MHz	133297	4.78	-34.26		2.00	39.04	20.00	-19.04	T4	2.2, 1.0			
	E Band 71		5MHz	133297	4.00	-35.29		2.00	39.29	20.00	-19.29	T4				
			20MHz	133297	-2.73	-36.94			34.21	20.00	-14.21	T4				
	Radial	Dadial	15MHz	133297	-3.00	-37.37	-37.37 -63.17	00.47	62.17	62.17	N/A	34.37	20.00	-14.37	T4	2.0. 2.6
		10MHz	133297	-2.97	-38.35	-03.17	NVA.	35.38	20.00	-15.38	T4	2.0, 2.0				
		5MHz	133297	-2.98	-38.86			35.88	20.00	-15.88	T4					

Table 9-6 Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	23095	3.86	-33.74		2.00	37.60	20.00	-17.60	T4	
	Axial	5MHz	23095	4.60	-33.48	-63.85	2.00	38.08	20.00	-18.08	T4	2.2. 1.6
	Axiai	3MHz	23095	3.67	-35.51	-03.03	2.00	39.18	20.00	-19.18	T4	2.2, 1.0
LTE Band 12		1.4MHz	23095	3.65	-35.81		2.00	39.46	20.00	-19.46	T4	
		10MHz	23095	-2.95	-36.67			33.72	20.00	-13.72	T4	
	Radial	5MHz	23095	-2.97	-37.91	-63.17	N/A	34.94	20.00	-14.94	T4	2.0. 2.6
	Naulai	3MHz	23095	-3.26	-39.14	-03.17	110	35.88	20.00	-15.88	T4	2.0, 2.0
		1.4MHz	23095	-3.05	-40.30			37.25	20.00	-17.25	T4	

Table 9-7Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	10MHz	23230	4.03	-35.88	-63.85	2.00	39.91	20.00	-19.91	T4	2.2. 1.6
LTE Band 13		5MHz	23230	4.78	-33.71	-03.05	2.00	38.49	20.00	-18.49	T4	2.2, 1.0
LIE Ballu 13	Radial	10MHz	23230	-2.91	-39.25	62.47	NVA	36.34	20.00	-16.34	T4	2.0. 2.6
	Raulai	5MHz	23230	-2.59	-37.45	-63.17	N/A	34.86	20.00	-14.86	T4	2.0, 2.0

Table 9-8Raw Data Results for LTE B26

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		15MHz	26865	4.83	-32.90		2.00	37.73	20.00	-17.73	T4	
		10MHz	26865	3.86	-32.76		2.00	36.62	20.00	-16.62	T4	
	Axial	5MHz	26865	4.61	-33.00	-63.85	2.00	37.61	20.00	-17.61	T4	2.2, 1.6
		3MHz	26865	3.98	-33.42		2.00	37.40	20.00	-17.40	T4	
		1.4MHz	26865	4.47	-34.61		2.00	39.08	20.00	-19.08	T4	
LTE Band 26		15MHz	26865	-2.92	-36.87			33.95	20.00	-13.95	T4	
LTE Ballu 20		10MHz	26990	-2.67	-37.02			34.35	20.00	-14.35	T4	
		10MHz	26865	-2.96	-36.59			33.63	20.00	-13.63	T4	
	Radial	10MHz	26740	-2.96	-35.04	-63.17	N/A	32.08	20.00	-12.08	T4	2.0, 2.6
		5MHz	26865	-2.73	-36.84			34.11	20.00	-14.11	T4	
		3MHz	26865	-3.02	-37.95			34.93	20.00	-14.93	T4	
		1.4MHz	26865	-2.65	-38.33			35.68	20.00	-15.68	T4	

Table 9-9Raw Data Results for LTE B66

						Junto It						
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	132572	4.73	-32.34		2.00	37.07	20.00	-17.07	T4	
		20MHz	132322	3.58	-33.00		2.00	36.58	20.00	-16.58	T4	
		20MHz	132072	3.65	-31.58		2.00	35.23	20.00	-15.23	T4	
	Axial	15MHz	132322	4.90	-34.34	-63.85	2.00	39.24	20.00	-19.24	T4	2.2, 1.6
	Axiai	10MHz	132322	4.43	-35.12	-03.05	2.00	39.55	20.00	-19.55	T4	2.2, 1.0
		5MHz	132322	3.89	-34.36	.28	2.00	38.25	20.00	-18.25	T4	
LTE Band 66		3MHz	132322	3.62	-35.28		2.00	38.90	20.00	-18.90	T4	
LIE Ballu 00		1.4MHz	132322	4.55	-34.79		2.00	39.34	20.00	-19.34	T4	
		20MHz	132322	-3.03	-37.06			34.03	20.00	-14.03	T4	
		15MHz	132322	-2.86	-38.58			35.72	20.00	-15.72	T4	
	Radial	10MHz	132322	-2.96	-38.87		N/A	35.91	20.00	-15.91	T4	2.0, 2.6
	Nadiai	5MHz	132322	-2.74	-38.77		NVA	36.03	20.00	-16.03	T4	2.0, 2.0
		3MHz	132322	-3.22	-39.18			35.96	20.00	-15.96	T4	
		1.4MHz	132322	-2.61	-38.97			36.36	20.00	-16.36	T4	

FCC ID: ZNFL355DL	PCTEST Road to be past of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 22 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 32 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

Table 9-10Raw Data Results for LTE B25

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	26365	4.42	-34.15		2.00	38.57	20.00	-18.57	T4	
		15MHz	26365	3.87	-34.65		2.00	38.52	20.00	-18.52	T4	
	Axial	10MHz	26365	3.59	-33.99	-63.85	2.00	37.58	20.00	-17.58	T4	2.2, 1.6
	Axiai	5MHz	26365	3.85	-32.91	-03.05	2.00	36.76	20.00	-16.76	T4	2.2, 1.0
		3MHz	26365	4.41	-34.05		2.00	38.46	20.00	-18.46	T4	
LTE Band 25		1.4MHz	26365	3.85	-33.59		2.00	37.44	20.00	-17.44	T4	
LIE Banu 25		20MHz	26365	-2.67	-39.02			36.35	20.00	-16.35	T4	
		15MHz	26365	-2.59	-39.00			36.41	20.00	-16.41	T4	
	Dedial	10MHz	26365	-3.02	-38.89	-63.17	N/A	35.87	20.00	-15.87	T4	2.0. 2.6
	Radial	5MHz	26365	-2.67	-37.56	-03.17	INA	34.89	20.00	-14.89	T4	2.0, 2.0
		3MHz	26365	-2.73	-37.77			35.04	20.00	-15.04	T4	
		1.4MHz	26365	-2.89	-38.04			35.15	20.00	-15.15	T4	

Table 9-11Raw Data Results for LTE B41 Power Class 3

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	3.95	-23.35		2.00	27.30	20.00	-7.30	T3	
	Axial	15MHz	40620	3.64	-23.59	-63.85	2.00	27.23	20.00	-7.23	Т3	2.2. 1.6
	Axiai	10MHz	40620	3.53	-23.56	-03.05	2.00	27.09	20.00	-7.09	T3	2.2, 1.0
LTE Band 41		5MHz	40620	3.56	-23.78		2.00	27.34	20.00	-7.34	T3	
LIE Ballu 41		20MHz	40620	-10.35	-40.50			30.15	20.00	-10.15	T4	
	Radial	15MHz	40620	-10.39	-40.53	-63.17	NA	30.14	20.00	-10.14	T4	1.0. 2.4
	Raulai	10MHz	40620	-10.44	-40.48	-03.17	INA	30.04	20.00	-10.04	T4	1.0, 2.4
		5MHz	40620	-10.69	-41.02			30.33	20.00	-10.33	T4	

Table 9-12Raw Data Results for LTE B41 Power Class 2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	41490	4.59	-19.00		2.00	23.59	20.00	-3.59	Т3	
		20MHz	41055	4.69	-18.22		2.00	22.91	20.00	-2.91	T3	
		20MHz	40620	3.76	-18.82		2.00	22.58	20.00	-2.58	T3	
	Axial	20MHz	40185	4.92	-19.95	-63.85	2.00	24.87	20.00	-4.87	Т3	2.2, 1.6
	Axiai	20MHz	39750	4.93	-19.43	-03.03	2.00	24.36	20.00	-4.36	Т3	2.2, 1.0
		15MHz	40620	4.54	-18.47		2.00	23.01	20.00	-3.01	Т3	
		10MHz	40620	4.18	-18.45		2.00	22.63	20.00	-2.63	Т3	
LTE Band 41		5MHz	40620	4.73	-18.74		2.00	23.47	20.00	-3.47	T3	
LTE Ballu 41		20MHz	40620	-10.48	-36.59			26.11	20.00	-6.11	Т3	
		15MHz	40620	-10.59	-36.88			26.29	20.00	-6.29	Т3	
		10MHz	41490	-10.62	-36.66			26.04	20.00	-6.04	T3	
	Radial	10MHz	41055	-10.75	-34.84	-63.17	N/A	24.09	20.00	-4.09	Т3	1.0, 2.4
		10MHz	40620	-10.86	-36.65	-03.17	IVA	25.79	20.00	-5.79	T3	1.0, 2.4
		10MHz	40185	-10.48	-37.54			27.06	20.00	-7.06	T3	
		10MHz	39750	-10.79	-37.16			26.37	20.00	-6.37	T3	
		5MHz	40620	-10.73	-36.86			26.13	20.00	-6.13	T3	1

Table 9-13 Raw Data Results for 2.4GHz WIFI

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		1	0.46	-31.53		2.00	31.99	20.00	-11.99	T4		
	Axial	6	1.29	-29.25	-63.85	2.00	30.54	20.00	-10.54	T4	2.2, 1.6	
IEEE		11	0.73	-30.26		2.00	30.99	20.00	-10.99	T4		
802.11b		1	-6.24	-41.50			35.26	20.00	-15.26	T4		
	Radial	6	-6.16	-41.26	-63.17	N/A	35.10	20.00	-15.10	T4	2.0, 2.6	
		11	-6.76	-41.27			34.51	20.00	-14.51	T4		
IEEE	Axial	6	0.91	-32.78	-63.85	2.00	33.69	20.00	-13.69	T4	2.2, 1.6	
802.11g	Radial	6	-6.25	-44.81	-63.17	N/A	38.56	20.00	-18.56	T4	2.0, 2.6	
IEEE	Axial	6	1.13	-34.03	-63.85	2.00	35.16	20.00	-15.16	T4	2.2, 1.6	
802.11n	Radial	6	-6.48	-43.43	-63.17	N/A	36.95	20.00	-16.95	T4	2.0, 2.6	

FCC ID: ZNFL355DL	PCTEST. Total to be past of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 22 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 33 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

			Raw D	ata Re	sults for	r EvDO	(OTT V	olP)			
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Secondary Cellular	Axial	564	4.34	-38.18	-63.85	1.79	42.52	20.00	-22.52	T4	2.2, 1.6
EvDO	Radial	564	-3.24	-55.89	-63.17	N/A	52.65	20.00	-32.65	T4	2.0, 2.6
Cellular	Axial	384	4.58	-41.25	-63.85	1.80	45.83	20.00	-25.83	T4	2.2, 1.6
EvDO	Radial	384	-3.19	-56.35	-63.17	N/A	53.16	20.00	-33.16	T4	2.0, 2.6
PCS	Axial	600	4.25	-36.83	-63.85	1.75	41.08	20.00	-21.08	T4	2.2, 1.6
EvDO	Radial	600	-3.10	-57.27	-63.17	N/A	54.17	20.00	-34.17	T4	2.0, 2.6

Table 9-14 Raw Data Results for EvDO (OTT VoIP)

 Table 9-15

 Raw Data Results for EDGE (OTT VolP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
EDGE850	Axial	190	4.42	-17.81	-63.20	1.81	22.23	20.00	-2.23	Т3	2.2, 1.6
EDGE050	Radial	190	-10.11	-32.81	-62.57	N/A	22.70	20.00	-2.70	Т3	2.0, 2.6
EDGE1900	Axial	661	4.79	-22.53	-63.20	1.73	27.32	20.00	-7.32	Т3	2.2, 1.6
EDGE1900	Radial	661	-2.51	-26.17	-62.57	N/A	23.66	20.00	-3.66	Т3	2.0, 2.6

Table 9-16 Raw Data Results for HSPA (OTT VoIP)

									-		
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	4.88	-40.22	-63.20	1.80	45.10	20.00	-25.10	T4	2.2, 1.6
NOFA V	Radial	4183	-2.80	-47.24	-62.57	N/A	44.44	20.00	-24.44	T4	2.0, 2.6
HSPA IV	Axial	1412	5.20	-41.08	-63.20	1.66	46.28	20.00	-26.28	T4	2.2, 1.6
HOPAIN	Radial	1412	-2.83	-47.05	-62.57	N/A	44.22	20.00	-24.22	T4	2.0, 2.6
HSPA II	Axial	9400	5.02	-42.44	-63.20	1.77	47.46	20.00	-27.46	T4	2.2, 1.6
Hor'A II	Radial	9400	-2.56	-47.02	-62.57	N/A	44.46	20.00	-24.46	T4	2.0, 2.6

Table 9-17Raw Data Results for LTE B12 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	23130	4.33	-33.04		1.64	37.37	20.00	-17.37	T4	2.2, 1.6
		10MHz	23095	4.28	-31.84		1.68	36.12	20.00	-16.12	T4	
	Axial	10MHz	23060	5.02	-33.97	-63.20	1.76	38.99	20.00	-18.99	T4	
		5MHz	23095	4.64	-33.58		1.69	38.22	20.00	-18.22	T4	
		3MHz	23095	4.38	-33.40		1.70	37.78	20.00	-17.78	T4	
LTE Band 12		1.4MHz	23095	4.24	-34.06		1.76	38.30	20.00	-18.30	T4	
LIE Ballu 12		10MHz	23130	-3.05	-37.69			34.64	20.00	-14.64	T4	
		10MHz	23095	-2.92	-36.00			33.08	20.00	-13.08	T4	
	Destint	10MHz	23060	-2.85	-38.45	00.57	NA	35.60	20.00	-15.60	T4	
	Radial	5MHz	23095	-3.29	-37.04	-62.57	IVA	33.75	20.00	-13.75	T4	2.0, 2.6
		3MHz	23095	-3.10	-37.62			34.52	20.00	-14.52	T4	
		1.4MHz	23095	-3.12	-38.90	1		35.78	20.00	-15.78	T4	

FCC ID: ZNFL355DL	Road to be past of @ nerver	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 24 of 92	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 34 of 83	
© 2020 PCTEST		· · ·		REV 3.5.M	

3/2/2020

			ala NE	Sulla I		D41 F		1a33 2 (
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	4.33	-20.52		1.41	24.85	20.00	-4.85	T3	
		15MHz	41490	4.52	-20.54		1.21	25.06	20.00	-5.06	Т3	
		15MHz	41055	4.60	-18.47		1.04	23.07	20.00	-3.07	Т3	2.2, 1.6
	Axial	15MHz	40620	4.48	-20.33	-63.20	1.14	24.81	20.00	-4.81	T3	
	Axiai	15MHz	40185	4.91	-21.22	-63.20	1.27	26.13	20.00	-6.13	Т3	
		15MHz	39750	4.70	-20.88		1.26	25.58	20.00	-5.58	Т3	
		10MHz	40620	4.69	-20.28		1.16	24.97	20.00	-4.97	T3	
LTE Band 41		5MHz	40620	5.06	-20.28		1.12	25.34	20.00	-5.34	Т3	
LIE Ballu 41		20MHz	40620	-2.73	-25.58	-		22.85	20.00	-2.85	T3	
		15MHz	40620	-2.74	-25.53			22.79	20.00	-2.79	T3	
		10MHz	40620	-2.42	-25.48			23.06	20.00	-3.06	Т3	
	Radial	5MHz	41490	-2.66	-24.97	-62.57	NA	22.31	20.00	-2.31	Т3	2.0, 2.6
	Raulai	5MHz	41055	-2.60	-24.62	-62.57	INA	22.02	20.00	-2.02	T3	2.0, 2.0
		5MHz	40620	-2.67	-25.37			22.70	20.00	-2.70	T3	
		5MHz	40185	-2.68	-25.83			23.15	20.00	-3.15	T3	
		5MHz	39750	-2.61	-25.25	1		22.64	20.00	-2.64	Т3	

Table 9-18 Raw Data Results for LTE B41 Power Class 2 (OTT VoIP)

Table 9-19 Raw Data Results for 2.4GHz WIFI (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		1	4.83	-28.73		1.78	33.56	20.00	-13.56	T4	
	Axial	6	4.75	-29.45	-63.20	1.67	34.20	20.00	-14.20	T4	2.2, 1.6
IEEE		11	4.77	-27.84		1.75	32.61	20.00	-12.61	T4	
802.11b		1	-2.70	-40.12			37.42	20.00	-17.42	T4	
	Radial	6	-3.20	-39.66	-62.57	N/A	36.46	20.00	-16.46	T4	2.0, 2.6
		11	-2.90	-38.72			35.82	20.00	-15.82	T4	
IEEE	Axial	6	4.96	-32.47	-63.20	1.82	37.43	20.00	-17.43	T4	2.2, 1.6
802.11g	Radial	6	-2.64	-41.53	-62.57	N/A	38.89	20.00	-18.89	T4	2.0, 2.6
IEEE	Axial	6	4.64	-34.00	-63.20	1.65	38.64	20.00	-18.64	T4	2.2, 1.6
802.11n	Radial	6	-2.74	-42.14	-62.57	N/A	39.40	20.00	-19.40	T4	2.0, 2.6

II. Test Notes

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Settings→Network & Internet→Call→Additional Settings→Hearing aids) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G modes.
- 6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. CDMA

- 1. Power Configuration: Power Control Bits = "All Up"
- 2. Vocoder Configuration: RC1/SO3 (CDMA EVRC)
- C. GSM
 - 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
 - 2. Vocoder Configuration: EFR (GSM);

FCC ID: ZNFL355DL	PCTEST. Total to be past of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 25 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 35 of 83
© 2020 PCTEST				REV 3.5.M

D. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);

E. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 99%RB offset
- 3. Vocoder Configuration: WB AMR 23.85kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 66 at 20MHz is the worst-case for the Axial probe orientation. LTE Band 26 at 10MHz bandwidth is the worst-case for the Radial probe orientation.

F. LTE TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 99%RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 2
- 4. Power Class 2 Uplink-Downlink configuration: 1
- 5. Vocoder Configuration: WB AMR 23.85kbps
- 6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 20MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 10MHz is the worst-case for the Radial probe orientation.

G. WIFI

- 1. Radio Configuration
 - a. IEEE 802.11b: DSSS, 1Mbps
 - b. IEEE 802.11g: BPSK, 6Mbps
 - c. IEEE 802.11n: BPSK, MCS 0
- 2. Vocoder Configuration: WB AMR 23.85kbps
- 3. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for both Axial and Radial probe orientations.


H. OTT VoIP

- 1. Vocoder Configuration: 6kbps
- 2. EvDO Configuration
 - a. Revision: A
- 3. EDGE Configuration
 - a. MCS Index: 7
 - b. Number of TX slots: 2
- 4. HSPA Configuration:
 - a. Release: 6
 - b. 3GPP 34.121 Subtest 1
- 5. LTE FDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 99%RB offset
 - c. LTE Band 12 was the worst-case band from Table 7-6 and was used to test both Axial and Radial probe orientations.


FCC ID: ZNFL355DL	PCTEST Mod to be part of @ newses	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dage 26 of 92	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 36 of 83	
© 2020 PCTEST		· ·		REV 3.5.M	

- d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 12 at 10MHz is the worst-case for both Axial and Radial probe orientations.
- 6. LTE TDD Configuration:
 - a. Power Configuration: TPC = "Max Power"
 - b. Radio Configuration: 16QAM, 1RB, 99%RB offset
 - c. Power Class 2 Uplink-Downlink configuration: 1
 - d. LTE Band 41 Power Class 2 was the worst-case band from Table 7-7 and was used to test both Axial and Radial probe orientations.
 - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 15MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 5MHz is the worst-case for the Radial probe orientation.
- 7. WIFI Configuration:
 - a. Radio Configuration
 - i. IEEE 802.11b: DSSS, 1Mbps
 - ii. IEEE 802.11g: BPSK, 6Mbps
 - iii. IEEE 802.11n: BPSK, MCS 0
 - b. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11b is the worst-case for both Axial and Radial probe orientations.

III. 1 kHz Vocoder Application Check




This model was verified to be within the linear region for ABM1 measurements at -18 dBm0 for CDMA. This measurement was taken in the axial configuration above the maximum location.

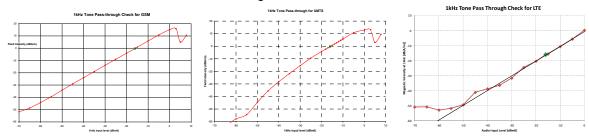

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.

FCC ID: ZNFL355DL	PCTEST Road to be part of @ nerver	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 27 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 37 of 83
© 2020 PCTEST		·		REV 3.5.M

KEV 3.5.M 3/2/2020



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

IV. T-Coil Validation Test Results

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.319	PASS
Environmental Noise	< -58 dBA/m	-63.20	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.365	PASS
Environmental Noise	< -58 dBA/m	-62.57	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

Table 9-20 Helmholtz Coil Validation Table of Results - 4/27/2020

Table 9-21Helmholtz Coil Validation Table of Results - 5/11/2020


Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.300	PASS
Environmental Noise	< -58 dBA/m	-63.85	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.349	PASS
Environmental Noise	< -58 dBA/m	-63.17	PASS
Frequency Response, from limits	> 0 dB	0.80	PASS

FCC ID: ZNFL355DL	PCTEST Prod to be pet of @ eveness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 20 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 38 of 83
© 2020 PCTEST		•		REV 3.5.M

© 2020 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

3/2/2020

ABM1 Magnetic Field Distribution Scan Overlays V.

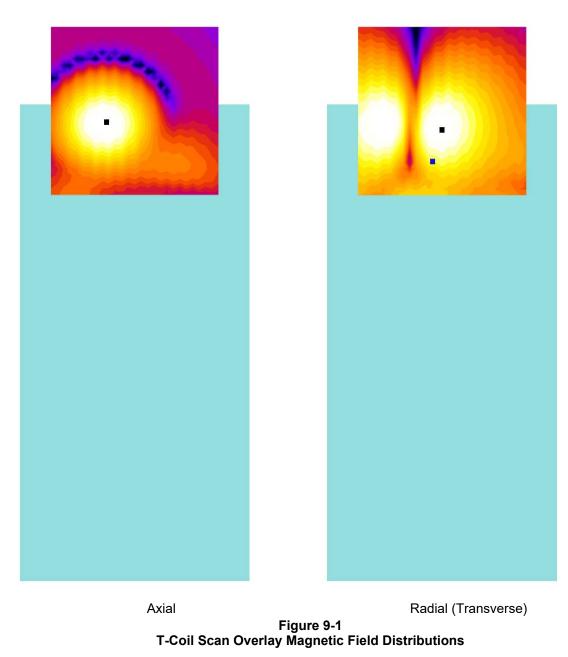

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots. The radial measurement location for LTE TDD VoLTE over IMS is indicated by a blue cursor.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFL355DL	PCTEST Road to be perfect d @ comment	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 20 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 39 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

MEASUREMENT UNCERTAINTY 10.

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)						17.7%	0.71
Expanded uncertainty (k=2), 95% confidence level					35.3%	1.31	

Table 10-1 **Uncertainty Estimation Table**

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.

All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in 2

NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 40 af 00
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 40 of 83
© 2020 PCTEST		•		REV 3.5.M

3/2/2020

11. EQUIPMENT LIST

Table 11-1 Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Control Company	4040	Temperature / Humidity Monitor	6/29/2019	Biennial	6/29/2021	192291470
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	9/6/2018	Biennial	9/6/2020	2655082910
Listen	SoundConnect	Microphone Power Supply	9/6/2018	Biennial	9/6/2020	0899-PS150
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	9/6/2018	Biennial	9/6/2020	23792992
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/4/2020	Annual	2/4/2021	162125
Rohde & Schwarz	CMW500	Radio Communication Tester	5/17/2019	Annual	5/17/2020	128635
Seekonk	NC-100	Torque Wrench (8" lb)	5/23/2018	Biennial	5/23/2020	N/A
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM		HAC Positioner	N/A		N/A	N/A
TEM	Helmholtz Coil	Helmholtz Coil	5/20/2019	Biennial	5/20/2021	925
TEM	Radial T-Coil Probe	Radial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1130
TEM	Axial T-Coil Probe	Axial T-Coil Probe	5/17/2019	Biennial	5/17/2021	TEM-1124

FCC ID: ZNFL355DL	Road to be past of @ remove	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 41 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 41 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020

12. TEST DATA

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 42 of 83
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Fage 42 01 05
© 2020 PCTEST				REV 3.5.M 3/2/2020

4/27/2020




DUT: HH Coil – SN: 925 Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

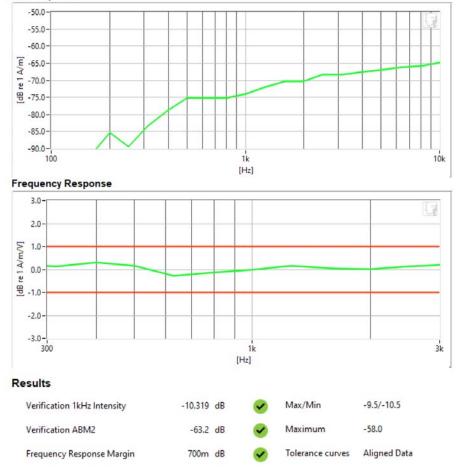

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Proof to be pest of @ rement	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 42 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 43 of 83
© 2020 PCTEST				REV 3.5.M




DUT: HH Coil – SN: 925 Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1124; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

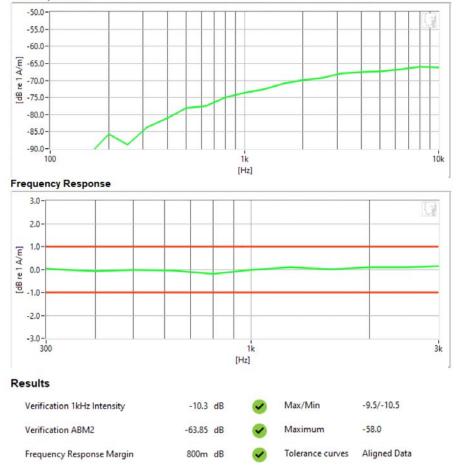

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Poul la be pail al Sussess	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 44 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 44 of 83
© 2020 PCTEST		•		REV 3.5.M

3/2/2020

4/27/2020



DUT: HH Coil – SN: 925 Type: HH Coil Serial: 925


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 05/17/2019

Helmholtz Coil – SN: 925; Calibrated: 05/20/2019

Noise Spectrum

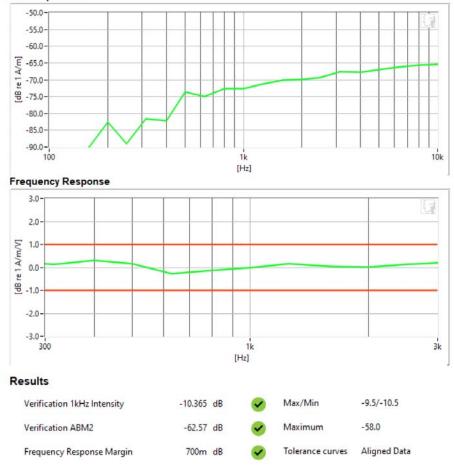

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Poul la be pail of @ versees	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 45 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 45 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020




DUT: HH Coil – SN: 925 Type: HH Coil Serial: 925

Measurement Standard: ANSI C63.19-2011

Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1130; Calibrated: 05/17/2019
- Helmholtz Coil SN: 925; Calibrated: 05/20/2019

Noise Spectrum

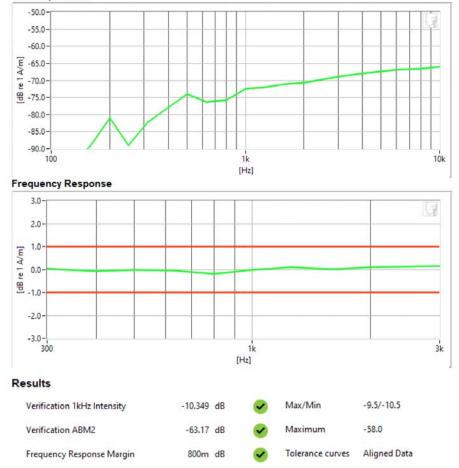

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Road to be past of @ eveness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 46 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 46 of 83
© 2020 PCTEST				REV 3.5.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:


٠

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: CDMA Secondary Cellular
 - Channel: 684
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

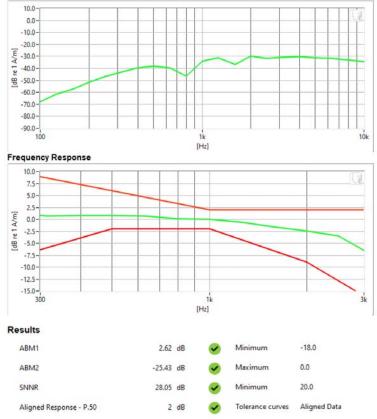

PCTEST 2020

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 47 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 47 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

5/12/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:


٠

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: CDMA Cellular
 - Channel: 1013
- Speech Signal: ITU-T P.50 Artificial Voice



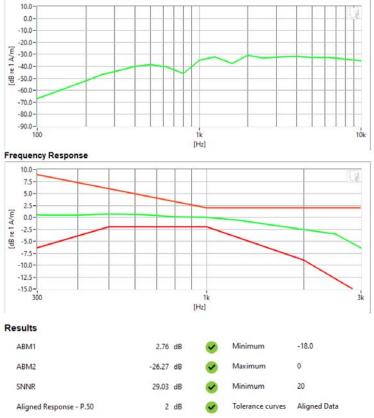

PCTEST 2020

FCC ID: ZNFL355DL	POTEST Rood to be pet at @ energy	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 49 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 48 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020

5/12/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: CDMA PCS
- Channel: 1175

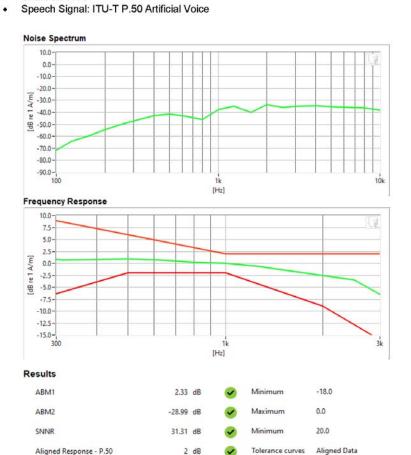

PCTEST 2020

FCC ID: ZNFL355DL	POTEST Prod to be pet at @ evenes	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 40 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 49 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: GSM 850
- Channel: 251
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

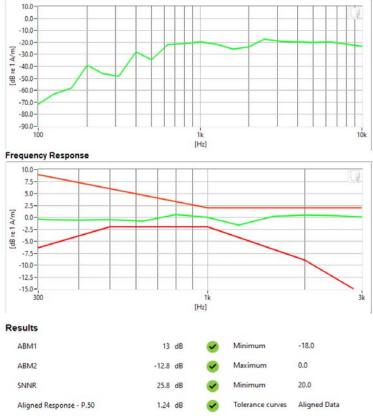

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Boal to be part of @ nerver	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 50 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 50 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: GSM 1900
- Channel: 810
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

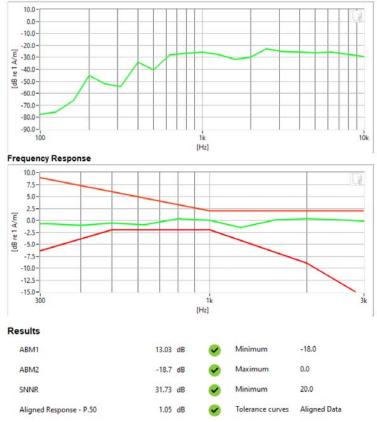

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Prod to be pest of @ eveness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 51 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 51 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:


٠

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: UMTS Band V
 - Channel: 4132
- Speech Signal: ITU-T P.50 Artificial Voice

Noise Spectrum

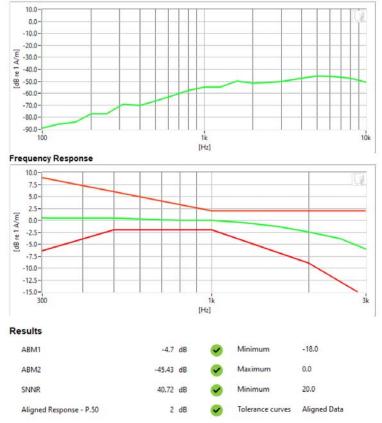

PCTEST 2020

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 52 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 52 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: UMTS Band IV ٠
 - Channel: 1312
- Speech Signal: ITU-T P.50 Artificial Voice .

Noise Spectrum

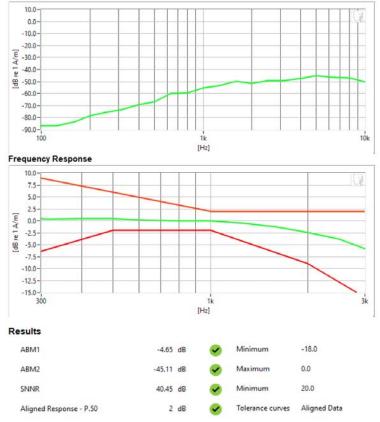

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Prod to be pest of @ eveness	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 52 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 53 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- · Mode: UMTS Band II ٠
 - Channel: 9262
- Speech Signal: ITU-T P.50 Artificial Voice .

Noise Spectrum

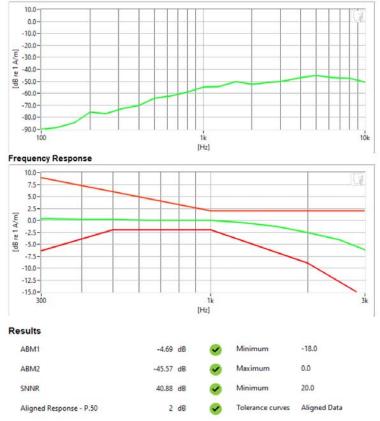

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Poul la be poil of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dego 54 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 54 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

5/12/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

• Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: LTE FDD Band 66
- Bandwidth: 20MHz
- Channel: 132072
- Speech Signal: ITU-T P.50 Artificial Voice



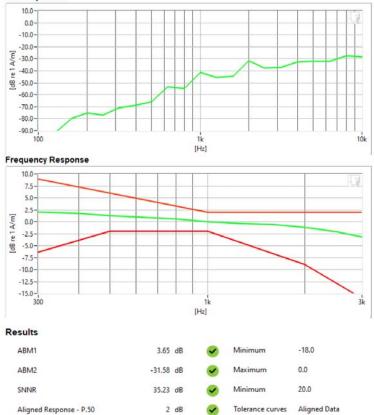

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Prod to be part of @ comment	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 55 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 55 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

5/12/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

• Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: LTE TDD Band 41 (Power Class 2)
- Bandwidth: 20MHz
- Channel: 40620
- Speech Signal: ITU-T P.50 Artificial Voice



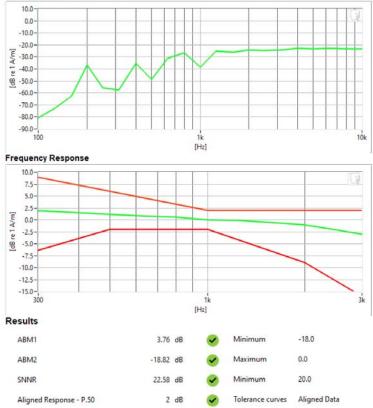

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Poul la be poil of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege EC of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 56 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 6
- Speech Signal: ITU-T P.50 Artificial Voice



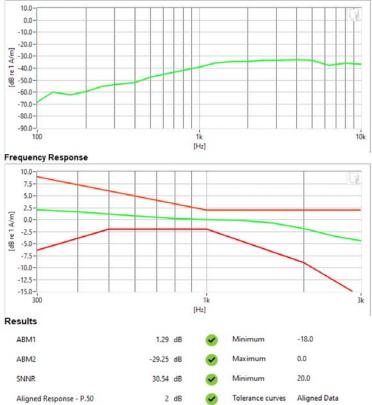

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Poul la be pat al Sussess	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dego 57 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 57 of 83
© 2020 PCTEST				REV 3.5.M



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFL355DL

Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe - SN: TEM-1124; Calibrated: 5/17/2019

Test Configuration:

- VolP Application: Google Duo
- Mode: EDGE 850
- Channel: 190
- Speech Signal: ITU-T P.50 Artificial Voice



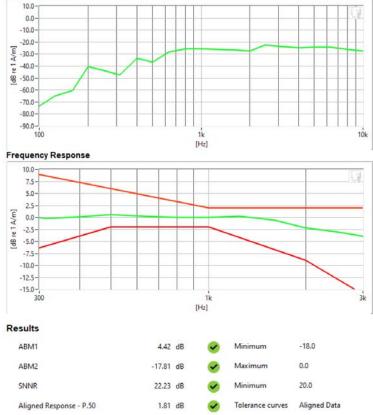

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Poul to be poil of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 50 of 02
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 58 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset

Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: CDMA Secondary Cellular
- Channel: 564

Noise Spectrum



PCTEST 2020

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 50 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 59 of 83
© 2020 PCTEST		-		REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: CDMA Cellular
- Channel: 1013





PCTEST 2020

FCC ID: ZNFL355DL	Road to be post at @ enterest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 60 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 60 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: CDMA PCS
- Channel: 25

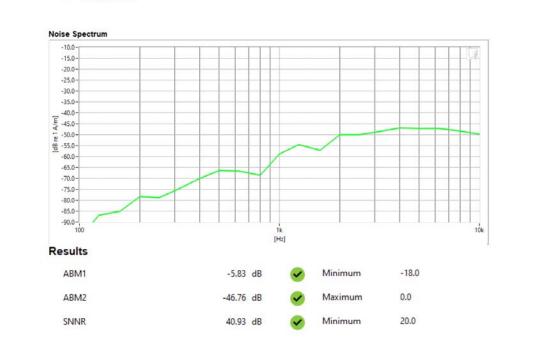

PCTEST 2020

FCC ID: ZNFL355DL	Road to be post at @ enterest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 61 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 61 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: GSM 850
- Channel: 251





PCTEST 2020

FCC ID: ZNFL355DL		HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 62 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 62 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: GSM 1900
- Channel: 810



PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Pour la be pat d & venues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 62 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 63 of 83
© 2020 PCTEST		·		REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: UMTS Band V
- Channel: 4132





PCTEST 2020

FCC ID: ZNFL355DL	POTEST. Hoad to be pert of @ extension	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 64 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 64 of 83
© 2020 PCTEST		•		REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: UMTS Band IV
- Channel: 1312

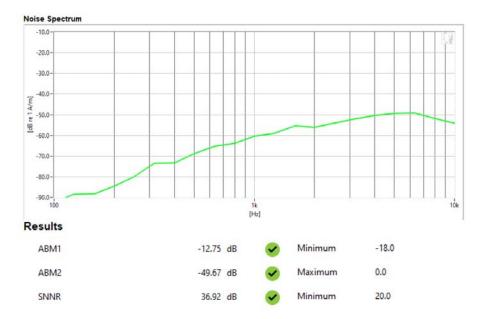

PCTEST 2020

FCC ID: ZNFL355DL	Road to be part of @ wetware	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 65 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 65 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: UMTS Band II
- Channel: 9538





PCTEST 2020

FCC ID: ZNFL355DL	POTEST Poul la la patient	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 66 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 66 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: LTE FDD Band 26
- Bandwidth: 10MHz
- Channel: 26740

Noise Spectrum



PCTEST 2020

FCC ID: ZNFL355DL	POTEST Prove be part of @ wereners	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 67 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 67 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: LTE TDD Band 41 (Power Class 2)
- Bandwidth: 10MHz
- Channel: 41055

Noise Spectrum



PCTEST 2020

FCC ID: ZNFL355DL	Road to be post at @ enterest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dege 69 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 68 of 83
© 2020 PCTEST		•		REV 3.5.M

3/2/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- Mode: 2.4GHz WIFI
- Standard: IEEE 802.11b
- Channel: 11

Noise Spectrum

SNNR

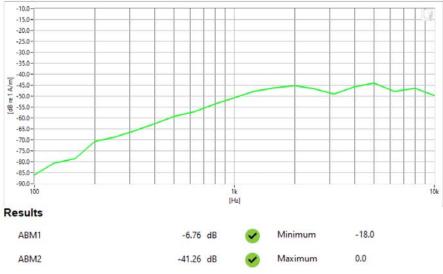

34.51 dB

20.0

Minimum

PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Pour la be pat d @ versee	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 60 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 69 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

4/30/2020



DUT: ZNFL355DL Type: Portable Handset Serial: 09854

e or i dan

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1130; Calibrated: 5/17/2019

Test Configuration:

- VolP Application: Google Duo
- Mode: LTE TDD Band 41 (Power Class 2)
- Bandwidth: 5MHz
- Channel: 41055

Noise Spectrum



PCTEST 2020

FCC ID: ZNFL355DL	PCTEST Poul la be pat al Sussess	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 70 of 92	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 70 of 83	
© 2020 PCTEST				REV 3.5.M	

3/2/2020

13. CALIBRATION CERTIFICATES

FCC ID: ZNFL355DL	PCTEST. Trud to be pest of @ revenues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 74 af 00
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 71 of 83
© 2020 PCTEST				REV 3.5.M 3/2/2020

West C	aldwall Calibrat	tion Laboratories	Inc
west C		IOII LADOI ALOI 165	IIIC.
	fierde ef	Calibra	L
Certi	licate of	Calibra	lion
	for		
	AXIAL T COI		
	Manufactured by: Model No:	TEM CONSULTING AXIAL T COIL PROBE	
	Serial No: Calibration Recall No:	TEM-1124 29973	
	Submitte	ed By:	
		REW HARWELL	
		EST ENGINEERING LAB -B DOBBIN ROAD	
	COL	JUMBIA MD	21045
		o accepted values of natural ph following specification upon its	return to the
West Caldwell Calibra	tion Laboratories Procedure	No. AXIAL T C TEM C	12A 6/4/2019
Upon receipt for Calib	ration, the instrument was for	and to be:	6/4/2019
Within	(X)		
	ted specification. See attached ied relates to the calibrated ite	-	
West Caldwell Calibra	tion Laboratories' calibration	control system meets the requ C Guide 25, ISO 9001:2015 and	and a second sec
			Λ
Note: With this Certificate,	Report of Calibration is included.	Approved by:	\mathcal{M}
Calibration Date:	17-May-19	James	
Certificate No:	29973 -1	Quality M ISO/IEC 170	anager 025:2005
QA Doc. #1051 Rev. 2.0 10/1/01	Certificate Pag est Caldwell	e 1 of 1	
	alibration Laboratories, Inc.		
1575 State Route 96, Victor, N		Calibration Lab. (Cert. # 1533.01

FCC ID: ZNFL355DL	POTEST Prove To be pert of @ energed	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dega 70 of 92	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	2020 Portable Handset		Page 72 of 83	
© 2020 PCTEST				REV 3.5.M	

REV 3.5.M 3/2/2020

HCATEMC_TEM-1124_May-17-2019



1575 State Route 96, Victor NY 14564



ISO/IEC 17025: 2005

Calibration Lab. Cert. # 1533.01

REPORT OF CALIBRATION

mpa	any: PCTest E		Coil Pro .abs					Probe				TEM- XXXX	
tion													
	Probe Ser	•		h Helmho	ltz Coil		Before &	after data	same.	x			
	the number of			10	No.			unton uutu	ounior				
				0.204	m		Labo	ratory Enviro	nment:				
tł				0.09	Α		An	bient Tempe	erature:	20	.7	°C	
	Hein	nholtz Coil Con	stant;	7.09	A/m	i/V		Ambient Hu	umidity:	42	.7	% RH	
	Helmholf	z Coil magnetic	field;	5.96	A/m	ı		Ambient Pr	essure:	98.	256	kPa	
								Calibratio	n Date:	17-Ma	y-2019		
	F	Probe Sensitiv	ity at	1000	Hz.			Calibratio	on Due:	17-Ma	y-2020		
			was	-60.41	dB\	//A/m		Report N	umber:		29973	-1	
				0.954	mV	/A/m		Control N	umber:		29973	6	
				903									
							•	•					
		-											
				ontidence lev	el with a	covera	ige factor of K=2.						
repre	esents Probes Fre	quency Respons	e.										
					Axial F	robe	Response		Measure	d Probe I	Resp.		
²⁰ 1							1						
15 -											-	\square	
10									-				
5										1.			
Ŭ													
0 -										-			+
-5 -					*								
.10													
-15 -		-										++	+
-20							ļ	<u>.</u>					
10	. 00			Fr	eq. (Hz)	1(000						10000
	the bove alibra pand reprint 20 15 - 5 - 5 - 105 - 101520 -	the number of the radius of et the current in the Hein Heimholt bove listed instrum alibration is traceable t panded uncertainty of car represents Probes Fre	Probe Sensitivity measu Helmholtz the number of turns on each the radius of each coil, in me the current in the coils, in ampe Helmholtz Coil Cons Helmholtz Coil magnetic Probe Sensitiv Probe resist bove listed instrument meets or of alibration is traceable through NIST test panded uncertainty of calibration: 0.30dB of represents Probes Frequency Response	Probe Sensitivity measured with Helmholtz Coil; the number of turns on each coil; the radius of each coil, in meters; the current in the coils, in amperes.; Helmholtz Coil Constant; Helmholtz Coil magnetic field; Probe Sensitivity at was Probe resistance bove listed instrument meets or exceeds alibration is traceable through NIST test numbers panded uncertainty of calibration: 0.30dB at 95% of represents Probes Frequency Response.	Probe Sensitivity measured with Helmho Helmholtz Coil; the number of turns on each coil; 10 the radius of each coil, in meters; 0.204 the current in the coils, in amperes.; 0.09 Helmholtz Coil Constant; 7.09 Helmholtz Coil magnetic field; 5.96 Probe Sensitivity at 1000 was -60.41 0.954 Probe resistance 903 bove listed instrument meets or exceeds the tested alibration is traceable through NIST test numbers: panded uncertainty of calibration: 0.30dB at 95% confidence lear represents Probes Frequency Response.	Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil; the number of turns on each coil; 10 No. the radius of each coil, in meters; 0.204 m the current in the coils, in amperes.; 0.09 A Helmholtz Coil Constant; 7.09 A/m Helmholtz Coil magnetic field; 5.96 A/m Probe Sensitivity at 1000 Hz. was -60.41 dBN 0.954 mV Probe resistance 903 Ohr bove listed instrument meets or exceeds the tested manu alibration is traceable through NIST test numbers: 683 panded uncertainty of calibration: 0.30dB at 95% confidence level with a represents Probes Frequency Response. Axial F	Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil; the number of turns on each coil; 10 No. the radius of each coil, in meters; 0.204 m the current in the coils, in amperes.; 0.09 A Helmholtz Coil Constant; 7.09 A/m/V Helmholtz Coil magnetic field; 5.96 A/m Probe Sensitivity at 1000 Hz. was -60.41 dBV/A/m 0.954 mV/A/m Probe resistance 903 Ohms bove listed instrument meets or exceeds the tested manufactur alibration is traceable through NIST test numbers: 683/2903- panded uncertainty of calibration: 0.30dB at 95% confidence level with a covera represents Probes Frequency Response. Axial Probe I	Probe Sensitivity measured with Helmholtz Coll Helmholtz Coll; Before & the number of turns on each coil; 10 No. the radius of each coil, in meters; 0.204 m Labo the current in the coils, in amperes.; 0.09 A An Helmholtz Coil Constant; 7.09 A/m/V Helmholtz Coil magnetic field; 5.96 A/m Probe Sensitivity at 1000 Hz. was -60.41 dBV/A/m 0.954 mV/A/m Probe resistance 903 Ohms bove listed instrument meets or exceeds the tested manufacturer's specifications alibration is traceable through NIST test numbers: 683/290345-18 panded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2. represents Probes Frequency Response. 20 10 5 0 10 15 10 10 15 20 10 10 10 10 10 10 10 10 10 1	Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil; Before & after data is the number of turns on each coil; 10 No. the radius of each coil, in meters; 0.204 m Laboratory Enviro the current in the coils, in amperes.; 0.09 A Ambient Tempe Helmholtz Coil Constant; 7.09 A/m/V Ambient He Helmholtz Coil magnetic field; 5.96 A/m Ambient Pro- Calibratio Probe Sensitivity at 1000 Hz. Calibratic was -60.41 dBV/A/m Report N 0.954 mV/A/m Control N Probe resistance 903 Ohms bove listed instrument meets or exceeds the tested manufacturer's specifications. alibration is traceable through NIST test numbers: 683/290345-18 panded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2. represents Probes Frequency Response. 20 10 15 10 10 15 20 20 20 20 20 20 20 20 20 20	Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil; Before & after data same: the number of turns on each coil; 10 No. the radius of each coil, in meters; 0.204 m Laboratory Environment: the current in the coils, in amperes.; 0.09 A Ambient Temperature: Helmholtz Coil Constant; 7.09 A/m/V Ambient Humidity: Helmholtz Coil magnetic field; 5.96 A/m Ambient Pressure: Calibration Date: Probe Sensitivity at 1000 Hz. Calibration Due: was -60.41 dBV/A/m Report Number: 0.954 mV/A/m Control Number: Probe resistance 903 Ohms bove listed instrument meets or exceeds the tested manufacturer's specifications. alibration is traceable through NIST test numbers: 683/290345-18 panded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2. represents Probes Frequency Response. 20 15 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 10 10 10 10 10 10 10 10 10	Probe Sensitivity measured with Helmholtz Coll Helmholtz Coll; Before & after data same:X the number of turns on each coll; 10 No. the radius of each coll, in meters; 0.204 m Laboratory Environment: the current in the colls, in amperes.; 0.09 A Ambient Temperature: 20 Helmholtz Coll Constant; 7.09 A/m/V Ambient Humidity: 42 Helmholtz Coll magnetic field; 5.96 A/m Ambient Pressure: 98. Calibration Date: 17-May was -60.41 dBV/A/m Report Number: 0.954 mV/A/m Control Number: Probe resistance 903 Ohms bove listed instrument meets or exceeds the tested manufacturer's specifications. alibration is traceable through NIST test numbers: fergresents Probes Frequency Response. 20 10 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 5 10 10 10 10 10 10 10 10 10 10	Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil; the number of turns on each coil; the radius of each coil, in meters; 0.204 m Laboratory Environment: the current in the coils, in amperes.; 0.09 A Ambient Temperature: 20.7 Helmholtz Coil Constant; 7.09 A/m/V Ambient Temperature: 28.256 Calibration Date: 17-May-2019 Probe Sensitivity at 1000 Hz. Calibration Date: 17-May-2020 was -60.41 dBV/A/m Report Number: 29973 0.954 mV/A/m Control Number: 29973 Probe resistance 903 Ohms bove listed instrument meets or exceeds the tested manufacturer's specifications. alibration is traceable through NIST test numbers: 683/290345-18 panded uncertainty of calibration: 0.30dB at 95% colfidence level with a coverage factor of k=2. represents Probes Frequency Response. Axial Probe Response ONE Axial Probe Response Axial Probe Response	Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil; Before & after data same:X the number of turns on each coll; 10 No. the radius of each coll, in meters; 0.204 m Laboratory Environment: the current in the coils, in amperes.; 0.09 A Ambient Temperature: 20.7 °C Helmholtz Coil Constant; 7.09 A/m/V Ambient Humidity: 42.7 % RH Helmholtz Coil magnetic field; 5.96 A/m Ambient Pressure: 98.256 kPa Calibration Date: 17-May-2019 Probe Sensitivity at 1000 Hz. Calibration Date: 17-May-2020 was -60.41 dBV/A/m Report Number: 29973 -1 0.954 mV/A/m Control Number: 29973 -1 0.954 mV/A/m Control Number: 29973 Probe resistance 903 Ohms bove listed instrument meets or exceeds the tested manufacturer's specifications. alibration Is traceable through NIST test numbers: 683/290345-18 panded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2. represents Probes Frequency Response. 20 20 20 20 20 20 20 20 20 20

Page 1 of 2

FCC ID: ZNFL355DL	PCTEST. Total to be past of @ removed	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 73 of 83
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset	ət	
© 2020 PCTEST		•		REV 3.5.M

^{3/2/2020}

HCATEMC_TEM-1124_May-17-2019

West Caldwell Calibration Laboratories Inc. 1575 State Route 96, Victor NY 14564

Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Labs Model No.: Axial T Coil Probe

Serial No.: TEM-1124

Test	Function	Tolera	nce	Measured values				
				Before	Out	Remarks		
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.41				
			dB					
2.0	Probe Level Linearity		6	6.10				
		Ref. (0 dB)	0	0.00				
			-6	-6.00				
			-12	-12.00				
			Hz					
3.0	Probe Frequency Response		100	-19.9				
			126	-17.9				
			158	-16.0				
			200	-14.0				
			251	-12.0				
			316	-10.0				
			398	-8.0				
			501	-6.0				
			631	-3.9				
			794	-2.0				
		Ref. (0 dB)	1000	0.0				
			1259	2.0				
			1585	4.0				
			1995 2512	5.9 7.9				
			3162	9.9				
			3981	11.9				
			5012	13.9				
			6310	15.9				
			7943	18.0				
			10000	20.2				

Instruments used for c	alibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,1010733	26-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,1010733	26-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,1010733	26-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/290345-18	26-Jul-2019

Cal. Date: 17-May-2019

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

FCC ID: ZNFL355DL	PCTEST Poul to be petit of @ revenues	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 74 of 83
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset	ortable Handset	
© 2020 PCTEST		·		REV 3.5.M

3/2/2020

West (Caldwell Calibr	ation Laborato	ories Inc.	
TT OBL X				Ĩ
				110000
Cart	ficato	f Caliby	ation	
Ceru	ficate of			
	fe	ər		<u> </u>
		COIL PROBE	NG	
	Manufactured by: Model No:	TEM CONSULTI RADIAL T COIL		
	Serial No: Calibration Recall N	TEM-1130 o: 29973		
	Subm	itted By:		
		NDREW HARWELL		111
		CTEST ENGINEERING L 560-B DOBBIN ROAD	AB	
	C	OLUMBIA	MD 21045	
	it was calibrated to the indi			
	standards and Technology o es that the instrument met t			
submitter.			InA	
	ation Laboratories Procedu		c /alt 6/4/2019	
Upon receipt for Calil	bration, the instrument was	found to be:	6/ 7/ 2011	
Within	1 (X)			
	ated specification. See attac lied relates to the calibrated	-		
West Caldwell Calibr	ation Laboratories' calibrat 662A, ANSI/NCSL Z540-1,	ion control system meets t	-	
10014-1 INTE-01 <i>U</i> -40	~~~~, AUDHUNDLI 2040"1,	120 Julie 43, 130 7001:4	oxo anu 150 17043,	
			Λ	
Note: With this Certificate,	Report of Calibration is included	i. Approved	by:	
Calibration Date:	17-May-19		James Zhu	
Certificate No:	29973 -2	Qu: ISO/	ality Manager IEC 17025:2005	
QA Doc. #1051 Rev. 2.0 10/1/01	Certificate F			
	Calibration			
uncompromised calibration 1575 State Route 96, Victor,	Laboratories, Inc	a Valables	n Lab. Cert. # 1533.01	

FCC ID: ZNFL355DL	Road to be part of @ newser	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Dego 75 of 92	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 75 of 83	
© 2020 PCTEST				REV 3.5.M	

HCRTEMC_TEM-1130_May-17-2019



1575 State Route 96, Victor NY 14564



ISO/IEC 17025: 2005

Calibration Lab. Cert. # 1533.01

REPORT OF CALIBRATION for

the numb	e Sensitivity meas	ured wit	h Helmholt	z Coil				
the numb	Helmholt				Before & after	data same:	X	
	per of turns on eac	,	10	No.				
	s of each coil, in m		0.204	m		Environment:	00.7	
the current i	in the coils, in amp		0.08	A		Temperature:	20.7	°C
	Helmholtz Coil Cor		7.09	A/m/V		pient Humidity:	42.7	% RH
Heli	nholtz Coil magneti	c field;	5.94	A/m		ient Pressure:	98.256	kPa -
							17-May-201	
	Probe Sensiti	-	1000	Hz.			17-May-202	
		was	-60.37	dBV/A/m		eport Number:	2997	
	Desta - us - 's	tonc-	0.958 895	mV/A/m Ohms	C	ontrol Number:	2997	3
a above listed	Probe resis				er's specifications.			
	able through NIST tes			683/2903	-			
	y of calibration: 0.30dB							
	s Frequency Respon							
				Radial Probe	Response			٦
20					····	Measur	ed Probe Resp.	
20								
15								
10								
5							+ + +	
0								
5 5								
-10		*						
-15								
	*							
-20		I						
100			Fre	iq. (Hz) 10	00			1000

FCC ID: ZNFL355DL	Road to be past of @ interest	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 76 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 76 of 83
© 2020 PCTEST	•			REV 3.5.M

V 3.5.M 3/2/2020

HCRTEMC_TEM-1130_May-17-2019

West Caldwell Calibration Laboratories Inc. 1575 State Route 96, Victor NY 14564

Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record for

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Labs

Model No.: Radial T Coil Probe

Serial No.: TEM-1130

est	Function	Tolerance		Measured values		
				Before	Out	Remarks
.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37		
			dB			
.0	Probe Level Linearity		6	6.00		
		Ref. (0 dB)	0	0.00		
			-6	-6.10		
			-12	-12.10		
			Hz			
.0	Probe Frequency Response		100	-20.0		
			126	-17.9		
			158	-16.0		
			200	-14.0		
			251	-12.0		
			316	-10.0		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
		Ref. (0 dB)	1000	0.0		
			1259	1.9		
			1585	3.9		
			1995	5.9		
			2512	7.9		
			3162	9.9		
			3981	11.9		
			5012	13.9		
			6310	15.9		
			7943	18.0		
			10000	20.1		
strument	s used for calibration:		Date of Cal.		Traceability No.	Due Da
HP	34401A	S/N US360641	25-Jul-2018		,1010733	26-Jul-20
HP	34401A	S/N US361024	25-Jul-2018		,1010733	26-Jul-201
HP	33120A	S/N US360437	25-Jul-2018		,1010733	26-Jul-201
B&P	2133	S/N 1583254	25-Jul-2018		683/290345-18	26-Jul-20
	Cal. Date: 17-May-2019				y: James Zhu	

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Page 2 of 2

FCC ID: ZNFL355DL	PCTEST Prod to be part of @ nervers	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 77 of 83	
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset			
© 2020 PCTEST				REV 3.5.M	

^{3/2/2020}

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

14. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFL355DL	Total to be past of @ reference	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 79 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 78 of 83
© 2020 PCTEST				REV 3.5.M

3/2/2020

15. REFERENCES

- 1. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

FCC ID: ZNFL355DL	Road to be part of @ nerver	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 79 of 83
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset	able Handset	
© 2020 PCTEST				REV 3.5.M

^{© 2020} PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

- Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFL355DL	PCTEST. Total to be past of @ retrease	HAC (T-COIL) TEST REPORT	🕒 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 90 of 92
1M2004220073-11-R1.ZNF	4/27/2020 - 5/14/2020	Portable Handset		Page 80 of 83
© 2020 PCTEST				REV 3.5.M