

1. Effective (Isotropic) Radiated Power Output Data

1.1 GSM850_ERP

1.1.1 Test Result

Band: GSM850								
ENV	Mode		Frequency (MHz)	Conducted Power (dBm)	Gain (dBi)	ERP (dBm)		Verdict
	Network	Subset				Result	Limit	
NTNV	GSM	GSM	824.2	31.71	-2.33	27.23	<=38.45	Pass
			836.6	31.69	-2.33	27.21	<=38.45	Pass
			848.8	31.52	-2.33	27.04	<=38.45	Pass
	GPRS	1 TX Slot	824.2	31.79	-2.33	27.31	<=38.45	Pass
		2 TX Slots	824.2	30.71	-2.33	26.23	<=38.45	Pass
		3 TX Slots	824.2	27.99	-2.33	23.51	<=38.45	Pass
		4 TX Slots	824.2	26.82	-2.33	22.34	<=38.45	Pass
		1 TX Slot	836.6	31.68	-2.33	27.20	<=38.45	Pass
		2 TX Slots	836.6	30.83	-2.33	26.35	<=38.45	Pass
		3 TX Slots	836.6	28.25	-2.33	23.77	<=38.45	Pass
		4 TX Slots	836.6	27.08	-2.33	22.60	<=38.45	Pass
		1 TX Slot	848.8	31.53	-2.33	27.05	<=38.45	Pass
		2 TX Slots	848.8	30.89	-2.33	26.41	<=38.45	Pass
		3 TX Slots	848.8	28.51	-2.33	24.03	<=38.45	Pass
		4 TX Slots	848.8	27.34	-2.33	22.86	<=38.45	Pass
	EGPRS	1 TX Slot	824.2	30.80	-2.33	26.32	<=38.45	Pass
		2 TX Slots	824.2	30.68	-2.33	26.20	<=38.45	Pass
		3 TX Slots	824.2	30.86	-2.33	26.38	<=38.45	Pass
		4 TX Slots	824.2	30.67	-2.33	26.19	<=38.45	Pass
		1 TX Slot	836.6	26.32	-2.33	21.84	<=38.45	Pass
		2 TX Slots	836.6	26.63	-2.33	22.15	<=38.45	Pass
		3 TX Slots	836.6	24.53	-2.33	20.05	<=38.45	Pass
		4 TX Slots	836.6	26.50	-2.33	22.02	<=38.45	Pass
		1 TX Slot	848.8	26.15	-2.33	21.67	<=38.45	Pass
		2 TX Slots	848.8	25.29	-2.33	20.81	<=38.45	Pass
		3 TX Slots	848.8	24.73	-2.33	20.25	<=38.45	Pass
		4 TX Slots	848.8	26.41	-2.33	21.93	<=38.45	Pass

Note1: ERP=Conducted Power+Antenna Gain-2.15

2. Frequency Stability

2.1 GSM850

2.1.1 Test Result

Band: GSM850							
Network	Frequency (MHz)	Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
					Result	Limit	
GSM	824.2	20	3.27	3.519	0.0043	-2.5 to 2.5	Pass
			3.85	1.711	0.0021	-2.5 to 2.5	Pass
			4.43	6.102	0.0074	-2.5 to 2.5	Pass

		-30	3.85	6.909	0.0084	-2.5 to 2.5	Pass
		-20	3.85	6.489	0.0079	-2.5 to 2.5	Pass
		-10	3.85	6.393	0.0078	-2.5 to 2.5	Pass
		0	3.85	5.327	0.0065	-2.5 to 2.5	Pass
		10	3.85	9.137	0.0111	-2.5 to 2.5	Pass
		30	3.85	6.780	0.0082	-2.5 to 2.5	Pass
		40	3.85	4.423	0.0054	-2.5 to 2.5	Pass
		50	3.85	6.909	0.0084	-2.5 to 2.5	Pass
	836.6	20	3.27	11.558	0.0138	-2.5 to 2.5	Pass
			3.85	7.393	0.0088	-2.5 to 2.5	Pass
			4.43	5.682	0.0068	-2.5 to 2.5	Pass
		-30	3.85	7.652	0.0091	-2.5 to 2.5	Pass
		-20	3.85	10.461	0.0125	-2.5 to 2.5	Pass
		-10	3.85	10.525	0.0126	-2.5 to 2.5	Pass
		0	3.85	10.493	0.0125	-2.5 to 2.5	Pass
		10	3.85	8.717	0.0104	-2.5 to 2.5	Pass
		30	3.85	8.039	0.0096	-2.5 to 2.5	Pass
		40	3.85	9.912	0.0118	-2.5 to 2.5	Pass
		50	3.85	8.104	0.0097	-2.5 to 2.5	Pass
		848.8	20	3.27	7.167	0.0084	-2.5 to 2.5
	3.85			9.879	0.0116	-2.5 to 2.5	Pass
	4.43			11.687	0.0138	-2.5 to 2.5	Pass
	-30		3.85	6.037	0.0071	-2.5 to 2.5	Pass
	-20		3.85	6.586	0.0078	-2.5 to 2.5	Pass
	-10		3.85	9.653	0.0114	-2.5 to 2.5	Pass
	0		3.85	9.105	0.0107	-2.5 to 2.5	Pass
	10		3.85	11.558	0.0136	-2.5 to 2.5	Pass
	30		3.85	8.233	0.0097	-2.5 to 2.5	Pass
	40		3.85	8.846	0.0104	-2.5 to 2.5	Pass
	50		3.85	11.268	0.0133	-2.5 to 2.5	Pass
GPRS	824.2		20	3.27	5.133	0.0062	-2.5 to 2.5
		3.85		5.069	0.0062	-2.5 to 2.5	Pass
		4.43		9.944	0.0121	-2.5 to 2.5	Pass
		-30	3.85	6.586	0.0080	-2.5 to 2.5	Pass
		-20	3.85	7.813	0.0095	-2.5 to 2.5	Pass
		-10	3.85	10.783	0.0131	-2.5 to 2.5	Pass
		0	3.85	6.167	0.0075	-2.5 to 2.5	Pass
		10	3.85	3.777	0.0046	-2.5 to 2.5	Pass
		30	3.85	7.038	0.0085	-2.5 to 2.5	Pass
		40	3.85	5.876	0.0071	-2.5 to 2.5	Pass
		50	3.85	7.684	0.0093	-2.5 to 2.5	Pass
		836.6	20	3.27	6.941	0.0083	-2.5 to 2.5
	3.85			5.004	0.0060	-2.5 to 2.5	Pass
	4.43			6.231	0.0074	-2.5 to 2.5	Pass
	-30		3.85	6.134	0.0073	-2.5 to 2.5	Pass
	-20		3.85	3.874	0.0046	-2.5 to 2.5	Pass
	-10		3.85	7.523	0.0090	-2.5 to 2.5	Pass
	0		3.85	3.713	0.0044	-2.5 to 2.5	Pass
	10		3.85	8.168	0.0098	-2.5 to 2.5	Pass
	30		3.85	10.202	0.0122	-2.5 to 2.5	Pass
	40		3.85	12.269	0.0147	-2.5 to 2.5	Pass
	50		3.85	13.657	0.0163	-2.5 to 2.5	Pass
	848.8		20	3.27	6.941	0.0082	-2.5 to 2.5
		3.85		8.265	0.0097	-2.5 to 2.5	Pass
		4.43		6.360	0.0075	-2.5 to 2.5	Pass

		-30	3.85	7.361	0.0087	-2.5 to 2.5	Pass
		-20	3.85	4.423	0.0052	-2.5 to 2.5	Pass
		-10	3.85	7.361	0.0087	-2.5 to 2.5	Pass
		0	3.85	6.199	0.0073	-2.5 to 2.5	Pass
		10	3.85	6.780	0.0080	-2.5 to 2.5	Pass
		30	3.85	6.554	0.0077	-2.5 to 2.5	Pass
		40	3.85	7.103	0.0084	-2.5 to 2.5	Pass
		50	3.85	11.817	0.0139	-2.5 to 2.5	Pass
EGPRS	824.2	20	3.27	4.036	0.0049	-2.5 to 2.5	Pass
			3.85	8.459	0.0103	-2.5 to 2.5	Pass
			4.43	8.814	0.0107	-2.5 to 2.5	Pass
		-30	3.85	5.198	0.0063	-2.5 to 2.5	Pass
		-20	3.85	5.650	0.0069	-2.5 to 2.5	Pass
		-10	3.85	4.649	0.0056	-2.5 to 2.5	Pass
		0	3.85	1.905	0.0023	-2.5 to 2.5	Pass
		10	3.85	6.328	0.0077	-2.5 to 2.5	Pass
		30	3.85	4.972	0.0060	-2.5 to 2.5	Pass
		40	3.85	6.134	0.0074	-2.5 to 2.5	Pass
		50	3.85	4.714	0.0057	-2.5 to 2.5	Pass
	836.6	20	3.27	4.552	0.0054	-2.5 to 2.5	Pass
			3.85	7.103	0.0085	-2.5 to 2.5	Pass
			4.43	5.521	0.0066	-2.5 to 2.5	Pass
		-30	3.85	3.777	0.0045	-2.5 to 2.5	Pass
		-20	3.85	5.198	0.0062	-2.5 to 2.5	Pass
		-10	3.85	4.617	0.0055	-2.5 to 2.5	Pass
		0	3.85	4.359	0.0052	-2.5 to 2.5	Pass
		10	3.85	6.877	0.0082	-2.5 to 2.5	Pass
		30	3.85	6.328	0.0076	-2.5 to 2.5	Pass
		40	3.85	6.328	0.0076	-2.5 to 2.5	Pass
		50	3.85	6.812	0.0081	-2.5 to 2.5	Pass
	848.8	20	3.27	7.975	0.0094	-2.5 to 2.5	Pass
			3.85	6.586	0.0078	-2.5 to 2.5	Pass
			4.43	8.588	0.0101	-2.5 to 2.5	Pass
		-30	3.85	7.490	0.0088	-2.5 to 2.5	Pass
		-20	3.85	2.938	0.0035	-2.5 to 2.5	Pass
		-10	3.85	3.164	0.0037	-2.5 to 2.5	Pass
		0	3.85	3.842	0.0045	-2.5 to 2.5	Pass
		10	3.85	7.167	0.0084	-2.5 to 2.5	Pass
		30	3.85	1.905	0.0022	-2.5 to 2.5	Pass
		40	3.85	1.905	0.0022	-2.5 to 2.5	Pass
		50	3.85	-0.710	-0.0008	-2.5 to 2.5	Pass

3. Modulation Characteristics


3.1 GSM850

3.1.1 Test Result


Band: GSM850						
ENV	Mode		Frequency (MHz)	Modulation Characteristics		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	836.6	Refer To Test Graph		Pass

	GPRS	1 TX Slot	836.6	Refer To Test Graph	Pass
	EGPRS	1 TX Slot	836.6	Refer To Test Graph	Pass

3.1.2 Test Graph

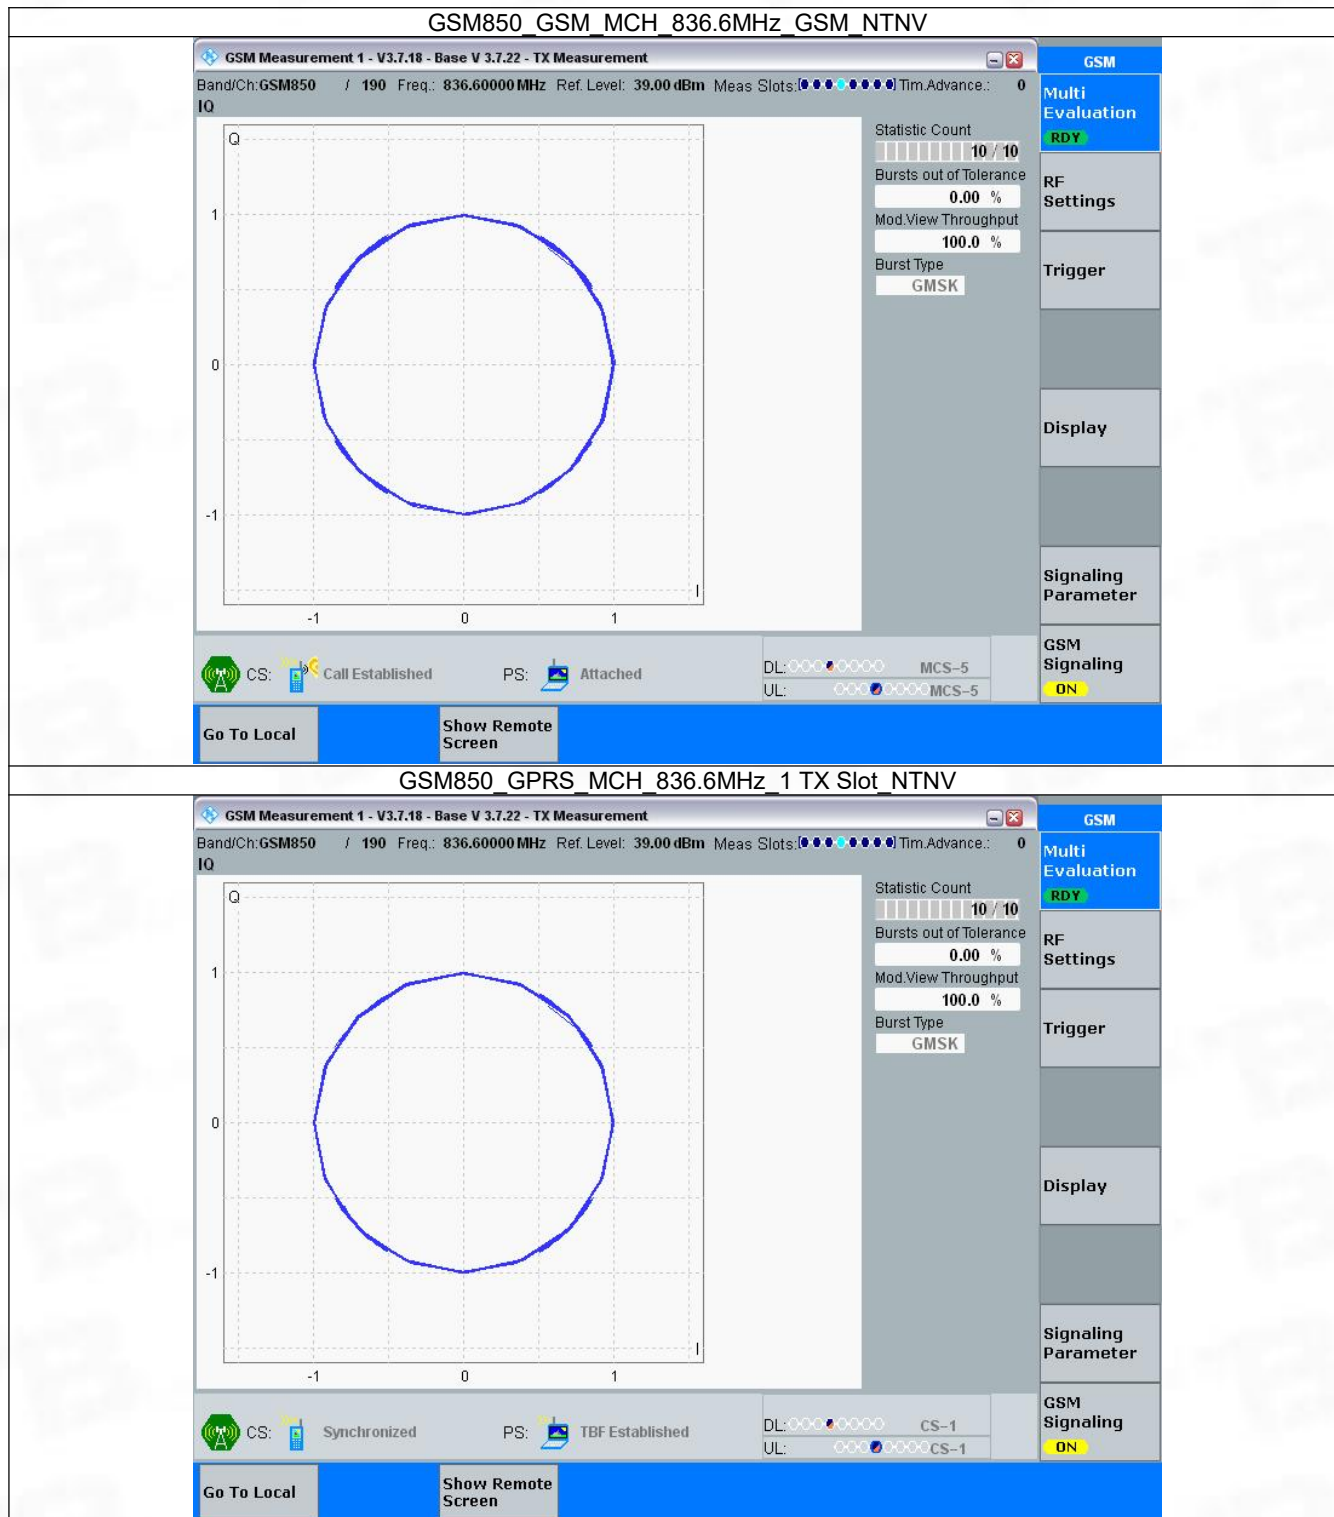

GSM850_EGPRS_MCH_836.6MHz_1_TX_Slot_NTNV

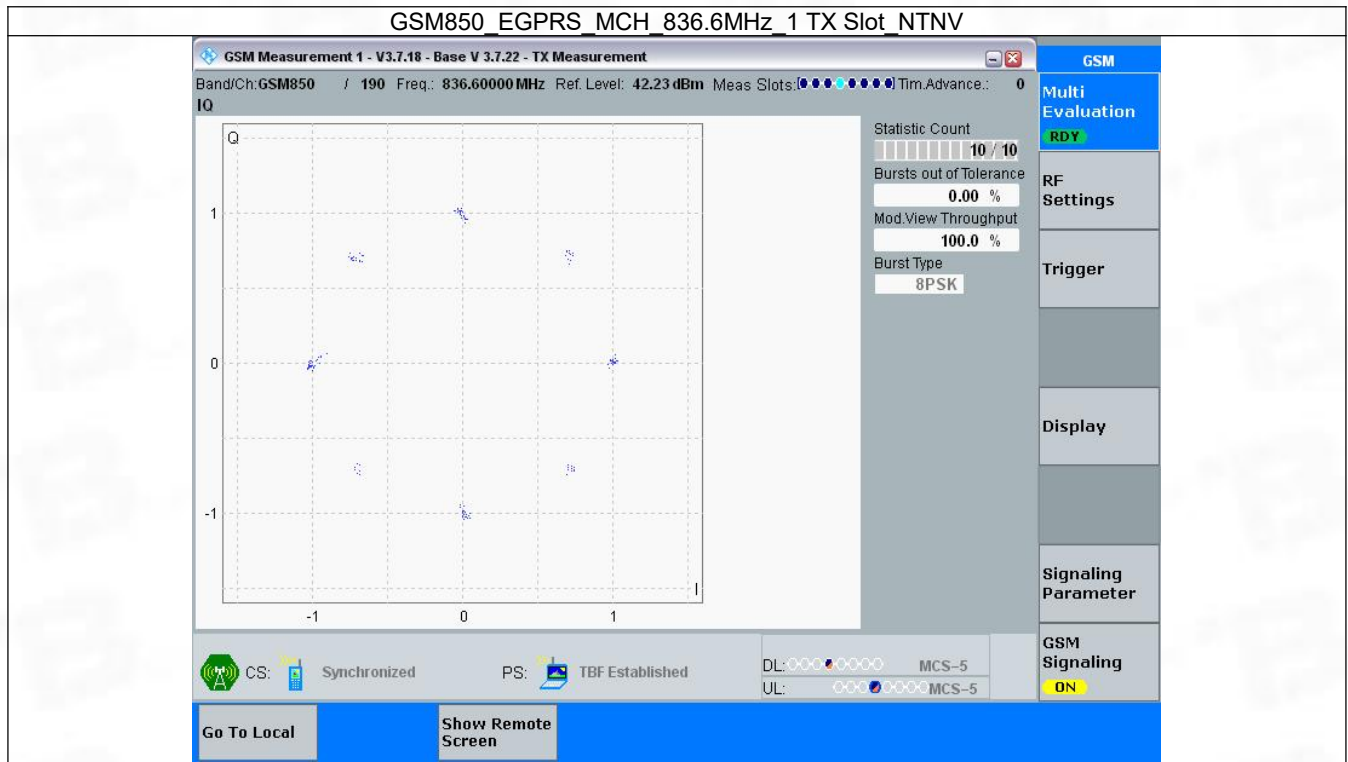


4. 99% & 26dB Bandwidth

4.1 GSM850_OBW


4.1.1 Test Result

Band: GSM850					
ENV	Mode		Frequency (MHz)	99% Occupied Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	GSM	824.2	0.241	Pass
			836.6	0.249	Pass
			848.8	0.247	Pass
	GPRS	1 TX Slot	824.2	0.243	Pass
			836.6	0.243	Pass
			848.8	0.246	Pass
	EGPRS	1 TX Slot	824.2	0.513	Pass
			836.6	0.495	Pass
			848.8	0.533	Pass


4.1.2 Test Graph

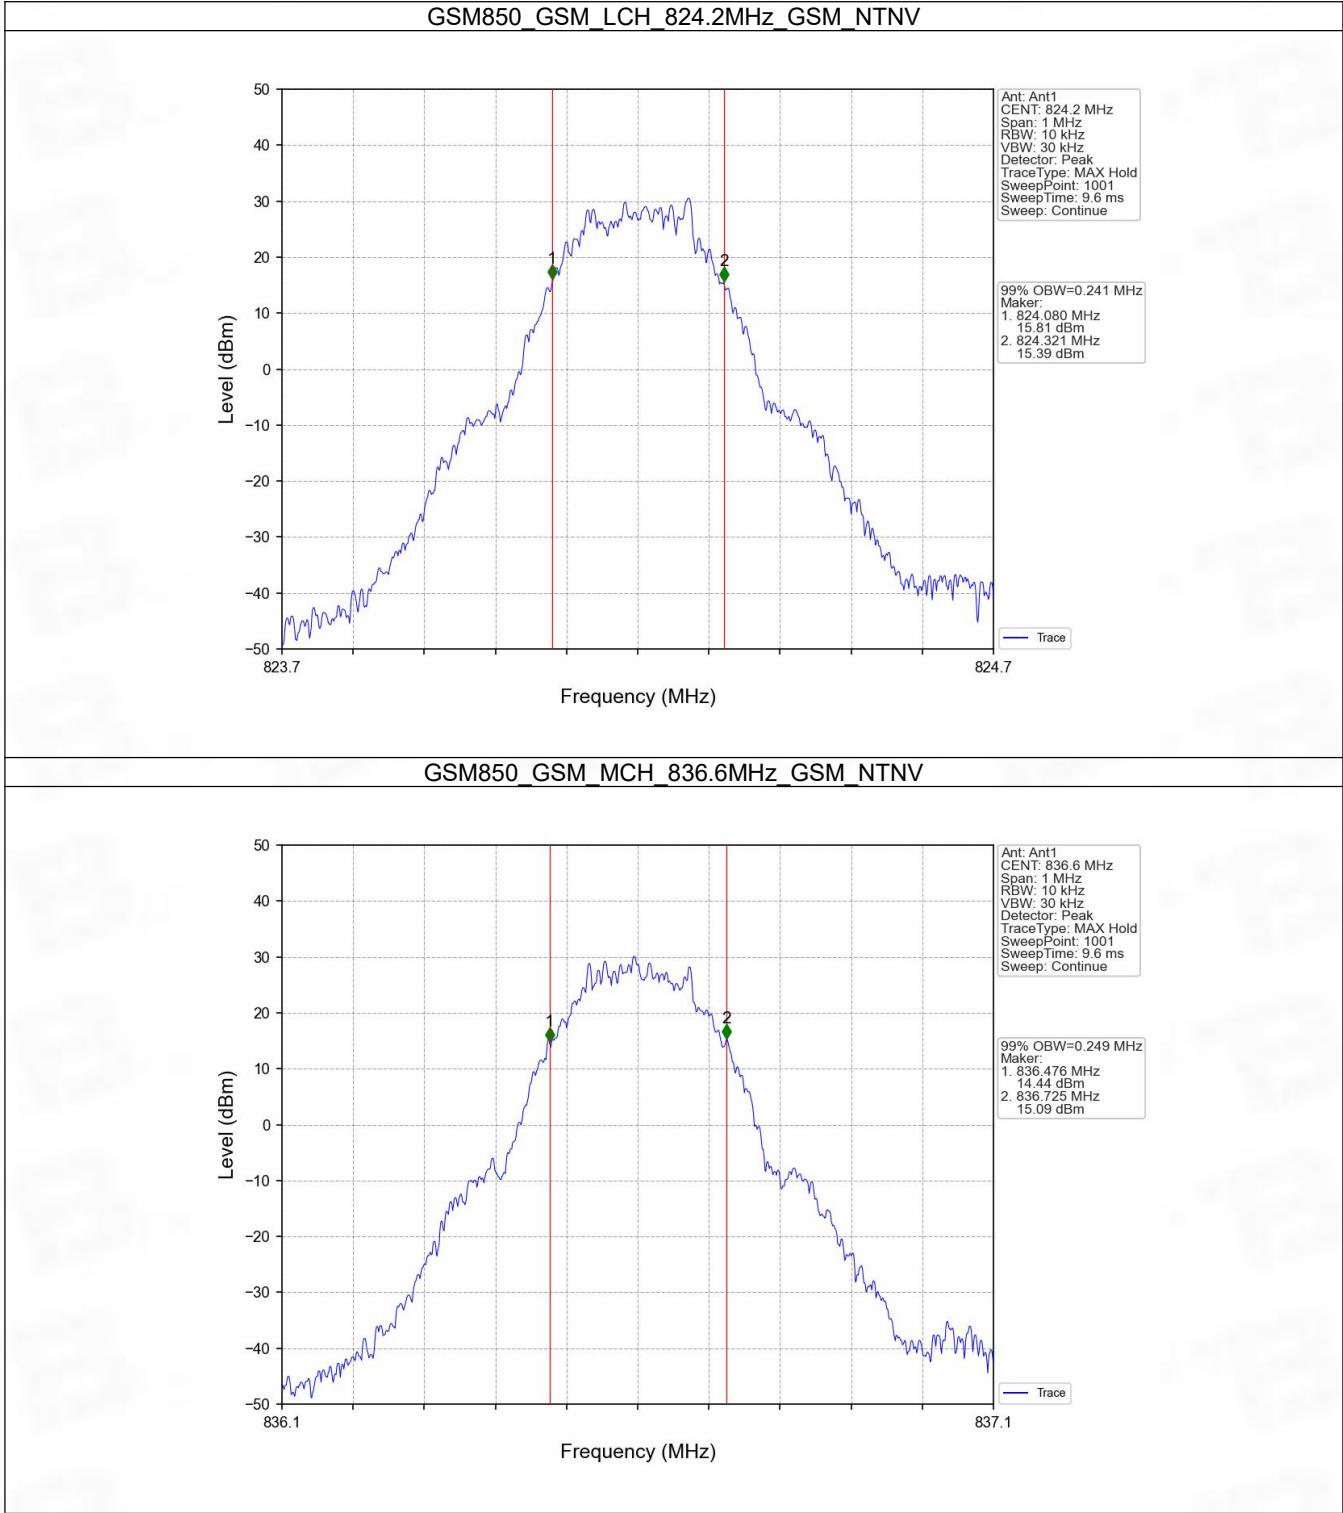


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

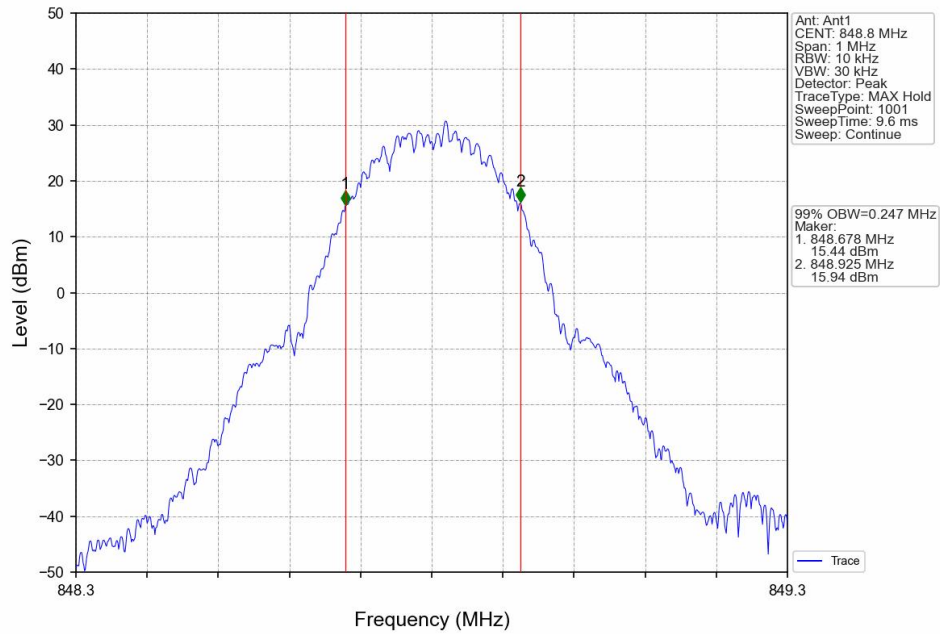


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

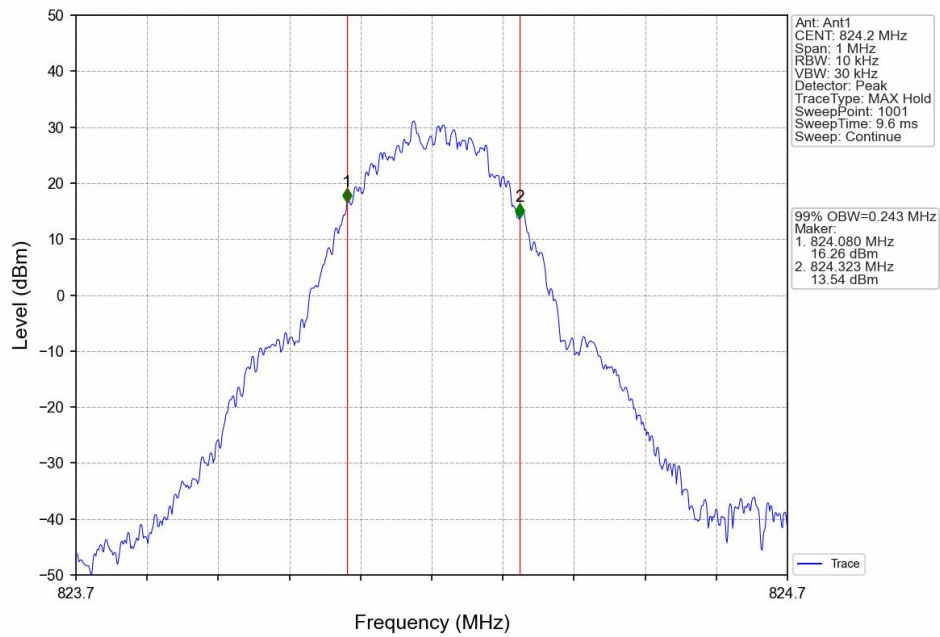


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

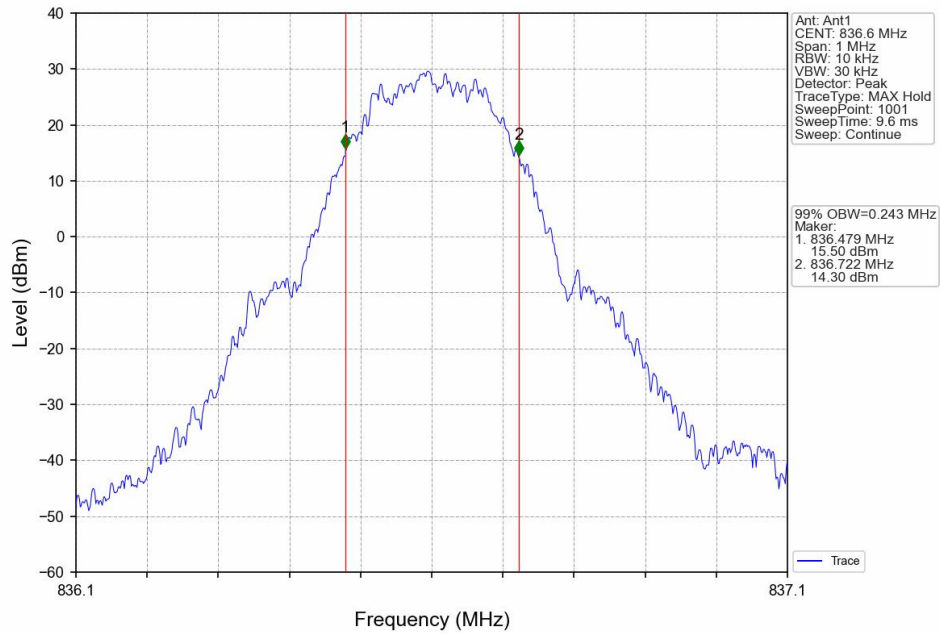


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

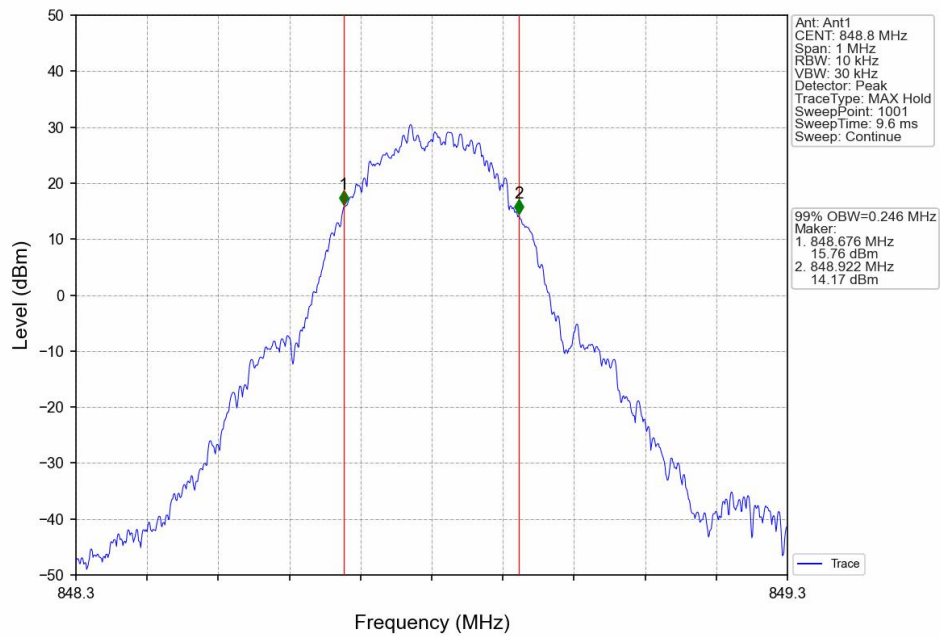


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

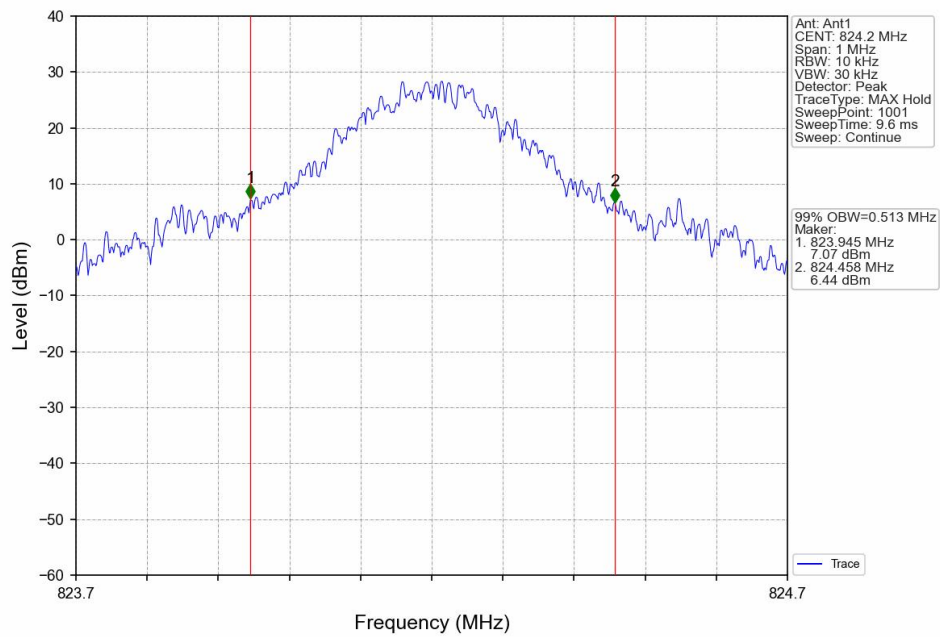

GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

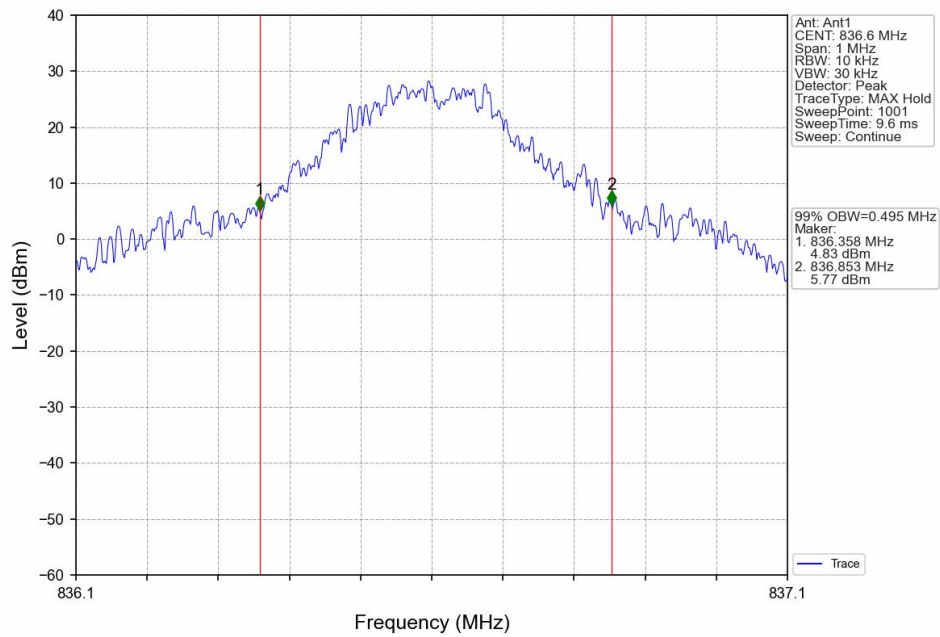

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

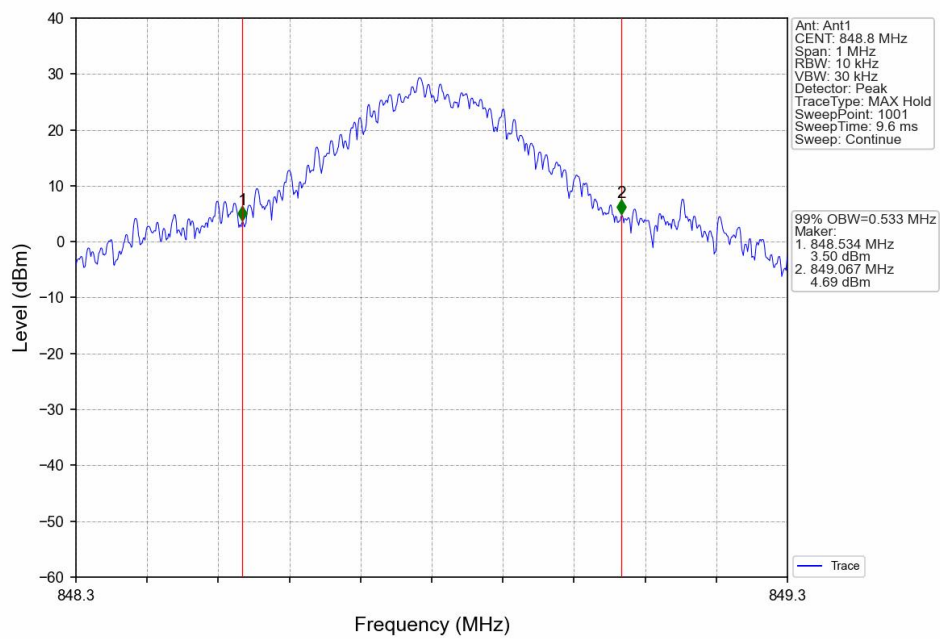


4.2 GSM850_XDB


4.2.1 Test Result

Band: GSM850					
ENV	Mode		Frequency (MHz)	26dB Bandwidth (MHz)	Verdict
	Network	Subset		Result	
NTNV	GSM	GSM	824.2	0.317	Pass
			836.6	0.315	Pass
			848.8	0.309	Pass
	GPRS	1 TX Slot	824.2	0.312	Pass
			836.6	0.313	Pass
			848.8	0.311	Pass
	EGPRS	1 TX Slot	824.2	0.816	Pass
			836.6	0.855	Pass
			848.8	0.826	Pass


4.2.2 Test Graph

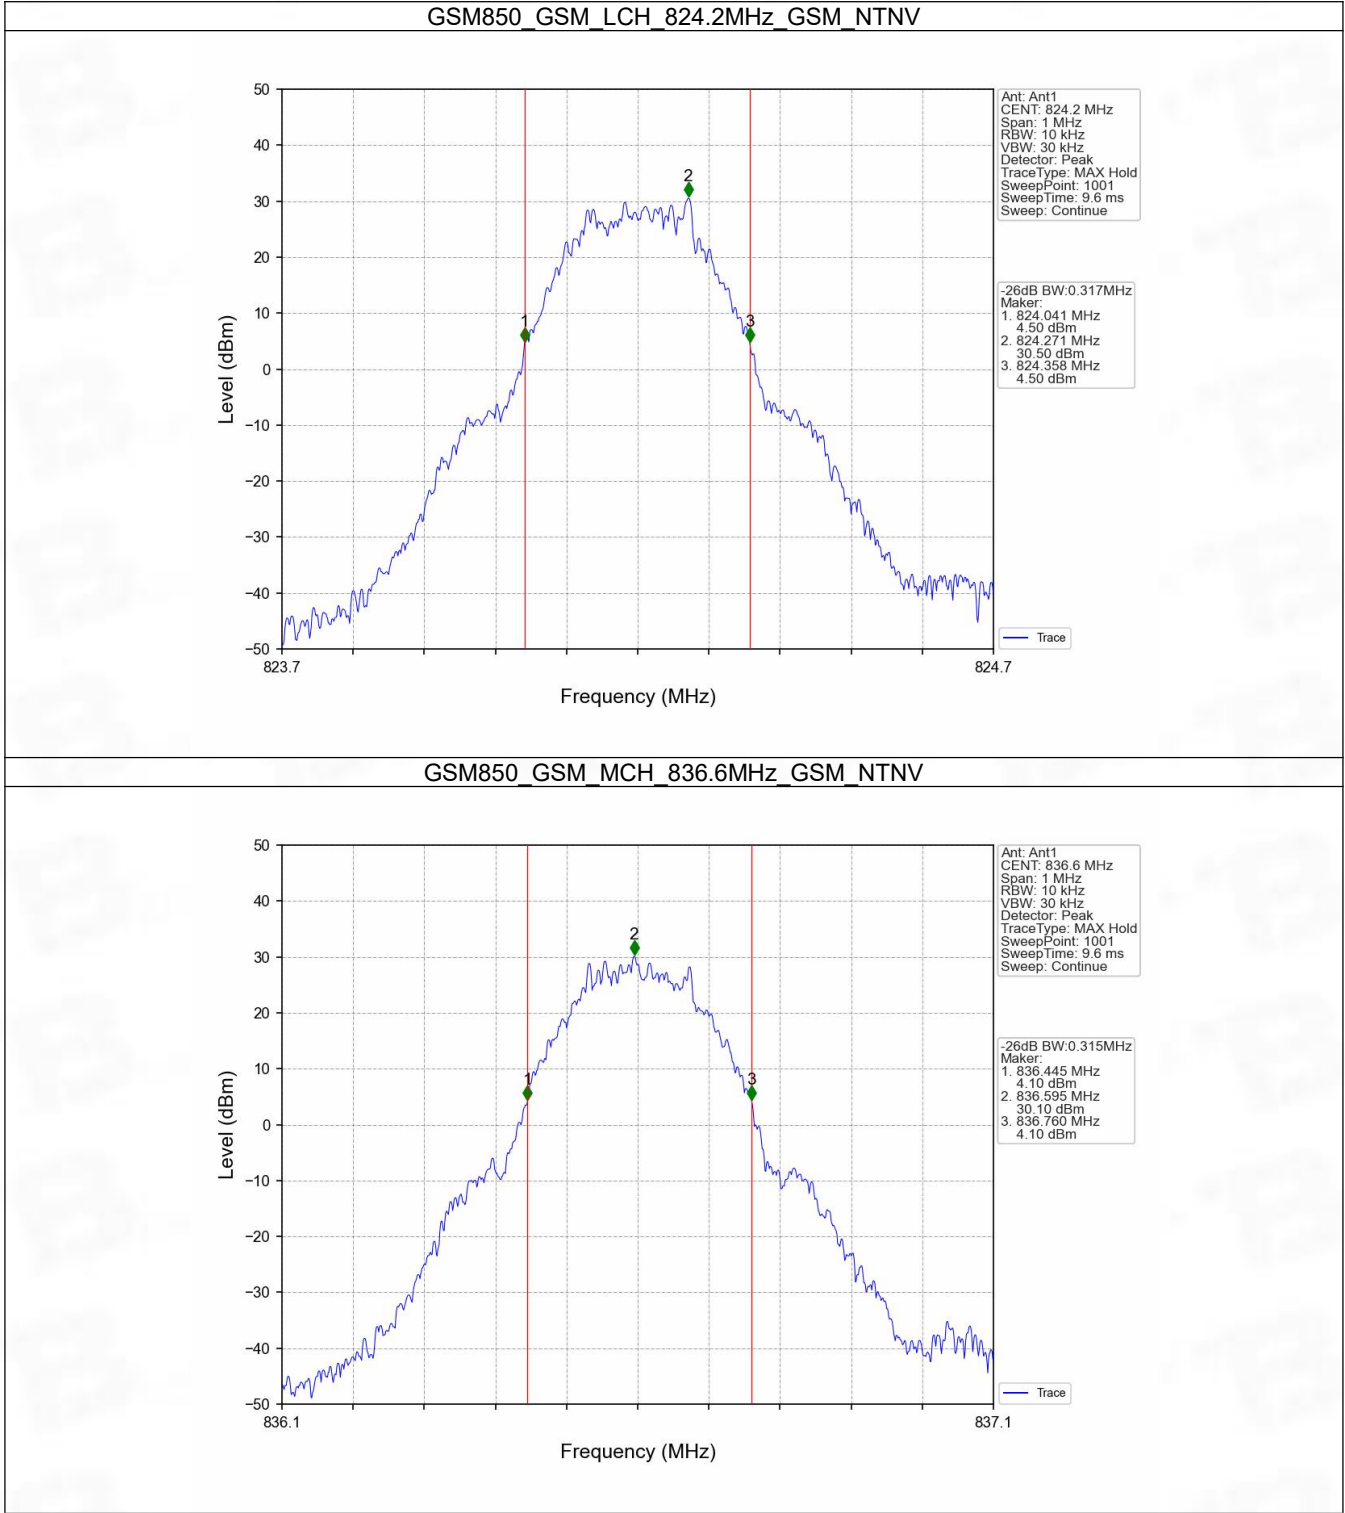


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

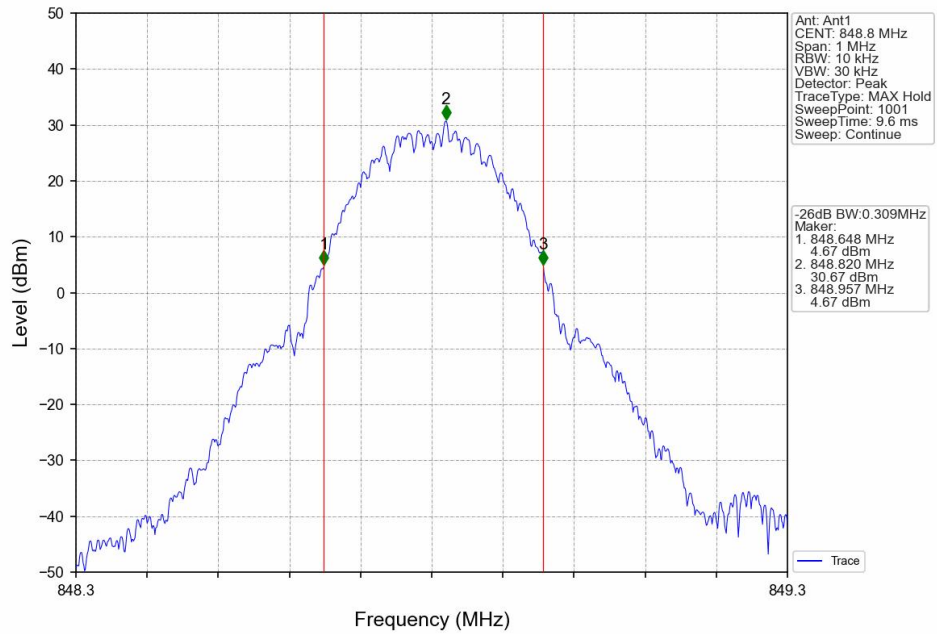


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

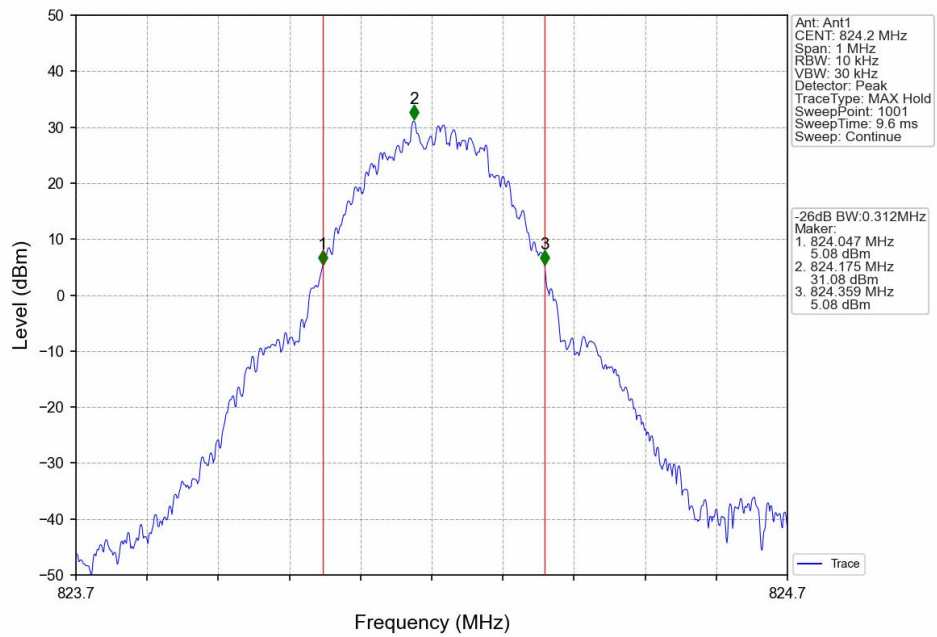


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

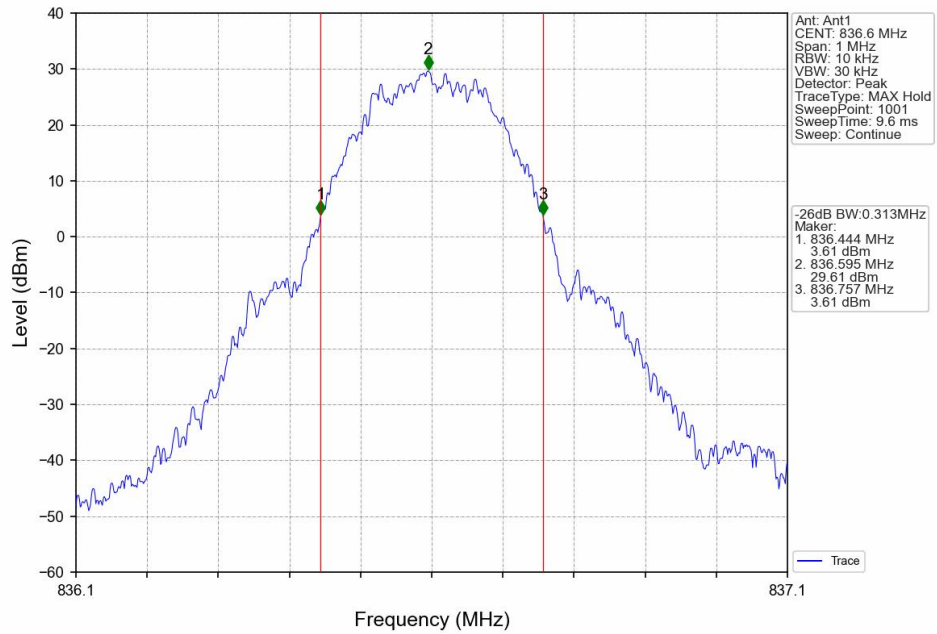


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

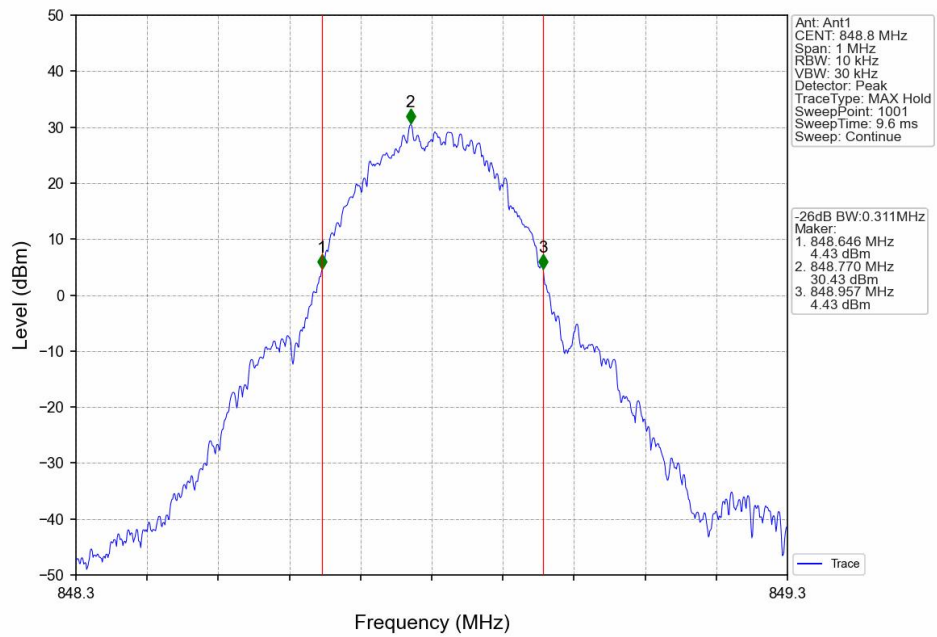


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

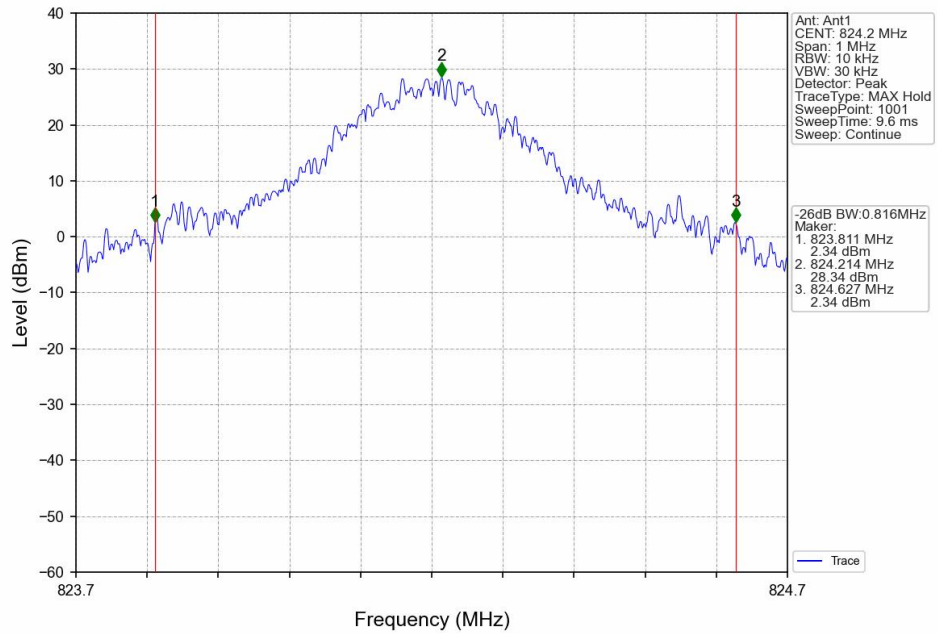

GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

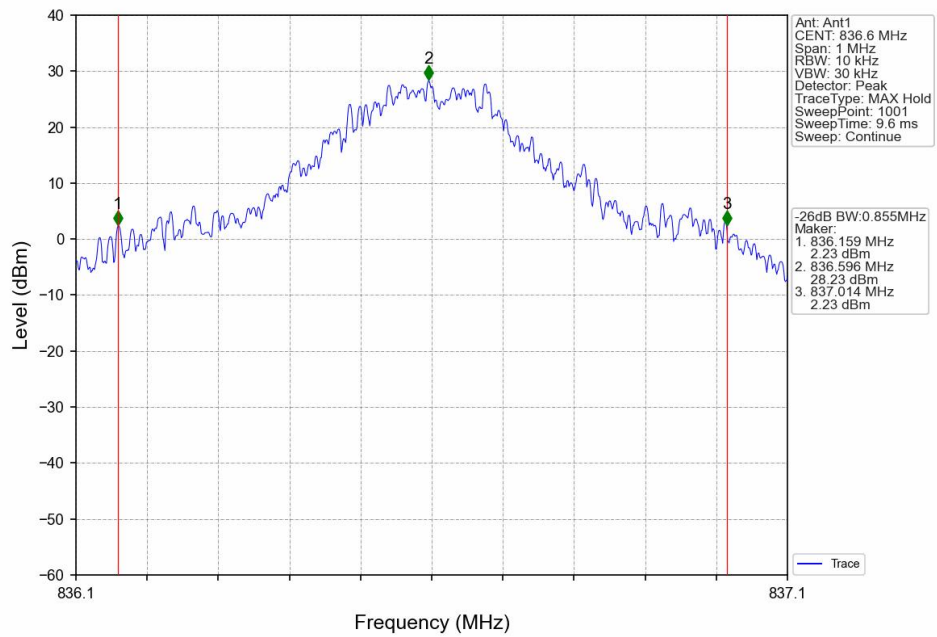

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

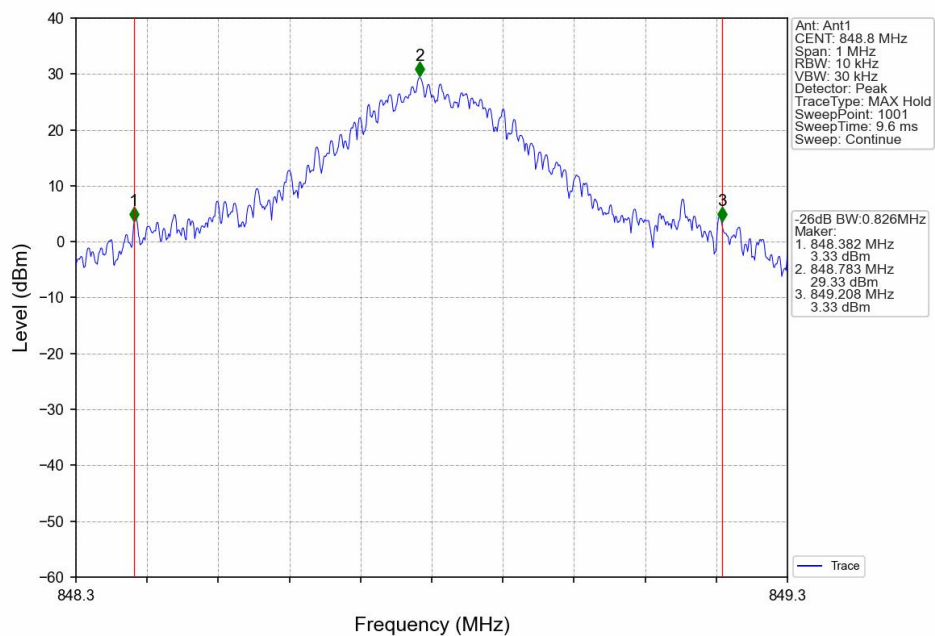


5. Peak-Average Ratio

5.1 GSM850


5.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Peak-Average Ratio (dB)		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	9.04	<=13	Pass
			836.6	9.09	<=13	Pass
			848.8	9.68	<=13	Pass
	GPRS	4 TX Slots	824.2	3.67	<=13	Pass
			836.6	3.69	<=13	Pass
			848.8	3.57	<=13	Pass
	EGPRS	4 TX Slots	824.2	10.05	<=13	Pass
			836.6	10.25	<=13	Pass
			848.8	10.39	<=13	Pass


5.1.2 Test Graph

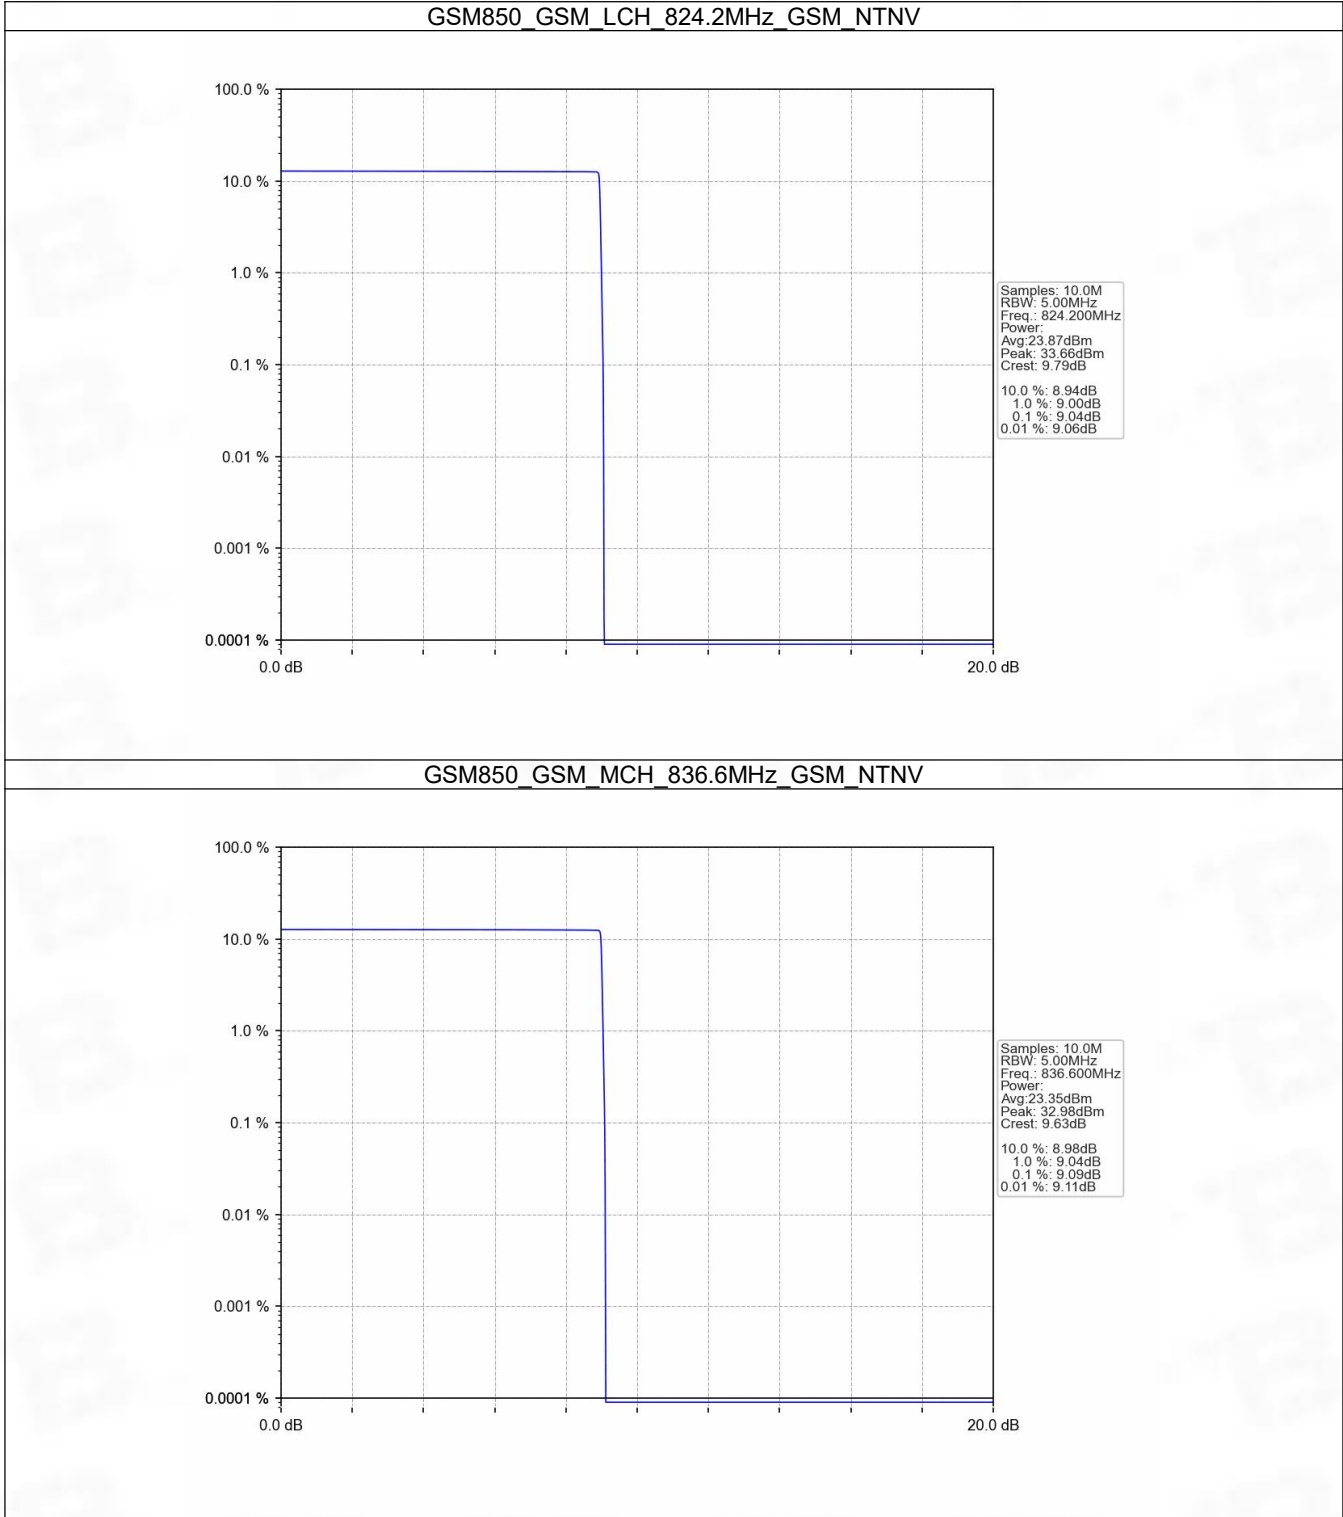


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

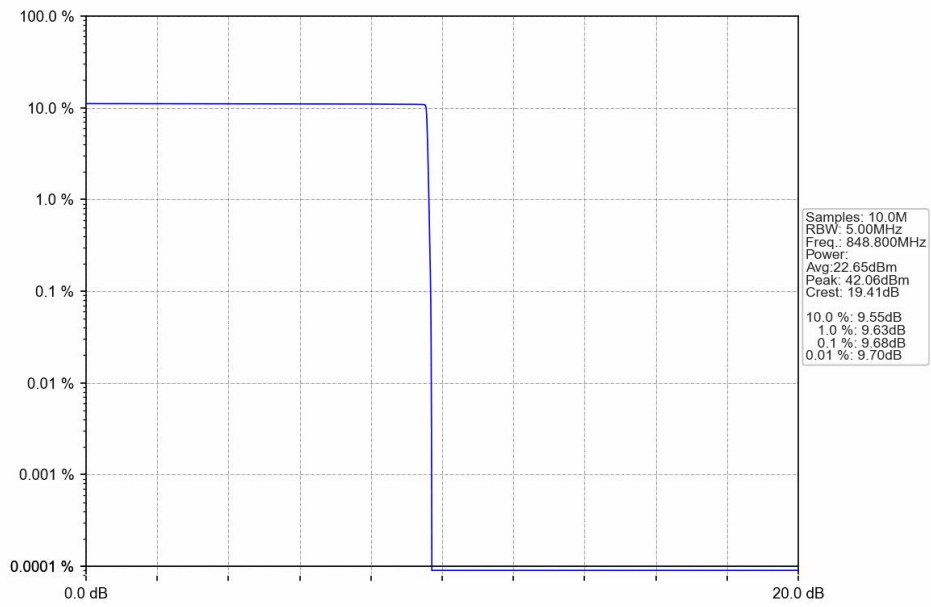


GSM850_GPRS_LCH_824.2MHz_4 TX Slots_NTNV

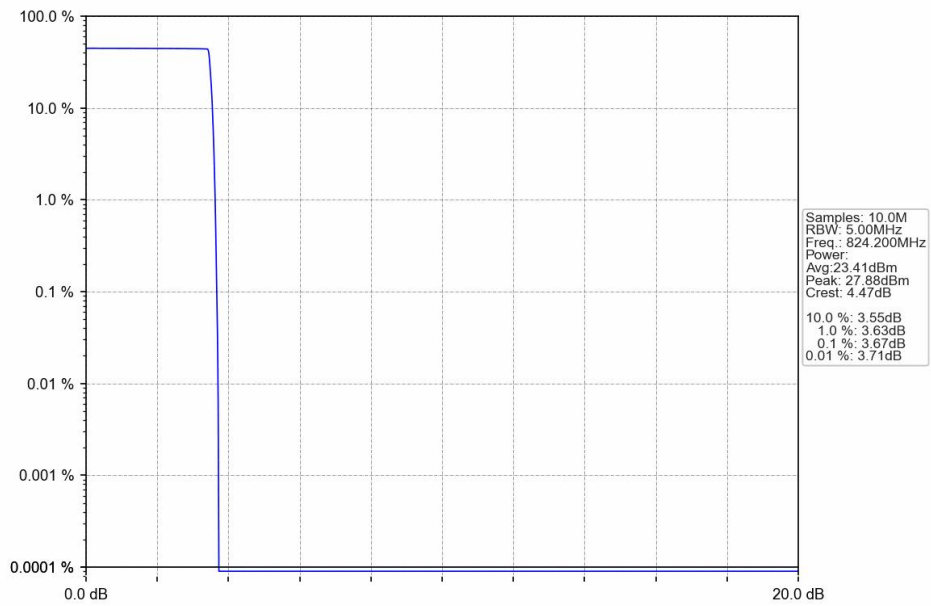


GSM850_GPRS_MCH_836.6MHz_4 TX Slots_NTNV

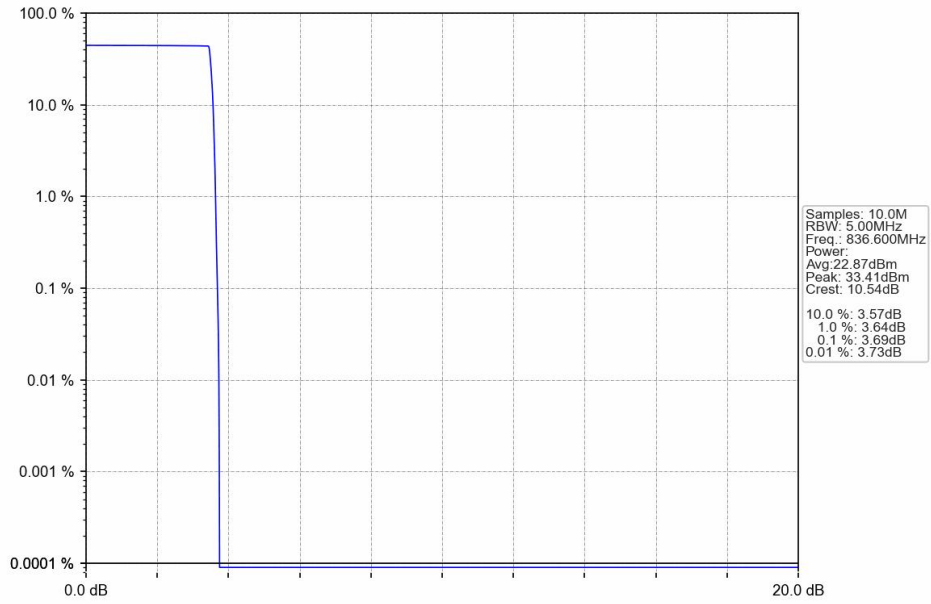


GSM850_GPRS_HCH_848.8MHz_4 TX Slots_NTNV

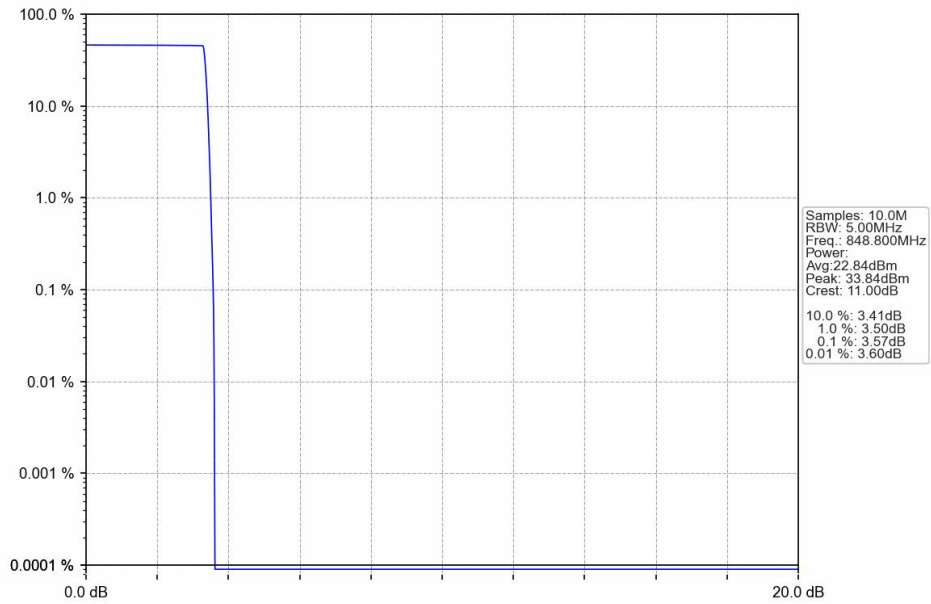


GSM850_EGPRS_LCH_824.2MHz_4 TX Slots_NTNV

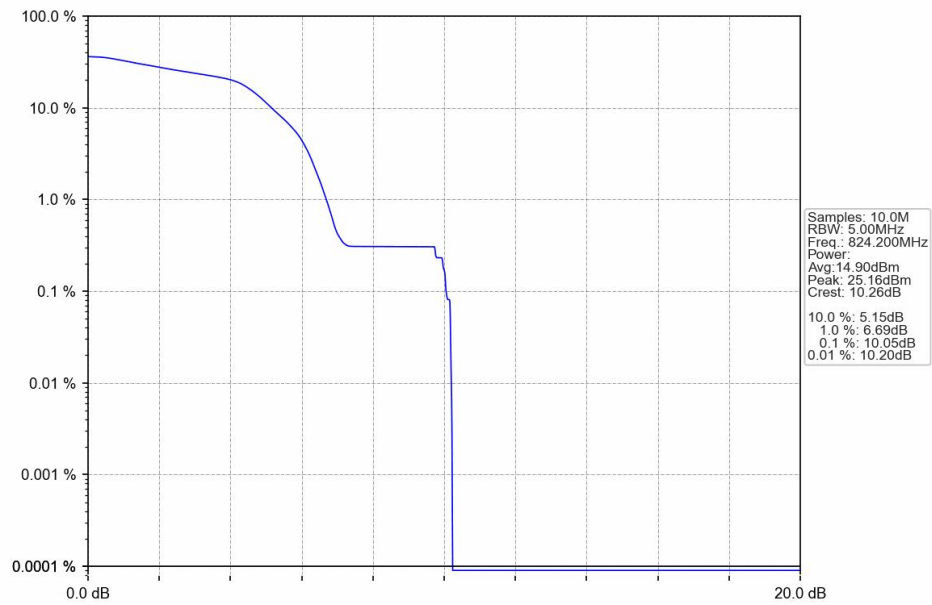

GSM850_EGPRS_MCH_836.6MHz_4 TX Slots_NTNV

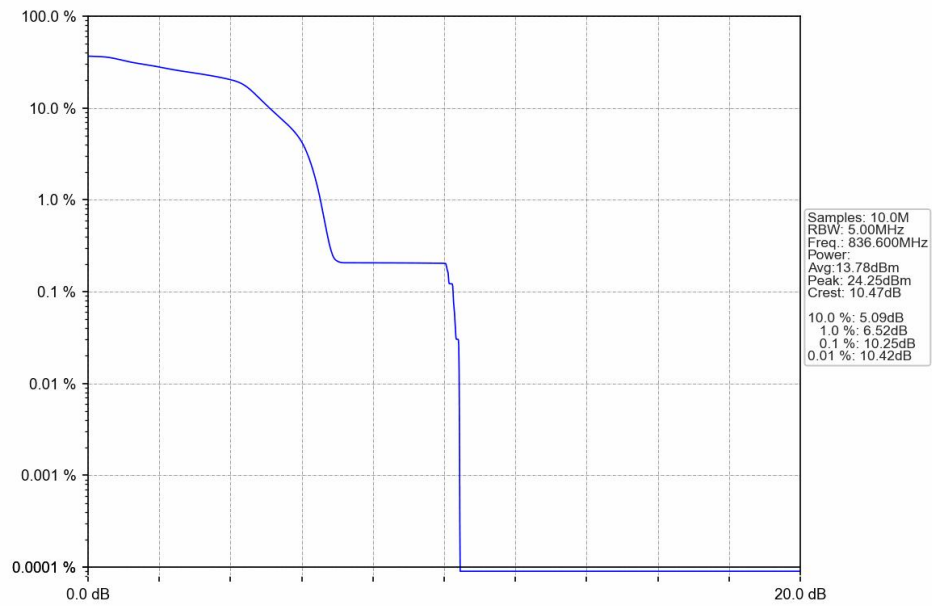

GSM850_EGPRS_HCH_848.8MHz_4 TX Slots_NTNV

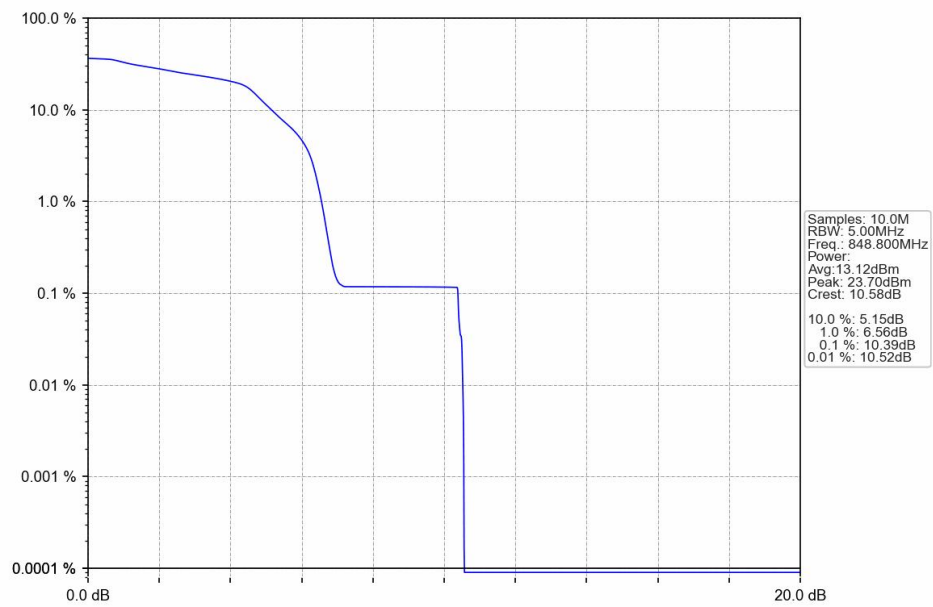


6. Spurious Emission

6.1 GSM850


6.1.1 Test Result

Band: GSM850						
ENV	Mode		Frequency (MHz)	Spurious Emission		Verdict
	Network	Subset		Result	Limit	
NTNV	GSM	GSM	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	GPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass
	EGPRS	1 TX Slot	824.2	Refer To Test Graph		Pass
			836.6	Refer To Test Graph		Pass
			848.8	Refer To Test Graph		Pass


6.1.2 Test Graph

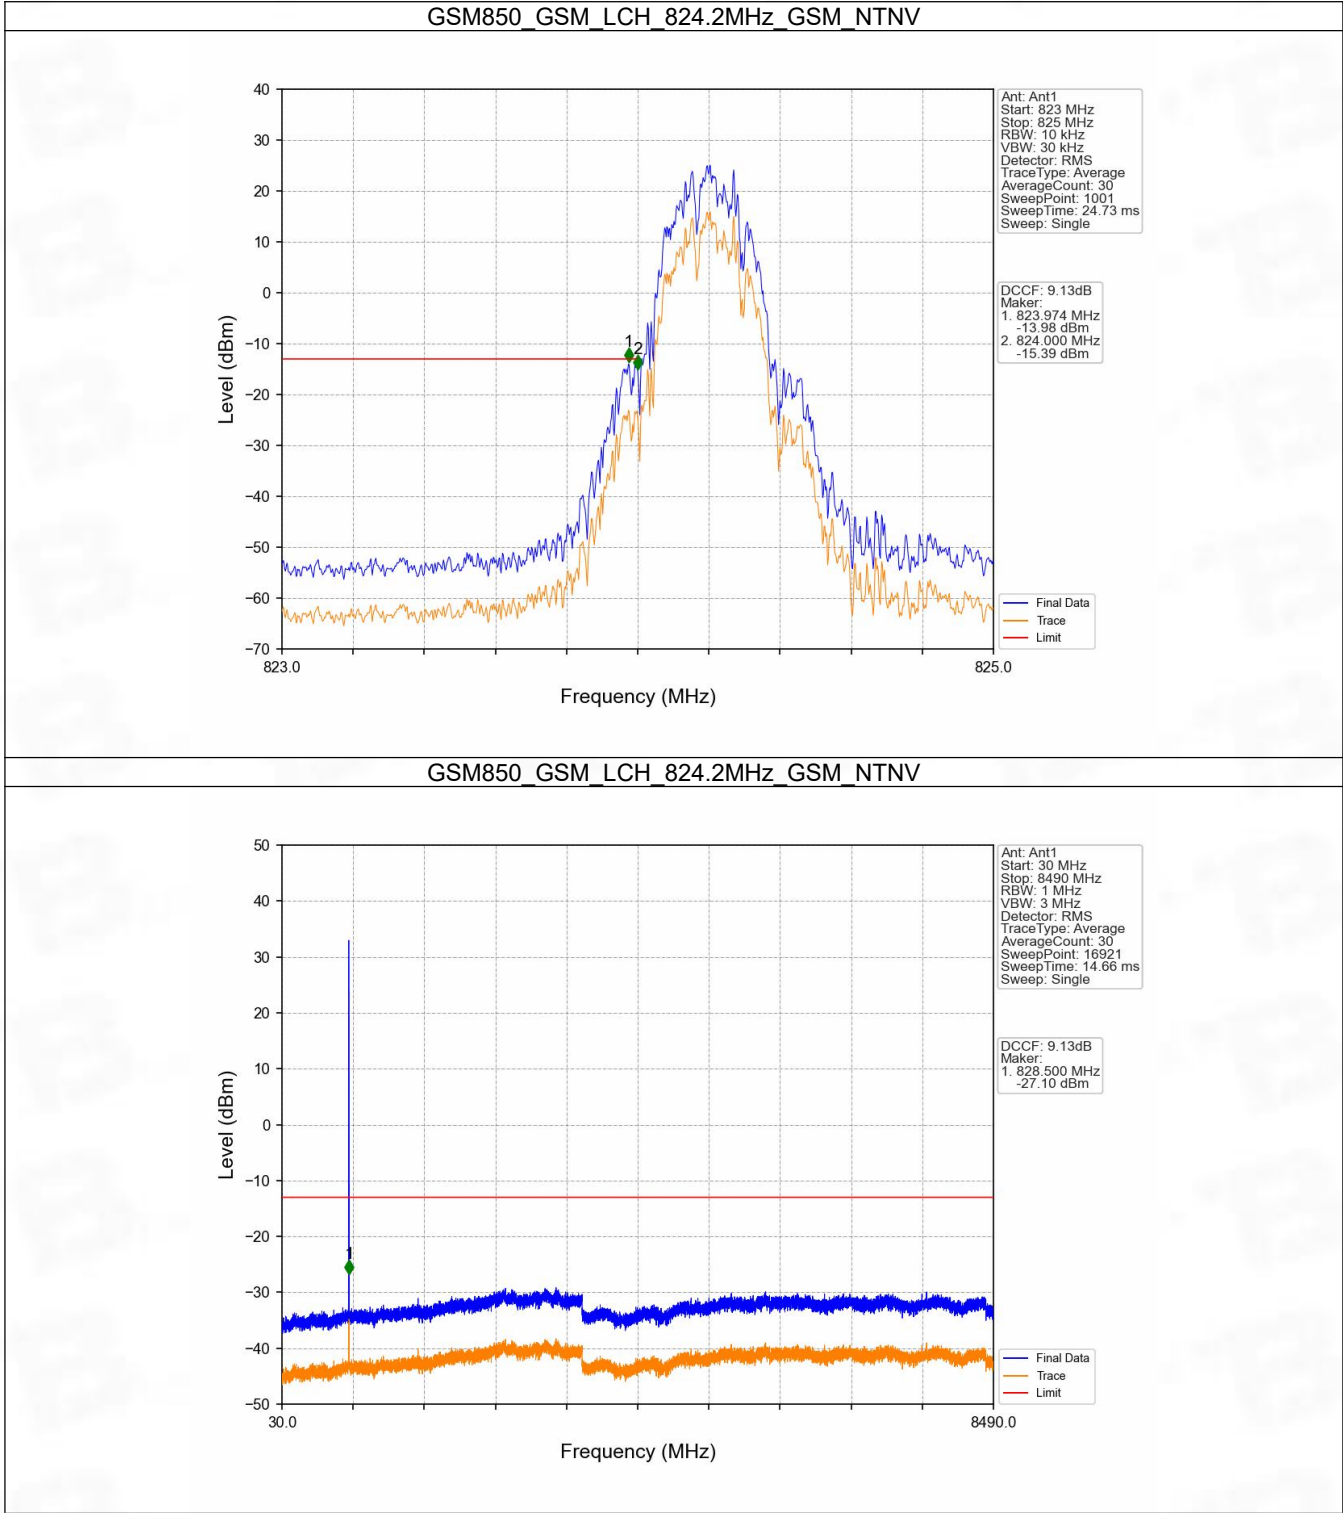


GSM850 GSM MCH 836.6MHz GSM NTN

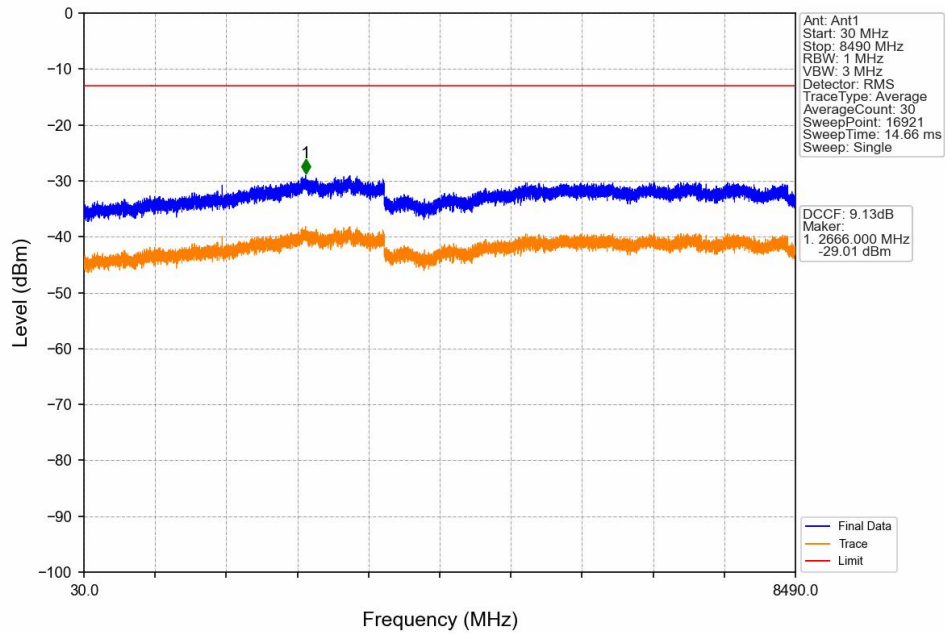


GSM850 GSM HCH 848.8MHz GSM NTN

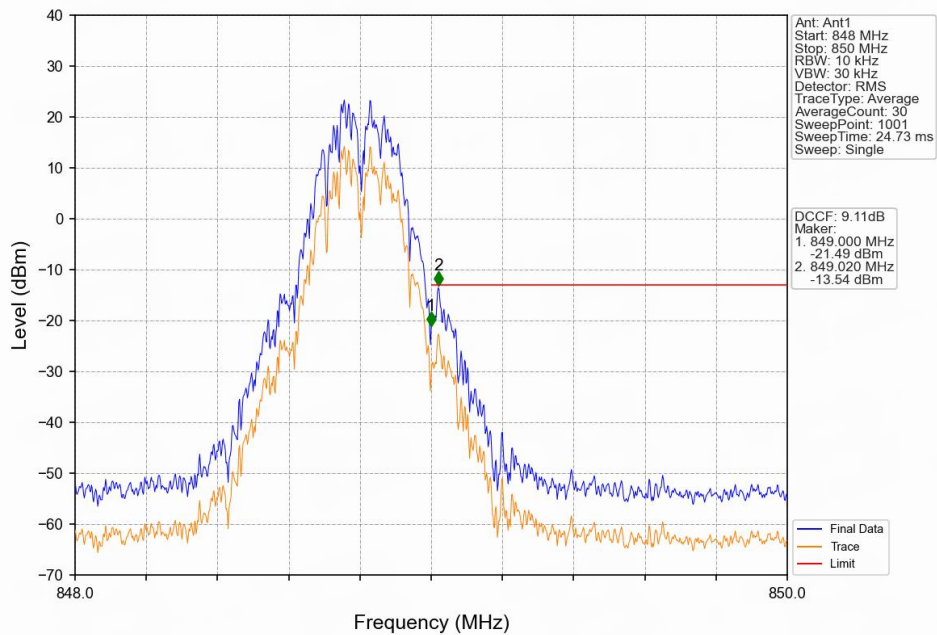


GSM850_GSM_HCH_848.8MHz_GSM_NTNV

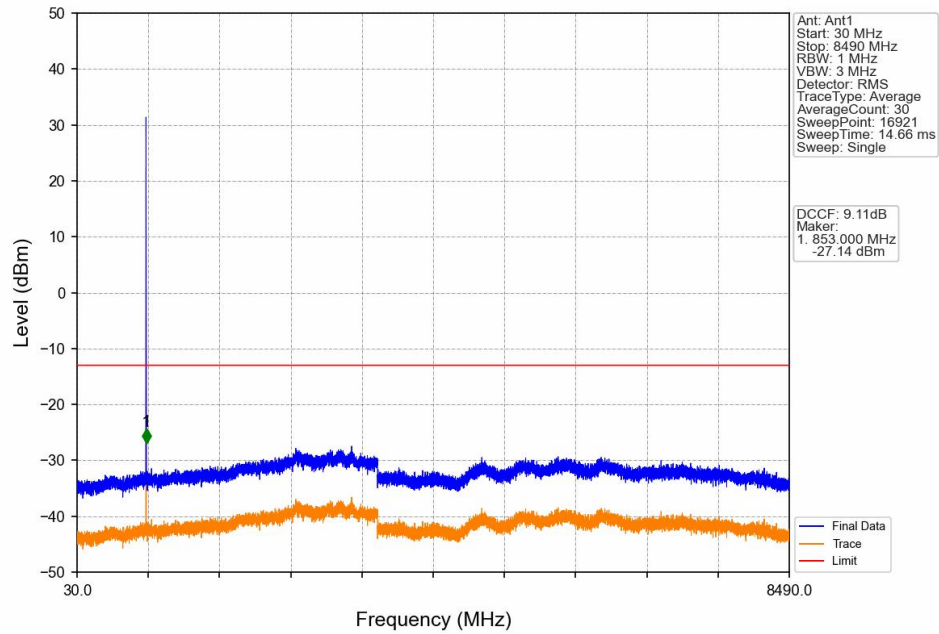


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

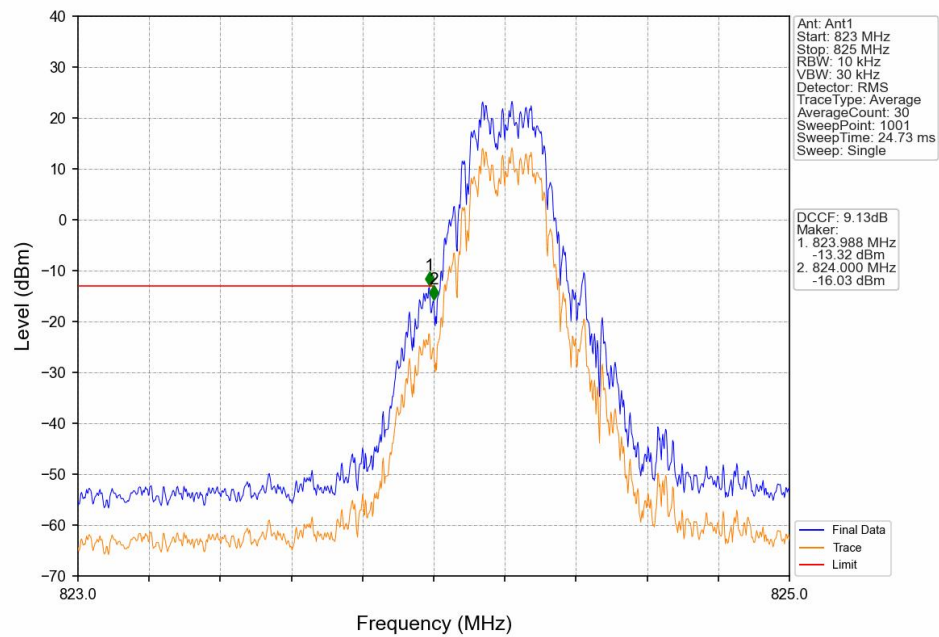


GSM850_GPRS_LCH_824.2MHz_1 TX Slot_NTNV

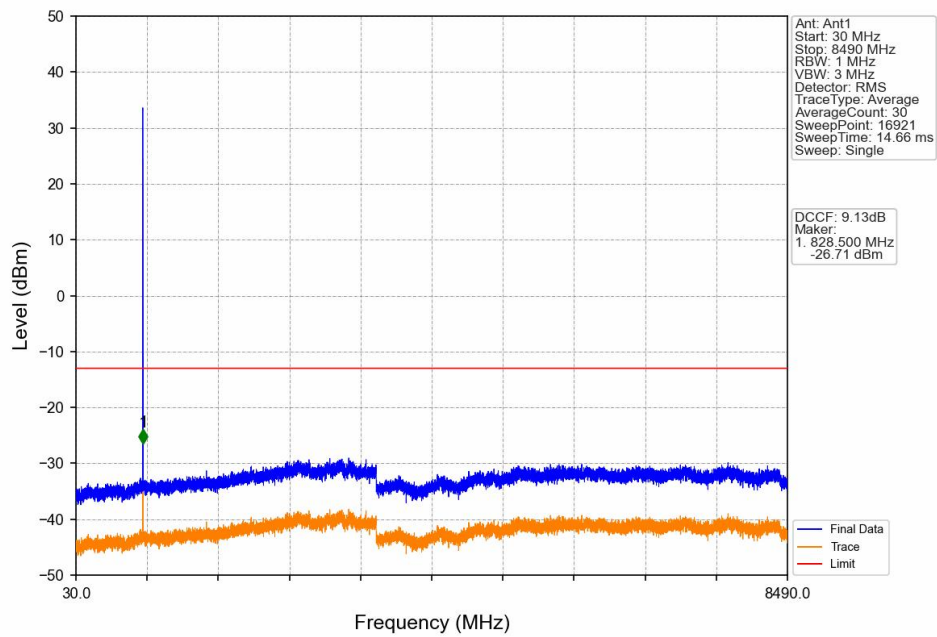


GSM850_GPRS_MCH_836.6MHz_1 TX Slot_NTNV

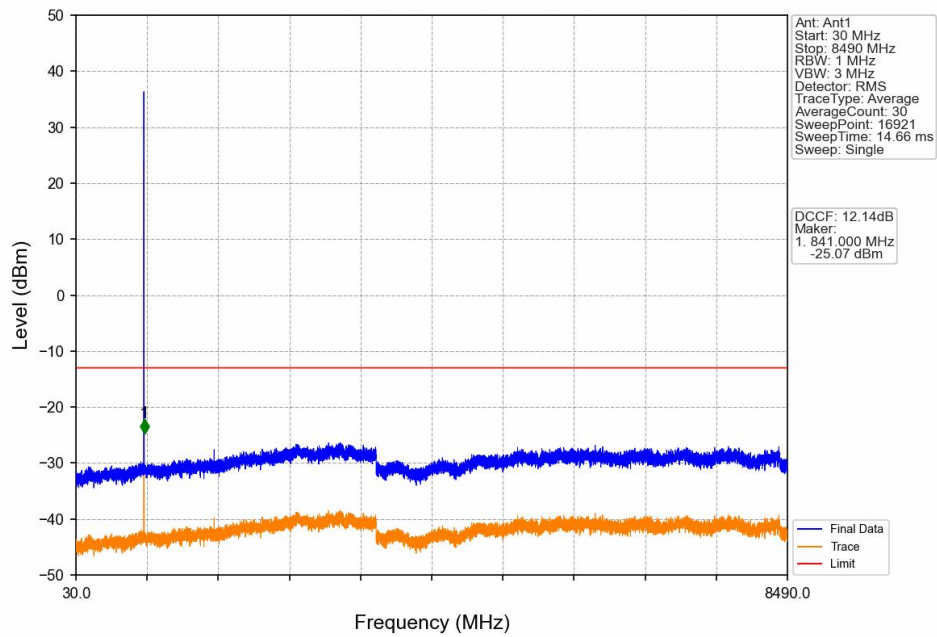


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

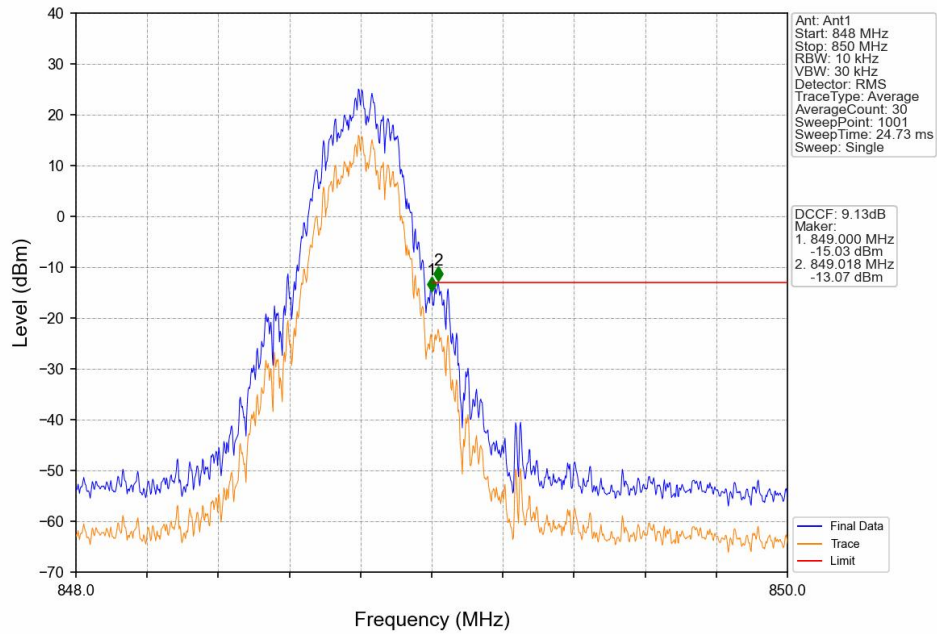


GSM850_GPRS_HCH_848.8MHz_1 TX Slot_NTNV

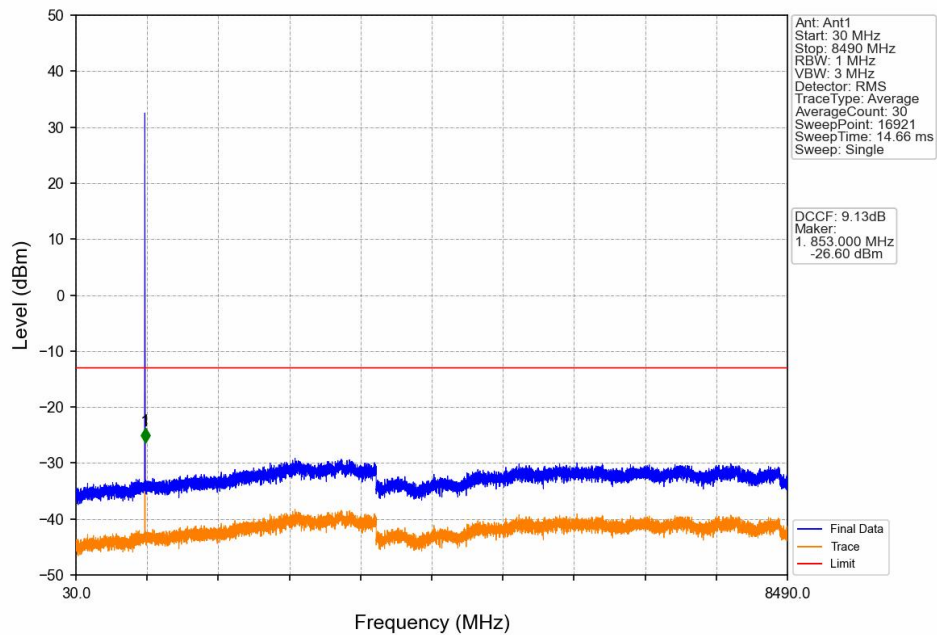


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

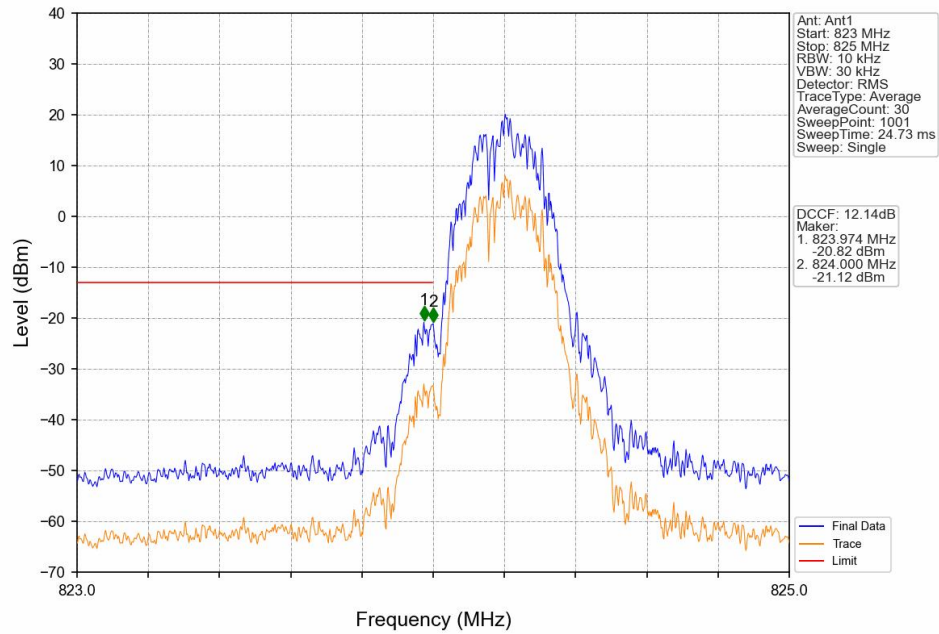


GSM850_EGPRS_LCH_824.2MHz_1 TX Slot_NTNV

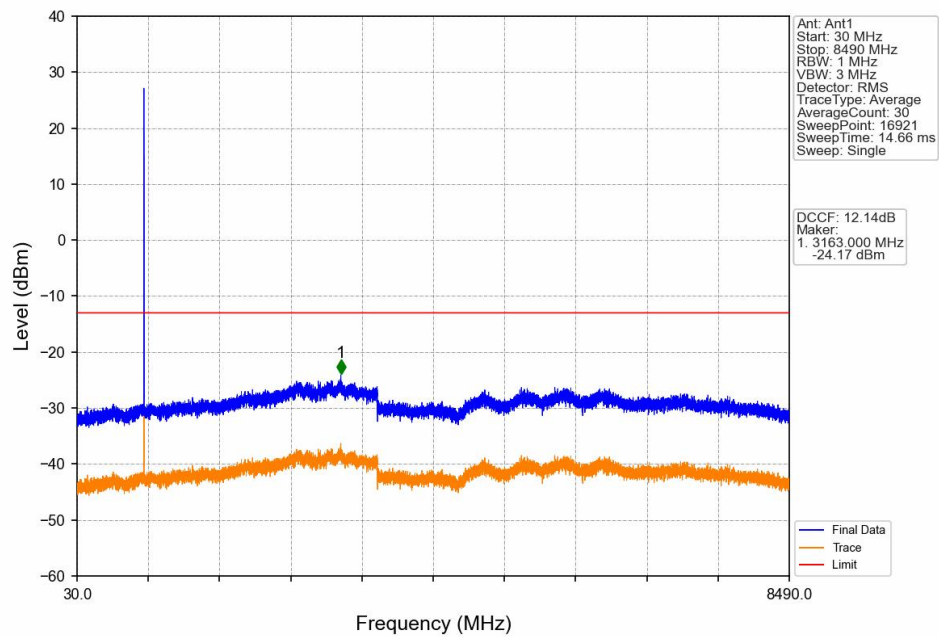


GSM850_EGPRS_MCH_836.6MHz_1 TX Slot_NTNV

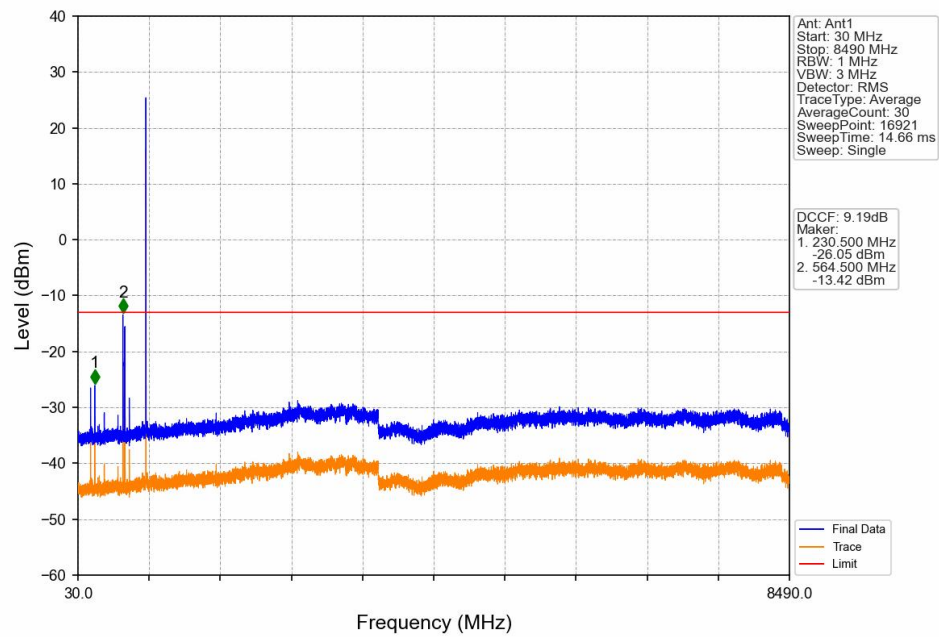

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

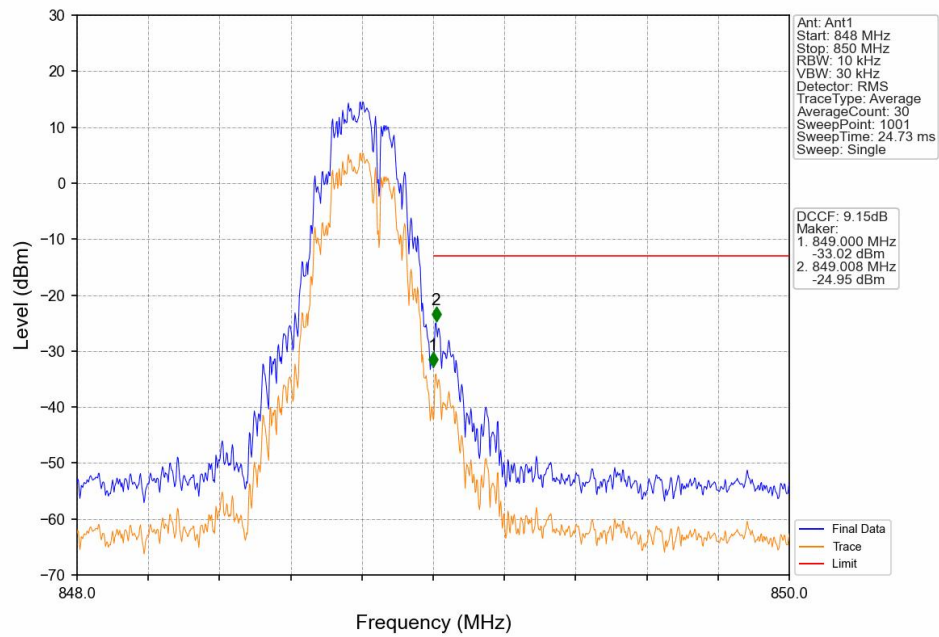

GSM850_EGPRS_HCH_848.8MHz_1 TX Slot_NTNV

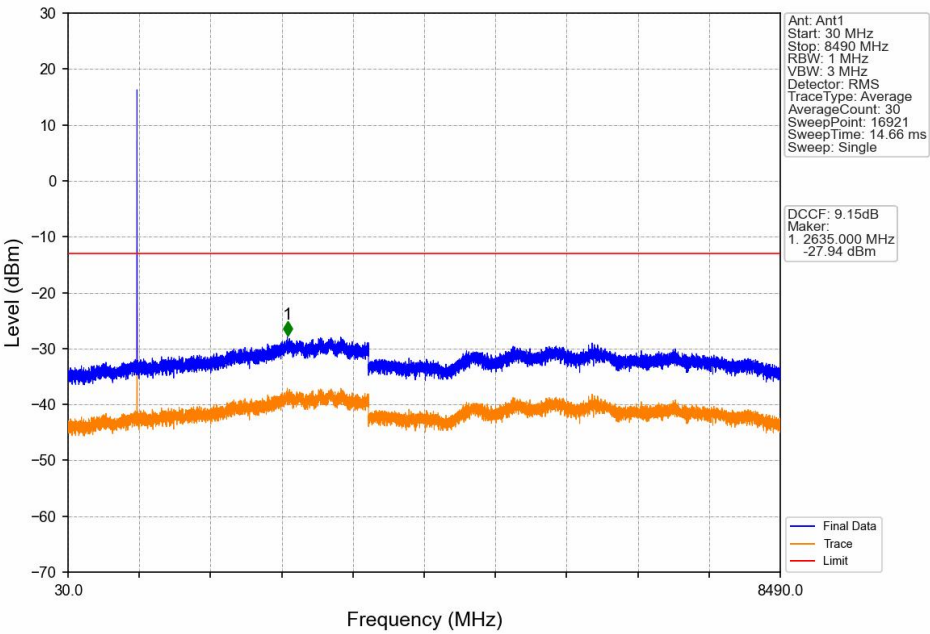

7. Form731

7.1 Form731_Power

7.1.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	1.5101	0.0163	ppm	249KGXW	22H	31.79
GSM850	0.2	824.2	848.8	1.2190	0.0107	ppm	533KG7W	22H	30.86

7.2 Form731_ERP

7.2.1 Test Result

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
GSM850	0.2	824.2	848.8	0.5383	0.0163	ppm	249KGXW	22H	27.31
GSM850	0.2	824.2	848.8	0.4345	0.0107	ppm	533KG7W	22H	26.38