

TEST REPORT

ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B

FOR:

Phytech Ltd.

Logger of wireless logger system

Model: 200201202

FCC ID:2ALN6200

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	System configuration	5
6.3	EUT test configuration	5
6.4	Changes made in EUT	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Periodic operation requirements	7
7.2	Field strength of emissions	9
7.3	Occupied bandwidth test	20
7.4	Antenna requirements	23
8	Unintentional emissions	24
8.1	Radiated emission measurements	24
8.2	Spurious emissions at RF antenna connector	30
9	APPENDIX A Test equipment and ancillaries used for tests	34
10	APPENDIX B Measurement uncertainties	35
11	APPENDIX C Test laboratory description	36
12	APPENDIX D Specification references	36
13	APPENDIX E Test equipment correction factors	37
14	APPENDIX F Abbreviations and acronyms	49

1 Applicant information

Client name: Phytech Ltd.
Address: 23 HaMelacha street, Park Afek, Rosh Haayin 4809900, Israel
Telephone: +972 3947 8050
Fax: +972 3947 8010
E-mail: eitanp@phytech.com
Contact name: Mr. Eitan Peleg

2 Equipment under test attributes

Product name: Logger of wireless logger system
Product type: Transceiver
Model(s): 200201202
Serial number: 001
Hardware version: 1.0
Software release: WL04170001
Receipt date 21-Mar-17

3 Manufacturer information

Manufacturer name: Phytech Ltd.
Address: 23 HaMelacha street, Park Afek, Rosh Haayin 4809900, Israel
Telephone: +972 3947 8050
Fax: +972 3947 8010
E-Mail: eitanp@phytech.com
Contact name: Mr. Eitan Peleg

4 Test details





Project ID: 29352
Location: Primary: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Satellite: Hermon Laboratories Ltd. Hefetz-Haim 10, Tel Aviv 6744124, Israel
Test started: 21-Mar-17
Test completed: 26-Mar-17
Test specification(s): FCC 47CFR part 15, subpart C, §15.231 and subpart B

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.231(a), Periodic operation requirements	Pass
Section 15.231(b), Field strength of emissions	Pass
Section 15.231(c), Occupied bandwidth	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.203, Antenna requirement	Pass
Unintentional emissions	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass
Section 15.111, Conducted emission at receiver antenna port	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.


	Name and Title	Date	Signature
Tested by:	Mr. K. Zushchuk, test engineer Mr. I. Zilberstein, test engineer	March 26, 2017	 
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	March 28, 2017	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	April 2, 2017	

6 EUT description


6.1 General information

The EUT, logger, is a part of wireless logger system. The system includes a small wireless sensor and a wireless logger. The system receives Plant sensor measurements and sends them to the Phyttech cloud for analyzing and processing. The radio communication is UHF narrow FM (based on silicon labs chip) at 433.92 MHz. The logger includes a single modular transmitter approved by FCC under FCC ID:RI7HE910GL.

6.2 System configuration

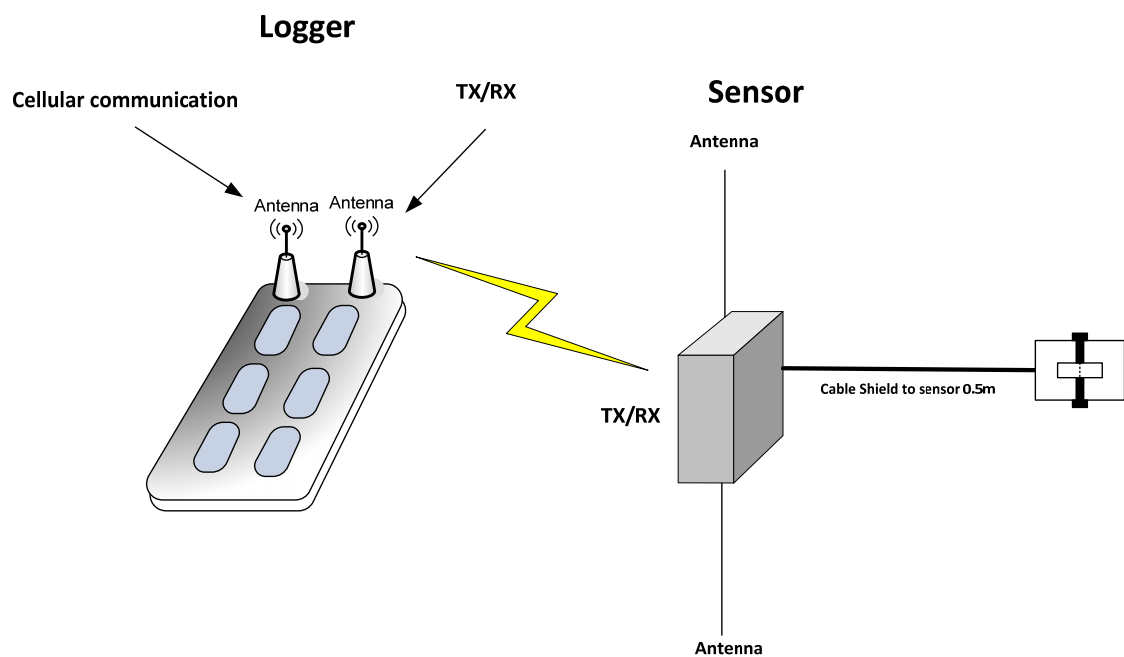

6.3 EUT test configuration

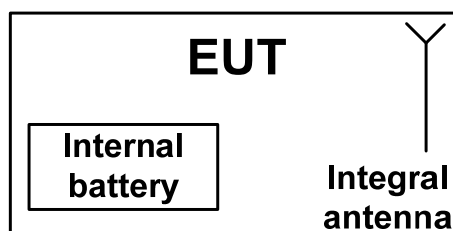

6.4 Changes made in EUT

No changes were implemented in the EUT during testing.

6.5 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Operating frequency		433.92 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector				
		Field strength at 3 m distance			96.67 dB(μ V/m) – peak 76.00 dB(μ V/m) -average	
Is transmitter output power variable?		X	No			
		Yes	continuous variable			
			stepped variable with stepsize			
			dB			
		minimum RF power				
		maximum RF power				
		dBm				
Antenna connection						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector	
				X	without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
Dipole, half external & half Integral		External:Taoglas		TI.10.0111		
				Gain		
				0 dBi		
Transmitter aggregate data rate/s		800 bps				
Type of modulation		FSK				
Modulating test signal (baseband)		PRBS				
Transmitter power source						
X	Battery	Nominal rated voltage	4 VDC	Battery type	1 X Li-ion battery. model: 18650	
	DC	Nominal rated voltage	VDC			
	AC mains	Nominal rated voltage	VAC	Frequency		
Common power source for transmitter and receiver				X	yes	
					no	

Test specification: Section 15.231(a), Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1 **Error! Reference source not found..**

Figure 7.1.1 Setup for transmitter shut down test




Test specification: Section 15.231(a), Periodic operation requirements			
Test procedure: Supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

Table 7.1.1 Periodic operation requirements

Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released	NA	NA
Transmitter activated automatically shall cease transmission within 5 seconds	Plot 7.1.1	Comply
Periodic transmissions at regular predetermined intervals are not permitted	Supplier declaration	Comply
Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour	NA	NA
Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.	NA	NA

Plot 7.1.1 Transmitter shut down test result

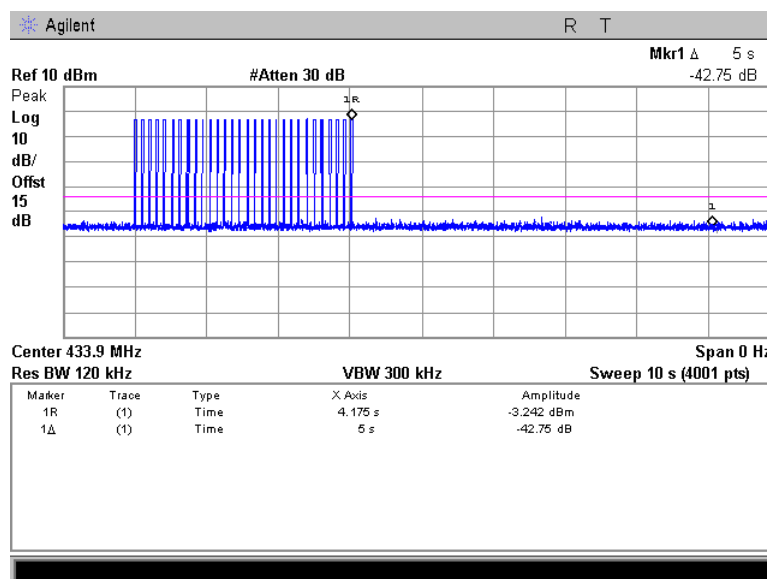

Reference numbers of test equipment used

HL 2909						
---------	--	--	--	--	--	--

Full description is given in Appendix A.

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
433.92	100.8	80.8

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	80.8	60.8
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.


7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

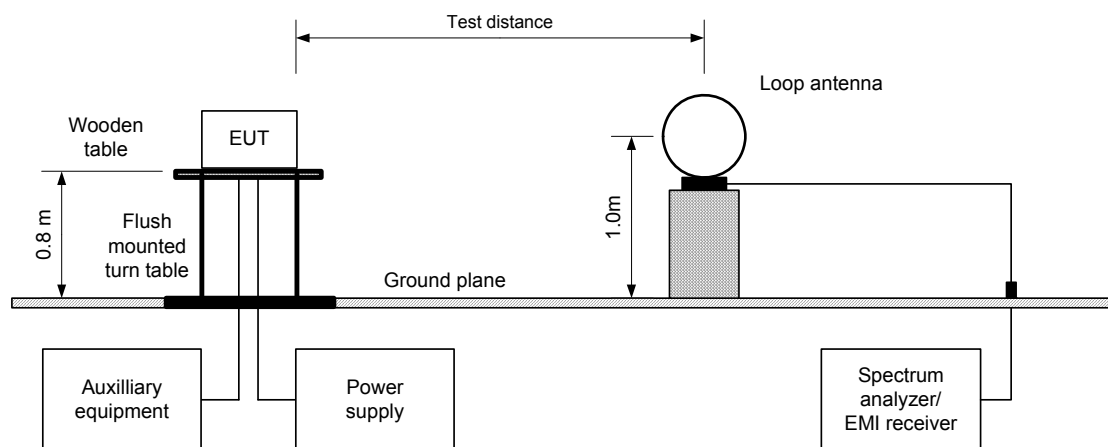

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz


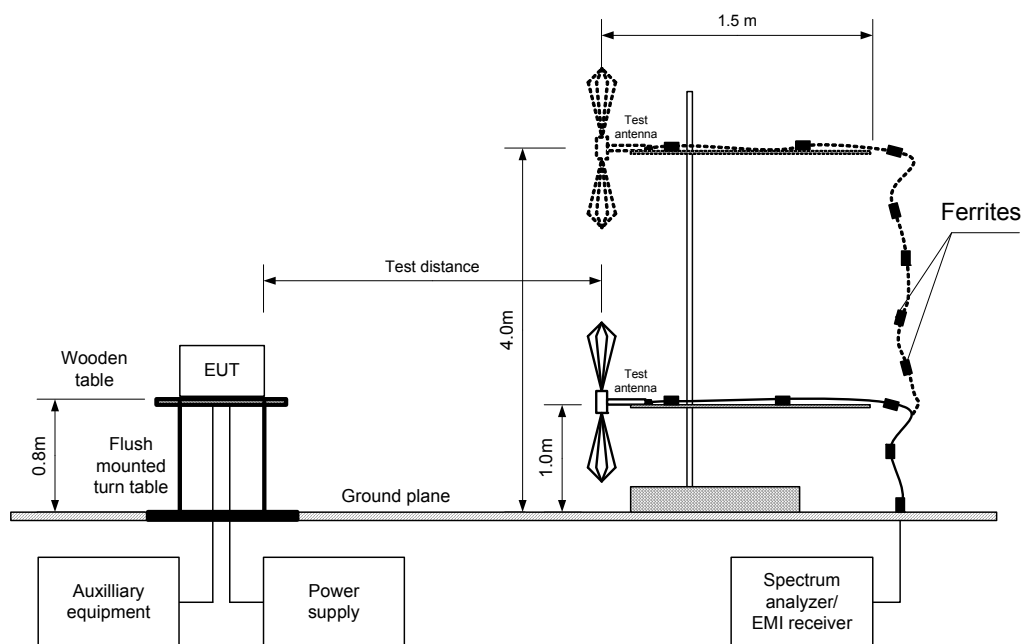


Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz

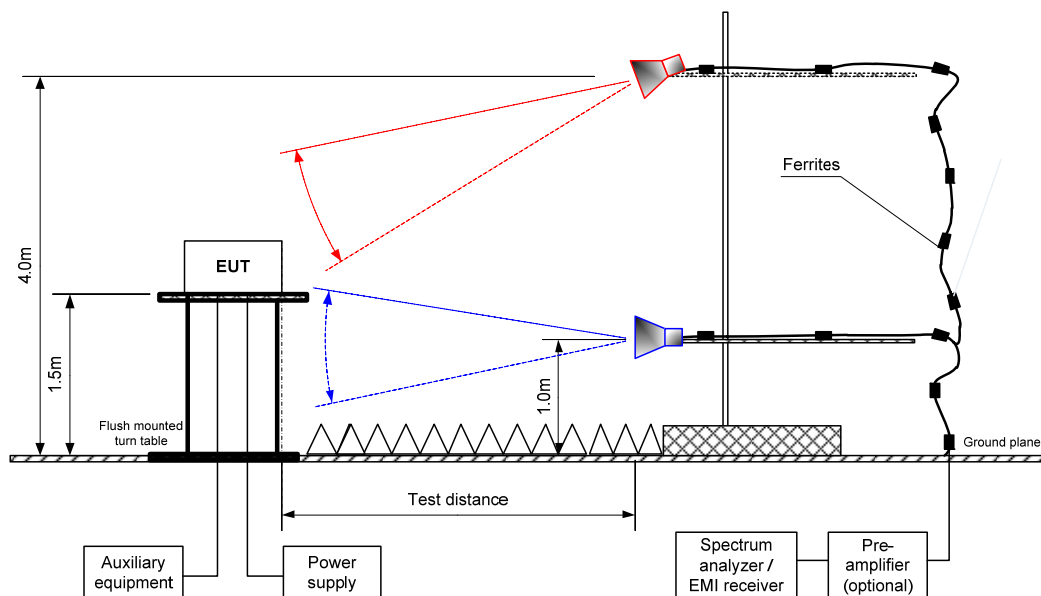

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance	Verdict: PASS		
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE: 3 m
EUT POSITION: Typical (Vertical)
MODULATION: FSK
BIT RATE: 800 bps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
INVESTIGATED FREQUENCY RANGE: 0.009 -4500.0 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Fundamental emission											
433.92	V	1.0	280	96.67	100.80	-4.13	96.67	76.00	80.80	-4.80	Pass
Spurious emissions											
No emissions were found											Pass

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin, dB = Measured (calculated) value, dB(μV/m) - Limit, dB(μV/m)

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
TxON Duration, ms	Pulse period, ms	Duration, ms	Period, ms		
9.237	104.6	NA	NA	NA	-20.67

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2909	HL 4353	HL 4933	HL 5103	HL 5111
HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549	HL 4551	HL 4575
HL 4603	HL 4604						

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	




HERMON LABORATORIES

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			


Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

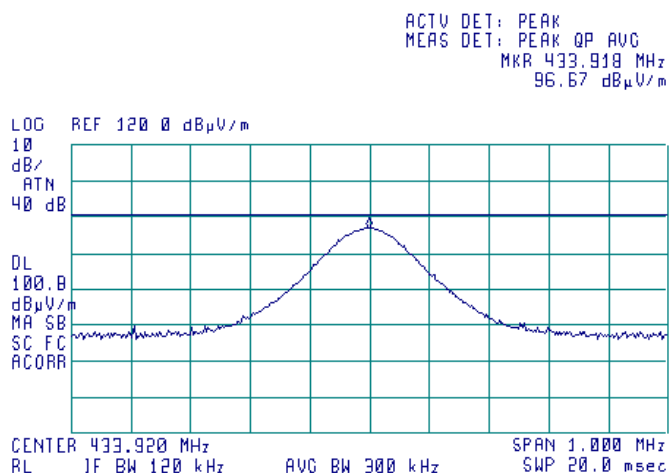

Plot 7.2.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

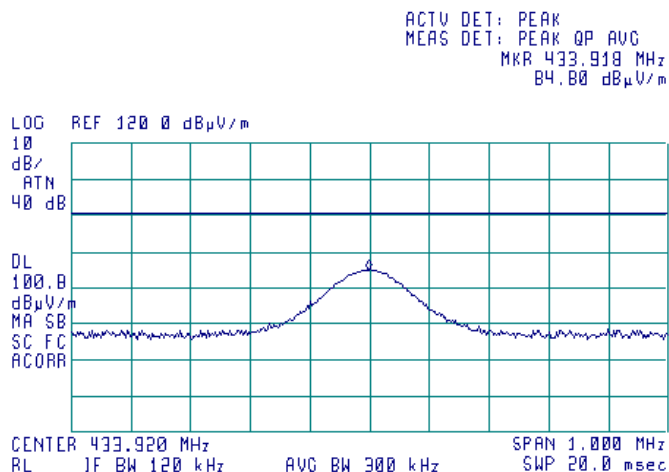




HERMON LABORATORIES

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			


Plot 7.2.3 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

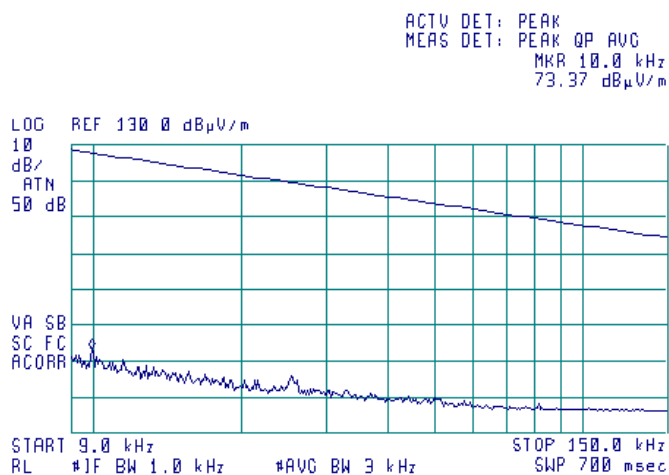

Plot 7.2.4 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

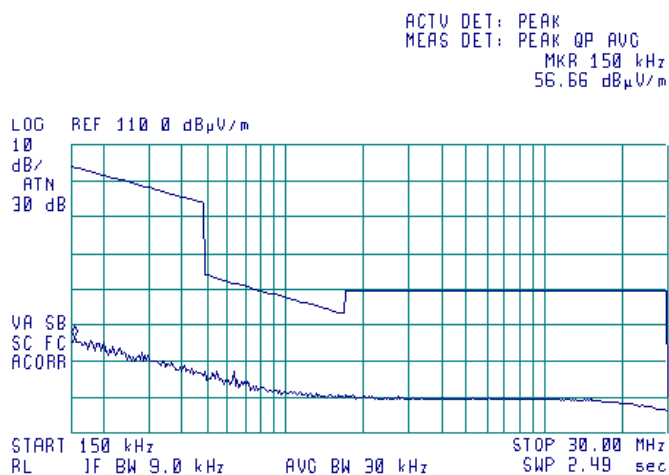




HERMON LABORATORIES

Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			



Plot 7.2.5 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

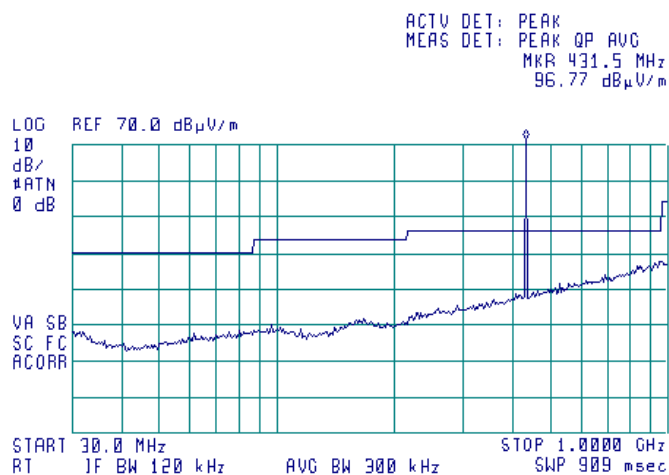


lot 7.2.6 Radiated emission measurements from 1000 to 4500 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Typical (Vertical)

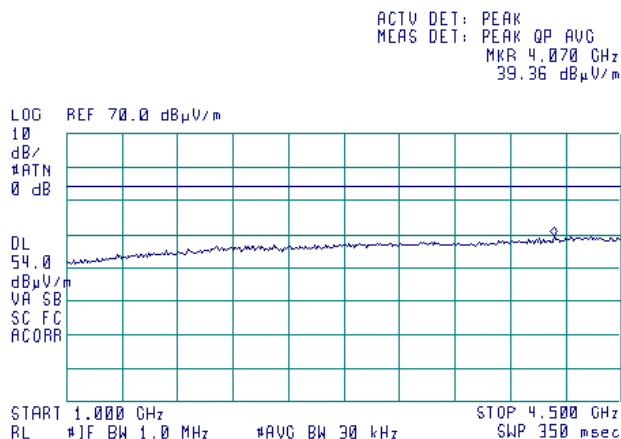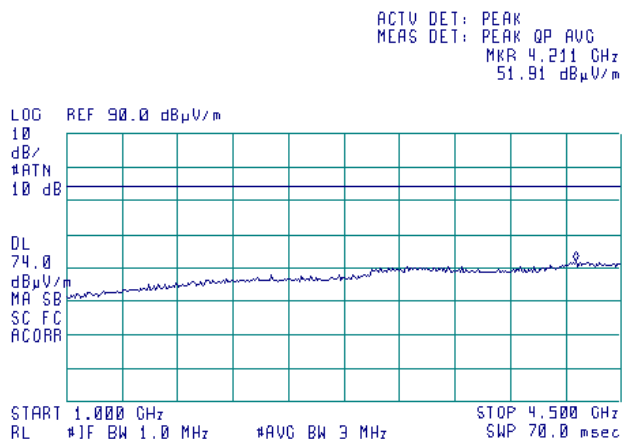


Test specification: Section 15.231(b), Field strength of emissions			
Test procedure: ANSI C63.10 sections 6.5, 6.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

Plot 7.2.7 Transmission pulse duration

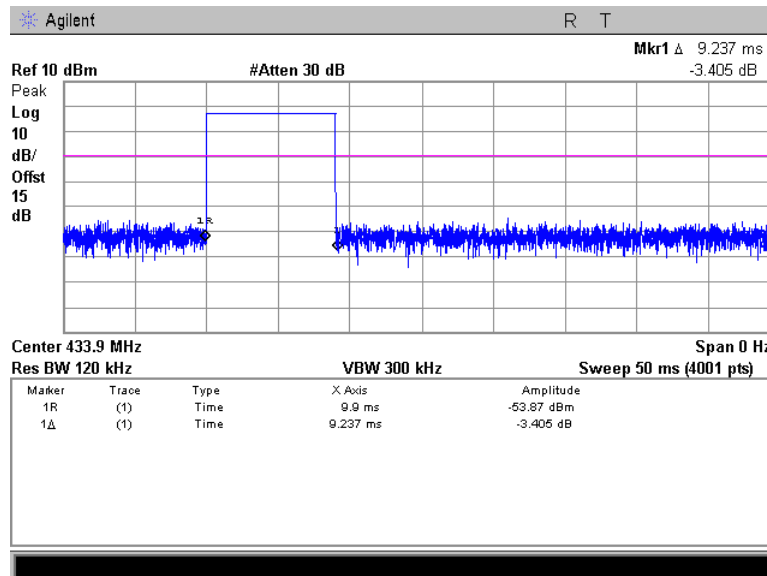


Plot 7.2.8 Transmission pulse period

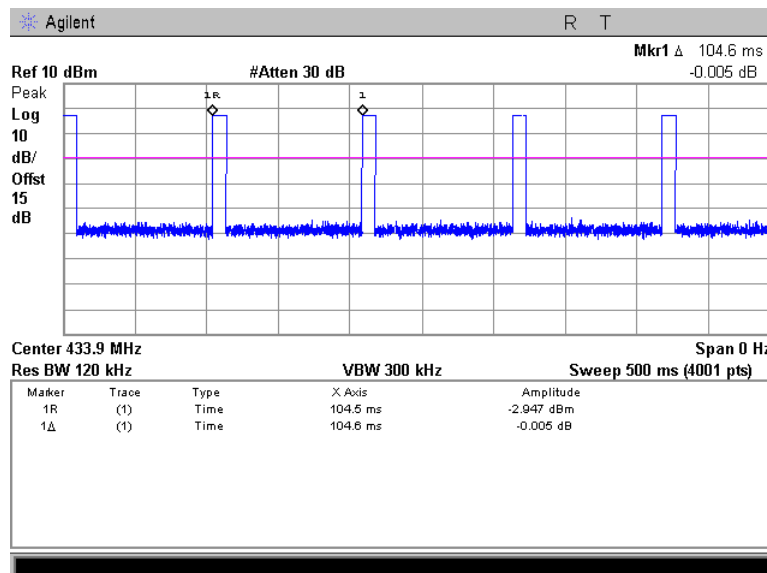

Test specification:		Section 15.231(b), Field strength of emissions	
Test procedure:		ANSI C63.10 sections 6.5, 6.6	
Test mode:		Verdict: PASS	
Date(s):			
22-Mar-17			
Temperature: 23 °C	Relative Humidity: 42 %	Air Pressure: 1011 hPa	Power: Battery
Remarks:			

Plot 7.2.9 Transmission train duration

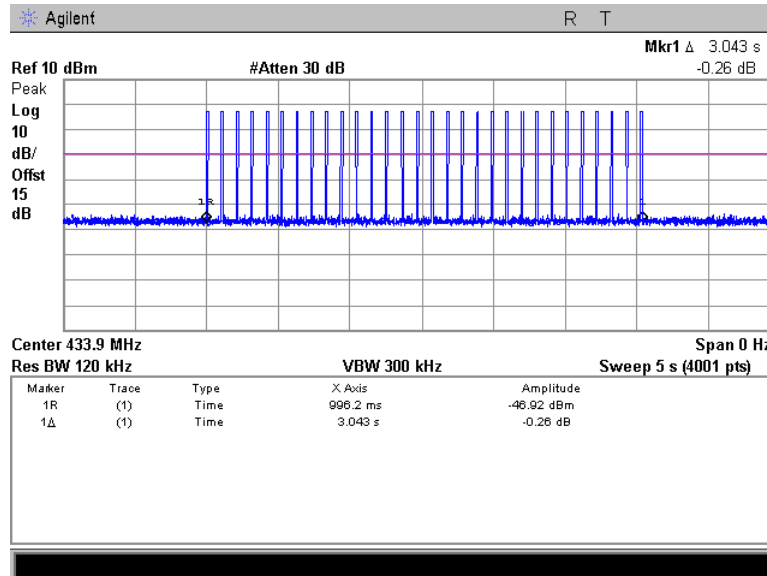

Test specification: Section 15.231(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification: Section 15.231(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 100 Hz
 VIDEO BANDWIDTH: 300 Hz
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 800 bps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.92	2.57	0.25	1084.80	-1082.23	Pass

Reference numbers of test equipment used

HL 2909								
---------	--	--	--	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: Section 15.231(c), Occupied bandwidth			
Test procedure: ANSI C63.10 section 6.9.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			

Plot 7.3.1 Occupied bandwidth test result

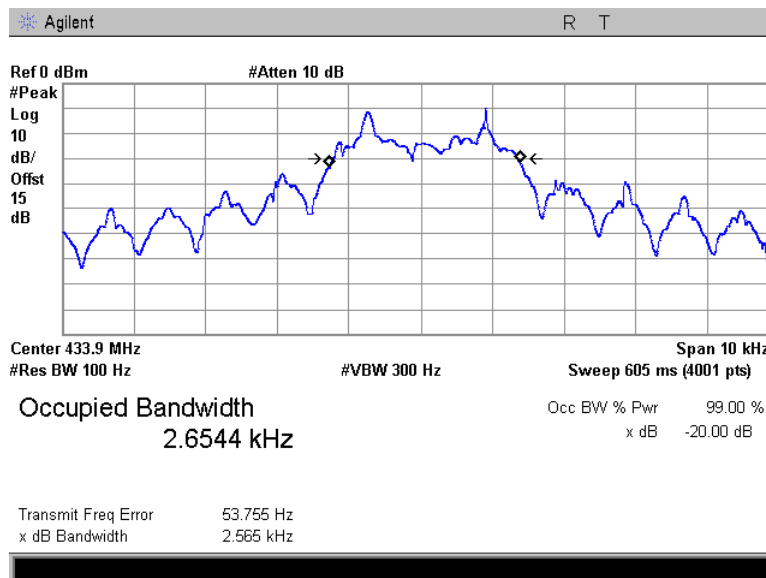

Test specification: Section 15.203, Antenna requirement			
Test procedure: Visual inspection / supplier declaration			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Mar-17			
Temperature: 25 °C	Relative Humidity: 44 %	Air Pressure: 1012 hPa	Power: Battery
Remarks:			

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	NA	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	Statement in user manual	

Photograph 7.4.1 Antenna assembly



Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Verdict: PASS	
Date(s):			
21-Mar-17			
Temperature: 23.8 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure


8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Mar-17			
Temperature: 23.8 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

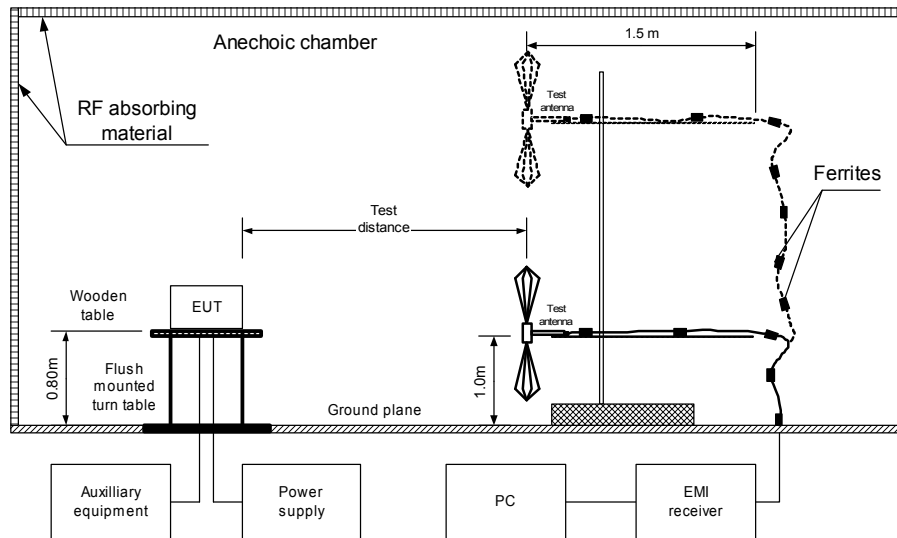


Photograph 8.1.1 Setup for radiated emission measurements



Test specification:		Section 15.109, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:		Verdict: PASS	
Date(s):			
21-Mar-17			
Temperature: 23.8 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			

Photograph 8.1.2 Setup for radiated emission measurements

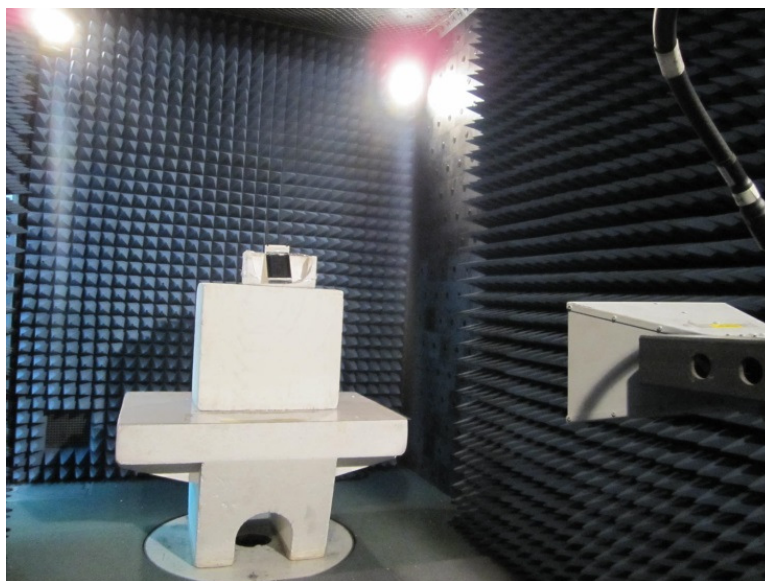

Photograph 8.1.3 Setup for radiated emission measurements, EUT close view





HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Mar-17			
Temperature: 23.8 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			

gTable 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
233.99	18.55	17.02	46.0	-28.98	H	1.0	345	Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 2500 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Resolution Bandwidth:				RBW Rate			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Frequency, MHz	Peak			Average						
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549	HL 4551	HL 4575
HL 4603	HL 4604						

Full description is given in Appendix A.

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Mar-17			
Temperature: 23.8 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

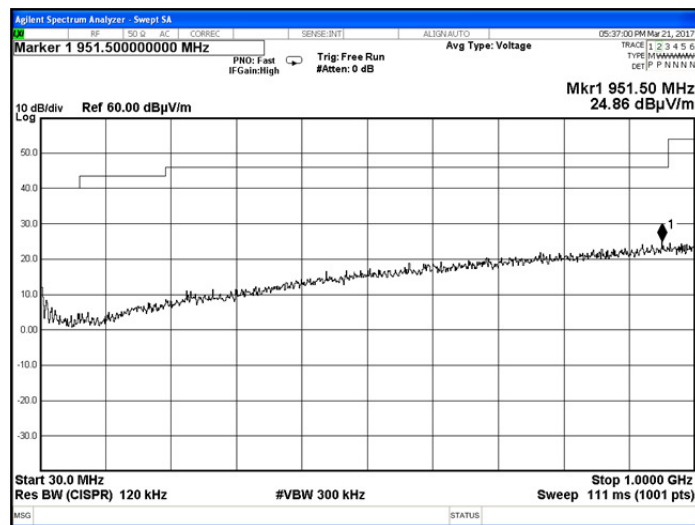

Plot 8.1.2 Radiated emission measurements in 30 - 1000 MHz range, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

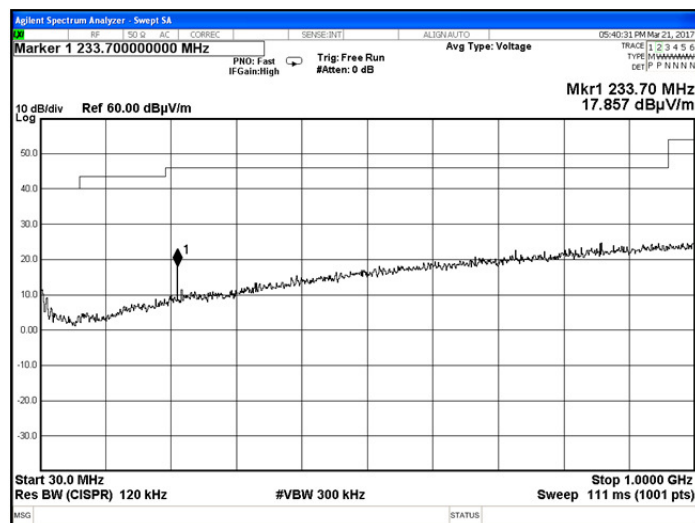





HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Mar-17			
Temperature: 23.8 °C	Relative Humidity: 42 %	Air Pressure: 1015 hPa	Power: Battery
Remarks:			



Plot 8.1.3 Radiated emission measurements above 1000 MHz, vertical antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

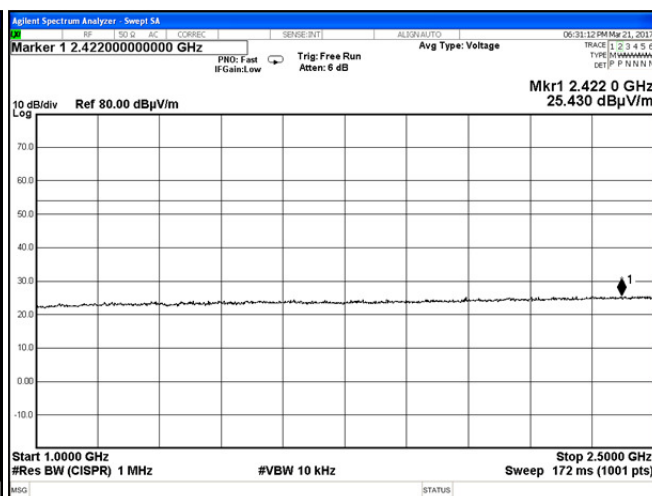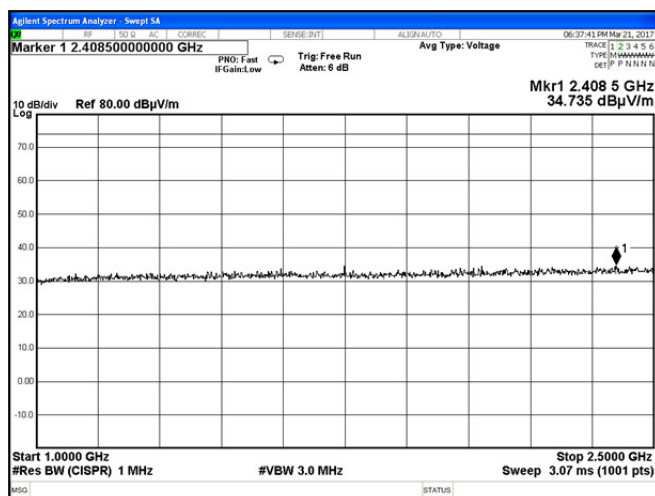

Plot 8.1.4 Radiated emission measurements above 1000 MHz, horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive

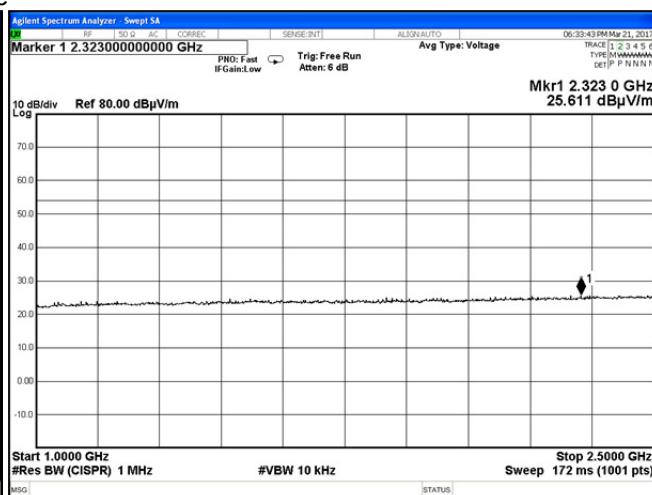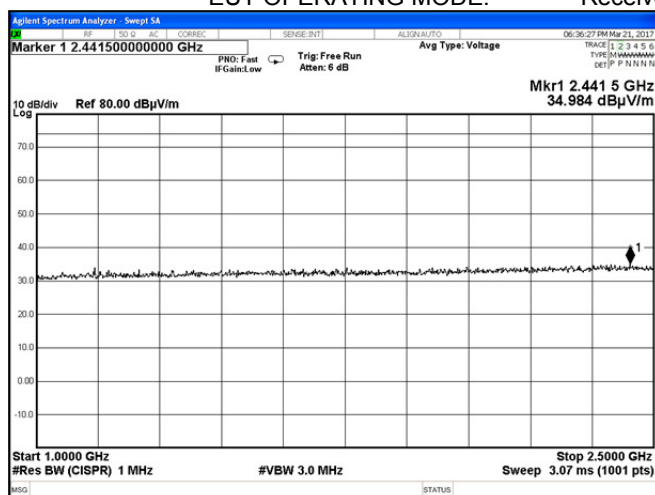

Test specification: Section 15.111, Conducted emission at receiver antenna port			
Test procedure: ANSI C63.4, Section 12.2.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 34 %	Air Pressure: 1011 hPa	Power: Battery
Remarks: Logger			

8.2 Spurious emissions at RF antenna connector

8.2.1 General

This test was performed to measure spurious emissions at RF antenna connector of receiver operated within 30 to 960 MHz band or a citizens band (CB) receiver which was tested for compliance with radiated emission limits with the antenna port connected to resistive termination. Specification test limits are given in Table 8.2.1.

Table 8.2.1 Spurious emission limits

Frequency, MHz	EUT type	Power of spurious	
		nW	dBm
25 MHz – 5 th harmonic*	Citizens band (CB) receiver	2.0	-57.0
30 MHz – 2 nd harmonic**	Superheterodyne receiver		
30 MHz – 5 th harmonic*	Other receiver operates within 30 – 960 MHz		

* - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.


** - harmonic of the highest local oscillator frequency.

8.2.2 Test procedure

8.2.2.1 The EUT was set up as shown in Figure 8.2.1, energized and its proper operation was checked.

8.2.2.2 The spurious emission was measured with spectrum analyzer as provided in Table 8.2.2 and associated plots.

Figure 8.2.1 Spurious emission test setup



Test specification:		Section 15.111, Conducted emission at receiver antenna port	
Test procedure:		ANSI C63.4, Section 12.2.6	
Test mode:		Compliance	Verdict: PASS
Date(s):		23-Mar-17	
Temperature: 25 °C	Relative Humidity: 34 %	Air Pressure: 1011 hPa	Power: Battery
Remarks: Logger			

Photograph 8.2.1 Spurious emission test setup





HERMON LABORATORIES

Test specification: Section 15.111, Conducted emission at receiver antenna port			
Test procedure: ANSI C63.4, Section 12.2.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 34 %	Air Pressure: 1011 hPa	Power: Battery
Remarks: Logger			

Table 8.2.2 Spurious emission test results

INVESTIGATED FREQUENCY RANGE: 30 – 2500 MHz
 EUT OPERATING MODE: Receive
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 120/1000 kHz
 VIDEO BANDWIDTH: 300/3000 kHz

Frequency, MHz	Spurious emission, dBm	Limit, dBm	Margin, dB	Verdict
No emissions were found				Pass


Reference numbers of test equipment used

HL 2909	HL 3903						
---------	---------	--	--	--	--	--	--


Full description is given in Appendix A.

Test specification: Section 15.111, Conducted emission at receiver antenna port			
Test procedure: ANSI C63.4, Section 12.2.6			
Test mode: Compliance		Verdict: PASS	
Date(s): 23-Mar-17			
Temperature: 25 °C	Relative Humidity: 34 %	Air Pressure: 1011 hPa	Power: Battery
Remarks: Logger			

Plot 8.2.1 Spurious emission test results in 30-1000 MHz

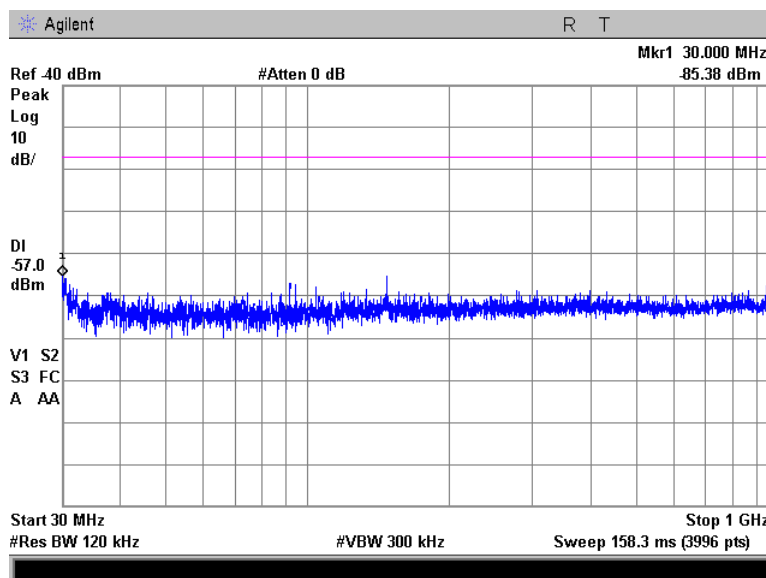

Plot 8.2.2 Spurious emission test results above 1 GHz

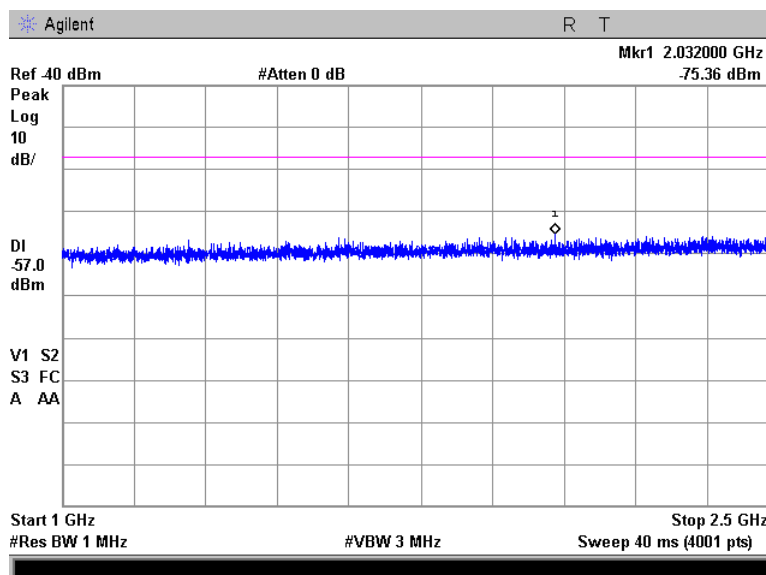

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	19-Jan-17	19-Jan-18
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-16	27-Oct-17
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	09-Mar-17	09-Mar-18
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1226/2A	20-Feb-17	20-Feb-18
4295	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	16-Oct-16	16-Oct-17
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-17	15-Mar-18
4535	Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	30-May-16	30-May-17
4541	Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	25-Sep-16	25-Sep-17
4542	Amplifier, 9 kHz to 1 GHz, 32 dB gain	Sonoma Instrument	310	0002A056 39	15-Mar-17	15-Mar-18
4543	Broadband preamplifier, 0.5 to 18 GHz, 35 dB gain	Schwarzbeck mess-elektronik	BBV 9718	9718-134	15-Mar-17	15-Mar-18
4549	Cable RF, 6.8 m, N/N - type, up to 3 GHz	Suhner Switzerland	NA	07262	14-Mar-17	14-Mar-18
4551	Cable RF, 6.6 m, N/N - type, up to 18 GHz	Suhner Switzerland	Sucoflex 104E	22200/4E	30-Dec-16	30-Dec-17
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	17-Feb-16	17-Apr-17
4603	Horn Antenna, 1 - 18 GHz	Schwarzbeck mess-elektronik	BBHA 9120 D	9120D-611	14-Oct-16	14-Oct-17
4604	Biconilog Antenna, 26 - 2000 MHz	EMCO	3142B	9909-1421	10-May-16	10-May-17
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	14-Oct-16	14-Oct-17
5103	RF cable, 18 GHz, 6 m, N-type	Huber-Suhner	SF106A/1 1N/11N/6 000MM	500849/6A	26-Jul-16	26-Jul-17
5111	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/ 11SK/11S K/5500M M	502493/2E A	26-Jul-16	26-Jul-17

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site and T-1606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

12 APPENDIX D Specification references

47CFR part 15: 2016	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Antenna factor
Horn antenna
Schwarzbeck mess-elektronik, Model BBHA 9120 D, serial number: 9120D-611, HL 4603

Frequency, MHz	Measured antenna factor, dB/m
1000	25.2
1500	25.7
2000	26.1
2500	27.5
3000	28.3
3500	29.0
4000	30.0
4500	30.8
5000	31.9
5500	32.2
6000	33.1
6500	34.6
7000	35.9
7500	36.6
8000	37.2
8500	36.6
9000	36.9
9500	37.5
10000	38.4
10500	39.5
11000	40.3
11500	40.0
12000	39.2
12500	38.7
13000	39.6
13500	40.8
14000	41.6
14500	42.1
15000	41.2
15500	39.1
16000	38.5
16500	39.9
17000	41.0
17500	44.1
18000	55.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

Antenna factor
Biconilog Antenna, 26 - 2000 MHz
EMCO, Model 3142B, serial number: 9909-1421, HL 4604

Frequency, MHz	Measured, dB/m
30	17.9
35	14.8
40	12.1
45	10.0
50	8.7
60	8.1
70	7.3
80	6.6
90	7.6
100	7.9
120	7.0
140	7.7
160	9.6
180	10.0
200	10.2
250	12.7
300	13.4
400	16.7
500	18.2
600	20.2
700	22.0
800	22.7
900	24.1
1000	25.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

Equipment:			ACTIVE HORN ANTENNA		
Model:			AHA-118		
Serial Number:			701046		
Calibration Distance:			3 Meter		
Polarization:			Horizontal		
Calibration Date:			11/12/2014		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
Antenna Factor to be added to receiver reading: Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33

Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner, S/N 4295,
Sucoflex P103, HL 4295

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	5000	2.09	10200	2.97	15400	3.63
30	0.18	5100	2.12	10300	3.01	15500	3.65
50	0.23	5200	2.13	10400	3.00	15600	3.63
100	0.31	5300	2.16	10500	3.05	15700	3.64
200	0.38	5400	2.19	10600	3.09	15800	3.64
300	0.43	5500	2.21	10700	3.05	15900	3.66
400	0.52	5600	2.21	10800	3.09	16000	3.71
500	0.60	5700	2.24	10900	3.10	16100	3.67
600	0.67	5800	2.24	11000	3.08	16200	3.71
700	0.72	5900	2.25	11100	3.11	16300	3.70
800	0.78	6000	2.27	11200	3.12	16400	3.71
900	0.83	6100	2.25	11300	3.12	16500	3.72
1000	0.89	6200	2.29	11400	3.20	16600	3.84
1100	0.94	6300	2.34	11500	3.16	16700	3.78
1200	0.98	6400	2.37	11600	3.16	16800	3.85
1300	1.03	6500	2.33	11700	3.20	16900	3.88
1400	1.06	6600	2.34	11800	3.19	17000	3.85
1500	1.11	6700	2.39	11900	3.21	17100	3.88
1600	1.14	6800	2.46	12000	3.28	17200	3.92
1700	1.19	6900	2.45	12100	3.23	17300	3.90
1800	1.22	7000	2.44	12200	3.26	17400	4.00
1900	1.26	7100	2.43	12300	3.30	17500	4.02
2000	1.30	7200	2.44	12400	3.25	17600	4.00
2100	1.34	7300	2.51	12500	3.26	17700	3.96
2200	1.37	7400	2.54	12600	3.30	17800	4.01
2300	1.40	7500	2.49	12700	3.26	17900	4.02
2400	1.44	7600	2.52	12800	3.34	18000	4.08
2500	1.47	7700	2.59	12900	3.37		
2600	1.50	7800	2.57	13000	3.30		
2700	1.55	7900	2.55	13100	3.35		
2800	1.58	8000	2.57	13200	3.31		
2900	1.60	8100	2.58	13300	3.33		
3000	1.63	8200	2.64	13400	3.42		
3100	1.64	8300	2.70	13500	3.43		
3200	1.67	8400	2.65	13600	3.40		
3300	1.69	8500	2.66	13700	3.47		
3400	1.73	8600	2.68	13800	3.45		
3500	1.74	8700	2.70	13900	3.43		
3600	1.76	8800	2.74	14000	3.52		
3700	1.79	8900	2.74	14100	3.51		
3800	1.82	9000	2.76	14200	3.54		
3900	1.85	9100	2.82	14300	3.55		
4000	1.87	9200	2.79	14400	3.52		
4100	1.90	9300	2.82	14500	3.52		
4200	1.92	9400	2.83	14600	3.56		
4300	1.93	9500	2.83	14700	3.55		
4400	1.94	9600	2.86	14800	3.55		
4500	1.97	9700	2.93	14900	3.59		
4600	1.99	9800	2.89	15000	3.56		
4700	2.01	9900	2.91	15100	3.59		
4800	2.02	10000	2.94	15200	3.59		
4900	2.04	10100	2.94	15300	3.59		

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

Cable loss
Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type
Suhner Switzerland, HL 4535

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	1700	1.79	4400	3.53
15	0.13	1800	1.86	4500	3.60
20	0.15	1900	1.93	4600	3.72
30	0.18	2000	2.00	4700	3.80
40	0.21	2100	2.06	4800	3.87
50	0.24	2200	2.13	4900	3.94
60	0.26	2300	2.19	5000	3.99
70	0.29	2400	2.25	5100	4.06
80	0.31	2500	2.32	5200	4.12
90	0.33	2600	2.38	5300	4.17
100	0.35	2700	2.45	5400	4.25
150	0.43	2800	2.51	5500	4.31
200	0.50	2900	2.57	5600	4.40
300	0.63	3000	2.64	5700	4.47
400	0.74	3100	2.73	5800	4.54
500	0.85	3200	2.79	5900	4.64
600	0.94	3300	2.86	6000	4.73
700	1.03	3400	2.91	6100	4.79
800	1.12	3500	2.97	6200	4.89
900	1.20	3600	3.02	6300	5.00
1000	1.28	3700	3.07	6400	5.06
1100	1.35	3800	3.14	6500	5.13
1200	1.43	3900	3.20		
1300	1.50	4000	3.25		
1400	1.58	4100	3.32		
1500	1.65	4200	3.38		
1600	1.72	4300	3.46		

Cable loss
Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type
Suhner Switzerland, HL 4541

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	1700	0.45
15	0.03	1800	0.46
20	0.03	1900	0.48
30	0.04	2000	0.49
40	0.04	2100	0.52
50	0.05	2200	0.54
60	0.06	2300	0.55
70	0.06	2400	0.56
80	0.07	2500	0.58
90	0.07	2600	0.59
100	0.08	2700	0.61
150	0.10	2800	0.63
200	0.12	2900	0.64
300	0.15	3000	0.67
400	0.18	3100	0.70
500	0.20	3200	0.74
600	0.23	3300	0.77
700	0.25	3400	0.80
800	0.28	3500	0.82
900	0.30	3600	0.86
1000	0.31	3700	0.88
1100	0.33	3800	0.94
1200	0.35	3900	0.95
1300	0.37	4000	0.99
1400	0.39		
1500	0.41		
1600	0.43		



Cable loss
RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,
SF106A/11N/11N/6000MM, S/N 500849/6A
HL 5103

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	2.43
50	0.22	6000	2.54
100	0.31	6500	2.66
200	0.43	7000	2.76
300	0.53	7500	2.87
400	0.62	8000	2.97
500	0.69	8500	3.07
600	0.76	9000	3.17
700	0.82	9500	3.27
800	0.88	10000	3.36
900	0.94	10500	3.45
1000	0.99	11000	3.54
1100	1.04	11500	3.62
1200	1.08	12000	3.71
1300	1.13	12500	3.79
1400	1.17	13000	3.88
1500	1.21	13500	3.97
1600	1.26	14000	4.05
1700	1.30	14500	4.13
1800	1.33	15000	4.22
1900	1.37	15500	4.30
2000	1.41	16000	4.38
2500	1.59	16500	4.45
3000	1.75	17000	4.52
3500	1.90	17500	4.61
4000	2.04	18000	4.72
4500	2.17		
5000	2.30		

Cable loss
RF Cable, Huber-Suhner, 40 GHz, 5.5 m, K type,
SF102EA/11SK/11SK/5500MM, S/N 502493/2EA
HL 5111

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
100	0.69	20500	10.18
200	0.97	21000	10.32
300	1.18	21500	10.47
500	1.52	22000	10.60
1000	2.14	22500	10.75
1500	2.62	23000	10.87
2000	3.03	23500	11.00
2500	3.40	24000	11.12
3000	3.73	24500	11.23
3500	4.04	25000	11.35
4000	4.33	25500	11.52
4500	4.60	26000	11.64
5000	4.86	26500	11.73
5500	5.10	27000	11.84
6000	5.34	27500	11.93
6500	5.57	28000	12.05
7000	5.79	28500	12.19
7500	6.00	29000	12.33
8000	6.21	29500	12.44
8500	6.43	30000	12.53
9000	6.62	30500	12.58
9500	6.82	31000	12.71
10000	7.01	31500	12.86
10500	7.17	32000	13.00
11000	7.34	32500	13.11
11500	7.51	33000	13.24
12000	7.68	33500	13.33
12500	7.84	34000	13.44
13000	8.00	34500	13.58
13500	8.16	35000	13.69
14000	8.32	35500	13.81
14500	8.48	36000	13.93
15000	8.63	36500	14.05
15500	8.77	37000	14.24
16000	8.92	37500	14.28
16500	9.08	38000	14.38
17000	9.23	38500	14.50
17500	9.37	39000	14.61
18000	9.51	39500	14.70
18500	9.66	40000	14.83
19000	9.78		
19500	9.92		
20000	10.07		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT